

Date: 2008-09-08 Page 1 of 18

No. : HM162444

Applicant (NEB001): New Bright Industrial Co. Ltd.

9/F, New Bright Building, 11 Sheung Yuet Road

Kowloon Bay Hong Kong China

Manufacturer: New Bright Industrial Co. Ltd.

9/F, New Bright Building, 11 Sheung Yuet Road

Kowloon Bay Hong Kong China

Description of Samples: Product: Radio Control Toy Transmitter

Brand Name: NEW BRIGHT Model Number: G6D1085HK FCC ID: G6D1085HK

Date Samples Received: 2008-08-28

Date Tested: 2008-09-02

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2007 and ANSI C63.4:2003 for FCC Certification.

Conclusions: The submitted product COMPLIED with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks: ----

Dr. LEE Kam Chuen, ElectroMagnetic Compatibility Department For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2008-09-08 Page 2 of 18

No. : HM162444

CONTENT:

| | Cover Content | Page 1 of 18 Page 2-3 of 18 |
|------------|---|--------------------------------|
| <u>1.0</u> | General Details | |
| 1.1 | Test Laboratory | Page 4 of 18 |
| 1.2 | Applicant Details Applicant Manufacturer | Page 4 of 18 |
| 1.3 | Equipment Under Test [EUT] Description of EUT operation | Page 5 of 18 |
| 1.4 | Date of Order | Page 5 of 18 |
| 1.5 | Submitted Samples | Page 5 of 18 |
| 1.6 | Test Duration | Page 5 of 18 |
| 1.7 | Country of Origin | Page 5 of 18 |
| <u>2.0</u> | Technical Details | |
| 2.1 | Investigations Requested | Page 6 of 18 |
| 2.2 | Test Standards and Results Summary | Page 6 of 18 |
| <u>3.0</u> | <u>Test Results</u> | |
| 3.1 | Emission | Page 7-9 of 18 |
| 3.2 | Bandwidth Measurement | Page 10-11 of 18 |



Date: 2008-09-08 Page 3 of 18

No. : HM162444

Appendix A

List of Measurement Equipment Page 12 of 18

Appendix B

Duty Cycle Correction During 100 msec Page 13-16 of 18

Appendix C

Photographs Page 17-18 of 18



Date: 2008-09-08 Page 4 of 18

No. : HM162444

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

1.2 Applicant Details

Applicant

New Bright Industrial Co. Ltd. 9/F, New Bright Building, 11 Sheung Yuet Road Kowloon Bay Hong Kong China

Manufacturer

New Bright Industrial Co. Ltd. 9/F, New Bright Building, 11 Sheung Yuet Road Kowloon Bay Hong Kong China



Date: 2008-09-08 Page 5 of 18

No. : HM162444

1.3 Equipment Under Test [EUT] Description of Sample

Product: Radio Control Toy Transmitter
Manufacturer: New Bright Industrial Co. Ltd.

Brand Name: NEW BRIGTH Model Number: G6D1085HK

Rating: 3Vd.c. ("AA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a New Bright Industrial Co. Ltd., Radio Control Toy Transmitter. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2008-08-28

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2008-09-04

1.7 Country of Origin

China



Date : 2008-09-08 Page 6 of 18

No. : HM162444

2.0 <u>Technical Details</u>

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2007 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

| EMISSION Results Summary | | | | | | | | |
|--|------------------|-----------------|----------|------|------------|-----|--|--|
| Test Condition | Test Requirement | Test Method | Class / | Т | est Result | | | |
| | | | Severity | Pass | Failed | N/A | | |
| Field Strength of Fundamental Emissions & Spurious Emissions | FCC 47CFR 15.227 | ANSI C63.4:2003 | N/A | | | | | |
| Radiated Emissions | FCC 47CFR 15.209 | ANSI C63.4:2003 | N/A | | | | | |

Note: N/A - Not Applicable



Date: 2008-09-08 Page 7 of 18

No. : HM162444

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.227
Test Method: ANSI C63.4:2003
Test Date: 2008-09-02
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane on a standard radiated emission test site. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. In the frequency range of 9kHz to 30MHz, The center of the loop antenna shall be 1 meter above the ground and rotated loop axis for maximum reading. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

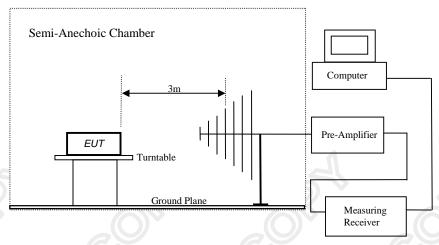



Date: 2008-09-08 Page 8 of 18

No. : HM162444

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

| Frequency Range of | Field Strength of | Field Strength of | |
|--------------------|----------------------|----------------------|--|
| Fundamental | Fundamental Emission | Fundamental Emission | |
| | [Peak] | [Average] | |
| [MHz] | $[\mu V/m]$ | $[\mu V/m]$ | |
| 26.96-27.28 | 100,000 | 10,000 | |

Results of Tx Mode: PASS

| Field Strength of Fundamental Emissions | | | | | | | | |
|---|---|--------|----------|-----------|-----------|------------|--|--|
| Peak Value | | | | | | | | |
| Frequency | Frequency Measured Correction Field Field Limit @3m E-Field | | | | | | | |
| | Level @3m | Factor | Strength | Strength | | Polarity | | |
| MHz | dΒμV | dB/m | dBμV/m | $\mu V/m$ | $\mu V/m$ | • | | |
| 27.145 | 55.00 | 10.5 | 65.5 | 1,883.6 | 100,000 | Horizontal | | |

| Field Strength of Fundamental Emissions Average | | | | | | | | | |
|---|-----------|------------|--------|----------|----------|--------|------------|--|--|
| Frequency | | | | | | | | | |
| 1 | Level @3m | Duty Cycle | Factor | Strength | Strength | | Polarity | | |
| MHz | dΒμV | dB | dB/m | dBμV/m | μV/m | μV/m | | | |
| 27.145 | 50.7 | -4.3 | 10.5 | 61.2 | 1,148.2 | 10,000 | Horizontal | | |

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty: 30MHz to 1GHz 5.2dB



Date : 2008-09-08 Page 9 of 18

No. : HM162444

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

| Frequency Range [MHz] | Quasi-Peak Limits [µV/m] |
|--------------------------|--------------------------|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx Mode: PASS

| Radiated Emissions Ouasi-Peak | | | | | | | | |
|----------------------------------|-----------|------------|----------|-----------|-----------|------------|--|--|
| Frequency | Measured | Correction | Field | Field | Limit @3m | E-Field | | |
| | Level @3m | Factor | Strength | Strength | | Polarity | | |
| MHz | $dB\mu V$ | dB/m | dBμV/m | $\mu V/m$ | $\mu V/m$ | | | |
| 54.29 | 17.4 | 8.7 | 26.1 | 20.2 | 100 | Horizontal | | |
| 81.44 | < 1.0 | 8.1 | < 9.1 | < 2.9 | 100 | Vertical | | |
| 108.58 | < 1.0 | 10.7 | < 11.7 | < 3.8 | 150 | Vertical | | |
| 135.73 | < 1.0 | 7.8 | < 8.8 | < 2.8 | 150 | Vertical | | |
| 162.87 | < 1.0 | 9.9 | < 10.9 | < 3.5 | 150 | Vertical | | |
| 190.02 | < 1.0 | 12.4 | < 13.4 | < 4.7 | 150 | Vertical | | |
| 214.30 | 13.4 | 12.3 | 25.7 | 19.3 | 150 | Vertical | | |
| 217.16 | < 1.0 | 12.8 | < 13.8 | < 4.9 | 200 | Vertical | | |
| 244.31 | < 1.0 | 15.0 | < 16.0 | < 6.3 | 200 | Vertical | | |
| 271.00 | 10.4 | 14.2 | 24.6 | 17.0 | 200 | Horizontal | | |
| 271.45 | < 1.0 | 16.1 | < 17.1 | < 7.2 | 200 | Vertical | | |

Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: 30MHz to 1GHz 5.2dB



Date: 2008-09-08 Page 10 of 18

No. : HM162444

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2008-09-02 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




Date : 2008-09-08 Page 11 of 18

No. : HM162444

Limits for 20dB Bandwidth of Fundamental Emission:

| Frequency Range | 20dB Bandwidth | FCC Limits |
|-----------------|----------------|--------------------|
| [MHz] | [KHz] | [MHz] |
| 27.145 | 14.108 | within 26.96-27.28 |

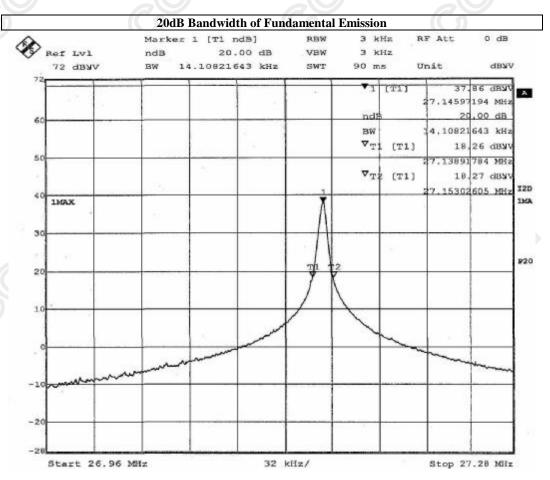



Date : 2008-09-08 Page 12 of 18

No. : HM162444

Appendix A

List of Measurement Equipment

Radiated Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL | DUE CAL |
|---------|-------------------------------|-----------------|-----------|------------|------------|------------|
| EM215 | MULTIDEVICE CONTROLER | EMCO | 2090 | 00024676 | N/A | N/A |
| EM216 | MINI MAST SYSTEM | EMCO | 2075 | 00026842 | N/A | N/A |
| EM217 | ELECTRIC POWERED TURNTABLE | EMCO | 2088 | 00029144 | N/A | N/A |
| EM218 | ANECHOIC CHAMBER | ETS-Linggren | FACT-3 | | 2006/05/02 | 2009/05/02 |
| EM174 | BICONILOG ANTENNA | EMCO | 3142C | 00029071 | 2008/01/24 | 2009/01/24 |
| EM181 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESIB7 | 100072 | 2008/06/16 | 2009/06/16 |
| EM022 | LOOP ANTENNA | EMCO | 6502 | 1189-2424 | 2006/07/26 | 2009/07/26 |

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined



Date: 2008-09-08 Page 13 of 18

No.: HM162444

Appendix B


Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (16.633msec) never exceeds a series of 4 long (1.3828msecsec) and 10 short (460.92μ secsec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered (4x1.3828msec)+(10x0.46092msec) per 16.633msec = 60.97% duty cycle. Figure A through D show the characteristics of the pulse train for one of these functions.

Remark:

Duty Cycle Correction = 20Log(0.6097) =-4.298dB (-20dB used as field strength of fundamental emissions calculation)

The following figures [Figure A to Figure D] show the characteristics of the pulse train for one of these functions.

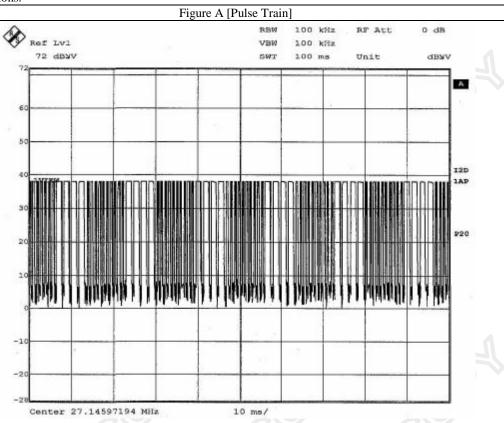


10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2008-09-08 Page 14 of 18


No. : HM162444

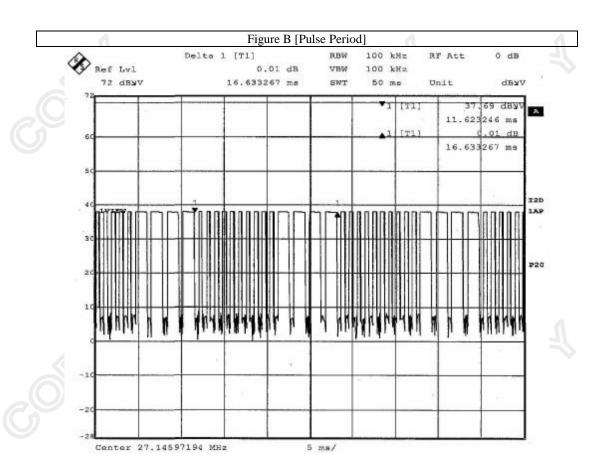



Date: 2008-09-08 Page 15 of 18


No. : HM162444

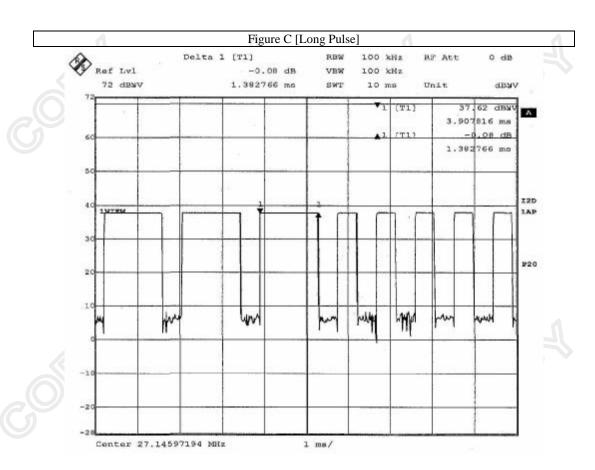



Date: 2008-09-08 Page 16 of 18

No. : HM162444

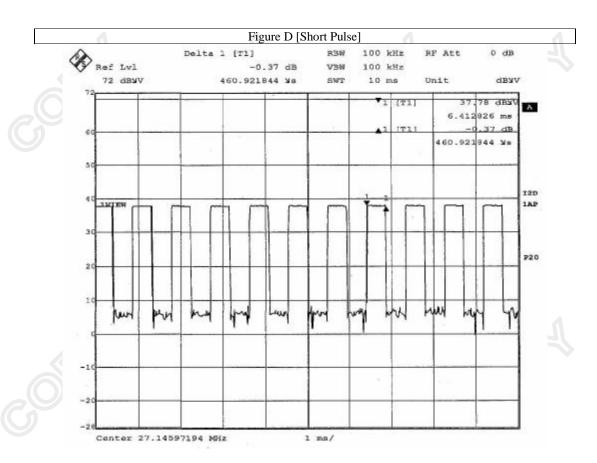



Date : 2008-09-08 Page 17 of 18

No. : HM162444

Appendix C

Photographs of EUT

Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View





Date : 2008-09-08 Page 18 of 18

No. : HM162444

Photographs of EUT

Measurement of Radiated Emission Test Set Up

White the state of the s

***** End of Test Report *****