


Date : 2007-10-25 No. : HM160294		Page 1 of 17
Applicant (NEB001):	NEW BRIGHT INDUSTF 9/F., NEW BRIGHT BUII 11 SHEUNG YUET ROA HONG KONG.	LDING,
Manufacturer:	NEW BRIGHT INDUSTF 9/F., NEW BRIGHT BUI 11 SHEUNG YUET ROA HONG KONG.	LDING,
Description of Samples:	Brand Name:New BModel Number:G6D20	Control Toy Transmitter right 22HHS 22HHS
Date Samples Received:	2007-10-17	
Date Tested: Investigation Requested:	accordance with FCC 47C	Interference measurement in FR [Codes of Federal Regulations] 63.4:2003 for FCC Certification.
Conclusions:	Federal Communications C Regulations Part 15. The	<u>MPLIED</u> with the requirements of Commission [FCC] Rules and tests were performed in accordance ed above and on Section 2.2 in this
Remarks:		
		Dr. LEE Kam Chuen, lagnetic Compatibility Department For and on behalf of ong Standards and Testing Centre Ltd.

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre Ltd.



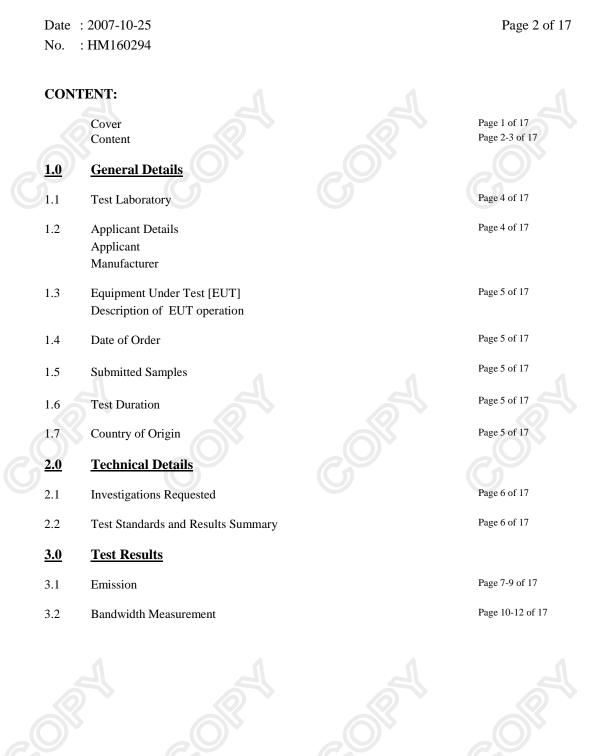

The Hong Kong Standards and Testing Centre Ltd.10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong KongTel: (852) 2666 1888Fax: (852) 2664 4353Homepage: www.hkstc.orgE-mail: hkstc@hkstc.org



Page 3 of 17

Appendix A

List of Measurement Equipment

Appendix B

Duty Cycle Correction During 100 msec

Appendix C

Photographs

Page 16-17 of 17

Page 14-15 of 17

Page 13 of 17





The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM160294

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 Applicant Details Applicant

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG.

Manufacturer

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 4 of 17




Page 5 of 17

1.3	Equipment Under Test [EUT]	
	Description of Sample	

Model Name: Manufacturer: Brand Name: Model Number: Input Voltage: Radio Control Toy Transmitter NEW BRIGHT INDUSTRIAL CO., LTD. New Bright G6D2022HHS 3Vd.c ("AA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a NEW BRIGHT INDUSTRIAL CO., LTD., Radio Control Toy Transmitter. The transmitter is a 2 joystick transmitter. The EUT continues to transmit while joystick is being pressed, It is joystick transmitter, Modulation by IC, and type is pulse modulation.

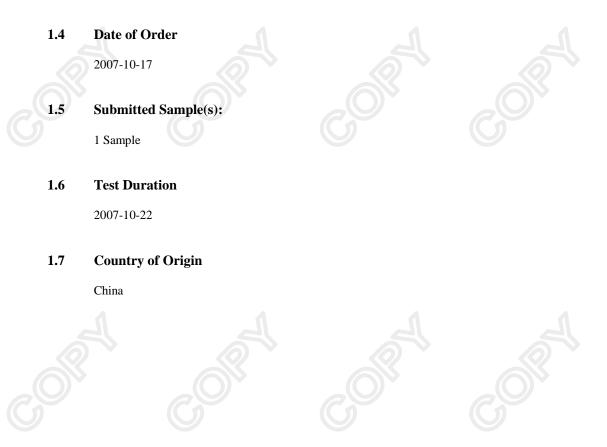

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM160294 Page 6 of 17

2.0 **Technical Details**

2.1 **Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2005 and ANSI C63.4:2003 for FCC Certification.

2.2 **Test Standards and Results Summary Tables EMISSION Results Summary** Test Condition **Test Requirement** Test Method Class / Test Result Severity Failed Pass FCC 47CFR 15.235 ANSI C63.4:2003 \boxtimes Field Strength of N/A Fundamental Emissions & Spurious Emissions Radiated Emissions, FCC 47CFR 15.209 ANSI C63.4:2003 N/A \boxtimes

Note: N/A - Not Applicable

30MHz to 1GHz



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org




Date	: 2007-10-25		Page 7 of 17
No.	: HM160294		
<u>3.0</u>	Test Results		
3.1	Emission		
3.1.1	Radiated Emissions (30) – 1000MHz)	
	Test Requirement:	FCC 47CFR 15.235	
	Test Method:	ANSI C63.4:2003	
	Test Date:	2007-10-22	
	Mode of Operation:	Tx mode	

Test Method:

The sample was placed 0.8m above the ground plane of Semi-Anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-Anechoic Chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

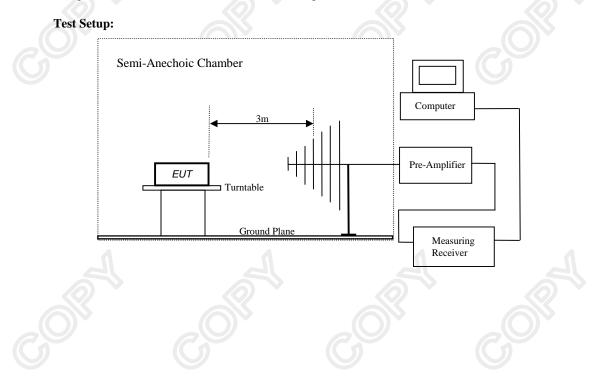

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 8 of 17

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	[µV/m]	[µV/m]
49.82-49.90	100,000	10,000

Results:

Field Strength of Fundamental Emissions								
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dBµV	dB/m	dBµV/m	μV/m	μV/m	-		
49.860	65.4	9.3	74.7	5,432.5	100,000	Vertical		

Field Strength of Fundamental Emissions								
Average								
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity	
MHz	dBµV	dB	dB/m	dBµV/m	μV/m	μV/m		
49.860	60.2	-5.2	9.3	69.5	2,985.4	10,000	Vertica	

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includ	des Antenna Facto	r and Cable A	Attenuation.		
Calculated measuremen	t uncertainty	: 30N	AHz to 1GHz	5.2dB	

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 9 of 17

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

ſ	Frequency Range	Quasi-Peak Limits
	[MHz]	[µV/m]
	30-88	100
	88-216	150
	216-960	200
	Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

	Radiated Emissions								
			Quasi-Peak						
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV	dB/m	dBµV/m	μV/m	μV/m				
99.7	22.6	8.8	31.4	37.2	150	Vertical			
149.6	21.5	9.3	30.8	34.7	150	Vertical			
199.4	< 1.0	11.5	< 12.5	< 4.2	150	Vertical			
249.3	< 1.0	15.9	< 16.9	< 7.0	200	Vertical			
299.2	< 1.0	17.4	< 18.4	< 8.3	200	Vertical			
349.0	< 1.0	16.8	< 17.8	< 7.8	200	Vertical			
398.9	< 1.0	17.3	< 18.3	< 8.2	200	Vertical			
448.7	< 1.0	20.5	< 21.5	< 11.9	200	Vertical			
498.6	< 1.0	20.6	< 21.6	< 12.0	200	Vertical			

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 10 of 17

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47 CFR 15.235 ANSI C63.4:2003 (Section 13.1.7) 2007-10-22 On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM160294

Page 11 of 17


Limits for 20dB Bandwidth of Fundamental Emission:

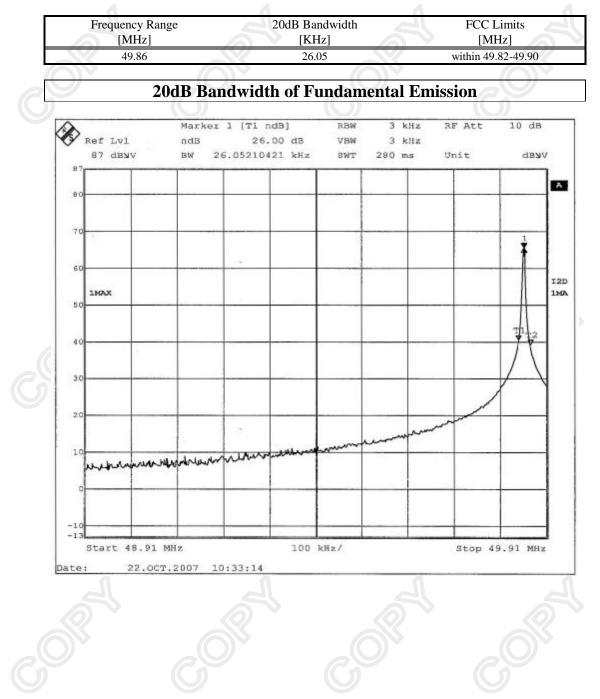

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 12 of 17

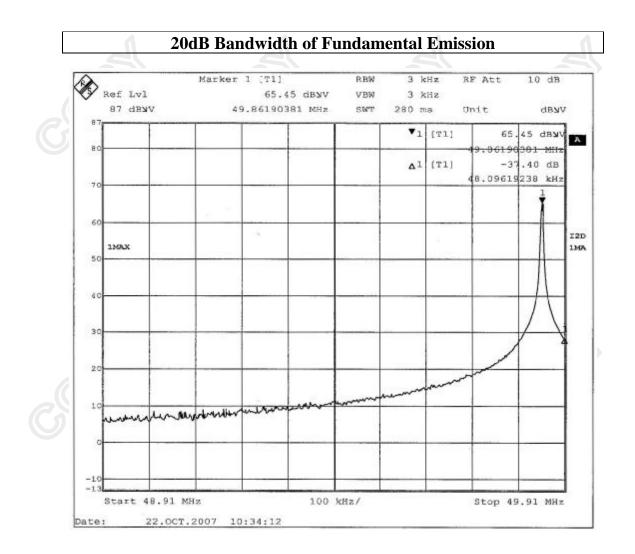



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM160294

Appendix A

List of Measurement Equipment

	Radiated Emission						
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL	
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	2006/12/29	2007/12/29	
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	2006/12/29	2007/12/29	
EM009	QUASIPEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	2006/12/29	2007/12/29	
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	2006/12/29	2007/12/29	
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	2006/12/29	2007/12/29	
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	2006/12/29	2007/12/29	
EM020	HORN ANTENNA	ETS-LINGGREN	3115	4032	2006/07/11	2008/07/11	
EM022	LOOP ANTENNA	ETS-LINGGREN	6502	1189-2424	2006/07/26	2008/07/26	
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 7	100072	22007/06/08	2008/06/08	
EM215	MULTIDEVICE CONTROLER	ETS-LINGGREN	2090	00024676	N/A	N/A	
EM216	MINI MAST SYSTEM	ETS-LINGGREN	2075	00026842	N/A	N/A	
EM217	ELECTRIC POWERED TURNTABLE	ETS-LINGGREN	2088	00029144	N/A	N/A	
EM218	ANECHOIC CHAMBER	ETS-LINGGREN	FACT-3		2007/05/02	2008/05/02	
EM219	BICONILOG ANTENNA	ETS-LINGGREN	3142C	00029071	2006/02/01	2008/02/01	
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 40	100248	2007/07/11	2008/07/11	

Remarks:-

- CM Corrective Maintenance
- N/A Not Applicable or Not Available
- TBD To Be Determined



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 13 of 17



Appendix B


Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (64.3msec) never exceeds a series of 4 long (1.5msec) or 58 short (501msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered $4x1.5+58x501\mu$ sec per 64.32msec=54.5% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.545) =-5.2dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

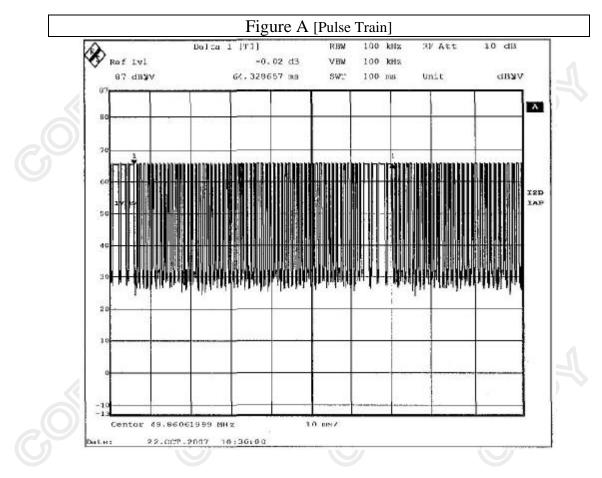

 The Hong Kong Standards and Testing Centre Ltd.

 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

 Tel: (852) 2666 1888
 Fax: (852) 2664 4353


 Homepage: www.hkstc.org
 E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 14 of 17



Page 15 of 17

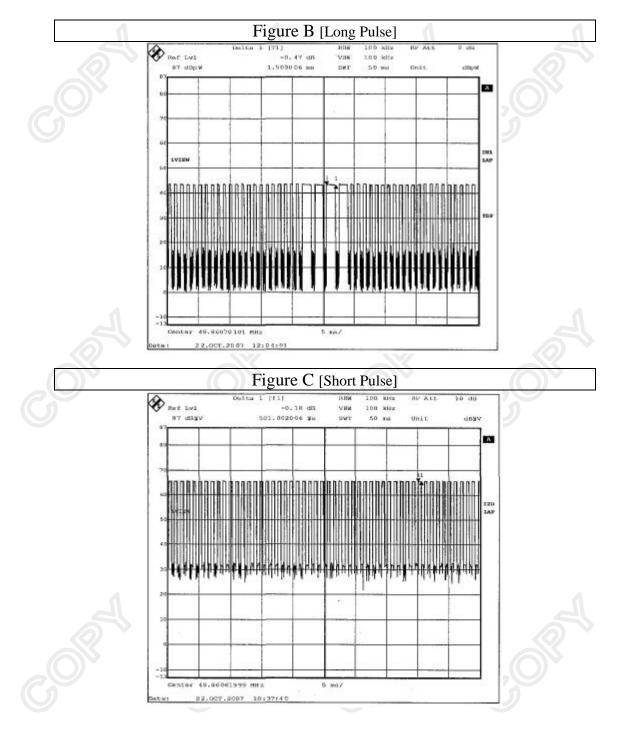

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 16 of 17

Appendix C

Photographs of EUT



Inner Circuit Top View



Inner Circuit Bottom View








The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 17 of 17

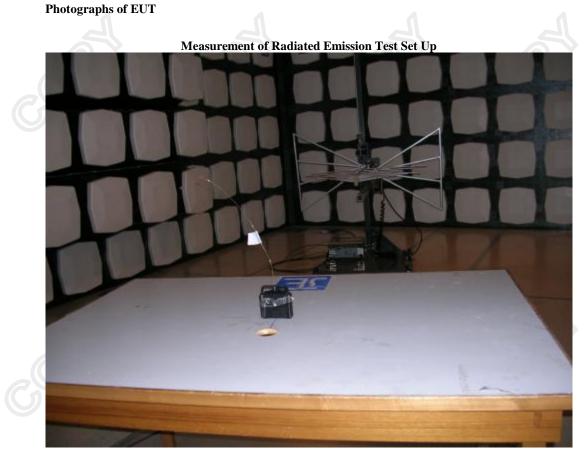

***** End of Test Report *****



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org