

Date: 2007-10-22 Page 1 of 17

No. : HM160270

Applicant (NEB001): NEW BRIGHT INDUSTRIAL CO., LTD.

9/F., NEW BRIGHT BUILDING,

11 SHEUNG YUET ROAD, KOWLOON BAY,

HONG KONG.

Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.

9/F., NEW BRIGHT BUILDING,

11 SHEUNG YUET ROAD, KOWLOON BAY,

HONG KONG.

Description of Samples: Product: Radio Control Toy Transmitter

Brand Name: New Bright
Model Number: G6D2022HKS
FCC ID: G6D2022HKS

Date Samples Received: 2007-10-12

Date Tested: 2007-10-18

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4:2003 for FCC Certification.

Conclusions: The submitted product COMPLIED with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks: ----

Dr. LEE Kam Chuen, ElectroMagnetic Compatibility Department For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-10-22 Page 2 of 17

No. : HM160270

CONTENT:

	Cover Content	Page 1 of 17 Page 2-3 of 17
1.0	General Details	
1.1	Test Laboratory	Page 4 of 17
1.2	Applicant Details Applicant Manufacturer	Page 4 of 17
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 17
1.4	Date of Order	Page 5 of 17
1.5	Submitted Samples	Page 5 of 17
1.6	Test Duration	Page 5 of 17
1.7	Country of Origin	Page 5 of 17
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 6 of 17
2.2	Test Standards and Results Summary	Page 6 of 17
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 7-9 of 17
3.2	Bandwidth Measurement	Page 10-12 of 17



Date: 2007-10-22 Page 3 of 17

No. : HM160270

Appendix A

Page 13 of 17 List of Measurement Equipment

Appendix B

Duty Cycle Correction During 100 msec Page 14-15 of 17

Appendix C

Page 16-17 of 17 Photographs



Date: 2007-10-22 Page 4 of 17

No. : HM160270

1.0 General Details

1.1 **Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd. **EMC Laboratory** 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 **Applicant Details Applicant**

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG.

Manufacturer

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG.



Date: 2007-10-22 Page 5 of 17

No. : HM160270

1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Radio Control Toy Transmitter

Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.

Brand Name: New Bright
Model Number: G6D2022HKS

Input Voltage: 3Vd.c ("AA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a NEW BRIGHT INDUSTRIAL CO., LTD., Radio Control Toy Transmitter. The transmitter is a 2 joystick transmitter. The EUT continues to transmit while joystick is being pressed, It is joystick transmitter, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2007-10-12

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2007-10-18

1.7 Country of Origin

China

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date : 2007-10-22 Page 6 of 17

No. : HM160270

Technical Details 2.0

2.1 **Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2005 and ANSI C63.4:2003 for FCC Certification.

2.2 **Test Standards and Results Summary Tables**

EMISSION Results Summary								
Test Condition	Test Requirement	Test Method	Class /	Test	Result			
			Severity	Pass	Failed			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	\boxtimes				
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A					

Note: N/A - Not Applicable



Date: 2007-10-22 Page 7 of 17

No. : HM160270

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.235
Test Method: ANSI C63.4:2003
Test Date: 2007-10-18
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of Semi-Anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-Anechoic Chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

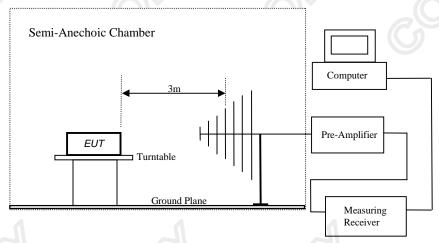

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date : 2007-10-22 Page 8 of 17

No. : HM160270

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15,235]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	$[\mu V/m]$	$[\mu V/m]$
49.82-49.90	100,000	10,000

Results:

Field Strength of Fundamental Emissions									
	Peak Value								
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field								
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m				
49.860	61.7	9.3	71.0	3,548.1	100,000	Vertical			

Field Strength of Fundamental Emissions										
	Average									
Frequency	Frequency Measured Adjusted by Correction Field Field Limit @3m E-Field									
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity			
MHz	dΒμV	dB	dB/m	dBµV/m	μV/m	μV/m				
49.860	56.4	-5.3	9.3	65.7	1,927.5	10,000	Vertical			

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB



Date: 2007-10-22 Page 9 of 17

No. : HM160270

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

	Radiated Emissions								
Quasi-Peak									
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength	\	Polarity			
MHz	dBµ∨	dB/m	dBμV/m	μV/m	μV/m				
99.7	24.5	8.8	33.3	46.2	150	Vertical			
149.6	15.6	9.3	24.9	17.6	150	Vertical			
199.4	< 1.0	11.5	< 12.5	< 4.2	150	Vertical			
249.3	< 1.0	15.9	< 16.9	< 7.0	200	Vertical			
299.2	< 1.0	17.4	< 18.4	< 8.3	200	Vertical			
349.0	< 1.0	16.8	< 17.8	< 7.8	200	Vertical			
398.9	< 1.0	17.3	< 18.3	< 8.2	200	Vertical			
448.7	< 1.0	20.5	< 21.5	< 11.9	200	Vertical			
498.6	< 1.0	20.6	< 21.6	< 12.0	200	Vertical			

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty 30MHz to 1GHz 5.2dB



Date: 2007-10-22 Page 10 of 17

No. : HM160270

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2007-10-18 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org




Date: 2007-10-22 Page 11 of 17

No. : HM160270

Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
49.86	24.85	within 49.82-49.90

20dB Bandwidth of Fundamental Emission

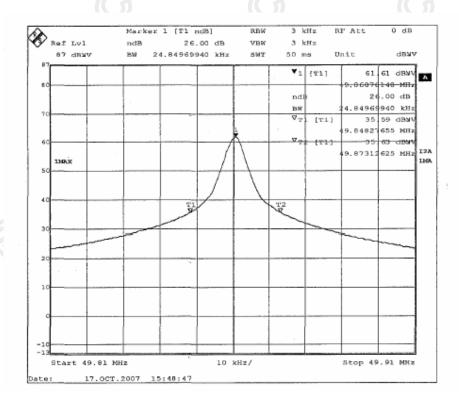




Date: 2007-10-22 Page 12 of 17

No. : HM160270

20dB Bandwidth of Fundamental Emission

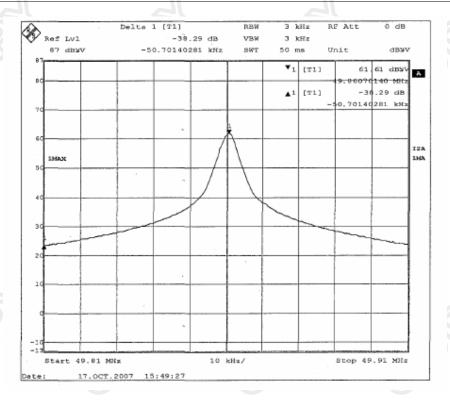



Date: 2007-10-22 Page 13 of 17

No. : HM160270

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	2006/12/29	2007/12/29
EM008	SPECTRUM ANALYZER HEWLETT PACKARD DISPLAY		HP85662A	3144A20514	2006/12/29	2007/12/29
EM009	QUASIPEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	2006/12/29	2007/12/29
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	2006/12/29	2007/12/29
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	2006/12/29	2007/12/29
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	2006/12/29	2007/12/29
EM020	HORN ANTENNA	ETS-LINGGREN	3115	4032	2006/07/11	2008/07/11
EM022	LOOP ANTENNA	ETS-LINGGREN	6502	1189-2424	2006/07/26	2008/07/26
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 7	100072	22007/06/08	2008/06/08
EM215	MULTIDEVICE CONTROLER	ETS-LINGGREN	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	ETS-LINGGREN	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	ETS-LINGGREN	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINGGREN	FACT-3		2007/05/02	2008/05/02
EM219	BICONILOG ANTENNA	ETS-LINGGREN	3142C	00029071	2006/02/01	2008/02/01
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 40	100248	2007/07/11	2008/07/11

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined

The Hang Kong Standards and Testing Control Idd



Date: 2007-10-22 Page 14 of 17

No. : HM160270

Appendix B

Duty Cycle Correction During 100msec


Each function key sends a different series of characters, but each packet period (46.29msec) never exceeds a series of 4 long (1.44msec) or 40 short (480.96 μ sec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered $4x1.44msec+40x480.96\mu$ sec per 46.29msec=54.0% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.54) = -5.3dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

Figure A [Pulse Train]

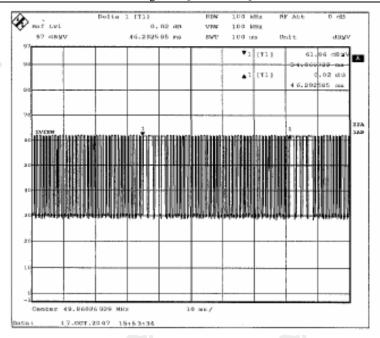



Date: 2007-10-22 Page 15 of 17

No. : HM160270


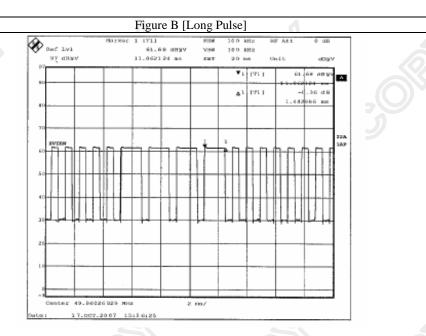


Figure C [Short Pulse]



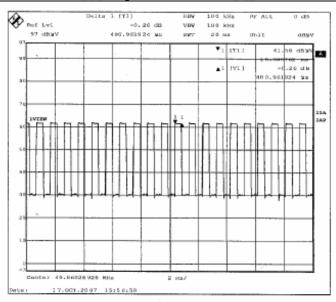


Date: 2007-10-22 Page 16 of 17

No. : HM160270

Appendix C

Photographs of EUT





Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View






Date: 2007-10-22 Page 17 of 17

No. : HM160270

Photographs of EUT

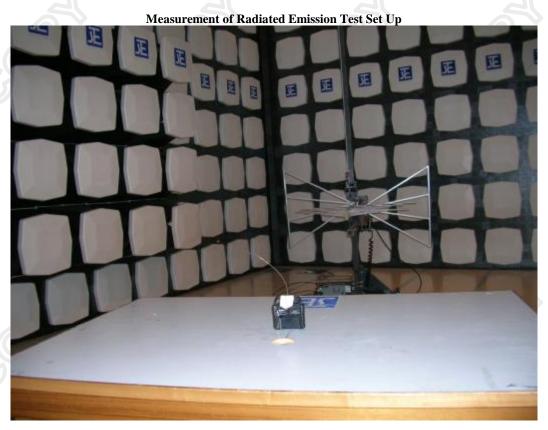

***** End of Test Report *****