

Date: 2010-06-03 Page 1 of 18

No. : HM165311

Applicant (NEB001): NEW BRIGHT INDUSTRIAL CO., LTD.

9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET

ROAD, KOWLOON BAY, KOWLOON, H.K.

Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.

9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET

ROAD, KOWLOON BAY, KOWLOON, H.K.

Description of Sample(s): Submitted samples(s) said to be

Product: Radio Control Toy Transmitter

Brand Name: NEW BRIGHT Model Number: G6D2022HKW FCC ID: G6D2022HKW

Date Sample(s) Received: 2010-05-25

Date Tested: 2010-05-31

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal

Regulations] Part 15: 2009 and ANSI C63.4:2003 for FCC

Certification.

Conclusion(s): The submitted product <u>COMPLIED</u> with the requirements

of Federal Communications Commission [FCC] Rules and

Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remark(s): ----

Dr. LEE Kam Chuen, Authorized Signatory

ElectroMagnetic Compatibility Department

For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2010-06-03 Page 2 of 18

No. : HM165311

Cover

CONTENT:

	Cover	Page 1 of 18 Page 2-3 of 18
1.0	General Details	
1.1	Test Laboratory	Page 4 of 18
1.2	Applicant Details Applicant Manufacturer	Page 4 of 18
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 18
1.4	Date of Order	Page 5 of 18
1.5	Submitted Sample(s)	Page 5 of 18
1.6	Test Duration	Page 5 of 18
1.7	Country of Origin	Page 5 of 18
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 6 of 18
2.2	Test Standards and Results Summary	Page 6 of 18
<u>3.0</u>	Test Results	
3.1	Emission	Page 7-9 of 18
3.2	Bandwidth Measurement	Page 10-12 of 18



Date: 2010-06-03 Page 3 of 18

: HM165311 No.

Appendix A

Page 13 of 18 List of Measurement Equipment

Appendix B

Page 14-16 of 18 Duty Cycle Correction During 100 msec

Appendix C

Page 17-18 of 18 Photographs of EUT



Date: 2010-06-03 Page 4 of 18

No. : HM165311

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 Applicant Details Applicant

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.

Manufacturer

NEW BRIGHT INDUSTRIAL CO., LTD.
9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.



Date: 2010-06-03 Page 5 of 18

No. : HM165311

1.3 Equipment Under Test [EUT] Description of Sample(s)

Submitted sample(s) said to be

Product: Radio Control Toy Transmitter

Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.

Brand Name: NEW BRIGHT Model Number: G6D2022HKW

Input Voltage: 3Vd.c. ("AA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a NEW BRIGHT INDUSTRIAL CO., LTD., Radio Control Toy Transmitter. The EUT is a transmitter of radio control toy. The transmitter was operating with button, the EUT continues to transmit while button is being on, It is pulse transmitter, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2010-05-25

1.5 Submitted Sample(s):

1 sample

1.6 Test Duration

2010-05-31

1.7 Country of Origin

China



Date: 2010-06-03 Page 6 of 18

No. : HM165311

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2009 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary								
Test Condition	Test Condition Test Requirement Test Method Class / Test Result							
			Severity	Pass	Failed			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	\boxtimes				
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A					

Note: N/A - Not Applicable



Date: 2010-06-03 Page 7 of 18

No. : HM165311

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.235
Test Method: ANSI C63.4:2003
Test Date: 2010-05-31
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

Test Setup:

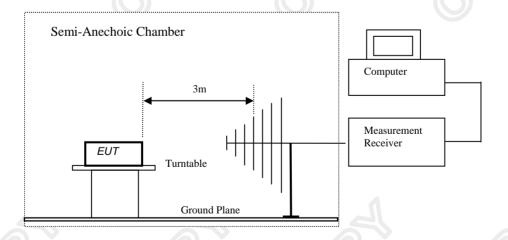



Date : 2010-06-03 Page 8 of 18

No. : HM165311

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of	Field Strength of	Field Strength of	
Fundamental	Fundamental Emission	Fundamental Emission	
	[Peak]	[Average]	
[MHz]	$[\mu V/m]$	$[\mu V/m]$	
49.82-49.90	100,000	10,000	

Results of Tx mode: PASS

Field Strength of Fundamental Emissions										
	Peak Value									
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field				
	Level @3m	Factor	Strength	Strength		Polarity				
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m	_				
49.86	73.6	8.6	82.2	12,882.5	100,000	Vertical				

Field Strength of Fundamental Emissions Average									
			Aver	age					
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB	dB/m	dBμV/m	μV/m	μV/m			
49.86	69.4	-4.20	8.6	78.0	7,943.3	10,000	Vertical		

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB



Date: 2010-06-03 Page 9 of 18

No. : HM165311

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]		
[WITIZ]	[μν/ΙΙΙ]		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx mode: PASS

Radiated Emissions										
	Quasi-Peak									
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field				
	Level @3m	Factor	Strength	Strength		Polarity				
MHz	$dB\mu V$	dB/m	dΒμV/m	μV/m	μV/m					
99.76	14.9	9.1	24.0	15.8	150	Vertical				
149.58	15.4	8.7	24.1	16.0	150	Vertical				
199.44	< 1.0	11.1	< 12.1	< 4.0	150	Vertical				
249.30	15.6	14.4	30.0	31.6	200	Vertical				
299.16	18.4	16.3	34.7	54.3	200	Vertical				
349.02	18.5	16.7	35.2	57.5	200	Vertical				
398.88	8.3	17.4	25.7	19.3	200	Vertical				
448.74	< 1.0	19.1	< 20.1	< 10.1	200	Vertical				
498.60	< 1.0	20.6	< 21.6	< 12.0	200	Vertical				

Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz.

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB



Date: 2010-06-03 Page 10 of 18

No. : HM165311

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2010-05-31 Mode of Operation: Tx mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




Date: 2010-06-03 Page 11 of 18

No. : HM165311

Limits for 20dB Bandwidth of Fundamental Emission:


Frequency Range [MHz]	20dB Bandwidth [KHz]	FCC Limits [MHz]
49.86	13.82	within 49.82-49.90

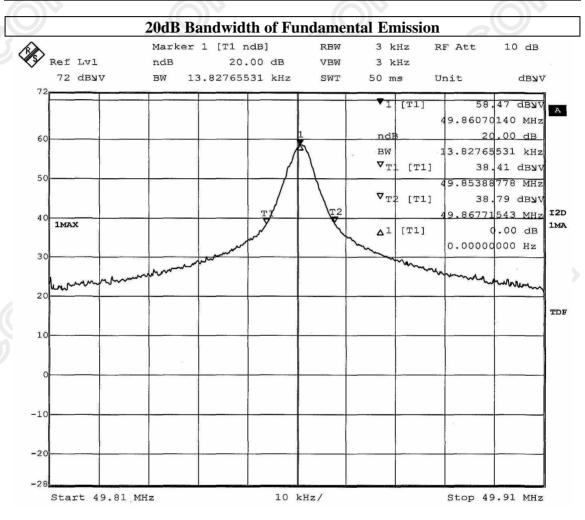



Date: 2010-06-03 Page 12 of 18

No. : HM165311

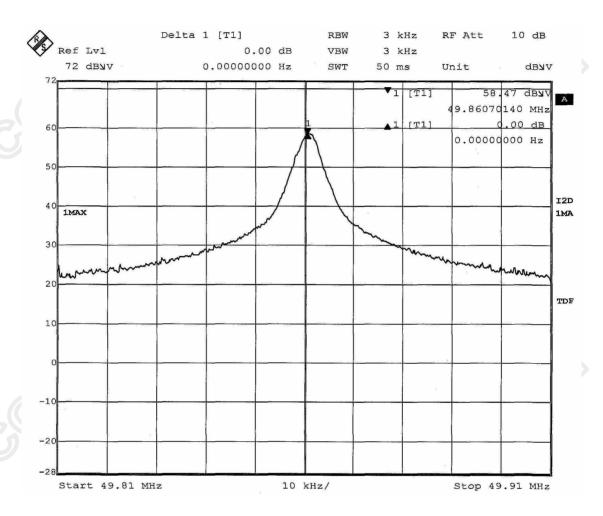



Date: 2010-06-03 Page 13 of 18

No. : HM165311

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM020	HORN ANTENNA	EMCO	3115	4032	2009/09/02	2010/09/02
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3		2008/12/01	2011/12/01
EM194	BICONILOG ANTENNA	EMCO	3142B	1795	2008/09/08	2010/09/08
EM229	EMI Test Receiver	R&S	ESIB40	100248	2009/09/27	2010/09/27
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2009/07/26	2011/07/26

Remarks:-

CM Corrective Maintenance

N/A Not Applicable **TBD** To Be Determined



Date: 2010-06-03 Page 14 of 18

No. : HM165311

Appendix B


Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period 100msec never exceeds a series of $24 \log (1.44 \text{msec})$ and $56 \text{ short} (480.96 \mu \text{sec})$ pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered (24x1.44 msec)+(56x0.481 msec) μsec per 100 msec 61.49% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.6149) = -4.2dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

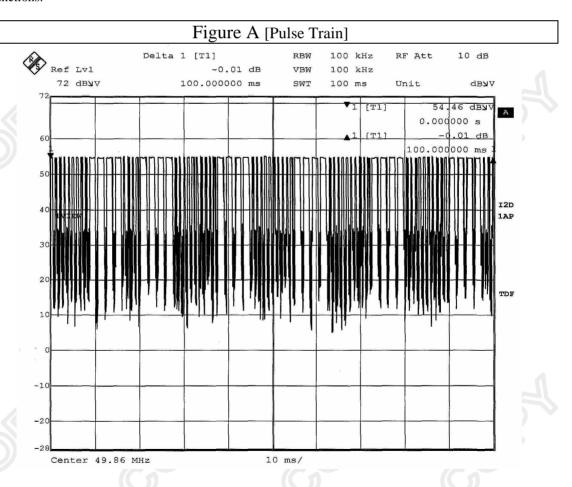

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2010-06-03 Page 15 of 18

No. : HM165311

Center 49.86 MHz

Figure B [Long Pulse] 100 kHz Delta 1 [T1] RBW RF Att 10 dB Ref Lvl -0.13 dB VBW 100 kHz 72 dByv 1.442886 ms SWT 20 ms Unit dByV [T1] 52.93 dByV 4.809619 ms 1.442886 ms I2D 1AP TDF


2 ms/



Date: 2010-06-03 Page 16 of 18

No. : HM165311

Figure C [Short Pulse]

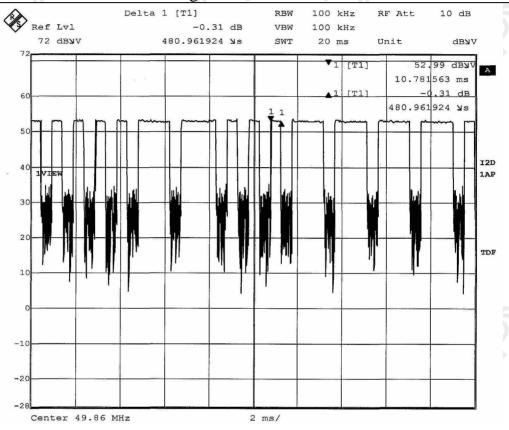

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2010-06-03 Page 17 of 18

No. : HM165311

Appendix C

Photographs of EUT


Front View of the product











The Hong Kong Standards and Testing Centre Ltd.


10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2010-06-03 Page 18 of 18

No. : HM165311

Photographs of EUT

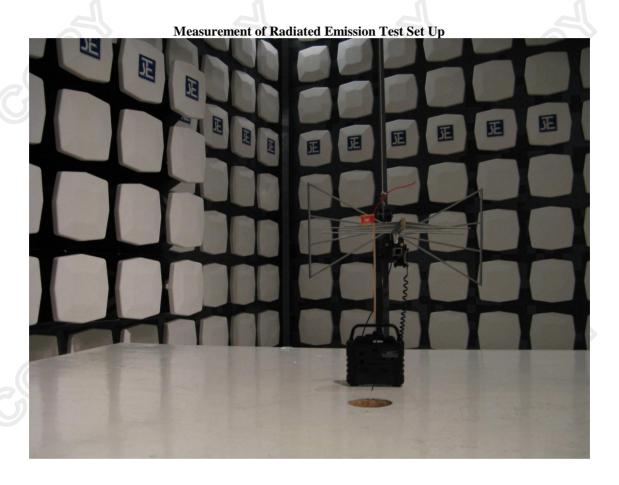

***** End of Test Report *****

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org