

Page 1 of 18

Applicant (NEB001):	NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.					
Manufacturer:	9/F., NEW BRIG	NDUSTRIAL CO., LTD. HT BUILDING, 11 SHEUNG YUET ON BAY, KOWLOON, H.K.				
Description of Sample(s):	Submitted sample Product: Brand Name: Model Number: FCC ID:	s(s) said to be Radio Control Toy Transmitter NEW BRIGHT G6D24244HKW G6D24244HKW				
Date Sample(s) Received:	2010-05-28					
Date Tested:	2010-06-02					
Investigation Requested:	accordance with H	lagnetic Interference measurement in FCC 47CFR [Codes of Federal 15: 2009 and ANSI C63.4:2003 for FCC				
Conclusion(s):	of Federal Comm Regulations Part	oduct <u>COMPLIED</u> with the requirements unications Commission [FCC] Rules and 15. The tests were performed in he standards described above and on 5 Test Report.				
Remark(s):						
	The	Dr. LEE Kam Chuen, Authorized Signatory ElectroMagnetic Compatibility Department For and on behalf of e Hong Kong Standards and Testing Centre Ltd.				

The Hong Kong Standards and Testing Centre Ltd.10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong KongTel: (852) 2666 1888Fax: (852) 2664 4353Homepage: www.hkstc.orgE-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre Ltd. For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of Homepage.



Date : 2010-06-07 No. : HM165346 **CONTENT:** Page 1 of 18 Cover Page 2-3 of 18 Content 1.0 **General Details** Page 4 of 18 1.1 Test Laboratory Page 4 of 18 1.2 **Applicant Details** Applicant Manufacturer 1.3 Equipment Under Test [EUT] Page 5 of 18 Description of EUT operation Page 5 of 18 1.4 Date of Order Page 5 of 18 1.5 Submitted Sample(s) Page 5 of 18 1.6 **Test Duration** Page 5 of 18 Country of Origin 1.7 2.0 **Technical Details** Page 6 of 18 2.1 **Investigations Requested** 2.2 Page 6 of 18 Test Standards and Results Summary <u>3.0</u> **Test Results** 3.1 Page 7-9 of 18 Emission Page 10-12 of 18 3.2 Bandwidth Measurement

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

Page 2 of 18



Page 3 of 18

<u>Appendix A</u>

List of Measurement Equipment

Appendix B

Duty Cycle Correction During 100 msec

Appendix C

Photographs of EUT

Page 17-18 of 18

Page 14-16 of 18

Page 13 of 18





The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM165346

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 Applicant Details Applicant

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.

Manufacturer

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 4 of 18



No. : HM165346

Page 5 of 18

1.3 Equipment Under Test [EUT] Description of Sample(s)

Submitted sample(s) said to beProduct:RacManufacturer:NEBrand Name:NEModel Number:G60Input Voltage:3Voltage

Radio Control Toy Transmitter NEW BRIGHT INDUSTRIAL CO., LTD. NEW BRIGHT G6D24244HKW 3Vd.c. ("AA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a NEW BRIGHT INDUSTRIAL CO., LTD., Radio Control Toy Transmitter. The EUT is a transmitter of radio control toy. The transmitter were operating with joysticks, the EUT continues to transmit while one of the joysticks is being trigged, It is pulse transmitter, Modulation by IC, and type is pulse modulation.

1.4	Date of Order 2010-05-28	
1.5	Submitted Sample(s): 1 sample	
1.6	Test Duration 2010-06-02	
1.7	Country of Origin	
	China	

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM165346

Page 6 of 18

2.0 <u>Technical Details</u>

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2009 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary								
Test Condition	Test Requirement	Test Method	Class /	Test	Result			
			Severity	Pass	Failed			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	\boxtimes				
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A	\boxtimes				

Note: N/A - Not Applicable



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 7 of 18

- 3.0 Test Results
- 3.1 Emission


3.1.1 Radiated Emissions (30 – 1000MHz)

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47CFR 15.235 ANSI C63.4:2003 2010-06-02 Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

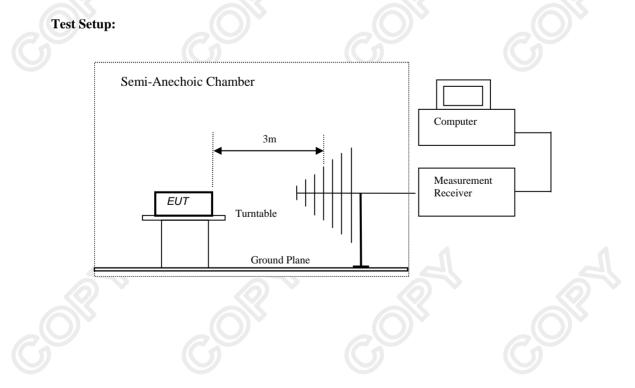

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM165346

Page 8 of 18

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

	Frequency Range of	Field Strength of	Field Strength of
	Fundamental	Fundamental Emission	Fundamental Emission
		[Peak]	[Average]
	[MHz]	[µV/m]	[µV/m]
Ċ	49.82-49.90	100,000	10,000

Results of Tx mode: PASS

Field Strength of Fundamental Emissions								
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m Factor Strength Strength Polarity							
MHz $dB\mu V$ dB/m $dB\mu V/m$ $\mu V/m$ $\mu V/m$								
49.86	60.1	9.4	69.5	2,985.4	100,000	Vertical		

Field Strength of Fundamental Emissions Average							
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity
MHz	dBµV	dB	dB/m	dBµV/m	μV/m	μV/m	
49.86	55.1	-5.02	9.4	64.5	1,678.8	10,000	Vertical

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.Calculated measurement uncertainty: 30MHz to 1GHz5.1dB



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 9 of 18

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx mode: PASS

Radiated Emissions									
Quasi-Peak									
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV	dB/m	dBµV/m	μV/m	μV/m				
99.72	11.0	9.2	20.2	10.2	150	Vertical			
149.58	8.7	9.4	18.1	8.0	150	Vertical			
199.44	< 1.0	11.1	< 12.1	< 4.0	150	Vertical			
249.30	< 1.0	14.4	< 15.4	< 5.9	200	Vertical			
299.16	13.0	15.4	28.4	26.3	200	Vertical			
349.02	< 1.0	16.7	< 17.7	< 7.7	200	Vertical			
398.88	< 1.0	17.4	< 18.4	< 8.3	200	Vertical			
448.74	< 1.0	19.1	< 20.1	< 10.1	200	Vertical			
498.60	< 1.0	20.6	< 21.6	< 12.0	200	Vertical			
798.10	0.1	24.8	24.9	17.6	200	Vertical			
959.60	0.5	26.8	27.3	23.2	200	Vertical			

Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz.

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 10 of 18

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47 CFR 15.235 ANSI C63.4:2003 (Section 13.1.7) 2010-06-02 Tx mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 11 of 18

No. : HM165346


Limits for 20dB Bandwidth of Fundamental Emission:

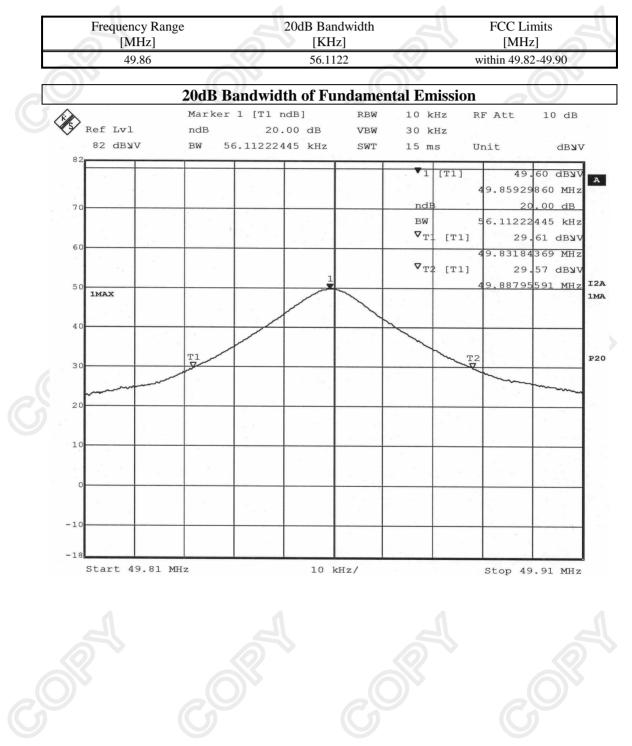

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 12 of 18

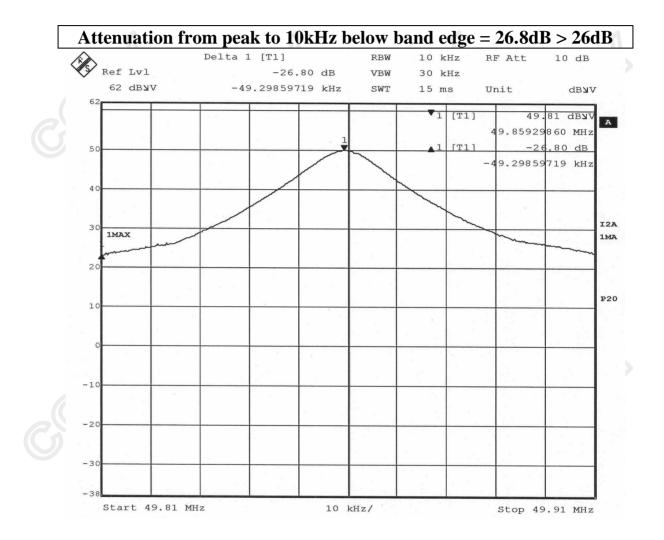



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM165346

Appendix A

List of Measurement Equipment

Page 13 of 18

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM020	HORN ANTENNA	EMCO	3115	4032	2009/09/02	2010/09/02
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3		2008/12/01	2011/12/01
EM194	BICONILOG ANTENNA	EMCO	3142B	1795	2008/09/08	2010/09/08
EM229	EMI Test Receiver	R&S	ESIB40	100248	2009/09/27	2010/09/27
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2009/07/26	2011/07/26

Remarks:-

- CM Corrective Maintenance
- N/A Not Applicable
- TBD To Be Determined





Appendix **B**


Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period 100msec never exceeds a series of 8 long (1.503msec) and 88 short (501.002 μ sec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered (8x1.503msec)+(88x0.501002msec) μ sec per 100msec 56.11% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.5611) =-5.019dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

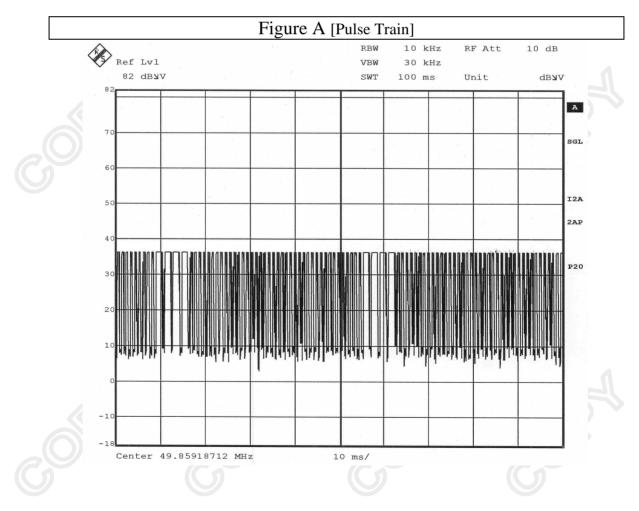


The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

Page 14 of 18



Page 15 of 18

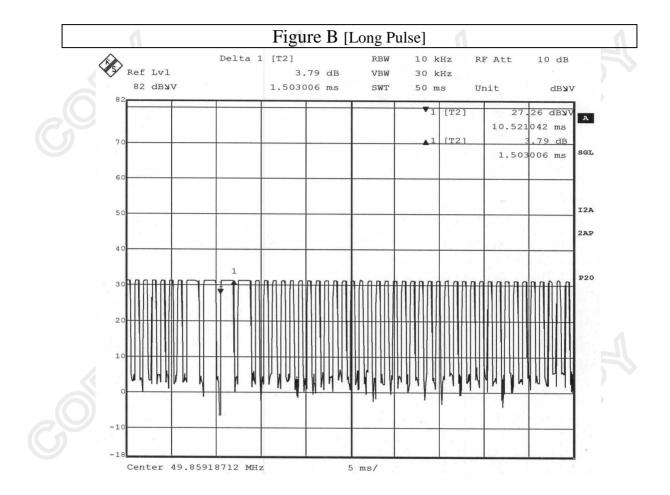




The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 16 of 18

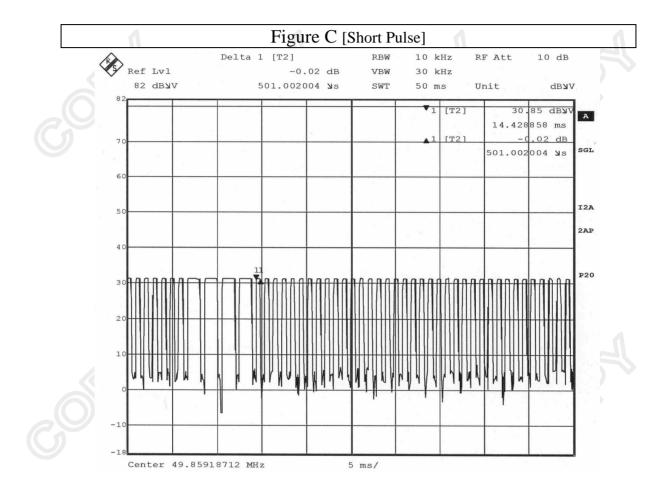



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 17 of 18










The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 18 of 18

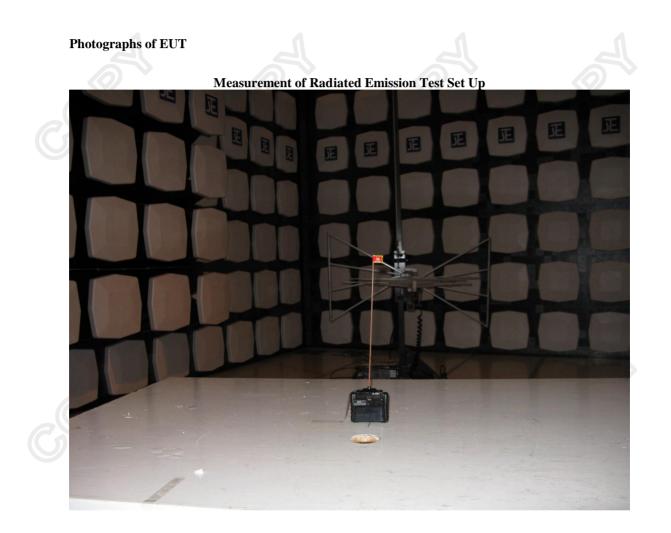

***** End of Test Report *****



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org