

Page 1 of 18

Applicant (NEB001):	NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.					
Manufacturer:	NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.					
Description of Samples:	Product: Brand Name: Model Number: FCC ID:	Radio Control Toy Transmitter NEW BRIGHT G6D2424HKW1 G6D2424HKW1				
Date Samples Received:	2010-05-28					
Date Tested:	2010-06-01					
Investigation Requested:	Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations Part 15: 2009 and ANSI C63.4:2003 for FCC Certification.					
Conclusions:	The submitted product <u>COMPLIED</u> with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.					

Remarks:

Dr. LEE Kam Chuen, Authorized Signatory ElectroMagnetic Compatibility Department

For and on behalf of The Hong Kong Standards and Testing Centre Ltd.

The Hong Kong Standards and Testing Centre Ltd.10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong KongTel: (852) 2666 1888Fax: (852) 2664 4353Homepage: www.hkstc.orgE-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre Ltd. For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of Homepage.





Date : 2010-06-07 No. : HM165345 **CONTENT:** Cover Page 1 of 18 Page 2-3 of 18 Content 1.0 **General Details** 1.1 Test Laboratory Page 4 of 18 1.2 Page 4 of 18 **Applicant Details** Applicant Manufacturer 1.3 Equipment Under Test [EUT] Page 5 of 18 Description of EUT operation 1.4 Date of Order Page 5 of 18 Page 5 of 18 1.5 Submitted Samples Page 5 of 18 1.6 **Test Duration** Page 5 of 18 Country of Origin 1.7 2.0 **Technical Details** Page 6 of 18 2.1 **Investigations Requested** 2.2 Page 6 of 18 Test Standards and Results Summary <u>3.0</u> **Test Results** 3.1 Page 7-9 of 18 Emission 3.2 Page 10-11 of 18 Bandwidth Measurement

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 2 of 18



Page 3 of 18

<u>Appendix A</u>

List of Measurement Equipment

Appendix B

Duty Cycle Correction During 100 msec

Appendix C

Photographs of EUT

Page 17-18 of 18

Page 13-16 of 18

Page 12 of 18





The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM165345

<u>1.0</u> General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone:852 2666 1888Fax:852 2664 4353

1.2 Applicant Details

Applicant

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.

Manufacturer

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 4 of 18





Page 5 of 18

1.3 Equipment Under Test [EUT] Description of Sample

Product: Manufacturer: Brand Name: Model Number: Rating:

Radio Control Toy Transmitter NEW BRIGHT INDUSTRIAL CO., LTD. NEW BRIGHT G6D2424HKW1 3Vd.c. ("AA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a NEW BRIGHT INDUSTRIAL CO., LTD., Radio Control Toy Transmitter. The EUT is a transmitter of radio control toy. The transmitter was operating with joysticks, the EUT continues to transmit while one of the joysticks is being pressed, It is pulse transmitter, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2010-05-28

Submitted Sample(s):

1 Sample

1.5

1.6 Test Duration

2010-06-01

1.7 Country of Origin

China





The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 6 of 18

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2009 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary								
Test Condition	Test Requirement	Test Method	Class /	Т	est Result			
			Severity	Pass	Failed	N/A		
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.227	ANSI C63.4:2003	N/A	\boxtimes				
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2003	N/A	\boxtimes				

Note: N/A - Not Applicable



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 7 of 18

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47CFR 15.227 ANSI C63.4:2003 2010-06-01 Tx mode

Test Method:

The sample was placed 0.8m above the ground plane on a standard radiated emission test site. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. In the frequency range of 9kHz to 30MHz, The center of the loop antenna shall be 1 meter above the ground and rotated loop axis for maximum reading. The emissions worst-case are shown in Test Results of the following pages.

Semi-anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

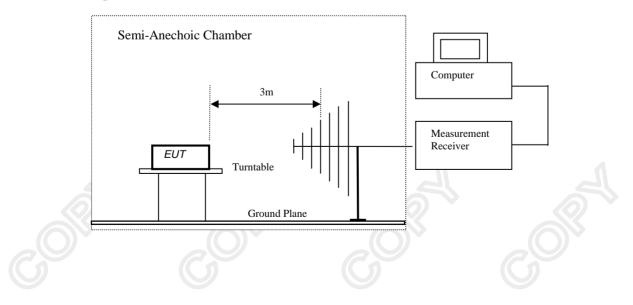

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM165345

Page 8 of 18

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Ī	Frequency Range of	Field Strength of	Field Strength of		
	Fundamental	Fundamental Emission	Fundamental Emission		
		[Peak]	[Average]		
	[MHz]	[µV/m]	[µV/m]		
	26.96-27.28	100,000	10,000		

Results of Tx Mode: PASS

Field Strength of Fundamental Emissions							
Peak Value							
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field						
	Level @3m Factor Strength Strength Polarity						
MHz	dBµV	dB/m	dBµV/m	μV/m	μV/m	_	
27.15	49.70	8.7	58.4	831.8	100,000	Horizontal	

Field Strength of Fundamental Emissions Average Value								
Frequency Measured Adjusted by Correction Field Field Limit @3m E-Field								
1	Level @3m	•	Factor	Strength	Strength		Polarity	
MHz	dBµV	dB	dB/m	dBµV/m	μV/m	μV/m		
27.15	44.6	-5.07	8.7	53.3	462.4	10,000	Horizontal	

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty: 30MHz to 1GHz 5.1dB



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 9 of 18

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [µV/m]		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx Mode: PASS

Radiated Emissions								
Quasi-Peak								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dBµV	dB/m	dBµV/m	μV/m	μV/m			
54.3	< 1.0	8.7	< 9.7	< 3.1	100	Vertical		
81.4	14.2	8.7	22.9	14.0	100	Horizontal		
108.6	< 1.0	9.2	< 10.2	< 3.2	150	Vertical		
135.7	< 1.0	9.1	< 10.1	< 3.2	150	Vertical		
162.9	< 1.0	10.8	< 11.8	< 3.9	150	Vertical		
190.0	< 1.0	11.3	< 12.3	< 4.1	150	Vertical		
217.2	11.8	12.4	24.2	16.2	200	Horizontal		
244.3	19.1	13.6	32.7	43.2	200	Horizontal		
271.4	21.2	14.3	35.5	59.6	200	Vertical		
298.6	12.1	15.2	27.3	23.2	200	Horizontal		

Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty: 30MHz to 1GHz 5.1dB



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 10 of 18

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47 CFR 15.227 ANSI C63.4:2003 (Section 13.1.7) 2010-06-01 On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 11 of 18

Limits for 20dB Bandwidth of Fundamental Emission:

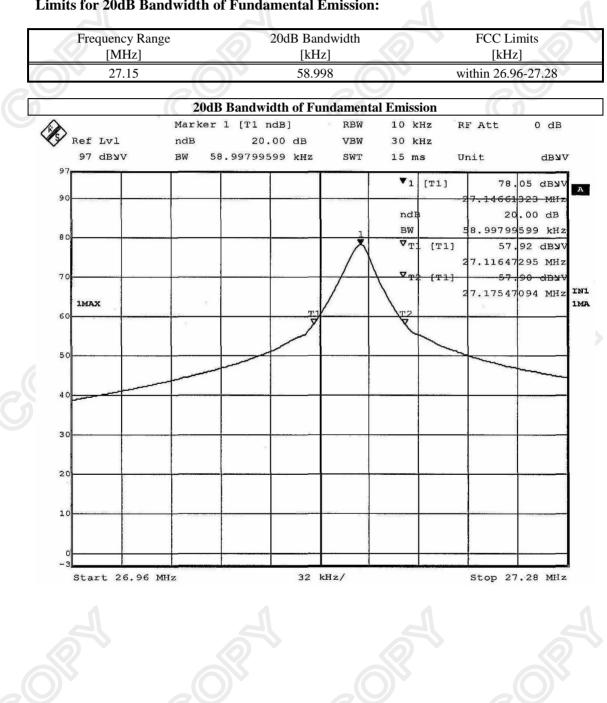

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM165345

Appendix A

EM022

List of Measurement Equipment

Radiated Emission									
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL			
EM020	HORN ANTENNA	EMCO	3115	4032	2009/09/02	2010/09/02			
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A			
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A			
EM217	ELECTRIC POWERED TURNTABLE	ЕМСО	2088	00029144	N/A	N/A			
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3		2008/12/01	2011/12/01			
EM194	BICONILOG ANTENNA	EMCO	3142B	1795	2008/09/08	2010/09/08			
EM229	EMI Test Receiver	R&S	ESIB40	100248	2009/09/27	2010/09/27			

6502

1189-2424

2009/07/26

2011/07/26

EMCO

Remarks:-

CM Corrective Maintenance

LOOP ANTENNA

- N/A Not Applicable or Not Available
- TBD To Be Determined

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 12 of 18



Appendix B

Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (100msec) never exceeds a series of 8 long pulses (1.403msec) and 89 short pulses (501.002 μ sec). Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered (8x1.403msec)+(89x0.501002 μ sec) per 100msec=55.81% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.5581) =-5.07dB Duty Cycle Correction =-20dB, if the calculation duty cycle correction >-20dB.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage


Page 13 of 18



Page 14 of 18

No. : HM165345

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

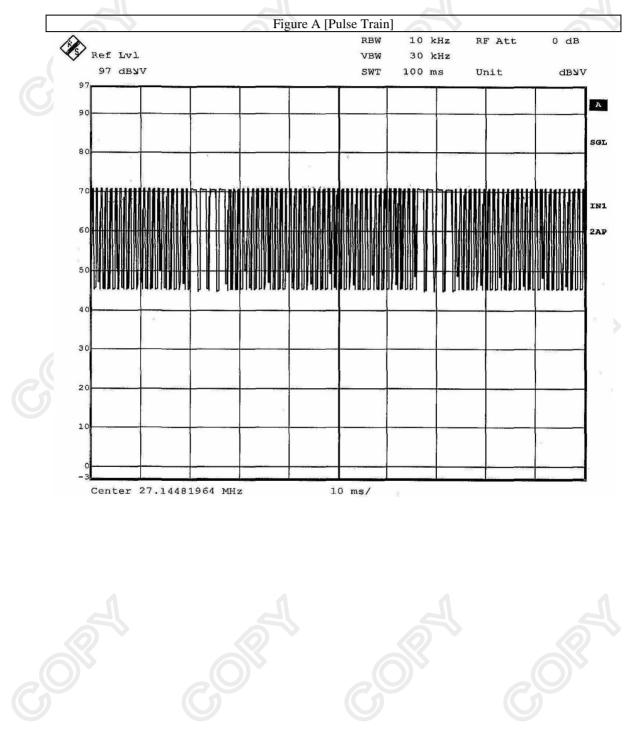

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 15 of 18

Figure B [Long Pulse] Marker 1 [T2] RBW 10 kHz RF Att 0 dB Ref Lvl 70.39 dBVV VBW 30 kHz 97 dBNV 35.070140 ms SWT 50 ms dBYV Unit ¥1 [T2] 70.39 dBNV A 90 070 1 1 .11 dB Δ1 [T2] - 0 SGL 1.402806 ms 81 1 70 IN1 6 2AP 50 40 30 20 10 Center 27.14481964 MHz 5 ms/




The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 16 of 18

No. : HM165345

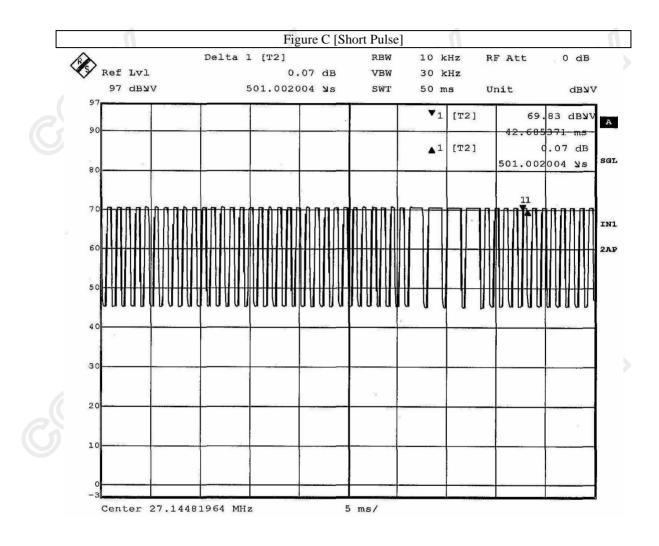



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org




No. : HM165345 Appendix C Photographs of EUT Front View of the product

Date : 2010-06-07

Inner Circuit Top View

Page 17 of 18



Rear View of the product


27 MHz

CORA CORA CORA CORA

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 18 of 18

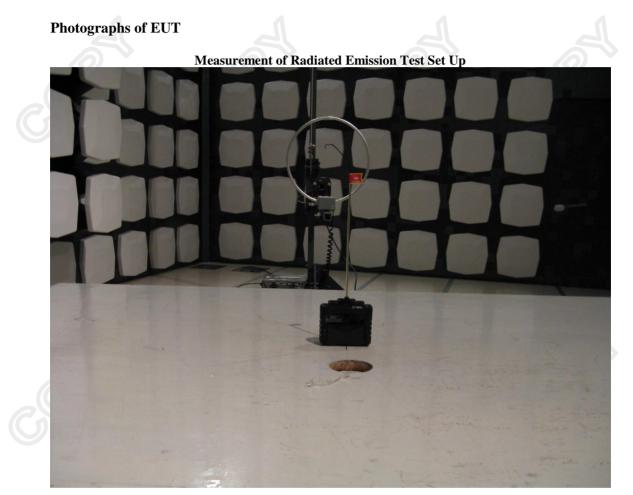

***** End of Test Report *****



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org