

# Testing Report

Customer Name: New Bright Industrial Co., Ltd.


Product Name: 2.4G Antenna

Sample Model: ANT NB001

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std 149-1979*

Issue Date: 2023.03.27

|                  |                   |
|------------------|-------------------|
| Engineer: Zkmis  | Date: 2023. 3.24  |
| Auditor: Eason   | Date: 2023.3.27   |
| Approver: Janson | Date: 2023. 3. 27 |



## Version

| Version No. | Date       | Description                   | Formulate | Approval |
|-------------|------------|-------------------------------|-----------|----------|
| A0          | 2023.03.27 | For the first time, formulate | Zkris     | Eason    |
|             |            |                               |           |          |
|             |            |                               |           |          |

## Contents

|                                                       |    |
|-------------------------------------------------------|----|
| 1.General Information .....                           | 3  |
| 1.1 General information of testing institutions ..... | 3  |
| 1.2 Testing principle .....                           | 3  |
| 1.3 Test equipment .....                              | 4  |
| 1.4 Test environment .....                            | 4  |
| 1.5 Statement .....                                   | 4  |
| 2.Sample Information .....                            | 5  |
| 2.1 Client information .....                          | 5  |
| 2.2 Description of EUT(S) .....                       | 5  |
| 2.3 EUT appearance .....                              | 6  |
| 2.4 EUT setup photo of free space OTA tesing .....    | 6  |
| 3.Test Results .....                                  | 7  |
| 3.1 Test standard .....                               | 7  |
| 3.2 Test uncertainty .....                            | 7  |
| 3.3 Test data .....                                   | 8  |
| 3.3.1 VSWR parameters .....                           | 8  |
| 3.3.2 VSWR data .....                                 | 8  |
| 3.3.3 Typical free space efficiency and gain .....    | 8  |
| 3.3.4 Typical free space radiation pattern .....      | 9  |
| (The following is blank) .....                        | 10 |

# 1. General Information


## 1.1 General information of testing institutions

|                  |                                                     |
|------------------|-----------------------------------------------------|
| <b>Name</b>      | Shenzhen RFI-LAB Communication Technology Co., Ltd. |
| <b>Address</b>   | /                                                   |
| <b>Tel</b>       | /                                                   |
| <b>E-mail</b>    | /                                                   |
| <b>Equipment</b> | /                                                   |

## 1.2 Testing principle



RayZone-5000 SIS0 Test Setup

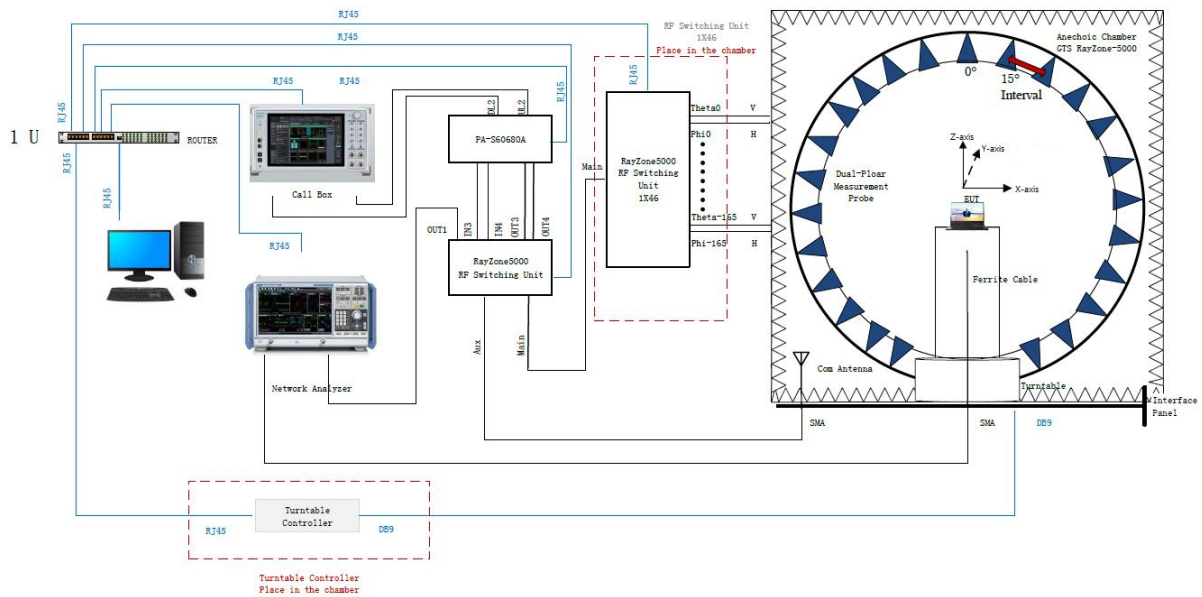

### 1.3 Test equipment

| Equipment        | Model No.    | Serial No.     | Manufacturer | Calibration date | Next calibration date |
|------------------|--------------|----------------|--------------|------------------|-----------------------|
| OTA Test System  | RayZone-5000 | RFI-LAB-RF-D00 | GTS          | 2023.3.14        | 2025.3.13             |
| Network Analyzer | E5071C       | RFI-LAB-RF-D01 | KEYSIGHT     | 2022.5.13        | 2023.5.12             |

### 1.4 Test environment

|             |           |
|-------------|-----------|
| Temperature | 22.2°C    |
| Humidity    | 57%RH     |
| Pressure    | 100.19kPa |

### 1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

## 2. Sample Information


### 2.1 Client information

|                     |                                                                           |
|---------------------|---------------------------------------------------------------------------|
| <b>Name</b>         | New Bright Industrial Co., Ltd.                                           |
| <b>Address</b>      | New Bright Building 11 Sheung Yuet Road, Kowloon Bay, Kowloon<br>Hongkong |
| <b>Contacts</b>     | /                                                                         |
| <b>Tel</b>          | /                                                                         |
| <b>E-mail</b>       | /                                                                         |
| <b>Manufacturer</b> | New Bright Industrial Co., Ltd.                                           |

### 2.2 Description of EUT(S)

|                        |                                                   |
|------------------------|---------------------------------------------------|
| <b>Product Name</b>    | 2.4G Antenna                                      |
| <b>Sample Model</b>    | ANT NB001                                         |
| <b>Antenna Size</b>    | /                                                 |
| <b>Serial No.</b>      | /                                                 |
| <b>Antenna Type</b>    | PCB Antenna                                       |
| <b>Test Item</b>       | VSWR; Antenna gain; Efficiency; Radiation pattern |
| <b>Frequency Range</b> | 2400-2500MHz                                      |
| <b>Received Date</b>   | 2023.03.23                                        |
| <b>Test Date</b>       | 2023.03.24                                        |
| <b>Remark</b>          | The length of the RF cable is 80mm                |

### 2.3 EUT appearance

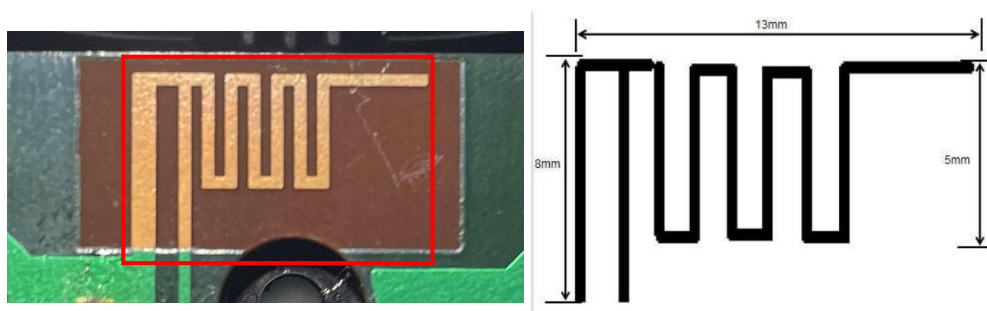


### 2.4 EUT setup photo of free space OTA testing

Planform



Front view

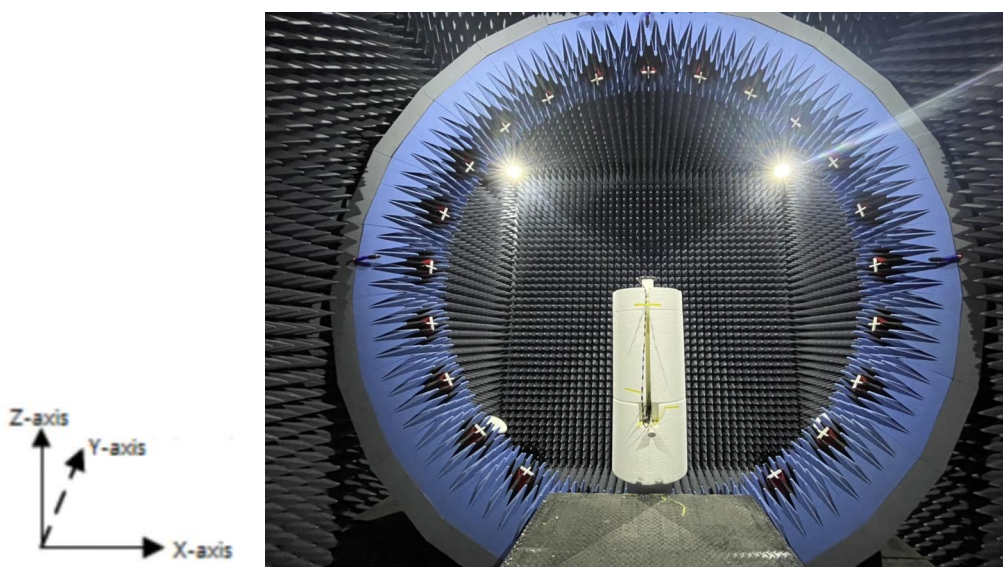

## 3. Test Results

### 3.1 Test standard

| Name                         | Parameter            | Method                                                               | Standard no.           |
|------------------------------|----------------------|----------------------------------------------------------------------|------------------------|
| Mobile communication antenna | Antenna gain         | Generic specification for antennas used in the mobile communications | GB/T 9410-2008         |
|                              | Radiation pattern    |                                                                      |                        |
|                              | VSWR                 |                                                                      |                        |
| Antenna                      | Radiation efficiency | IEEE Standard Test Procedures for Antennas                           | ANSI/IEEE Std 149-1979 |
|                              | Gain and directivity |                                                                      |                        |


### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of  $K=2$  and the 95% confidence level to express the extended uncertainty.

| Item                 | Uncertainty      |
|----------------------|------------------|
| VSWR                 | $\pm 0.3$        |
| Antenna gain         | $\pm 1\text{dB}$ |
| Radiation efficiency | $\pm 10\%$       |

### 3.3 Test data

#### 3.3.1 VSWR parameters

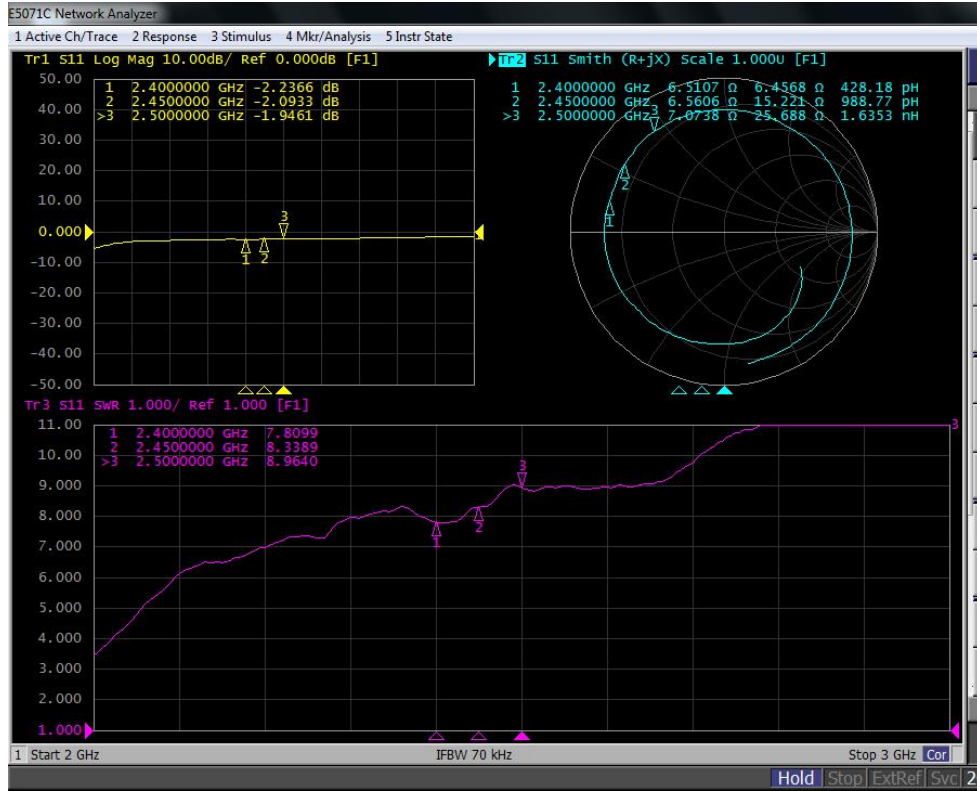

#### 3.3.2 VSWR data

|               |        |        |        |
|---------------|--------|--------|--------|
| Frequency/MHz | 2400   | 2450   | 2500   |
| VSWR          | 7.8099 | 8.3389 | 8.9640 |


#### 3.3.3 Typical free space efficiency and gain

|               |       |       |       |       |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Frequency/MHz | 2400  | 2410  | 2420  | 2430  | 2440  | 2450  | 2460  | 2470  | 2480  | 2490  | 2500  |
| Peak Gain/dBi | -4.13 | -3.81 | -3.81 | -3.75 | -3.75 | -3.57 | -3.34 | -3.34 | -3.34 | -3.26 | -3.10 |
| Efficiency/%  | 13.90 | 14.18 | 14.77 | 14.43 | 14.46 | 15.10 | 14.70 | 14.09 | 13.42 | 12.90 | 12.51 |






(3) X-Y Plane(unit:dBi):

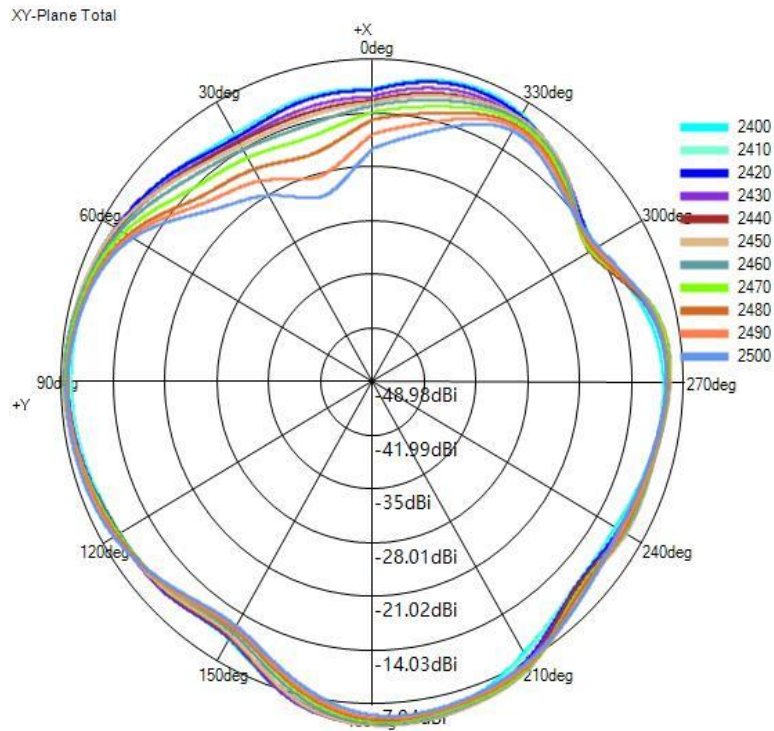

(4) Typical Free Space 3D Radiation Pattern at 2.5GHz(unit:dBi):

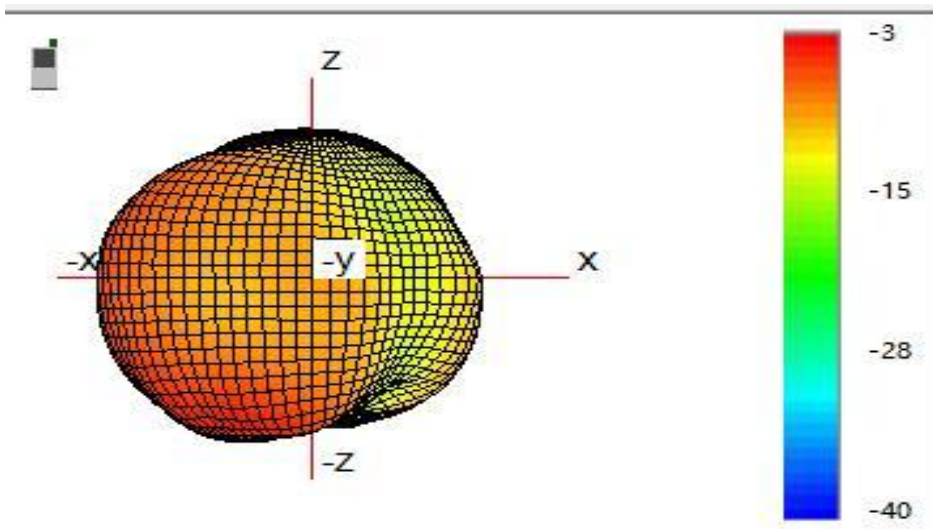

End

(The following is blank)