

# Testing Report

Customer Name: New Bright Industrial Co., Ltd.


Product Name: 2.4G Antenna

Sample Model: ANT NB001

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std 149-1979*

Issue Date: 2023.03.27

Engineer: Zkmis	Date: 2023. 3.24
Auditor: Eason	Date: 2023.3.27
Approver: Janson	Date: 2023. 3. 27

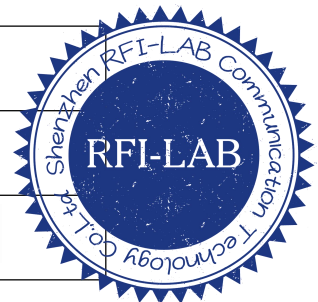

## Version

Version No.	Date	Description	Formulate	Approval
A0	2023.03.27	For the first time, formulate	Zkris	Eason

## Contents

1.General Information .....	3
1.1 General information of testing institutions .....	3
1.2 Testing principle .....	3
1.3 Test equipment .....	4
1.4 Test environment .....	4
1.5 Statement .....	4
2.Sample Information .....	5
2.1 Client information .....	5
2.2 Description of EUT(S) .....	5
2.3 EUT appearance .....	6
2.4 EUT setup photo of free space OTA tesing .....	6
3.Test Results .....	7
3.1 Test standard .....	7
3.2 Test uncertainty .....	7
3.3 Test data .....	8
3.3.1 VSWR parameters .....	8
3.3.2 VSWR data .....	8
3.3.3 Typical free space efficiency and gain .....	8
3.3.4 Typical free space radiation pattern .....	9
(The following is blank) .....	10

# 1. General Information


## 1.1 General information of testing institutions

<b>Name</b>	Shenzhen RFI-LAB Communication Technology Co., Ltd.
<b>Address</b>	/
<b>Tel</b>	/
<b>E-mail</b>	/
<b>Equipment</b>	/

## 1.2 Testing principle



RayZone-5000 SIS0 Test Setup

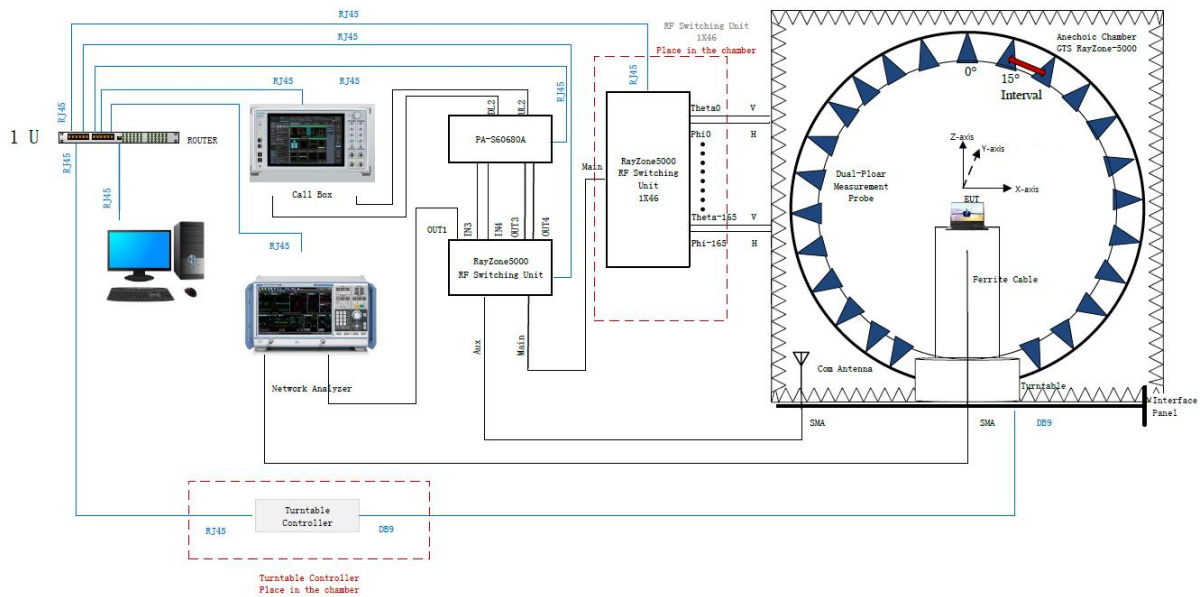

### 1.3 Test equipment

Equipment	Model No.	Serial No.	Manufacturer	Calibration date	Next calibration date
OTA Test System	RayZone-5000	RFI-LAB-RF-D00	GTS	2023.3.14	2025.3.13
Test Software	MaxSign Libra	Version - 1.2.5	GTS	N/A	N/A
Network Analyzer	E5071C	RFI-LAB-RF-D01	KEYSIGHT	2022.5.13	2023.5.12

### 1.4 Test environment

<b>Temperature</b>	22.2°C
<b>Humidity</b>	57%RH
<b>Pressure</b>	100.19kPa

### 1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

## 2. Sample Information


### 2.1 Client information

<b>Name</b>	New Bright Industrial Co., Ltd.
<b>Address</b>	New Bright Building 11 Sheung Yuet Road, Kowloon Bay, Kowloon Hongkong
<b>Contacts</b>	/
<b>Tel</b>	/
<b>E-mail</b>	/
<b>Manufacturer</b>	New Bright Industrial Co., Ltd.

### 2.2 Description of EUT(S)

<b>Product Name</b>	2.4G Antenna
<b>Sample Model</b>	ANT NB001
<b>Antenna Size</b>	/
<b>Serial No.</b>	/
<b>Antenna Type</b>	PCB Antenna
<b>Test Item</b>	VSWR; Antenna gain; Efficiency; Radiation pattern
<b>Frequency Range</b>	2400-2500MHz
<b>Received Date</b>	2023.03.23
<b>Test Date</b>	2023.03.24
<b>Remark</b>	The length of the RF cable is 80mm

### 2.3 EUT appearance

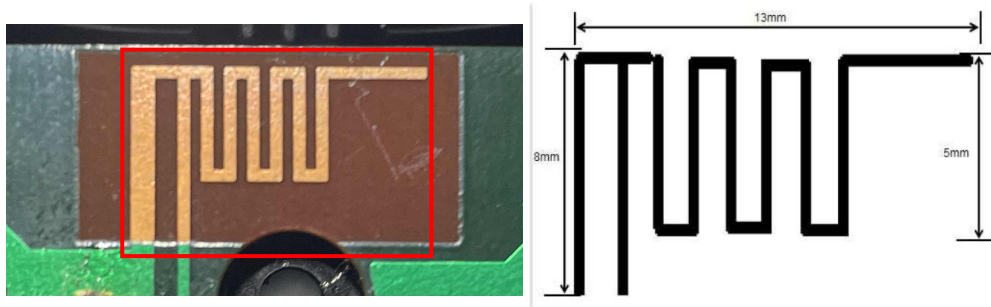


### 2.4 EUT setup photo of free space OTA testing

Planform



Front view

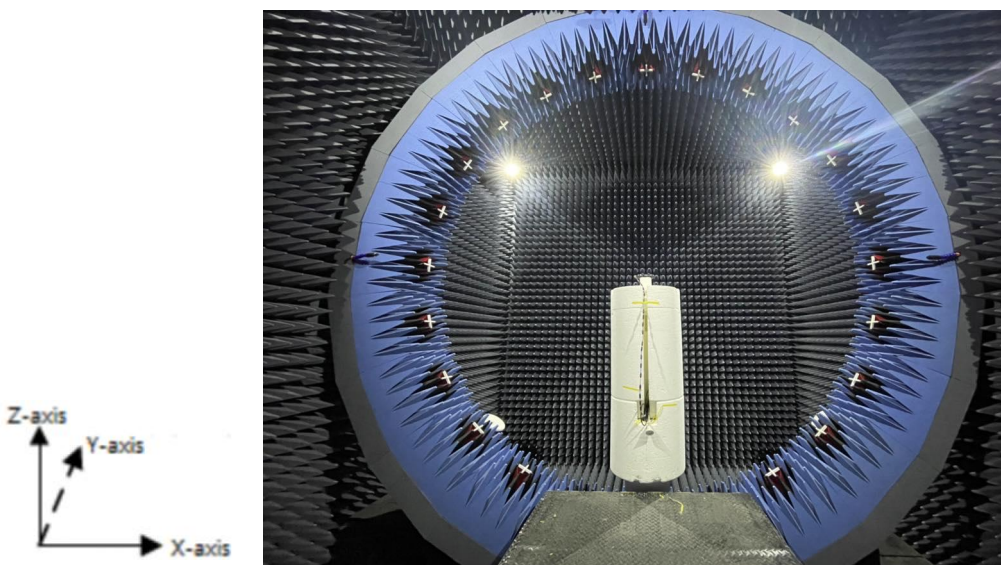

## 3. Test Results

### 3.1 Test standard

Name	Parameter	Method	Standard no.
Mobile communication antenna	Antenna gain	Generic specification for antennas used in the mobile communications	GB/T 9410-2008
	Radiation pattern		
	VSWR		
Antenna	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149-1979
	Gain and directivity		


### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of  $K=2$  and the 95% confidence level to express the extended uncertainty.

Item	Uncertainty
VSWR	$\pm 0.3$
Antenna gain	$\pm 1\text{dB}$
Radiation efficiency	$\pm 10\%$

### 3.3 Test data

#### 3.3.1 VSWR parameters

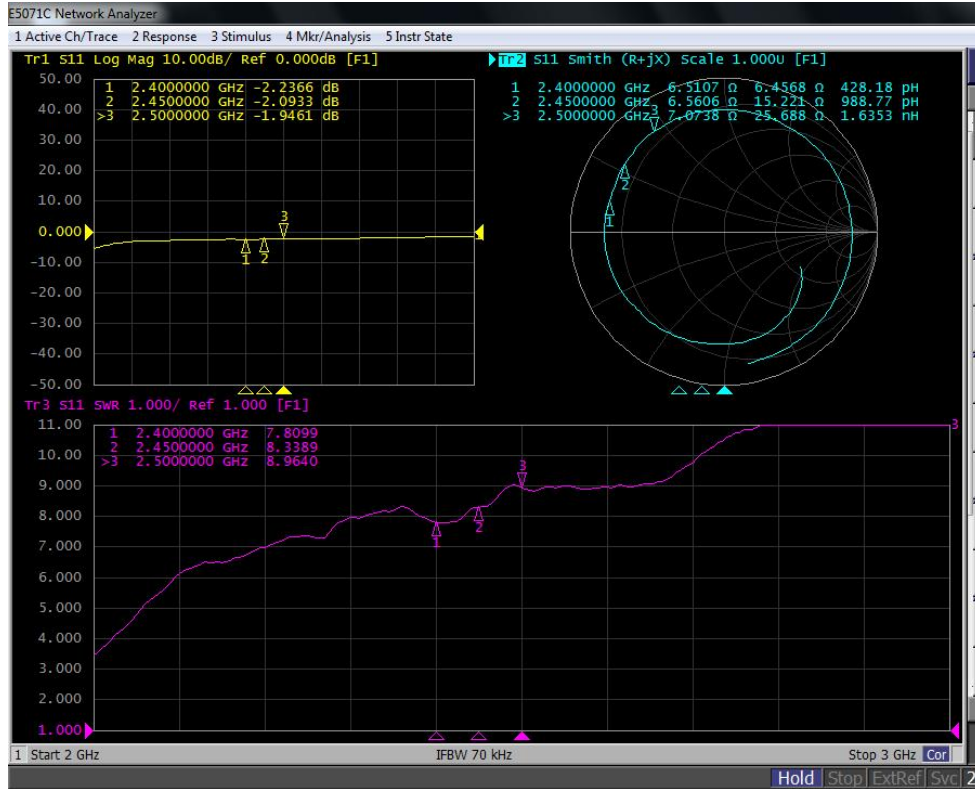

#### 3.3.2 VSWR data

Frequency/MHz	2400	2450	2500
VSWR	7.8099	8.3389	8.9640


#### 3.3.3 Typical free space efficiency and gain

Frequency/MHz	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain/dBi	-4.13	-3.81	-3.81	-3.75	-3.75	-3.57	-3.34	-3.34	-3.34	-3.26	-3.10
Efficiency/%	13.90	14.18	14.77	14.43	14.46	15.10	14.70	14.09	13.42	12.90	12.51




### 3.3.4 Typical free space radiation pattern


(1) X-Z Plane(unit:dBi):

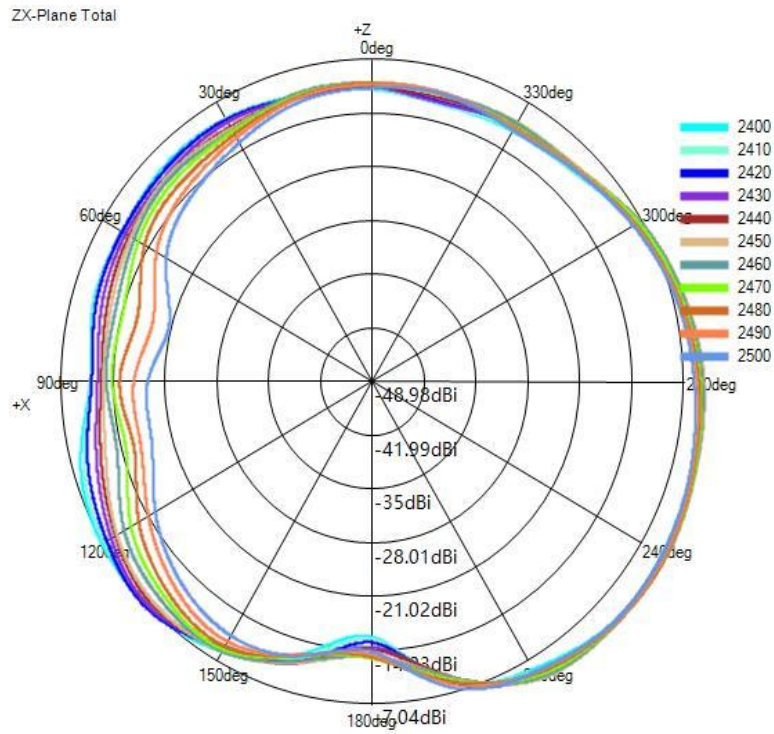


(2) Y-Z Plane(unit:dBi):

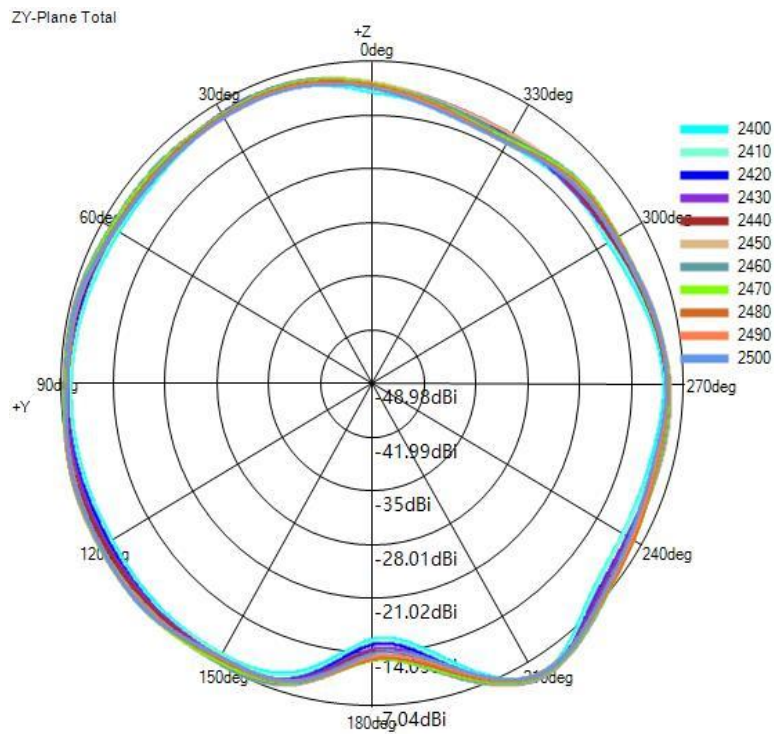

(3) X-Y Plane(unit:dBi):

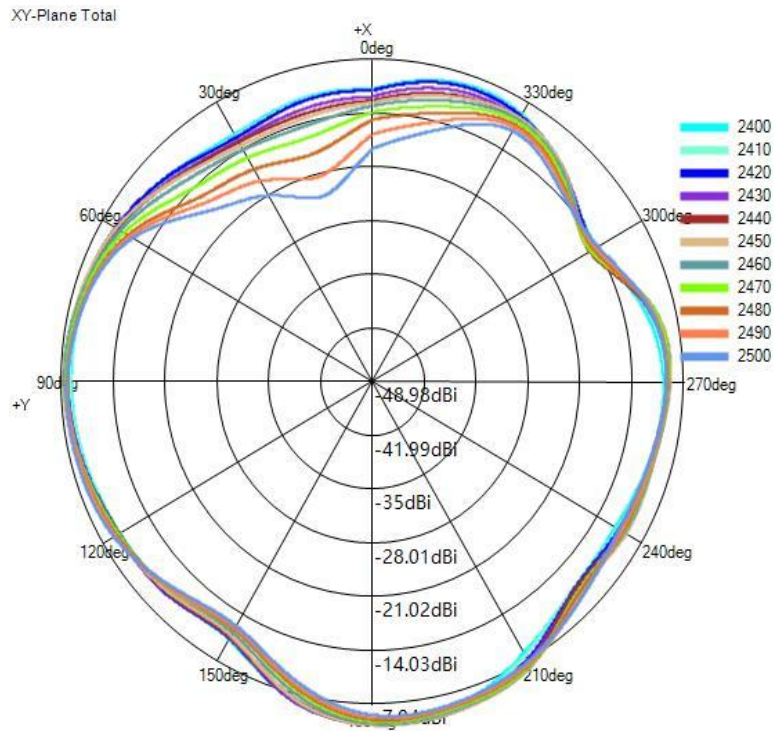

(4) Typical Free Space 3D Radiation Pattern at 2.5GHz(unit:dBi):

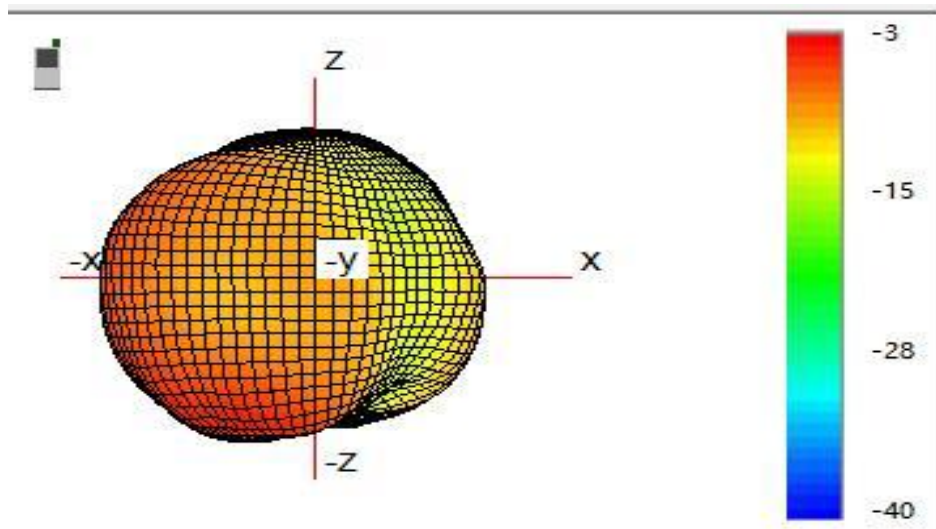

End

(The following is blank)