

Date: 2007-11-23 Page 1 of 18

No. : HM160517

NEW BRIGHT INDUSTRIAL CO., LTD. **Applicant (NEB001):**

9/F., NEW BRIGHT BUILDING,

11 SHEUNG YUET ROAD, KOWLOON BAY,

HONG KONG.

Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.

9/F., NEW BRIGHT BUILDING,

11 SHEUNG YUET ROAD, KOWLOON BAY

HONG KONG.

Description of Samples: Product: Radio Control Toy Transmitter

> **Brand Name:** New Bright Model Number: G6D6600HH FCC ID: G6D6600HH

Date Samples Received: 2007-11-06, 2007-11-13

Date Tested: 2007-11-08 to 2007-11-19

Investigation Requested: Perform ElectroMagnetic Interference measurement in

> accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4:2003 for FCC Certification.

Conclusions: The submitted product COMPLIED with the requirements of

> Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks:

Dr. LEE Kam Chuen, ElectroMagnetic Compatibility Department For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date : 2007-11-23 Page 2 of 18

No. : HM160517

CONTENT:

| | Cover Content | Page 1 of 18 Page 2-3 of 18 |
|------------|---|--------------------------------|
| 1.0 | General Details | |
| 1.1 | Test Laboratory | Page 4 of 18 |
| 1.2 | Applicant Details Applicant Manufacturer | Page 4 of 18 |
| 1.3 | Equipment Under Test [EUT] Description of EUT operation | Page 5 of 18 |
| 1.4 | Date of Order | Page 5 of 18 |
| 1.5 | Submitted Samples | Page 5 of 18 |
| 1.6 | Test Duration | Page 5 of 18 |
| 1.7 | Country of Origin | Page 5 of 18 |
| <u>2.0</u> | Technical Details | |
| 2.1 | Investigations Requested | Page 6 of 18 |
| 2.2 | Test Standards and Results Summary | Page 6 of 18 |
| <u>3.0</u> | <u>Test Results</u> | |
| 3.1 | Emission | Page 7-9 of 18 |
| 3.2 | Bandwidth Measurement | Page 10-12 of 18 |



Date: 2007-11-23 Page 3 of 18

No. : HM160517

Appendix A

Page 13 of 18 List of Measurement Equipment

Appendix B

Page 14-16 of 18 Duty Cycle Correction During 100 msec

Appendix C

Page 17-18 of 18 Photographs



Date: 2007-11-23 Page 4 of 18

No. : HM160517

1.0 **General Details**

1.1 **Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd. **EMC Laboratory** 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 **Applicant Details** Applicant

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG.

Manufacturer

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG.

The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong



Date: 2007-11-23 Page 5 of 18

No. : HM160517

1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Radio Control Toy Transmitter

Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.

Brand Name: New Bright Model Number: G6D6600HH

Input Voltage: 3Vd.c ("AA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a NEW BRIGHT INDUSTRIAL CO., LTD., Radio Control Toy Transmitter. The transmitter is a 2 trigger transmitter. The EUT continues to transmit while trigger is being pressed, It is trigger transmitter, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2007-11-06, 2007-11-13

1.5 Submitted Sample(s):

2 Samples

1.6 Test Duration

2007-11-08 to 2007-11-19

1.7 Country of Origin

China

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-11-23 Page 6 of 18

No. : HM160517

2.0 Technical Details

Investigations Requested 2.1

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2005 and ANSI C63.4:2003 for FCC Certification.

2.2 **Test Standards and Results Summary Tables**

| EMISSION Results Summary | | | | | | | | |
|--|---|-----------------|----------|-------------|--------|--|--|--|
| Test Condition | Test Condition Test Requirement Test Method Class / Test Result | | | | | | | |
| | | | Severity | Pass | Failed | | | |
| Field Strength of Fundamental Emissions & Spurious Emissions | FCC 47CFR 15.235 | ANSI C63.4:2003 | N/A | \boxtimes | | | | |
| Radiated Emissions, 30MHz to 1GHz | FCC 47CFR 15.209 | ANSI C63.4:2003 | N/A | \boxtimes | | | | |

Note: N/A - Not Applicable



Date: 2007-11-23 Page 7 of 18

No.: HM160517

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.235
Test Method: ANSI C63.4:2003
Test Date: 2007-11-17
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of Semi-Anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-Anechoic Chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

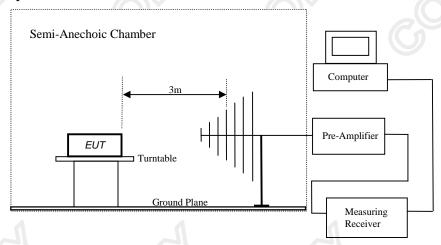



Date : 2007-11-23 Page 8 of 18

No. : HM160517

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15,235]:

| Frequency Range of | Field Strength of | Field Strength of |
|--------------------|----------------------|----------------------|
| Fundamental | Fundamental Emission | Fundamental Emission |
| | [Peak] | [Average] |
| [MHz] | $[\mu V/m]$ | $[\mu V/m]$ |
| 49.82-49.90 | 100,000 | 10,000 |

Results:

| Field Strength of Fundamental Emissions | | | | | | | | | | |
|---|---|--------|----------|----------|---------|----------|--|--|--|--|
| | Peak Value | | | | | | | | | |
| Frequency | Frequency Measured Correction Field Field Limit @3m E-Field | | | | | | | | | |
| | Level @3m | Factor | Strength | Strength | | Polarity | | | | |
| MHz | dΒμV | dB/m | dBμV/m | μV/m | μV/m | - | | | | |
| 49.860 | 74.0 | 9.3 | 83.3 | 14,621.8 | 100,000 | Vertical | | | | |

| Field Strength of Fundamental Emissions | | | | | | | | | |
|---|-----------|-------------|------------|----------|----------|-----------|----------|--|--|
| Average | | | | | | | | | |
| Frequency | Measured | Adjusted by | Correction | Field | Field | Limit @3m | E-Field | | |
| | Level @3m | Duty Cycle | Factor | Strength | Strength | | Polarity | | |
| MHz | dΒμV | dB | dB/m | dBµV/m | μV/m | μV/m | | | |
| 49.860 | 45.4 | -28.6 | 9.3 | 54.7 | 543.3 | 10,000 | Vertical | | |

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-11-23 Page 9 of 18

No. : HM160517

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

| Frequency Range | Quasi-Peak Limits |
|-----------------|-------------------|
| [MHz] | $[\mu V/m]$ |
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

| | Radiated Emissions | | | | | | | | |
|------------|--|--------|----------|----------|------|----------|--|--|--|
| Quasi-Peak | | | | | | | | | |
| Frequency | Frequency Measured Correction Field Field Limit @3m E- | | | | | | | | |
| | Level @3m | Factor | Strength | Strength | 0. | Polarity | | | |
| MHz | dΒμV | dB/m | dBµV/m | μV/m | μV/m | | | | |
| 99.7 | 30.1 | 8.8 | 38.9 | 88.1 | 150 | Vertical | | | |
| 149.6 | 23.2 | 9.3 | 32.5 | 42.2 | 150 | Vertical | | | |
| 199.4 | 26.1 | 11.9 | 38.0 | 79.4 | 150 | Vertical | | | |
| 249.3 | < 1.0 | 15.9 | < 16.9 | < 7.0 | 200 | Vertical | | | |
| 299.2 | < 1.0 | 17.4 | < 18.4 | < 8.3 | 200 | Vertical | | | |
| 349.0 | < 1.0 | 16.8 | < 17.8 | < 7.8 | 200 | Vertical | | | |
| 398.9 | < 1.0 | 17.3 | < 18.3 | < 8.2 | 200 | Vertical | | | |
| 448.7 | < 1.0 | 20.5 | < 21.5 | < 11.9 | 200 | Vertical | | | |
| 498.6 | < 1.0 | 20.6 | < 21.6 | < 12.0 | 200 | Vertical | | | |

No further spurious emissions found between lowest internal frequency and 30MHz.

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty 30MHz to 1GHz 5.2dB



Date: 2007-11-23 Page 10 of 18

No. : HM160517

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2007-11-17 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Ltd.




Date: 2007-11-23 Page 11 of 18

No. : HM160517

Limits for 20dB Bandwidth of Fundamental Emission:

| Frequency Range | 20dB Bandwidth | FCC Limits |
|-----------------|----------------|--------------------|
| [MHz] | [KHz] | [MHz] |
| 49.86 | 39.08 | within 49.82-49.90 |

20dB Bandwidth of Fundamental Emission

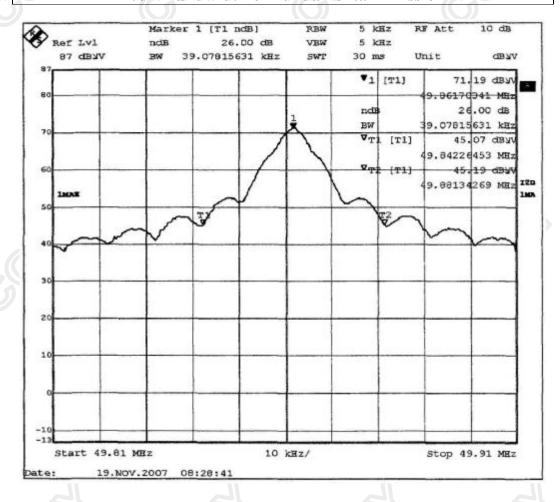




Date: 2007-11-23 Page 12 of 18

No. : HM160517

20dB Bandwidth of Fundamental Emission

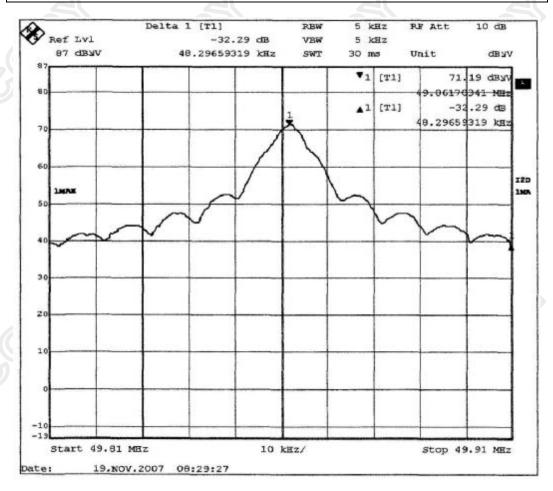



Date : 2007-11-23 Page 13 of 18

No. : HM160517

Appendix A

List of Measurement Equipment

Radiated Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL | DUE CAL |
|---------|--|-----------------|-----------|------------|-------------|------------|
| EM007 | SPECTRUM ANALYZER | HEWLETT PACKARD | HP85660B | 3144A21192 | 2006/12/29 | 2007/12/29 |
| EM008 | SPECTRUM ANALYZER HEWLETT PACKAI DISPLAY | | HP85662A | 3144A20514 | 2006/12/29 | 2007/12/29 |
| EM009 | QUASIPEAK ADAPTOR | HEWLETT PACKARD | HP85650A | 3303A01702 | 2006/12/29 | 2007/12/29 |
| EM010 | RF PRESELECTOR | HEWLETT PACKARD | HP85685A | 3221A01410 | 2006/12/29 | 2007/12/29 |
| EM011 | ATTENUATOR/SWITCH | HEWLETT PACKARD | HP11713A | 2508A10595 | 2006/12/29 | 2007/12/29 |
| EM012 | PRE-AMPLIFIER | HEWLETT PACKARD | HP8449B | 3008A00262 | 2006/12/29 | 2007/12/29 |
| EM020 | HORN ANTENNA | ETS-LINGGREN | 3115 | 4032 | 2006/07/11 | 2008/07/11 |
| EM022 | LOOP ANTENNA | ETS-LINGGREN | 6502 | 1189-2424 | 2006/07/26 | 2008/07/26 |
| EM181 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESIB 7 | 100072 | 22007/06/08 | 2008/06/08 |
| EM215 | MULTIDEVICE CONTROLER | ETS-LINGGREN | 2090 | 00024676 | N/A | N/A |
| EM216 | MINI MAST SYSTEM | ETS-LINGGREN | 2075 | 00026842 | N/A | N/A |
| EM217 | ELECTRIC POWERED TURNTABLE | ETS-LINGGREN | 2088 | 00029144 | N/A | N/A |
| EM218 | ANECHOIC CHAMBER | ETS-LINGGREN | FACT-3 | | 2007/05/02 | 2008/05/02 |
| EM219 | BICONILOG ANTENNA | ETS-LINGGREN | 3142C | 00029071 | 2006/02/01 | 2008/02/01 |
| EM229 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESIB 40 | 100248 | 2007/07/11 | 2008/07/11 |

Remarks:-

Corrective Maintenance CM

N/A Not Applicable or Not Available

TBD To Be Determined



Date: 2007-11-23 Page 14 of 18

No. : HM160517

Appendix B


Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (100msec) never exceeds a series of 2 long (581.16μsec), 2 short 1 (300.6μsec) and 20 short 2 (100.2μsec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 2x581.16μsec+2x300.6μsec+20x100.2μsec per 100msec=3.7% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.037) =-28.6dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

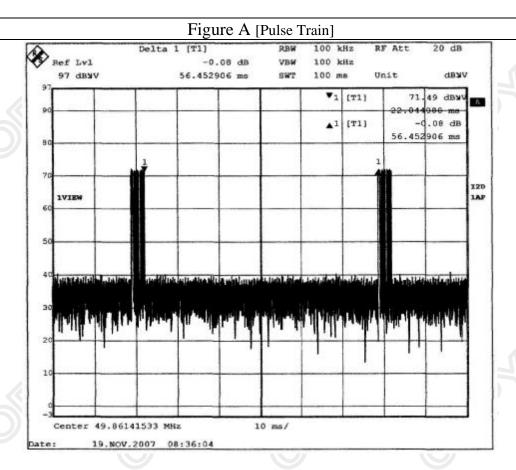

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-11-23 Page 15 of 18

No. : HM160517

Figure B [Long Pulse]


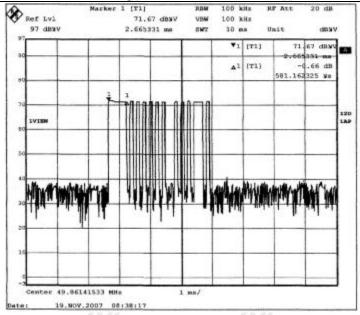


Figure C [Short Pulse 1]




The Hong Kong Standards and Testing Centre Ltd.

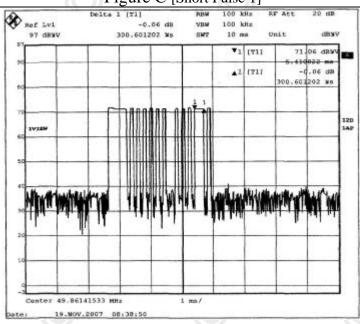

Date : 2007-11-23 Page 16 of 18

No. : HM160517

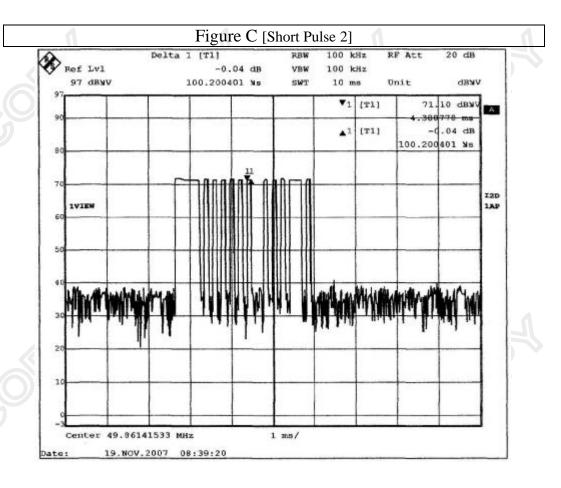



Date: 2007-11-23 Page 17 of 18

No. : HM160517

Appendix C

Photographs of EUT

Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View






Date : 2007-11-23 Page 18 of 18

No. : HM160517

Photographs of EUT

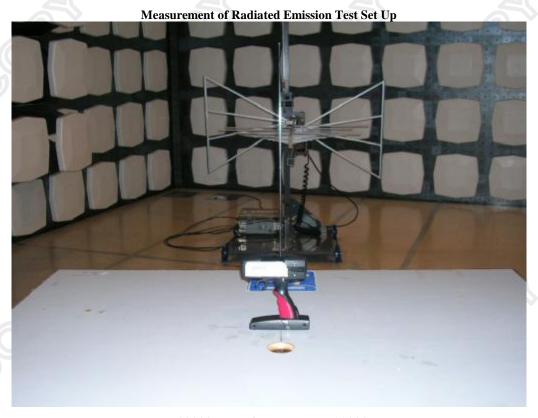

***** End of Test Report *****