

Date : 2011-05-05 Page 1 of 21

No. : HM166574

Applicant (NEB001): NEW BRIGHT INDUSTRIAL CO., LTD.

9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET

ROAD, KOWLOON BAY, KOWLOON, H.K.

Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.

9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET

ROAD, KOWLOON BAY, KOWLOON, H.K.

Description of Sample(s): Product: Radio Control Toy Transmitter

Brand Name: New Bright
Model Number: G6DBT44-4
FCC ID: G6DBT44-4

Date Sample(s) Received: 2011-04-18

Date Tested: 2011-04-21 to 2011-04-27

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2010 and ANSI C63.4:2009 for FCC Certification.

Conclusion(s): The submitted product <u>COMPLIED</u> with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remark(s): --

Dr. LEE Kam Chuen
Authorized Signatory
ElectroMagnetic Compatibility Department

ElectroMagnetic Compatibility Department For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2011-05-05 Page 2 of 21

No. : HM166574

CONTENT:

	Cover Content	Page 1 of 21 Page 2-3 of 21
1.0	General Details	
1.1	Test Laboratory	Page 4 of 21
1.2	Applicant Details Applicant Manufacturer	Page 4 of 21
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 21
1.4	Date of Order	Page 5 of 21
1.5	Submitted Sample	Page 5 of 21
1.6	Test Duration	Page 5 of 21
1.7	Country of Origin	Page 5 of 21
<u>2.0</u>	<u>Technical Details</u>	
2.1	Investigations Requested	Page 6 of 21
2.2	Test Standards and Results Summary	Page 6 of 21
<u>3.0</u>	Test Results	
3.1	Radiated Emission	Page 7-12 of 21



Date: 2011-05-05 Page 3 of 21

No. : HM166574

Appendix A

Page 13 of 21 List of Measurement Equipment

Appendix B

Page 14-17 of 21 Duty Cycle Correction During 100 msec

Appendix C

Page 18-21 of 21 Photographs



Date: 2011-05-05 Page 4 of 21

No.: HM166574

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 Applicant Details Applicant

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.

Manufacturer

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.



Date : 2011-05-05 Page 5 of 21

No. : HM166574

1.3 Equipment Under Test [EUT] Description of Sample(s)

Product: Radio Control Toy Transmitter

Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.

9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD,

KOWLOON BAY, KOWLOON, H.K.

Brand Name: New Bright Model Number: G6DBT44-4

Input Voltage: 3.7Vd.c. (Rechargeable Battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a New Bright Industrial Co., Ltd. Radio Control Toy Transmitter. The EUT is a transmitter of radio control toy. The transmitter was operating with 4 buttons, the EUT continues to transmit while button is being on, It is pulse transmitter, Modulation by IC, and type is ASK modulation.

1.4 Date of Order

2011-04-18

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2011-04-21 to 2011-04-27

1.7 Country of Origin

China



Date : 2011-05-05 Page 6 of 21

No.: HM166574

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2010 Regulations and ANSI C63.4:2009 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary									
Test Condition	Test Requirement	Test Method	Class /	Te	est Resu	ılt			
			Severity	Pass	Fail	N/A			
Field Strength of Fundamental & Harmonics Emissions	FCC 47CFR 15.249	ANSI C63.4:2009	N/A						
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A						

Note: N/A - Not Applicable



Date : 2011-05-05 Page 7 of 21

No. : HM166574

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions


Test Requirement: FCC 47CFR 15.249
Test Method: ANSI C63.4:2009
Test Date: 2011-04-27
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

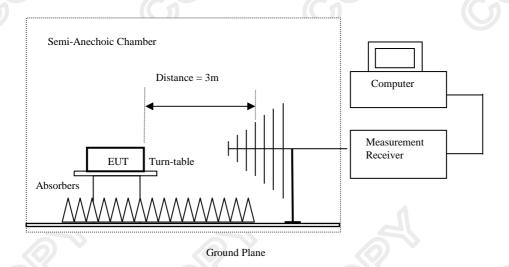

Absorbers placed on top of the ground plane are for measurements above 1000MHz only.



Date : 2011-05-05 Page 8 of 21

No.: HM166574

Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental	Field Strength of Fundamental Emission	Field Strength of Harmonics Emission		
[MHz]	[microvolts/meter]	[microvolts/meter]		
902-928	50,000 [Average]	500 [Average]		
2400-2483.5	50,000 [Average]	500 [Average]		

Results of Tx mode: Pass

Field Strength of Fundamental Emissions Quasi-Peak Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dBμV/m	dΒμV/m	dBμV/m	μV/m	μV/m	·		
914.8	37.2	29.7	66.9	2,213.1	50,000	Horizontal		

Field Strength of Harmonics Emission									
	Peak Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBμV/m	dBμV/m	dΒμV/m	μV/m	μV/m				
1828.5	36.0	5.7	41.7	121.6	5,000	Horizontal			
* 2744.4	< 1.0	29.3	< 30.3	< 32.7	5,000	Horizontal			
* 3659.3	37.2	-0.9	36.3	65.3	5,000	Horizontal			
* 4574.1	36.0	-1.9	34.1	50.7	5,000	Horizontal			
5488.8					5,000	Horizontal			
6403.6	6403.6 Emissions detected are more than					Horizontal			
* 7318.4	20	dB below th	5,000	Horizontal					
* 8233.2					5,000	Horizontal			
* 9148.0					5,000	Horizontal			

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB 1GHz to 18GHz 5.1dB

^{*:} Denotes restricted band of operation.



Date: 2011-05-05 Page 9 of 21

No. : HM166574

Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental	Field Strength of Fundamental Emission	Field Strength of Harmonics Emission		
[MHz]	[microvolts/meter]	[microvolts/meter]		
902-928	50,000 [Average]	500 [Average]		
2400-2483.5	50,000 [Average]	500 [Average]		

Results of Tx mode: Pass

Field Strength of Harmonics Emission									
	Average Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBμV/m	dΒμV/m	dBμV/m	μV/m	μV/m				
1828.5	16.0	5.7	21.7	12.2	5,000	Horizontal			
* 2744.4	< 1.0	29.3	< 30.3	< 32.7	5,000	Horizontal			
* 3659.3	17.2	-0.9	16.3	6.5	5,000	Horizontal			
* 4574.1	16.0	-1.9	14.1	5.1	5,000	Horizontal			
5488.8					5,000	Horizontal			
6403.6	Emis	sions detecte	d are more t	han	5,000	Horizontal			
* 7318.4	* 7318.4 20 dB below the Limits					Horizontal			
* 8233.2			5,000	Horizontal					
* 9148.0					5,000	Horizontal			

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

: 30MHz to 1GHz 5.2dB Calculated measurement uncertainty

1GHz to 18GHz 5.1dB




Date: 2011-05-05 Page 10 of 21

No. : HM166574

Limits for 20dB Bandwidth of Fundamental Emission:


Frequency Range	20dB Bandwidth
[MHz]	[MHz]
914.81	1.8758

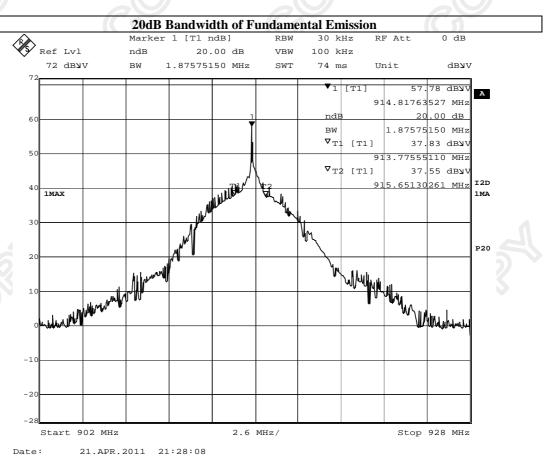



Date: 2011-05-05 Page 11 of 21

No. : HM166574

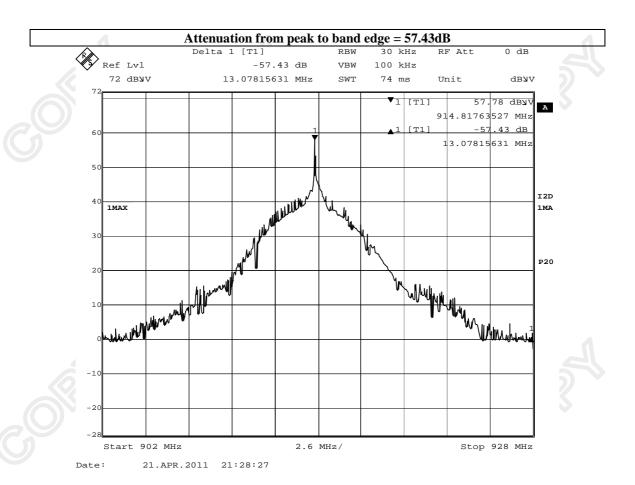

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date : 2011-05-05 Page 12 of 21

No.: HM166574

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Field strength [microvolts/meter]	Measurement distance [meters]
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above960	500	3

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx on mode (9k - 30MHz): PASS

Field Strength of Spurious Emissions								
A verage Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m_			
Emissions detected are more than 20 dB below the FCC Limits								

Results of Tx on mode (30MHz - 1000MHz): PASS

Field Strength of Spurious Emissions Quasi-Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m	11	
Emissions detected are more than 20 dB below the FCC Limits							

Results of Tx on mode (Above 1000MHz): PASS

Field Strength of Spurious Emissions								
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Results of Tx on mode (Above 1000MHz): PASS

Field Strength of Spurious Emissions										
A verage Value										
Frequency	Measured	Correction	Field	Field	Limit	E-Field				
	Level	Factor	Strength	Strength		Polarity				
MHz	$dB\mu V$	dB/m	dBμV/m	μV/m	μV/m_					
Emissions detected are more than 20 dB below the FCC Limits										

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2011-05-05 Page 13 of 21

No. : HM166574

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL			
EM020	HORN ANTENNA	EMCO	3115	4032	2009/09/02	2011/09/02			
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A			
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A			
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A			
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3		2008/12/01	2011/12/01			
EM174	BICONILOG ANTENNA	EMCO	3142B	1671	2010/02/09	2012/02/09			
EM229	EMI Test Receiver	R&S	ESIB40	100248	2010/11/02	2011/11/02			
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2009/07/26	2011/07/26			

Remarks:-

CM Corrective Maintenance

N/A Not Applicable **TBD** To Be Determined



Date: 2011-05-05 Page 14 of 21

No.: HM166574

Appendix B

Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (100msec) never exceeded a series of 2 long (0.571142msec) 6 medium (0.270541msec) and 16 short (0.090180msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worse case transmit duty cycle would be considered (2x0.571142msec)+(6x0.270541msec)+(16x0.090160msec) per 100msec = 4.208% duty cycle. Figure A through E shows the characteristics of the pulses train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.042081) = -27.52dB


Duty Cycle Correction = -20dB, if the calculation duty cycle correction >-20dB.



Date: 2011-05-05 Page 15 of 21

No. : HM166574


The following figures [Figure A to Figure E] showed the characteristics of the pulse train for one of these functions.

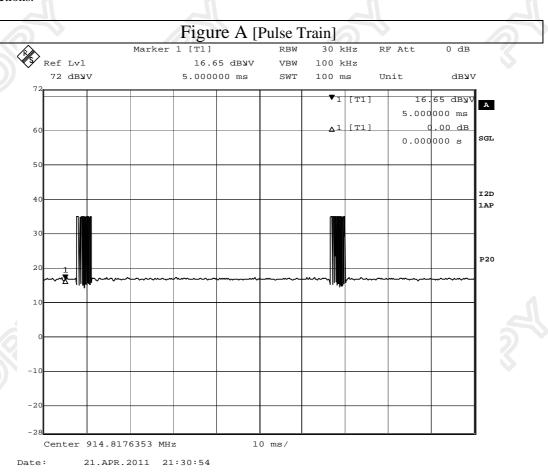



Date: 2011-05-05 Page 16 of 21

No. : HM166574

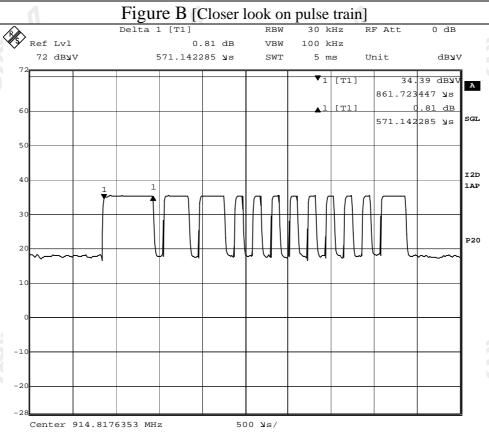


21.APR.2011 21:32:16 Date:



Date: 2011-05-05 Page 17 of 21

No. : HM166574

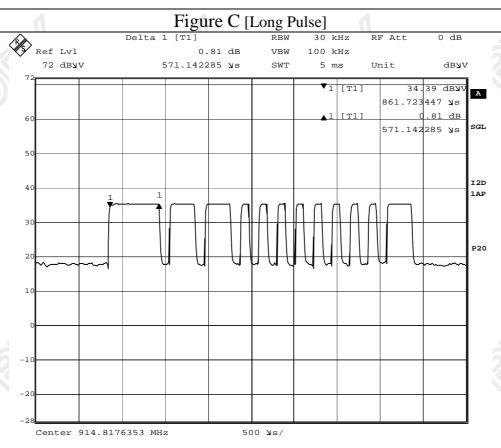


21.APR.2011 21:32:16 Date:



Date: 2011-05-05 Page 18 of 21

No. : HM166574

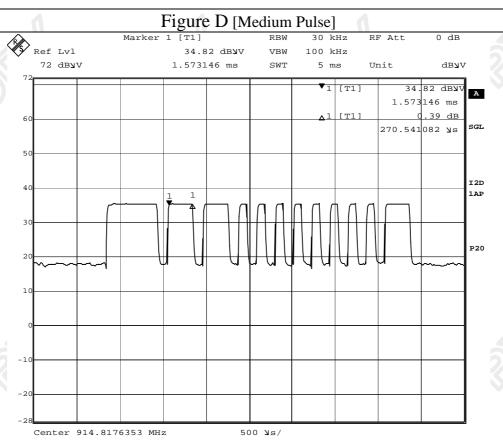


21.APR.2011 21:32:43 Date:



Date: 2011-05-05 Page 19 of 21

No. : HM166574

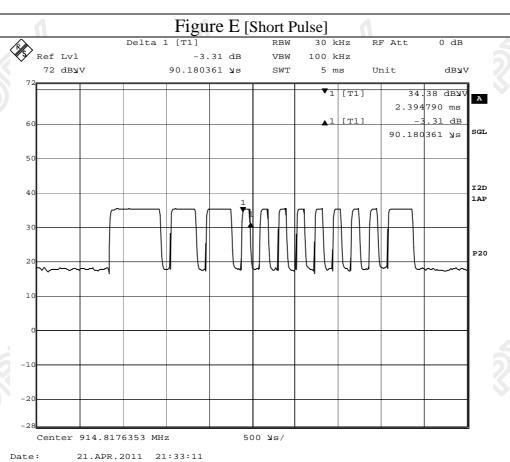



Date : 2011-05-05 Page 20 of 21

No. : HM166574

Appendix C

Photographs of EUT






Inner Circuit Top View



Inner Circuit Bottom View



The Hong Kong Standards and Testing Centre Ltd.


10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2011-05-05 Page 21 of 21

No. : HM166574

Photographs of EUT

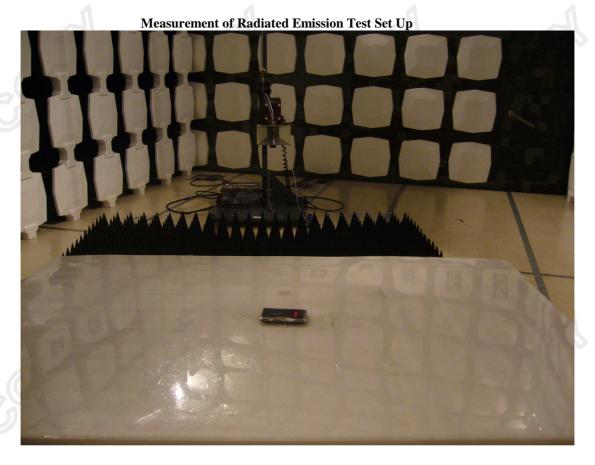

***** End of Test Report *****

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org