








**TEST REPORT No.: (5216)169-0971**

## TEST REPORT

To:	<b>NEW BRIGHT INDUSTRIAL CO., LTD</b>	To:	-						
Attn:	Eric Kwok	Attn:	-						
Address:	9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, HONG KONG	Address:	-						
Fax:	852 27953665	Fax:	-						
E-mail:	<a href="mailto:ypeng01@newbright.com">ypeng01@newbright.com</a> <a href="mailto:chkwok01@newbright.com">chkwok01@newbright.com</a>	E-mail:	-						
Folder No.:	NBT-16JU216MTHS-B-A								
Factory Name:	<b>NEW BRIGHT INDUSTRIAL CO., LTD</b>								
Location:	9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, HONG KONG								
Product:	Radio Control Toy Transmitter MODEL: G31HHB								
		Sample No:	HK160616/021						
		Date of Receipt:	June 16, 2016						
		Test Date(s):	June 21, 2016 to June 24, 2016						
		Test Requested:	FCC Part 15 – 2015						
		Test Method:	ANSI C63.10 – 2013						
		FCC ID:	G6DG31HHB						
<p><b>The results given in this report are related to the tested specimen of the described electrical apparatus.</b></p> <p><b>CONCLUSION: The submitted sample was found to <u>COMPLY</u> with requirement of FCC Part 15 Subpart C.</b></p> <p>Authorized Signature:</p> <table border="1"> <tr> <td>  </td> <td>  </td> </tr> <tr> <td>Reviewed by: Keith Yeung</td> <td>Approved by: Law Man Kit</td> </tr> <tr> <td>Date: July 04, 2016</td> <td>Date: July 04, 2016</td> </tr> </table>						Reviewed by: Keith Yeung	Approved by: Law Man Kit	Date: July 04, 2016	Date: July 04, 2016
									
Reviewed by: Keith Yeung	Approved by: Law Man Kit								
Date: July 04, 2016	Date: July 04, 2016								



**TEST REPORT No.: (5216)169-0971**

## **Test Result Summary**

<b>EMISSION TEST</b>			
<b>Test requirement: FCC Part 15 – 2015</b>			
Test Condition	Test Method	Test Result	
		Pass	Failed
Radiated Emission Test, 9kHz to 1GHz	ANSI C63.10	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency range of Fundamental Emission	ANSI C63.10	<input checked="" type="checkbox"/>	<input type="checkbox"/>
26dB Bandwidth of Fundamental Emission	ANSI C63.10	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Duty Cycle Correction During 100mesc	ANSI C63.10	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### **Report Revision & Sample Re-submit History:**

--



**TEST REPORT No.: (5216)169-0971**

## Test Laboratory & Test Instruments List

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013. An Open Area Test Site and Full Anechoic are set up for investigation and located at:

### BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre,  
26 Hung To Road,  
Kwun Tong, Kowloon,  
Hong Kong

## Test Instrument List

### Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
EMI TEST RECEIVER	R&S	ESCI	100379	23-FEB-2016	22-FEB-2017
SIGNAL ANALYZER 40GHZ	R&S	FSV 40	100977	30-JUN-2015	29-JUN-2016
BILOG ANTENNA	SCHAFFNER	GBL6112D	25229	27-FEB-2016	26-FEB-2018
OPEN AREA TEST SITE	BVCPS	N/A	N/A	18-JUN-2016	17-JUN-2017
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	11-MAY-2016	10-MAY-2017
BICONICAL ANTENNA	R&S	HK116	100179	14-APR-2016	13-APR-2018
LOG-PERIODIC DIPOLE ARRAY ANTENNA	R&S	HL223	832369/001	07-APR-2016	06-APR-2018
LOOP ANTENNA	ETS-LINDGREN	6502	00102266	06-NOV-2015	05-NOV-2017
COAXIAL CABLE	SUHNER	N/A	N/A	07-JAN-2016	06-JAN-2017

## Measurement Uncertainty

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9kHz to 30MHz	4.2dB
	30MHz to 200MHz	4.5dB
	200MHz to 1GHz	5.6dB
	1GHz to 18GHz	4.7dB
	18GHz to 40GHz	5.2dB

### Remarks: -

N/A: Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

**TEST REPORT No.: (5216)169-0971**

## **Equipment Under Test [EUT]**

### **Description of Sample:**

Model Name: Radio Control Toy Transmitter  
Model Number: G31HHB  
Additional Model Name: --  
Additional Model Number: --  
Additional Model information: --  
Rating: 3Vd.c. ("AA" size battery x 2)

### **Description of EUT Operation:**

The Equipment Under Test (EUT) is a **NEW BRIGHT INDUSTRIAL CO., LTD** of Radio Control toy. The transmitter is 2 sticks and operating at 49.86MHz. The EUT continues to transmit while sticks are being pushed or pulled, Modulation by IC, and type is pulse modulation.


The transmitter has different control:

1. Left stick – control forward and backward
2. Right stick – control left and right

### **Antenna Requirement (Section 15.203)**

The EUT is use of a permanently antenna. The antenna consists of 36cm long wire. It is soldered on the PCB. The antenna is not replaceable or user serviceable. The requirements of S15.203 are met. There are no deviations or exceptions to the specifications.

**Photo of Antenna**

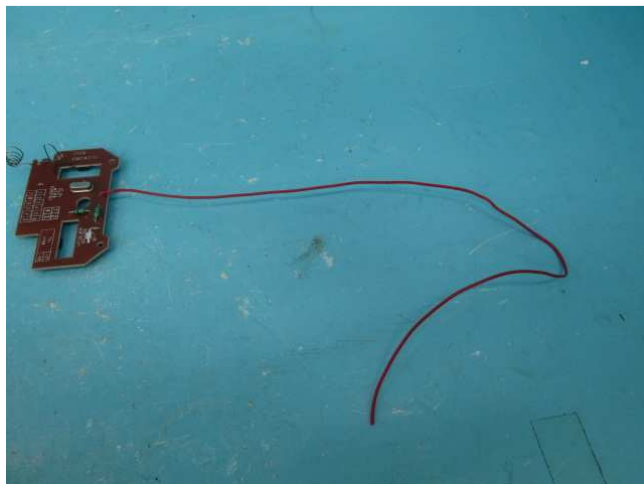

## TEST REPORT No.: (5216)169-0971

### Test Results

#### Radiated Emissions (Fundamental)

Test Requirement: FCC Part 15 Section 15.235  
 Test Method: ANSI C63.10 Clause 6.5  
 Test Date(s): 2016-06-24  
 Temperature: 34.0 °C  
 Humidity: 58.0 %  
 Atmospheric Pressure: 100.3 kPa  
 Mode of Operation: Transmission mode  
 Tested Voltage: 3Vd.c. ("AA" size battery x 2)

#### Test Method:


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground for measurement frequency below 1GHz and 1.5m high above the ground for measurement frequency above 1GHz. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables. For battery operated equipment, the equipment tests shall be performed using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

#### Test Setup: Open Area Test Site

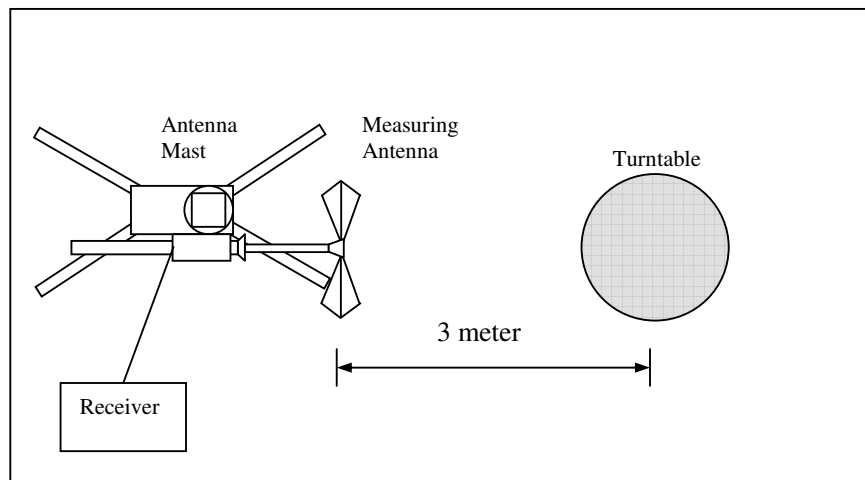



## TEST REPORT No.: (5216)169-0971

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [μV/m]	Field Strength of Fundamental Emission [Average] [μV/m]
49.82 – 49.90	100,000 (100 dBμV/m)	10,000 (80 dBμV/m)

### Measurement Data

#### Test Result of (Transmission mode): PASS

#### Detection mode: Peak

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
49.86	H	9.6	65.3	100.0	-34.7
49.86	V	9.6	62.1	100.0	-37.9

#### Detection mode: #Average

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
49.86	H	9.6	**61.1	80.0	-18.9
49.86	V	9.6	**57.9	80.0	-22.1

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction =  $20\log(0.614) = -4.2\text{dB}$

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz  
VBW = 300KHz



## TEST REPORT No.: (5216)169-0971

### Radiated Emissions (9kHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209  
Test Method: ANSI C63.10 Clause 6.5  
Test Date(s): 2016-06-24  
Temperature: 34.0 °C  
Humidity: 58.0 %  
Atmospheric Pressure: 100.3 kPa  
Mode of Operation: Transmission mode  
Tested Voltage: 3Vd.c. ("AA" size battery x 2)

#### Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu\text{V/m}$ ]	Measurement Distance m
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Measurement Data

**Test Result of (Transmission mode): PASS**

**Detection mode: Quasi-Peak**

Frequency	Polarity (H/V)	Field Strength	Limit	Margin (dB)
Emissions detected are more than 20 dB below the limit line(s) in 9kHz to 30MHz				



## TEST REPORT No.: (5216)169-0971

### Measurement Data

Test Result of (Transmission mode): **PASS**

Detection mode: **Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
99.72	H	10.1	31.6	43.5	-11.9
149.58	H	12.8	29.6	43.5	-13.9
199.44	H	14.9	26.8	43.5	-16.7
249.30	H	12.0	29.2	46.0	-16.8
299.16	H	13.7	29.7	46.0	-16.3
349.02	H	15.3	37.5	46.0	-8.5
398.88	H	16.6	30.9	46.0	-15.1
448.74	H	17.6	30.6	46.0	-15.4
498.60	H	19.0	31.3	46.0	-14.7
548.46	H	19.6	32.8	46.0	-13.2

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
99.72	V	10.1	32.4	43.5	-11.1
149.58	V	12.8	35.7	43.5	-7.8
199.44	V	14.9	28.3	43.5	-15.2
249.30	V	12.0	27.3	46.0	-18.7
299.16	V	13.7	28.5	46.0	-17.5
349.02	V	15.3	31.8	46.0	-14.2
398.88	V	16.6	31.5	46.0	-14.5
448.74	V	17.6	29.7	46.0	-16.3
498.60	V	19.0	31.0	46.0	-15.0
548.46	V	19.6	32.6	46.0	-13.4

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz  
VBW = 120KHz





## TEST REPORT No.: (5216)169-0971

### 26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235  
Test Method: ANSI C63.10 Clause 6.10  
Test Date(s): 2016-06-21  
Temperature: 34.0 °C  
Humidity: 58.0 %  
Atmospheric Pressure: 100.3 kPa  
Mode of Operation: Transmission mode  
Tested Voltage: 3Vd.c. ("AA" size battery x 2)

### Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.


### Limits for 26dB Bandwidth of Fundamental Emission:

Frequency [MHz]	26dB Bandwidth [KHz]	Limits [MHz]
49.8594	29.8	within 49.82-49.90

# TEST REPORT No.: (5216)169-0971

## Measurement Data

### Test Result of 26dB Bandwidth of Fundamental Emission: PASS

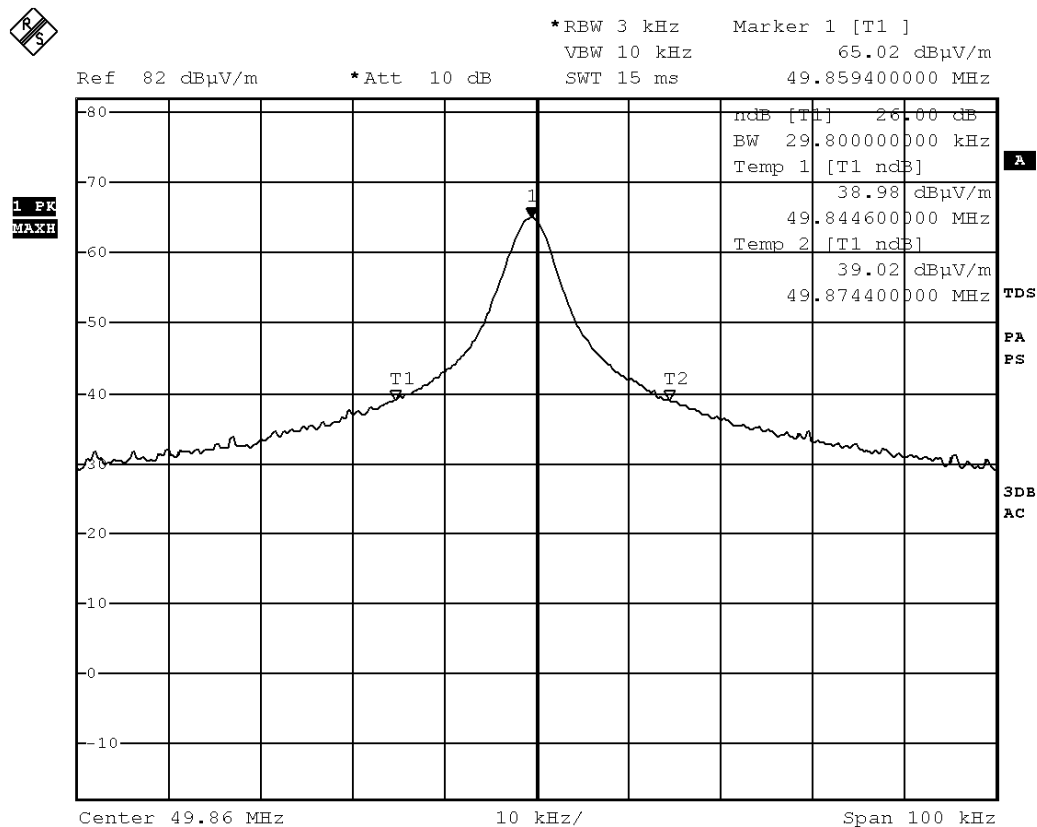

Date: 21.JUN.2016 17:02:16



## TEST REPORT No.: (5216)169-0971

### Duty Cycle Correction During 100msec:

Each function key sends a different series of characters, but each packet period (100msec) never exceeds a series of 8 long (1.6msec) and 81 short (0.6msec) pulses. Assuming any combination of short and long pulses maybe obtained due to encoding the worst case transmit duty cycle would be considered  $(8 \times 1.6\text{msec}) + (81 \times 0.6\text{msec})$  per 100msec = 61.4% duty cycle.


Remarks: -

Duty Cycle Correction =  $20\text{Log}(0.614) = -4.2\text{dB}$

The following figures [Figure A to Figure B] show the characteristics of the pulse train for one of these functions.


# TEST REPORT No.: (5216)169-0971

## Figure A [Short Pulse]

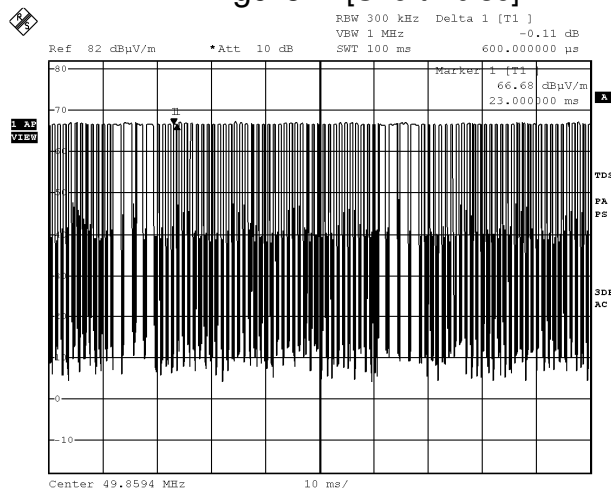

Date: 21.JUN.2016 17:04:20

## Figure B [Long Pulse]

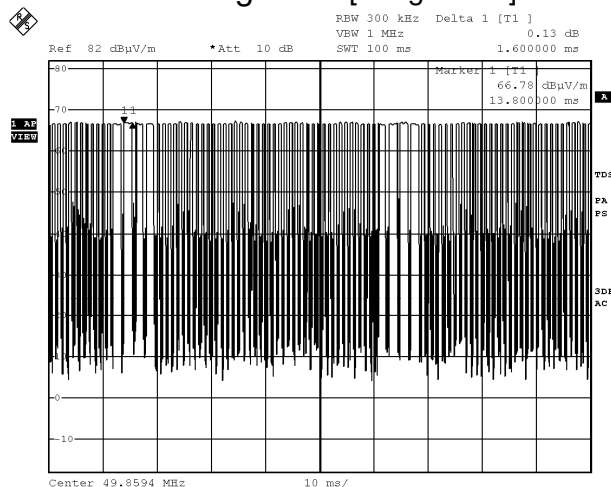

Date: 21.JUN.2016 17:04:00

## TEST REPORT No.: (5216)169-0971

### Photographs of EUT

**Front View of the product**



**Rear View of the product**




**Top View of the product**



**Bottom View of the product**



**Side View of the product**

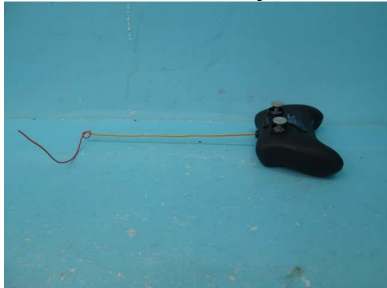

**Side View of the product**



**Battery compartment**



**Battery Cover**



## TEST REPORT No.: (5216)169-0971

### Photographs of EUT


**Internal View of the product**




**Internal View of the product**




**Inner Circuit Top View**

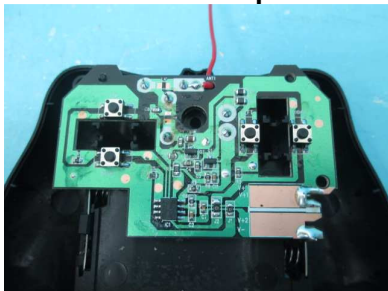

**Inner Circuit Bottom View**

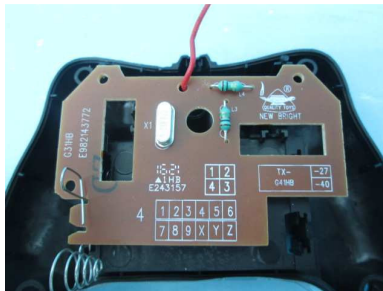

**Antenna**

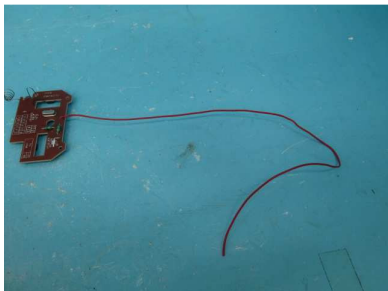



**TEST REPORT No.: (5216)169-0971**

## **Measurement of Radiated Emission Test Set Up**



**\*\*\*\*\* End of Report \*\*\*\*\***