


1.The following is printed by the supplier

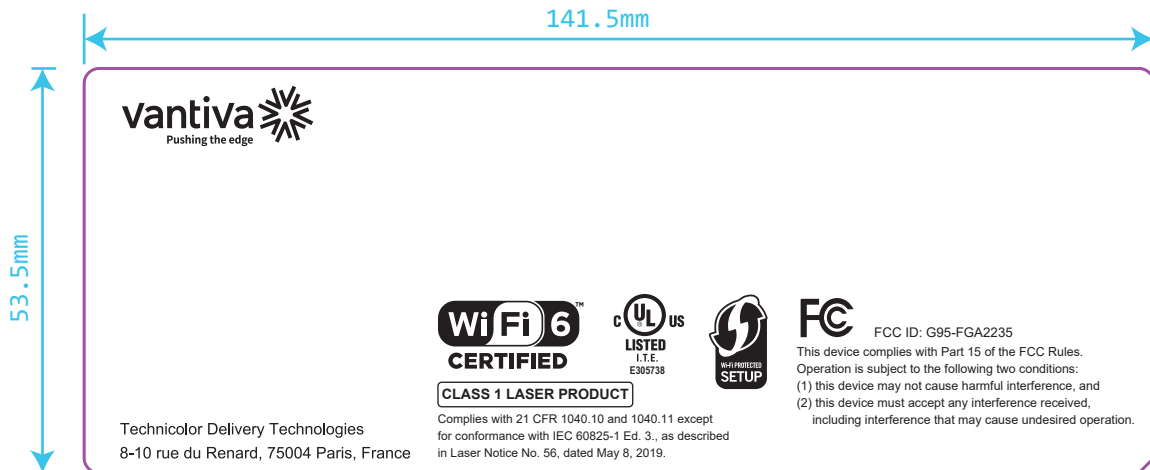

编码规则(Rule):


GPON SN: **XXXXXXXXXXXXXXXXXX**
 MAC: **XXXXXXXXXXXX**
 Wi-Fi Key: **XXXXXXXXXXXXXXXXXXXX**
 Access Key: **XXXXXXXXXXXXXXXXXXXX**

以上红色部分具体数据及位数从系统中获取
 The above red data and digits are obtained from the system

TNCAPXXXXXX取值规则(Rule)

“TNCAP”: 固定 (is the fixed prefix)
 “XXXXXX”: WLAN MAC 后六位
 (are the last 6 digits of WLAN MAC address)


Remark	Description	Editor	Date

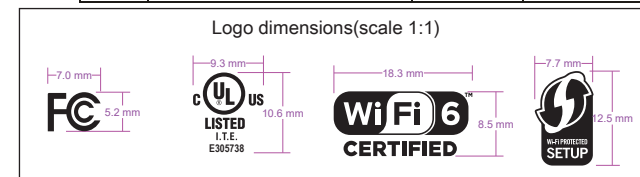

SN编码规则(Rule):

SN: **CPYYWWPPXXX**
 CP: 固定(fixed)
 YY: 生产年份(production year),2021=21
 WW: 生产周(production week)
 PP: 工厂代码(factory code);“AD” and “AQ” represent T&W Vietnam factory
 XXX: 000~ZZZ , I, O, X 不能使用(I, O, X cannot be used)

2.The following is printed by the factory based on 1

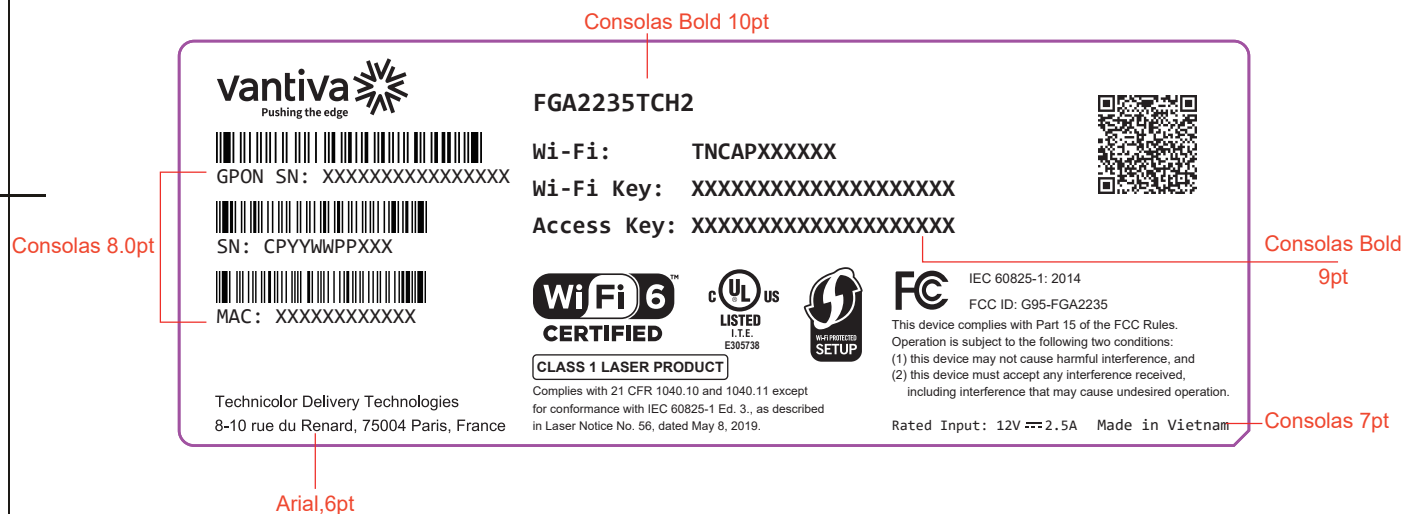

QR CODE: Dimensions: 13*13mm, tolerance: ±1mm
 二维码内容如下, 单行显示, 标点符号前后无空格, 标红色部分为变量, 具体数据及位数从系统中获取
 (QR content scanned as below, single row displayed, no spaces behind/before ; or ; or ; red part is unfixed and can be obtained from the system):
 WIFI:T:WPA;S:mynetwork;P:mypass;X-ADMIN:U:admin;N:sn;K:accesskey;M:mac;C:productcode;;

数据说明(Data description)

mynetwork: network SSID, TNCAPXXXXXX
 mypass: Wi-Fi key, XXXXXXXXXXXXXXXXXXXX
 sn: CPYYWWPPXXX
 accesskey: Access Key, XXXXXXXXXXXXXXXXXXXX
 mac: XXXXXXXXXXXXX
 productcode: FGA2235TCH2

举例(Eg.):

WIFI:T:WPA;S:TNCAPXXXXXX;P:XXXXXXXXXXXXXXXXXXXX;X-ADMIN:U:admin;N:CPYYWWPPXXX;K:XXXXXXXXXXXXXXXXXX
 XXXX;M:XXXXXXXXXXXX;C:FGA2235TCH2;;

NOTES(技术要求):

- 1.黑色打印,无边框,3*R2,C2*1
(Black printing, no frame,R2*3,C2*1)
- 2.材料: 50#压花格底消银龙, 耐85度高测试不起泡,过可打印哑膜,背胶
(Material:50# embossing PET-silver, Heat resistant of at least 85° C,no bubble, printable matte film,adhesive)
3. 原材料及后处理工艺均能满足我司《环保技术标准》要求。
(Raw materials and the corresponding post processing should meet requirements defined in the T&W Environmental Protection Technical Standards)

注: 冒号后需有空格(There must be a blank after ":")

Barcode: CODE 128; Height: 4mm; 打印精度600点
 条码及二维码需保证手机和扫描枪均可扫描
 (Ensure that mobile and scanning guns can scan the bar code)

DIM		TOL±				△			
RANGE	C1	C2	C3	C4					
0~6	0.1	0.1	0.15	0.2					
6~30	0.2	0.3	0.4	0.5					
30~80	0.25	0.5	0.9	1.2					
80~180	0.3	0.8	1.2	1.5					
180~315	0.5	1.3	1.8	3					
315~500	0.7	1.5	2.5	4					
500~800	0.9	1.8	3	5					
ANG.TOL±	0°~30°/0.1°	30°~60°/0.3°	60°~90°/0.5°						

T&W 同维

SHENZHEN GONGJIN ELECTRONICS CO., LTD.

TITLE: 盒底标贴 (device label) 对应标识标贴料号: **6110000xxxxx**

SCALE: N/A UNIT'S: mm