



FCC RADIO TEST REPORT

FCC ID : G95BGW620
Equipment : Wi-Fi 7 XGS-PON Gateway
Brand Name : ARRIS
Model Name : BGW620-700
Applicant : Vantiva USA LLC
4855 Peachtree Industrial Blvd. Suite 200,
Norcross, Georgia, 30092 United States
Manufacturer : Vantiva
887 N Douglas street, El Segundo CA 90245
Standard : 47 CFR FCC Part 15.407

The product was received on May 09, 2024, and testing was started from May 10, 2024 and completed on Jun. 29, 2024. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.



Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	12
1.3 Testing Location Information	12
1.4 Measurement Uncertainty	13
2 Test Configuration of EUT	14
2.1 Test Channel Mode	14
2.2 The Worst Case Measurement Configuration	17
2.3 Accessories	18
2.4 Support Equipment.....	18
2.5 Test Setup Diagram	19
3 Transmitter Test Result	21
3.1 AC Power-line Conducted Emissions	21
3.2 Emission Bandwidth	23
3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	24
3.4 Peak Power Spectral Density (E.I.R.P.)	27
3.5 Unwanted Emissions.....	30
4 Test Equipment and Calibration Data	36
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Radiated Emission Co-location	
Appendix G. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065	Page Number : 3 of 37
FAX : 886-3-656-9085	Issued Date : Nov. 20, 2024
Report Template No.: HE1-D1-1 Ver2.5	Report Version : 01
FCC ID: G95BGW620	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.1	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
-	15.407(d)	Contention-Based Protocol	N/A	Standard Power AP w/o test

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

None

Reviewed by: Barry Hsiao

Report Producer: Ann Hou



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925 ~ 6425	ax (HEW20), be (EHT20)	5955 ~ 6415	1 ~ 93 [24]
6525 ~ 6875		6535 ~ 6855	117 ~ 181 [17]
5925 ~ 6425	ax (HEW40), be (EHT40)	5965 ~ 6405	3 ~ 91 [12]
6525 ~ 6875		6565 ~ 6845	123 ~ 179 [8]
5925 ~ 6425	ax (HEW80), be (EHT80)	5985 ~ 6385	7 ~ 87 [6]
6525 ~ 6875		6625 ~ 6785	135 ~ 167 [3]
5925 ~ 6425	ax (HEW160), be (EHT160)	6025 ~ 6345	15 ~ 79 [3]
6525 ~ 6875		6665	143 [1]
5925 ~ 6425	be (EHT320)	6105 ~ 6265	31 ~ 63 [2]

Non-Beamforming_Full RU

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11be EHT20	20	4TX
6.525-6.875GHz	802.11be EHT20	20	4TX
5.925-6.425GHz	802.11be EHT40	40	4TX
6.525-6.875GHz	802.11be EHT40	40	4TX
5.925-6.425GHz	802.11be EHT80	80	4TX
6.525-6.875GHz	802.11be EHT80	80	4TX
5.925-6.425GHz	802.11be EHT160	160	4TX
6.525-6.875GHz	802.11be EHT160	160	4TX
5.925-6.425GHz	802.11be EHT320	320	4TX

Non-Beamforming_Multi-RU

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11be EHT80	80	4TX
6.525-6.875GHz	802.11be EHT80	80	4TX
5.925-6.425GHz	802.11be EHT160	160	4TX
6.525-6.875GHz	802.11be EHT160	160	4TX
5.925-6.425GHz	802.11be EHT320	320	4TX


Beamforming

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11be EHT20-BF	20	4TX
6.525-6.875GHz	802.11be EHT20-BF	20	4TX
5.925-6.425GHz	802.11be EHT40-BF	40	4TX
6.525-6.875GHz	802.11be EHT40-BF	40	4TX
5.925-6.425GHz	802.11be EHT80-BF	80	4TX
6.525-6.875GHz	802.11be EHT80-BF	80	4TX
5.925-6.425GHz	802.11be EHT160-BF	160	4TX
6.525-6.875GHz	802.11be EHT160-BF	160	4TX
5.925-6.425GHz	802.11be EHT320-BF	320	4TX
6.525-6.875GHz	802.11be EHT320-BF	320	4TX

MRU (static preamble puncturing)

RU-tone	MRU (static preamble puncturing)	Bandwidth(MHz)	6GHz Test CH	
		80	CH7	CH215
484+242	1		-	X
	2		X	X
	3		X	X
	4		X	-

RU-tone	MRU (static preamble puncturing)	Bandwidth(MHz)	6GHz Test CH	
		160	CH15	CH207
996+484	1		-	X
	2		X	X
	3		X	X
	4		X	-
996+484 +242	1		-	X
	2		X	X
	3		X	X
	4		X	X
	5		X	X
	6		X	X
	7		X	X
	8		X	-

RU-tone	MRU (static preamble puncturing)	Bandwidth(MHz)	6GHz Test CH	
		320	CH31	CH191
2×996+484	1		-	-
	2		X	-
	3		X	-
	4		X	-
	5		X	-
	6		X	-
	7		-	X
	8		-	X
	9		-	X
	10		-	X
	11		-	X
	12		-	-

3×996	1		-	X
	2		X	X
	3		X	X
	4		X	-
3×996 +484	1		-	X
	2		X	X
	3		X	X
	4		X	X
	5		X	X
	6		X	X
	7		X	X
	8		X	-

Note:

- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80, EHT160 and EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.
- The channel defined in the IEEE Standard P802.11ax™/D6.1.
- Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

1.1.2 Worst case of MRU(static preamble puncturing) evaluation procedure

1.	Complete test Full RU BE & PSD
2.	Measure the PSD of each MRU(static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD.
3.	Measure the Band edge emission of each MRU(static preamble puncturing) by conducted method and find out the MRU(static preamble puncturing) worst case configuration.
4.	Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated PSD testing.
5.	Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated unwanted emission testing
6.	Confirm whether the worst MRU(static preamble puncturing) configuration setting in steps 2 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU(static preamble puncturing) needs to be retested.
7.	Use worst configuration of MRU(static preamble puncturing) and perform MASK measurements by conducted method.

1.1.3 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Support
1	Galtronics	DB1	PCB	I-Pex	2.4G+5G
2	Galtronics	DB2	PCB	I-Pex	2.4G+5G
3	Galtronics	DB3	PCB	I-Pex	2.4G+5G
4	Galtronics	DB4	PCB	I-Pex	2.4G+5G
5	Galtronics	6G1	PCB	I-Pex	6G
6	Galtronics	6G2	PCB	I-Pex	6G
7	Galtronics	6G3	PCB	I-Pex	6G
8	Galtronics	6G4	PCB	I-Pex	6G
9	Galtronics	IoT1-DFS	PCB	I-Pex	5G/BT/802.15.4
10	Galtronics	IoT2	PCB	I-Pex	BT/802.15.4
11	Galtronics	GNSS	PCB	I-Pex	GPS

Ant.	Port	Gain (dBi)											
		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	DFS-RX	BT+802.15.4	GPS
1	1	3.54	4.9	4.94	5.12	5.02	-	-	-	-	-	-	-
2	2	4.79	3.47	3.79	3.58	2.66	-	-	-	-	-	-	-
3	3	3.46	2.48	2.72	4.85	4.02	-	-	-	-	-	-	-
4	4	3.75	4.41	3.05	3.46	3.78	-	-	-	-	-	-	-
5	1	-	-	-	-	-	4	4.85	4.11	4.22	-	-	-
6	2	-	-	-	-	-	3.64	4.26	3.26	4.19	-	-	-
7	3	-	-	-	-	-	5.5	5.4	4.77	5.07	-	-	-



Ant.	Port	Gain (dBi)											
		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	DFS-RX	BT+802.15.4	GPS
8	4	-	-	-	-	-	5.11	5.04	4.96	5.17	-	-	-
9	1	-	-	-	-	-	-	-	-	-	5.647	4.716	-
10	2	-	-	-	-	-	-	-	-	-	-	3.765	-
11	1	-	-	-	-	-	-	-	-	-	-	-	4.219

Composite Gain (dBi)										
Freq(Hz)	2.45G	5.2G	5.3G	5.6G	5.785G	6.175G	6.475G	6.695G	6.995G	
DG [1SS] (dBi)	5.03	5.25	5.58	6.35	6.17	5.66	5.88	5.63	5.82	
DG [2SS] (dBi)	4.79	4.9	4.94	5.12	5.02	5.5	5.4	4.96	5.17	
DG [4SS] (dBi)	4.79	4.9	4.94	5.12	5.02	5.5	5.4	4.96	5.17	

Note 1: The EUT has eleven antennas.

Note 2: The composite gain is derived as KDB 662911 D03 v01 which was used as directional gain. For more detail information, please refer to the Antenna Pattern Report AP450601.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (4TX/4RX)

Ant. 1 (port 1), Ant. 2 (port 2), Ant. 3 (port 3) and Ant. 4 (port 4) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (4TX/5RX)

Ant. 1 (port 1), Ant. 2 (port 2), Ant. 3 (port 3) and Ant. 4 (port 4) could transmit simultaneously.

Ant. 1 (port 1), Ant. 2 (port 2), Ant. 3 (port 3), Ant. 4 (port 4) and Ant. 9 (port 1) could receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax/be mode (4TX/4RX)

Ant. 5 (port 1), Ant. 6 (port 2), Ant. 7 (port 3) and Ant. 8 (port 4) could transmit/receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 9 (port 1) or Ant. 10 (port 2) could transmit/receive.

Support diversity function and pre-tested on each single chain, the worst case was Ant. 10(port 2) and it was record in this test report.

For 802.15.4 function:

For IEEE 802.15.4 mode (1TX/1RX)

Ant. 9 (port 1) or Ant. 10 (port 2) could transmit/receive.

Support diversity function and pre-tested on each single chain, the worst case was Ant. 10(port 2) and it was record in this test report.

For GPS function:

For GNSS mode (1TX/1RX)

Ant. 11 (port 1) could transmit/receive.

**1.1.4 EUT Information**

Operational Condition			
EUT Power Type	From AC Adapter		
EUT Function	☐	Indoor Access Point	☐ Subordinate
	☐	Indoor Client	☒ Standard Power Access Point
	☐	Dual Client	☐ Standard Client
	☐	Fixed Client	
Beamforming Function	☒	With beamforming	☐ Without beamforming
Resource Unit	☒	Full RU	☒ Partial RU
	☒	MRU(static preamble puncturing)	☐ MRU(dynamic preamble puncturing)
Channel Puncturing	☐	Support	☒ Not support
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.: ...		
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

Note: The above information was declared by manufacturer.

**1.1.5 Mode Test Duty Cycle****Non-Beamforming_Full RU**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20_Nss1,(MCS0)_4TX	0.98	0.09	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_4TX	0.962	0.17	780.625u	3k
802.11be EHT80_Nss1,(MCS0)_4TX	0.928	0.32	409.375u	3k
802.11be EHT160_Nss1,(MCS0)_4TX	0.883	0.54	240.625u	10k
802.11be EHT320_Nss1,(MCS0)_4TX	0.834	0.79	158.75u	10k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Multi-RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242	0.946	0.24	543.75u	3k
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242	0.893	0.49	267.813u	10k
802.11be EHT160_Nss1,(MCS0),RU996+RU484	0.905	0.43	298.75u	10k
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484	0.843	0.74	168.438u	10k
802.11be EHT320_Nss1,(MCS0),3xRU996	0.856	0.68	185.938u	10k
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484	0.872	0.59	209.375u	10k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_4TX	0.951	0.22	3.114m	1k
802.11be EHT40-BF_Nss1,(MCS0)_4TX	0.96	0.18	4.637m	300
802.11be EHT80-BF_Nss1,(MCS0)_4TX	0.964	0.16	4.396m	300
802.11be EHT160-BF_Nss1,(MCS0)_4TX	0.957	0.19	5.097m	300
802.11be EHT320-BF_Nss1,(MCS0)_4TX	0.946	0.24	5.101m	300

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ KDB 987594 D01 v02r02
- ♦ KDB 987594 D02 v02r01
- ♦ KDB 662911 D01 v02r01
- ♦ KDB 662911 D03 v01
- ♦ KDB 412172 D01 v01r01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Wayne Chiu	23.1~23.6°C / 52~55%	26/Jun/2024
RF Conducted (Non-Beamforming)	TH06-HY	Johnny Yu	22.7~23.4°C / 49~54%	18/May/2024~07/Jun/2024
☒ Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
	TEL: 886-3-327-0868			
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted (Beamforming)	TH06-HY	Johnny Yu	22.7~23.2°C / 53~57%	03/Jun/2024
Radiated (Non-Beamforming)	03CH25-HY	Simon Cheng	22.2~23.4°C / 50~52%	10/May/2024~28/Jun/2024
Radiated (Beamforming)	03CH25-HY	Lego Lin	22.2~23.4°C / 50~52%	25/May/2024~29/Jun/2024
Radiated (Co-location)	03CH25-HY	Lego Lin	22.2~23.4°C / 50~52%	01/Jun/2024



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	4.53 dB	Confidence levels of 95%
Emission Bandwidth	1.5 MHz	Confidence levels of 95%
Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	1.2 dB	Confidence levels of 95%
Peak Power Spectral Density (E.I.R.P.)	1.2 dB	Confidence levels of 95%
Unwanted Emissions	4.8 dB	Confidence levels of 95%
Frequency Stability	1.18 ppm	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Non-Beamforming

Test Software Version	accessMTool_REL_3_3_0_6
-----------------------	-------------------------

Full RU

Mode	Power Setting
802.11be EHT20_Nss1,(MCS0)_4TX	-
5955MHz	93
6195MHz	108
6415MHz	108
6535MHz	108
6695MHz	108
6855MHz	108
802.11be EHT40_Nss1,(MCS0)_4TX	-
5965MHz	83
6205MHz	108
6405MHz	108
6565MHz	108
6685MHz	108
6845MHz	108
802.11be EHT80_Nss1,(MCS0)_4TX	-
5985MHz	77
6225MHz	108
6385MHz	108
6625MHz	108
6705MHz	108
6785MHz	108
802.11be EHT160_Nss1,(MCS0)_4TX	-
6025MHz	76
6185MHz	108
6345MHz	108
6665MHz	108
802.11be EHT320_Nss1,(MCS0)_4TX	-
6105MHz	82
6265MHz	108

**Multi-RU**

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
5985MHz	71
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	-
6785MHz	99
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX	-
6025MHz	73
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-
6025MHz	72
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX	-
6665MHz	94
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-
6665MHz	91
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX	-
6105MHz	79
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-
6105MHz	76
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX	-
6105MHz	74

**Beamforming**

Test Software Version	PutTY Release 0.62
------------------------------	--------------------

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-
5955MHz	88
6195MHz	108
6415MHz	108
6535MHz	108
6695MHz	108
6855MHz	99
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-
5965MHz	74
6205MHz	108
6405MHz	108
6565MHz	108
6685MHz	108
6845MHz	108
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-
5985MHz	60
6225MHz	108
6385MHz	108
6625MHz	108
6705MHz	108
6785MHz	108
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-
6025MHz	67
6185MHz	108
6345MHz	108
6665MHz	108
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-
6105MHz	73
6265MHz	108

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Unwanted Emissions Frequency Stability
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT		V	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	CTX
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Bluetooth
2	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + 802.15.4
Refer to Sporton Test Report No.: FA450601-01 for Co-location RF Exposure Evaluation and Appendix G for Radiated Emission Co-location.	



2.3 Accessories

Accessories				
AC Adapter (US Plug)	Brand Name	Vantiva	Model Name	EPS72R0-16
	SN	DD72A2343A0551		
	Power Rating	I/P: 120Vac, 1.8A, O/P: 12Vdc, 6A		
	Power Cord	3.6 meter, non-shielded cable, w/o ferrite core		



Reminder: Regarding to more detail and other information, please refer to user manual.


2.4 Support Equipment

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 cable	Power sync	CAT-6E-10	-	-
2	NB	HP	HSTNN-142C	-	Remote
3	Adapter for NB	HP	HSTNN-CA40	-	Remote
4	Client	AT&T	BGW620-700	-	Remote Provided by Customer

2.5 Test Setup Diagram

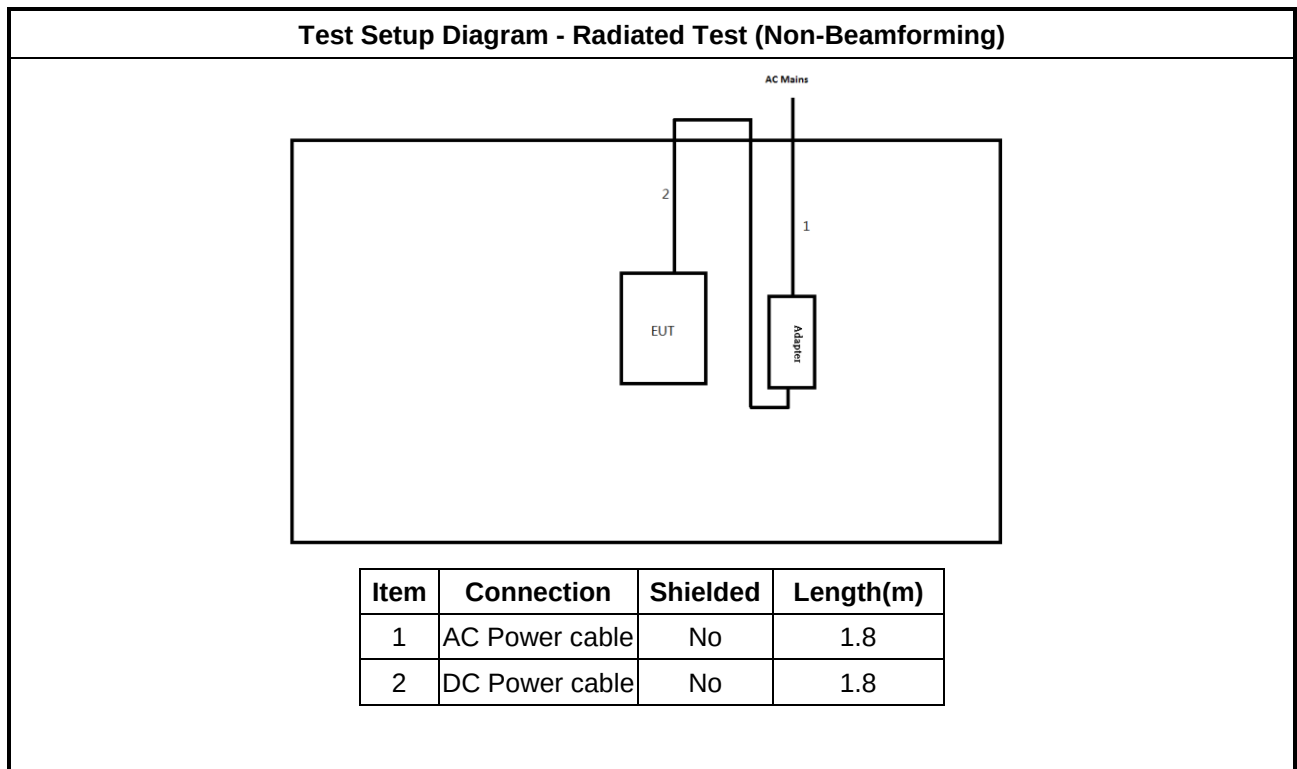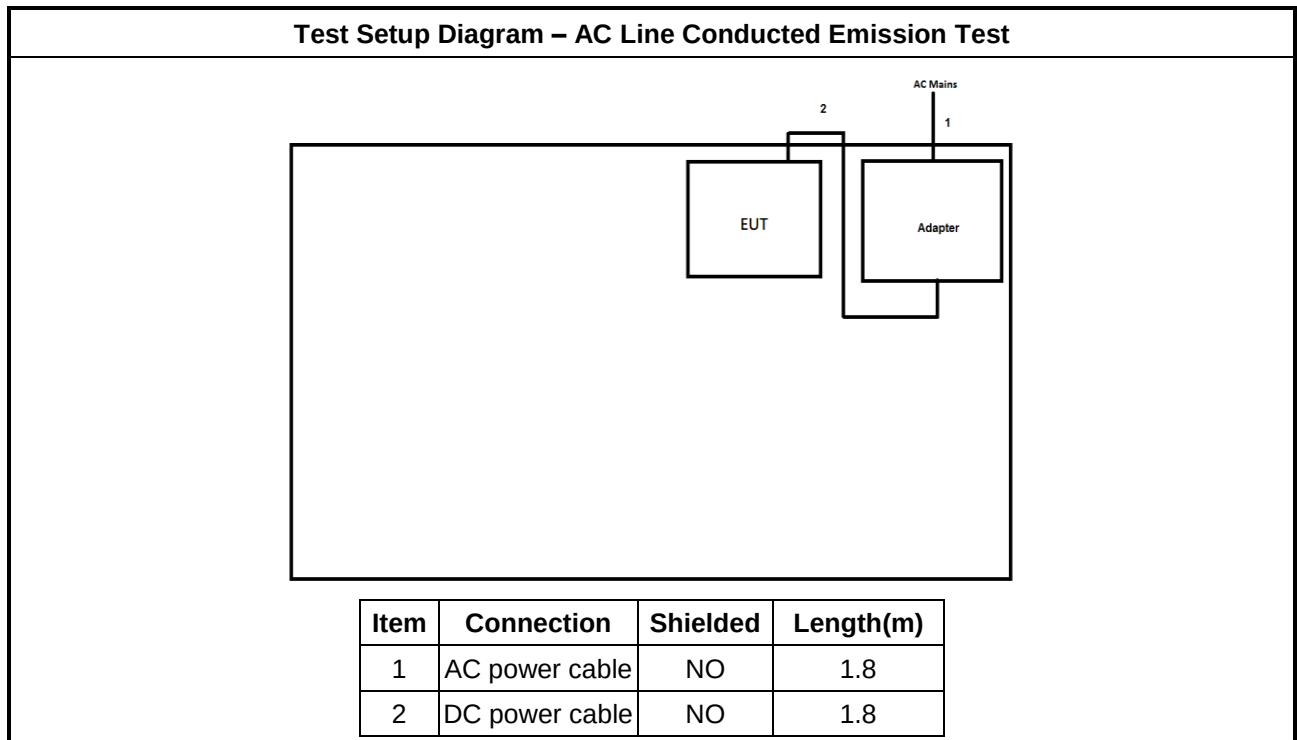

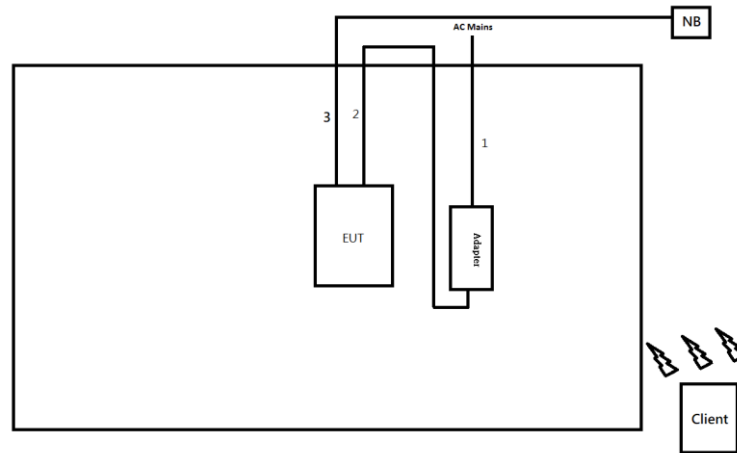Test Setup Diagram - Radiated Test (Beamforming)


Item	Connection	Shielded	Length(m)
1	AC Power cable	No	1.8
2	DC Power cable	No	1.8
3	RJ45 cable	No	10.0



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

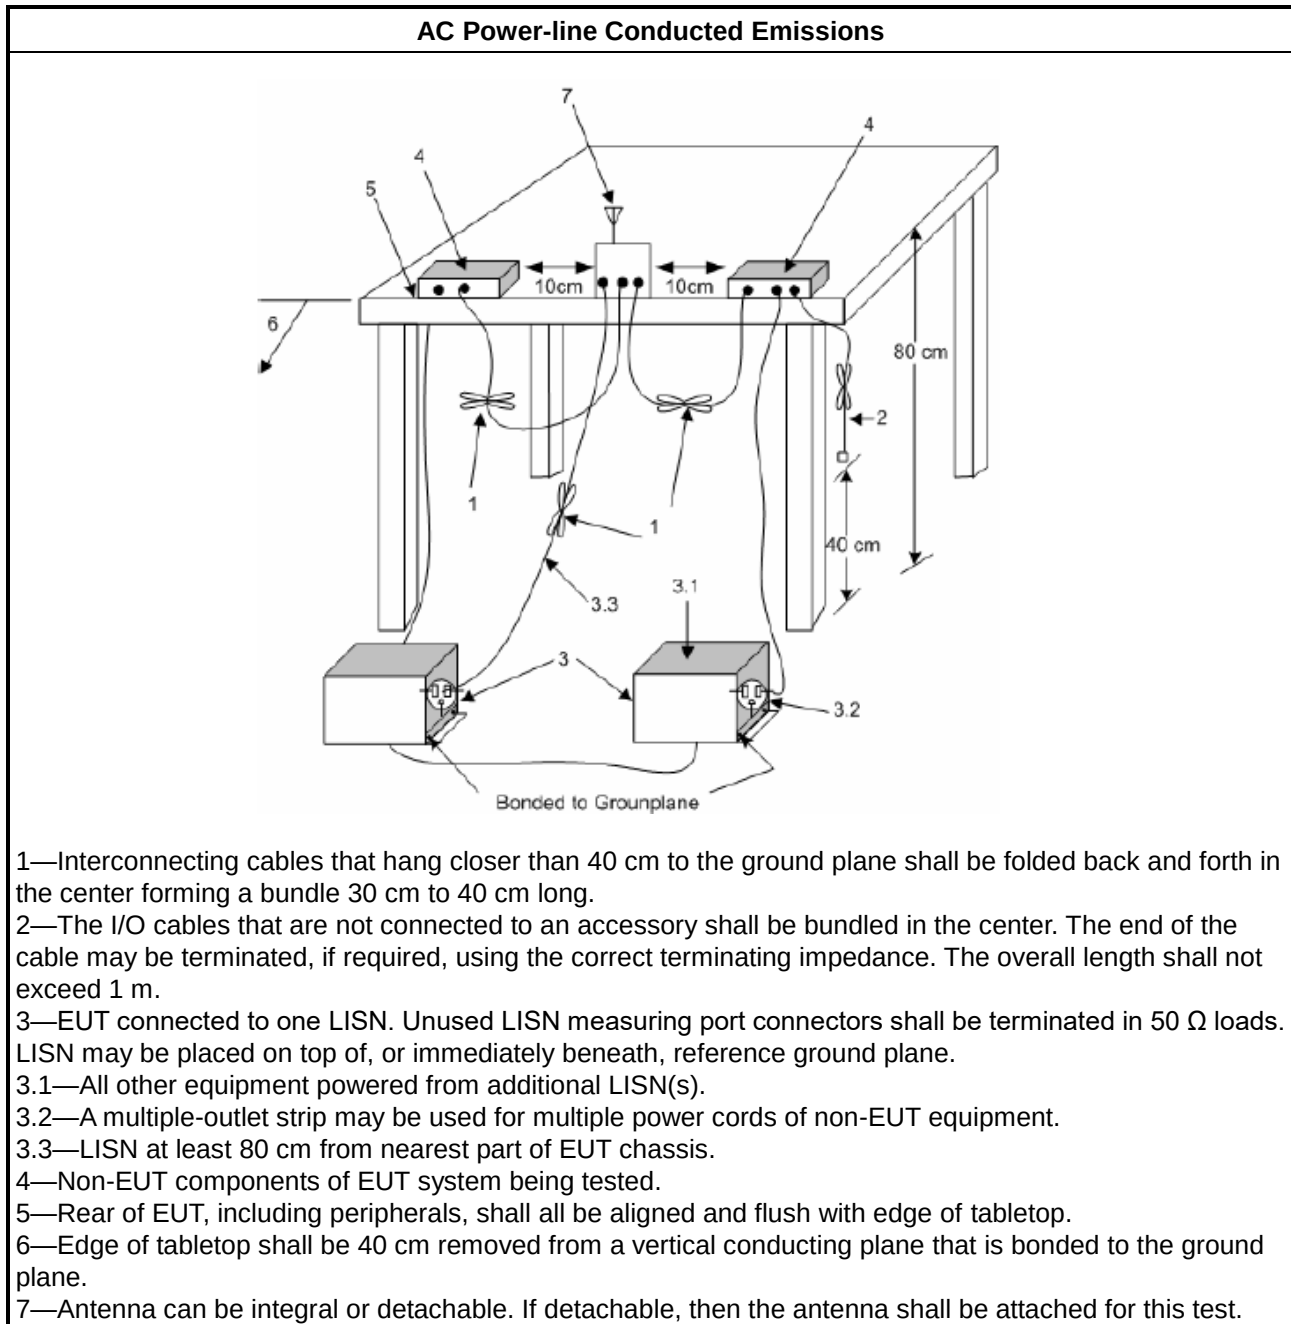

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, N/A
☐	For the 6425-6525 GHz band, N/A
☒	For the 6525-6875 GHz band, N/A
☐	For the 6875-7125 GHz band, N/A


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.2.4 Test Setup

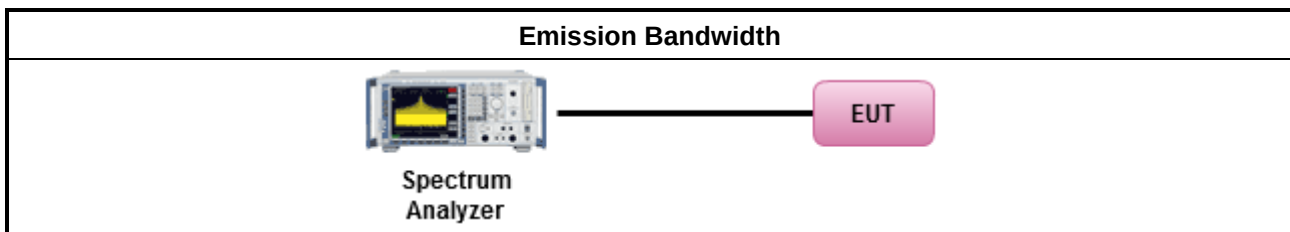

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.3.3 Test Procedures**

Test Method	
▪ Maximum Output Power Setting	
☐	Duty cycle $\geq 98\%$
☒	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Duty cycle $< 98\%$
☒	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☐	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
☐ For conducted measurement.	
☐	▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☒ For radiated measurement.	
☐	▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
☐	▪ Refer as FCC KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
☐	▪ Refer as KDB 412172, clause 2.2 for EIRP calculation.

3.3.4 Test Setup

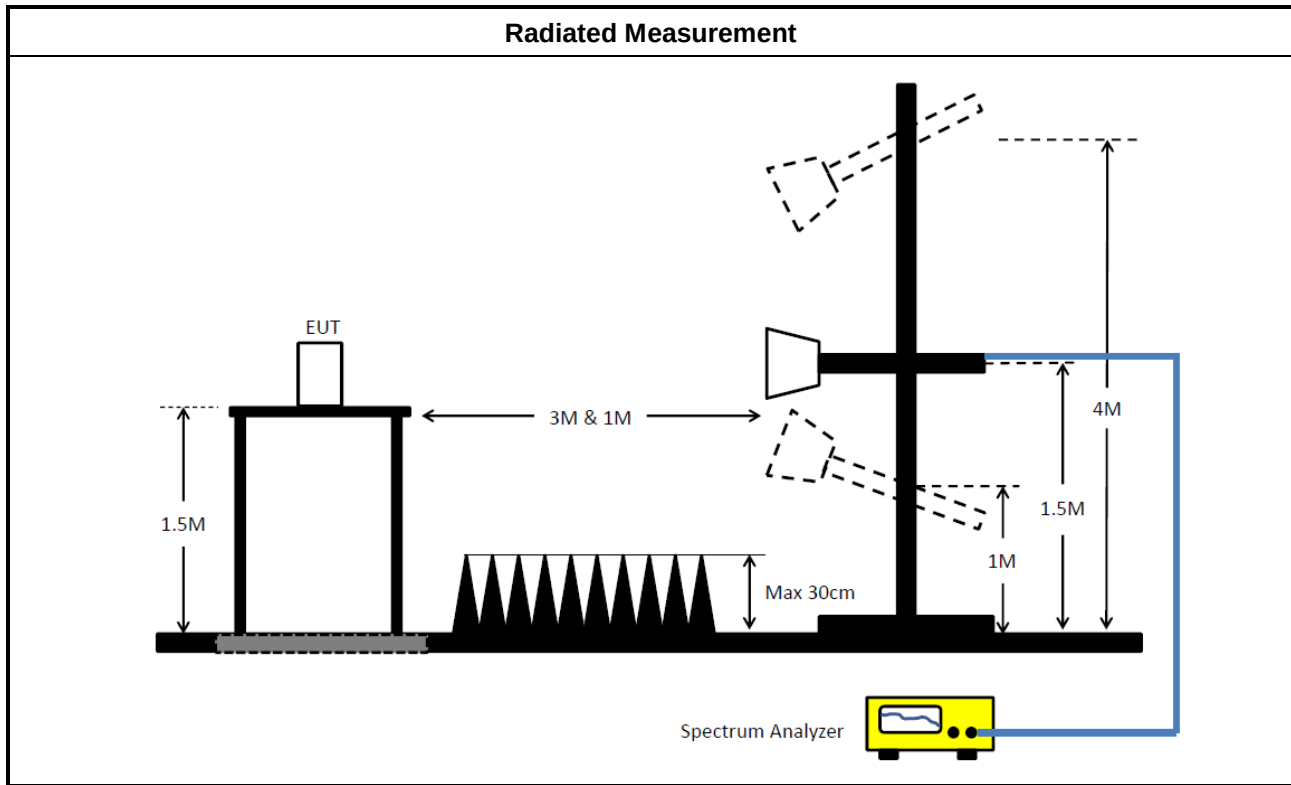

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.4.3 Test Procedures**

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
☒	Refer as FCC KDB 789033, clause E Method SA-2. (spectral trace averaging)
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☒ For radiated measurement.	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	
Refer as KDB 412172, clause 2.2 for EIRP calculation.	

3.4.4 Test Setup

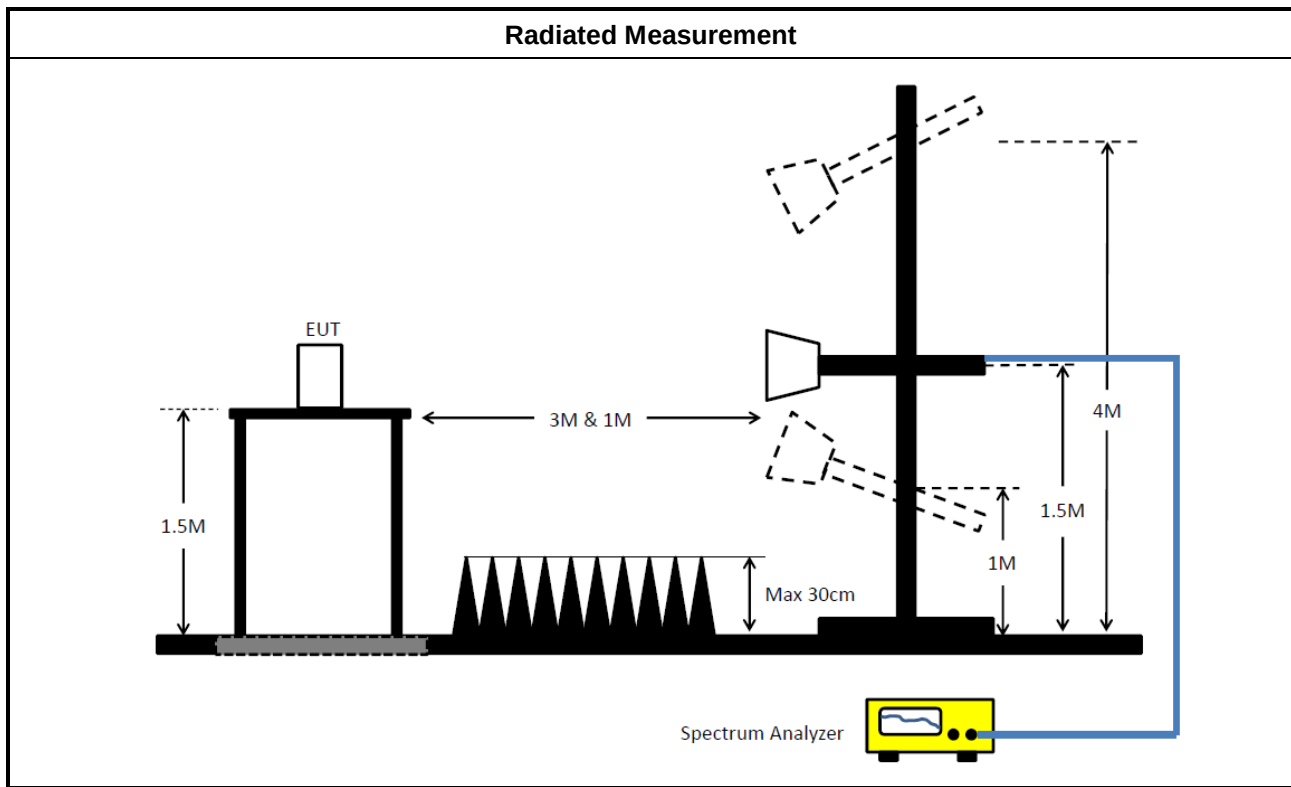

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3


Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = 68.2dBuV/m at 3m + 9.54dB = 77.74 dBuV/m at 1m.
Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the

limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. The channel bandwidth is defined as 26 dB EBW.

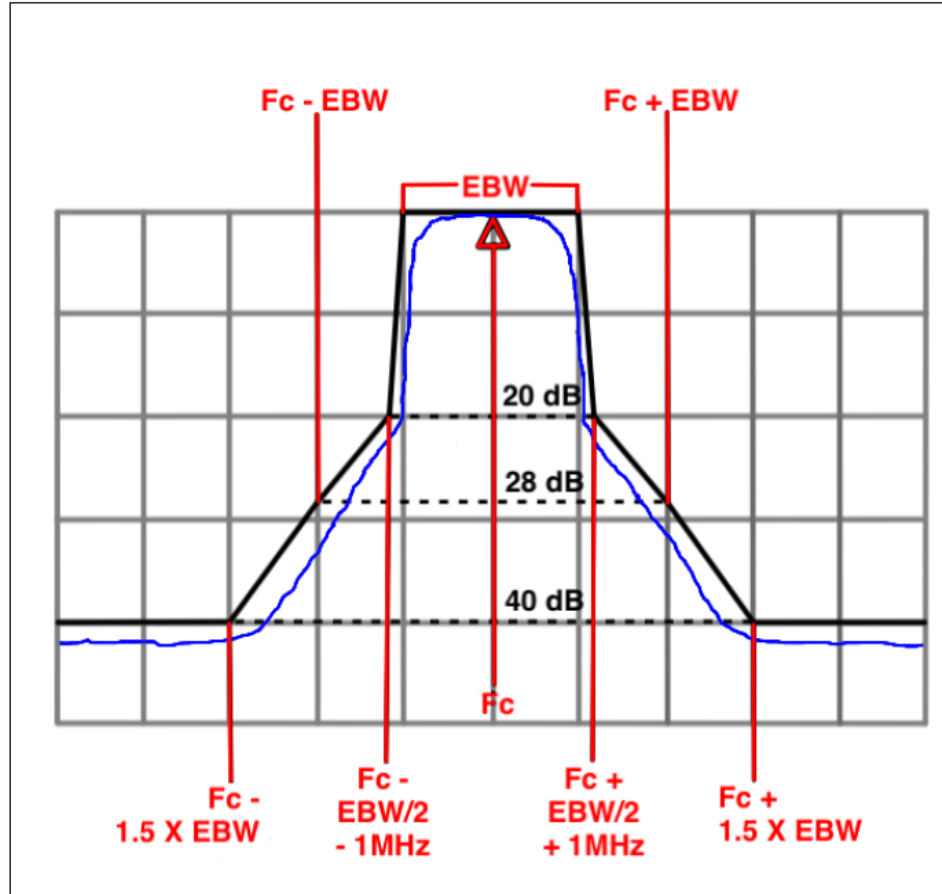

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.5.3 Test Procedures**

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
	☒ Refer as FCC KDB 789033, clause G)3)d)ii) for Band edge Integration measurements.
For emission MASK shall be measured using following options below:	
	☒ Refer as KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	




Test Method	
▪ For conducted and cabinet radiation measurement, refer as FCC KDB 789033, clause G)3).	
	▪ For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.
▪ Use the following spectrum analyzer settings:	
	▪ Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	▪ Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
▪ KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	▪ Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	▪ Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.



3.5.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.5.5 Test Setup

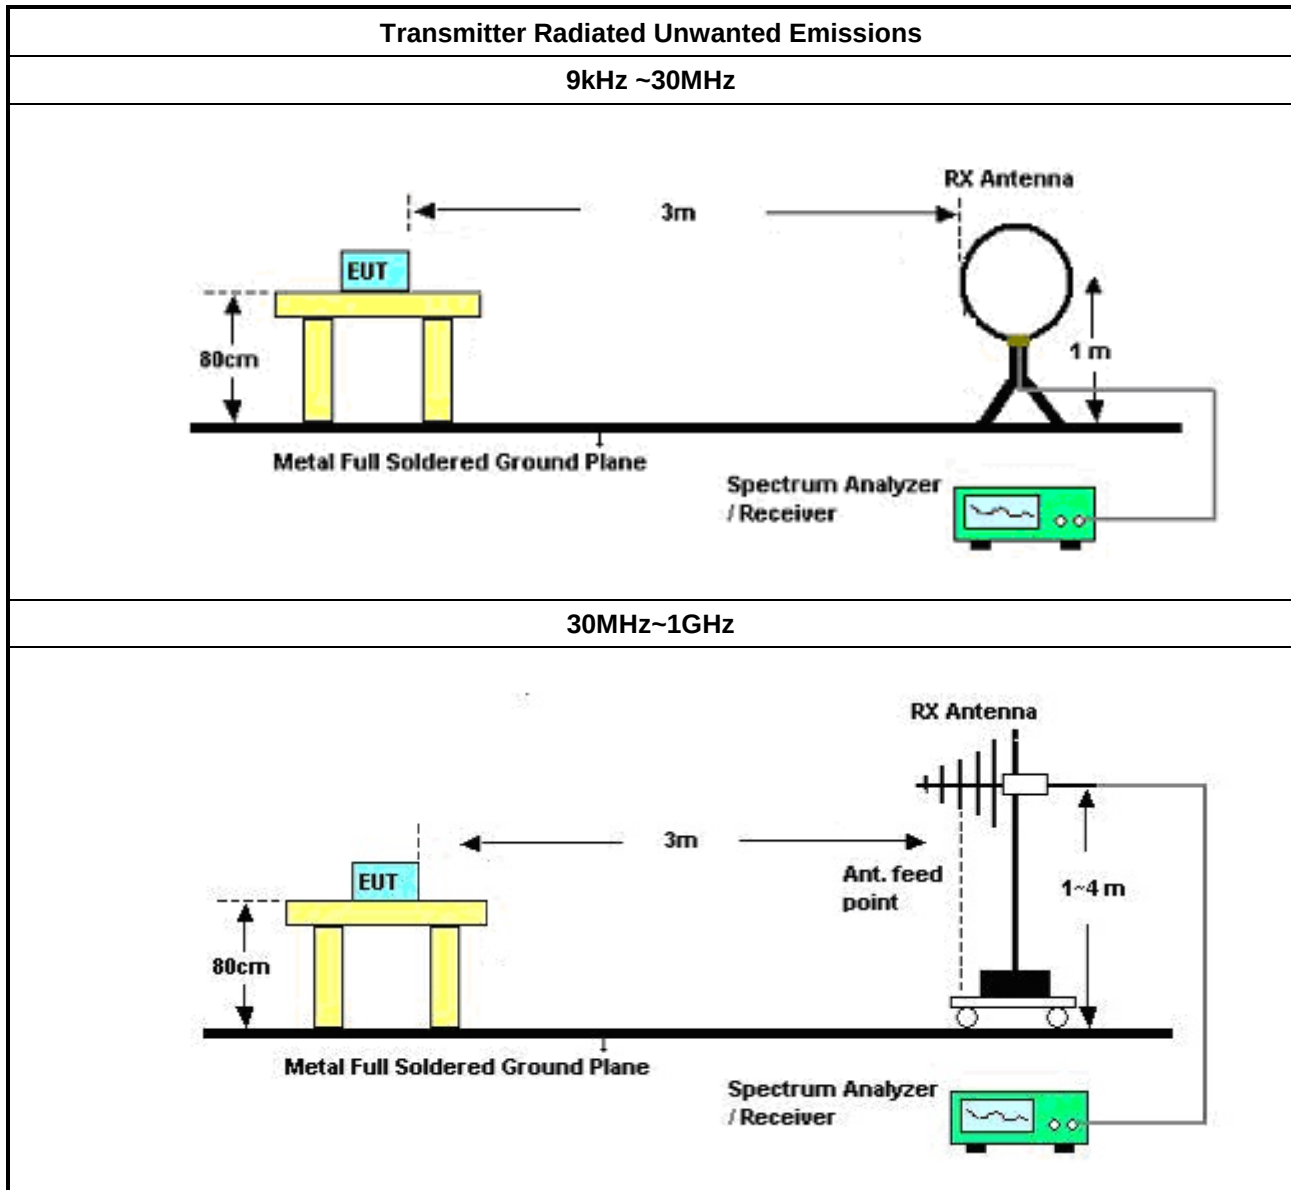

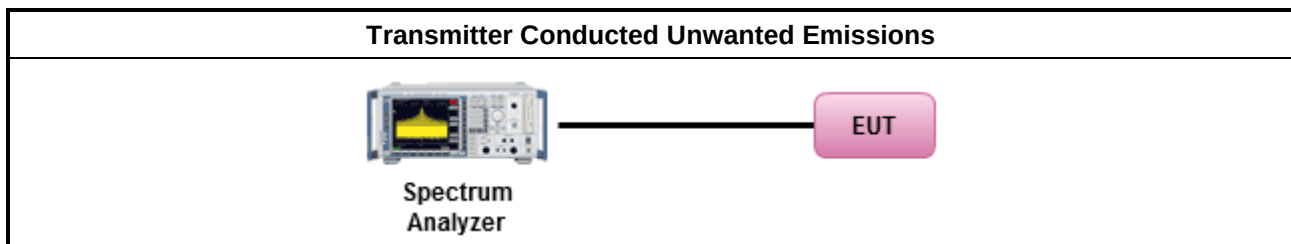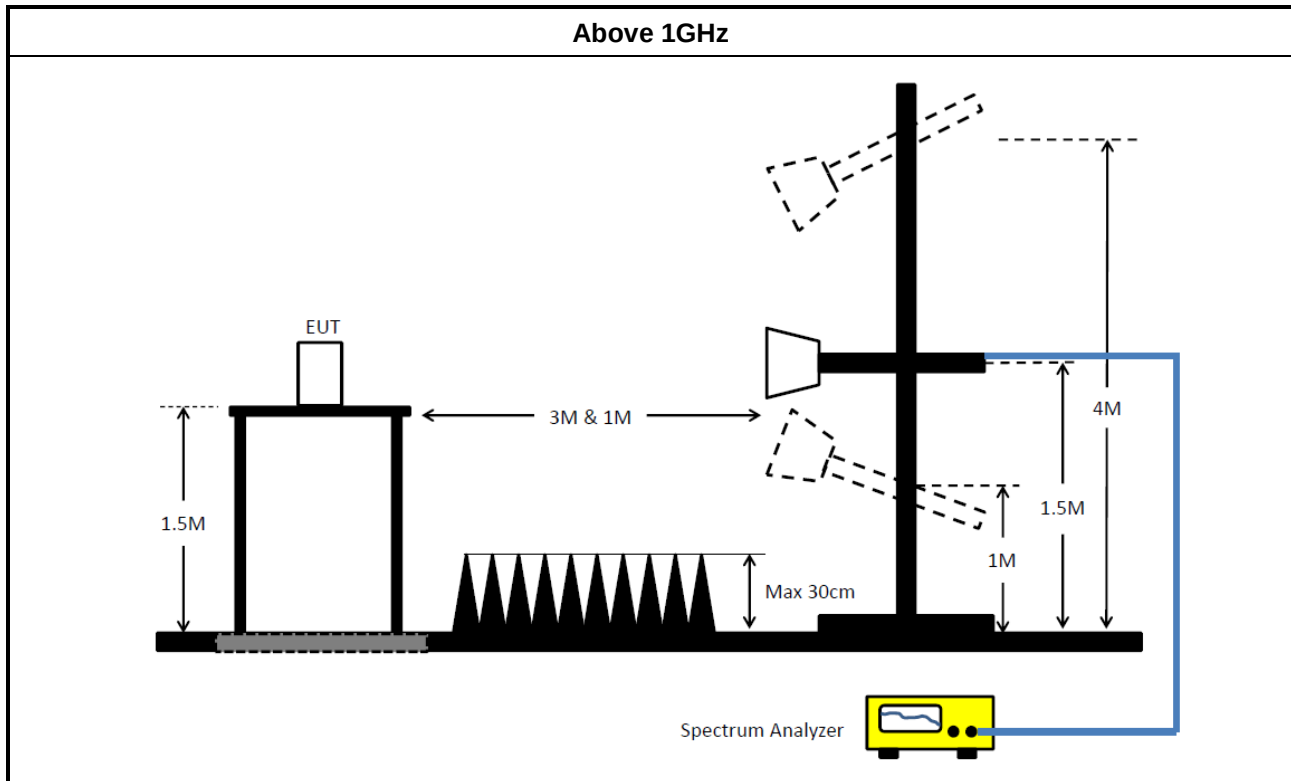

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102051	9kHz ~ 3.6GHz	17/May/2024	16/May/2025
LISN(Artificial Mains Network)	SCHWARZBECK	NSLK 8127	8127477	9kHz ~ 30MHz	12/Apr/2024	11/Apr/2025
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	27/Feb/2024	26/Feb/2025
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	18/Oct/2023	17/Oct/2024
Software	Sporton	SENSE-EMI	V5.11.3	-	NCR	NCR

NCR: No Calibration Required

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10Hz~40GHz	30/Oct/2023	29/Oct/2024
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	20/Oct/2023	19/Oct/2024
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	01/Apr/2024	31/Mar/2025
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	02/Apr/2024	01/Apr/2025
SENSE-15407_NII	Sporton	V5.11.18	N/A	N/A	N/A	N/A

Instrument for Radiated Test (Non-Beamforming_Full RU)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	30MHz~1GHz 3m	03/Aug/2023	02/Aug/2024
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	09/Aug/2023	08/Aug/2024
EMI Test Receiver	ROHDE & SCHWARZ	ESR	102318	9kHz~3.6GHz	27/Dec/2023	26/Dec/2024
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101410	10Hz~44GHz	17/Nov/2023	16/Nov/2024
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	19/Mar/2024	18/Mar/2025
Bilog Antenna & 6dB Attenuator	TESEQ & VGT	CBL 6111D & VFA 04002-06	63537/001	30MHz~1GHz	31/May/2023	30/May/2024
Bilog Antenna & 6dB Attenuator	TESEQ & VGT	CBL 6111D & VFA 04002-06	63537/001	30MHz~1GHz	30/May/2024	29/May/2025
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	12/Jul/2023	11/Jul/2024
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	21/Aug/2023	20/Aug/2024
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	9kHz~1GHz	24/Apr/2024	23/Apr/2025
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	23/Apr/2024	22/Apr/2025
Preamplifier	SGH	PRAMP 903	20230515-1	25MHz~3GHz	25/May/2023	24/May/2024
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz ~18GHz	25/May/2023	24/May/2024
Amplifier	EM	EM18G40GA	060874	18GHz ~ 40GHz	15/Apr/2024	14/Apr/2025



Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
SENSE-15407-NII	Sporton	V5.11.18	NA	NA	NA	NA

Instrument for Radiated Test (Non-Beamforming_Multi-RU)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	09/Aug/2023	08/Aug/2024
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101410	10Hz~44GHz	17/Nov/2023	16/Nov/2024
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	12/Jul/2023	11/Jul/2024
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170614	18GHz~40GHz	18/May/2024	17/May/2025
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	23/Apr/2024	22/Apr/2025
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz ~18GHz	24/May/2024	23/May/2025
Microwave Preamplifier	EMC INSTRUMENTS	EM18G40GA	060604	18GHz ~ 40GHz	19/Apr/2024	18/Apr/2025
SENSE-15407-NII	Sporton	V5.11.18	NA	NA	NA	NA

Instrument for Radiated Test (Beamforming)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	09/Aug/2023	08/Aug/2024
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101410	10Hz~44GHz	17/Nov/2023	16/Nov/2024
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	12/Jul/2023	11/Jul/2024
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	21/Aug/2023	20/Aug/2024
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	23/Apr/2024	22/Apr/2025
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz ~18GHz	24/May/2024	23/May/2025
Amplifier	EM	EM18G40GA	060874	18GHz ~ 40GHz	15/Apr/2024	14/Apr/2025
SENSE-15407-NII	Sporton	V5.11.18	NA	NA	NA	NA



Conducted Emissions at Powerline

Appendix A


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	408.557k	36.77	47.68	-10.91	Neutral

Result


Mode	Result	Type	Freq (Hz)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Condition	Comments
Mode 1	Pass	QP	153.024k	37.99	65.83	-27.84	Line	-
Mode 1	Pass	AV	153.024k	27.29	55.83	-28.54	Line	-
Mode 1	Pass	QP	278.495k	37.21	60.86	-23.65	Line	-
Mode 1	Pass	AV	278.495k	29.32	50.86	-21.54	Line	-
Mode 1	Pass	QP	410.192k	44.10	57.64	-13.54	Line	-
Mode 1	Pass	AV	410.192k	36.26	47.64	-11.38	Line	-
Mode 1	Pass	QP	1.21M	25.24	56.00	-30.76	Line	-
Mode 1	Pass	AV	1.21M	17.15	46.00	-28.85	Line	-
Mode 1	Pass	QP	4.74M	28.59	56.00	-27.41	Line	-
Mode 1	Pass	AV	4.74M	23.00	46.00	-23.00	Line	-
Mode 1	Pass	QP	9.608M	27.02	60.00	-32.98	Line	-
Mode 1	Pass	AV	9.608M	21.58	50.00	-28.42	Line	-
Mode 1	Pass	QP	163.117k	35.78	65.31	-29.53	Neutral	-
Mode 1	Pass	AV	163.117k	27.16	55.31	-28.15	Neutral	-
Mode 1	Pass	QP	290.996k	35.19	60.49	-25.30	Neutral	-
Mode 1	Pass	AV	290.996k	26.96	50.49	-23.53	Neutral	-
Mode 1	Pass	QP	408.557k	44.09	57.68	-13.59	Neutral	-
Mode 1	Pass	AV	408.557k	36.77	47.68	-10.91	Neutral	-
Mode 1	Pass	QP	798.945k	25.24	56.00	-30.76	Neutral	-
Mode 1	Pass	AV	798.945k	18.03	46.00	-27.97	Neutral	-
Mode 1	Pass	QP	4.683M	27.06	56.00	-28.94	Neutral	-
Mode 1	Pass	AV	4.683M	20.81	46.00	-25.19	Neutral	-
Mode 1	Pass	QP	9.646M	27.28	60.00	-32.72	Neutral	-
Mode 1	Pass	AV	9.646M	21.96	50.00	-28.04	Neutral	-

Conducted Emissions at Powerline_Mode 1

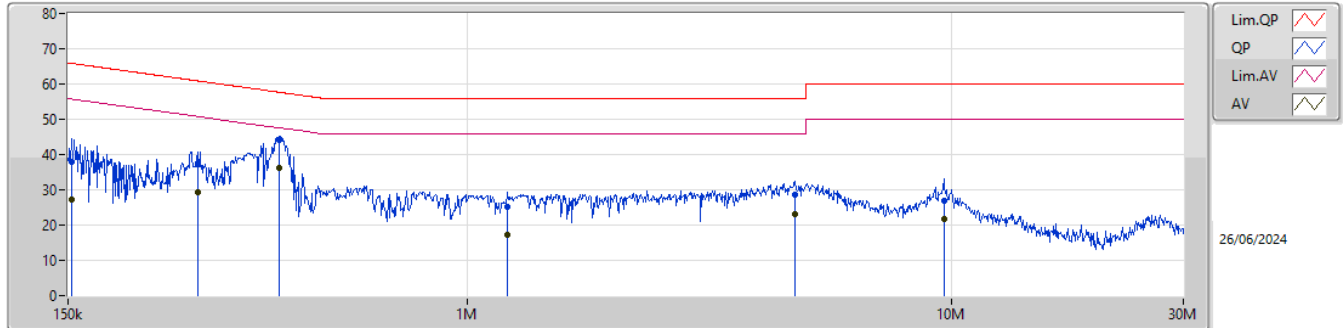

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	153.024k	37.99	65.83	-27.84	9.86	Line	-	28.13	0.04	0.07	9.75						
AV	153.024k	27.29	55.83	-28.54	9.86	Line	-	17.43	0.04	0.07	9.75						
QP	278.495k	37.21	60.86	-23.65	9.86	Line	-	27.35	0.04	0.10	9.72						
AV	278.495k	29.32	50.86	-21.54	9.86	Line	-	19.46	0.04	0.10	9.72						
QP	410.192k	44.10	57.64	-13.54	9.93	Line	-	34.17	0.05	0.12	9.76						
AV	410.192k	36.26	47.64	-11.38	9.93	Line	-	26.33	0.05	0.12	9.76						
QP	1.21M	25.24	56.00	-30.76	9.96	Line	-	15.28	0.06	0.10	9.80						
AV	1.21M	17.15	46.00	-28.85	9.96	Line	-	7.19	0.06	0.10	9.80						
QP	4.74M	28.59	56.00	-27.41	9.98	Line	-	18.61	0.12	0.07	9.79						
AV	4.74M	23.00	46.00	-23.00	9.98	Line	-	13.02	0.12	0.07	9.79						
QP	9.608M	27.02	60.00	-32.98	10.05	Line	-	16.97	0.21	0.05	9.79						
AV	9.608M	21.58	50.00	-28.42	10.05	Line	-	11.53	0.21	0.05	9.79						

Conducted Emissions at Powerline_Mode 1

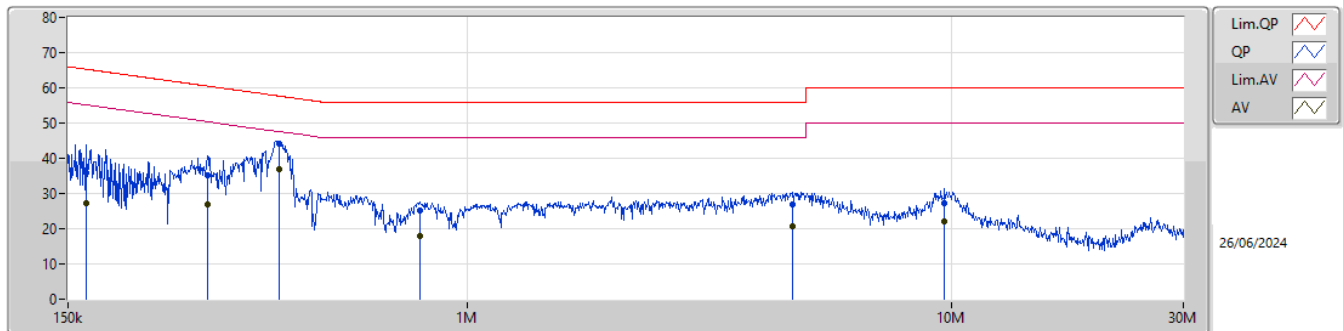

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	163.117k	35.78	65.31	-29.53	9.87	Neutral	-	25.91	0.06	0.07	9.74						
AV	163.117k	27.16	55.31	-28.15	9.87	Neutral	-	17.29	0.06	0.07	9.74						
QP	290.996k	35.19	60.49	-25.30	9.90	Neutral	-	25.29	0.07	0.11	9.72						
AV	290.996k	26.96	50.49	-23.53	9.90	Neutral	-	17.06	0.07	0.11	9.72						
QP	408.557k	44.09	57.68	-13.59	9.95	Neutral	-	34.14	0.07	0.12	9.76						
AV	408.557k	36.77	47.68	-10.91	9.95	Neutral	-	26.82	0.07	0.12	9.76						
QP	798.945k	25.24	56.00	-30.76	9.97	Neutral	-	15.27	0.08	0.10	9.79						
AV	798.945k	18.03	46.00	-27.97	9.97	Neutral	-	8.06	0.08	0.10	9.79						
QP	4.683M	27.06	56.00	-28.94	10.01	Neutral	-	17.05	0.15	0.07	9.79						
AV	4.683M	20.81	46.00	-25.19	10.01	Neutral	-	10.80	0.15	0.07	9.79						
QP	9.646M	27.28	60.00	-32.72	10.09	Neutral	-	17.19	0.25	0.05	9.79						
AV	9.646M	21.96	50.00	-28.04	10.09	Neutral	-	11.87	0.25	0.05	9.79						

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	56.265M	30.853M	30M9D1D	28.93M	19.131M
802.11be EHT40_Nss1,(MCS0)_4TX	103.84M	69.054M	69M1D1D	40.04M	37.754M
802.11be EHT80_Nss1,(MCS0)_4TX	209.88M	132.465M	132MD1D	81.18M	77.165M
802.11be EHT160_Nss1,(MCS0)_4TX	317.24M	157.825M	158MD1D	162.8M	155.93M
802.11be EHT320_Nss1,(MCS0)_4TX	665.28M	319.371M	319MD1D	329.12M	314.905M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	53.57M	32.339M	32M3D1D	45.045M	27.06M
802.11be EHT40_Nss1,(MCS0)_4TX	139.81M	77.707M	77M7D1D	96.8M	51.684M
802.11be EHT80_Nss1,(MCS0)_4TX	219.56M	140.621M	141MD1D	198.66M	121.54M
802.11be EHT160_Nss1,(MCS0)_4TX	289.08M	157.835M	158MD1D	209.88M	156.772M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	Inf	30.855M	19.154M	30.415M	19.215M	31.9M	19.181M	28.93M	19.131M
6195MHz	Pass	Inf	43.945M	27.722M	56.265M	30.834M	52.25M	30.853M	46.915M	29.567M
6415MHz	Pass	Inf	49.94M	24.042M	52.25M	28.312M	50.435M	28.413M	46.75M	28.476M
6535MHz	Pass	Inf	53.185M	31.298M	51.315M	30.335M	52.25M	28.682M	45.045M	27.06M
6695MHz	Pass	Inf	49.005M	29.278M	50.325M	31.159M	49.28M	31.28M	52.25M	31.675M
6855MHz	Pass	Inf	51.48M	32.339M	48.51M	29.905M	53.57M	31.446M	53.515M	29.33M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	41.8M	37.81M	40.15M	37.754M	40.04M	37.824M	41.47M	37.8M
6205MHz	Pass	Inf	100.43M	59.726M	103.84M	69.054M	103.62M	66.005M	102.41M	60.641M
6405MHz	Pass	Inf	96.91M	51.692M	99.77M	55.291M	103.62M	63.126M	99.11M	57.718M
6565MHz	Pass	Inf	104.17M	64.411M	102.63M	57.597M	98.78M	59.878M	96.8M	51.684M
6685MHz	Pass	Inf	107.25M	67.576M	113.08M	66.086M	116.6M	77.707M	106.26M	66.214M
6845MHz	Pass	Inf	103.95M	68.497M	100.98M	70.424M	139.81M	72.914M	103.62M	65.914M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	81.4M	77.253M	81.62M	77.225M	81.4M	77.165M	81.18M	77.273M
6225MHz	Pass	Inf	208.34M	115.534M	209.88M	132.465M	208.78M	115.428M	186.34M	109.64M
6385MHz	Pass	Inf	204.6M	114.915M	189.42M	104.577M	207.02M	131.94M	191.84M	118.505M
6625MHz	Pass	Inf	216.7M	133.505M	206.14M	129.701M	219.56M	132.956M	201.08M	125.379M
6705MHz	Pass	Inf	198.66M	124.03M	207.9M	124.188M	216.04M	140.621M	210.54M	135.363M
6785MHz	Pass	Inf	205.92M	131.13M	213.18M	132.485M	209M	130.584M	208.34M	121.54M
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	163.24M	156.061M	163.24M	156.183M	162.8M	155.93M	163.24M	155.941M
6185MHz	Pass	Inf	178.2M	156.799M	205.04M	157.197M	296.56M	157.656M	190.52M	156.735M
6345MHz	Pass	Inf	313.28M	157.75M	293.92M	157.825M	258.28M	157.816M	317.24M	157.427M
6665MHz	Pass	Inf	289.08M	157.564M	209.88M	157.167M	279.84M	157.835M	283.8M	156.772M
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	330M	315.181M	383.68M	315.88M	329.12M	315.398M	329.12M	314.905M
6265MHz	Pass	Inf	572.88M	317.257M	599.28M	317.58M	665.28M	319.371M	555.28M	318.239M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6195MHz

21/05/2024

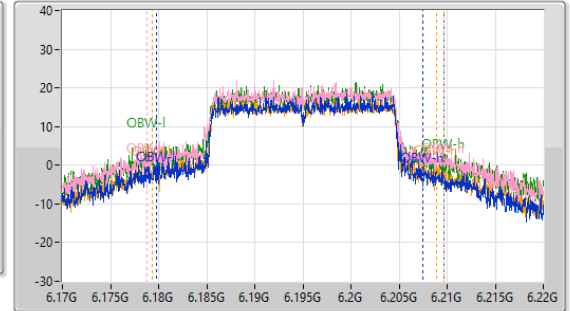
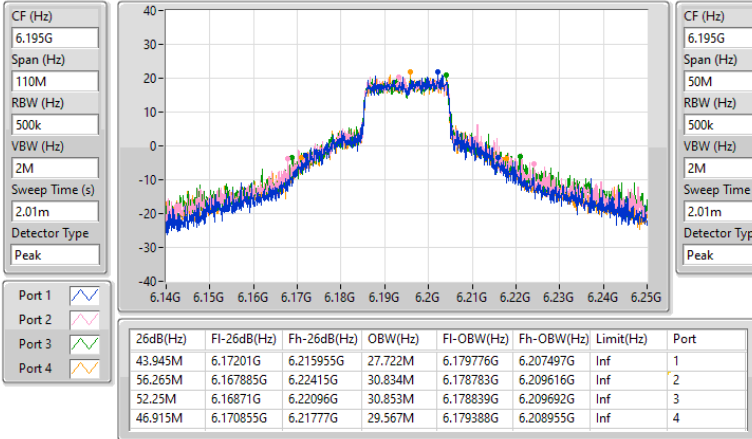


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6205MHz

21/05/2024

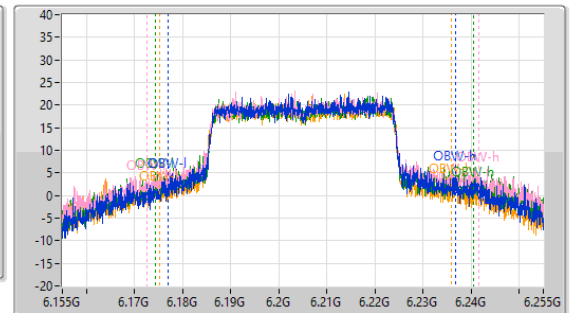
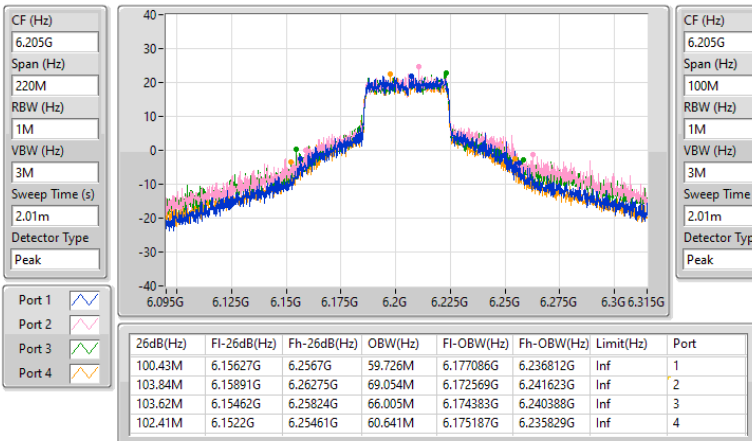


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6225MHz

21/05/2024

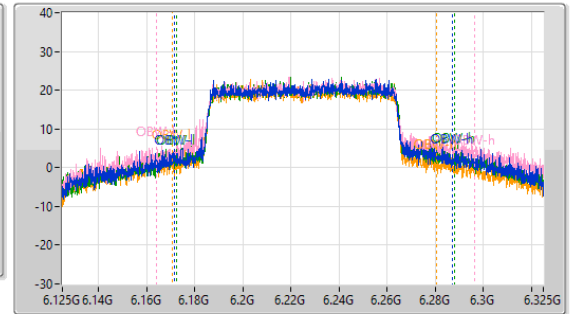
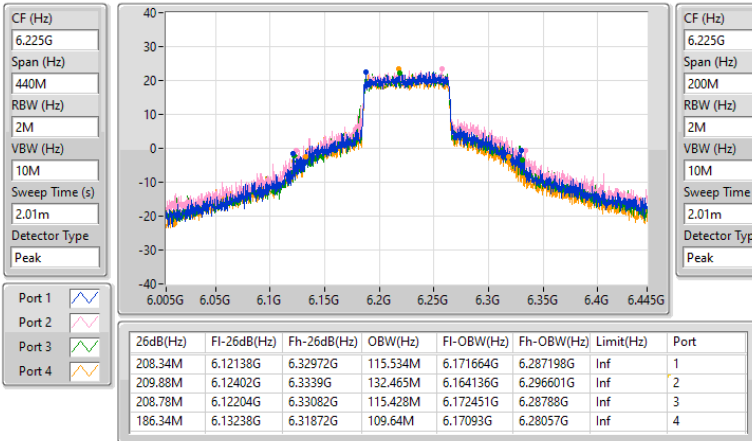


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6345MHz

21/05/2024

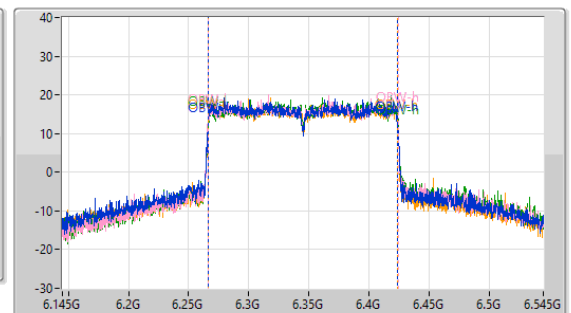
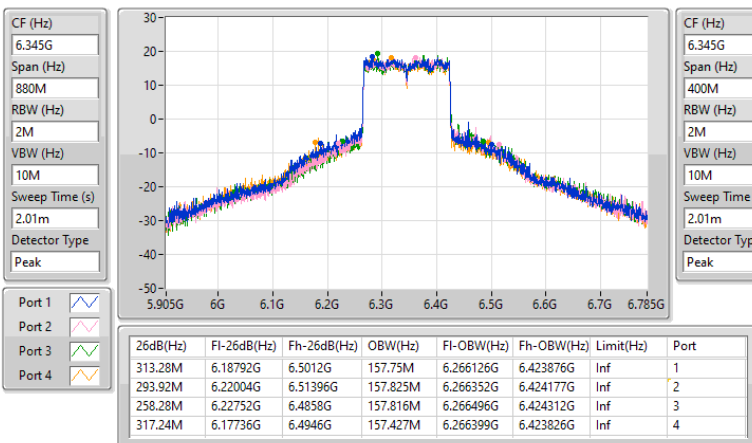


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6265MHz

21/05/2024

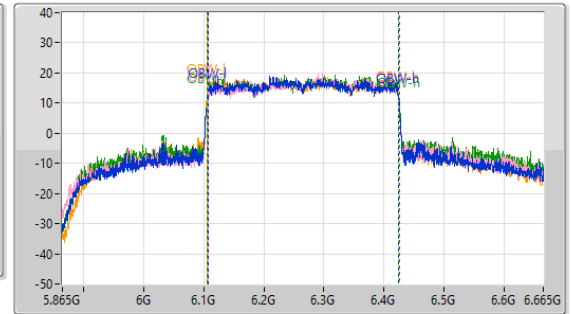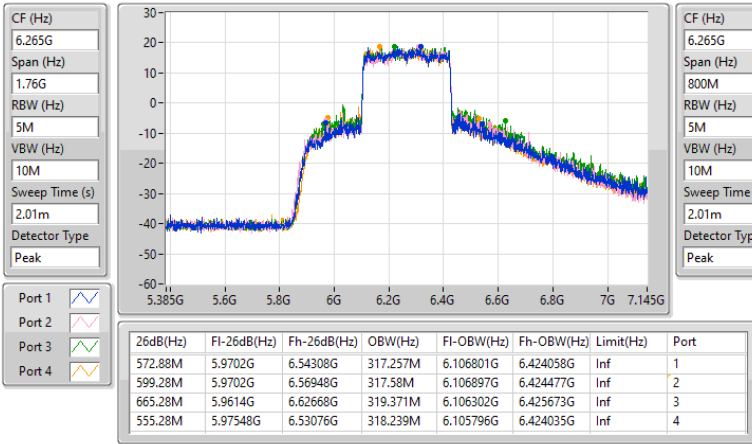


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6855MHz

21/05/2024


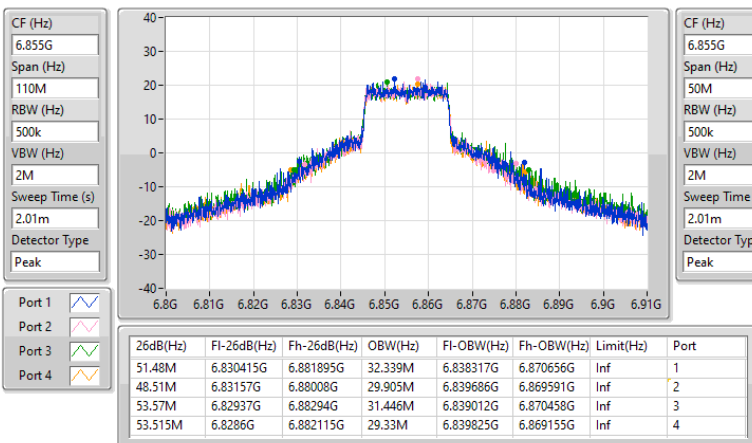


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6845MHz

21/05/2024

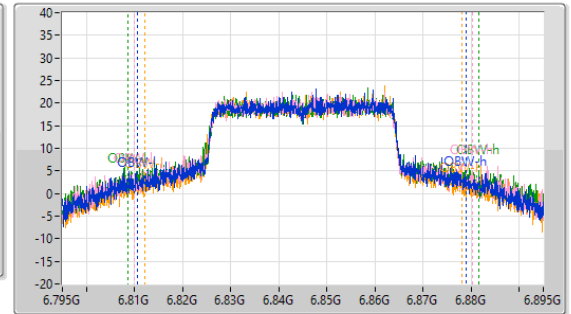
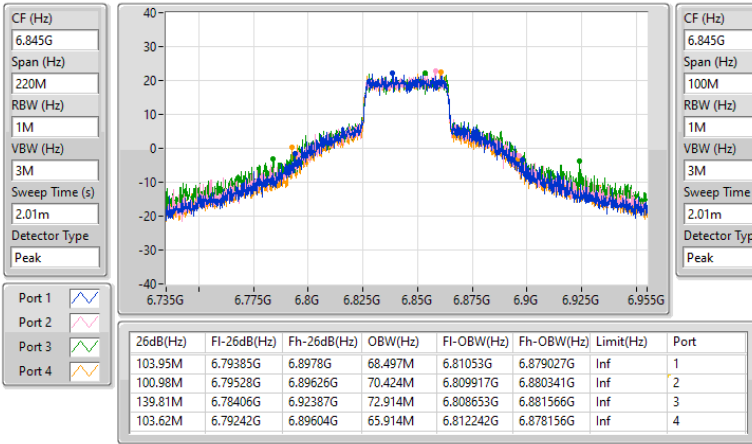


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6625MHz

21/05/2024

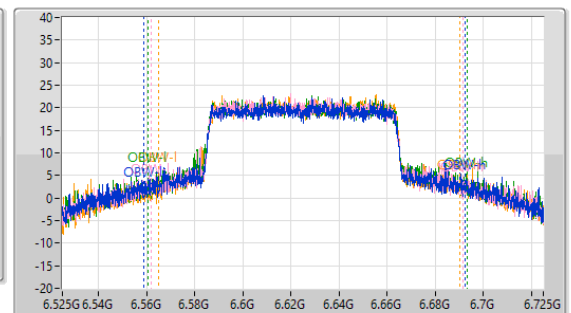
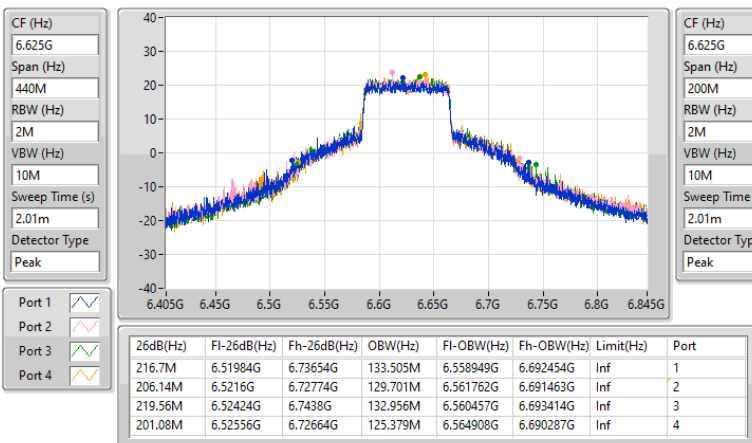


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6665MHz

21/05/2024

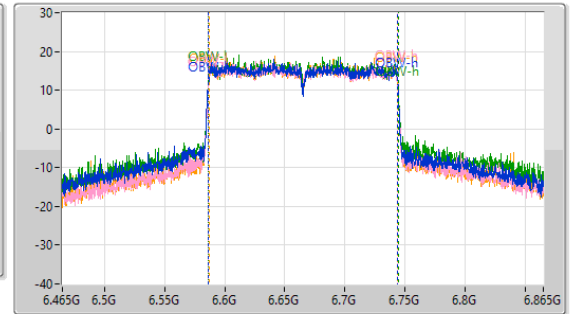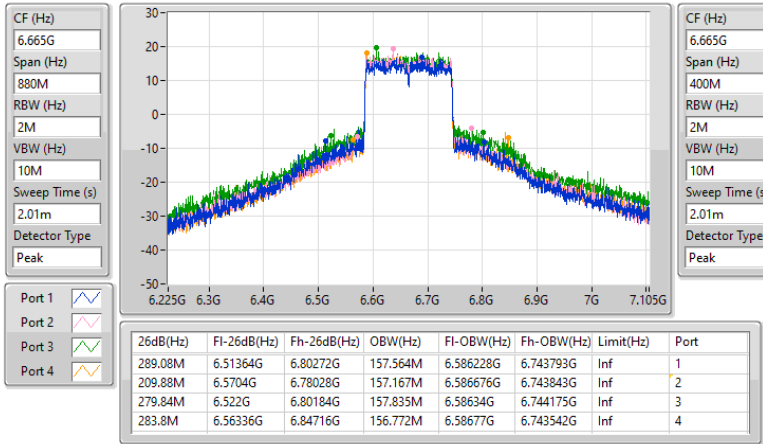

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	46.64M	19.99M	20MOD1D	21.065M	18.991M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	104.39M	62.619M	62M6D1D	39.6M	37.631M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	213.4M	127.836M	128MD1D	80.3M	76.962M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	194.04M	157.321M	157MD1D	161.04M	155.722M
802.11be EHT320-BF_Nss1,(MCS0)_4TX	642.4M	318.241M	318MD1D	324.72M	314.643M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	56.045M	29.31M	29M3D1D	30.635M	19.115M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	117.81M	74.613M	74M6D1D	95.15M	45.327M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	225.06M	134.133M	134MD1D	195.14M	112.144M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	300.96M	157.121M	157MD1D	242.88M	156.922M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	Inf	21.505M	19.04M	21.835M	19.065M	23.32M	18.991M	24.585M	19.065M
6195MHz	Pass	Inf	21.395M	19.04M	21.285M	19.04M	21.065M	18.991M	21.945M	19.04M
6415MHz	Pass	Inf	43.89M	19.29M	46.64M	19.99M	32.945M	19.215M	37.565M	19.39M
6535MHz	Pass	Inf	43.34M	19.74M	37.345M	19.215M	30.635M	19.115M	38.885M	19.315M
6695MHz	Pass	Inf	51.755M	27.736M	49.775M	26.912M	48.73M	29.31M	56.045M	28.011M
6855MHz	Pass	Inf	45.375M	20.115M	32.615M	19.165M	44.22M	19.34M	42.24M	19.315M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	39.93M	37.731M	39.6M	37.631M	39.82M	37.731M	39.82M	37.681M
6205MHz	Pass	Inf	104.39M	60.97M	99.99M	60.52M	99.44M	62.619M	100.87M	62.469M
6405MHz	Pass	Inf	77.44M	38.631M	87.12M	38.681M	77.44M	38.131M	77.22M	38.081M
6565MHz	Pass	Inf	117.81M	67.566M	101.09M	63.318M	101.75M	62.169M	102.08M	66.267M
6685MHz	Pass	Inf	103.29M	68.916M	103.29M	74.613M	103.07M	66.317M	108.46M	70.165M
6845MHz	Pass	Inf	99.55M	60.47M	95.15M	45.327M	96.03M	54.073M	98.89M	57.971M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	81.62M	76.962M	80.3M	77.261M	80.96M	77.361M	80.74M	77.261M
6225MHz	Pass	Inf	213.4M	122.239M	193.16M	112.644M	179.08M	87.556M	211.2M	127.836M
6385MHz	Pass	Inf	140.58M	77.961M	181.5M	78.361M	173.8M	78.161M	171.6M	78.061M
6625MHz	Pass	Inf	195.14M	114.843M	225.06M	126.037M	211.2M	122.839M	214.94M	126.137M
6705MHz	Pass	Inf	201.52M	118.641M	212.96M	119.64M	206.14M	130.835M	203.06M	132.834M
6785MHz	Pass	Inf	202.62M	127.936M	209.66M	134.133M	204.6M	112.144M	198.22M	130.935M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	162.8M	155.722M	161.48M	156.322M	161.92M	155.922M	164.12M	155.922M
6185MHz	Pass	Inf	170.28M	156.322M	163.24M	156.722M	161.92M	156.322M	194.04M	156.322M
6345MHz	Pass	Inf	185.68M	157.321M	165.88M	156.322M	161.04M	156.722M	162.8M	156.722M
6665MHz	Pass	Inf	300.96M	156.922M	242.88M	157.121M	289.52M	157.121M	255.64M	156.922M
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	324.72M	314.643M	325.6M	315.842M	326.48M	317.441M	325.6M	315.442M
6265MHz	Pass	Inf	552.64M	317.441M	600.16M	317.841M	612.48M	318.241M	642.4M	317.441M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

6415MHz

03/06/2024


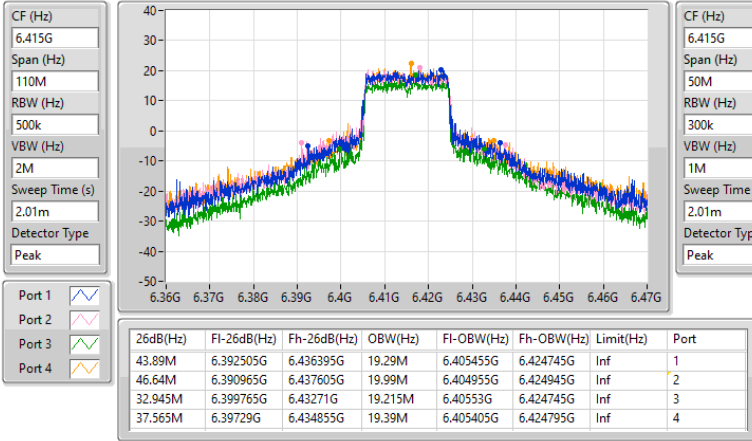


5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

6205MHz

03/06/2024

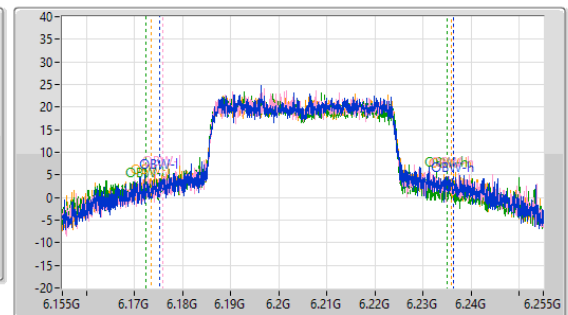
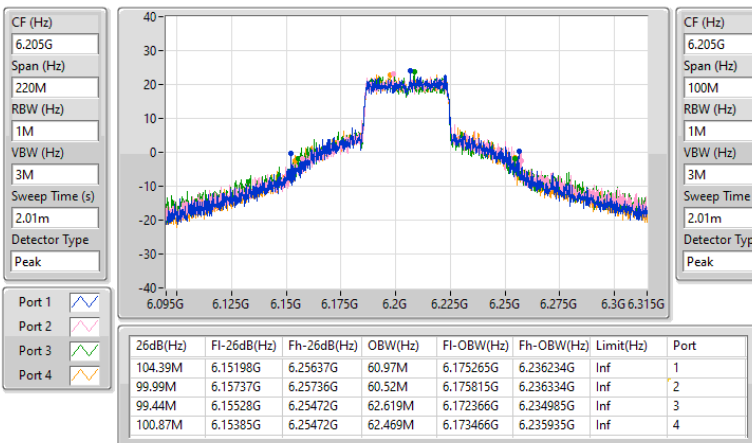


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6225MHz

03/06/2024

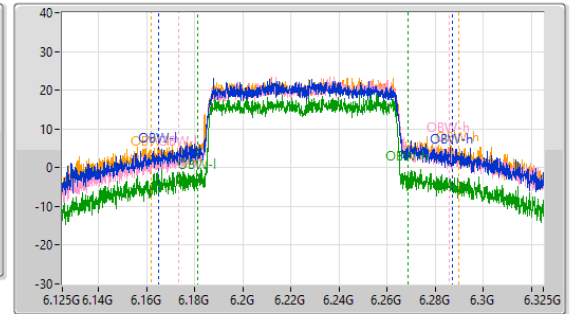
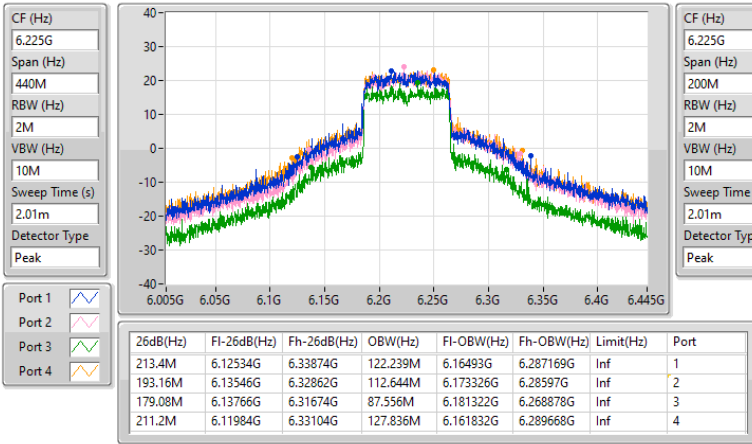


5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6185MHz

03/06/2024

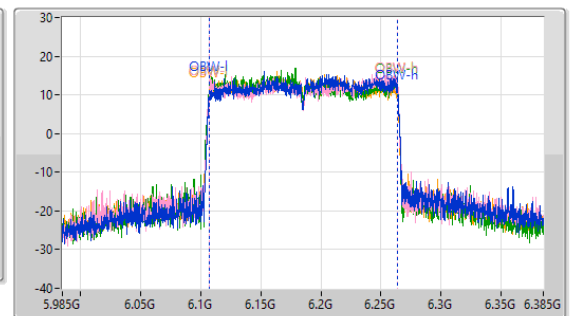
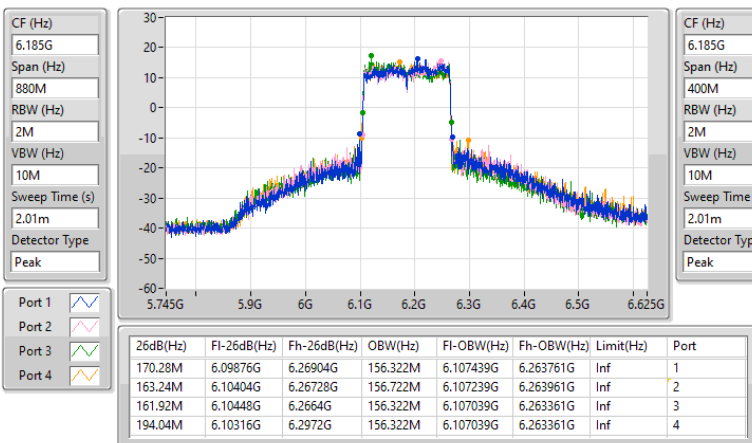


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

EBW

6265MHz

03/06/2024

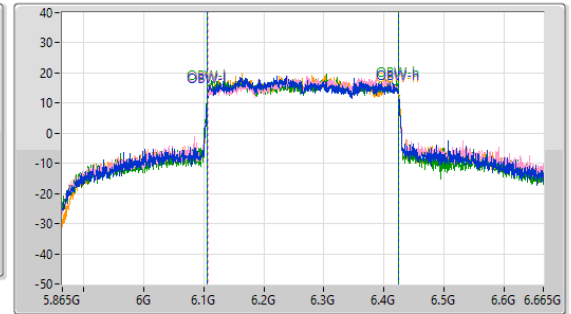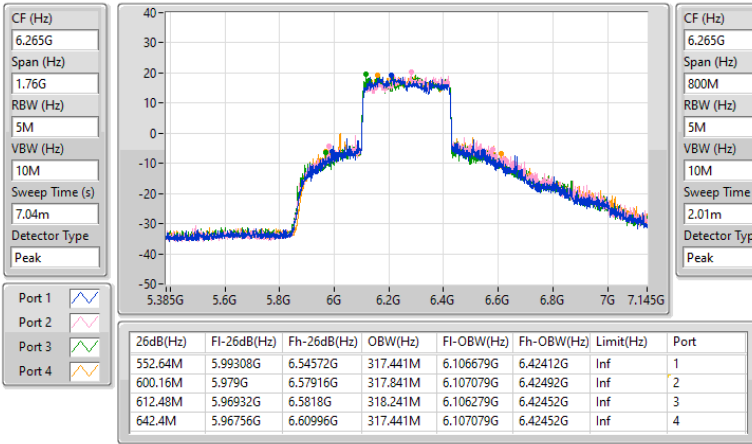


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

6695MHz

03/06/2024


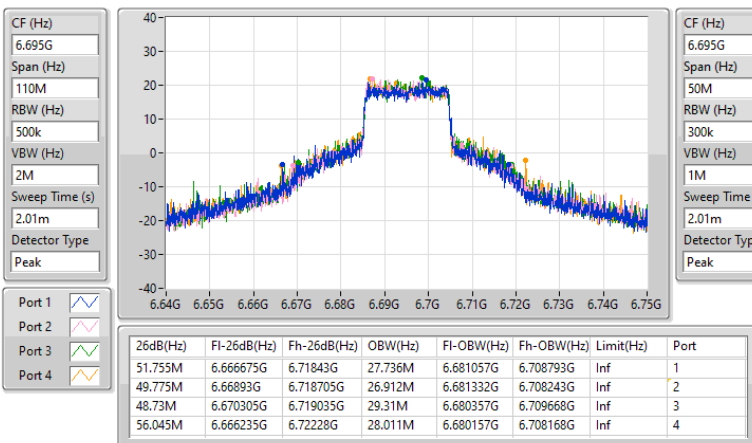


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

6565MHz

03/06/2024

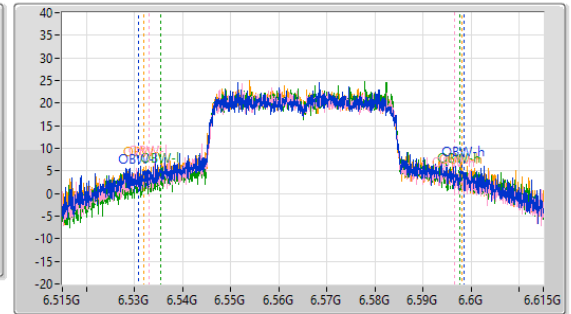
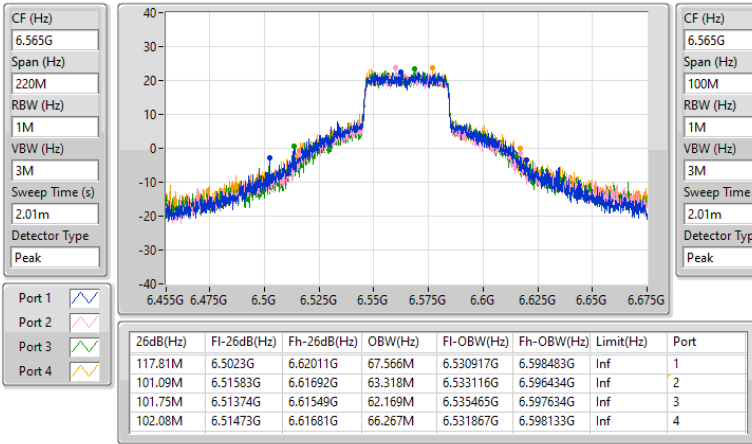


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6625MHz

03/06/2024

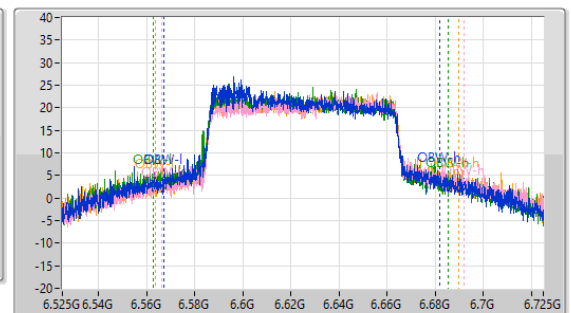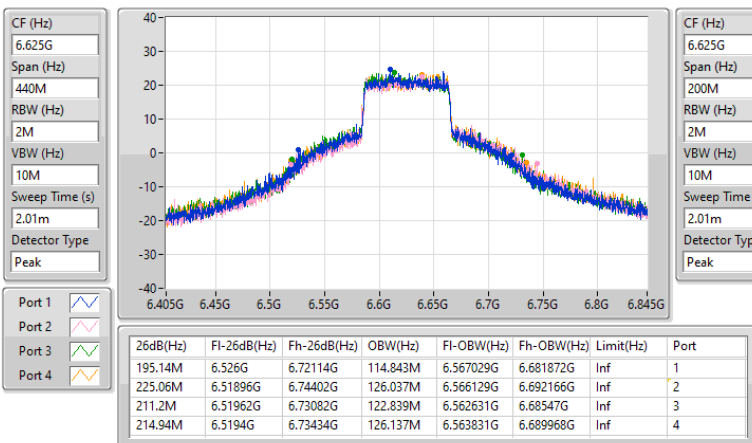


6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6665MHz

03/06/2024

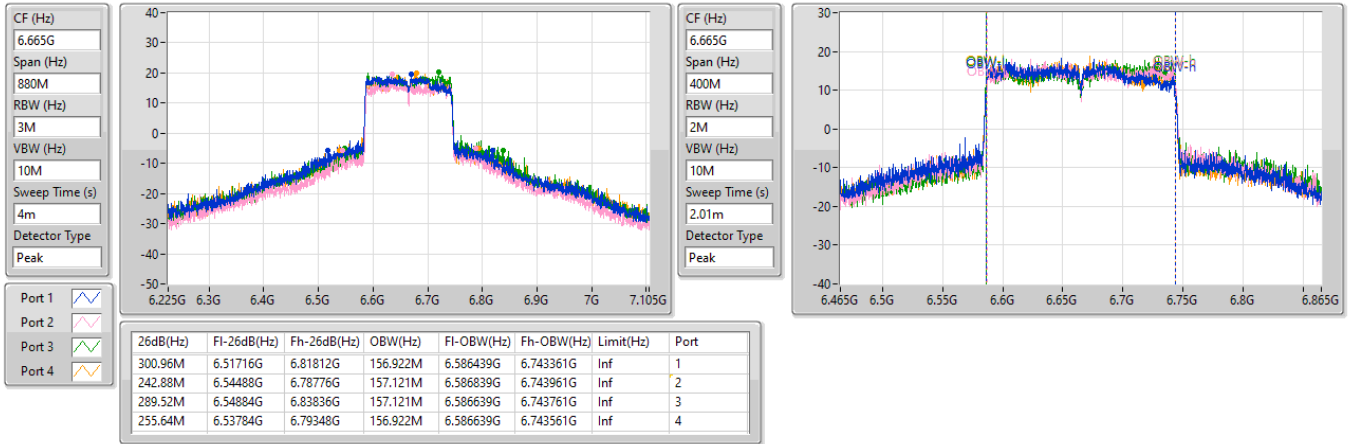


**Summary**

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	31.42	1.38676
802.11be EHT40_Nss1,(MCS0)_4TX	31.64	1.45881
802.11be EHT80_Nss1,(MCS0)_4TX	31.04	1.27057
802.11be EHT160_Nss1,(MCS0)_4TX	31.14	1.30017
802.11be EHT320_Nss1,(MCS0)_4TX	31.03	1.26765
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	31.88	1.54170
802.11be EHT40_Nss1,(MCS0)_4TX	32.09	1.61808
802.11be EHT80_Nss1,(MCS0)_4TX	32.22	1.66725
802.11be EHT160_Nss1,(MCS0)_4TX	31.57	1.43549


**Result**

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	28.08	36.00
6195MHz	Pass	30.79	36.00
6415MHz	Pass	31.42	36.00
6535MHz	Pass	31.66	36.00
6695MHz	Pass	31.73	36.00
6855MHz	Pass	31.88	36.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	26.42	36.00
6205MHz	Pass	30.85	36.00
6405MHz	Pass	31.64	36.00
6565MHz	Pass	32.03	36.00
6685MHz	Pass	32.06	36.00
6845MHz	Pass	32.09	36.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	25.14	36.00
6225MHz	Pass	30.97	36.00
6385MHz	Pass	31.04	36.00
6625MHz	Pass	32.22	36.00
6705MHz	Pass	31.88	36.00
6785MHz	Pass	32.09	36.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	25.04	36.00
6185MHz	Pass	30.32	36.00
6345MHz	Pass	31.14	36.00
6665MHz	Pass	31.57	36.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	26.27	36.00
6265MHz	Pass	31.03	36.00


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

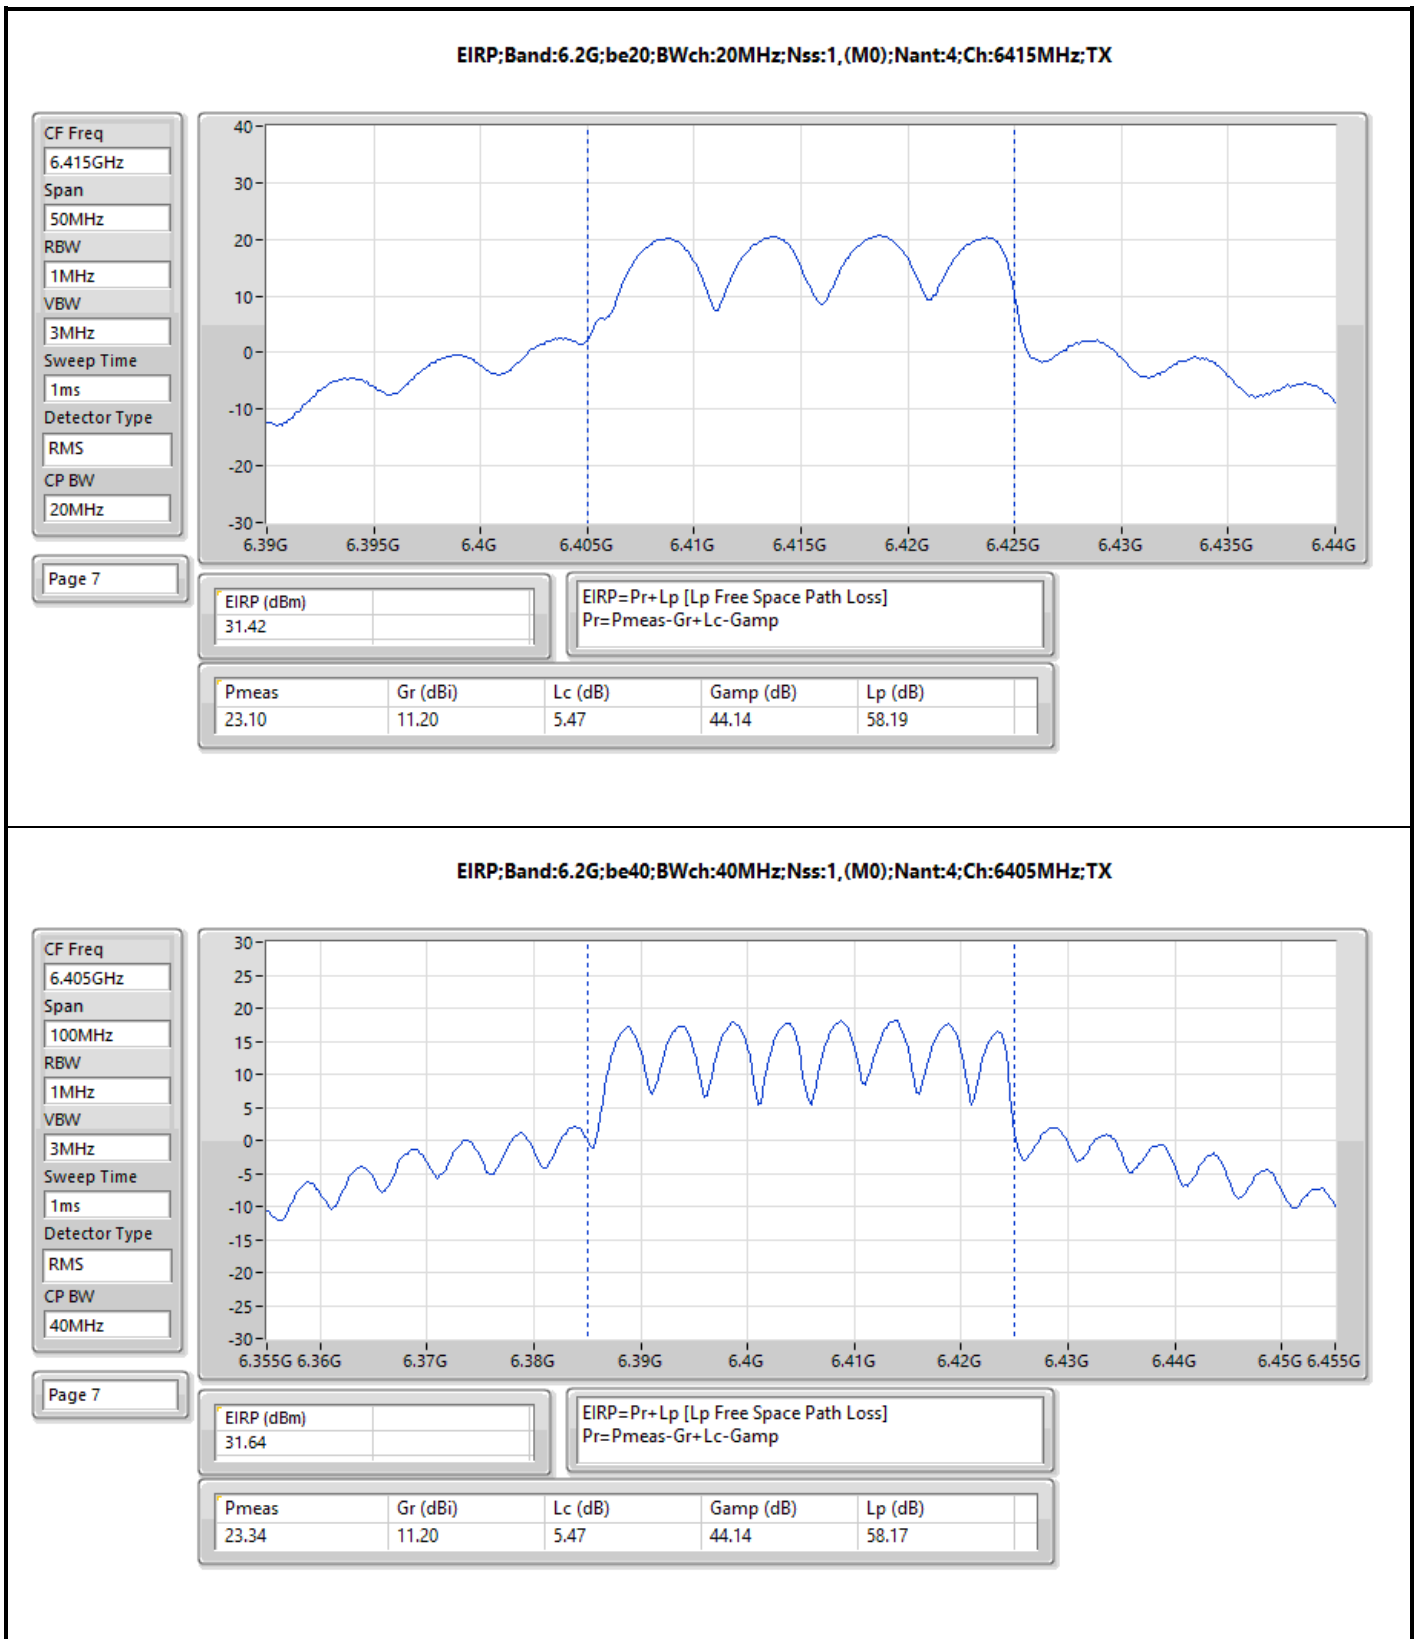


EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

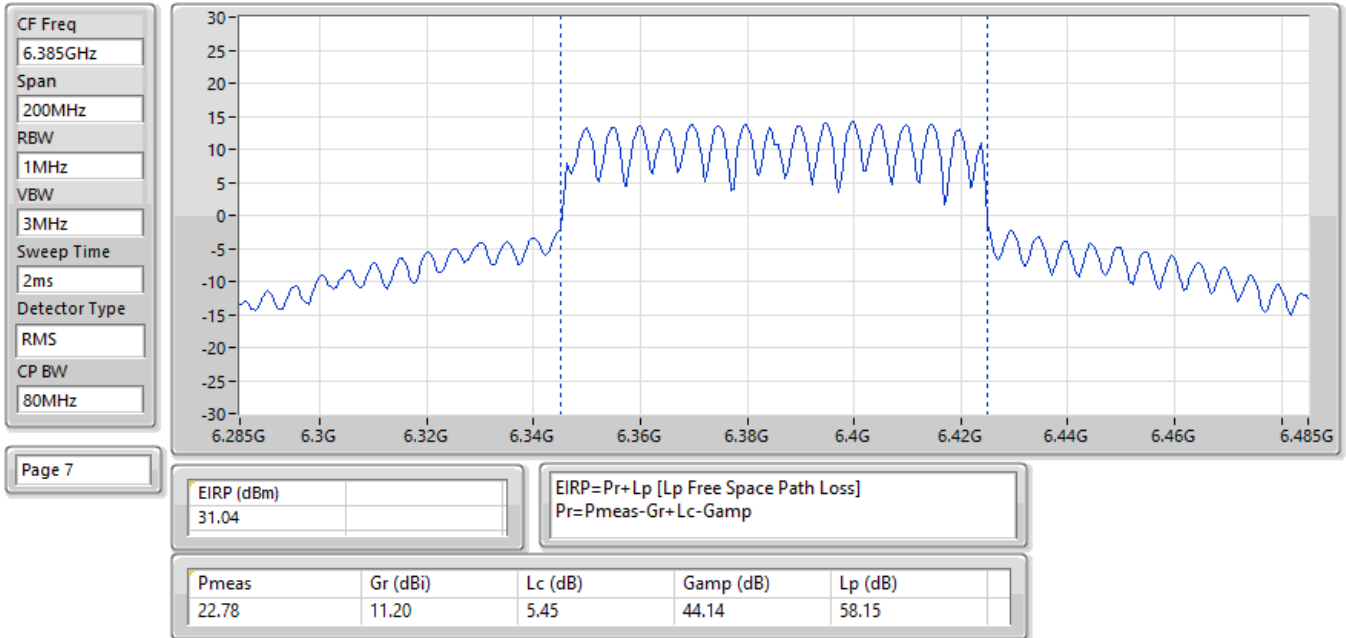


EIRP:Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

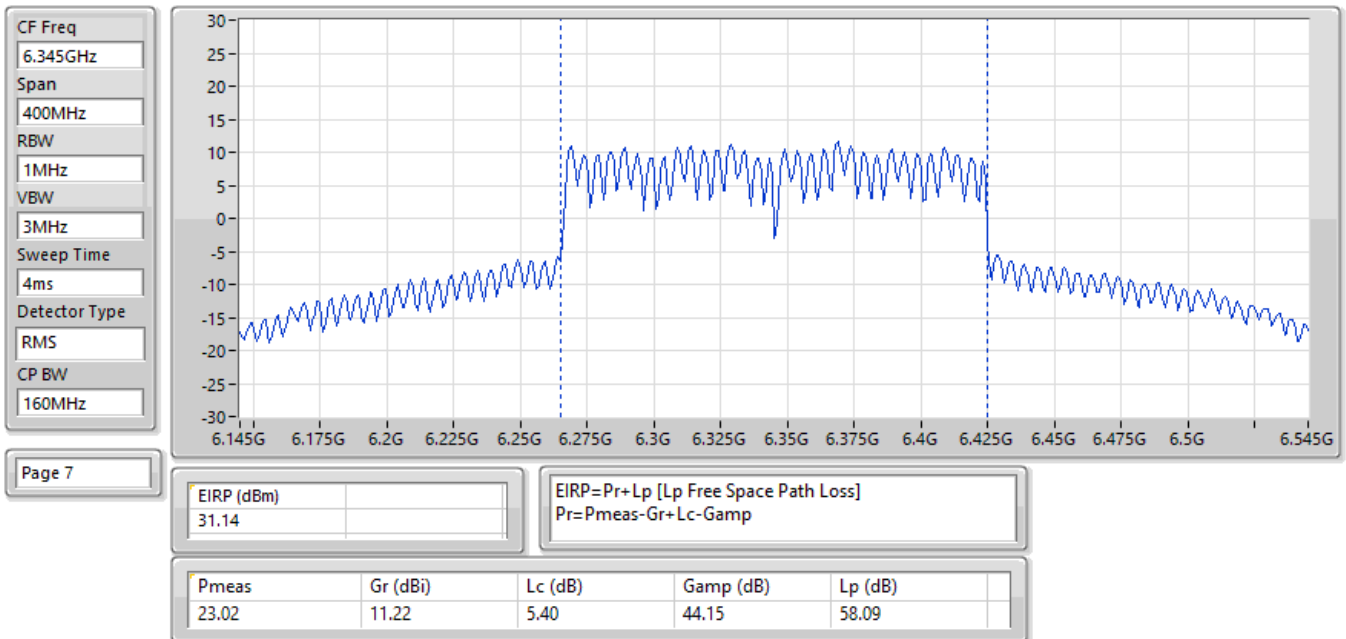


EIRP;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

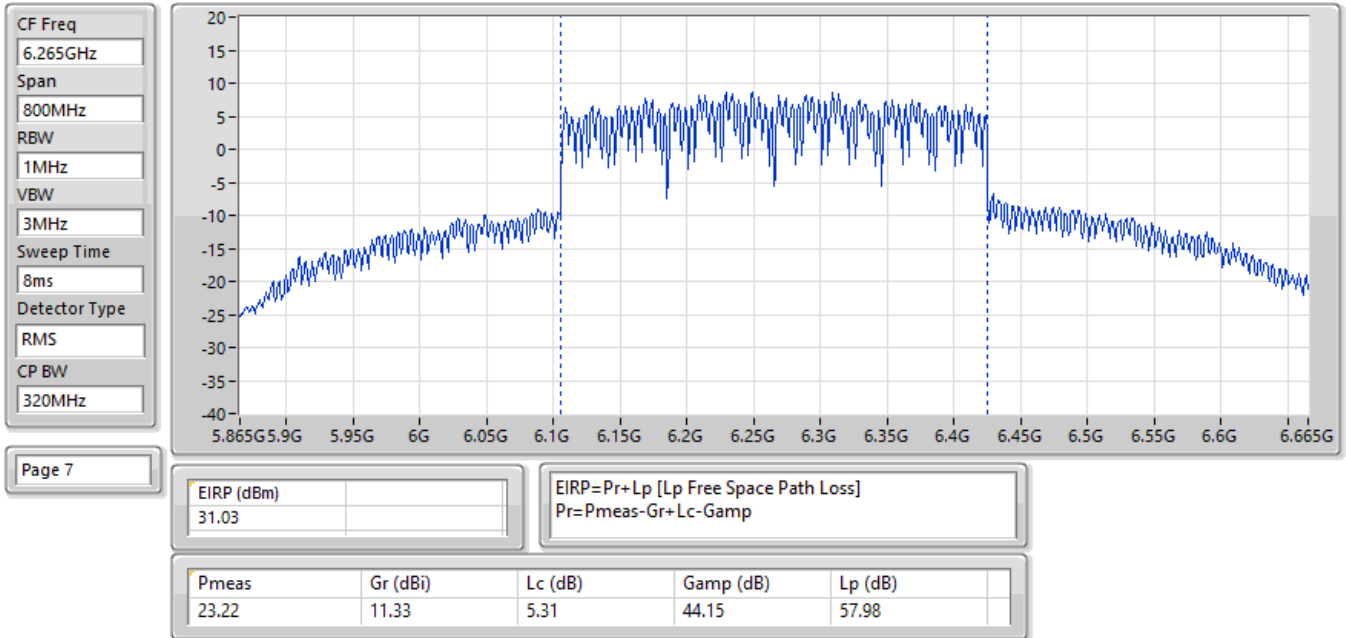


EIRP;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6855MHz;TX

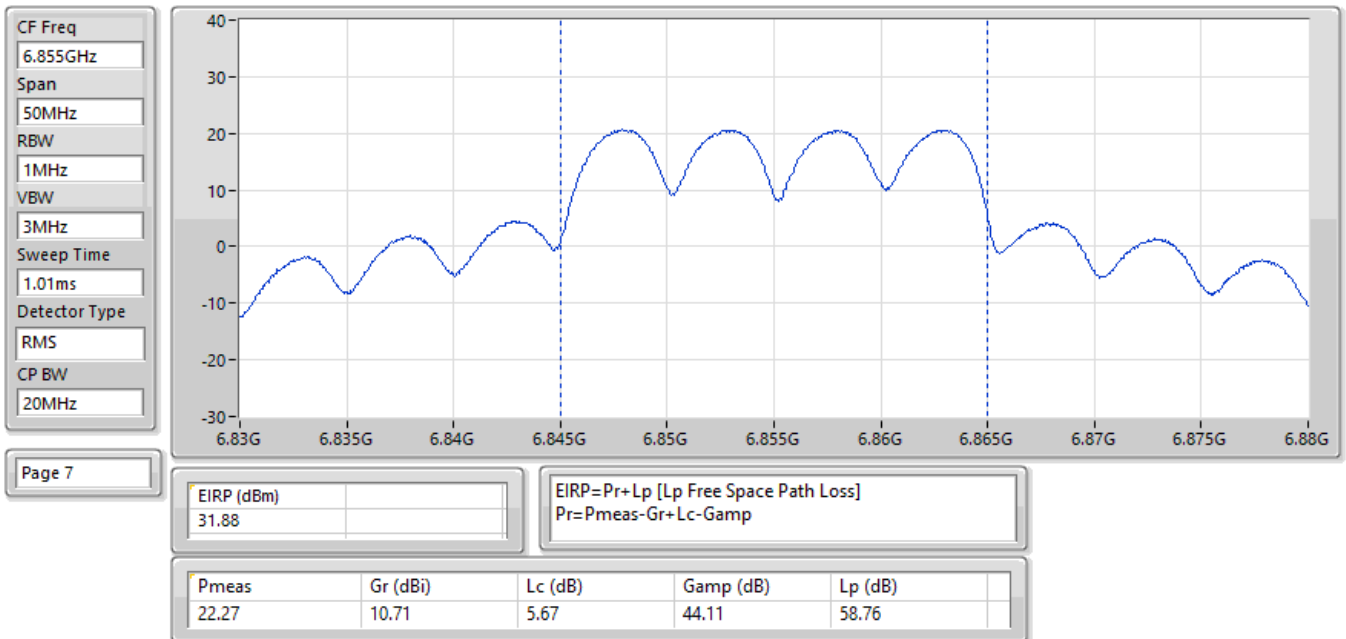


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6845MHz;TX

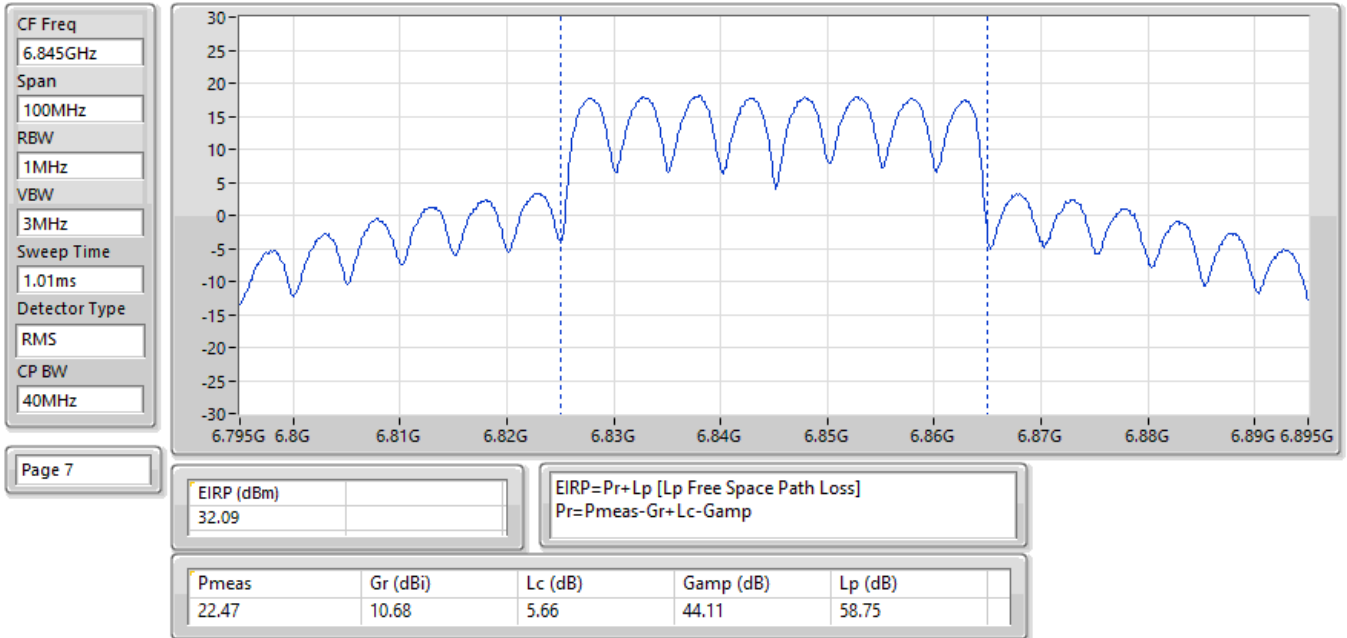

EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

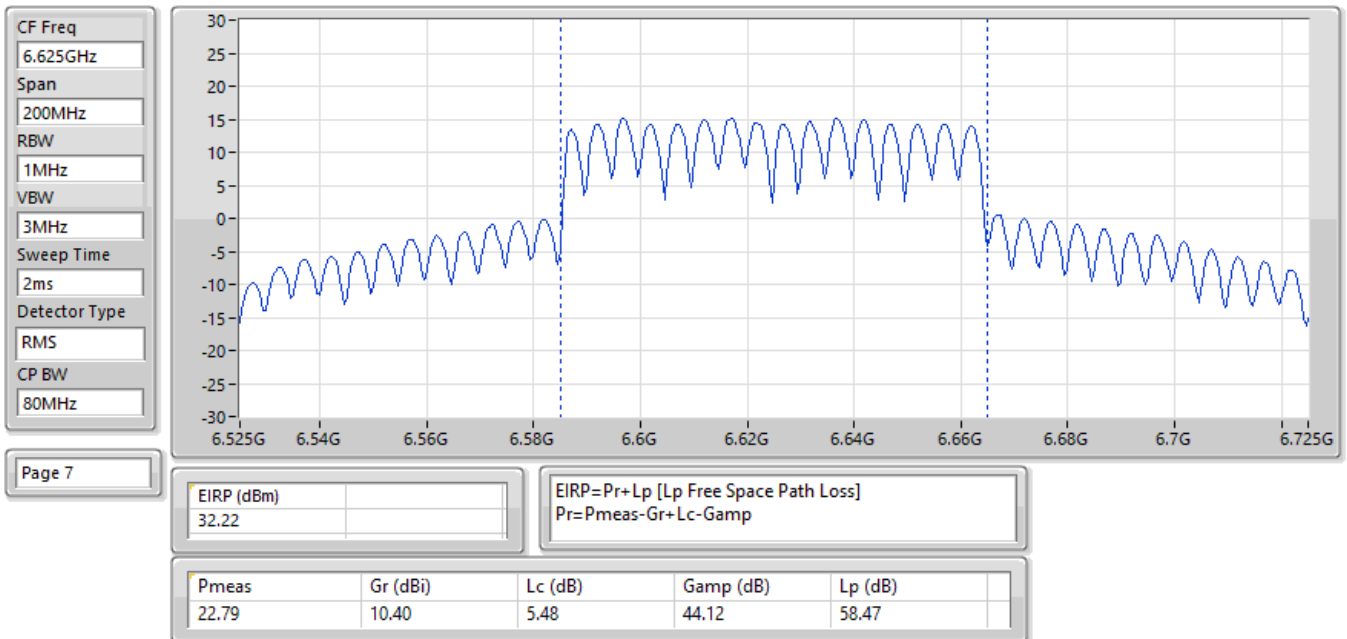

EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

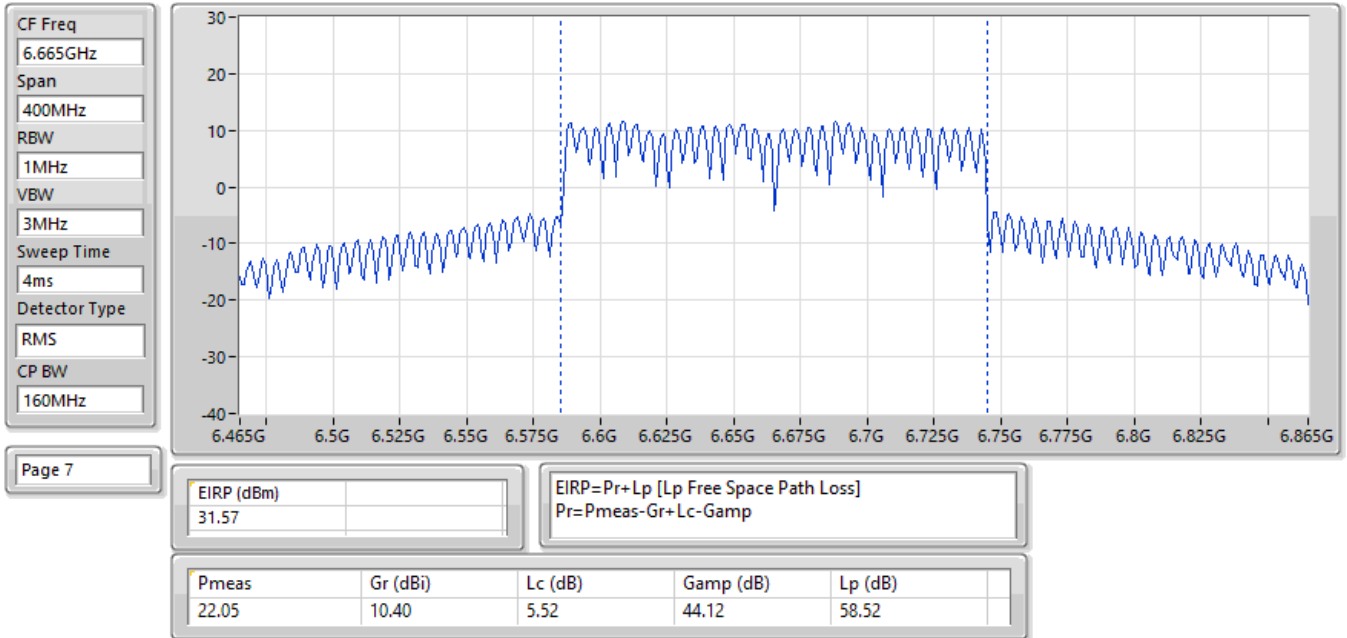

**Summary**


Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	24.12	0.25823
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	23.47	0.22233
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 1_4TX	23.98	0.25003
6.525-6.875GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	30.15	1.03514
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	28.05	0.63826

**Result**


Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-
5985MHz	Pass	24.12	36.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	-	-	-
6785MHz	Pass	30.15	36.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX	-	-	-
6025MHz	Pass	23.42	36.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-
6025MHz	Pass	23.47	36.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX	-	-	-
6665MHz	Pass	27.77	36.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-
6665MHz	Pass	28.05	36.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX	-	-	-
6105MHz	Pass	23.95	36.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-
6105MHz	Pass	23.98	36.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX	-	-	-
6105MHz	Pass	23.82	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.


EIRP;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 3;Nant:4;Ch:5985MHz;TX

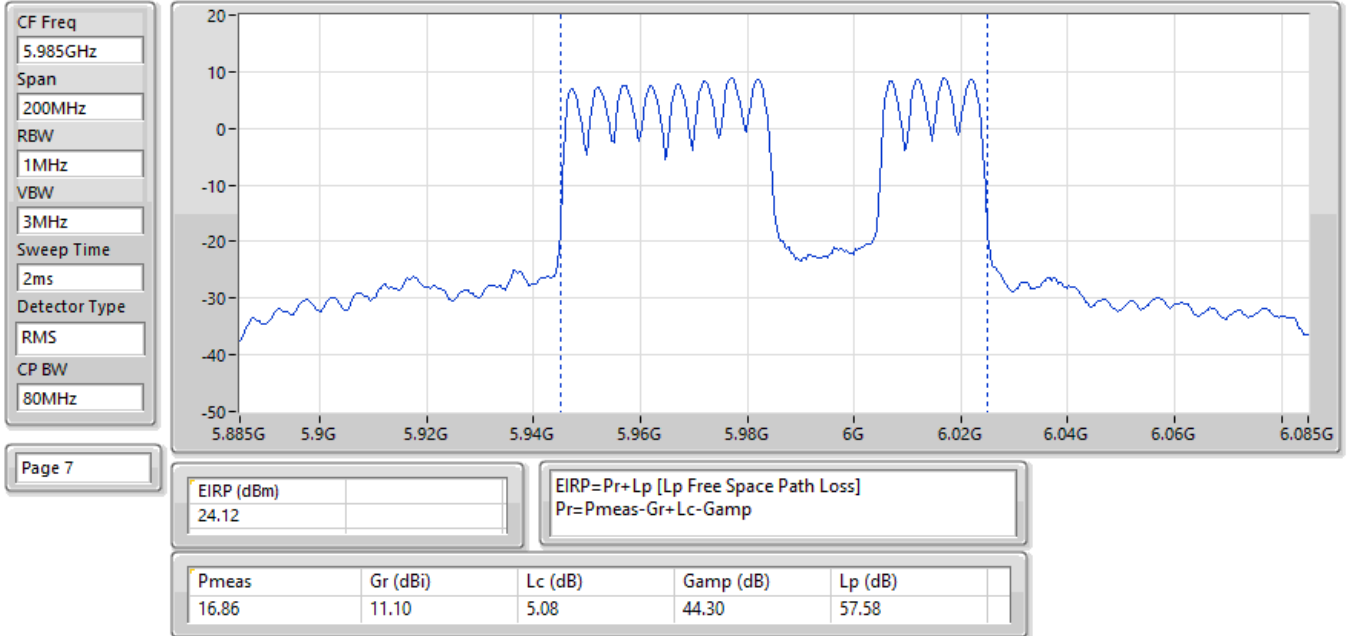


EIRP;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996-RU484 MRU 3;Nant:4;Ch:6025MHz;TX

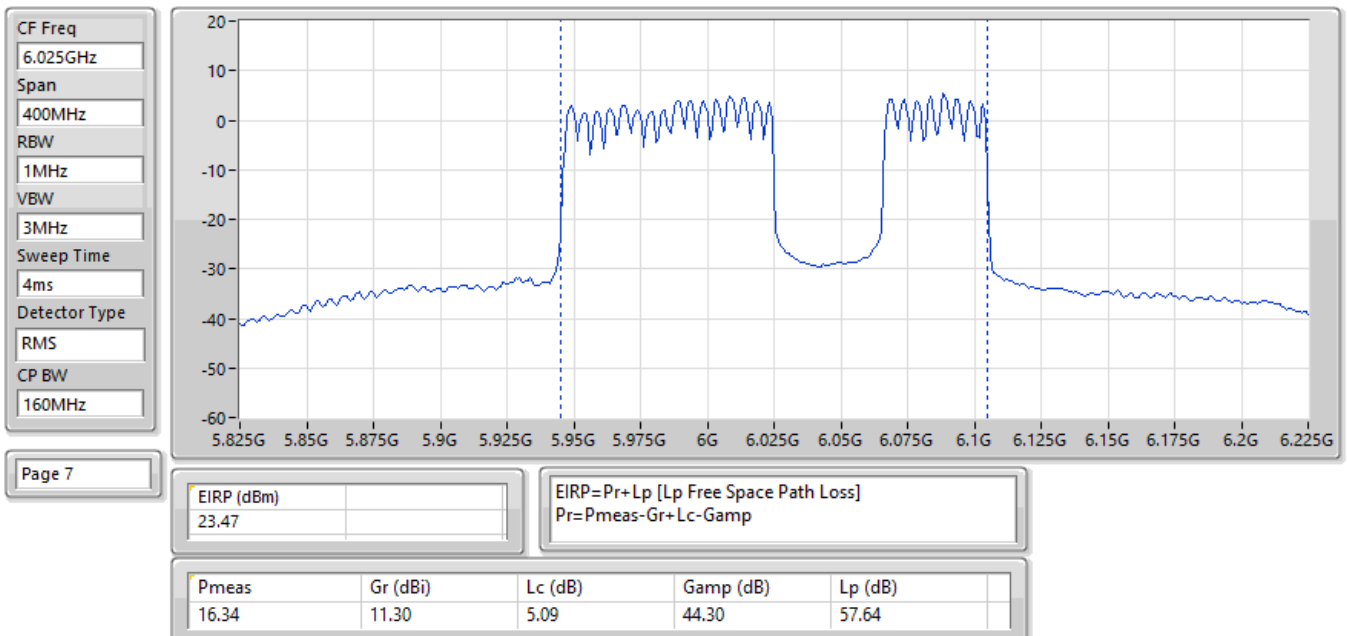


EIRP;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),3xRU996 MRU 4;Nant:4;Ch:6105MHz;TX

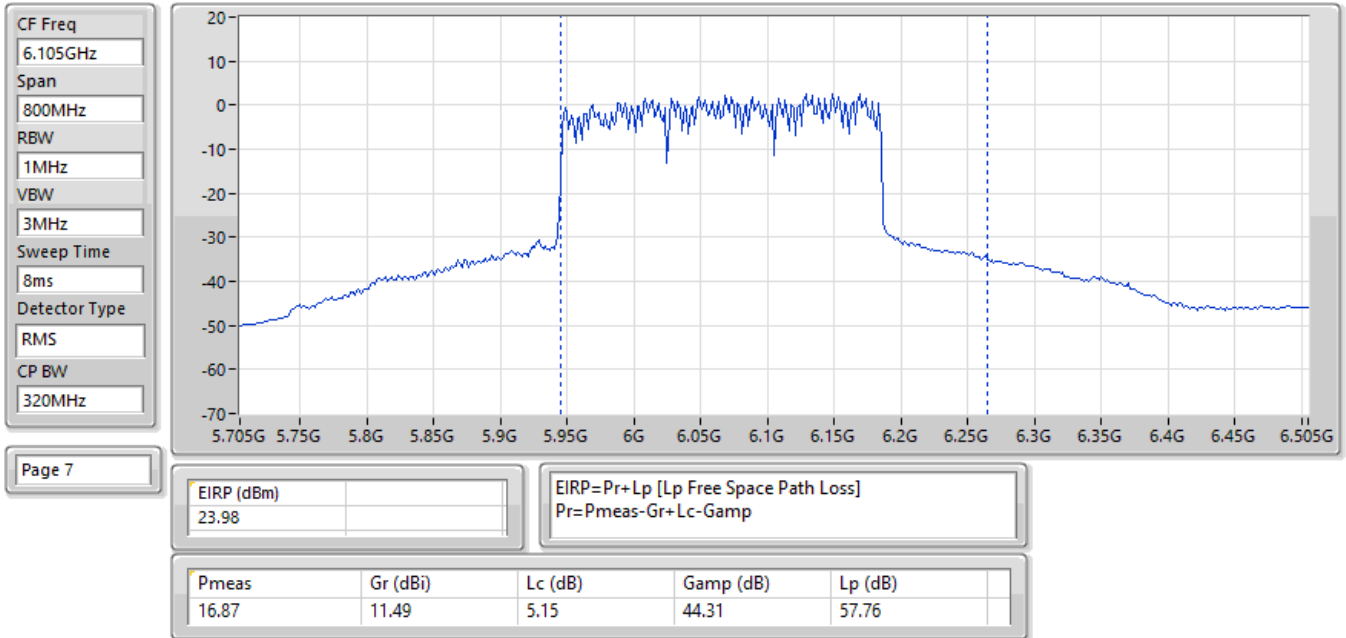

EIRP;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 1;Nant:4;Ch:6785MHz;TX

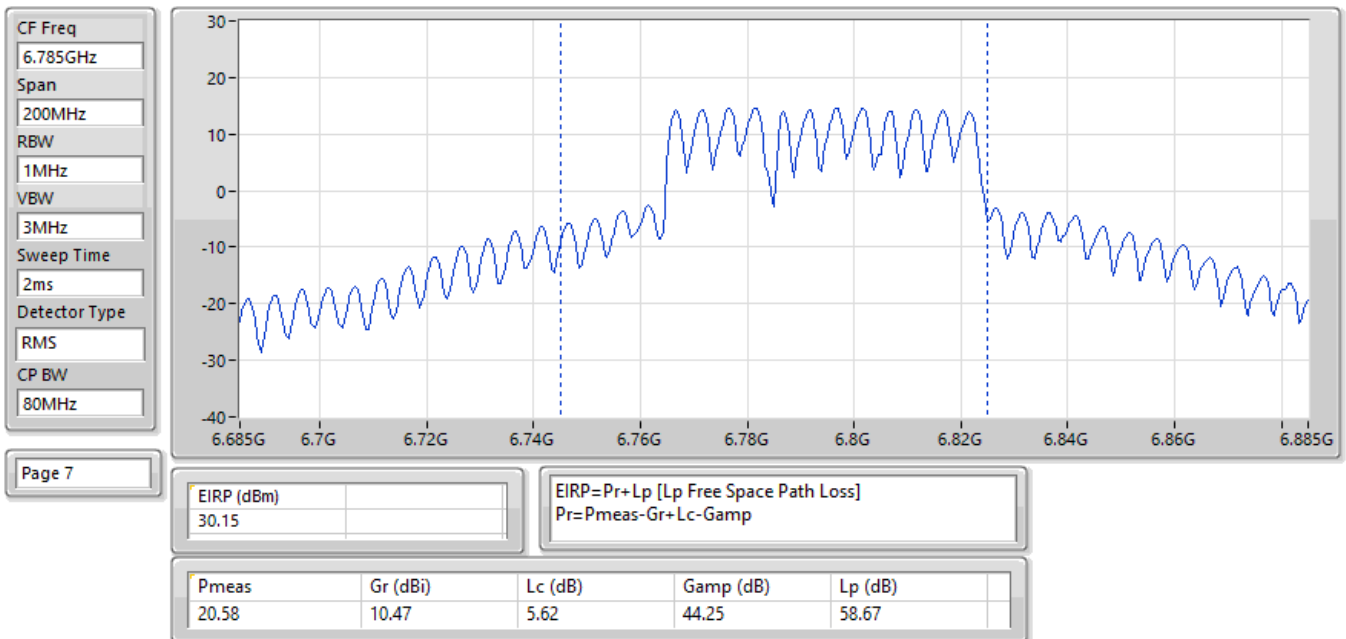

EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 3;Nant:4;Ch:6665MHz;TX

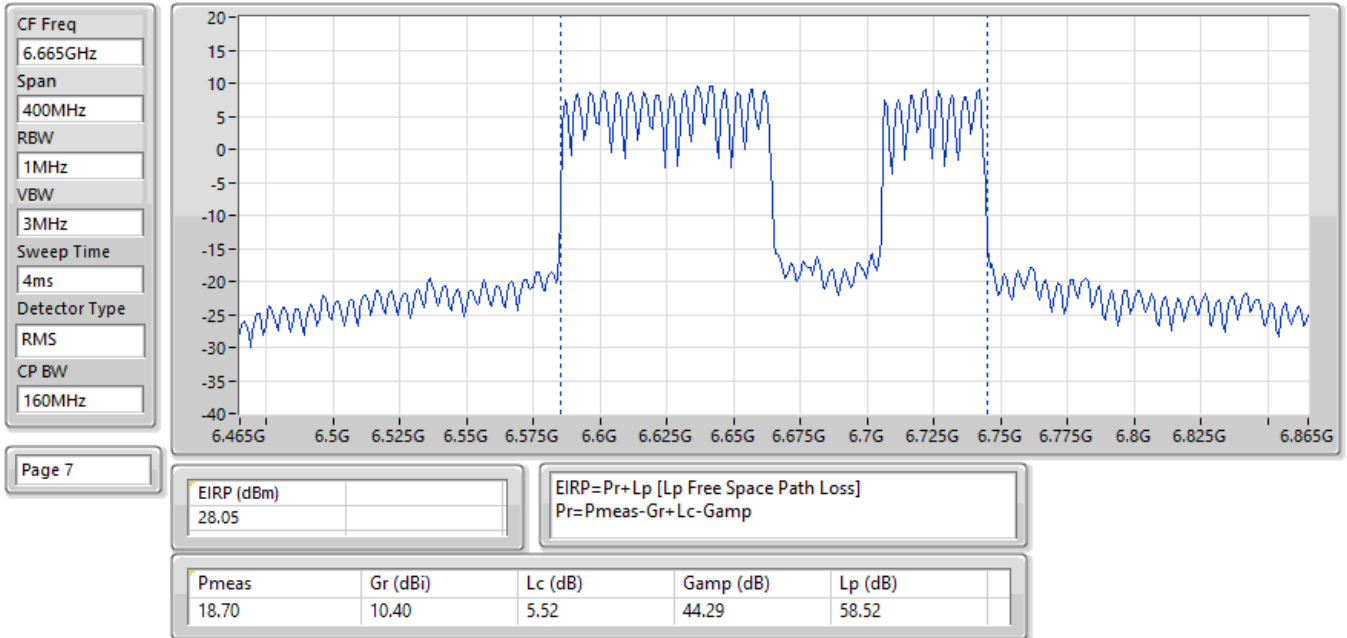

**Summary**


Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	31.04	1.27057
802.11be EHT40-BF_Nss1,(MCS0)_4TX	31.72	1.48594
802.11be EHT80-BF_Nss1,(MCS0)_4TX	31.99	1.58125
802.11be EHT160-BF_Nss1,(MCS0)_4TX	29.28	0.84723
802.11be EHT320-BF_Nss1,(MCS0)_4TX	29.77	0.94842
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	32.91	1.95434
802.11be EHT40-BF_Nss1,(MCS0)_4TX	33.43	2.20293
802.11be EHT80-BF_Nss1,(MCS0)_4TX	33.43	2.20293
802.11be EHT160-BF_Nss1,(MCS0)_4TX	31.02	1.26474

Result


Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	28.92	36.00
6195MHz	Pass	28.24	36.00
6415MHz	Pass	31.04	36.00
6535MHz	Pass	31.30	36.00
6695MHz	Pass	32.91	36.00
6855MHz	Pass	31.95	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	27.96	36.00
6205MHz	Pass	31.72	36.00
6405MHz	Pass	31.37	36.00
6565MHz	Pass	33.38	36.00
6685MHz	Pass	33.43	36.00
6845MHz	Pass	32.08	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	25.56	36.00
6225MHz	Pass	31.99	36.00
6385MHz	Pass	30.81	36.00
6625MHz	Pass	33.43	36.00
6705MHz	Pass	33.41	36.00
6785MHz	Pass	33.27	36.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	25.62	36.00
6185MHz	Pass	28.92	36.00
6345MHz	Pass	29.28	36.00
6665MHz	Pass	31.02	36.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	27.57	36.00
6265MHz	Pass	29.77	36.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.


EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

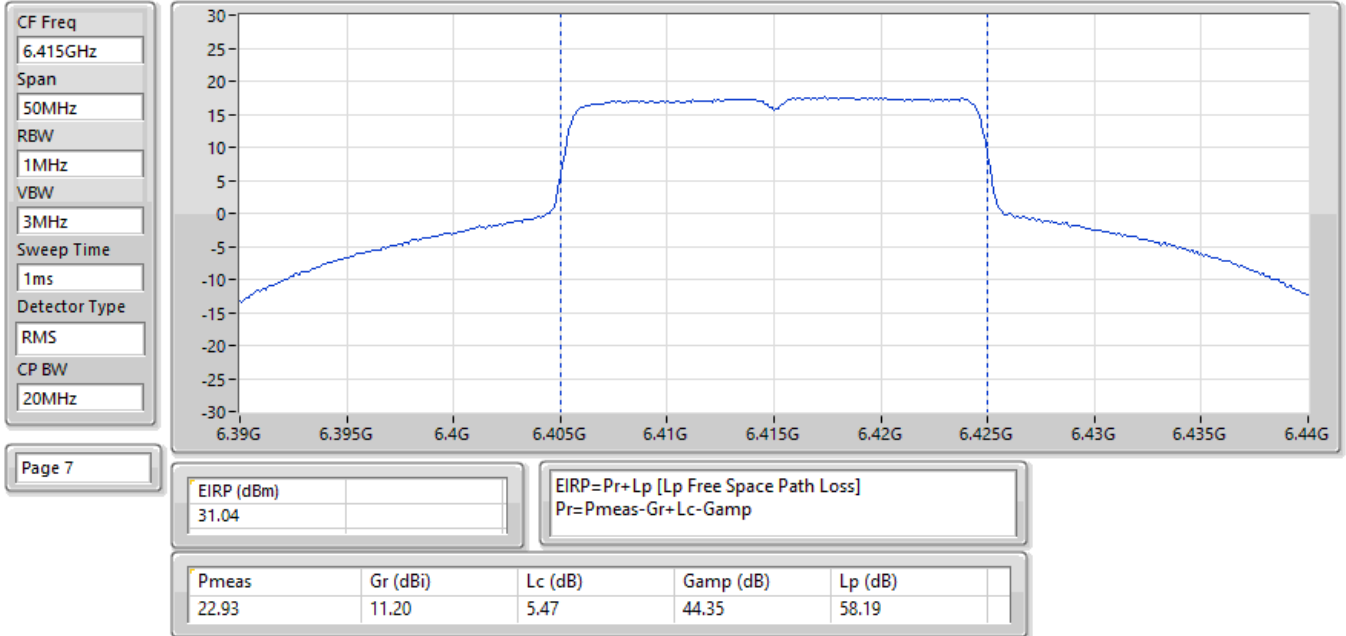


EIRP;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

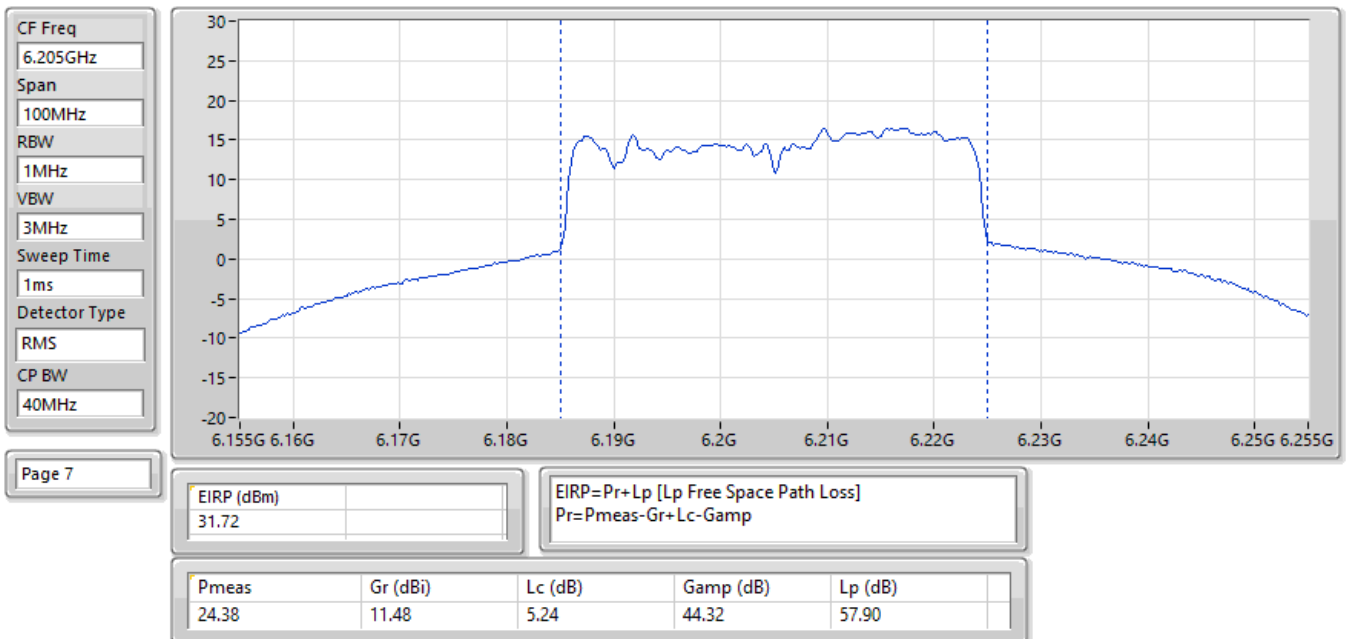


EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

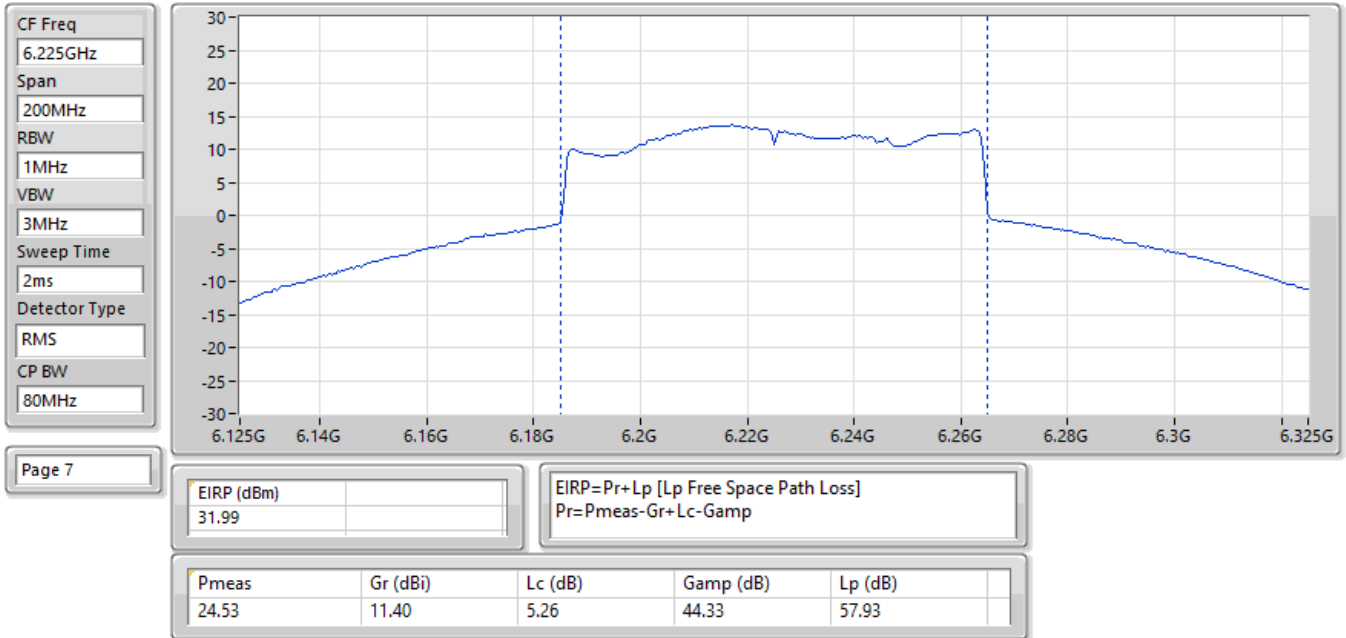


EIRP:Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

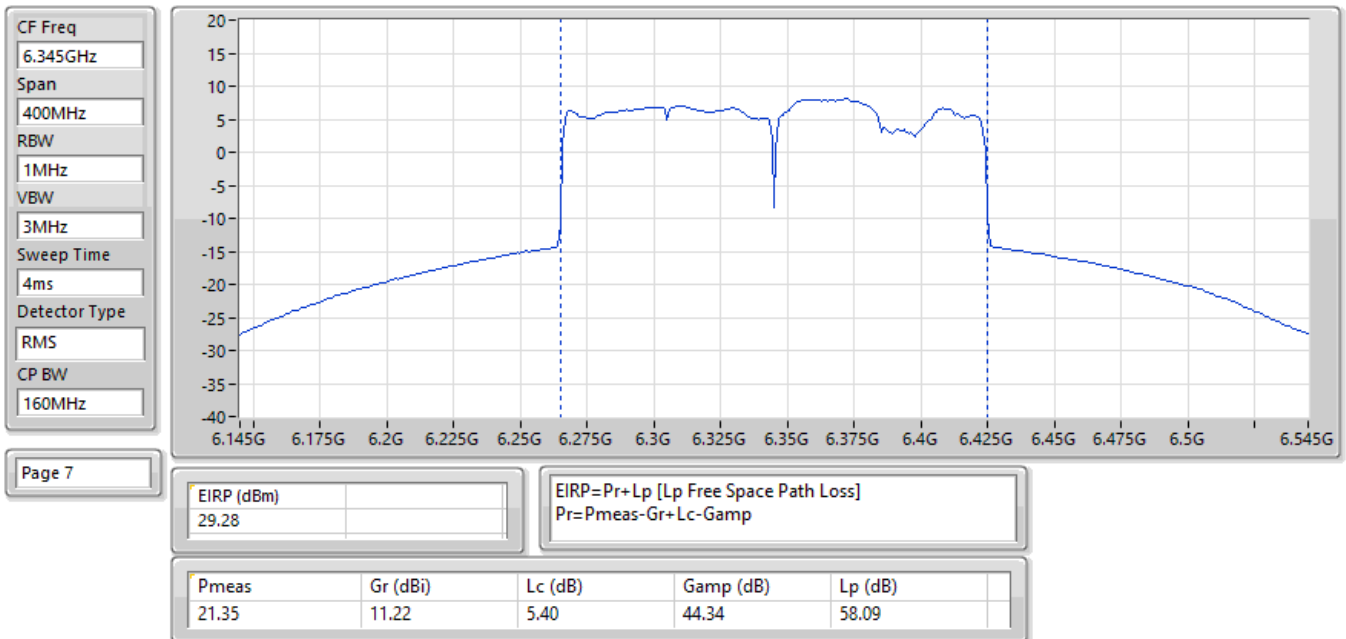


EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

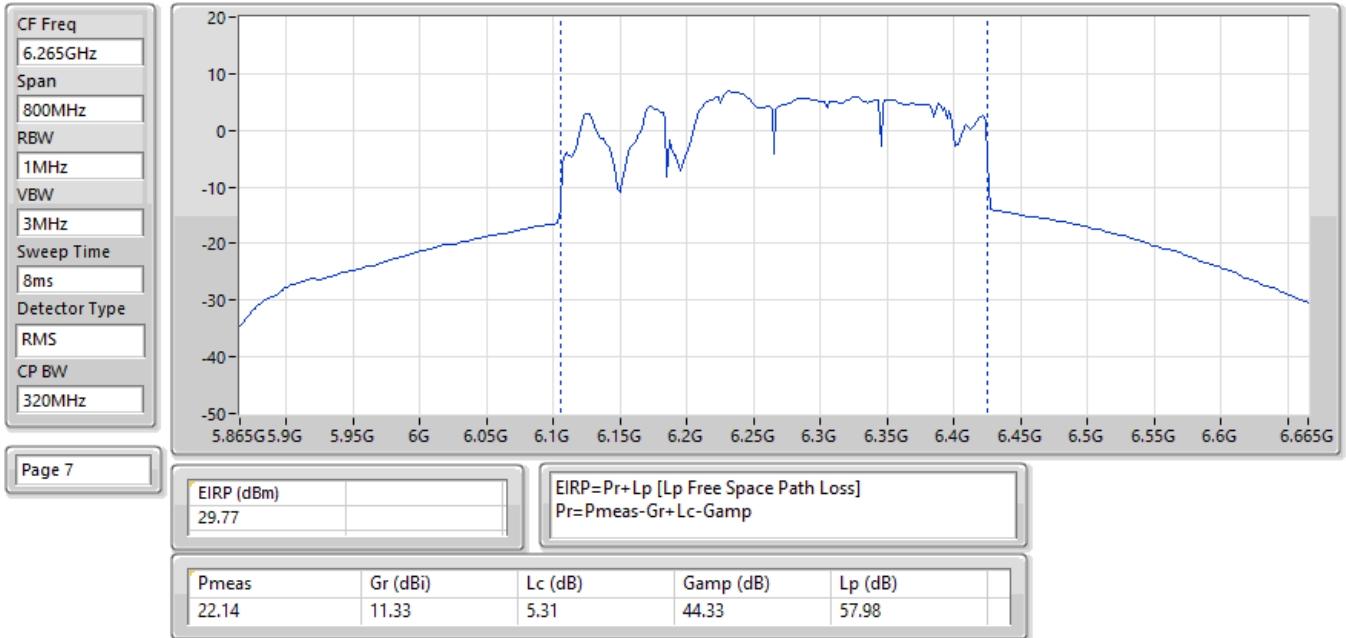


EIRP;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

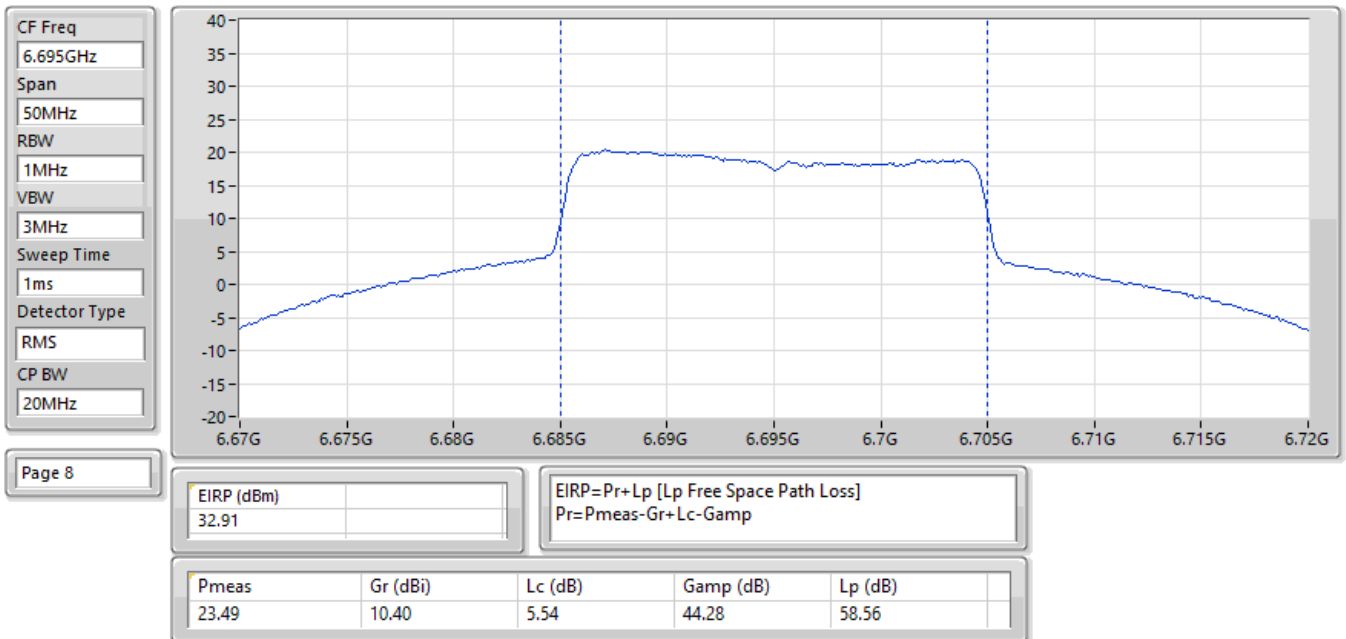


EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

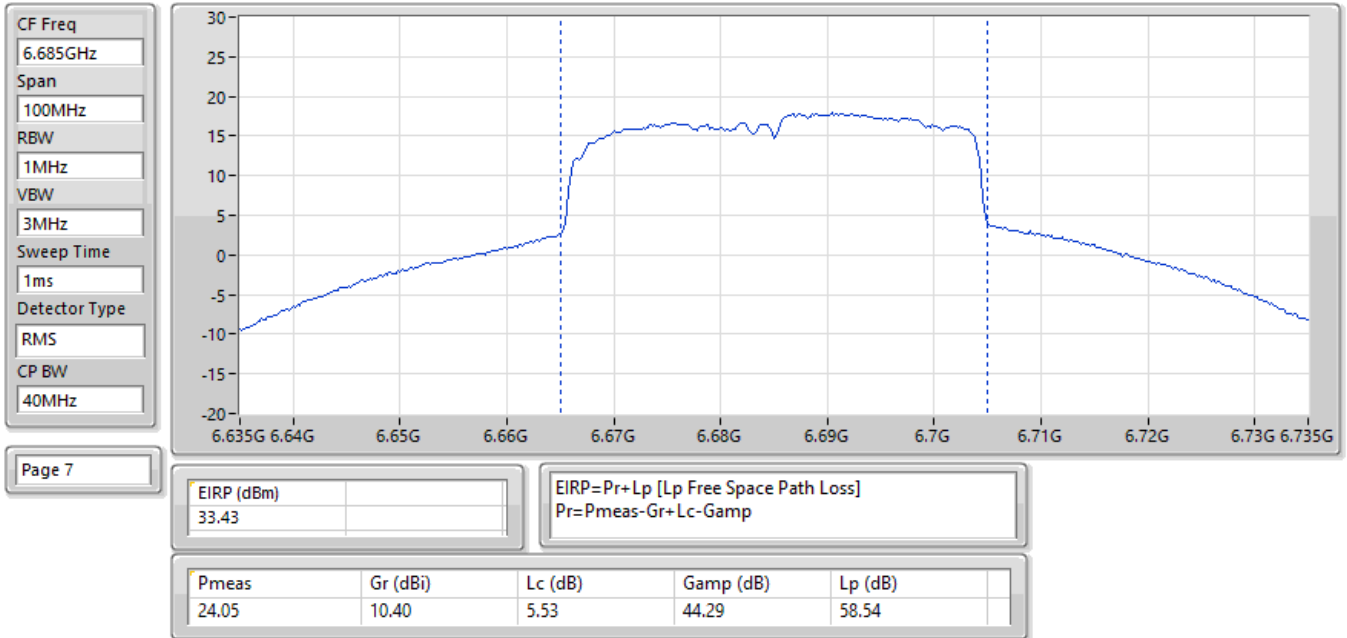

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

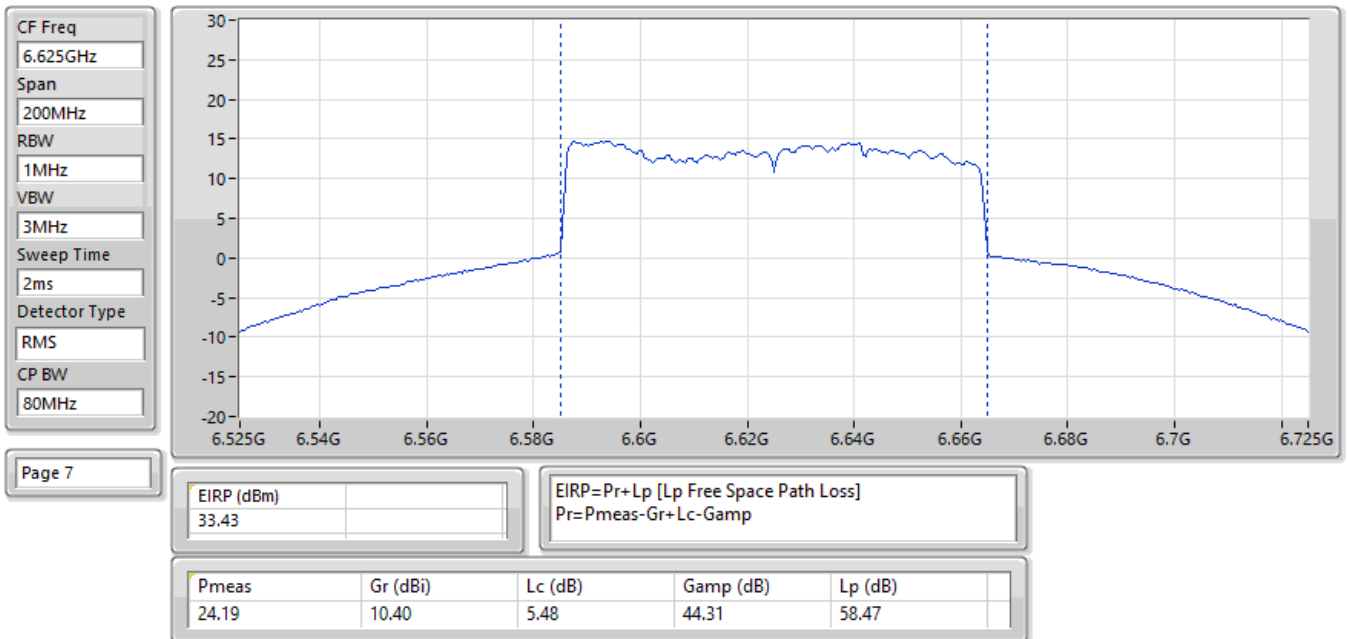

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

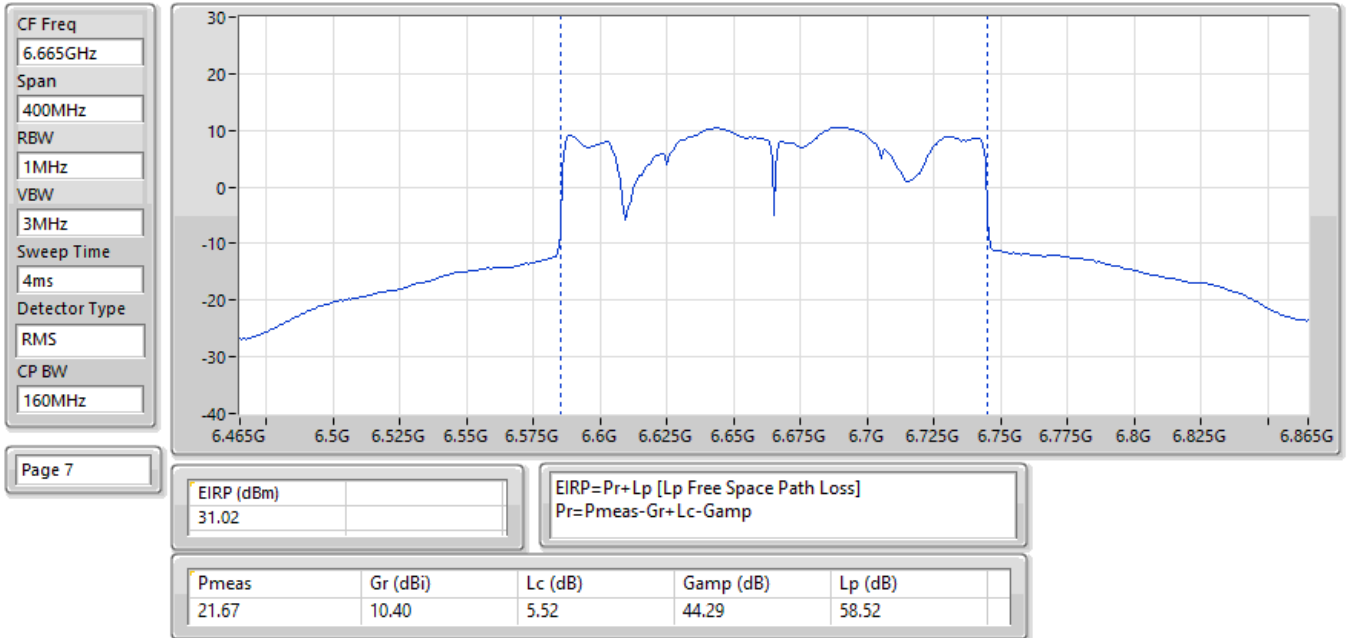



Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20_Nss1,(MCS0)_4TX	20.56
802.11be EHT40_Nss1,(MCS0)_4TX	18.21
802.11be EHT80_Nss1,(MCS0)_4TX	15.68
802.11be EHT160_Nss1,(MCS0)_4TX	11.96
802.11be EHT320_Nss1,(MCS0)_4TX	8.84
6.525-6.875GHz	-
802.11be EHT20_Nss1,(MCS0)_4TX	21.54
802.11be EHT40_Nss1,(MCS0)_4TX	18.82
802.11be EHT80_Nss1,(MCS0)_4TX	16.12
802.11be EHT160_Nss1,(MCS0)_4TX	12.44


RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result


Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	17.67	23.00
6195MHz	Pass	20.47	23.00
6415MHz	Pass	20.56	23.00
6535MHz	Pass	21.54	23.00
6695MHz	Pass	20.93	23.00
6855MHz	Pass	21.54	23.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	13.41	23.00
6205MHz	Pass	17.85	23.00
6405MHz	Pass	18.21	23.00
6565MHz	Pass	18.82	23.00
6685MHz	Pass	18.35	23.00
6845MHz	Pass	18.67	23.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	9.55	23.00
6225MHz	Pass	14.93	23.00
6385MHz	Pass	15.68	23.00
6625MHz	Pass	15.45	23.00
6705MHz	Pass	15.72	23.00
6785MHz	Pass	16.12	23.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	6.70	23.00
6185MHz	Pass	11.96	23.00
6345MHz	Pass	11.50	23.00
6665MHz	Pass	12.44	23.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	4.15	23.00
6265MHz	Pass	8.84	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


EIRP PSD;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

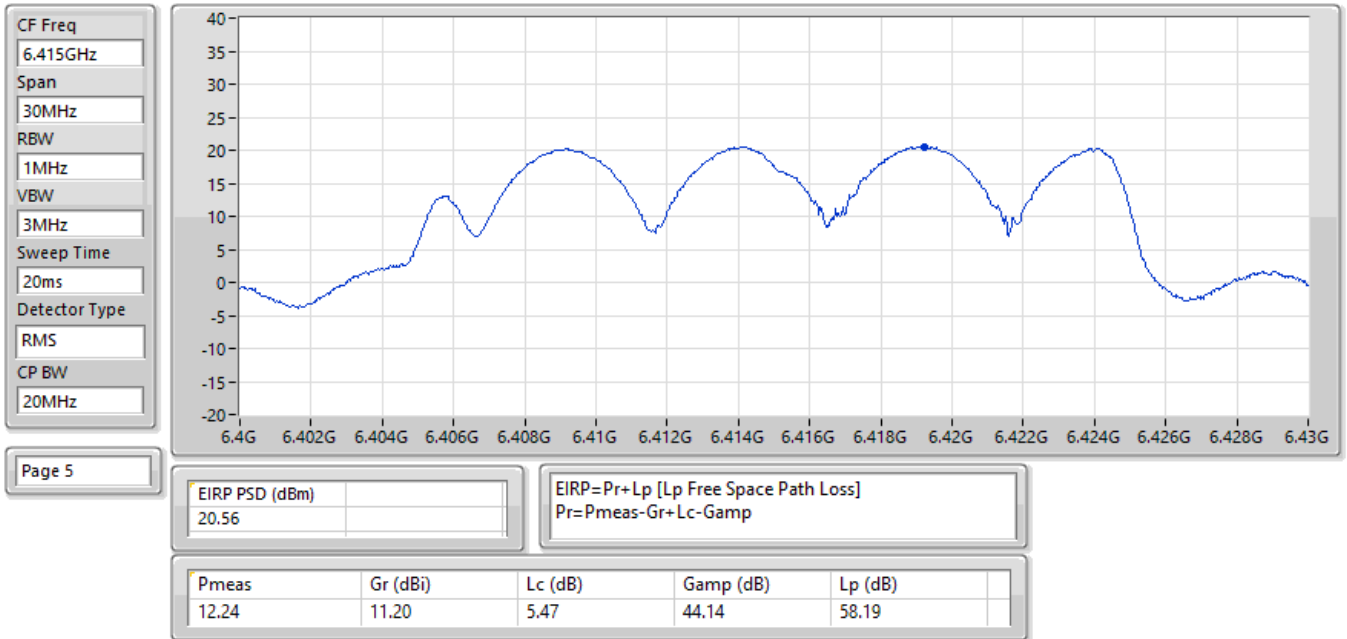


EIRP PSD;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

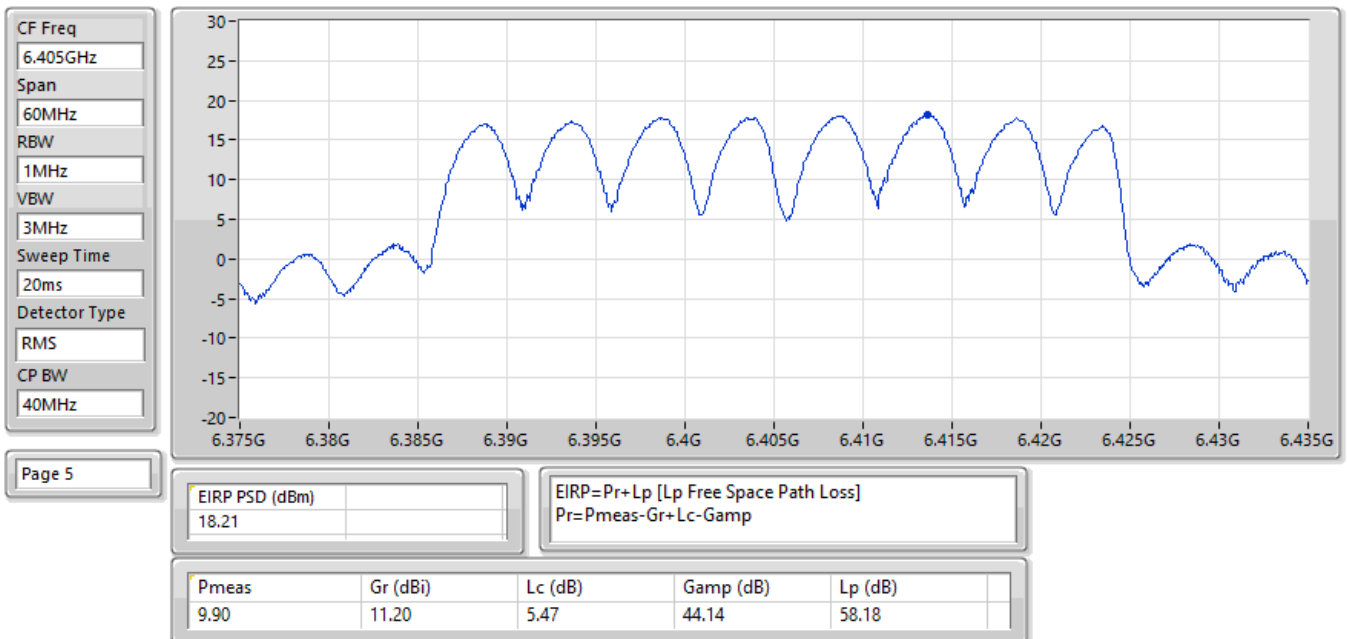


EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

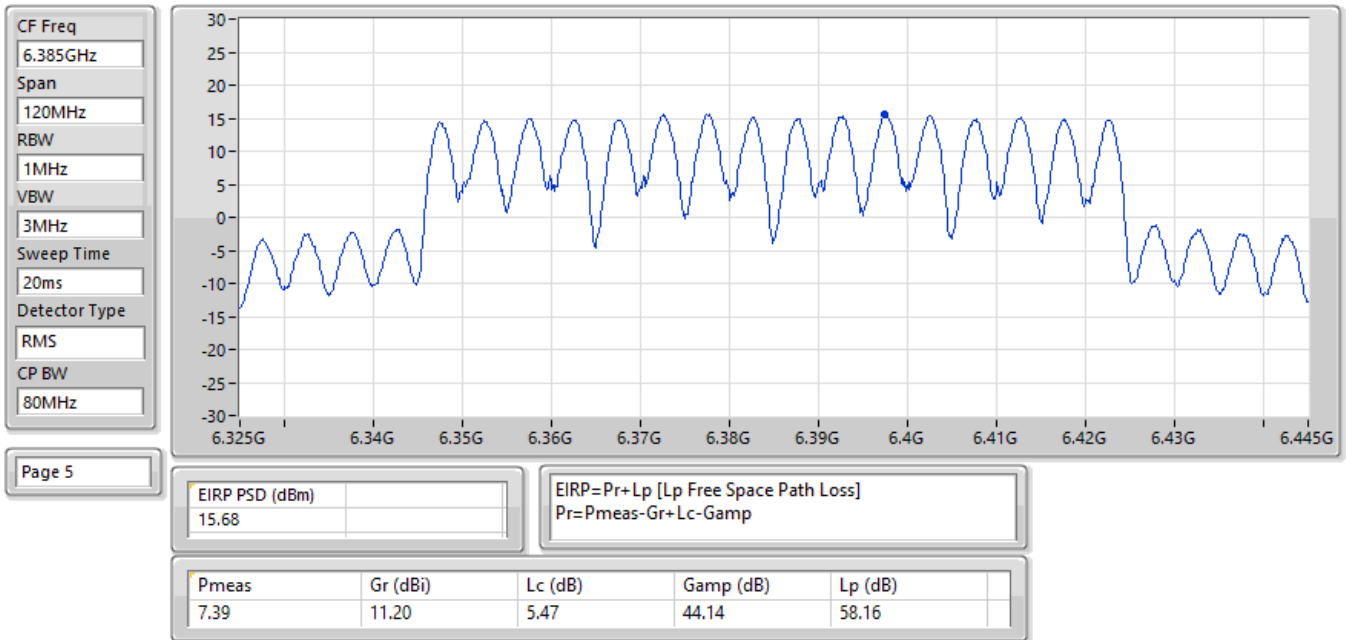


EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

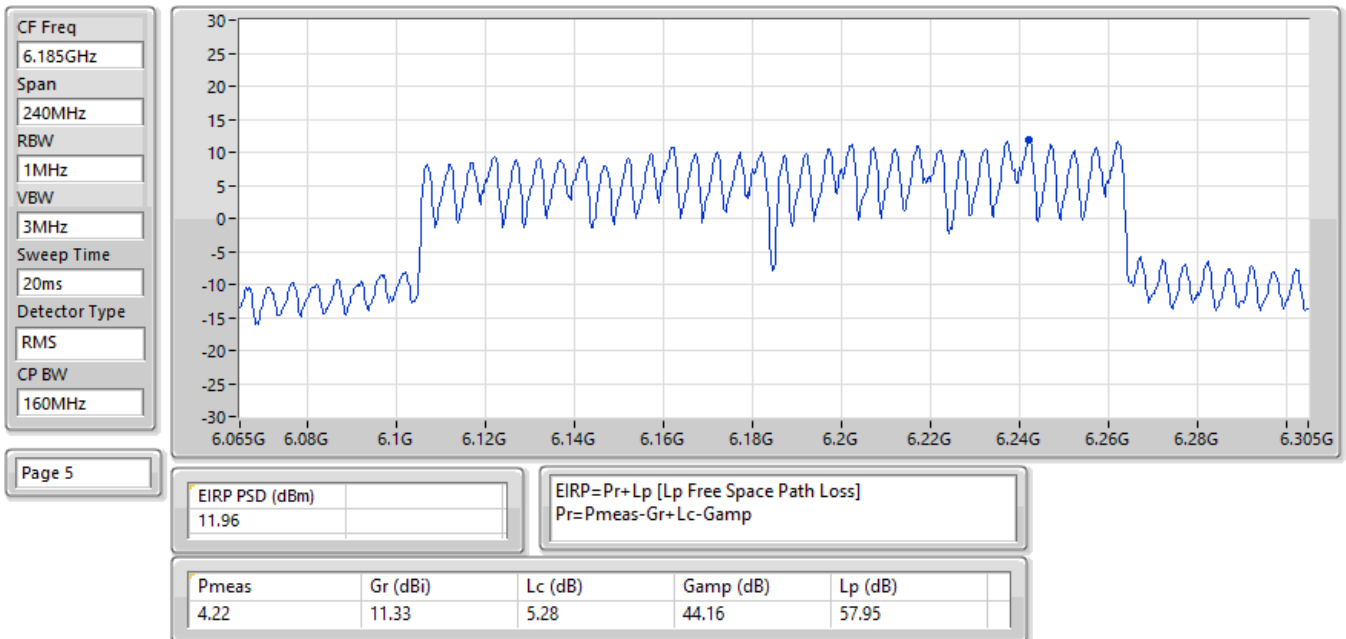


EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

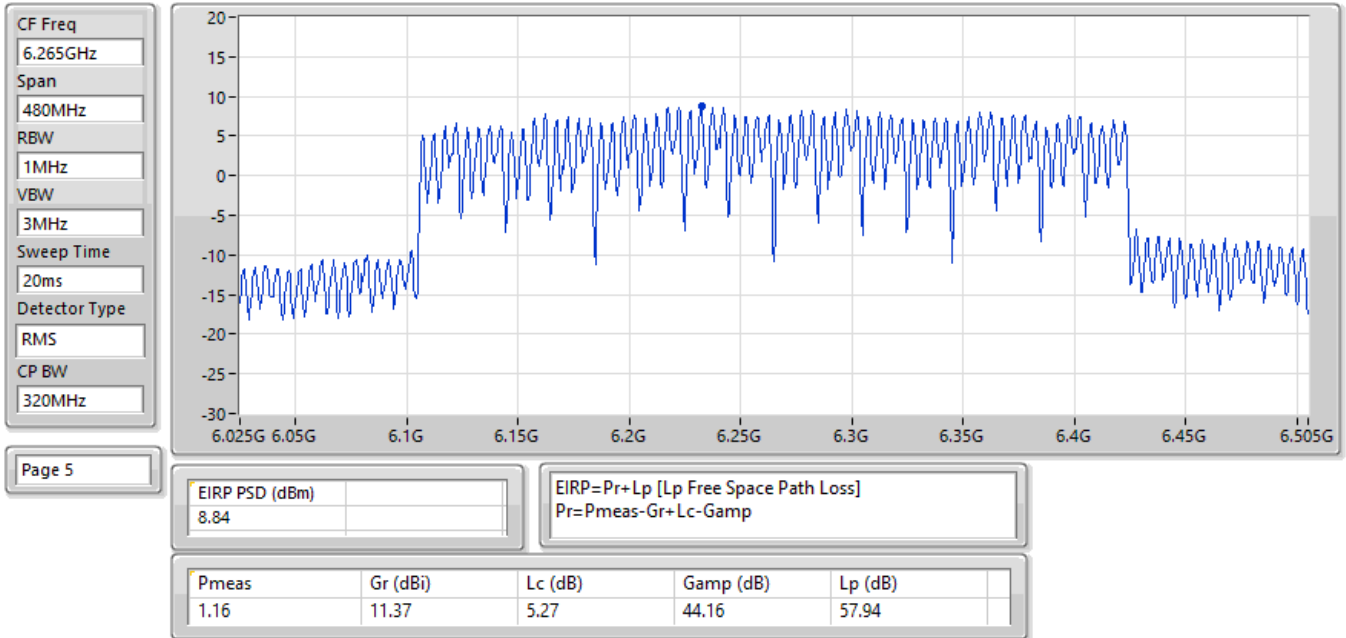


EIRP PSD;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

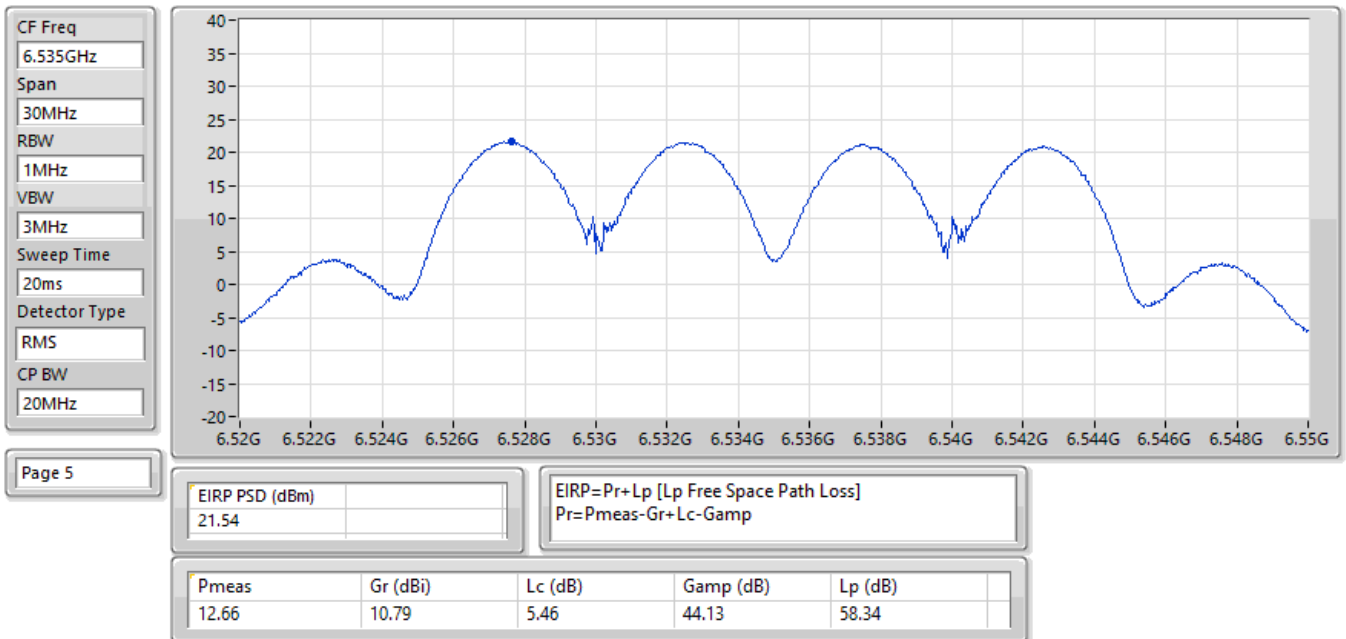


EIRP PSD;Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

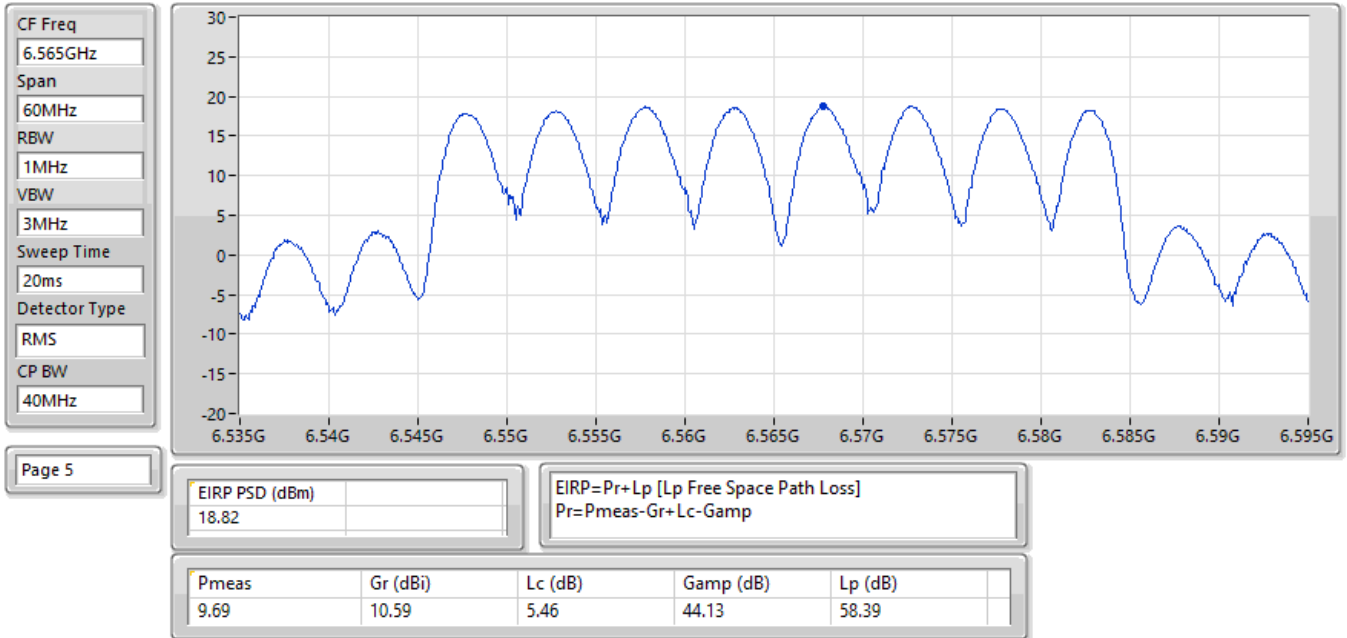

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

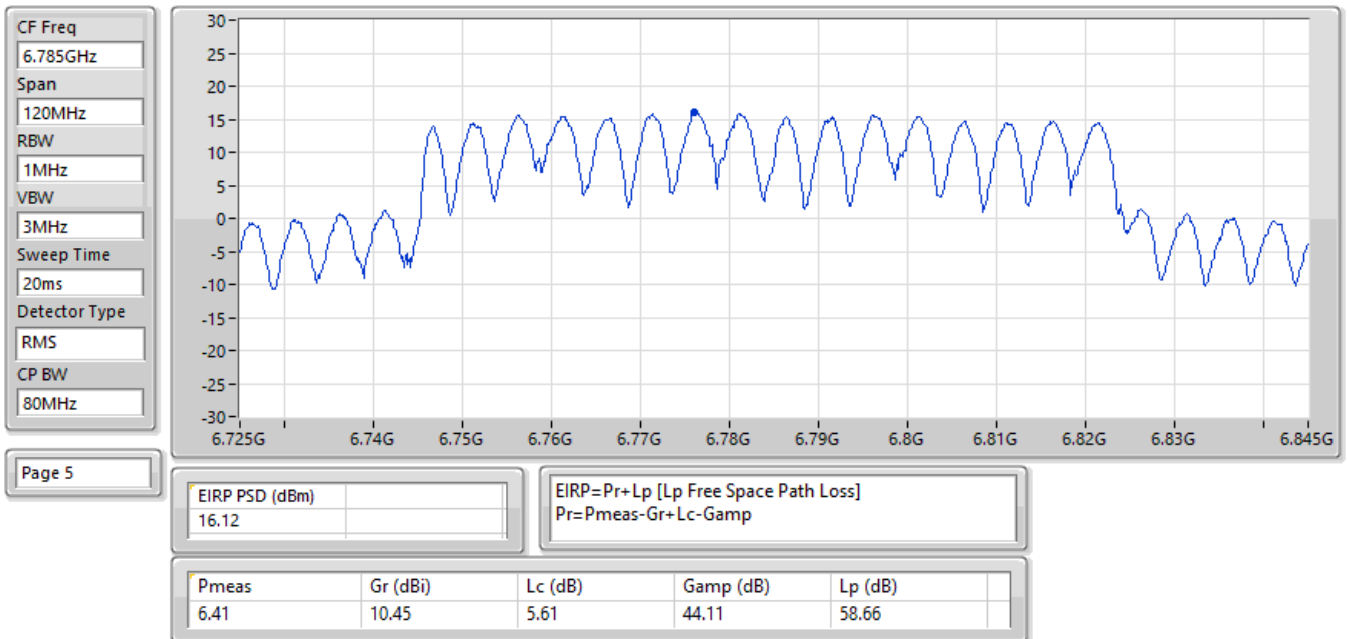

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

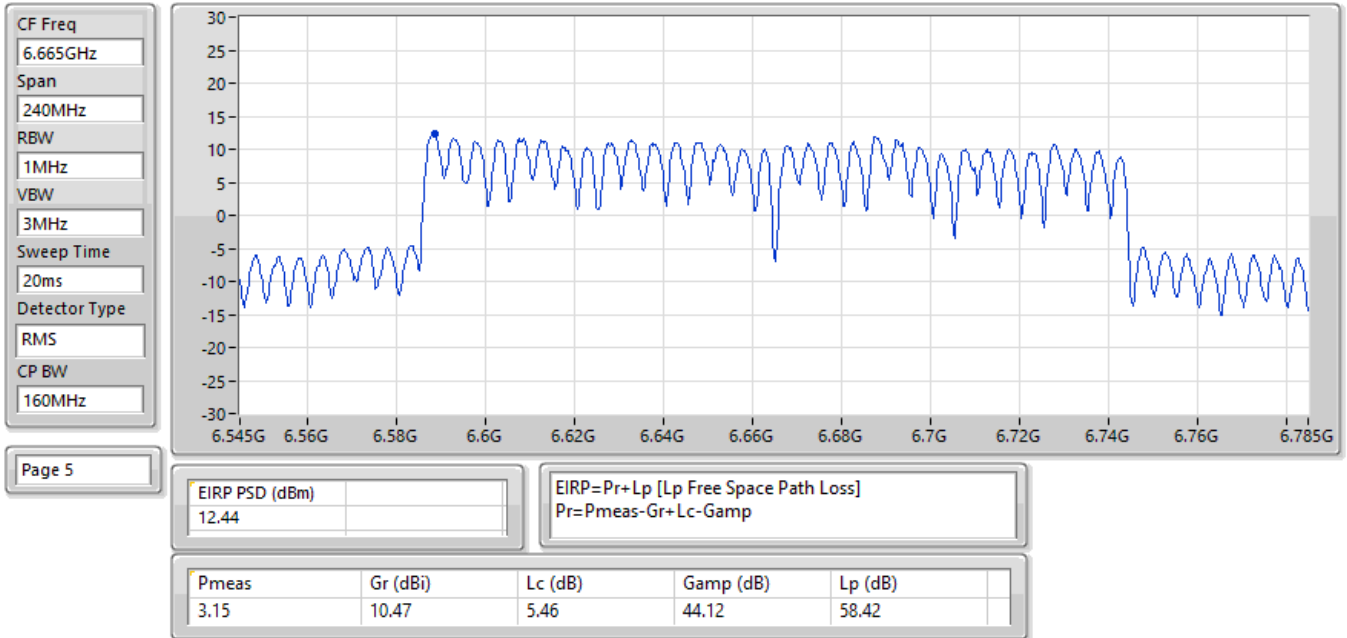



Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	9.19
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	6.52
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX	3.64
6.525-6.875GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	15.43
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	9.24


RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**


Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-
5985MHz	Pass	9.19	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	-	-	-
6785MHz	Pass	15.43	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX	-	-	-
6025MHz	Pass	5.73	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-
6025MHz	Pass	6.52	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX	-	-	-
6665MHz	Pass	8.82	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-
6665MHz	Pass	9.24	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX	-	-	-
6105MHz	Pass	2.86	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-
6105MHz	Pass	2.88	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX	-	-	-
6105MHz	Pass	3.64	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 3;Nant:4;Ch:5985MHz;TX

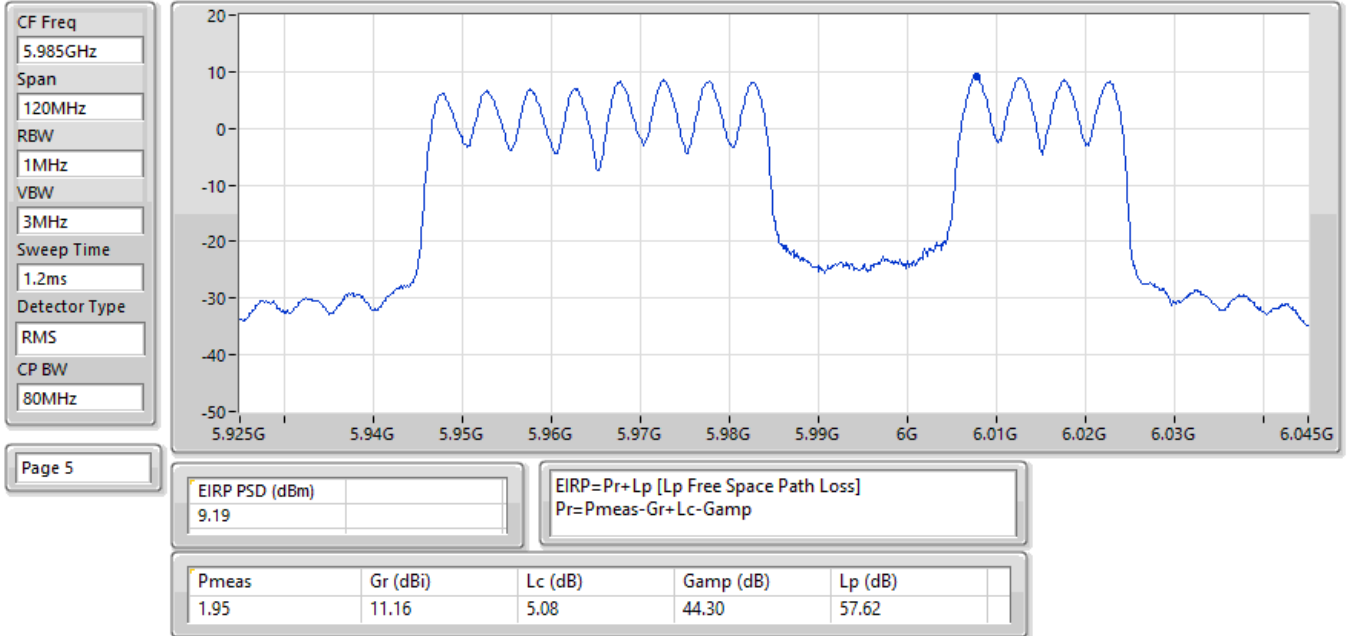


EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 3;Nant:4;Ch:6025MHz;TX

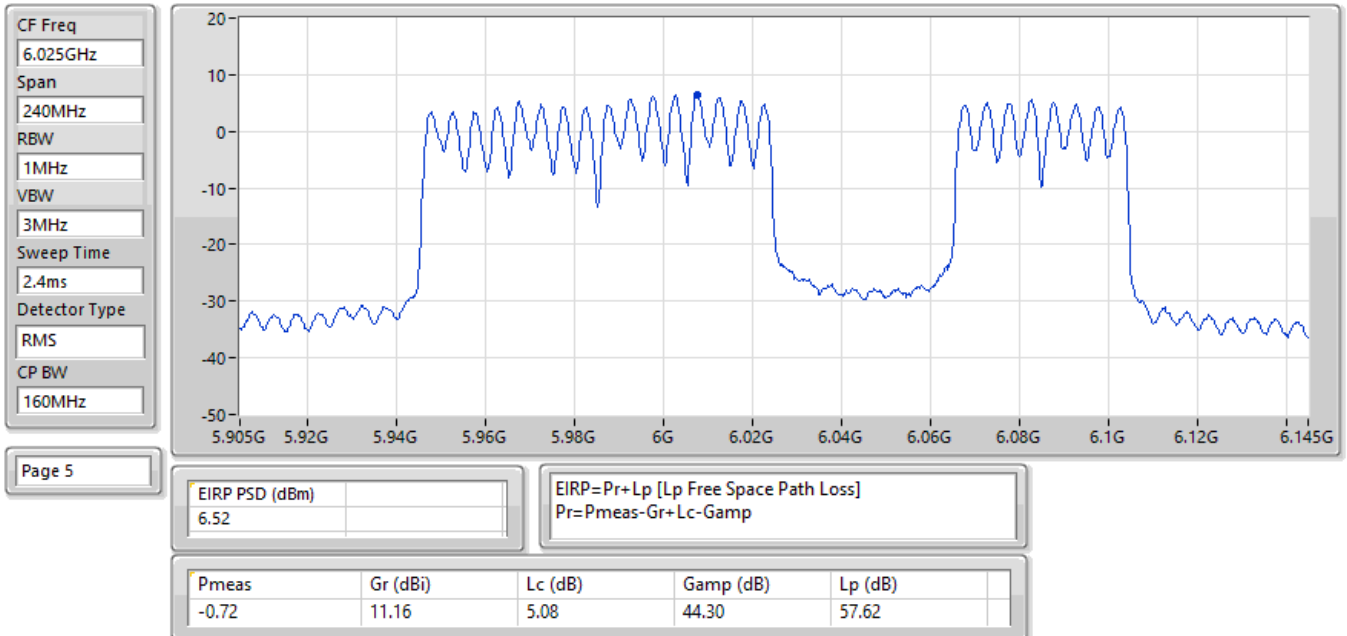


EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 MRU 2;Nant:4;Ch:6105MHz;TX

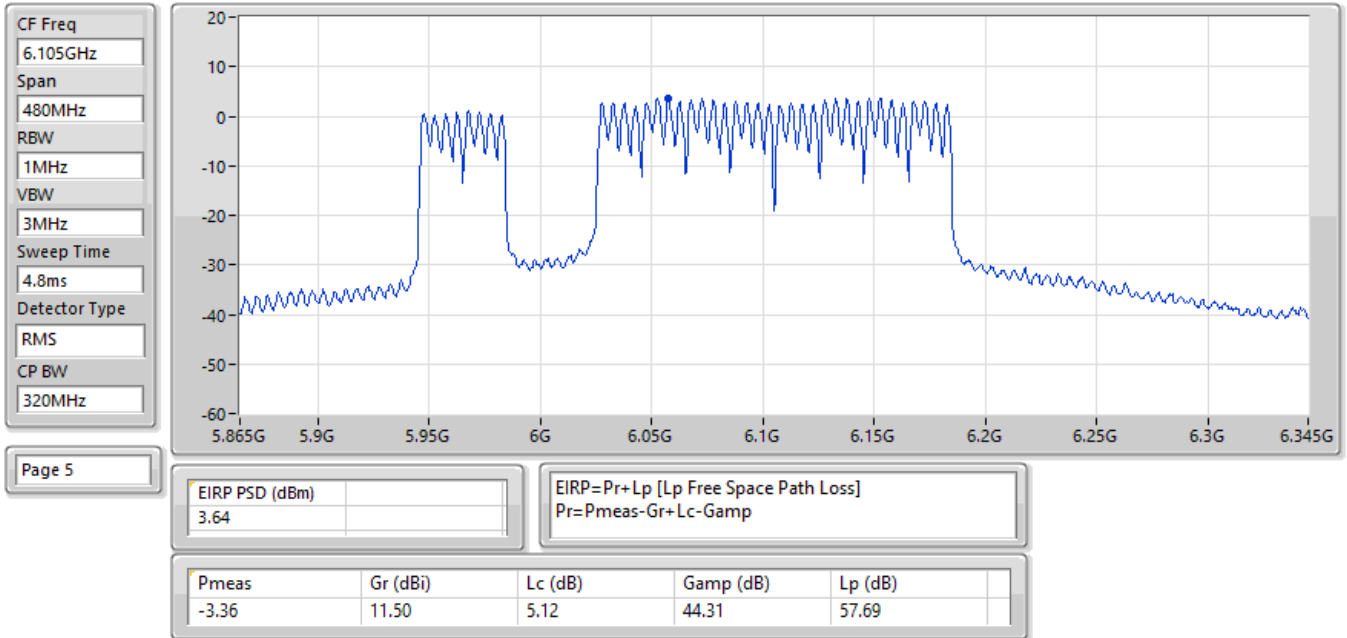

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 1;Nant:4;Ch:6785MHz;TX

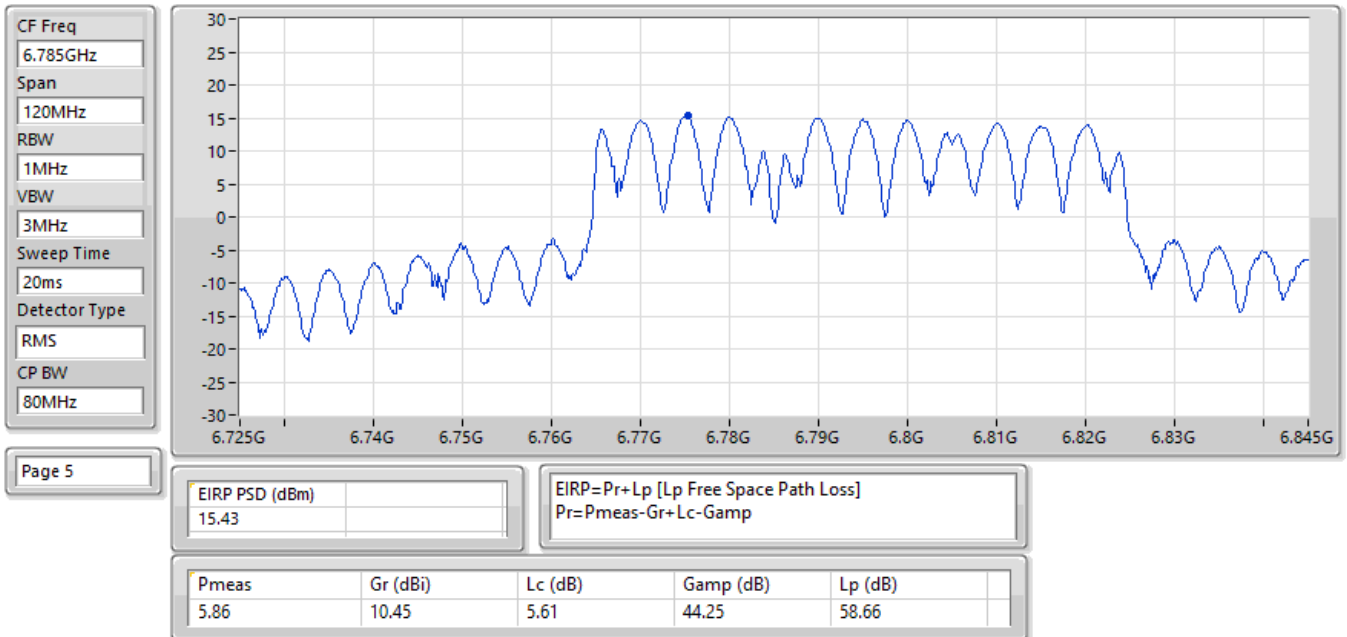

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 3;Nant:4;Ch:6665MHz;TX

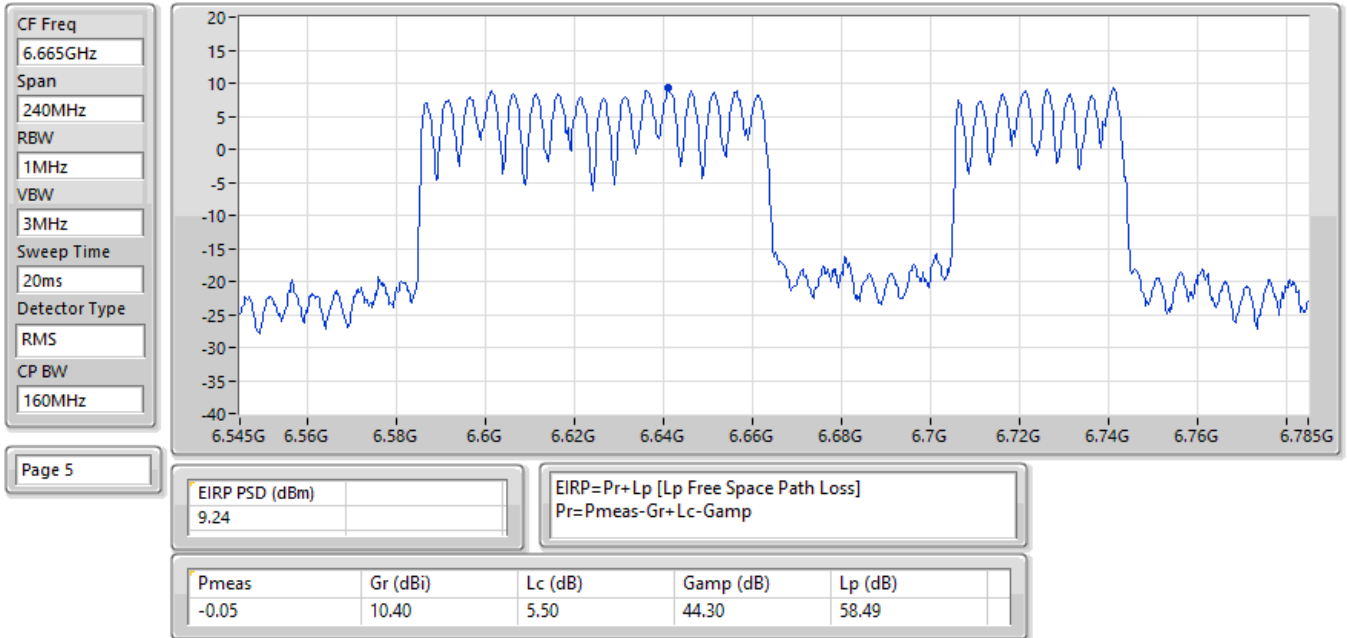



Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	21.38
802.11be EHT40-BF_Nss1,(MCS0)_4TX	19.47
802.11be EHT80-BF_Nss1,(MCS0)_4TX	13.92
802.11be EHT160-BF_Nss1,(MCS0)_4TX	8.17
802.11be EHT320-BF_Nss1,(MCS0)_4TX	6.98
6.525-6.875GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.52
802.11be EHT40-BF_Nss1,(MCS0)_4TX	19.57
802.11be EHT80-BF_Nss1,(MCS0)_4TX	16.49
802.11be EHT160-BF_Nss1,(MCS0)_4TX	10.16


RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result


Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	15.86	23.00
6195MHz	Pass	15.41	23.00
6415MHz	Pass	21.38	23.00
6535MHz	Pass	18.04	23.00
6695MHz	Pass	22.52	23.00
6855MHz	Pass	22.48	23.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	13.89	23.00
6205MHz	Pass	19.47	23.00
6405MHz	Pass	18.36	23.00
6565MHz	Pass	16.95	23.00
6685MHz	Pass	18.84	23.00
6845MHz	Pass	19.57	23.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	7.92	23.00
6225MHz	Pass	13.92	23.00
6385MHz	Pass	13.67	23.00
6625MHz	Pass	15.72	23.00
6705MHz	Pass	15.62	23.00
6785MHz	Pass	16.49	23.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	4.66	23.00
6185MHz	Pass	7.09	23.00
6345MHz	Pass	8.17	23.00
6665MHz	Pass	10.16	23.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	3.11	23.00
6265MHz	Pass	6.98	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

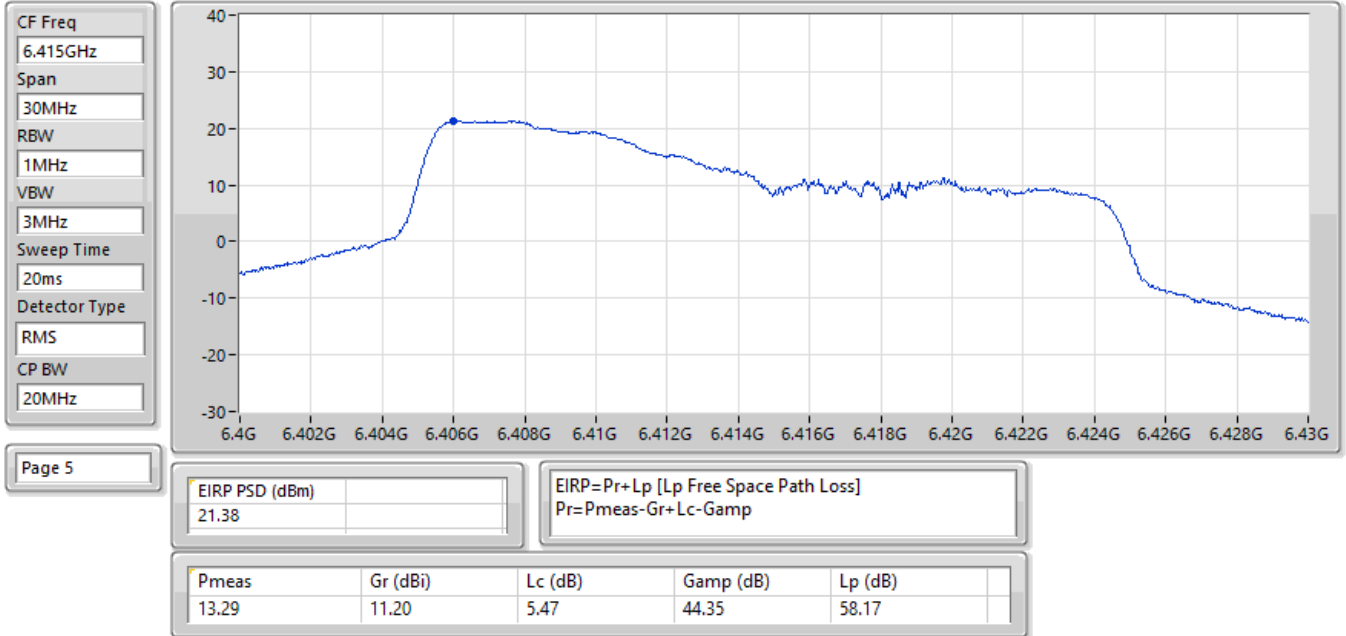


EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

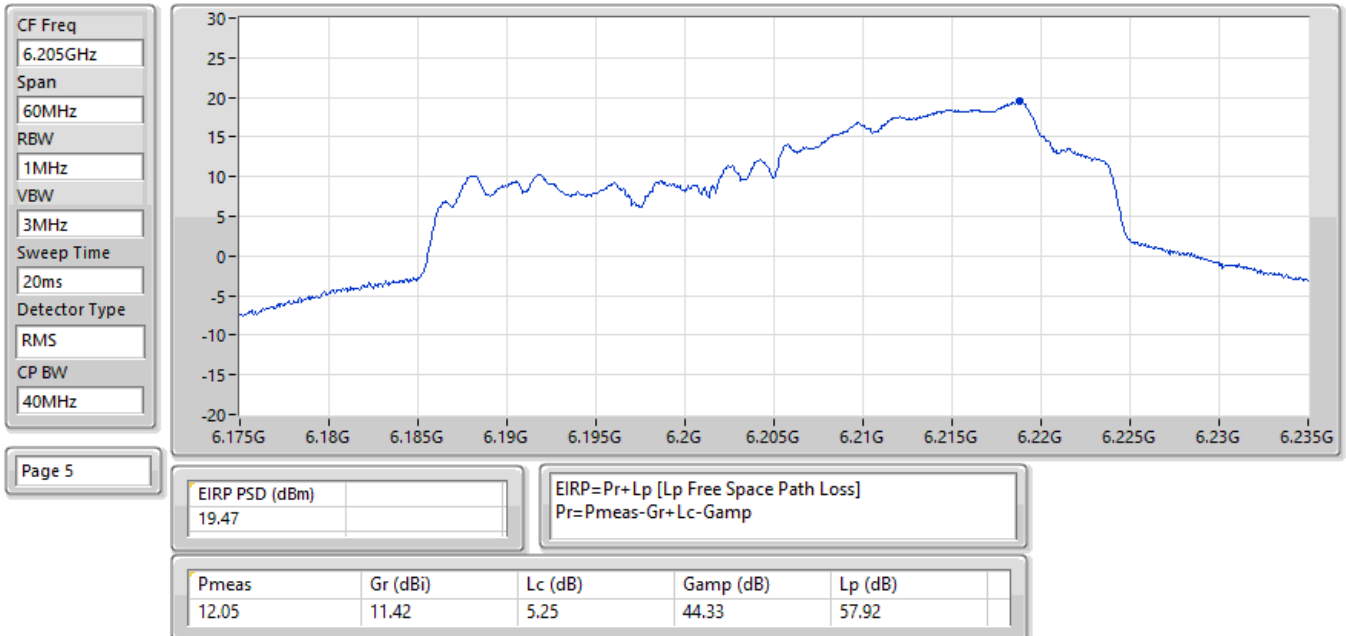


EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

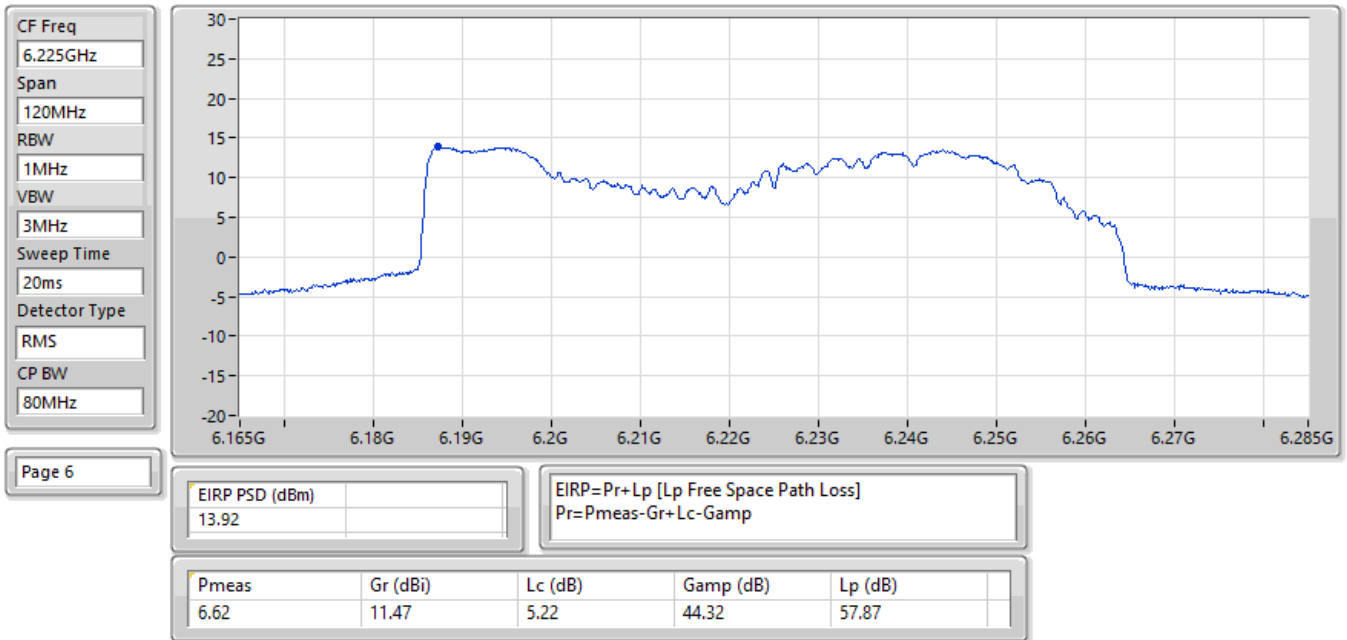


EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

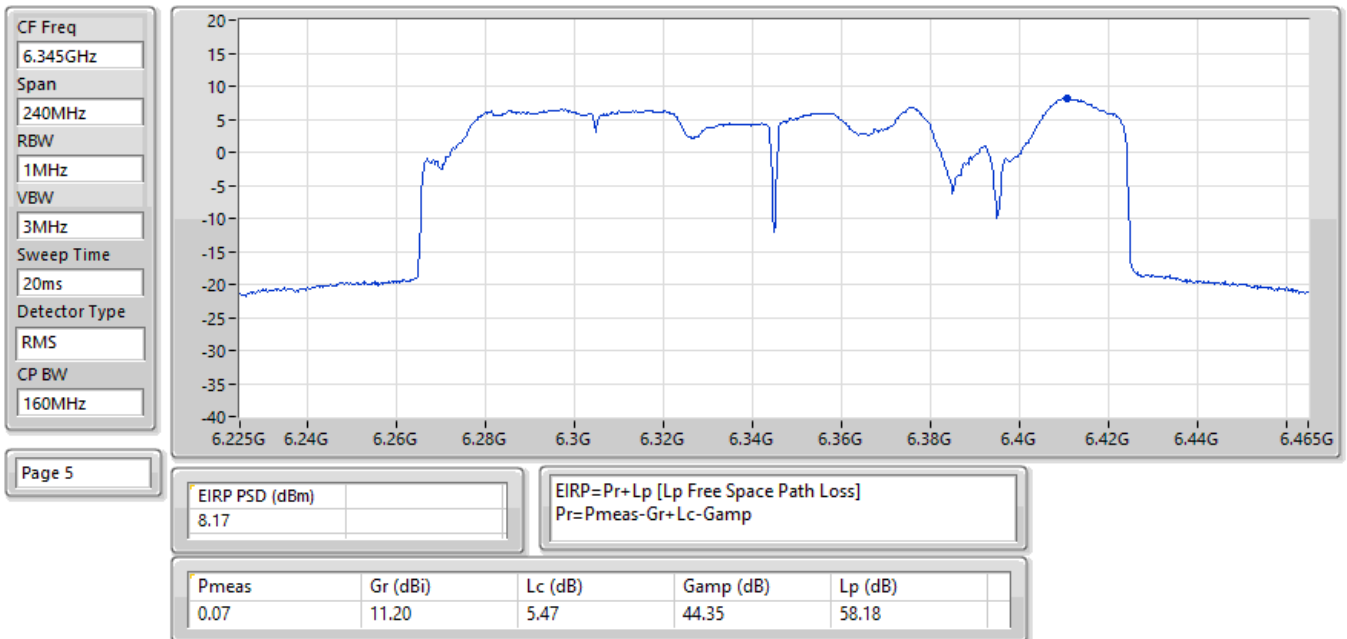


EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

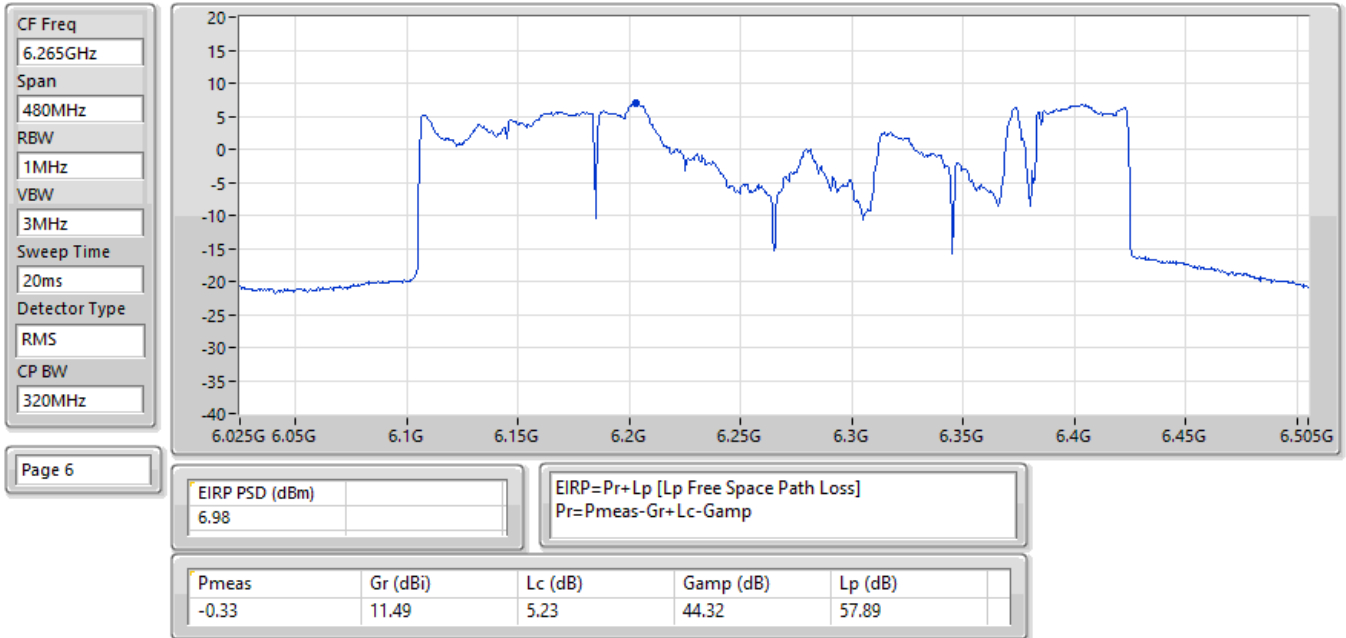


EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

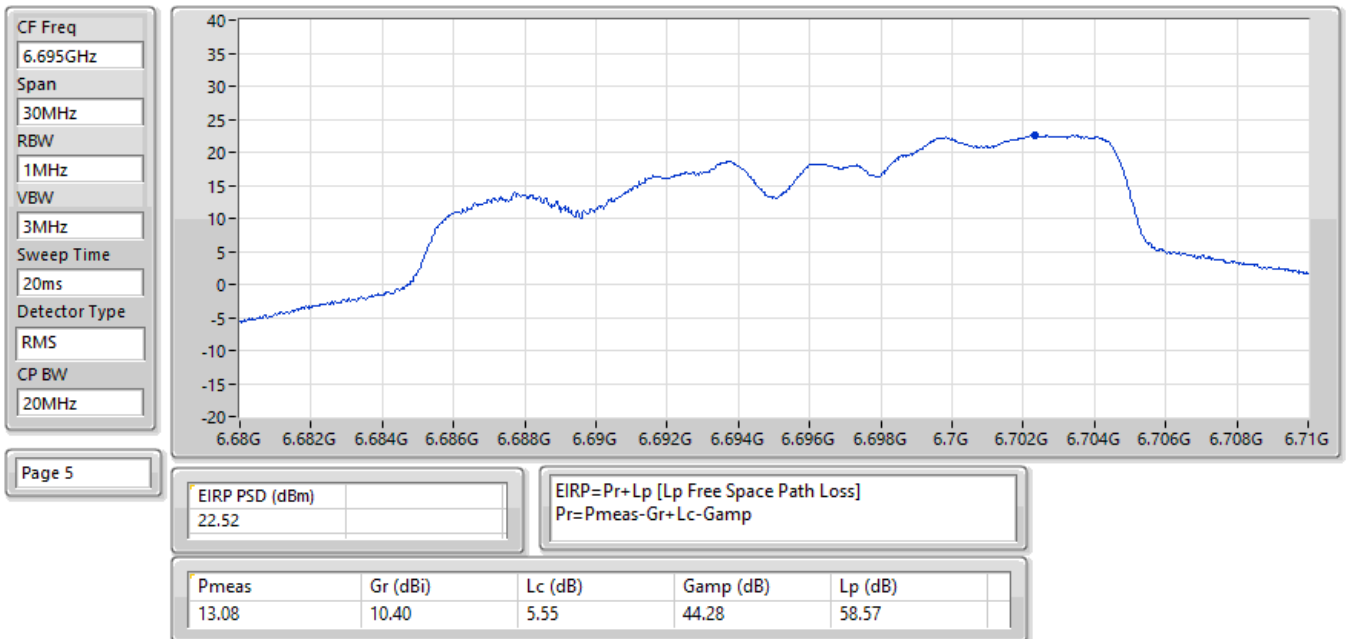


EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6845MHz;TX

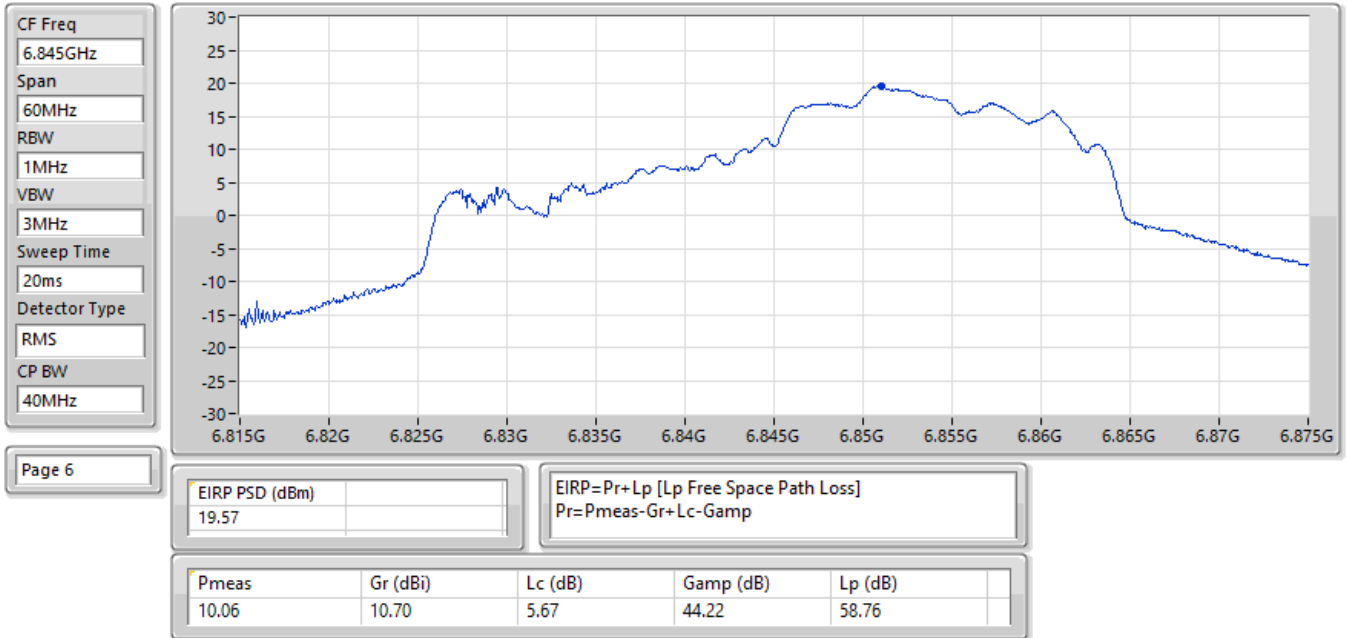

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

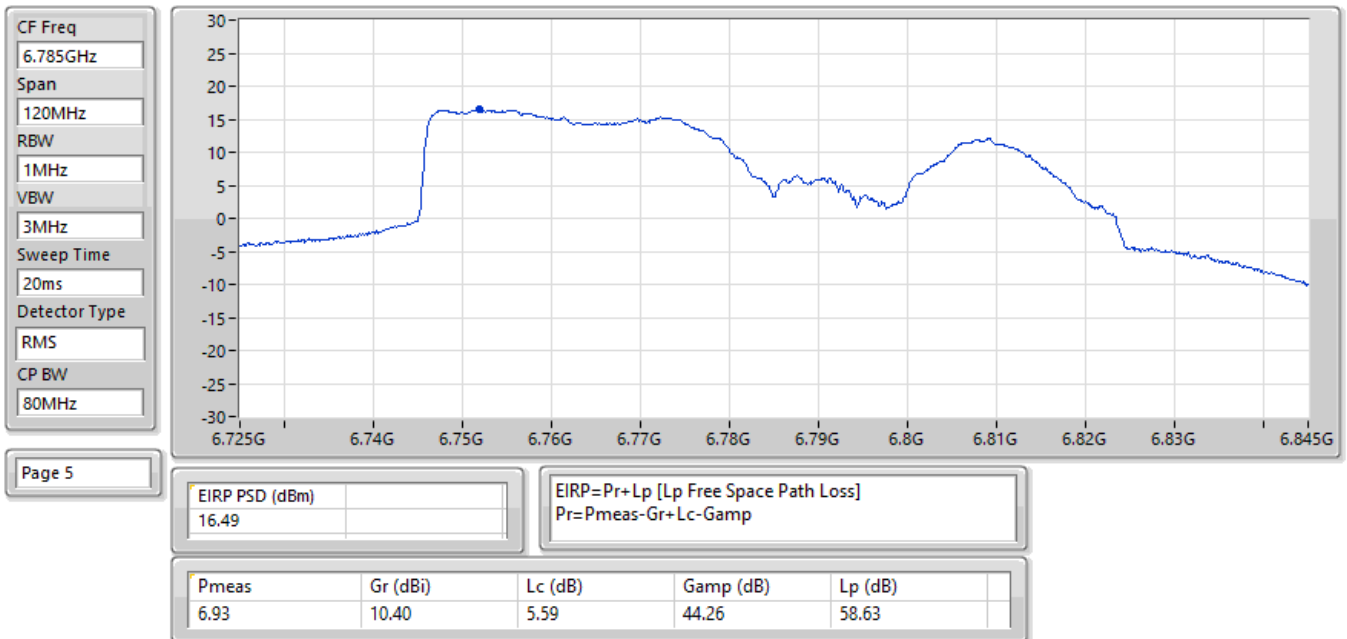

EIRP PSD;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

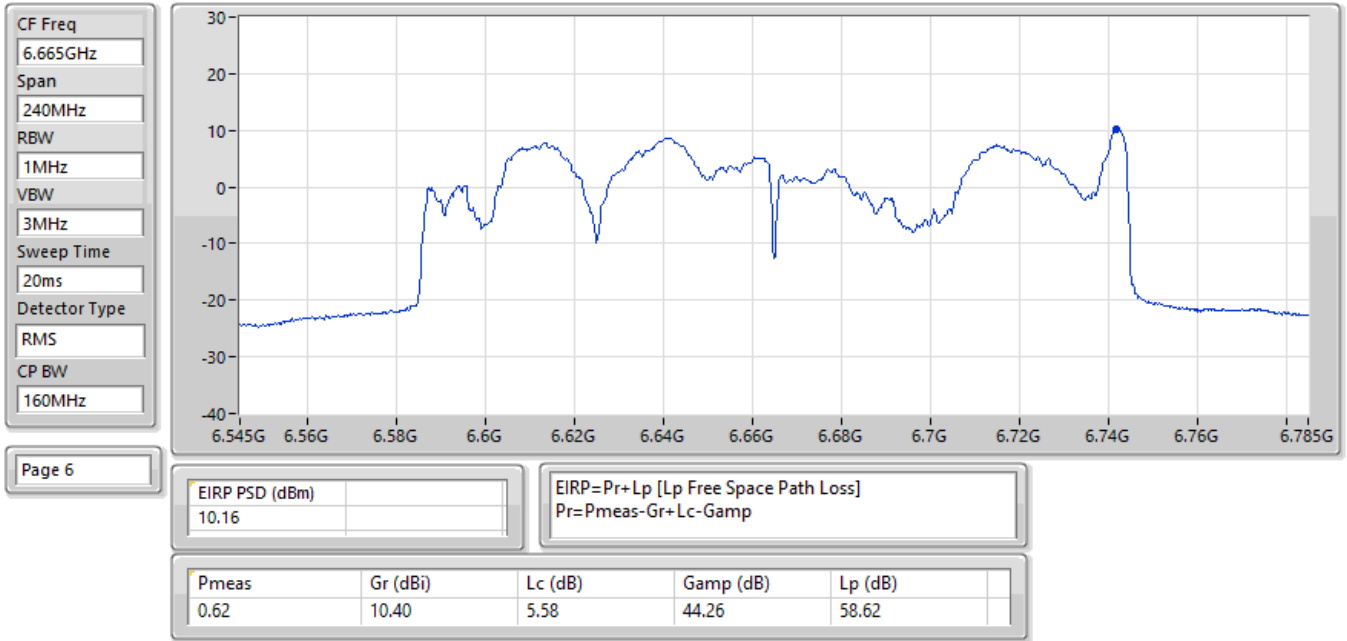

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	5.951276G	6.35	5.997675G	-34.59	-33.05	-1.54	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	5.980146G	4.32	6.0275G	-36.06	-35.68	-0.38	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	5.997G	3.98	6.1075G	-40.67	-36.02	-4.65	2
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.15641G	6.81	6.4736G	-35.17	-33.19	-1.98	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.15019G	5.82	6.5958G	-35.54	-33.97	-1.57	4
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.537174G	11.91	6.51125G	-13.65	-8.17	-5.48	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.671903G	12.83	6.74625G	-11.42	-7.44	-3.98	3
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.6107G	13.39	6.7271G	-11.78	-6.66	-5.12	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.63761G	7.45	6.9804G	-34.43	-32.55	-1.88	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.960149G	6.18	6.00225G	-35.68	-33.82	-1.86	1
5955MHz	Pass	5.9532G	6.48	6G	-36.39	-33.03	-3.36	2
5955MHz	Pass	5.956375G	6.46	6.0026G	-38.46	-33.35	-5.11	3
5955MHz	Pass	5.951276G	6.35	5.997675G	-34.59	-33.05	-1.54	4
6195MHz	Pass	6.198149G	12.33	6.1717G	-12.61	-7.79	-4.82	1
6195MHz	Pass	6.198674G	12.60	6.22685G	-17.81	-8.20	-9.61	2
6195MHz	Pass	6.197299G	12.64	6.2234G	-16.13	-7.77	-8.36	3
6195MHz	Pass	6.202098G	12.41	6.170425G	-14.05	-7.63	-6.42	4
6415MHz	Pass	6.416125G	12.07	6.389G	-18.38	-7.94	-10.44	1
6415MHz	Pass	6.419574G	11.63	6.3875G	-19.11	-8.49	-10.62	2
6415MHz	Pass	6.419899G	11.98	6.388725G	-17.10	-8.04	-9.06	3
6415MHz	Pass	6.418299G	11.96	6.389975G	-14.98	-8.27	-6.71	4
6535MHz	Pass	6.538549G	12.40	6.574525G	-21.05	-11.33	-9.72	1
6535MHz	Pass	6.540924G	11.73	6.508275G	-16.51	-8.29	-8.22	2
6535MHz	Pass	6.5337G	11.71	6.507325G	-17.38	-8.47	-8.91	3
6535MHz	Pass	6.537174G	11.91	6.51125G	-13.65	-8.17	-5.48	4
6695MHz	Pass	6.691651G	11.35	6.66935G	-15.95	-8.70	-7.25	1
6695MHz	Pass	6.693275G	11.77	6.6685G	-16.11	-8.34	-7.77	2
6695MHz	Pass	6.698199G	12.23	6.669325G	-15.52	-7.78	-7.74	3
6695MHz	Pass	6.698899G	12.28	6.66785G	-17.17	-7.73	-9.44	4
6855MHz	Pass	6.862648G	12.71	6.88255G	-16.15	-7.55	-8.60	1
6855MHz	Pass	6.859749G	12.45	6.829725G	-13.96	-7.56	-6.40	2
6855MHz	Pass	6.860374G	12.43	6.827075G	-16.33	-7.61	-8.72	3
6855MHz	Pass	6.860749G	12.19	6.824825G	-17.83	-8.56	-9.27	4
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.982446G	3.69	6.0267G	-38.65	-35.74	-2.91	1
5965MHz	Pass	5.982646G	4.61	6.02645G	-37.93	-35.39	-2.54	2
5965MHz	Pass	5.978847G	4.71	6.02575G	-35.93	-35.29	-0.64	3
5965MHz	Pass	5.980146G	4.32	6.0275G	-36.06	-35.68	-0.38	4
6205MHz	Pass	6.222646G	13.20	6.25635G	-13.35	-6.82	-6.53	1
6205MHz	Pass	6.214948G	13.28	6.258G	-13.10	-6.73	-6.37	2
6205MHz	Pass	6.220346G	13.29	6.2599G	-14.40	-7.04	-7.36	3
6205MHz	Pass	6.217847G	12.45	6.2572G	-15.32	-7.45	-7.87	4
6405MHz	Pass	6.421096G	12.41	6.45495G	-15.47	-7.67	-7.80	1
6405MHz	Pass	6.417947G	12.13	6.45595G	-15.55	-7.88	-7.67	2
6405MHz	Pass	6.418647G	12.67	6.4579G	-15.06	-7.34	-7.72	3
6405MHz	Pass	6.421396G	12.25	6.4558G	-15.22	-7.79	-7.43	4
6565MHz	Pass	6.578547G	12.65	6.61845G	-14.01	-7.41	-6.60	1
6565MHz	Pass	6.582796G	12.31	6.61745G	-16.41	-7.71	-8.70	2
6565MHz	Pass	6.577797G	12.47	6.61555G	-13.68	-7.56	-6.12	3
6565MHz	Pass	6.581646G	12.14	6.61445G	-15.79	-7.87	-7.92	4
6685MHz	Pass	6.690649G	12.53	6.7405G	-15.20	-7.60	-7.60	1
6685MHz	Pass	6.687599G	13.02	6.7427G	-15.62	-7.00	-8.62	2
6685MHz	Pass	6.671903G	12.83	6.74625G	-11.42	-7.44	-3.98	3
6685MHz	Pass	6.701246G	12.91	6.7403G	-13.88	-7.27	-6.61	4
6845MHz	Pass	6.84665G	12.79	6.7915G	-14.43	-7.29	-7.14	1
6845MHz	Pass	6.849149G	12.82	6.8965G	-12.64	-7.18	-5.46	2
6845MHz	Pass	6.858897G	12.95	6.918G	-17.63	-7.29	-10.34	3
6845MHz	Pass	6.847749G	12.71	6.792G	-14.91	-7.32	-7.59	4
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.0007G	3.49	6.1022G	-41.80	-35.07	-6.73	1
5985MHz	Pass	5.997G	3.98	6.1075G	-40.67	-36.02	-4.65	2
5985MHz	Pass	6.01599G	3.46	6.1037G	-42.50	-35.54	-6.96	3
5985MHz	Pass	5.9989G	3.60	6.1036G	-40.89	-35.46	-5.43	4


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6225MHz	Pass	6.2372G	12.88	6.3313G	-14.83	-7.21	-7.62	1
6225MHz	Pass	6.25339G	13.56	6.3314G	-12.34	-6.48	-5.86	2
6225MHz	Pass	6.2381G	13.21	6.331G	-14.87	-6.84	-8.03	3
6225MHz	Pass	6.24909G	12.52	6.321G	-13.05	-7.64	-5.41	4
6385MHz	Pass	6.3995G	12.74	6.4889G	-15.28	-7.31	-7.97	1
6385MHz	Pass	6.3757G	12.33	6.481G	-13.82	-7.69	-6.13	2
6385MHz	Pass	6.41409G	12.89	6.4906G	-13.45	-7.20	-6.25	3
6385MHz	Pass	6.3761G	12.68	6.482G	-12.32	-7.33	-4.99	4
6625MHz	Pass	6.6138G	12.92	6.7364G	-14.46	-7.23	-7.23	1
6625MHz	Pass	6.6126G	13.39	6.7292G	-11.80	-6.62	-5.18	2
6625MHz	Pass	6.6121G	13.01	6.7412G	-14.74	-7.39	-7.35	3
6625MHz	Pass	6.6107G	13.39	6.7271G	-11.78	-6.66	-5.12	4
6705MHz	Pass	6.69G	12.44	6.6045G	-14.63	-7.57	-7.06	1
6705MHz	Pass	6.693G	12.77	6.6G	-15.18	-7.23	-7.95	2
6705MHz	Pass	6.6939G	13.15	6.8144G	-13.47	-6.88	-6.59	3
6705MHz	Pass	6.6921G	13.41	6.8113G	-13.42	-6.59	-6.83	4
6785MHz	Pass	6.7766G	12.77	6.6801G	-14.31	-7.30	-7.01	1
6785MHz	Pass	6.7731G	13.01	6.8929G	-14.44	-7.01	-7.43	2
6785MHz	Pass	6.7708G	12.78	6.8909G	-14.16	-7.25	-6.91	3
6785MHz	Pass	6.7719G	12.74	6.8903G	-14.96	-7.27	-7.69	4
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.04899G	3.78	6.2684G	-43.16	-36.01	-7.15	1
6025MHz	Pass	6.04859G	3.23	6.2694G	-41.99	-36.70	-5.29	2
6025MHz	Pass	6.05139G	3.65	6.2764G	-42.52	-36.35	-6.17	3
6025MHz	Pass	6.04939G	3.23	6.268G	-46.68	-36.50	-10.18	4
6185MHz	Pass	6.24998G	7.82	6.451G	-35.66	-32.00	-3.66	1
6185MHz	Pass	6.24838G	7.99	6.4892G	-37.13	-31.62	-5.51	2
6185MHz	Pass	6.21239G	8.18	6.3458G	-20.29	-12.45	-7.84	3
6185MHz	Pass	6.15641G	6.81	6.4736G	-35.17	-33.19	-1.98	4
6345MHz	Pass	6.31681G	8.79	6.5052G	-19.29	-11.34	-7.95	1
6345MHz	Pass	6.36879G	8.76	6.5188G	-19.88	-12.66	-7.22	2
6345MHz	Pass	6.36919G	8.94	6.4908G	-17.28	-12.04	-5.24	3
6345MHz	Pass	6.31921G	8.59	6.515G	-19.63	-11.94	-7.69	4
6665MHz	Pass	6.64161G	7.55	7.0632G	-37.21	-29.51	-7.70	1
6665MHz	Pass	6.63761G	7.45	6.9804G	-34.43	-32.55	-1.88	2
6665MHz	Pass	6.68919G	8.24	7.062G	-34.19	-29.81	-4.38	3
6665MHz	Pass	6.68779G	7.48	7.0628G	-38.04	-30.16	-7.88	4
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.24097G	5.53	6.6002G	-38.19	-34.47	-3.72	1
6105MHz	Pass	6.01222G	6.01	6.635G	-36.34	-31.14	-5.20	2
6105MHz	Pass	6.05821G	5.94	6.5934G	-35.71	-33.67	-2.04	3
6105MHz	Pass	6.15019G	5.82	6.5958G	-35.54	-33.97	-1.57	4
6265MHz	Pass	6.23821G	9.25	6.5798G	-19.47	-11.52	-7.95	1
6265MHz	Pass	6.31019G	8.91	6.5766G	-18.94	-11.38	-7.56	2
6265MHz	Pass	6.29939G	9.52	6.601G	-18.49	-10.54	-7.95	3
6265MHz	Pass	6.22981G	8.82	5.9742G	-19.99	-11.53	-8.46	4

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

5955MHz_TX

21/05/2024

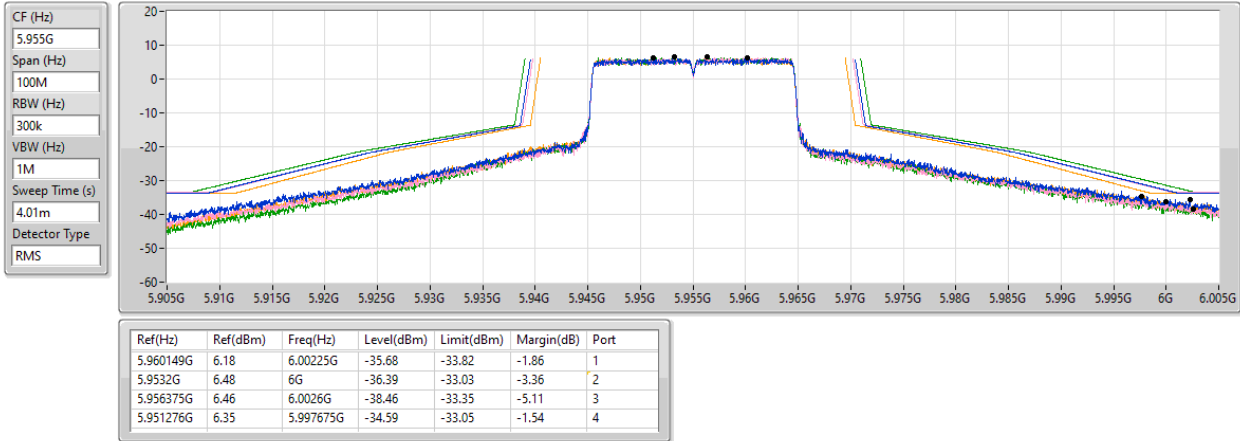


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK

5965MHz_TX

21/05/2024

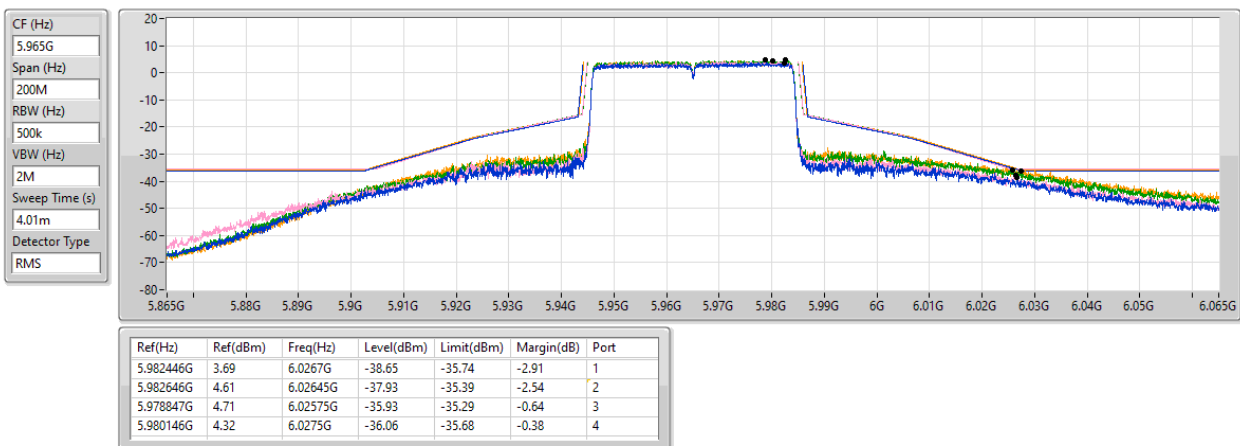


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK

5985MHz_TX

21/05/2024

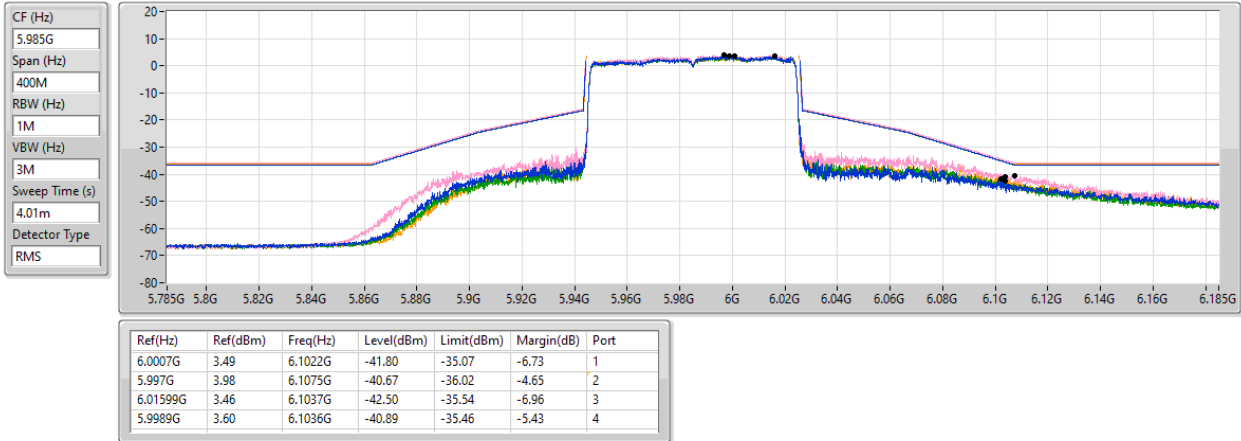

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK

6185MHz_TX

21/05/2024




5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK

6105MHz_TX

21/05/2024

CF (Hz)
6.105G
Span (Hz)
1.6G
RBW (Hz)
5M
VBW (Hz)
10M
Sweep Time (s)
4.01m
Detector Type
RMS

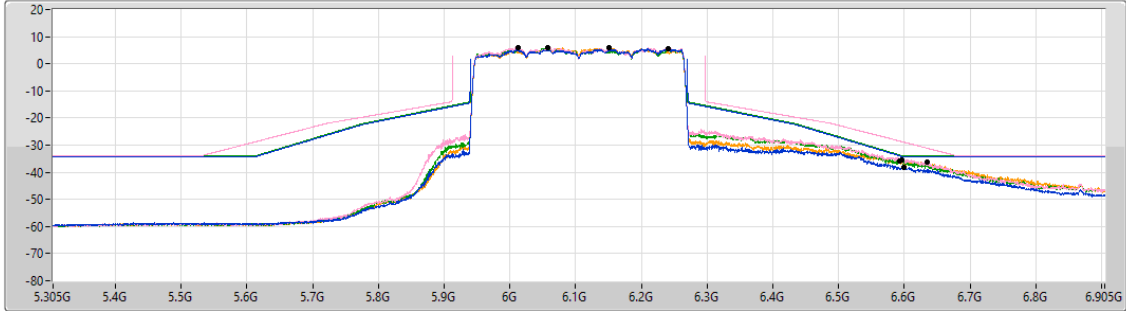

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.24097G	5.53	6.6002G	-38.19	-34.47	-3.72	1
6.01222G	6.01	6.635G	-36.34	-31.14	-5.20	2
6.05821G	5.94	6.5934G	-35.71	-33.67	-2.04	3
6.15019G	5.82	6.5958G	-35.54	-33.97	-1.57	4

Port 1
Port 2
Port 3
Port 4


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6535MHz_TX

21/05/2024

CF (Hz)
6.535G
Span (Hz)
100M
RBW (Hz)
500k
VBW (Hz)
2M
Sweep Time (s)
4.01m
Detector Type
RMS

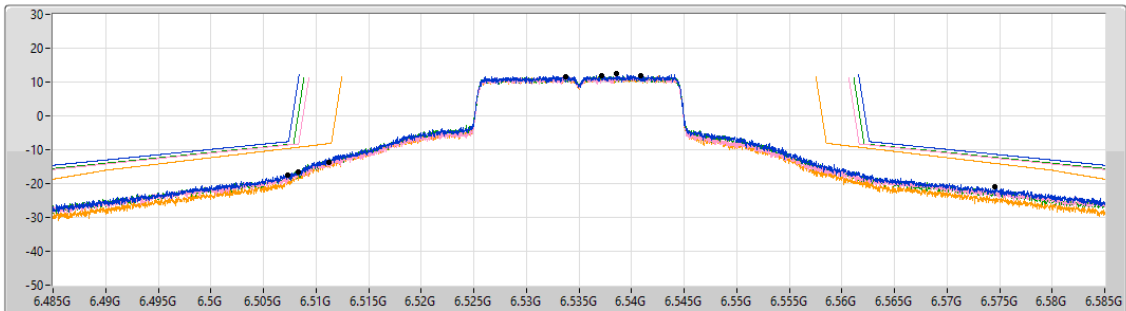

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.538549G	12.40	6.574525G	-21.05	-11.33	-9.72	1
6.540924G	11.73	6.508275G	-16.51	-8.29	-8.22	2
6.5337G	11.71	6.507325G	-17.38	-8.47	-8.91	3
6.537174G	11.91	6.51125G	-13.65	-8.17	-5.48	4


Port 1
Port 2
Port 3
Port 4

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK

6685MHz_TX

21/05/2024

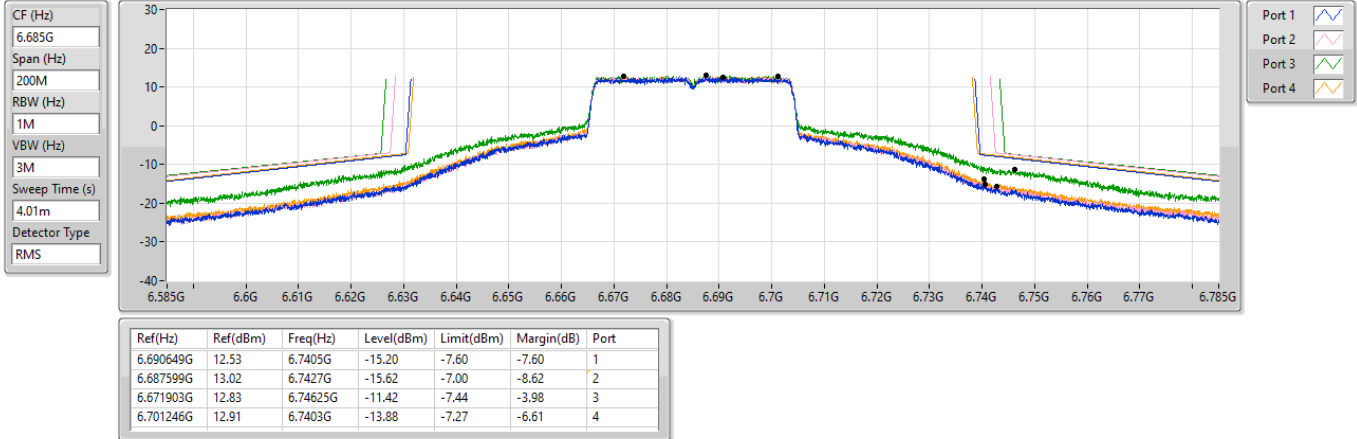


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK

6625MHz_TX

21/05/2024

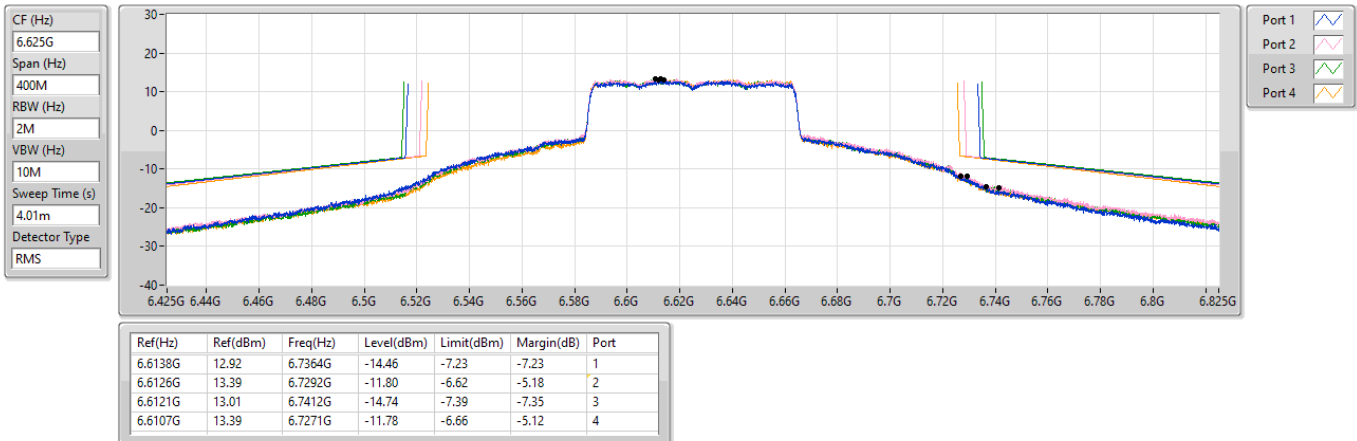


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK

6665MHz_TX

21/05/2024

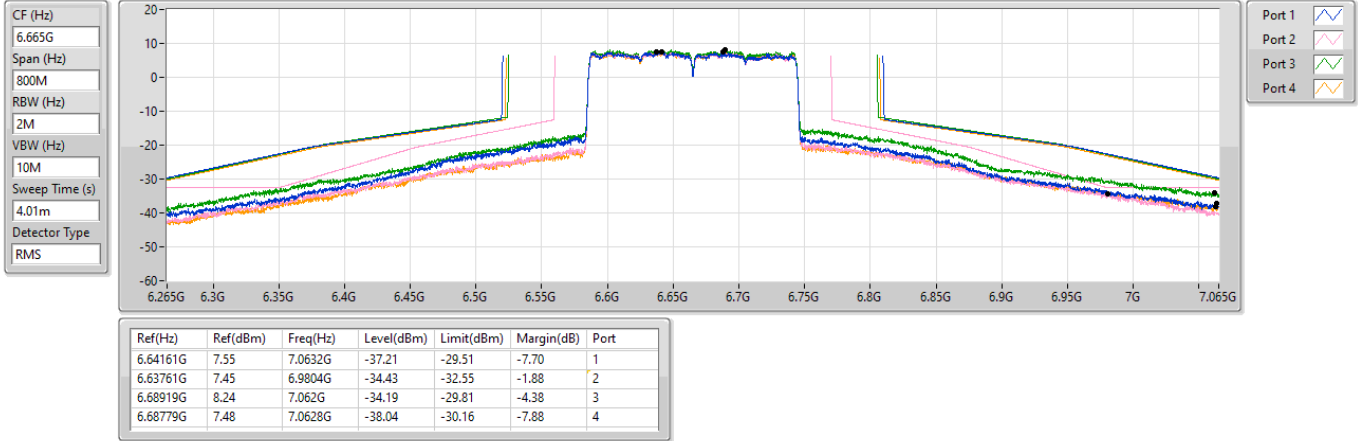



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6.425-6.525GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	PK	837.04M	40.23	46.00	-5.77	3	Horizontal	0	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	PK	90.14M	30.05	43.50	-13.45	3	Vertical	360	1.00
6585MHz	Pass	PK	205.57M	33.65	43.50	-9.85	3	Vertical	360	1.00
6585MHz	Pass	PK	460.68M	28.86	46.00	-17.14	3	Vertical	360	1.00
6585MHz	Pass	PK	582.9M	31.39	46.00	-14.61	3	Vertical	360	1.00
6585MHz	Pass	PK	639.16M	30.79	46.00	-15.21	3	Vertical	360	1.00
6585MHz	Pass	QP	46.49M	24.76	40.00	-15.24	3	Vertical	147	1.00
6585MHz	Pass	PK	39.7M	31.07	40.00	-8.93	3	Horizontal	0	1.00
6585MHz	Pass	PK	204.6M	34.70	43.50	-8.80	3	Horizontal	0	1.00
6585MHz	Pass	PK	224M	33.12	46.00	-12.88	3	Horizontal	0	1.00
6585MHz	Pass	PK	456.8M	28.28	46.00	-17.72	3	Horizontal	0	1.00
6585MHz	Pass	PK	584.84M	34.29	46.00	-11.71	3	Horizontal	0	1.00
6585MHz	Pass	PK	837.04M	40.23	46.00	-5.77	3	Horizontal	0	1.00


6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6585MHz_TX

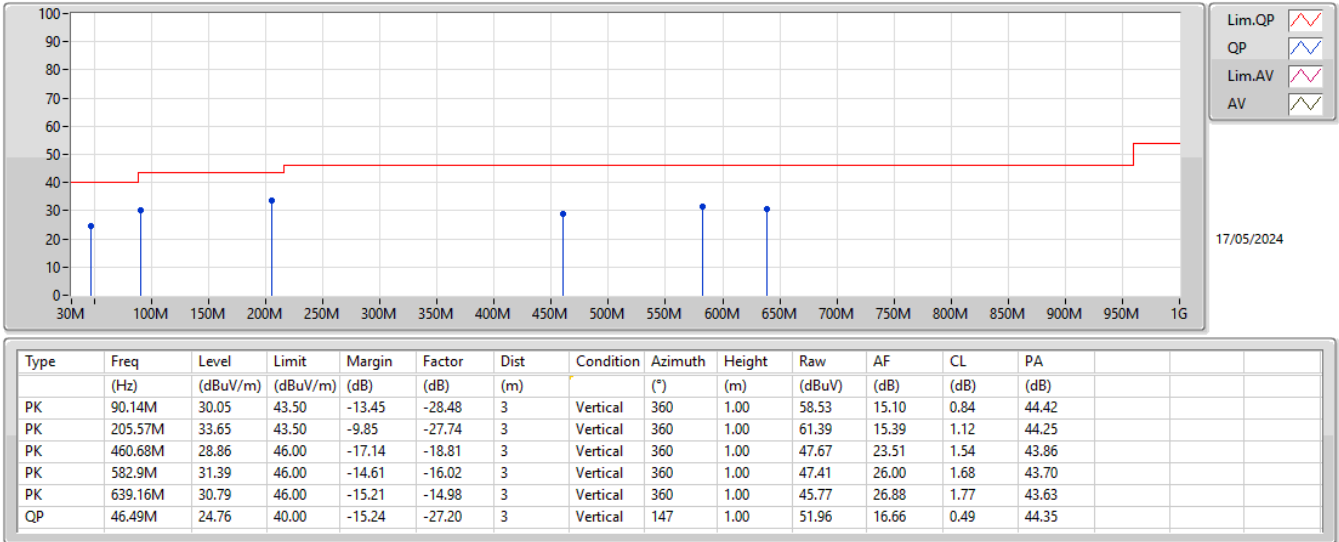

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6585MHz_TX

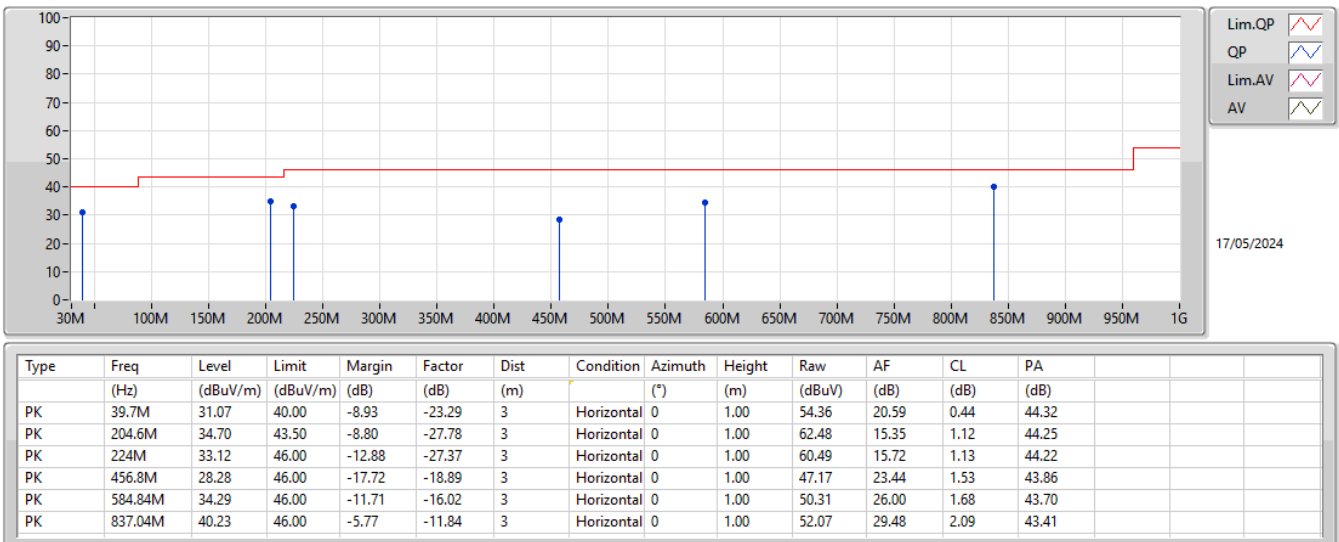

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	AV	5.9235G	67.87	68.20	-0.33	3	Horizontal	307	2.25
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	AV	5.923G	68.05	68.20	-0.15	3	Vertical	22	1.50
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	AV	5.922G	66.19	68.20	-2.01	3	Vertical	338	1.50
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	AV	5.9225G	67.50	68.20	-0.70	3	Vertical	21	1.50
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	AV	5.922G	67.55	68.20	-0.65	3	Vertical	179	1.50
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	AV	20.5662G	50.97	54.00	-3.03	3	Horizontal	318	1.71
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	AV	19.70216G	53.78	54.00	-0.22	3	Vertical	282	1.73
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	AV	19.86504G	49.66	54.00	-4.34	3	Vertical	300	2.07
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	AV	19.99224G	42.46	54.00	-11.54	3	Horizontal	360	1.52

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	AV	5.9226G	67.30	68.20	-0.90	3	Vertical	22	1.57
5955MHz	Pass	AV	5.9628G	109.34	Inf	-Inf	3	Vertical	22	1.57
5955MHz	Pass	PK	5.9226G	85.86	88.20	-2.34	3	Vertical	22	1.57
5955MHz	Pass	PK	5.9583G	123.19	Inf	-Inf	3	Vertical	22	1.57
5955MHz	Pass	AV	5.9235G	67.87	68.20	-0.33	3	Horizontal	307	2.25
5955MHz	Pass	AV	5.9637G	107.91	Inf	-Inf	3	Horizontal	307	2.25
5955MHz	Pass	PK	5.9235G	85.22	88.20	-2.98	3	Horizontal	307	2.25
5955MHz	Pass	PK	5.9589G	121.33	Inf	-Inf	3	Horizontal	307	2.25
5955MHz	Pass	AV	11.91138G	37.07	54.00	-16.93	3	Vertical	223	1.50
5955MHz	Pass	AV	17.86908G	42.89	54.00	-11.11	3	Vertical	63	1.88
5955MHz	Pass	PK	11.92152G	50.05	74.00	-23.95	3	Vertical	223	1.50
5955MHz	Pass	PK	17.87444G	57.63	74.00	-16.37	3	Vertical	63	1.88
5955MHz	Pass	AV	11.91375G	38.32	54.00	-15.68	3	Horizontal	308	1.50
5955MHz	Pass	AV	17.86852G	42.64	54.00	-11.36	3	Horizontal	2	1.50
5955MHz	Pass	PK	11.90859G	50.56	74.00	-23.44	3	Horizontal	308	1.50
5955MHz	Pass	PK	17.8588G	56.41	74.00	-17.59	3	Horizontal	2	1.50
6195MHz	Pass	AV	12.38919G	37.85	54.00	-16.15	3	Vertical	91	2.02
6195MHz	Pass	AV	18.58629G	48.89	54.00	-5.11	3	Vertical	283	1.82
6195MHz	Pass	PK	12.40008G	50.36	74.00	-23.64	3	Vertical	91	2.02
6195MHz	Pass	PK	18.58656G	62.91	74.00	-11.09	3	Vertical	283	1.82
6195MHz	Pass	AV	12.38616G	41.47	54.00	-12.53	3	Horizontal	322	1.45
6195MHz	Pass	AV	18.58509G	48.12	54.00	-5.88	3	Horizontal	268	1.50
6195MHz	Pass	PK	12.38103G	55.09	74.00	-18.91	3	Horizontal	322	1.45
6195MHz	Pass	PK	18.58488G	62.57	74.00	-11.43	3	Horizontal	268	1.50
6415MHz	Pass	AV	12.83129G	39.23	68.20	-28.97	3	Vertical	282	2.13
6415MHz	Pass	AV	19.24628G	45.61	54.00	-8.39	3	Vertical	279	1.55
6415MHz	Pass	PK	12.82859G	52.87	88.20	-35.33	3	Vertical	282	2.13
6415MHz	Pass	PK	19.241G	59.13	74.00	-14.87	3	Vertical	279	1.55
6415MHz	Pass	AV	12.82817G	41.11	68.20	-27.09	3	Horizontal	317	1.39
6415MHz	Pass	AV	19.24704G	45.64	54.00	-8.36	3	Horizontal	360	1.76
6415MHz	Pass	PK	12.82598G	53.24	88.20	-34.96	3	Horizontal	317	1.39
6415MHz	Pass	PK	19.25252G	60.50	74.00	-13.50	3	Horizontal	360	1.76
6535MHz	Pass	AV	13.07684G	39.58	68.20	-28.62	3	Vertical	303	1.48
6535MHz	Pass	AV	19.6072G	49.19	54.00	-4.81	3	Vertical	285	1.98
6535MHz	Pass	PK	13.07744G	52.58	88.20	-35.62	3	Vertical	303	1.48
6535MHz	Pass	PK	19.60696G	63.15	74.00	-10.85	3	Vertical	285	1.98
6535MHz	Pass	AV	13.0817G	39.63	68.20	-28.57	3	Horizontal	306	1.50
6535MHz	Pass	AV	19.60824G	48.35	54.00	-5.65	3	Horizontal	353	1.76
6535MHz	Pass	PK	13.07681G	52.25	88.20	-35.95	3	Horizontal	306	1.50
6535MHz	Pass	PK	19.60868G	61.37	74.00	-12.63	3	Horizontal	353	1.76
6695MHz	Pass	AV	13.38709G	38.06	54.00	-15.94	3	Vertical	322	1.81
6695MHz	Pass	AV	20.08296G	42.25	54.00	-11.75	3	Vertical	308	1.50
6695MHz	Pass	PK	13.38334G	51.11	74.00	-22.89	3	Vertical	322	1.81
6695MHz	Pass	PK	20.08304G	55.17	74.00	-18.83	3	Vertical	308	1.50
6695MHz	Pass	AV	13.3897G	38.37	54.00	-15.63	3	Horizontal	310	3.00
6695MHz	Pass	AV	20.08256G	44.93	54.00	-9.07	3	Horizontal	0	1.53
6695MHz	Pass	PK	13.38994G	51.88	74.00	-22.12	3	Horizontal	310	3.00
6695MHz	Pass	PK	20.08456G	57.62	74.00	-16.38	3	Horizontal	0	1.53
6855MHz	Pass	AV	13.6956G	38.24	68.20	-29.96	3	Vertical	73	2.94
6855MHz	Pass	AV	20.56528G	46.69	54.00	-7.31	3	Vertical	287	1.52
6855MHz	Pass	PK	13.70538G	51.95	88.20	-36.25	3	Vertical	73	2.94
6855MHz	Pass	PK	20.55732G	61.43	74.00	-12.57	3	Vertical	287	1.52
6855MHz	Pass	AV	13.6974G	38.23	68.20	-29.97	3	Horizontal	22	1.50
6855MHz	Pass	AV	20.5662G	50.97	54.00	-3.03	3	Horizontal	318	1.71
6855MHz	Pass	PK	13.71393G	51.21	88.20	-36.99	3	Horizontal	22	1.50
6855MHz	Pass	PK	20.57116G	64.00	74.00	-10.00	3	Horizontal	318	1.71
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	AV	5.923G	68.05	68.20	-0.15	3	Vertical	22	1.50
5965MHz	Pass	AV	5.9827G	105.67	Inf	-Inf	3	Vertical	22	1.50
5965MHz	Pass	PK	5.9221G	85.68	88.20	-2.52	3	Vertical	22	1.50


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5965MHz	Pass	PK	5.9527G	117.54	Inf	-Inf	3	Vertical	22	1.50
5965MHz	Pass	AV	5.9236G	64.95	68.20	-3.25	3	Horizontal	307	2.17
5965MHz	Pass	AV	5.9737G	104.91	Inf	-Inf	3	Horizontal	307	2.17
5965MHz	Pass	PK	5.9236G	83.86	88.20	-4.34	3	Horizontal	307	2.17
5965MHz	Pass	PK	5.9836G	117.29	Inf	-Inf	3	Horizontal	307	2.17
5965MHz	Pass	AV	11.94596G	38.00	54.00	-16.00	3	Vertical	14	1.50
5965MHz	Pass	AV	17.8864G	40.58	54.00	-13.42	3	Vertical	101	2.07
5965MHz	Pass	PK	11.93126G	49.75	74.00	-24.25	3	Vertical	14	1.50
5965MHz	Pass	PK	17.90128G	51.66	74.00	-22.34	3	Vertical	101	2.07
5965MHz	Pass	AV	11.9339G	38.87	54.00	-15.13	3	Horizontal	308	1.50
5965MHz	Pass	AV	17.8984G	41.27	54.00	-12.73	3	Horizontal	4	1.50
5965MHz	Pass	PK	11.91812G	50.01	74.00	-23.99	3	Horizontal	308	1.50
5965MHz	Pass	PK	17.90276G	52.97	74.00	-21.03	3	Horizontal	4	1.50
6205MHz	Pass	AV	12.43178G	38.62	54.00	-15.38	3	Vertical	267	1.01
6205MHz	Pass	AV	18.60576G	49.95	54.00	-4.05	3	Vertical	282	1.77
6205MHz	Pass	PK	12.39908G	50.41	74.00	-23.59	3	Vertical	267	1.01
6205MHz	Pass	PK	18.60576G	60.62	74.00	-13.38	3	Vertical	282	1.77
6205MHz	Pass	AV	12.40604G	40.73	54.00	-13.27	3	Horizontal	319	1.34
6205MHz	Pass	AV	18.61316G	47.90	54.00	-6.10	3	Horizontal	268	1.50
6205MHz	Pass	PK	12.3983G	52.07	74.00	-21.93	3	Horizontal	319	1.34
6205MHz	Pass	PK	18.62156G	59.01	74.00	-14.99	3	Horizontal	268	1.50
6405MHz	Pass	AV	12.822G	39.82	68.20	-28.38	3	Vertical	286	2.23
6405MHz	Pass	AV	19.21672G	45.51	54.00	-8.49	3	Vertical	280	1.56
6405MHz	Pass	PK	12.83976G	51.61	88.20	-36.59	3	Vertical	286	2.23
6405MHz	Pass	PK	19.2164G	56.63	74.00	-17.37	3	Vertical	280	1.56
6405MHz	Pass	AV	12.82344G	40.85	68.20	-27.35	3	Horizontal	316	1.34
6405MHz	Pass	AV	19.21752G	47.09	54.00	-6.91	3	Horizontal	0	1.75
6405MHz	Pass	PK	12.83658G	52.77	88.20	-35.43	3	Horizontal	316	1.34
6405MHz	Pass	PK	19.21244G	58.99	74.00	-15.01	3	Horizontal	0	1.75
6565MHz	Pass	AV	13.13738G	41.01	68.20	-27.19	3	Vertical	300	1.50
6565MHz	Pass	AV	19.70216G	53.78	54.00	-0.22	3	Vertical	282	1.73
6565MHz	Pass	PK	13.11194G	52.72	88.20	-35.48	3	Vertical	300	1.50
6565MHz	Pass	PK	19.69212G	65.06	74.00	-8.94	3	Vertical	282	1.73
6565MHz	Pass	AV	13.14998G	42.12	68.20	-26.08	3	Horizontal	310	2.67
6565MHz	Pass	AV	19.70164G	51.21	54.00	-2.79	3	Horizontal	338	1.53
6565MHz	Pass	PK	13.12334G	54.10	88.20	-34.10	3	Horizontal	310	2.67
6565MHz	Pass	PK	19.6942G	61.90	74.00	-12.10	3	Horizontal	338	1.53
6685MHz	Pass	AV	13.34234G	39.67	54.00	-14.33	3	Vertical	57	2.66
6685MHz	Pass	AV	20.05312G	43.13	54.00	-10.87	3	Vertical	309	1.50
6685MHz	Pass	PK	13.35062G	52.24	74.00	-21.76	3	Vertical	57	2.66
6685MHz	Pass	PK	20.05296G	53.33	74.00	-20.67	3	Vertical	309	1.50
6685MHz	Pass	AV	13.38902G	39.91	54.00	-14.09	3	Horizontal	329	1.03
6685MHz	Pass	AV	20.05256G	44.89	54.00	-9.11	3	Horizontal	0	1.50
6685MHz	Pass	PK	13.34G	50.93	74.00	-23.07	3	Horizontal	329	1.03
6685MHz	Pass	PK	20.05196G	55.98	74.00	-18.02	3	Horizontal	0	1.50
6845MHz	Pass	AV	13.6606G	39.97	68.20	-28.23	3	Vertical	224	2.10
6845MHz	Pass	AV	20.53164G	46.01	54.00	-7.99	3	Vertical	289	2.18
6845MHz	Pass	PK	13.69852G	51.72	88.20	-36.48	3	Vertical	224	2.10
6845MHz	Pass	PK	20.53172G	57.70	74.00	-16.30	3	Vertical	289	2.18
6845MHz	Pass	AV	13.71196G	40.16	68.20	-28.04	3	Horizontal	296	3.00
6845MHz	Pass	AV	20.53624G	50.60	54.00	-3.40	3	Horizontal	321	1.73
6845MHz	Pass	PK	13.69972G	51.83	88.20	-36.37	3	Horizontal	296	3.00
6845MHz	Pass	PK	20.54464G	62.30	74.00	-11.70	3	Horizontal	321	1.73
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	AV	5.922G	66.19	68.20	-2.01	3	Vertical	338	1.50
5985MHz	Pass	AV	5.9955G	102.86	Inf	-Inf	3	Vertical	338	1.50
5985MHz	Pass	PK	5.921G	81.98	88.20	-6.22	3	Vertical	338	1.50
5985MHz	Pass	PK	6.0005G	116.30	Inf	-Inf	3	Vertical	338	1.50
5985MHz	Pass	AV	5.923G	63.59	68.20	-4.61	3	Horizontal	307	2.21
5985MHz	Pass	AV	5.9985G	101.93	Inf	-Inf	3	Horizontal	307	2.21
5985MHz	Pass	PK	5.9185G	77.44	88.20	-10.76	3	Horizontal	307	2.21
5985MHz	Pass	PK	6.014G	113.93	Inf	-Inf	3	Horizontal	307	2.21

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5985MHz	Pass	AV	11.9904G	38.29	54.00	-15.71	3	Vertical	360	2.25
5985MHz	Pass	AV	17.95432G	39.87	54.00	-14.13	3	Vertical	296	1.50
5985MHz	Pass	PK	12.01584G	49.70	74.00	-24.30	3	Vertical	360	2.25
5985MHz	Pass	PK	17.95896G	51.44	74.00	-22.56	3	Vertical	296	1.50
5985MHz	Pass	AV	11.99988G	38.92	54.00	-15.08	3	Horizontal	346	1.68
5985MHz	Pass	AV	17.94816G	40.00	54.00	-14.00	3	Horizontal	317	1.50
5985MHz	Pass	PK	12.00996G	50.46	74.00	-23.54	3	Horizontal	346	1.68
5985MHz	Pass	PK	17.9526G	51.55	74.00	-22.45	3	Horizontal	317	1.50
6225MHz	Pass	AV	12.49764G	38.31	54.00	-15.69	3	Vertical	115	1.50
6225MHz	Pass	AV	18.66564G	42.93	54.00	-11.07	3	Vertical	282	1.78
6225MHz	Pass	PK	12.45984G	50.06	74.00	-23.94	3	Vertical	115	1.50
6225MHz	Pass	PK	18.66588G	54.11	74.00	-19.89	3	Vertical	282	1.78
6225MHz	Pass	AV	12.44064G	39.55	54.00	-14.45	3	Horizontal	320	1.30
6225MHz	Pass	AV	18.6728G	42.65	54.00	-11.35	3	Horizontal	267	1.50
6225MHz	Pass	PK	12.45396G	52.38	74.00	-21.62	3	Horizontal	320	1.30
6225MHz	Pass	PK	18.68276G	54.44	74.00	-19.56	3	Horizontal	267	1.50
6385MHz	Pass	AV	12.80588G	39.39	68.20	-28.81	3	Vertical	309	1.32
6385MHz	Pass	AV	19.15164G	42.19	54.00	-11.81	3	Vertical	282	1.81
6385MHz	Pass	PK	12.80096G	50.94	88.20	-37.26	3	Vertical	309	1.32
6385MHz	Pass	PK	19.14544G	54.06	74.00	-19.94	3	Vertical	282	1.81
6385MHz	Pass	AV	12.78812G	40.11	68.20	-28.09	3	Horizontal	315	1.34
6385MHz	Pass	AV	19.14848G	43.64	54.00	-10.36	3	Horizontal	333	1.50
6385MHz	Pass	PK	12.82316G	51.59	88.20	-36.61	3	Horizontal	315	1.34
6385MHz	Pass	PK	19.14856G	55.06	74.00	-18.94	3	Horizontal	333	1.50
6625MHz	Pass	AV	13.20116G	40.68	68.20	-27.52	3	Vertical	274	2.33
6625MHz	Pass	AV	19.86504G	49.66	54.00	-4.34	3	Vertical	300	2.07
6625MHz	Pass	PK	13.20656G	52.26	88.20	-35.94	3	Vertical	274	2.33
6625MHz	Pass	PK	19.8654G	60.81	74.00	-13.19	3	Vertical	300	2.07
6625MHz	Pass	AV	13.20224G	40.45	68.20	-27.75	3	Horizontal	302	1.50
6625MHz	Pass	AV	19.86736G	47.97	54.00	-6.03	3	Horizontal	304	1.53
6625MHz	Pass	PK	13.19588G	52.40	88.20	-35.80	3	Horizontal	302	1.50
6625MHz	Pass	PK	19.8776G	59.20	74.00	-14.80	3	Horizontal	304	1.53
6705MHz	Pass	AV	13.46748G	39.90	68.20	-28.30	3	Vertical	343	2.21
6705MHz	Pass	AV	20.10804G	38.44	54.00	-15.56	3	Vertical	307	1.50
6705MHz	Pass	PK	13.4694G	52.39	88.20	-35.81	3	Vertical	343	2.21
6705MHz	Pass	PK	20.11296G	49.58	74.00	-24.42	3	Vertical	307	1.50
6705MHz	Pass	AV	13.46256G	39.95	68.20	-28.25	3	Horizontal	239	1.50
6705MHz	Pass	AV	20.1204G	42.18	54.00	-11.82	3	Horizontal	5	1.54
6705MHz	Pass	PK	13.4622G	52.37	88.20	-35.83	3	Horizontal	239	1.50
6705MHz	Pass	PK	20.10536G	54.02	74.00	-19.98	3	Horizontal	5	1.54
6785MHz	Pass	AV	13.51756G	40.38	68.20	-27.82	3	Vertical	42	1.95
6785MHz	Pass	AV	20.36156G	38.95	54.00	-15.05	3	Vertical	288	2.06
6785MHz	Pass	PK	13.60732G	52.38	88.20	-35.82	3	Vertical	42	1.95
6785MHz	Pass	PK	20.3516G	49.33	74.00	-24.67	3	Vertical	288	2.06
6785MHz	Pass	AV	13.56592G	40.19	68.20	-28.01	3	Horizontal	0	2.29
6785MHz	Pass	AV	20.36056G	43.52	54.00	-10.48	3	Horizontal	5	1.60
6785MHz	Pass	PK	13.6102G	52.12	88.20	-36.08	3	Horizontal	0	2.29
6785MHz	Pass	PK	20.36092G	54.15	74.00	-19.85	3	Horizontal	5	1.60
802.11be EHT 160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.9225G	67.50	68.20	-0.70	3	Vertical	21	1.50
6025MHz	Pass	AV	6.0425G	101.31	Inf	-Inf	3	Vertical	21	1.50
6025MHz	Pass	PK	5.893G	80.12	88.20	-8.08	3	Vertical	21	1.50
6025MHz	Pass	PK	6.048G	112.57	Inf	-Inf	3	Vertical	21	1.50
6025MHz	Pass	AV	5.922G	62.82	68.20	-5.38	3	Horizontal	8	1.50
6025MHz	Pass	AV	6.0075G	98.96	Inf	-Inf	3	Horizontal	8	1.50
6025MHz	Pass	PK	5.9115G	74.49	88.20	-13.71	3	Horizontal	8	1.50
6025MHz	Pass	PK	6.012G	109.66	Inf	-Inf	3	Horizontal	8	1.50
6025MHz	Pass	AV	12.0464G	40.51	54.00	-13.49	3	Vertical	144	1.43
6025MHz	Pass	AV	18.06944G	31.68	54.00	-22.32	3	Vertical	56	2.49
6025MHz	Pass	PK	12.1208G	50.31	74.00	-23.69	3	Vertical	144	1.43
6025MHz	Pass	PK	18.0844G	41.00	74.00	-33.00	3	Vertical	56	2.49
6025MHz	Pass	AV	12.10592G	40.26	54.00	-13.74	3	Horizontal	63	1.50

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6025MHz	Pass	AV	18.08272G	31.65	54.00	-22.35	3	Horizontal	62	1.74
6025MHz	Pass	PK	12.05576G	50.40	74.00	-23.60	3	Horizontal	63	1.50
6025MHz	Pass	PK	18.07488G	41.25	74.00	-32.75	3	Horizontal	62	1.74
6185MHz	Pass	AV	12.2572G	40.19	54.00	-13.81	3	Vertical	119	2.31
6185MHz	Pass	AV	18.54568G	31.72	54.00	-22.28	3	Vertical	344	1.50
6185MHz	Pass	PK	12.286G	50.27	74.00	-23.73	3	Vertical	119	2.31
6185MHz	Pass	PK	18.55184G	41.42	74.00	-32.58	3	Vertical	344	1.50
6185MHz	Pass	AV	12.35392G	40.96	54.00	-13.04	3	Horizontal	323	1.33
6185MHz	Pass	AV	18.55164G	31.87	54.00	-22.13	3	Horizontal	311	2.77
6185MHz	Pass	PK	12.2596G	51.72	74.00	-22.28	3	Horizontal	323	1.33
6185MHz	Pass	PK	18.55968G	41.61	74.00	-32.39	3	Horizontal	311	2.77
6345MHz	Pass	AV	12.75936G	41.25	68.20	-26.95	3	Vertical	72	1.50
6345MHz	Pass	AV	19.04288G	38.37	54.00	-15.63	3	Vertical	266	1.65
6345MHz	Pass	PK	12.6684G	50.79	74.00	-23.21	3	Vertical	72	1.50
6345MHz	Pass	PK	19.03796G	48.31	74.00	-25.69	3	Vertical	266	1.65
6345MHz	Pass	AV	12.77064G	40.72	68.20	-27.48	3	Horizontal	235	2.55
6345MHz	Pass	AV	19.02828G	41.11	54.00	-12.89	3	Horizontal	334	1.75
6345MHz	Pass	PK	12.79848G	51.04	88.20	-37.16	3	Horizontal	235	2.55
6345MHz	Pass	PK	19.02776G	50.55	74.00	-23.45	3	Horizontal	334	1.75
6665MHz	Pass	AV	13.3864G	41.32	54.00	-12.68	3	Vertical	72	1.88
6665MHz	Pass	AV	19.98796G	40.44	54.00	-13.56	3	Vertical	309	1.50
6665MHz	Pass	PK	13.41904G	51.85	88.20	-36.35	3	Vertical	72	1.88
6665MHz	Pass	PK	19.99788G	50.28	74.00	-23.72	3	Vertical	309	1.50
6665MHz	Pass	AV	13.21144G	41.40	68.20	-26.80	3	Horizontal	305	1.50
6665MHz	Pass	AV	19.99224G	42.46	54.00	-11.54	3	Horizontal	360	1.52
6665MHz	Pass	PK	13.43272G	51.61	88.20	-36.59	3	Horizontal	305	1.50
6665MHz	Pass	PK	19.99068G	52.45	74.00	-21.55	3	Horizontal	360	1.52
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.922G	67.55	68.20	-0.65	3	Vertical	179	1.50
6105MHz	Pass	AV	6.242G	98.94	Inf	-Inf	3	Vertical	179	1.50
6105MHz	Pass	PK	5.922G	80.12	88.20	-8.08	3	Vertical	179	1.50
6105MHz	Pass	PK	6.228G	110.08	Inf	-Inf	3	Vertical	179	1.50
6105MHz	Pass	AV	5.92G	63.90	68.20	-4.30	3	Horizontal	4	1.74
6105MHz	Pass	AV	6.007G	97.26	Inf	-Inf	3	Horizontal	4	1.74
6105MHz	Pass	PK	5.88G	76.98	88.20	-11.22	3	Horizontal	4	1.74
6105MHz	Pass	PK	6.008G	107.23	Inf	-Inf	3	Horizontal	4	1.74
6105MHz	Pass	AV	12.18696G	40.27	54.00	-13.73	3	Vertical	198	2.92
6105MHz	Pass	AV	18.317G	31.68	54.00	-22.32	3	Vertical	3	1.50
6105MHz	Pass	PK	12.01368G	50.45	74.00	-23.55	3	Vertical	198	2.92
6105MHz	Pass	PK	18.3248G	42.70	74.00	-31.30	3	Vertical	3	1.50
6105MHz	Pass	AV	12.15432G	40.33	54.00	-13.67	3	Horizontal	33	1.50
6105MHz	Pass	AV	18.31048G	32.04	54.00	-21.96	3	Horizontal	56	2.90
6105MHz	Pass	PK	12.28584G	51.16	74.00	-22.84	3	Horizontal	33	1.50
6105MHz	Pass	PK	18.3212G	41.92	74.00	-32.08	3	Horizontal	56	2.90
6265MHz	Pass	AV	12.75992G	40.43	68.20	-27.77	3	Vertical	139	1.50
6265MHz	Pass	AV	18.80016G	39.89	54.00	-14.11	3	Vertical	282	1.65
6265MHz	Pass	PK	12.75368G	50.54	88.20	-37.66	3	Vertical	139	1.50
6265MHz	Pass	PK	18.80332G	49.12	74.00	-24.88	3	Vertical	282	1.65
6265MHz	Pass	AV	12.75464G	40.70	68.20	-27.50	3	Horizontal	312	1.50
6265MHz	Pass	AV	18.80448G	40.84	54.00	-13.16	3	Horizontal	342	1.62
6265MHz	Pass	PK	12.50072G	50.16	74.00	-23.84	3	Horizontal	312	1.50
6265MHz	Pass	PK	18.80452G	50.72	74.00	-23.28	3	Horizontal	342	1.62


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

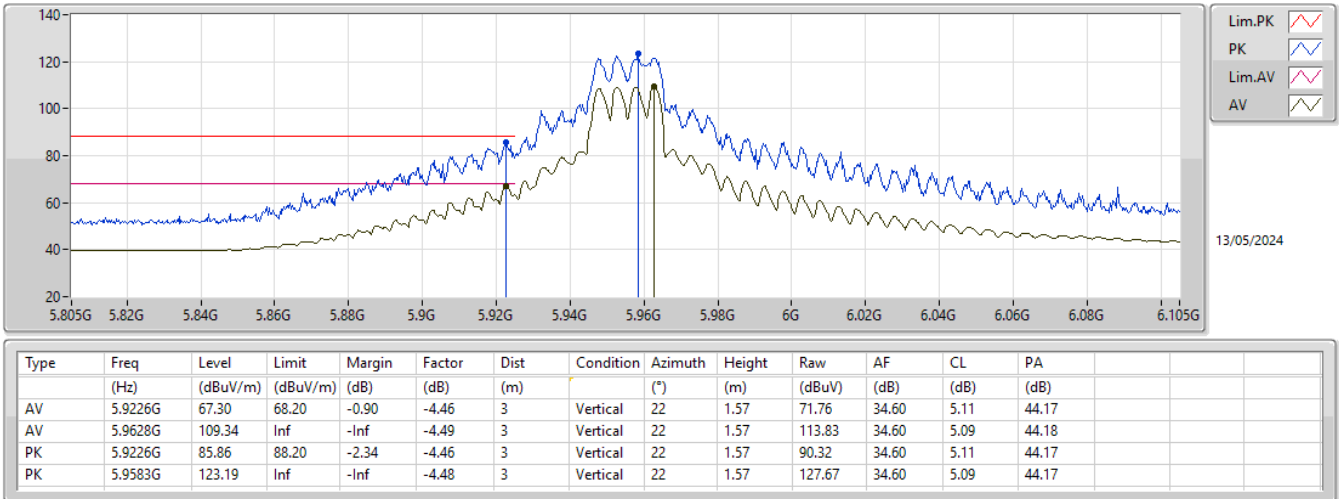


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

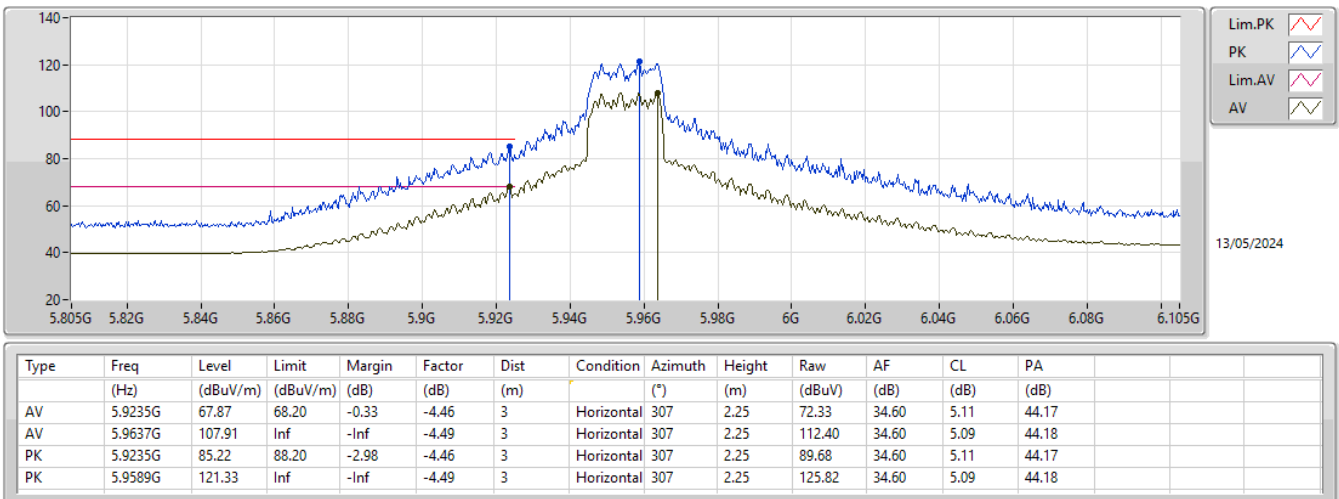

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

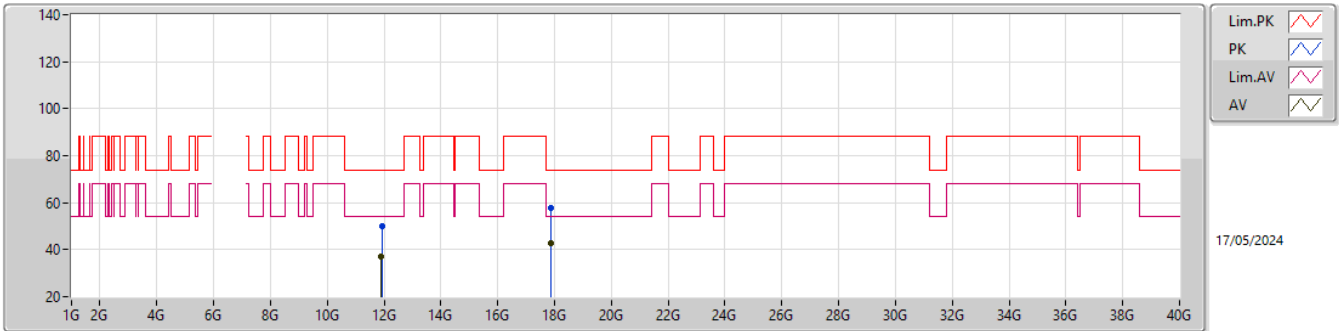

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.91138G	37.07	54.00	-16.93	4.88	3	Vertical	223	1.50	32.19	39.02	7.95	42.09
AV	17.86908G	42.89	54.00	-11.11	-15.29	3	Vertical	63	1.88	58.18	38.62	10.56	64.47
PK	11.92152G	50.05	74.00	-23.95	4.90	3	Vertical	223	1.50	45.15	39.04	7.96	42.10
PK	17.87444G	57.63	74.00	-16.37	-15.31	3	Vertical	63	1.88	72.94	38.60	10.56	64.47

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

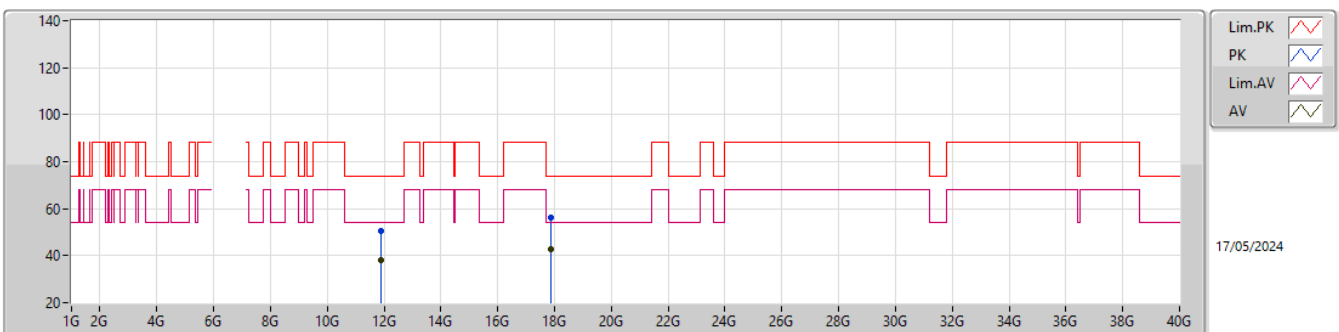

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.91375G	38.32	54.00	-15.68	4.89	3	Horizontal	308	1.50	33.43	39.03	7.95	42.09
AV	17.86852G	42.64	54.00	-11.36	-15.28	3	Horizontal	2	1.50	57.92	38.63	10.56	64.47
PK	11.90859G	50.56	74.00	-23.44	4.88	3	Horizontal	308	1.50	45.68	39.02	7.95	42.09
PK	17.8588G	56.41	74.00	-17.59	-15.25	3	Horizontal	2	1.50	71.66	38.66	10.55	64.46

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5965MHz_TX

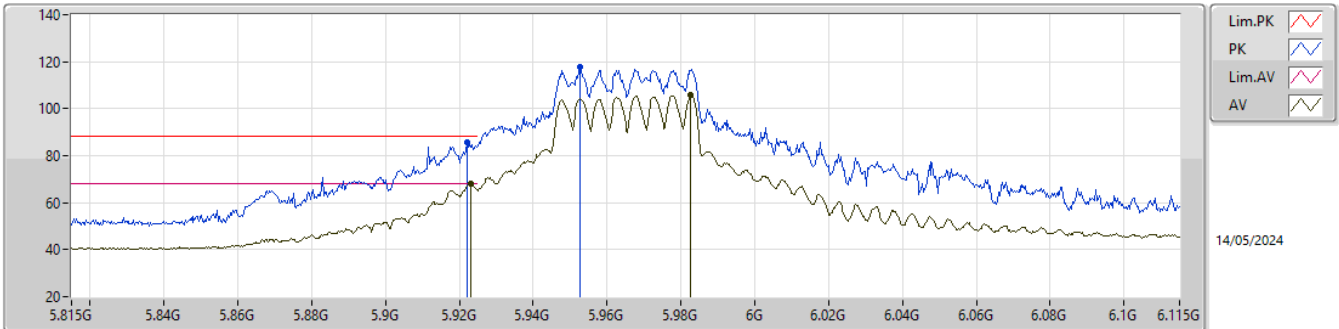

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.923G	68.05	68.20	-0.15	-4.46	3	Vertical	22	1.50	72.51	34.60	5.11	44.17
AV	5.9827G	105.67	Inf	-Inf	-4.50	3	Vertical	22	1.50	110.17	34.60	5.08	44.18
PK	5.9221G	85.68	88.20	-2.52	-4.46	3	Vertical	22	1.50	90.14	34.60	5.11	44.17
PK	5.9527G	117.54	Inf	-Inf	-4.47	3	Vertical	22	1.50	122.01	34.60	5.10	44.17

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5965MHz_TX

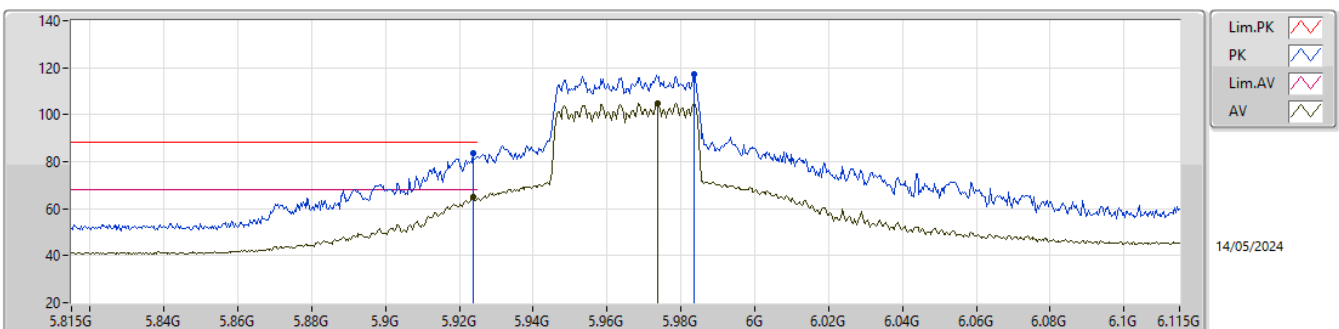

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.9236G	64.95	68.20	-3.25	-4.46	3	Horizontal	307	2.17	69.41	34.60	5.11	44.17
AV	5.9737G	104.91	Inf	-Inf	-4.50	3	Horizontal	307	2.17	109.41	34.60	5.08	44.18
PK	5.9236G	83.86	88.20	-4.34	-4.46	3	Horizontal	307	2.17	88.32	34.60	5.11	44.17
PK	5.9836G	117.29	Inf	-Inf	-4.50	3	Horizontal	307	2.17	121.79	34.60	5.08	44.18


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

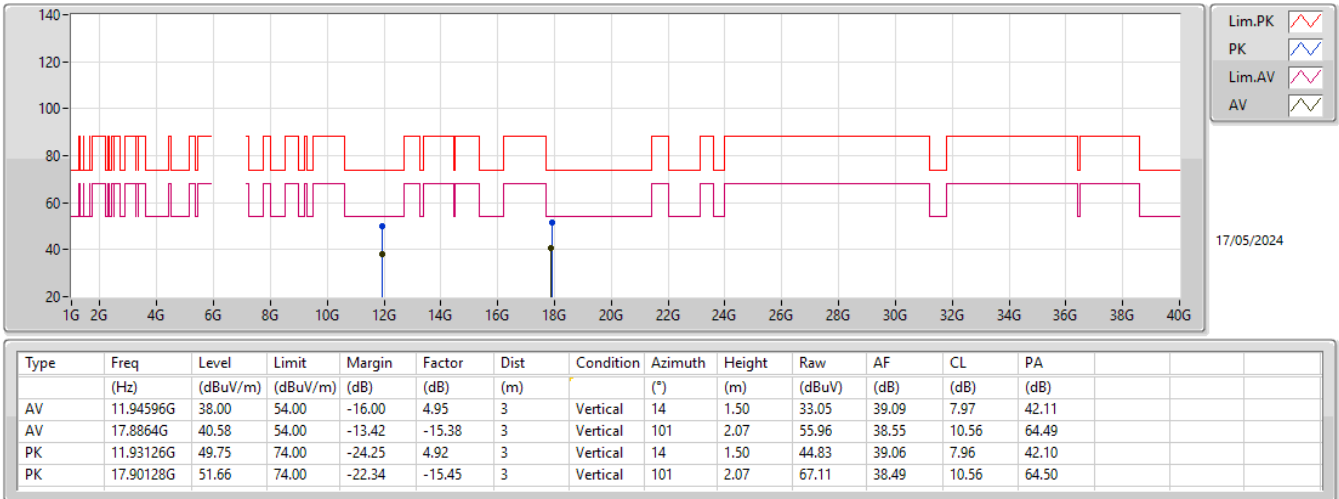


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

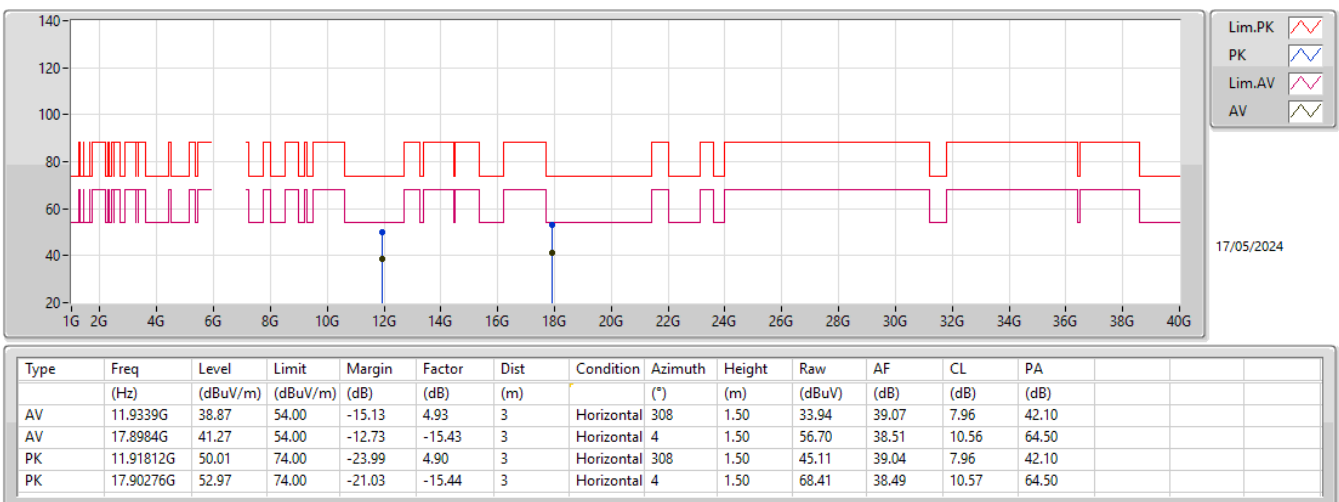

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5985MHz_TX

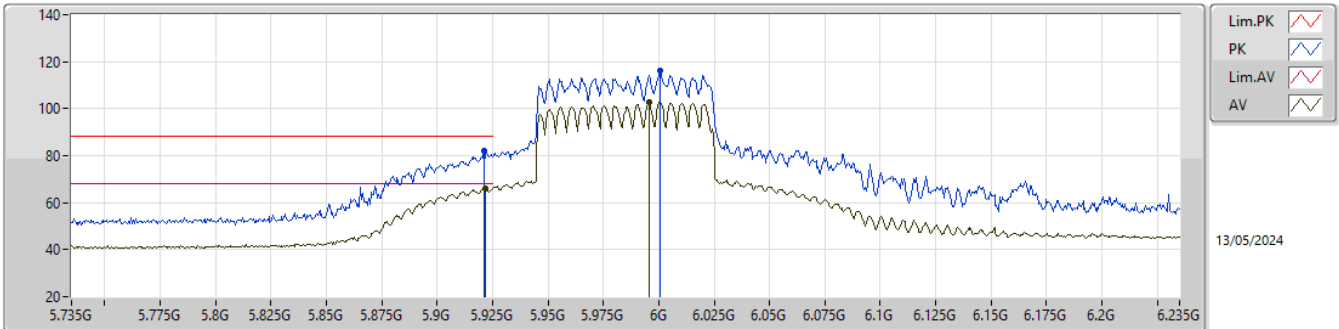

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.922G	66.19	68.20	-2.01	-4.46	3	Vertical	338	1.50	70.65	34.60	5.11	44.17
AV	5.9955G	102.86	Inf	-Inf	-4.51	3	Vertical	338	1.50	107.37	34.60	5.07	44.18
PK	5.921G	81.98	88.20	-6.22	-4.46	3	Vertical	338	1.50	86.44	34.60	5.11	44.17
PK	6.0005G	116.30	Inf	-Inf	-4.51	3	Vertical	338	1.50	120.81	34.60	5.07	44.18

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5985MHz_TX

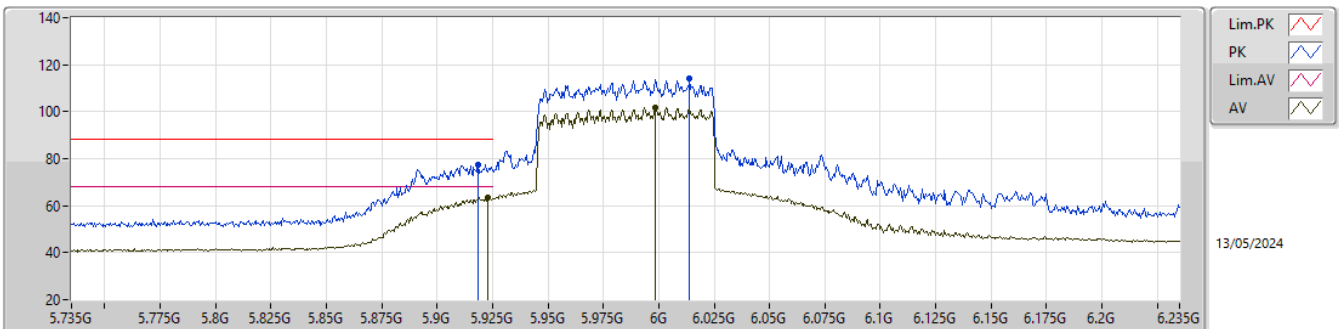

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.923G	63.59	68.20	-4.61	-4.46	3	Horizontal	307	2.21	68.05	34.60	5.11	44.17
AV	5.9985G	101.93	Inf	-Inf	-4.51	3	Horizontal	307	2.21	106.44	34.60	5.07	44.18
PK	5.9185G	77.44	88.20	-10.76	-4.46	3	Horizontal	307	2.21	81.90	34.60	5.11	44.17
PK	6.014G	113.93	Inf	-Inf	-4.56	3	Horizontal	307	2.21	118.49	34.54	5.08	44.18


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

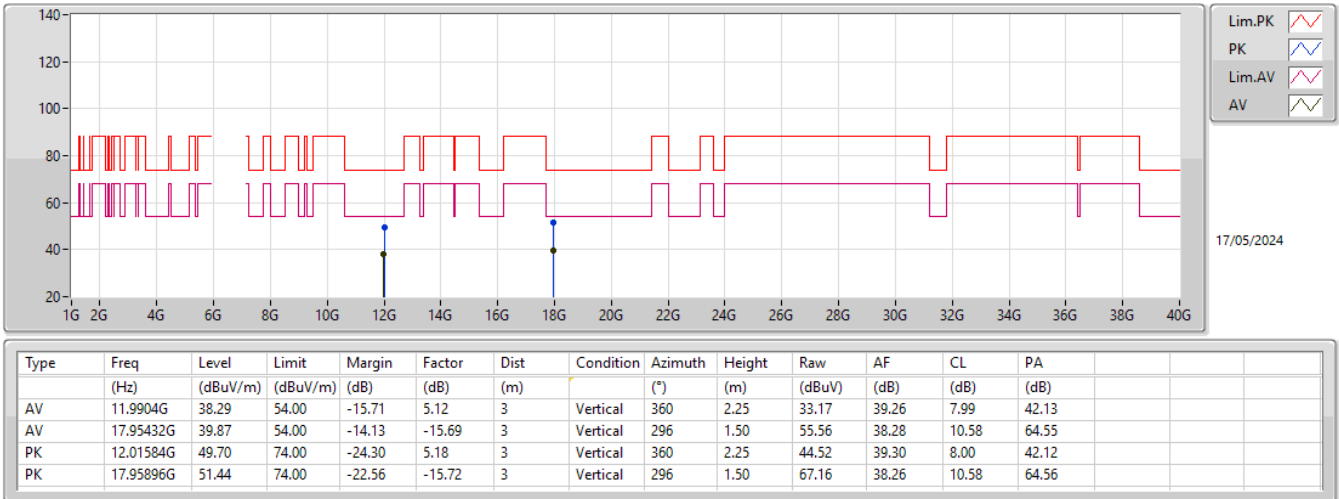


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

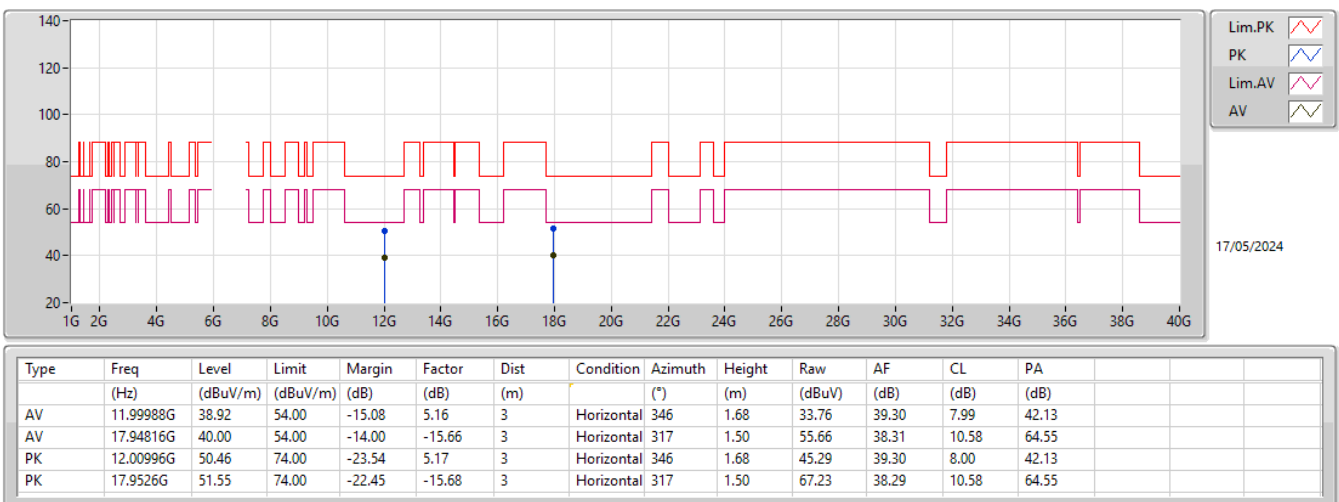


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

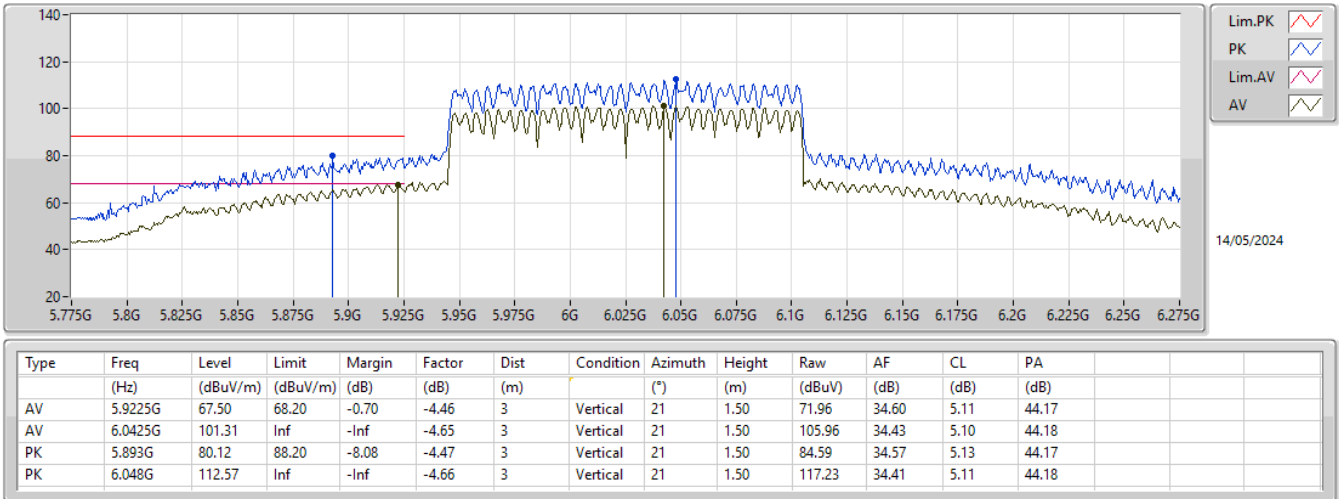


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

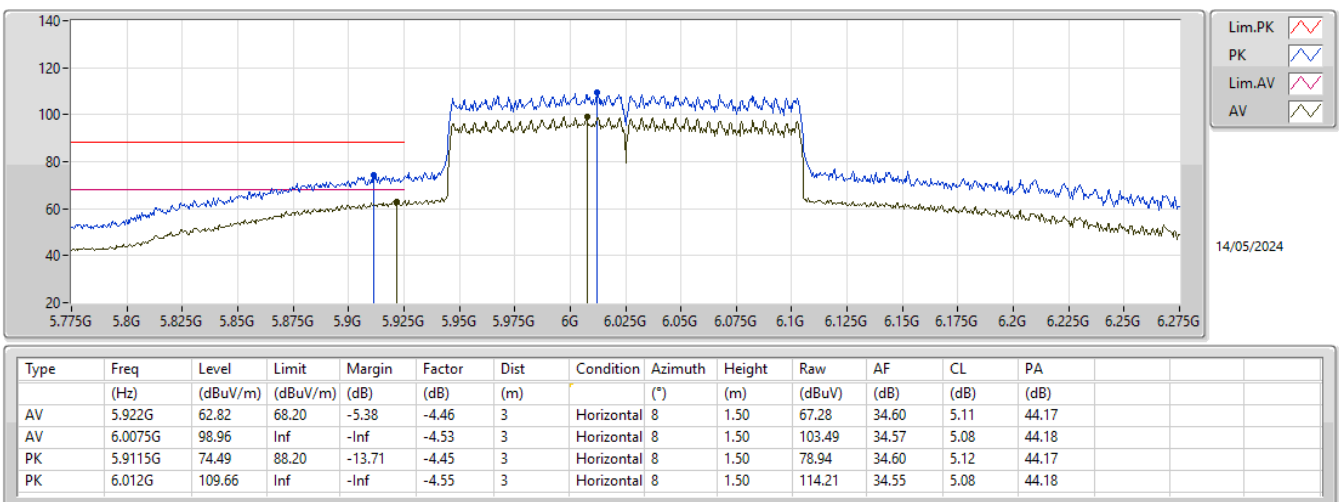


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

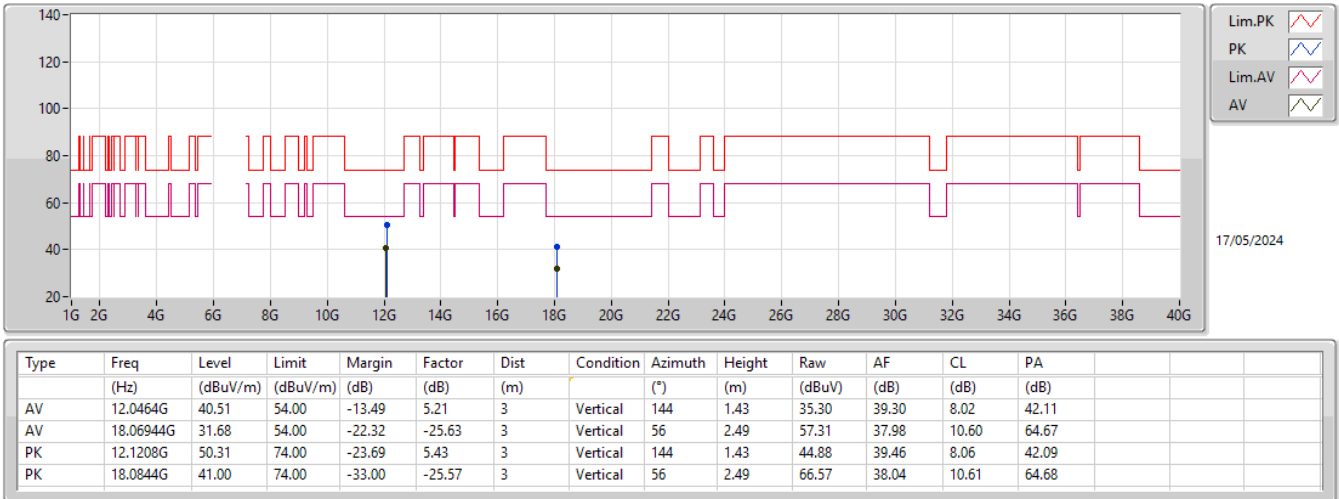


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

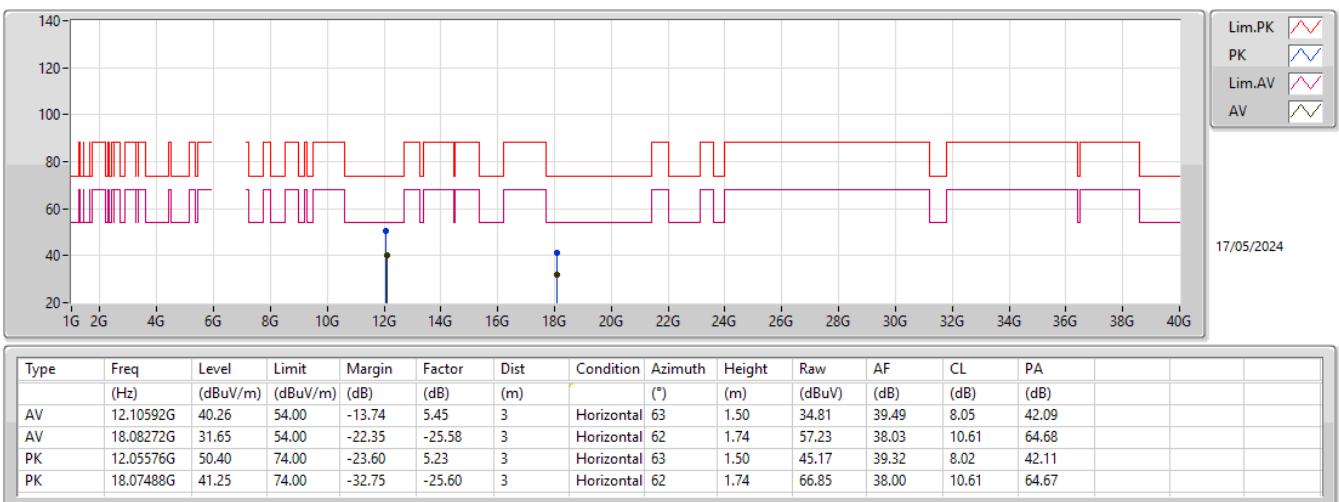

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX


6105MHz_TX

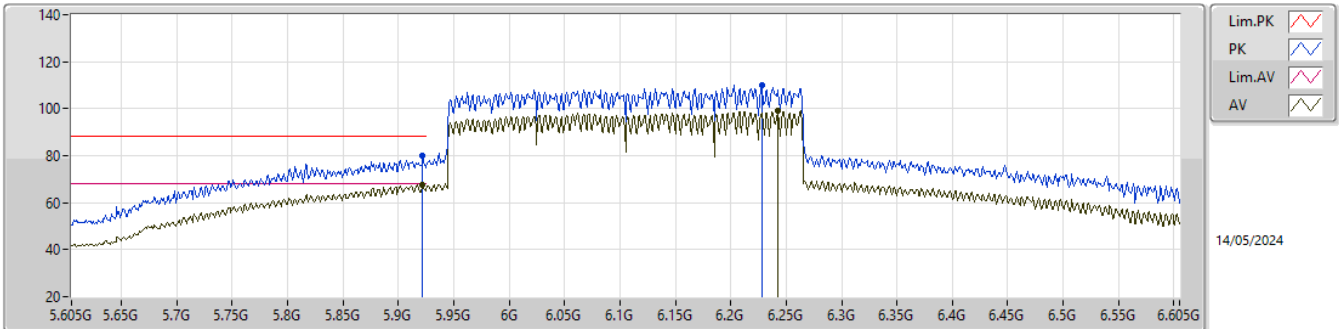

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)				
AV	5.922G	67.55	68.20	-0.65	-4.46	3	Vertical	179	1.50	72.01	34.60	5.11	44.17				
AV	6.242G	98.94	Inf	-Inf	-4.13	3	Vertical	179	1.50	103.07	34.75	5.28	44.16				
PK	5.922G	80.12	88.20	-8.08	-4.46	3	Vertical	179	1.50	84.58	34.60	5.11	44.17				
PK	6.228G	110.08	Inf	-Inf	-4.23	3	Vertical	179	1.50	114.31	34.67	5.26	44.16				

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX


6105MHz_TX

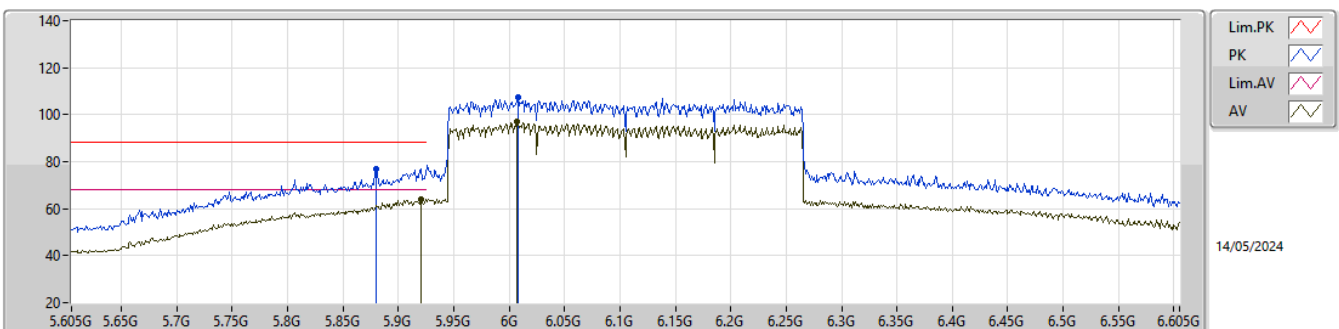

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)				
AV	5.92G	63.90	68.20	-4.30	-4.46	3	Horizontal	4	1.74	68.36	34.60	5.11	44.17				
AV	6.007G	97.26	Inf	-Inf	-4.53	3	Horizontal	4	1.74	101.79	34.57	5.08	44.18				
PK	5.88G	76.98	88.20	-11.22	-4.51	3	Horizontal	4	1.74	81.49	34.52	5.14	44.17				
PK	6.008G	107.23	Inf	-Inf	-4.53	3	Horizontal	4	1.74	111.76	34.57	5.08	44.18				


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6105MHz_TX

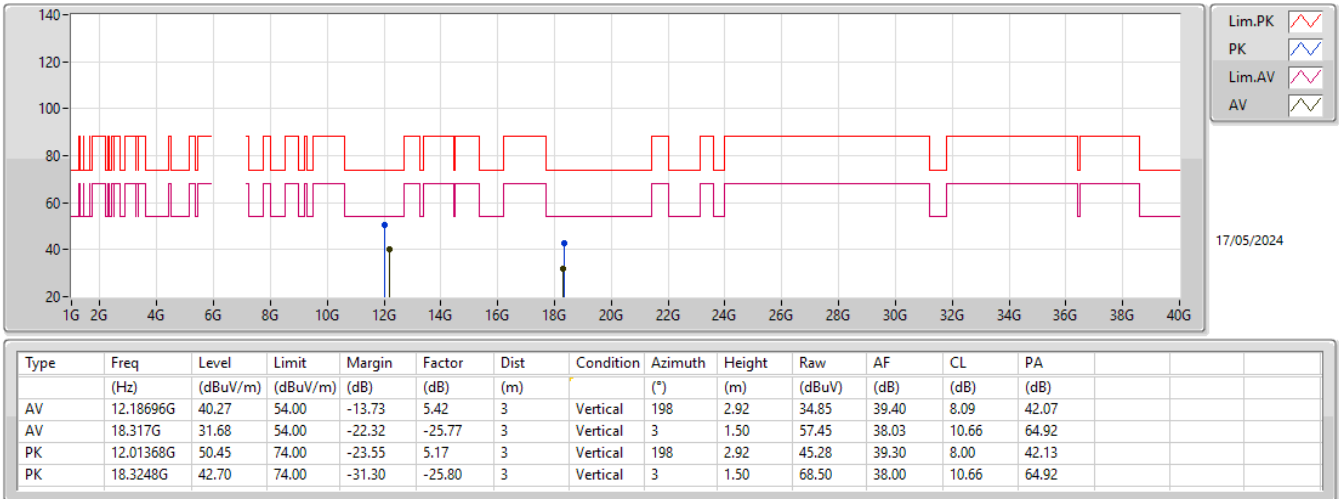


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6105MHz_TX

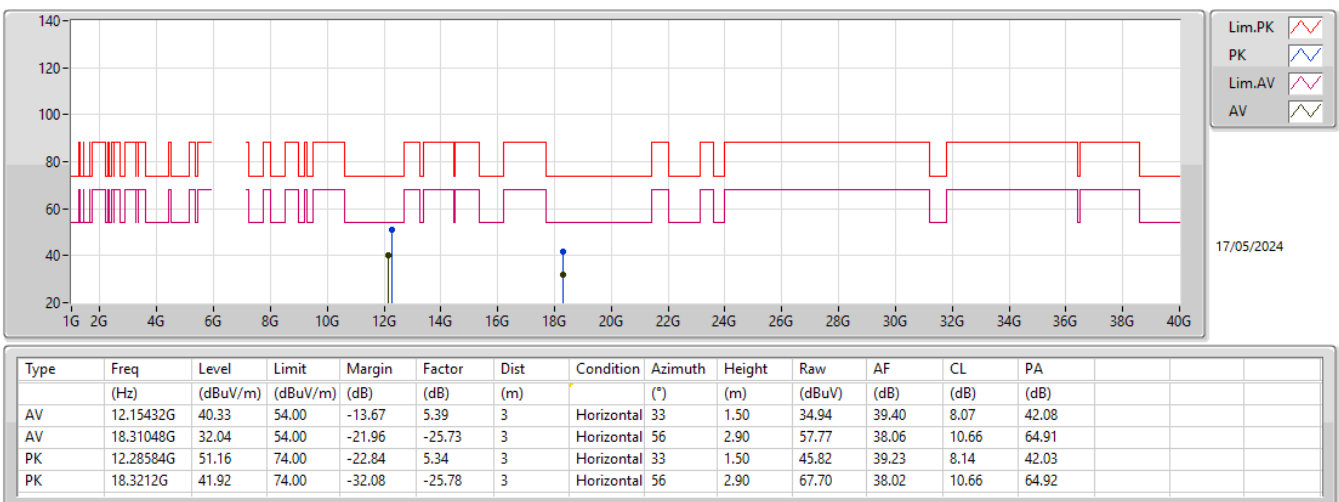


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

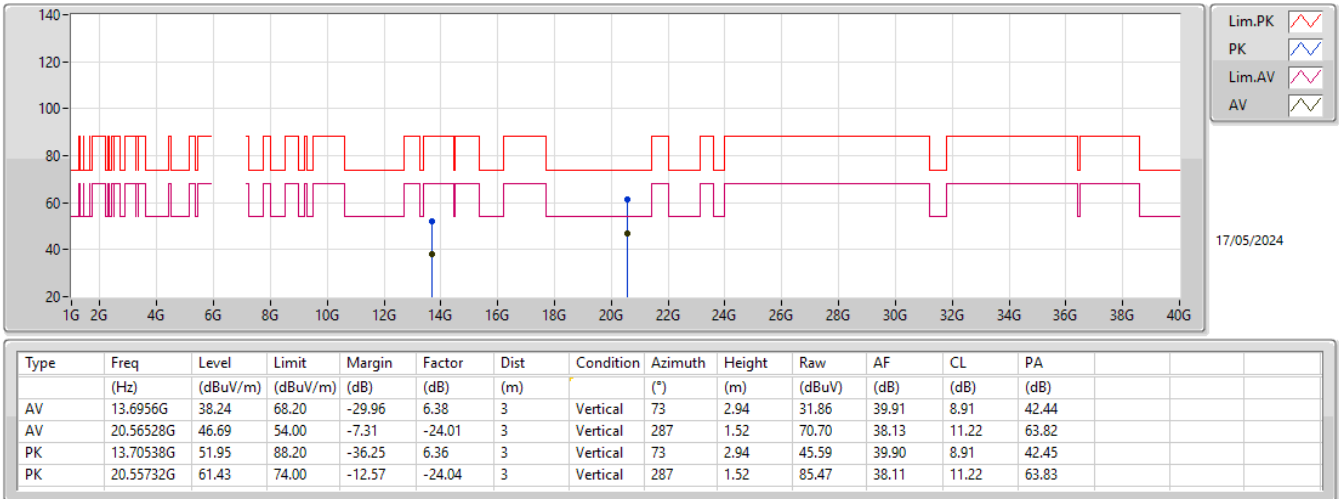


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

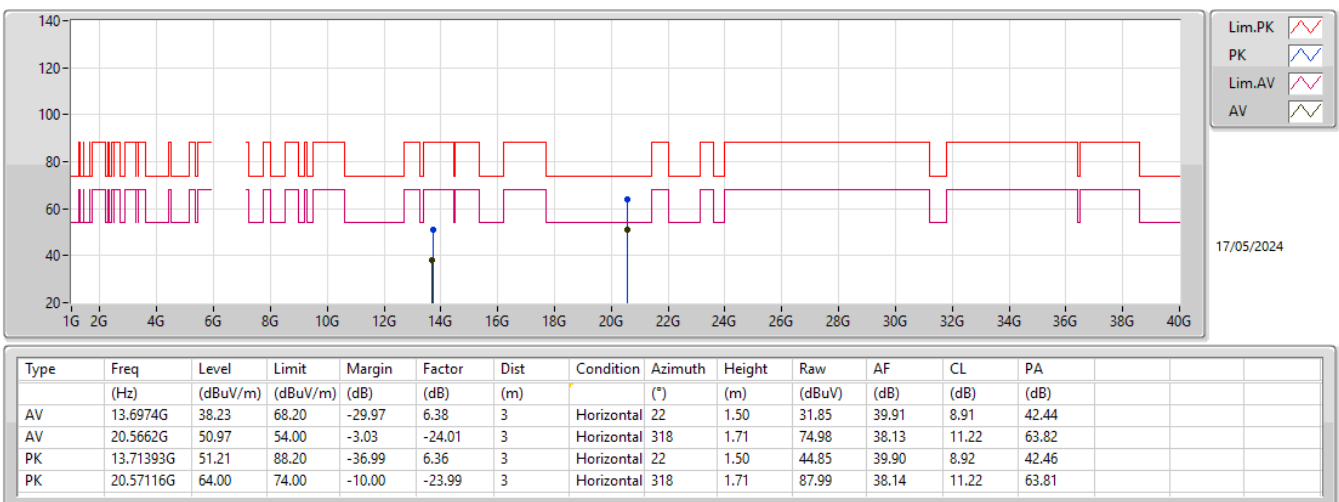


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6565MHz_TX

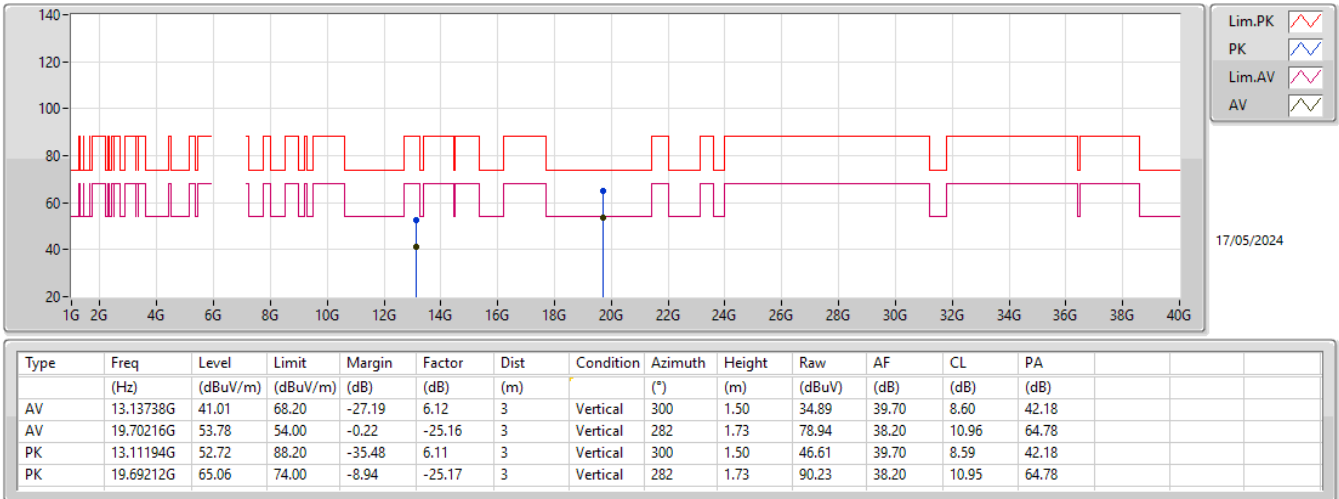


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6565MHz_TX

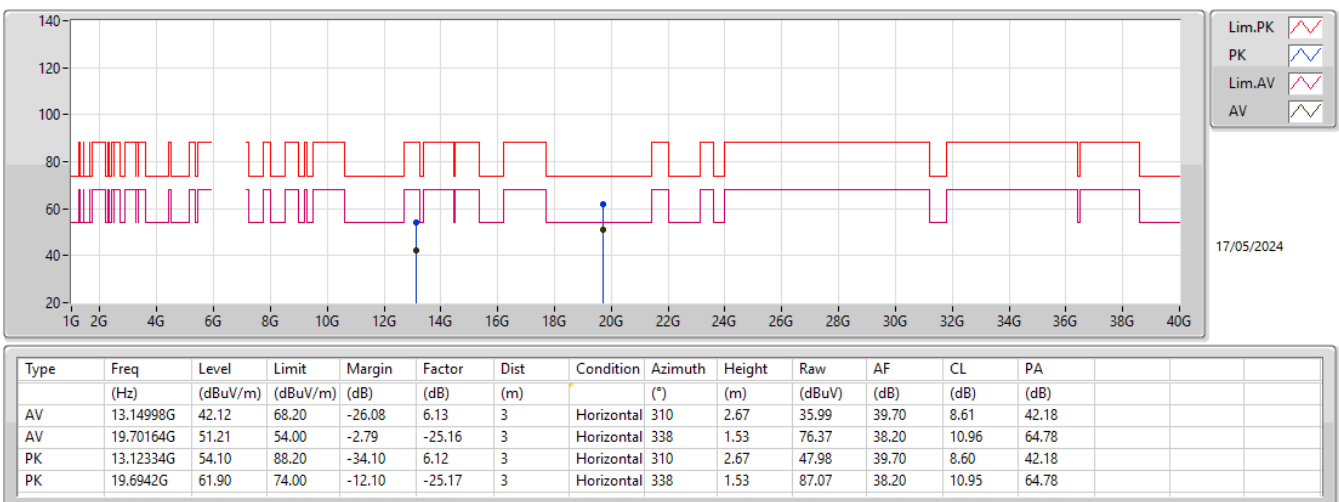


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6625MHz_TX

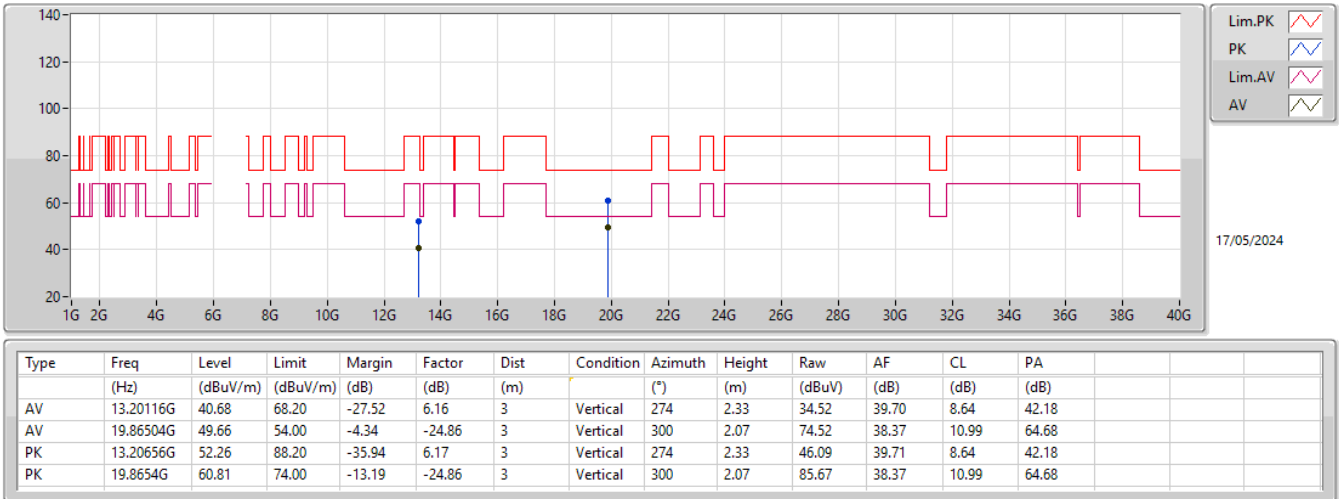


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6625MHz_TX

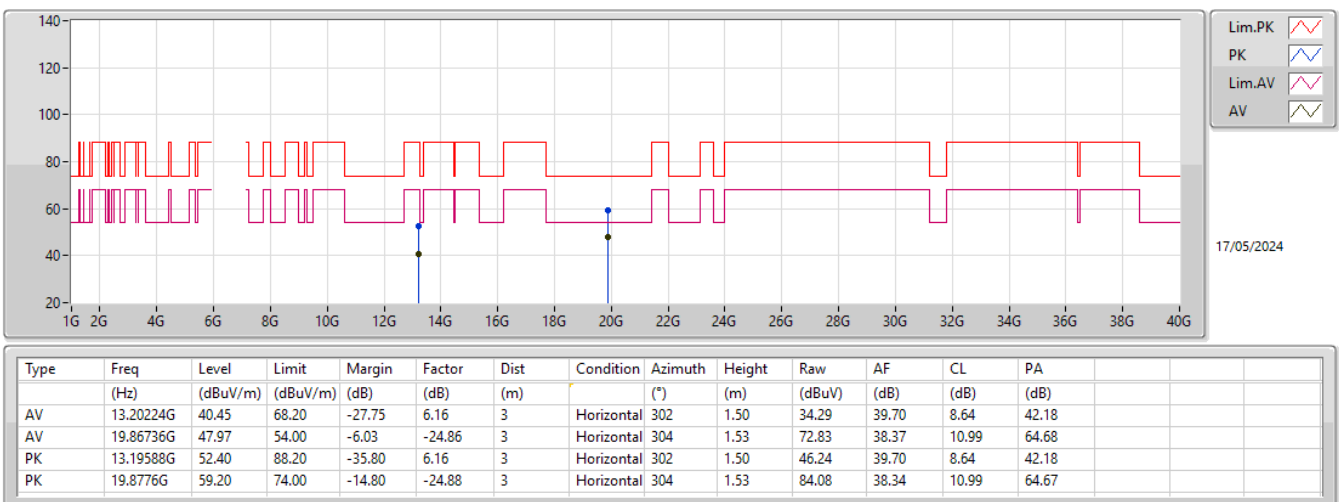

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6665MHz_TX

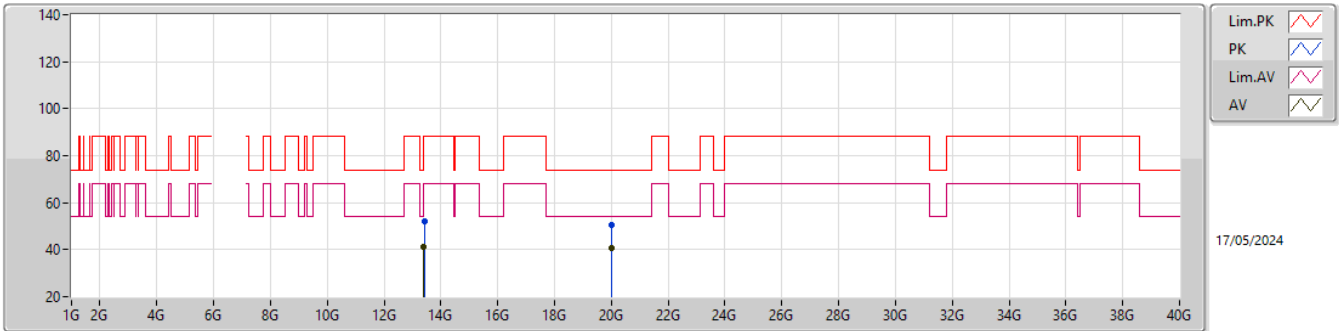

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	13.3864G	41.32	54.00	-12.68	6.62	3	Vertical	72	1.88	34.70	40.05	8.74	42.17
AV	19.98796G	40.44	54.00	-13.56	-24.83	3	Vertical	309	1.50	65.27	38.30	11.02	64.61
PK	13.41904G	51.85	88.20	-36.35	6.69	3	Vertical	72	1.88	45.16	40.10	8.76	42.17
PK	19.99788G	50.28	74.00	-23.72	-24.82	3	Vertical	309	1.50	75.10	38.30	11.02	64.60

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6665MHz_TX

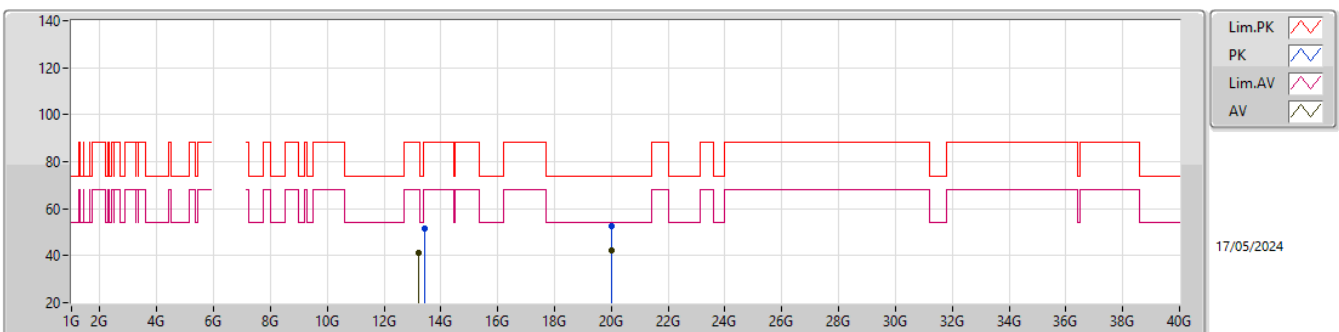

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	13.21144G	41.40	68.20	-26.80	6.18	3	Horizontal	305	1.50	35.22	39.72	8.64	42.18
AV	19.99224G	42.46	54.00	-11.54	-24.82	3	Horizontal	360	1.52	67.28	38.30	11.02	64.60
PK	13.43272G	51.61	88.20	-36.59	6.69	3	Horizontal	305	1.50	44.92	40.10	8.76	42.17
PK	19.99068G	52.45	74.00	-21.55	-24.83	3	Horizontal	360	1.52	77.28	38.30	11.02	64.61

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	Pass	6.01639G	3.34	6.0981G	-43.96	-33.92	-10.04	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	Pass	6.00281G	3.78	6.2672G	-44.80	-35.83	-8.97	2
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX	Pass	6.05941G	5.61	6.5162G	-32.33	-28.38	-3.95	3
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	Pass	6.7743G	13.99	6.8904G	-20.13	-6.03	-14.10	4
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX	Pass	6.60242G	8.99	6.9806G	-34.48	-31.01	-3.47	2

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.01569G	3.05	6.1067G	-47.54	-36.83	-10.71	1
5985MHz	Pass	6.01639G	3.34	6.0981G	-43.96	-33.92	-10.04	2
5985MHz	Pass	6.00959G	2.84	6.1151G	-48.18	-37.16	-11.02	3
5985MHz	Pass	6.01399G	3.48	6.1156G	-46.75	-36.52	-10.23	4
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-
6785MHz	Pass	6.7717G	14.42	6.8897G	-20.62	-5.64	-14.98	1
6785MHz	Pass	6.7763G	14.49	6.8968G	-20.38	-5.83	-14.55	2
6785MHz	Pass	6.7707G	14.30	6.894G	-20.11	-5.97	-14.14	3
6785MHz	Pass	6.7743G	13.99	6.8904G	-20.13	-6.03	-14.10	4
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0398G	3.31	6.2684G	-46.62	-36.48	-10.14	1
6025MHz	Pass	6.04999G	3.41	6.2678G	-45.29	-36.29	-9.00	2
6025MHz	Pass	6.05139G	3.34	6.268G	-47.33	-36.48	-10.85	3
6025MHz	Pass	6.10058G	2.96	6.2682G	-48.51	-36.80	-11.71	4
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	5.99801G	3.57	6.2692G	-46.37	-36.33	-10.04	1
6025MHz	Pass	6.00281G	3.78	6.2672G	-44.80	-35.83	-8.97	2
6025MHz	Pass	6.08179G	3.42	6.2688G	-45.98	-36.52	-9.46	3
6025MHz	Pass	6.08059G	3.57	6.2684G	-48.24	-36.22	-12.02	4
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-
6665MHz	Pass	6.6506G	9.16	7.0642G	-37.45	-27.98	-9.47	1
6665MHz	Pass	6.60242G	8.99	6.9806G	-34.48	-31.01	-3.47	2
6665MHz	Pass	6.69239G	10.11	7.0566G	-34.48	-27.47	-7.01	3
6665MHz	Pass	6.68859G	9.17	7.052G	-38.56	-27.56	-11.00	4
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-	-	-	-	-	-
6665MHz	Pass	6.63921G	9.51	7.0334G	-37.05	-25.08	-11.97	1
6665MHz	Pass	6.63261G	8.87	6.9804G	-35.82	-31.13	-4.69	2
6665MHz	Pass	6.63881G	9.66	7.061G	-38.09	-28.30	-9.79	3
6665MHz	Pass	6.6482G	8.79	7.064G	-44.16	-28.95	-15.21	4
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.25056G	5.60	6.5318G	-34.52	-29.44	-5.08	1
6105MHz	Pass	6.05501G	5.72	6.6822G	-41.76	-34.28	-7.48	2
6105MHz	Pass	6.05941G	5.61	6.5162G	-32.33	-28.38	-3.95	3
6105MHz	Pass	6.06981G	5.86	6.6002G	-40.25	-34.14	-6.11	4
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.14099G	5.23	6.5922G	-46.73	-34.20	-12.53	1
6105MHz	Pass	6.06141G	5.45	6.8686G	-46.72	-34.55	-12.17	2
6105MHz	Pass	6.06061G	5.92	6.5898G	-46.04	-33.43	-12.61	3
6105MHz	Pass	6.13979G	5.63	5.9394G	-27.66	-14.37	-13.29	4
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.05941G	5.31	6.6074G	-48.16	-34.69	-13.47	1
6105MHz	Pass	6.06901G	6.02	6.8678G	-47.32	-33.98	-13.34	2
6105MHz	Pass	6.05701G	5.71	5.9394G	-27.42	-14.29	-13.13	3
6105MHz	Pass	6.14139G	5.85	5.9394G	-27.87	-14.15	-13.72	4

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

MASK

5985MHz_TX

22/05/2024

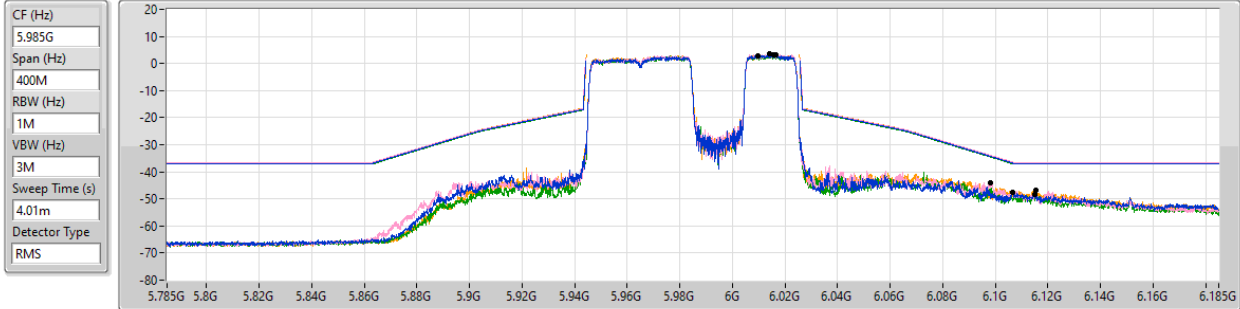


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.01569G	3.05	6.1067G	-47.54	-36.83	-10.71	1
6.01639G	3.34	6.0981G	-43.96	-33.92	-10.04	2
6.00959G	2.84	6.1151G	-48.18	-37.16	-11.02	3
6.01399G	3.48	6.1156G	-46.75	-36.52	-10.23	4

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

MASK

6025MHz_TX

22/05/2024

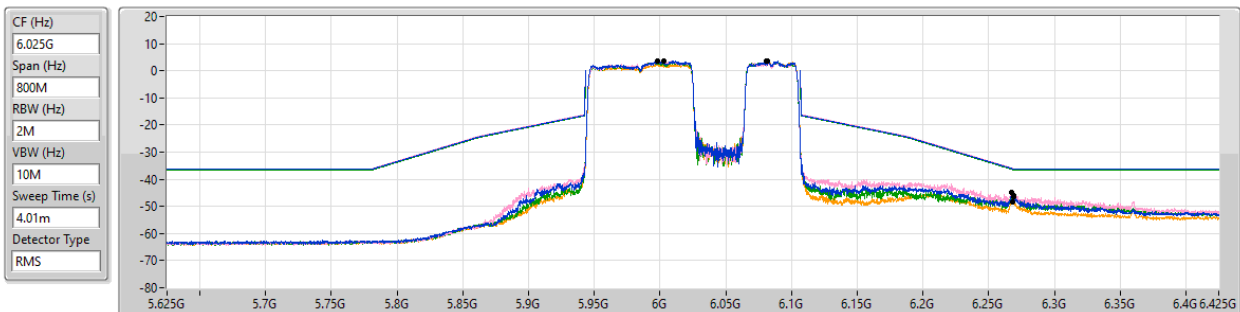


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.99801G	3.57	6.2692G	-46.37	-36.33	-10.04	1
6.00281G	3.78	6.2672G	-44.80	-35.83	-8.97	2
6.08179G	3.42	6.2688G	-45.98	-36.52	-9.46	3
6.08059G	3.57	6.2684G	-48.24	-36.22	-12.02	4

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX

MASK

6105MHz_TX

22/05/2024

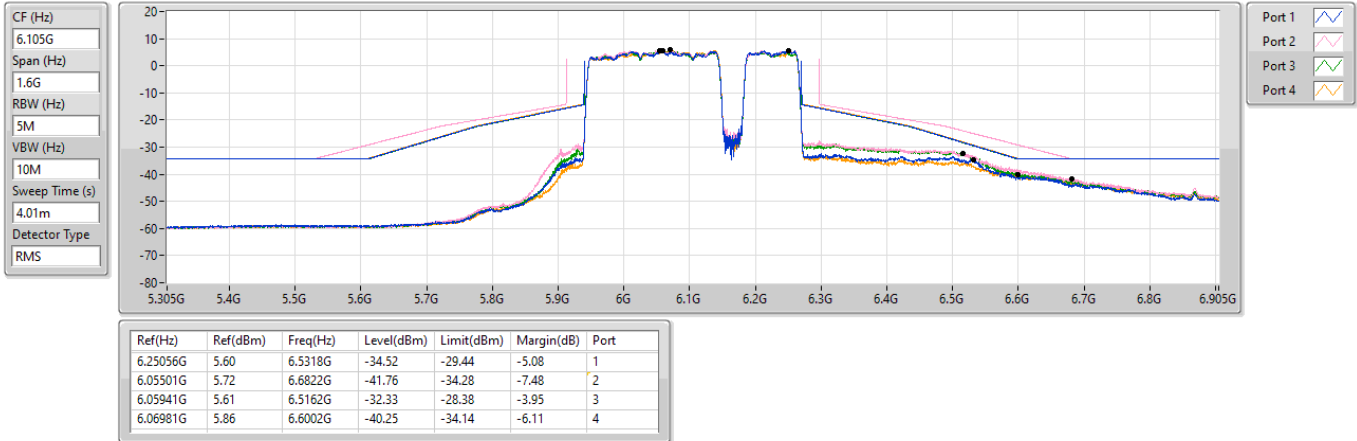


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

MASK

6785MHz_TX

22/05/2024

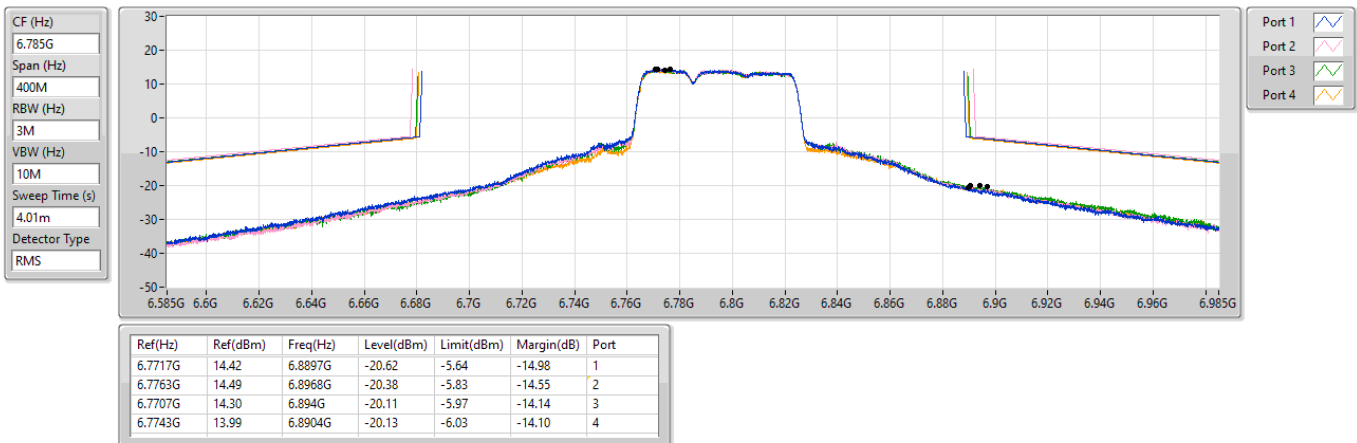


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX

MASK

6665MHz_TX

22/05/2024

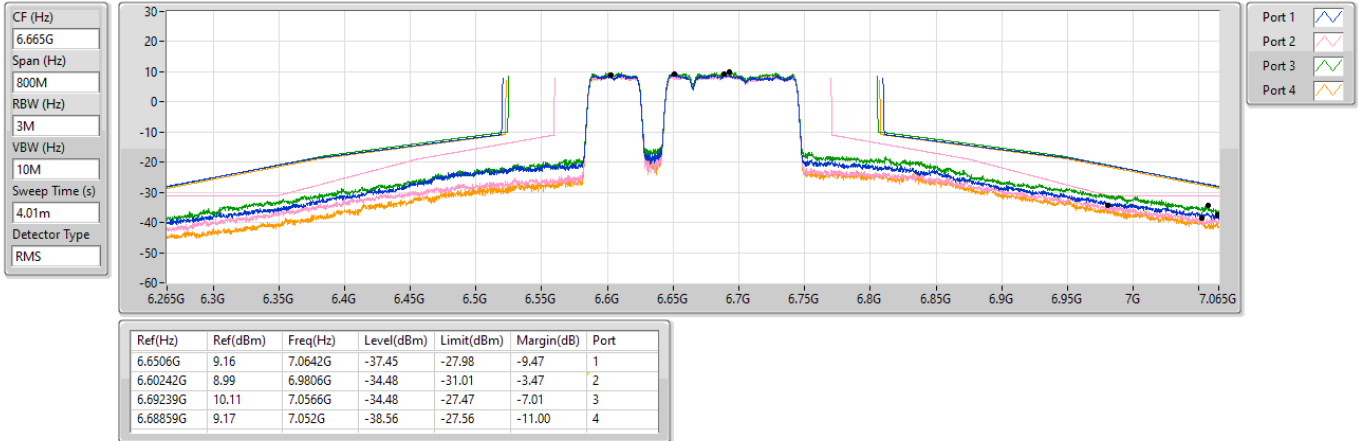

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	Pass	AV	5.9175G	63.42	68.20	-4.78	3	Vertical	24	1.50
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	Pass	AV	5.9235G	63.73	68.20	-4.47	3	Vertical	21	1.50
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX	Pass	AV	5.923G	62.67	68.20	-5.53	3	Vertical	160	1.50
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	Pass	AV	20.32876G	41.06	54.00	-12.94	3	Horizontal	20	1.73
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	Pass	AV	13.38312G	41.41	54.00	-12.59	3	Vertical	178	1.50

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	AV	5.9175G	63.42	68.20	-4.78	3	Vertical	24	1.50
5985MHz	Pass	AV	6.0125G	102.63	Inf	-Inf	3	Vertical	24	1.50
5985MHz	Pass	PK	5.909G	80.54	88.20	-7.66	3	Vertical	24	1.50
5985MHz	Pass	PK	5.9725G	113.99	Inf	-Inf	3	Vertical	24	1.50
5985MHz	Pass	AV	5.9135G	59.89	68.20	-8.31	3	Horizontal	154	1.50
5985MHz	Pass	AV	6.0085G	100.71	Inf	-Inf	3	Horizontal	154	1.50
5985MHz	Pass	PK	5.9195G	76.95	88.20	-11.25	3	Horizontal	154	1.50
5985MHz	Pass	PK	6.0135G	111.10	Inf	-Inf	3	Horizontal	154	1.50
5985MHz	Pass	AV	12.01296G	37.83	54.00	-16.17	3	Vertical	285	2.64
5985MHz	Pass	AV	17.95489G	40.92	54.00	-13.08	3	Vertical	180	2.30
5985MHz	Pass	PK	12.00552G	49.70	74.00	-24.30	3	Vertical	285	2.64
5985MHz	Pass	PK	17.95579G	52.82	74.00	-21.18	3	Vertical	180	2.30
5985MHz	Pass	AV	12.00024G	38.03	54.00	-15.97	3	Horizontal	321	1.70
5985MHz	Pass	AV	17.95562G	41.00	54.00	-13.00	3	Horizontal	220	1.91
5985MHz	Pass	PK	11.92104G	49.46	74.00	-24.54	3	Horizontal	321	1.70
5985MHz	Pass	PK	17.95542G	51.95	74.00	-22.05	3	Horizontal	220	1.91
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	AV	13.55272G	40.19	68.20	-28.01	3	Vertical	0	1.50
6785MHz	Pass	AV	20.32748G	36.92	54.00	-17.08	3	Vertical	284	1.94
6785MHz	Pass	PK	13.5668G	51.84	88.20	-36.36	3	Vertical	0	1.50
6785MHz	Pass	PK	20.32716G	48.51	74.00	-25.49	3	Vertical	284	1.94
6785MHz	Pass	AV	13.51976G	40.20	68.20	-28.00	3	Horizontal	344	1.50
6785MHz	Pass	AV	20.32876G	41.06	54.00	-12.94	3	Horizontal	20	1.73
6785MHz	Pass	PK	13.52584G	52.69	88.20	-35.51	3	Horizontal	344	1.50
6785MHz	Pass	PK	20.3422G	52.29	74.00	-21.71	3	Horizontal	20	1.73
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.918G	63.42	68.20	-4.78	3	Vertical	20	1.50
6025MHz	Pass	AV	6.048G	100.25	Inf	-Inf	3	Vertical	20	1.50
6025MHz	Pass	PK	5.9095G	77.00	88.20	-11.20	3	Vertical	20	1.50
6025MHz	Pass	PK	6.0875G	111.47	Inf	-Inf	3	Vertical	20	1.50
6025MHz	Pass	AV	5.925G	60.72	68.20	-7.48	3	Horizontal	155	1.50
6025MHz	Pass	AV	6.0035G	98.44	Inf	-Inf	3	Horizontal	155	1.50
6025MHz	Pass	PK	5.925G	71.82	88.20	-16.38	3	Horizontal	155	1.50
6025MHz	Pass	PK	5.9885G	109.27	Inf	-Inf	3	Horizontal	155	1.50
6025MHz	Pass	AV	12.14168G	39.73	54.00	-14.27	3	Vertical	330	1.50
6025MHz	Pass	AV	18.07496G	32.55	54.00	-21.45	3	Vertical	329	1.95
6025MHz	Pass	PK	12.16472G	50.16	74.00	-23.84	3	Vertical	330	1.50
6025MHz	Pass	PK	18.07424G	43.38	74.00	-30.62	3	Vertical	329	1.95
6025MHz	Pass	AV	11.9996G	40.08	54.00	-13.92	3	Horizontal	322	1.57
6025MHz	Pass	AV	18.0747G	32.50	54.00	-21.50	3	Horizontal	38	1.09
6025MHz	Pass	PK	12.09128G	49.86	74.00	-24.14	3	Horizontal	322	1.57
6025MHz	Pass	PK	18.07482G	42.68	74.00	-31.32	3	Horizontal	38	1.09
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.9235G	63.73	68.20	-4.47	3	Vertical	21	1.50
6025MHz	Pass	AV	6.0025G	101.23	Inf	-Inf	3	Vertical	21	1.50
6025MHz	Pass	PK	5.904G	76.63	88.20	-11.57	3	Vertical	21	1.50
6025MHz	Pass	PK	5.998G	112.85	Inf	-Inf	3	Vertical	21	1.50
6025MHz	Pass	AV	5.914G	63.46	68.20	-4.74	3	Horizontal	145	1.41
6025MHz	Pass	AV	6.004G	99.95	Inf	-Inf	3	Horizontal	145	1.41
6025MHz	Pass	PK	5.9015G	76.45	88.20	-11.75	3	Horizontal	145	1.41
6025MHz	Pass	PK	6.004G	110.49	Inf	-Inf	3	Horizontal	145	1.41
6025MHz	Pass	AV	12.15848G	39.86	54.00	-14.14	3	Vertical	205	1.55
6025MHz	Pass	AV	18.07583G	32.65	54.00	-21.35	3	Vertical	50	1.04
6025MHz	Pass	PK	11.978G	50.05	74.00	-23.95	3	Vertical	205	1.55
6025MHz	Pass	PK	18.07554G	42.63	74.00	-31.37	3	Vertical	50	1.04
6025MHz	Pass	AV	12.098G	40.08	54.00	-13.92	3	Horizontal	18	1.50
6025MHz	Pass	AV	18.07527G	32.54	54.00	-21.46	3	Horizontal	206	2.08
6025MHz	Pass	PK	12.10136G	49.48	74.00	-24.52	3	Horizontal	18	1.50
6025MHz	Pass	PK	18.07586G	42.83	74.00	-31.17	3	Horizontal	206	2.08
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6665MHz	Pass	AV	13.31686G	41.35	54.00	-12.65	3	Vertical	171	1.04
6665MHz	Pass	AV	19.99124G	33.25	54.00	-20.75	3	Vertical	325	2.12
6665MHz	Pass	PK	13.31962G	50.91	74.00	-23.09	3	Vertical	171	1.04
6665MHz	Pass	PK	19.99204G	43.62	74.00	-30.38	3	Vertical	325	2.12
6665MHz	Pass	AV	13.33774G	41.33	54.00	-12.67	3	Horizontal	15	2.24
6665MHz	Pass	AV	19.98906G	33.52	54.00	-20.48	3	Horizontal	61	2.88
6665MHz	Pass	PK	13.34104G	50.72	74.00	-23.28	3	Horizontal	15	2.24
6665MHz	Pass	PK	19.98906G	42.66	74.00	-31.34	3	Horizontal	61	2.88
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	AV	13.38312G	41.41	54.00	-12.59	3	Vertical	178	1.50
6665MHz	Pass	AV	19.835G	39.86	54.00	-14.14	3	Vertical	302	2.05
6665MHz	Pass	PK	13.43304G	51.64	88.20	-36.56	3	Vertical	178	1.50
6665MHz	Pass	PK	19.85484G	49.64	74.00	-24.36	3	Vertical	302	2.05
6665MHz	Pass	AV	13.474G	41.39	68.20	-26.81	3	Horizontal	15	1.25
6665MHz	Pass	AV	19.835G	39.21	54.00	-14.79	3	Horizontal	343	1.54
6665MHz	Pass	PK	13.46504G	52.09	88.20	-36.11	3	Horizontal	15	1.25
6665MHz	Pass	PK	19.85676G	49.68	74.00	-24.32	3	Horizontal	343	1.54
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.923G	62.67	68.20	-5.53	3	Vertical	160	1.50
6105MHz	Pass	AV	6.213G	97.35	Inf	-Inf	3	Vertical	160	1.50
6105MHz	Pass	PK	5.908G	78.15	88.20	-10.05	3	Vertical	160	1.50
6105MHz	Pass	PK	6.188G	107.91	Inf	-Inf	3	Vertical	160	1.50
6105MHz	Pass	AV	5.919G	61.33	68.20	-6.87	3	Horizontal	145	1.39
6105MHz	Pass	AV	6.004G	95.58	Inf	-Inf	3	Horizontal	145	1.39
6105MHz	Pass	PK	5.917G	73.75	88.20	-14.45	3	Horizontal	145	1.39
6105MHz	Pass	PK	6.231G	105.98	Inf	-Inf	3	Horizontal	145	1.39
6105MHz	Pass	AV	12.23016G	39.62	54.00	-14.38	3	Vertical	226	1.54
6105MHz	Pass	AV	18.3156G	32.97	54.00	-21.03	3	Vertical	25	2.02
6105MHz	Pass	PK	12.02184G	50.38	74.00	-23.62	3	Vertical	226	1.54
6105MHz	Pass	PK	18.31515G	42.84	74.00	-31.16	3	Vertical	25	2.02
6105MHz	Pass	AV	12.06696G	39.70	54.00	-14.30	3	Horizontal	27	1.38
6105MHz	Pass	AV	18.3151G	32.91	54.00	-21.09	3	Horizontal	100	2.00
6105MHz	Pass	PK	12.35688G	50.06	74.00	-23.94	3	Horizontal	27	1.38
6105MHz	Pass	PK	18.31418G	43.34	74.00	-30.66	3	Horizontal	100	2.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.923G	61.69	68.20	-6.51	3	Vertical	20	1.50
6105MHz	Pass	AV	6.008G	97.98	Inf	-Inf	3	Vertical	20	1.50
6105MHz	Pass	PK	5.924G	77.18	88.20	-11.02	3	Vertical	20	1.50
6105MHz	Pass	PK	6.048G	108.67	Inf	-Inf	3	Vertical	20	1.50
6105MHz	Pass	AV	5.92G	61.30	68.20	-6.90	3	Horizontal	146	1.39
6105MHz	Pass	AV	6.004G	96.62	Inf	-Inf	3	Horizontal	146	1.39
6105MHz	Pass	PK	5.91G	74.61	88.20	-13.59	3	Horizontal	146	1.39
6105MHz	Pass	PK	5.999G	107.48	Inf	-Inf	3	Horizontal	146	1.39
6105MHz	Pass	AV	12.11112G	39.86	54.00	-14.14	3	Vertical	360	1.50
6105MHz	Pass	AV	18.31504G	33.18	54.00	-20.82	3	Vertical	122	1.31
6105MHz	Pass	PK	12.32328G	49.69	74.00	-24.31	3	Vertical	360	1.50
6105MHz	Pass	PK	18.31454G	42.64	74.00	-31.36	3	Vertical	122	1.31
6105MHz	Pass	AV	12.258G	39.67	54.00	-14.33	3	Horizontal	82	1.96
6105MHz	Pass	AV	18.31538G	33.35	54.00	-20.65	3	Horizontal	126	3.00
6105MHz	Pass	PK	12.35784G	49.98	74.00	-24.02	3	Horizontal	82	1.96
6105MHz	Pass	PK	18.3156G	42.94	74.00	-31.06	3	Horizontal	126	3.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.923G	60.73	68.20	-7.47	3	Vertical	157	1.50
6105MHz	Pass	AV	6.138G	98.45	Inf	-Inf	3	Vertical	157	1.50
6105MHz	Pass	PK	5.891G	72.94	88.20	-15.26	3	Vertical	157	1.50
6105MHz	Pass	PK	6.142G	109.39	Inf	-Inf	3	Vertical	157	1.50
6105MHz	Pass	AV	5.92G	58.62	68.20	-9.58	3	Horizontal	153	1.50
6105MHz	Pass	AV	6.039G	96.23	Inf	-Inf	3	Horizontal	153	1.50
6105MHz	Pass	PK	5.888G	72.74	88.20	-15.46	3	Horizontal	153	1.50
6105MHz	Pass	PK	6.074G	107.07	Inf	-Inf	3	Horizontal	153	1.50
6105MHz	Pass	AV	12.26472G	39.97	54.00	-14.03	3	Vertical	60	1.50
6105MHz	Pass	AV	18.31518G	33.34	54.00	-20.66	3	Vertical	161	3.00



Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6105MHz	Pass	PK	12.2532G	49.91	74.00	-24.09	3	Vertical	60	1.50
6105MHz	Pass	PK	18.31402G	43.24	74.00	-30.76	3	Vertical	161	3.00
6105MHz	Pass	AV	12.0948G	40.30	54.00	-13.70	3	Horizontal	268	1.50
6105MHz	Pass	AV	18.3142G	32.93	54.00	-21.07	3	Horizontal	283	1.66
6105MHz	Pass	PK	12.10152G	50.29	74.00	-23.71	3	Horizontal	268	1.50
6105MHz	Pass	PK	18.31534G	43.53	74.00	-30.47	3	Horizontal	283	1.66


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5985MHz_TX

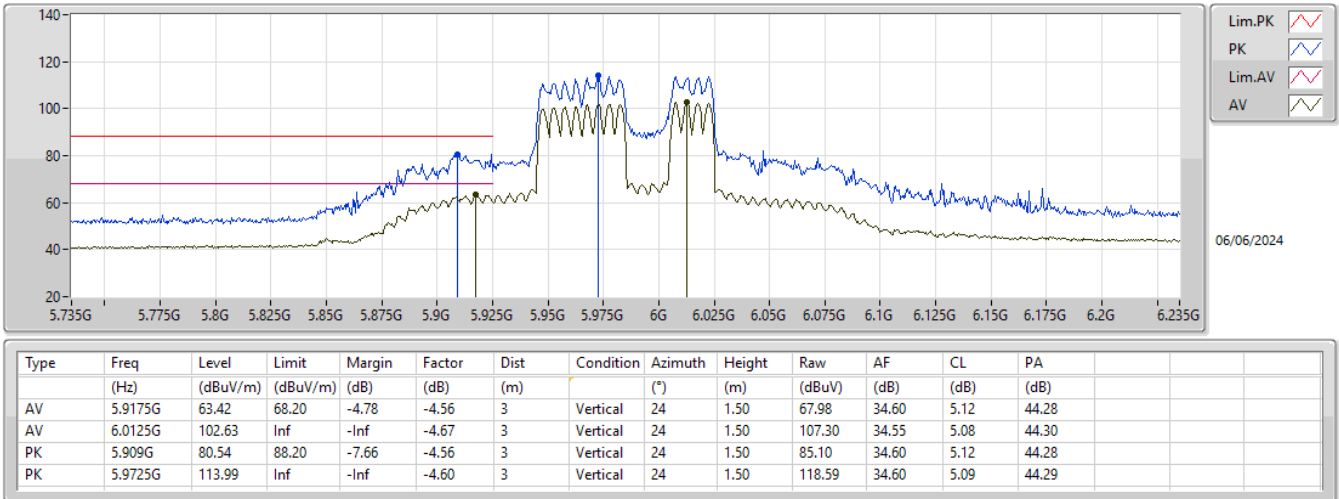


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5985MHz_TX

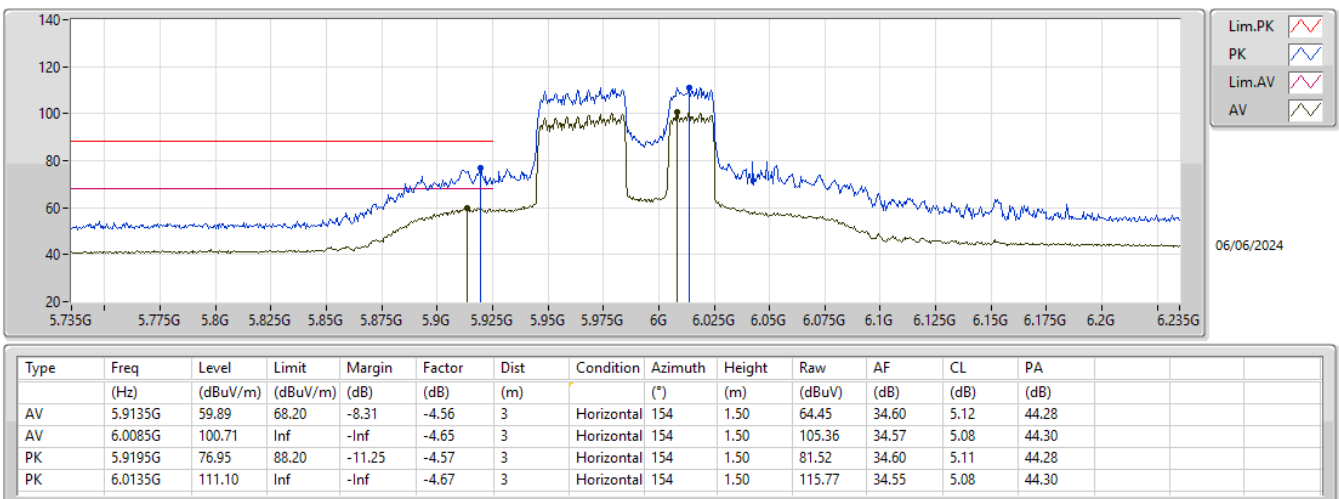


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5985MHz_TX

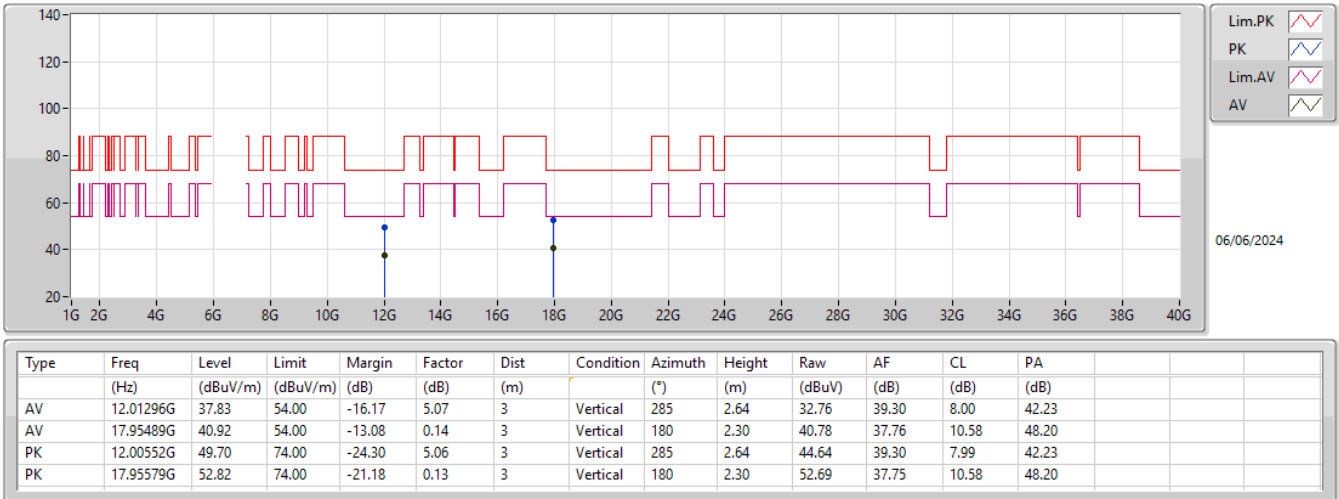


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5985MHz_TX

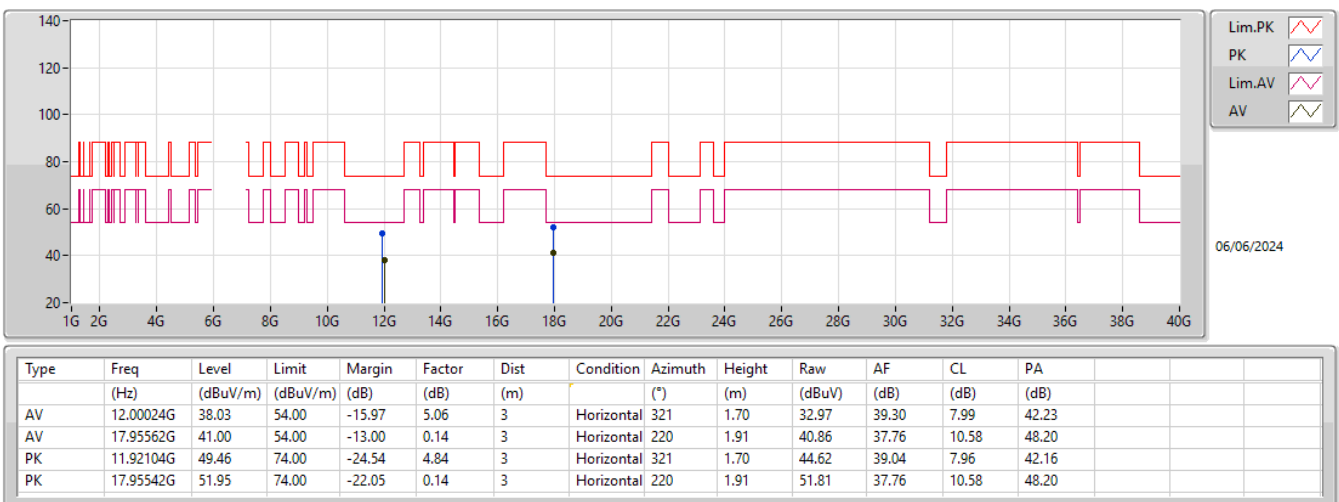

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


6025MHz_TX

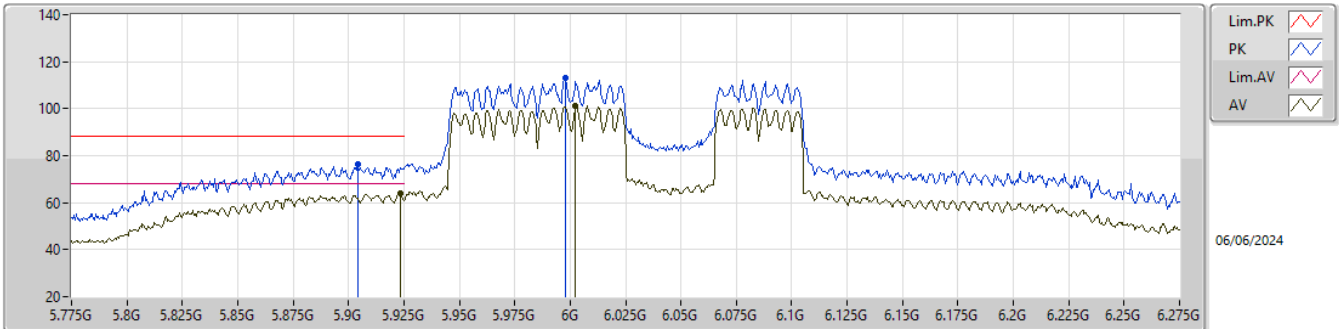

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.9235G	63.73	68.20	-4.47	-4.57	3	Vertical	21	1.50	68.30	34.60	5.11	44.28
AV	6.0025G	101.23	Inf	-Inf	-4.64	3	Vertical	21	1.50	105.87	34.59	5.07	44.30
PK	5.904G	76.63	88.20	-11.57	-4.56	3	Vertical	21	1.50	81.19	34.60	5.12	44.28
PK	5.998G	112.85	Inf	-Inf	-4.63	3	Vertical	21	1.50	117.48	34.60	5.07	44.30

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


6025MHz_TX

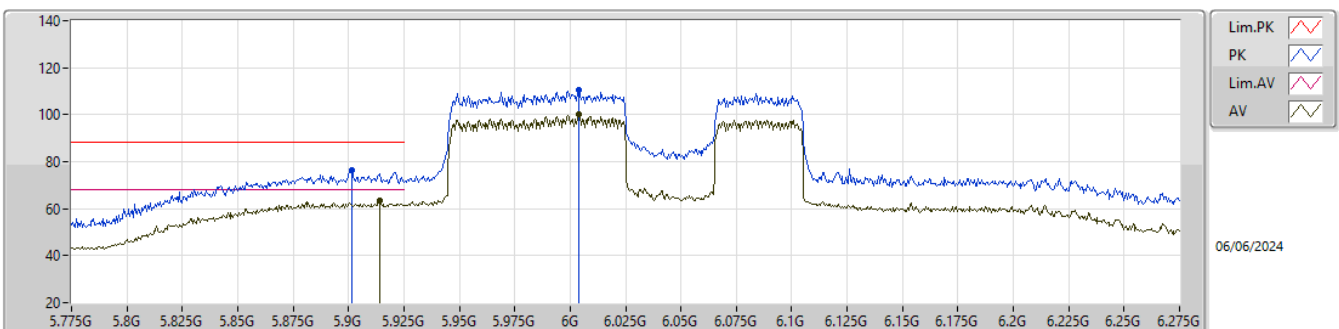

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.914G	63.46	68.20	-4.74	-4.56	3	Horizontal	145	1.41	68.02	34.60	5.12	44.28
AV	6.004G	99.95	Inf	-Inf	-4.65	3	Horizontal	145	1.41	104.60	34.58	5.07	44.30
PK	5.9015G	76.45	88.20	-11.75	-4.56	3	Horizontal	145	1.41	81.01	34.60	5.12	44.28
PK	6.004G	110.49	Inf	-Inf	-4.65	3	Horizontal	145	1.41	115.14	34.58	5.07	44.30


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

6025MHz_TX

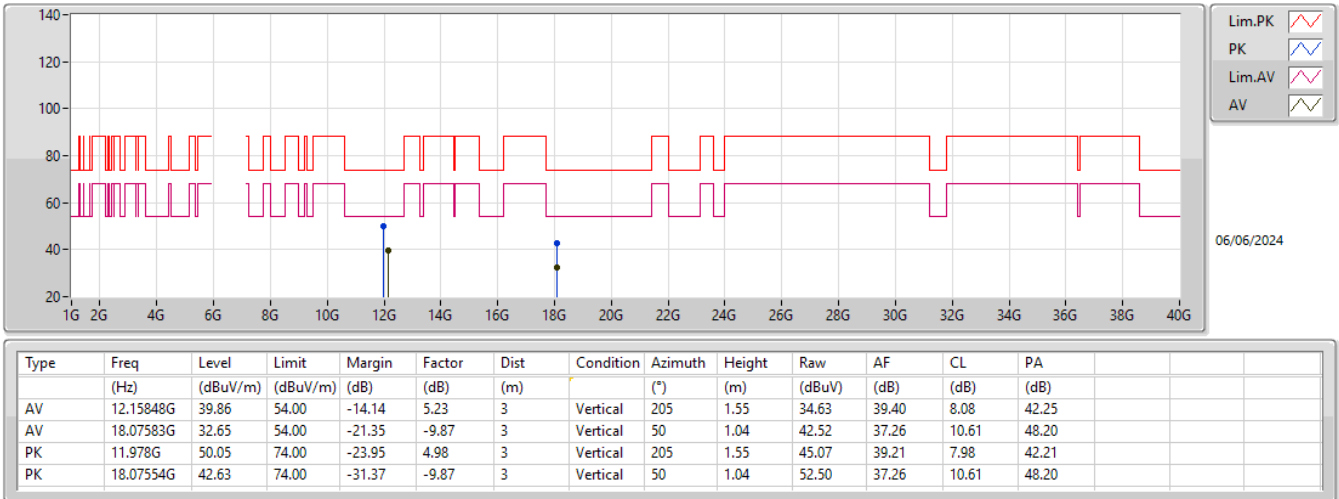


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

6025MHz_TX

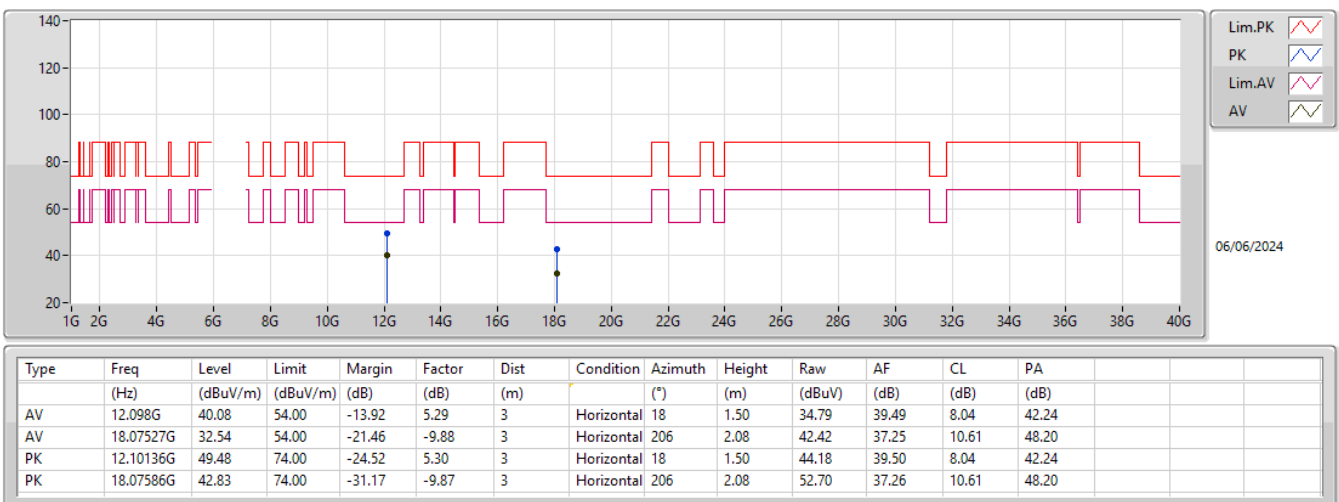

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX


6105MHz_TX

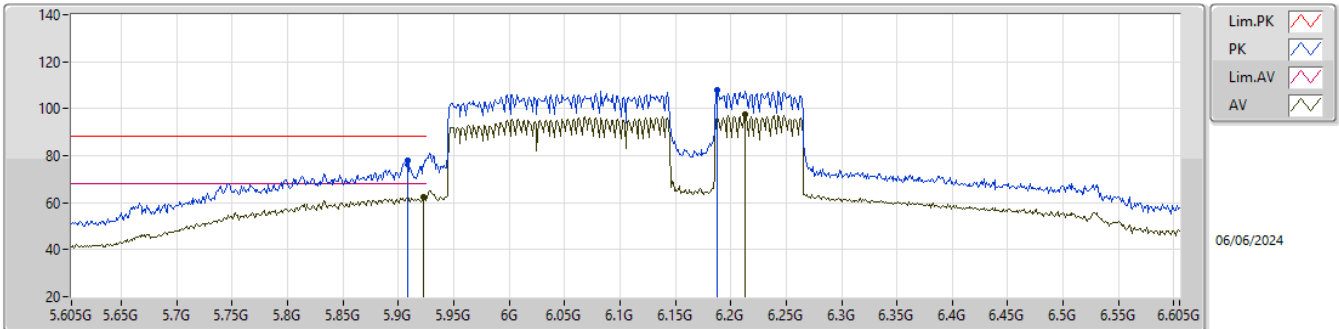

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.923G	62.67	68.20	-5.53	-4.57	3	Vertical	160	1.50	67.24	34.60	5.11	44.28
AV	6.213G	97.35	Inf	-Inf	-4.50	3	Vertical	160	1.50	101.85	34.58	5.25	44.33
PK	5.908G	78.15	88.20	-10.05	-4.56	3	Vertical	160	1.50	82.71	34.60	5.12	44.28
PK	6.188G	107.91	Inf	-Inf	-4.60	3	Vertical	160	1.50	112.51	34.50	5.22	44.32

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX


6105MHz_TX

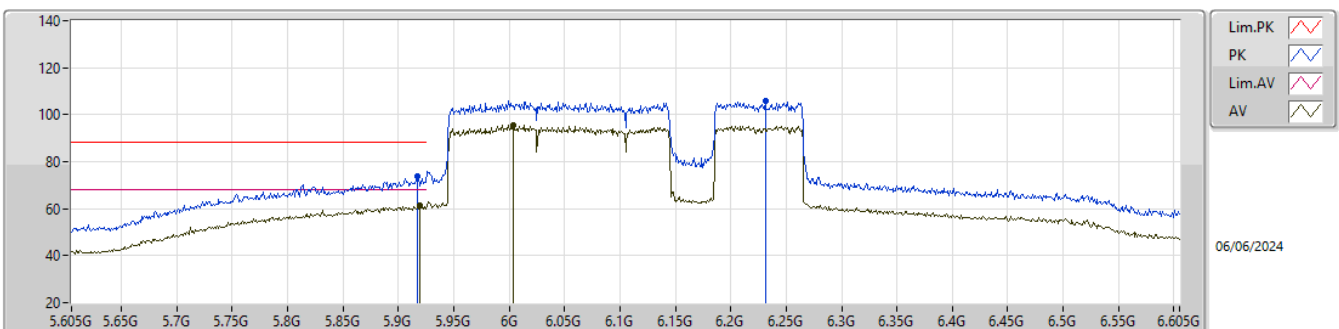

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.919G	61.33	68.20	-6.87	-4.57	3	Horizontal	145	1.39	65.90	34.60	5.11	44.28
AV	6.004G	95.58	Inf	-Inf	-4.65	3	Horizontal	145	1.39	100.23	34.58	5.07	44.30
PK	5.917G	73.75	88.20	-14.45	-4.56	3	Horizontal	145	1.39	78.31	34.60	5.12	44.28
PK	6.231G	105.98	Inf	-Inf	-4.37	3	Horizontal	145	1.39	110.35	34.69	5.27	44.33

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX


6105MHz_TX

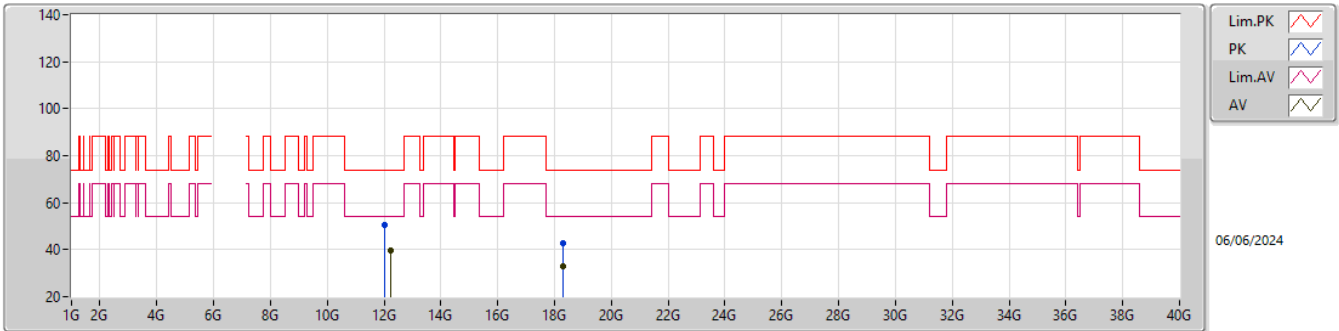

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	12.23016G	39.62	54.00	-14.38	5.19	3	Vertical	226	1.54	34.43	39.34	8.11	42.26
AV	18.3156G	32.97	54.00	-21.03	-9.69	3	Vertical	25	2.02	42.66	37.39	10.66	48.20
PK	12.02184G	50.38	74.00	-23.62	5.07	3	Vertical	226	1.54	45.31	39.30	8.00	42.23
PK	18.31515G	42.84	74.00	-31.16	-9.69	3	Vertical	25	2.02	52.53	37.39	10.66	48.20

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 6_4TX


6105MHz_TX

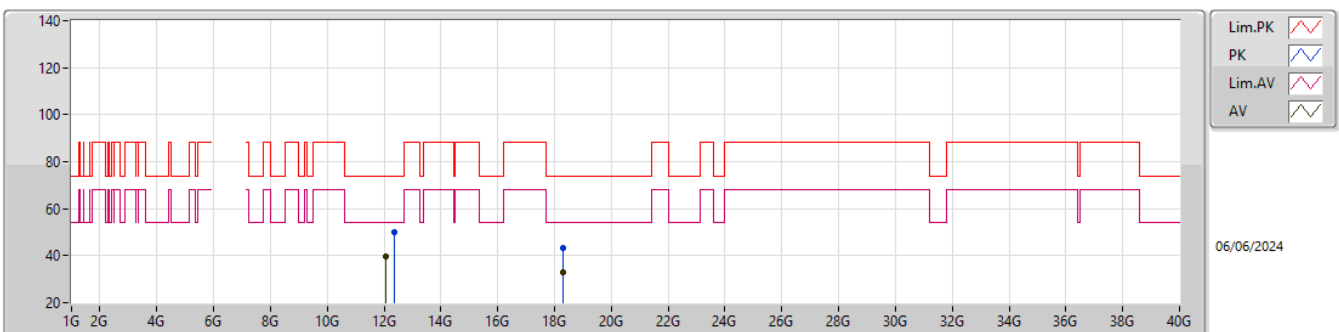

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	12.06696G	39.70	54.00	-14.30	5.16	3	Horizontal	27	1.38	34.54	39.37	8.03	42.24
AV	18.3151G	32.91	54.00	-21.09	-9.69	3	Horizontal	100	2.00	42.60	37.39	10.66	48.20
PK	12.35688G	50.06	74.00	-23.94	5.07	3	Horizontal	27	1.38	44.99	39.17	8.18	42.28
PK	18.31418G	43.34	74.00	-30.66	-9.69	3	Horizontal	100	2.00	53.03	37.39	10.66	48.20


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

6785MHz_TX

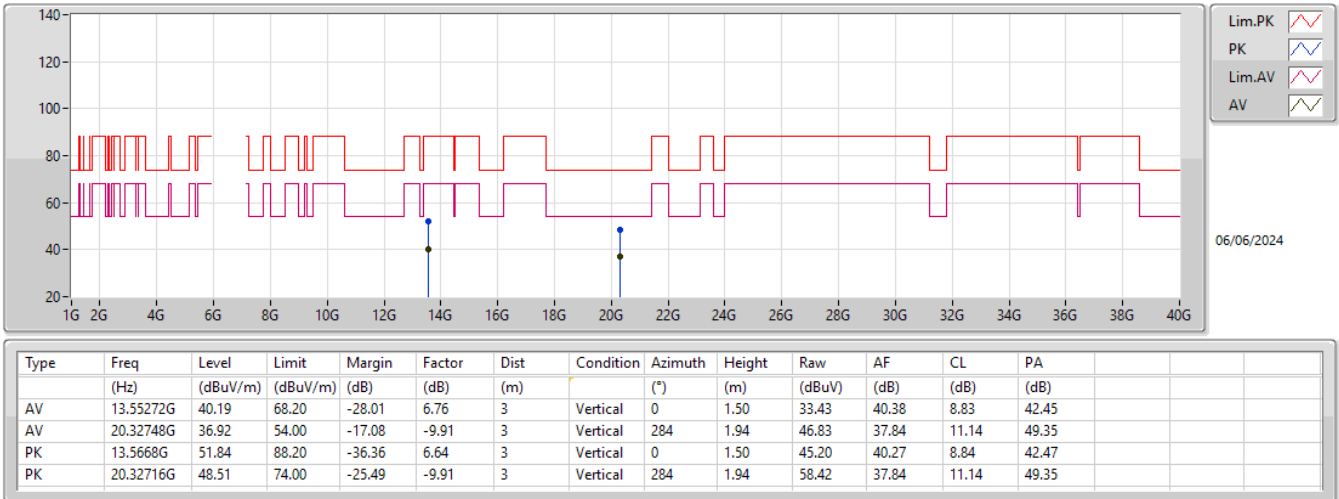


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

6785MHz_TX

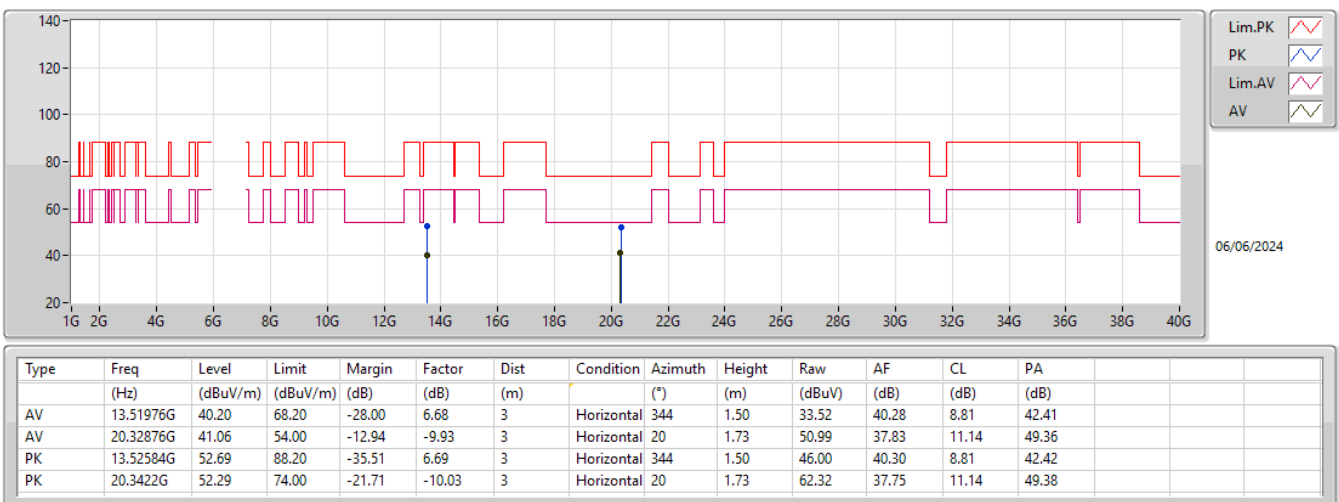

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


6665MHz_TX

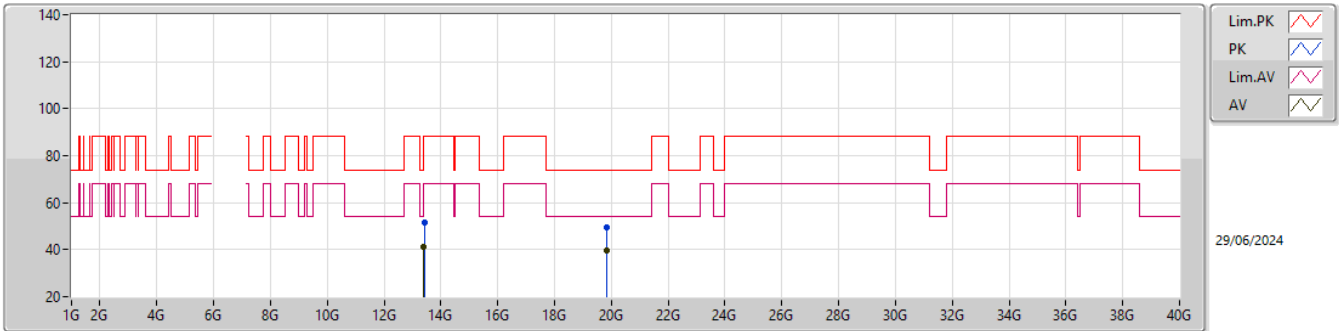

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	13.38312G	41.41	54.00	-12.59	6.40	3	Vertical	178	1.50	35.01	40.03	8.74	42.37
AV	19.835G	39.86	54.00	-14.14	-9.49	3	Vertical	302	2.05	49.35	37.87	10.98	48.80
PK	13.43304G	51.64	88.20	-36.56	6.49	3	Vertical	178	1.50	45.15	40.10	8.76	42.37
PK	19.85484G	49.64	74.00	-24.36	-9.47	3	Vertical	302	2.05	59.11	37.87	10.99	48.79

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

6665MHz_TX

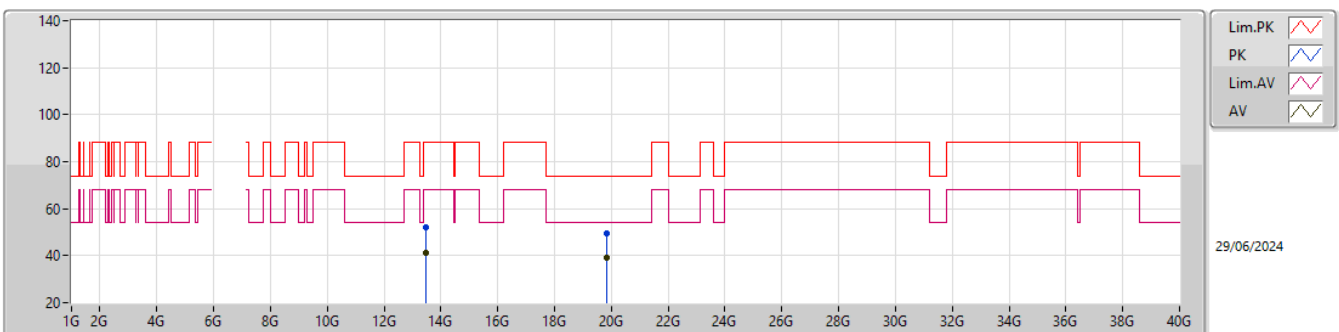

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	13.474G	41.39	68.20	-26.81	6.56	3	Horizontal	15	1.25	34.83	40.15	8.79	42.38
AV	19.835G	39.21	54.00	-14.79	-9.49	3	Horizontal	343	1.54	48.70	37.87	10.98	48.80
PK	13.46504G	52.09	88.20	-36.11	6.53	3	Horizontal	15	1.25	45.56	40.13	8.78	42.38
PK	19.85676G	49.68	74.00	-24.32	-9.48	3	Horizontal	343	1.54	59.16	37.86	10.99	48.79

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	6.196275G	4.54	6.162575G	-35.86	-35.46	-0.40	1
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	6.391153G	12.76	6.4462G	-12.30	-7.55	-4.75	1
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	6.26119G	11.38	6.3227G	-12.63	-8.63	-4.00	2
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	6.37539G	6.81	6.5902G	-33.90	-33.19	-0.71	2
802.11be EHT320-BF_Nss1,(MCS0)_4TX	Pass	6.37017G	9.22	6.567G	-17.43	-10.80	-6.63	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	6.538174G	12.14	6.58205G	-31.36	-27.86	-3.50	3
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	6.669604G	13.19	6.6314G	-10.17	-6.96	-3.21	2
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	6.6084G	11.05	6.7241G	-11.86	-8.99	-2.87	1
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	6.60282G	10.26	6.2676G	-34.84	-28.82	-6.02	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.951976G	2.92	5.987525G	-39.26	-37.08	-2.18	1
5955MHz	Pass	5.959649G	3.12	5.98715G	-38.14	-36.21	-1.93	2
5955MHz	Pass	5.956925G	4.10	5.989475G	-36.47	-35.38	-1.09	3
5955MHz	Pass	5.959999G	4.08	5.992125G	-36.36	-35.92	-0.44	4
6195MHz	Pass	6.196275G	4.54	6.162575G	-35.86	-35.46	-0.40	1
6195MHz	Pass	6.188552G	4.43	6.16325G	-39.29	-35.36	-3.93	2
6195MHz	Pass	6.186727G	5.22	6.163175G	-40.50	-34.78	-5.72	3
6195MHz	Pass	6.188352G	4.67	6.22775G	-36.52	-35.14	-1.38	4
6415MHz	Pass	6.412001G	10.55	6.439175G	-19.19	-9.92	-9.27	1
6415MHz	Pass	6.4136G	10.08	6.390625G	-19.99	-9.94	-10.05	2
6415MHz	Pass	6.411276G	10.56	6.46425G	-33.12	-29.31	-3.81	3
6415MHz	Pass	6.418349G	10.56	6.464725G	-29.59	-25.21	-4.38	4
6535MHz	Pass	6.537449G	12.55	6.5577G	-15.10	-7.46	-7.64	1
6535MHz	Pass	6.532651G	12.10	6.555725G	-15.28	-8.38	-6.90	2
6535MHz	Pass	6.538174G	12.14	6.58205G	-31.36	-27.86	-3.50	3
6535MHz	Pass	6.536425G	12.77	6.55575G	-14.78	-7.36	-7.42	4
6695MHz	Pass	6.703673G	12.02	6.667875G	-16.64	-8.06	-8.58	1
6695MHz	Pass	6.688527G	11.73	6.669075G	-15.76	-8.28	-7.48	2
6695MHz	Pass	6.703723G	12.05	6.720575G	-14.65	-8.02	-6.63	3
6695MHz	Pass	6.702273G	11.94	6.664225G	-17.98	-8.58	-9.40	4
6855MHz	Pass	6.849026G	8.87	6.830475G	-19.61	-11.44	-8.17	1
6855MHz	Pass	6.852326G	7.54	6.903375G	-35.72	-32.05	-3.67	2
6855MHz	Pass	6.863523G	8.48	6.83145G	-21.49	-11.69	-9.80	3
6855MHz	Pass	6.857549G	8.61	6.832475G	-19.79	-11.55	-8.24	4
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.978397G	-0.65	6.0263G	-53.12	-40.65	-12.47	1
5965MHz	Pass	5.969599G	0.16	6.021G	-45.99	-37.78	-8.21	2
5965MHz	Pass	5.9634G	0.49	6.02555G	-49.59	-39.51	-10.08	3
5965MHz	Pass	5.959601G	0.11	6.02445G	-45.55	-39.72	-5.83	4
6205MHz	Pass	6.220546G	13.38	6.2587G	-14.86	-6.70	-8.16	1
6205MHz	Pass	6.222146G	13.31	6.2566G	-13.18	-6.79	-6.39	2
6205MHz	Pass	6.198802G	13.07	6.15325G	-13.05	-7.10	-5.95	3
6205MHz	Pass	6.191253G	13.17	6.2565G	-13.81	-6.84	-6.97	4
6405MHz	Pass	6.391153G	12.76	6.4462G	-12.30	-7.55	-4.75	1
6405MHz	Pass	6.395452G	13.03	6.3603G	-15.29	-7.00	-8.29	2
6405MHz	Pass	6.422646G	12.92	6.4451G	-13.52	-7.16	-6.36	3
6405MHz	Pass	6.421796G	12.90	6.4451G	-14.42	-7.20	-7.22	4
6565MHz	Pass	6.580596G	13.32	6.62765G	-16.30	-7.06	-9.24	1
6565MHz	Pass	6.553153G	13.00	6.61735G	-12.82	-7.13	-5.69	2
6565MHz	Pass	6.582196G	13.89	6.617G	-13.24	-6.13	-7.11	3
6565MHz	Pass	6.547454G	13.43	6.5128G	-12.62	-6.60	-6.02	4
6685MHz	Pass	6.6832G	12.95	6.63205G	-12.72	-7.10	-5.62	1
6685MHz	Pass	6.669604G	13.19	6.6314G	-10.17	-6.96	-3.21	2
6685MHz	Pass	6.678652G	13.04	6.73795G	-13.10	-7.03	-6.07	3
6685MHz	Pass	6.677502G	13.23	6.62925G	-12.52	-6.85	-5.67	4
6845MHz	Pass	6.837352G	12.76	6.7942G	-14.24	-7.24	-7.00	1
6845MHz	Pass	6.834503G	11.68	6.79625G	-17.37	-8.35	-9.02	2
6845MHz	Pass	6.836402G	12.39	6.7955G	-16.08	-7.69	-8.39	3
6845MHz	Pass	6.839101G	12.90	6.7944G	-14.64	-7.13	-7.51	4
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9985G	-0.48	6.1514G	-52.23	-40.48	-11.75	1
5985MHz	Pass	6.001G	-0.97	6.1066G	-52.83	-40.97	-11.86	2
5985MHz	Pass	6.02209G	-0.32	6.1067G	-51.76	-40.32	-11.44	3
5985MHz	Pass	5.96071G	-1.24	6.1514G	-53.45	-41.24	-12.21	4


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6225MHz	Pass	6.25579G	10.88	6.3332G	-14.97	-9.16	-5.81	1
6225MHz	Pass	6.26119G	11.38	6.3227G	-12.63	-8.63	-4.00	2
6225MHz	Pass	6.26199G	11.10	6.3158G	-14.06	-8.92	-5.14	3
6225MHz	Pass	6.26199G	11.56	6.3318G	-14.05	-8.46	-5.59	4
6385MHz	Pass	6.3918G	11.85	6.5815G	-29.85	-25.70	-4.15	1
6385MHz	Pass	6.3725G	11.89	6.4774G	-16.06	-8.17	-7.89	2
6385MHz	Pass	6.4G	12.35	6.474G	-15.54	-7.75	-7.79	3
6385MHz	Pass	6.41479G	11.80	6.4725G	-15.33	-8.27	-7.06	4
6625MHz	Pass	6.6084G	11.05	6.7241G	-11.86	-8.99	-2.87	1
6625MHz	Pass	6.66219G	11.30	6.7402G	-14.44	-8.82	-5.62	2
6625MHz	Pass	6.59131G	11.31	6.7318G	-14.67	-8.71	-5.96	3
6625MHz	Pass	6.66229G	11.75	6.7346G	-14.11	-8.33	-5.78	4
6705MHz	Pass	6.6908G	14.03	6.6019G	-13.19	-6.08	-7.11	1
6705MHz	Pass	6.7182G	13.72	6.8143G	-15.55	-6.42	-9.13	2
6705MHz	Pass	6.7172G	13.64	6.6005G	-13.26	-6.39	-6.87	3
6705MHz	Pass	6.67461G	14.08	6.6024G	-12.35	-5.93	-6.42	4
6785MHz	Pass	6.7815G	14.08	6.888G	-13.16	-5.98	-7.18	1
6785MHz	Pass	6.75431G	13.78	6.6786G	-12.94	-6.26	-6.68	2
6785MHz	Pass	6.7957G	13.65	6.8886G	-15.30	-6.37	-8.93	3
6785MHz	Pass	6.81449G	13.98	6.8863G	-11.23	-6.12	-5.11	4
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.00061G	0.53	6.2688G	-48.43	-39.41	-9.02	1
6025MHz	Pass	6.04899G	-0.18	6.2676G	-48.09	-40.18	-7.91	2
6025MHz	Pass	6.08598G	1.84	6.2682G	-47.46	-38.16	-9.30	3
6025MHz	Pass	6.05019G	0.65	6.2688G	-47.65	-39.00	-8.65	4
6185MHz	Pass	6.21779G	6.04	6.4318G	-35.23	-32.75	-2.48	1
6185MHz	Pass	6.24618G	6.76	6.4272G	-36.43	-32.85	-3.58	2
6185MHz	Pass	6.16101G	6.48	6.4274G	-37.11	-33.45	-3.66	3
6185MHz	Pass	6.16161G	6.02	6.4796G	-39.45	-33.98	-5.47	4
6345MHz	Pass	6.26942G	7.20	5.9878G	-40.16	-31.97	-8.19	1
6345MHz	Pass	6.37539G	6.81	6.5902G	-33.90	-33.19	-0.71	2
6345MHz	Pass	6.32061G	6.94	6.6038G	-34.75	-33.06	-1.69	3
6345MHz	Pass	6.28142G	6.91	6.0578G	-37.36	-33.09	-4.27	4
6665MHz	Pass	6.60282G	10.26	6.2676G	-34.84	-28.82	-6.02	1
6665MHz	Pass	6.64121G	9.80	6.8154G	-17.88	-10.35	-7.53	2
6665MHz	Pass	6.69259G	10.23	6.8228G	-17.48	-10.30	-7.18	3
6665MHz	Pass	6.69239G	9.97	6.268G	-35.44	-28.68	-6.76	4
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.24656G	1.39	6.5994G	-45.35	-38.61	-6.74	1
6105MHz	Pass	6.26056G	1.42	6.5938G	-45.90	-38.58	-7.32	2
6105MHz	Pass	6.06261G	1.92	6.5946G	-45.13	-38.07	-7.06	3
6105MHz	Pass	6.15339G	1.45	6.5954G	-45.28	-38.55	-6.73	4
6265MHz	Pass	6.23021G	9.09	6.543G	-17.89	-10.93	-6.96	1
6265MHz	Pass	6.37017G	9.22	6.567G	-17.43	-10.80	-6.63	2
6265MHz	Pass	6.30219G	9.49	6.5746G	-19.17	-10.57	-8.60	3
6265MHz	Pass	6.29939G	9.14	6.5914G	-20.09	-10.96	-9.13	4

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

MASK

6195MHz_TX

03/06/2024

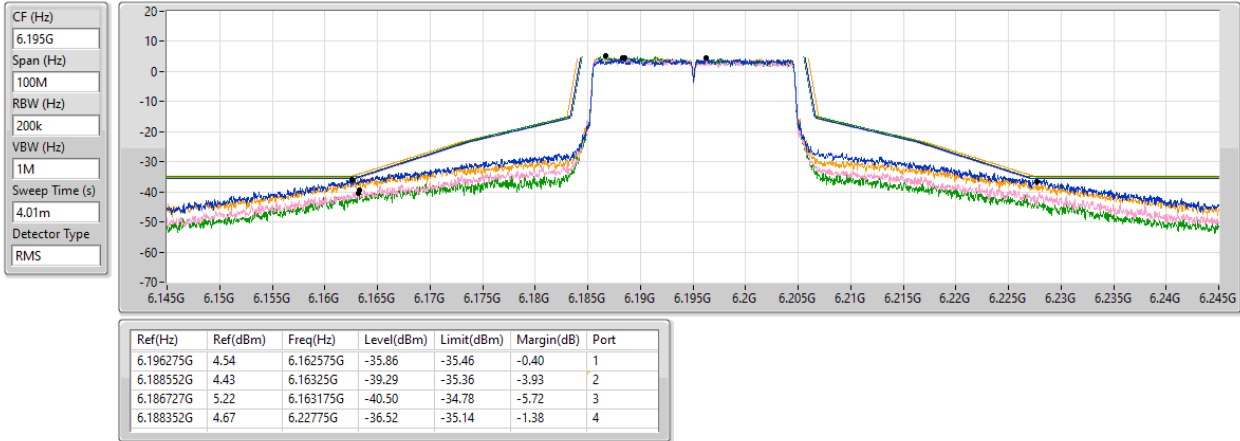

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

MASK

6405MHz_TX

03/06/2024

