

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 22
47 CFR FCC Part 24
47 CFR FCC Part 27
47 CFR FCC Part 90
47 CFR FCC Part 2

Report No.: RFBEDV-WTW-P23030565-3

FCC ID: G95RG525FNA

Product: Module

Brand: Vantiva

Model No.: RG525FNA

Received Date: 2023/3/16

Test Date: 2023/4/17 ~ 2023/6/5

Issued Date: 2023/7/27

Applicant: Vantiva USA LLC

Address: 4855 Peachtree Industrial Blvd. Suite 200 Norcross, Georgia 30092

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:

Approved by: _____

Jeremy Lin

Date: _____

2023/7/27

Jeremy Lin / Project Engineer

This test report consists of 291 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Polly Chien / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

| | |
|--|-----------|
| Release Control Record | 4 |
| 1 Certificate | 5 |
| 2 Summary of Test Results | 6 |
| 2.1 Measurement Uncertainty | 7 |
| 2.2 Supplementary Information | 7 |
| 3 General Information | 8 |
| 3.1 General Description of EUT | 8 |
| 3.2 Antenna Description of EUT | 12 |
| 3.3 Test Mode Applicability and Tested Channel Detail | 13 |
| 3.4 Test Program Used and Operation Descriptions | 21 |
| 3.5 Connection Diagram of EUT and Peripheral Devices | 21 |
| 3.6 Configuration of Peripheral Devices and Cable Connections | 22 |
| 4 Test Instruments | 23 |
| 4.1 Effective Radiated Power and Equivalent Isotropically Radiated Power | 23 |
| 4.2 Radiated Spurious Emissions below 1GHz | 24 |
| 4.3 Radiated Spurious Emissions above 1GHz | 25 |
| 5 Limits of Test Items | 26 |
| 5.1 Effective Radiated Power and Equivalent Isotropically Radiated Power | 26 |
| 5.2 Radiated Spurious Emissions below 1GHz | 27 |
| 5.3 Radiated Spurious Emissions above 1GHz | 28 |
| 6 Test Arrangements | 29 |
| 6.1 Effective Radiated Power and Equivalent Isotropically Radiated Power | 29 |
| 6.1.1 Test Setup | 29 |
| 6.1.2 Test Procedure | 29 |
| 6.2 Radiated Spurious Emissions below 1GHz | 30 |
| 6.2.1 Test Setup | 30 |
| 6.2.2 Test Procedure | 30 |
| 6.3 Radiated Spurious Emissions above 1GHz | 31 |
| 6.3.1 Test Setup | 31 |
| 6.3.2 Test Procedure | 31 |
| 7 Test Results of Test Item | 32 |
| 7.1 Effective Radiated Power and Equivalent Isotropically Radiated Power | 32 |
| 7.1.1 LTE Band 2 | 32 |
| 7.1.2 LTE Band 4 | 44 |
| 7.1.3 LTE Band 5 | 56 |
| 7.1.4 LTE Band 7 | 64 |
| 7.1.5 LTE Band 12 | 72 |
| 7.1.6 LTE Band 13 | 80 |
| 7.1.7 LTE Band 25 | 84 |
| 7.1.8 LTE Band 26 (Part 22) | 96 |
| 7.1.9 LTE Band 26 (Part 90) | 106 |
| 7.1.10 LTE Band 38 (Power Class III) | 114 |
| 7.1.11 LTE Band 38 (Power Class II) | 122 |
| 7.1.12 LTE Band 41 (Power Class III) | 130 |
| 7.1.13 LTE Band 41 (Power Class II) | 138 |
| 7.1.14 LTE Band 66 | 146 |
| 7.1.15 LTE Band 71 | 158 |
| 7.2 Radiated Spurious Emissions below 1GHz | 166 |
| 7.2.1 LTE Band 2 | 166 |
| 7.2.2 LTE Band 4 | 168 |
| 7.2.3 LTE Band 5 | 170 |
| 7.2.4 LTE Band 7 | 172 |
| 7.2.5 LTE Band 12 | 174 |



| | | |
|--------|---|-----|
| 7.2.6 | LTE Band 13 | 176 |
| 7.2.7 | LTE Band 25 | 178 |
| 7.2.8 | LTE Band 26 (Part 22) | 180 |
| 7.2.9 | LTE Band 26 (Part 90) | 182 |
| 7.2.10 | LTE Band 38 | 184 |
| 7.2.11 | LTE Band 41 | 186 |
| 7.2.12 | LTE Band 66 | 188 |
| 7.2.13 | LTE Band 71 | 190 |
| 7.3 | Radiated Spurious Emissions above 1GHz | 192 |
| 7.3.1 | LTE Band 2 | 192 |
| 7.3.2 | LTE Band 4 | 201 |
| 7.3.3 | LTE Band 5 | 210 |
| 7.3.4 | LTE Band 7 | 219 |
| 7.3.5 | LTE Band 12 | 225 |
| 7.3.6 | LTE Band 13 | 234 |
| 7.3.7 | LTE Band 25 | 238 |
| 7.3.8 | LTE Band 26 (Part 22) | 247 |
| 7.3.9 | LTE Band 26 (Part 90) | 256 |
| 7.3.10 | LTE Band 38 | 263 |
| 7.3.11 | LTE Band 41 | 269 |
| 7.3.12 | LTE Band 66 | 275 |
| 7.3.13 | LTE Band 71 | 284 |
| 8 | Pictures of Test Arrangements | 290 |
| 9 | Information of the Testing Laboratories | 291 |



Release Control Record

| Issue No. | Description | Date Issued |
|------------------------|-------------------|-------------|
| RFBEDV-WTW-P23030565-3 | Original release. | 2023/7/27 |

1 Certificate

Product: Module

Brand: Vantiva

Test Model: RG525FNA

Sample Status: Engineering sample

Applicant: Vantiva USA LLC

Test Date: 2023/4/17 ~ 2023/6/5

Standard: 47 CFR FCC Part 22
47 CFR FCC Part 24
47 CFR FCC Part 27
47 CFR FCC Part 90
47 CFR FCC Part 2

Measurement procedure: ANSI/TIA/EIA-603-E 2016
ANSI C63.26-2015
KDB 971168 D01 Power Meas License Digital Systems v03r01
KDB 971168 D02 Misc Rev Approv License Devices v02r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 22
 47 CFR FCC Part 24
 47 CFR FCC Part 27
 47 CFR FCC Part 90
 47 CFR FCC Part 2

| Standard / Clause | Test Item | Result | Remark |
|---|--|--------|--|
| FCC 47 CFR Part 2.1046 FCC 47 CFR Part 22.913 (a) FCC 47 CFR Part 24.232 (c) FCC 47 CFR Part 27.50(d) FCC 47 CFR Part 27.50(h) FCC 47 CFR Part 27.50(c) FCC 47 CFR Part 27.50(b) FCC 47 CFR Part 90.635(b) FCC 47 CFR Part 90.542(a)(7) | Effective Radiated Power and Equivalent Isotropically Radiated Power | Pass | Meet the requirement of limit. |
| FCC 47 CFR Part 2.1047 | Modulation Characteristics | NA | Refer to Note |
| FCC 47 CFR Part 22.913 (d) FCC 47 CFR Part 24.232 (d) FCC 47 CFR Part 27.50(d) | Peak to Average Ratio | NA | Refer to Note |
| FCC 47 CFR Part 2.1049 | Bandwidth | NA | Refer to Note |
| FCC 47 CFR Part 2.1051 FCC 47 CFR Part 22.917 FCC 47 CFR Part 24.238 FCC 47 CFR Part 27.53(h) FCC 47 CFR Part 27.53(m) FCC 47 CFR Part 27.53(g) FCC 47 CFR Part 27.53(c)(f) FCC 47 CFR Part 90.691 FCC 47 CFR Part 90.543(e)(f) | Conducted Spurious Emissions | NA | Refer to Note |
| FCC 47 CFR Part 2.1053 FCC 47 CFR Part 22.917 FCC 47 CFR Part 24.238 FCC 47 CFR Part 27.53(h) FCC 47 CFR Part 27.53(m) FCC 47 CFR Part 27.53(g) FCC 47 CFR Part 27.53(c)(f) FCC 47 CFR Part 90.691 FCC 47 CFR Part 90.543(e)(f) | Radiated Spurious Emissions below 1GHz | Pass | Minimum passing margin is -24.79 dB at 146.68 MHz |
| FCC 47 CFR Part 2.1053 FCC 47 CFR Part 22.917 FCC 47 CFR Part 24.238 FCC 47 CFR Part 27.53(h) FCC 47 CFR Part 27.53(m) FCC 47 CFR Part 27.53(g) FCC 47 CFR Part 27.53(c)(f) FCC 47 CFR Part 90.691 FCC 47 CFR Part 90.543(e)(f) | Radiated Spurious Emissions above 1GHz | Pass | Minimum passing margin is -14.43 dB at 5070.00 MHz |

47 CFR FCC Part 22
 47 CFR FCC Part 24
 47 CFR FCC Part 27
 47 CFR FCC Part 90
 47 CFR FCC Part 2

| Standard / Clause | Test Item | Result | Remark |
|--|---------------------|--------|---------------|
| FCC 47 CFR Part 2.1055 FCC 47 CFR Part 22.355 FCC 47 CFR Part 24.235 FCC 47 CFR Part 27.54 FCC 47 CFR Part 90.213 FCC 47 CFR Part 90.539(e) | Frequency Stability | NA | Refer to Note |

Note:

1. This report is issued as a supplementary report. Therefore, only test item of Maximum Peak Output Power and Radiated Spurious Emissions were performed for this report. Other testing data please refer to MRT Technology (Suzhou) Co., Ltd report no.: 2211RSU034-U1 and 2211RSU034-U3, for module (Brand: Quectel, Model: RG525F-NA). The EUT has disabled the LTE disabled Bands 14/17/30/42/43/LTE CA mode/HUPE in the LTE Bands 38/41/42/43 mode by software.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Specification | Expanded Uncertainty (k=2) (±) |
|--|-----------------|-----------------------------------|
| Radiated Spurious Emissions below 1GHz | 9 kHz ~ 30 MHz | 3.59 dB |
| | 30 MHz ~ 1 GHz | 3.60 dB |
| Radiated Spurious Emissions above 1GHz | 1 GHz ~ 18 GHz | 2.29 dB |
| | 18 GHz ~ 40 GHz | 2.29 dB |

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

| | |
|---------------------|--------------------|
| Product | Module |
| Brand | Vantiva |
| Test Model | RG525FNA |
| Status of EUT | Engineering sample |
| Power Supply Rating | Refer to Note |

Note:

1. EUT Overview

| Band / Bandwidth | TX Frequency Range (MHz) | Max. EIRP Power | | | |
|---------------------------------------|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | QPSK | 16QAM | 64QAM | 256QAM |
| LTE Band 2 (Channel Bandwidth 1.4MHz) | 1850.7-1909.3 | 452.898mW (26.56dBm) | 381.944mW (25.82dBm) | 288.403mW (24.60dBm) | 146.893mW (21.67dBm) |
| LTE Band 2 (Channel Bandwidth 3MHz) | 1851.5-1908.5 | 439.542mW (26.43dBm) | 381.944mW (25.82dBm) | 279.254mW (24.46dBm) | 146.218mW (21.65dBm) |
| LTE Band 2 (Channel Bandwidth 5MHz) | 1852.5-1907.5 | 449.780mW (26.53dBm) | 375.837mW (25.75dBm) | 277.332mW (24.43dBm) | 144.544mW (21.60dBm) |
| LTE Band 2 (Channel Bandwidth 10MHz) | 1855.0-1905.0 | 444.631mW (26.48dBm) | 381.944mW (25.82dBm) | 281.190mW (24.49dBm) | 147.231mW (21.68dBm) |
| LTE Band 2 (Channel Bandwidth 15MHz) | 1857.5-1902.5 | 451.856mW (26.55dBm) | 382.825mW (25.83dBm) | 284.446mW (24.54dBm) | 147.911mW (21.70dBm) |
| LTE Band 2 (Channel Bandwidth 20MHz) | 1860.0-1900.0 | 453.942mW (26.57dBm) | 389.045mW (25.90dBm) | 287.740mW (24.59dBm) | 150.661mW (21.78dBm) |
| LTE Band 4 (Channel Bandwidth 1.4MHz) | 1710.7-1754.3 | 421.697mW (26.25dBm) | 343.558mW (25.36dBm) | 267.917mW (24.28dBm) | 136.458mW (21.35dBm) |
| LTE Band 4 (Channel Bandwidth 3MHz) | 1711.5-1753.5 | 414.000mW (26.17dBm) | 343.558mW (25.36dBm) | 257.632mW (24.11dBm) | 136.144mW (21.34dBm) |
| LTE Band 4 (Channel Bandwidth 5MHz) | 1712.5-1752.5 | 421.697mW (26.25dBm) | 342.768mW (25.35dBm) | 258.821mW (24.13dBm) | 135.831mW (21.33dBm) |
| LTE Band 4 (Channel Bandwidth 10MHz) | 1715.0-1750.0 | 423.643mW (26.27dBm) | 341.193mW (25.33dBm) | 258.226mW (24.12dBm) | 134.896mW (21.30dBm) |
| LTE Band 4 (Channel Bandwidth 15MHz) | 1717.5-1747.5 | 424.620mW (26.28dBm) | 347.536mW (25.41dBm) | 260.016mW (24.15dBm) | 136.773mW (21.36dBm) |
| LTE Band 4 (Channel Bandwidth 20MHz) | 1720.0-1745.0 | 427.563mW (26.31dBm) | 347.536mW (25.41dBm) | 264.241mW (24.22dBm) | 137.088mW (21.37dBm) |
| LTE Band 7 (Channel Bandwidth 5MHz) | 2502.5-2567.5 | 532.108mW (27.26dBm) | 426.580mW (26.30dBm) | 341.193mW (25.33dBm) | 171.002mW (22.33dBm) |
| LTE Band 7 (Channel Bandwidth 10MHz) | 2505.0-2565.0 | 533.335mW (27.27dBm) | 433.511mW (26.37dBm) | 345.939mW (25.39dBm) | 174.181mW (22.41dBm) |
| LTE Band 7 (Channel Bandwidth 15MHz) | 2507.5-2562.5 | 540.754mW (27.33dBm) | 434.510mW (26.38dBm) | 349.945mW (25.44dBm) | 175.792mW (22.45dBm) |
| LTE Band 7 (Channel Bandwidth 20MHz) | 2510.0-2560.0 | 547.016mW (27.38dBm) | 437.522mW (26.41dBm) | 353.183mW (25.48dBm) | 177.011mW (22.48dBm) |



| Band / Bandwidth | | TX Frequency Range (MHz) | Max. EIRP Power | | | |
|---|--|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | | QPSK | 16QAM | 64QAM | 256QAM |
| LTE Band 25 (Channel Bandwidth 1.4MHz) | | 1850.7-1914.3 | 462.381mW (26.65dBm) | 374.111mW (25.73dBm) | 293.089mW (24.67dBm) | 145.881mW (21.64dBm) |
| LTE Band 25 (Channel Bandwidth 3MHz) | | 1851.5-1913.5 | 460.257mW (26.63dBm) | 372.392mW (25.71dBm) | 291.743mW (24.65dBm) | 144.212mW (21.59dBm) |
| LTE Band 25 (Channel Bandwidth 5MHz) | | 1852.5-1912.5 | 457.088mW (26.60dBm) | 378.443mW (25.78dBm) | 289.068mW (24.61dBm) | 145.546mW (21.63dBm) |
| LTE Band 25 (Channel Bandwidth 10MHz) | | 1855.0-1910.0 | 456.037mW (26.59dBm) | 372.392mW (25.71dBm) | 291.743mW (24.65dBm) | 146.218mW (21.65dBm) |
| LTE Band 25 (Channel Bandwidth 15MHz) | | 1857.5-1907.5 | 464.515mW (26.67dBm) | 381.944mW (25.82dBm) | 293.089mW (24.67dBm) | 146.893mW (21.67dBm) |
| LTE Band 25 (Channel Bandwidth 20MHz) | | 1860.0-1905.0 | 465.586mW (26.68dBm) | 382.825mW (25.83dBm) | 296.483mW (24.72dBm) | 148.936mW (21.73dBm) |
| For Part 22 | LTE Band 26 (Channel Bandwidth 1.4MHz) | 824.7-848.3 | 177.419mW (22.49dBm) | 148.594mW (21.72dBm) | 118.850mW (20.75dBm) | 57.677mW (17.61dBm) |
| | LTE Band 26 (Channel Bandwidth 3MHz) | 825.5-847.5 | 179.887mW (22.55dBm) | 146.893mW (21.67dBm) | 120.781mW (20.82dBm) | 57.943mW (17.63dBm) |
| | LTE Band 26 (Channel Bandwidth 5MHz) | 826.5-846.5 | 179.061mW (22.53dBm) | 149.624mW (21.75dBm) | 119.124mW (20.76dBm) | 58.210mW (17.65dBm) |
| | LTE Band 26 (Channel Bandwidth 10MHz) | 829.0-844.0 | 181.134mW (22.58dBm) | 153.462mW (21.86dBm) | 121.060mW (20.83dBm) | 58.345mW (17.66dBm) |
| | LTE Band 26 (Channel Bandwidth 15MHz) | 831.5-841.5 | 183.231mW (22.63dBm) | 153.462mW (21.86dBm) | 121.899mW (20.86dBm) | 58.884mW (17.70dBm) |
| For Part 90 | LTE Band 26 (Channel Bandwidth 1.4MHz) | 814.7-823.3 | 174.181mW (22.41dBm) | 145.881mW (21.64dBm) | 116.681mW (20.67dBm) | 56.624mW (17.53dBm) |
| | LTE Band 26 (Channel Bandwidth 3MHz) | 815.5-822.5 | 175.792mW (22.45dBm) | 148.594mW (21.72dBm) | 118.577mW (20.74dBm) | 56.885mW (17.55dBm) |
| | LTE Band 26 (Channel Bandwidth 5MHz) | 816.5-821.5 | 175.792mW (22.45dBm) | 146.893mW (21.67dBm) | 116.950mW (20.68dBm) | 57.148mW (17.57dBm) |
| | LTE Band 26 (Channel Bandwidth 10MHz) | 819.0 | 176.604mW (22.47dBm) | 148.252mW (21.71dBm) | 118.850mW (20.75dBm) | 57.280mW (17.58dBm) |
| LTE Band 66 (Channel Bandwidth 1.4 MHz) | | 1710.7-1779.3 | 431.519mW (26.35dBm) | 349.945mW (25.44dBm) | 273.527mW (24.37dBm) | 138.995mW (21.43dBm) |
| LTE Band 66 (Channel Bandwidth 3MHz) | | 1711.5-1778.5 | 431.519mW (26.35dBm) | 344.350mW (25.37dBm) | 275.423mW (24.40dBm) | 137.088mW (21.37dBm) |
| LTE Band 66 (Channel Bandwidth 5MHz) | | 1712.5-1777.5 | 428.549mW (26.32dBm) | 348.337mW (25.42dBm) | 276.058mW (24.41dBm) | 136.773mW (21.36dBm) |
| LTE Band 66 (Channel Bandwidth 10MHz) | | 1715.0-1775.0 | 421.697mW (26.25dBm) | 345.144mW (25.38dBm) | 272.898mW (24.36dBm) | 136.773mW (21.36dBm) |
| LTE Band 66 (Channel Bandwidth 15MHz) | | 1717.5-1772.5 | 432.514mW (26.36dBm) | 350.752mW (25.45dBm) | 278.612mW (24.45dBm) | 139.316mW (21.44dBm) |
| LTE Band 66 (Channel Bandwidth 20MHz) | | 1720.0-1770.0 | 435.512mW (26.39dBm) | 352.371mW (25.47dBm) | 279.254mW (24.46dBm) | 140.929mW (21.49dBm) |

| Band / Bandwidth | TX Frequency Range (MHz) | Max. EIRP Power | | | |
|---------------------------------------|--------------------------|--------------------------|-------------------------|-------------------------|-------------------------|
| | | QPSK | 16QAM | 64QAM | 256QAM |
| (Power class II) | | | | | |
| LTE Band 38 (Channel Bandwidth 5MHz) | 2572.5-2617.5 | 1078.947mW (30.33dBm) | 870.964mW (29.40dBm) | 693.426mW (28.41dBm) | 345.144mW (25.38dBm) |
| LTE Band 38 (Channel Bandwidth 10MHz) | 2575.0-2615.0 | 1078.947mW (30.33dBm) | 872.971mW (29.41dBm) | 682.339mW (28.34dBm) | 340.408mW (25.32dBm) |
| LTE Band 38 (Channel Bandwidth 15MHz) | 2577.5-2612.5 | 1096.478mW (30.40dBm) | 874.984mW (29.42dBm) | 696.627mW (28.43dBm) | 348.337mW (25.42dBm) |
| LTE Band 38 (Channel Bandwidth 20MHz) | 2580.0-2610.0 | 1101.539mW (30.42dBm) | 879.023mW (29.44dBm) | 699.842mW (28.45dBm) | 350.752mW (25.45dBm) |
| LTE Band 41 (Channel Bandwidth 5MHz) | 2498.5-2687.5 | 1109.175mW (30.45dBm) | 885.116mW (29.47dBm) | 696.627mW (28.43dBm) | 357.273mW (25.53dBm) |
| LTE Band 41 (Channel Bandwidth 10MHz) | 2501.0-2685.0 | 1109.175mW (30.45dBm) | 872.971mW (29.41dBm) | 688.652mW (28.38dBm) | 352.371mW (25.47dBm) |
| LTE Band 41 (Channel Bandwidth 15MHz) | 2503.5-2682.5 | 1119.438mW (30.49dBm) | 881.049mW (29.45dBm) | 703.072mW (28.47dBm) | 353.997mW (25.49dBm) |
| LTE Band 41 (Channel Bandwidth 20MHz) | 2506.0-2680.0 | 1122.018mW (30.50dBm) | 889.201mW (29.49dBm) | 714.496mW (28.54dBm) | 359.749mW (25.56dBm) |
| (Power class III) | | | | | |
| LTE Band 38 (Channel Bandwidth 5MHz) | 2572.5-2617.5 | 685.488mW (28.36dBm) | 543.250mW (27.35dBm) | 445.656mW (26.49dBm) | 218.273mW (23.39dBm) |
| LTE Band 38 (Channel Bandwidth 10MHz) | 2575.0-2615.0 | 688.652mW (28.38dBm) | 548.277mW (27.39dBm) | 439.542mW (26.43dBm) | 217.270mW (23.37dBm) |
| LTE Band 38 (Channel Bandwidth 15MHz) | 2577.5-2612.5 | 690.240mW (28.39dBm) | 550.808mW (27.41dBm) | 448.745mW (26.52dBm) | 220.293mW (23.43dBm) |
| LTE Band 38 (Channel Bandwidth 20MHz) | 2580.0-2610.0 | 696.627mW (28.43dBm) | 557.186mW (27.46dBm) | 456.037mW (26.59dBm) | 222.331mW (23.47dBm) |
| LTE Band 41 (Channel Bandwidth 5MHz) | 2498.5-2687.5 | 711.214mW (28.52dBm) | 564.937mW (27.52dBm) | 446.684mW (26.50dBm) | 224.388mW (23.51dBm) |
| LTE Band 41 (Channel Bandwidth 10MHz) | 2501.0-2685.0 | 714.496mW (28.54dBm) | 574.116mW (27.59dBm) | 452.898mW (26.56dBm) | 227.510mW (23.57dBm) |
| LTE Band 41 (Channel Bandwidth 15MHz) | 2503.5-2682.5 | 722.770mW (28.59dBm) | 584.790mW (27.67dBm) | 469.894mW (26.72dBm) | 227.510mW (23.57dBm) |
| LTE Band 41 (Channel Bandwidth 20MHz) | 2506.0-2680.0 | 727.780mW (28.62dBm) | 590.201mW (27.71dBm) | 472.063mW (26.74dBm) | 230.675mW (23.63dBm) |

| Band / Bandwidth | TX Frequency Range (MHz) | Max. ERP Power | | | |
|--|--------------------------|-------------------------|-------------------------|-------------------------|------------------------|
| | | QPSK | 16QAM | 64QAM | 256QAM |
| LTE Band 5 (Channel Bandwidth 1.4MHz) | 824.7-848.3 | 190.985mW (22.81dBm) | 154.882mW (21.90dBm) | 124.165mW (20.94dBm) | 60.395mW (17.81dBm) |
| LTE Band 5 (Channel Bandwidth 3MHz) | 825.5-847.5 | 190.108mW (22.79dBm) | 155.597mW (21.92dBm) | 125.026mW (20.97dBm) | 60.534mW (17.82dBm) |
| LTE Band 5 (Channel Bandwidth 5MHz) | 826.5-846.5 | 192.309mW (22.84dBm) | 156.675mW (21.95dBm) | 125.603mW (20.99dBm) | 61.094mW (17.86dBm) |
| LTE Band 5 (Channel Bandwidth 10MHz) | 829.0-844.0 | 194.536mW (22.89dBm) | 160.325mW (22.05dBm) | 127.057mW (21.04dBm) | 62.230mW (17.94dBm) |
| LTE Band 12 (Channel Bandwidth 1.4MHz) | 699.7-715.3 | 142.561mW (21.54dBm) | 115.611mW (20.63dBm) | 94.189mW (19.74dBm) | 46.345mW (16.66dBm) |
| LTE Band 12 (Channel Bandwidth 3MHz) | 700.5-714.5 | 142.889mW (21.55dBm) | 116.145mW (20.65dBm) | 94.624mW (19.76dBm) | 46.026mW (16.63dBm) |
| LTE Band 12 (Channel Bandwidth 5MHz) | 701.5-713.5 | 142.889mW (21.55dBm) | 118.032mW (20.72dBm) | 95.719mW (19.81dBm) | 46.559mW (16.68dBm) |
| LTE Band 12 (Channel Bandwidth 10MHz) | 704.0-711.0 | 143.880mW (21.58dBm) | 118.032mW (20.72dBm) | 96.828mW (19.86dBm) | 46.989mW (16.72dBm) |

| Band / Bandwidth | TX Frequency Range (MHz) | Max. ERP Power | | | |
|---------------------------------------|--------------------------|-------------------------|-------------------------|-------------------------|------------------------|
| | | QPSK | 16QAM | 64QAM | 256QAM |
| LTE Band 13 (Channel Bandwidth 5MHz) | 779.5-784.5 | 167.494mW (22.24dBm) | 141.254mW (21.50dBm) | 112.202mW (20.50dBm) | 55.463mW (17.44dBm) |
| LTE Band 13 (Channel Bandwidth 10MHz) | 782.0 | 167.880mW (22.25dBm) | 141.254mW (21.50dBm) | 112.202mW (20.50dBm) | 55.463mW (17.44dBm) |
| LTE Band 71 (Channel Bandwidth 5MHz) | 665.5-695.5 | 137.721mW (21.39dBm) | 108.143mW (20.34dBm) | 85.114mW (19.30dBm) | 42.954mW (16.33dBm) |
| LTE Band 71 (Channel Bandwidth 10MHz) | 668.0-693.0 | 134.896mW (21.30dBm) | 109.396mW (20.39dBm) | 85.901mW (19.34dBm) | 43.251mW (16.36dBm) |
| LTE Band 71 (Channel Bandwidth 15MHz) | 670.5-690.5 | 137.088mW (21.37dBm) | 109.901mW (20.41dBm) | 86.497mW (19.37dBm) | 44.055mW (16.44dBm) |
| LTE Band 71 (Channel Bandwidth 20MHz) | 673.0-688.0 | 138.357mW (21.41dBm) | 110.662mW (20.44dBm) | 86.896mW (19.39dBm) | 44.157mW (16.45dBm) |

2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3. The EUT is authorized for use in specific End-product. Please refer to below for more details.

| Brand | Model | Specification |
|--------------|---------|---------------|
| WIFI Gateway | Vantiva | MGA5331 |

*The models as above are electrically identical, different models are for marketing purpose.

4. The adapter for the End-product.

| AC Adapter | | |
|------------|-------------------------|---|
| Brand | Model | Specification |
| HONOR | ADS-42FI-12 12042EPCU-L | AC Input: 100-120V~ 50/60Hz 1.2A max. DC Output: 12VDC, 3.5A, 42W DC Output Cable: 1.5m, Non-Shielded |

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

| Ant. No. | Ant. 0 | Ant. 3 |
|-------------------|------------|------------|
| Antenna Type | PCB | PCB |
| Antenna Connector | Ipex(MHF) | Ipex(MHF) |
| Band | Gain (dBi) | Gain (dBi) |
| Band 2 | 5.05 | 3.47 |
| Band 4 | 4.84 | 3.96 |
| Band 5 | 2.38 | 1.58 |
| Band 7 | 5.02 | 5.70 |
| Band 12 | 1.12 | 1.99 |
| Band 13 | 2.02 | 0.87 |
| Band 25 | 5.05 | 3.47 |
| Band 26 (Part 22) | 2.38 | 1.75 |
| Band 26 (Part 90) | 2.30 | 1.75 |
| Band 38 | 5.43 | 6.11 |
| Band 41 | 5.43 | 6.17 |
| Band 66 | 4.84 | 3.96 |
| Band 71 | 1.12 | 1.99 |

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible. The EUT LTE bands 7, 38 and 41 are transmitted via antenna 3, and other LTE bands are transmitted via antenna 0.

3.3 Test Mode Applicability and Tested Channel Detail

| | |
|-------------|--|
| Pre-Scan: | EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition. |
| Worst Case: | X-axis/ Y-axis/ Z-axis Worst Condition: X-axis |

For LTE Band 2

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|---|-------------------|----------------------------------|----------------------------|
| EIRP | 18607 (1850.70 MHz) 18900 (1880.00 MHz) 19193 (1909.30 MHz) | 1.4 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 18615 (1851.50 MHz) 18900 (1880.00 MHz) 19185 (1908.50 MHz) | 3 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 18625 (1852.50 MHz) 18900 (1880.00 MHz) 19175 (1907.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 18650 (1855.00 MHz) 18900 (1880.00 MHz) 19150 (1905.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 18675 (1857.50 MHz) 18900 (1880.00 MHz) 19125 (1902.50 MHz) | 15 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 18700 (1860.00 MHz) 18900 (1880.00 MHz) 19100 (1900.00 MHz) | 20 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 19175 (1907.50 MHz) | 5 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 18607 (1850.70 MHz) 18900 (1880.00 MHz) 19193 (1909.30 MHz) | 1.4 MHz | QPSK | 1 RB |
| | 18625 (1852.50 MHz) 18900 (1880.00 MHz) 19175 (1907.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 18700 (1860.00 MHz) 18900 (1880.00 MHz) 19100 (1900.00 MHz) | 20 MHz | QPSK | 1 RB |

For LTE Band 4

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|---|---|-------------------|----------------------------------|----------------------------|
| EIRP | 19957 (1710.70 MHz) 20175 (1732.50 MHz) 20393 (1754.30 MHz) | 1.4 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 19965 (1711.50 MHz) 20175 (1732.50 MHz) 20385 (1753.50 MHz) | 3 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 19975 (1712.50 MHz) 20175 (1732.50 MHz) 20375 (1752.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 20000 (1715.00 MHz) 20175 (1732.50 MHz) 20350 (1750.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 20025 (1717.50 MHz) 20175 (1732.50 MHz) 20325 (1747.50 MHz) | 15 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 20050 (1720.00 MHz) 20175 (1732.50 MHz) 20300 (1745.00 MHz) | 20 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 20300 (1745.00 MHz) | 20 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 19957 (1710.70 MHz) 20175 (1732.50 MHz) 20393 (1754.30 MHz) | 1.4 MHz | QPSK | 1 RB |
| | 19975 (1712.50 MHz) 20175 (1732.50 MHz) 20375 (1752.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 20050 (1720.00 MHz) 20175 (1732.50 MHz) 20300 (1745.00 MHz) | 20 MHz | QPSK | 1 RB |

For LTE Band 5

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|--|-------------------|----------------------------------|----------------------------|
| ERP | 20407 (824.70 MHz) 20525 (836.50 MHz) 20643 (848.30 MHz) | 1.4 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 20415 (825.50 MHz) 20525 (836.50 MHz) 20635 (847.50 MHz) | 3 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 20425 (826.50 MHz) 20525 (836.50 MHz) 20625 (846.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 20450 (829.00 MHz) 20525 (836.50 MHz) 20600 (844.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 20525 (836.50 MHz) | 10 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 20407 (824.70 MHz) 20525 (836.50 MHz) 20643 (848.30 MHz) | 1.4 MHz | QPSK | 1 RB |
| | 20425 (826.50 MHz) 20525 (836.50 MHz) 20625 (846.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 20450 (829.00 MHz) 20525 (836.50 MHz) 20600 (844.00 MHz) | 10 MHz | QPSK | 1 RB |

For LTE Band 7

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|---|-------------------|----------------------------------|----------------------------|
| EIRP | 20775 (2502.50 MHz) 21100 (2535.00 MHz) 21425 (2567.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 20800 (2505.00 MHz) 21100 (2535.00 MHz) 21400 (2565.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 20825 (2507.50 MHz) 21100 (2535.00 MHz) 21375 (2562.50 MHz) | 15 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 20850 (2510.00 MHz) 21100 (2535.00 MHz) 21350 (2560.00 MHz) | 20 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 21100 (2535.00 MHz) | 20 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 20775 (2502.50 MHz) 21100 (2535.00 MHz) 21425 (2567.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 20850 (2510.00 MHz) 21100 (2535.00 MHz) 21350 (2560.00 MHz) | 20 MHz | QPSK | 1 RB |

For LTE Band 12

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|--|-------------------|----------------------------------|----------------------------|
| ERP | 23017 (699.70 MHz) 23095 (707.50 MHz) 23173 (715.30 MHz) | 1.4 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 23025 (700.50 MHz) 23095 (707.50 MHz) 23165 (714.50 MHz) | 3 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 23035 (701.50 MHz) 23095 (707.50 MHz) 23155 (713.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 23060 (704.00 MHz) 23095 (707.50 MHz) 23130 (711.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 23095 (707.50 MHz) | 10 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 23017 (699.70 MHz) 23095 (707.50 MHz) 23173 (715.30 MHz) | 1.4 MHz | QPSK | 1 RB |
| | 23035 (701.50 MHz) 23095 (707.50 MHz) 23155 (713.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 23060 (704.00 MHz) 23095 (707.50 MHz) 23130 (711.00 MHz) | 10 MHz | QPSK | 1 RB |

For LTE Band 13

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|--|-------------------|----------------------------------|----------------------------|
| ERP | 23205 (779.50 MHz) 23230 (782.00 MHz) 23255 (784.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 23230 (782.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 23230 (782.00 MHz) | 10 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 23205 (779.50 MHz) 23230 (782.00 MHz) 23255 (784.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 23230 (782.00 MHz) | 10 MHz | QPSK | 1 RB |

For LTE Band 25

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|---|---|-------------------|----------------------------------|----------------------------|
| EIRP | 26047 (1850.70 MHz) 26365 (1882.50 MHz) 26683 (1914.30 MHz) | 1.4 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26055 (1851.50 MHz) 26365 (1882.50 MHz) 26675 (1913.50 MHz) | 3 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26065 (1852.50 MHz) 26365 (1882.50 MHz) 26665 (1912.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26090 (1855.00 MHz) 26365 (1882.50 MHz) 26640 (1910.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26115 (1857.50 MHz) 26365 (1882.50 MHz) 26615 (1907.50 MHz) | 15 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26140 (1860.00 MHz) 26365 (1882.50 MHz) 26590 (1905.00 MHz) | 20 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 26365 (1882.50 MHz) | 20 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 26047 (1850.70 MHz) 26365 (1882.50 MHz) 26683 (1914.30 MHz) | 1.4 MHz | QPSK | 1 RB |
| | 26065 (1852.50 MHz) 26365 (1882.50 MHz) 26665 (1912.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 26140 (1860.00 MHz) 26365 (1882.50 MHz) 26590 (1905.00 MHz) | 20 MHz | QPSK | 1 RB |

For LTE Band 26 (Part 22)

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|--|-------------------|----------------------------------|----------------------------|
| EIRP | 26797 (824.70 MHz) 26915 (836.50 MHz) 27033 (848.30 MHz) | 1.4 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26805 (825.50 MHz) 26915 (836.50 MHz) 27025 (847.50 MHz) | 3 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26815 (826.50 MHz) 26915 (836.50 MHz) 27015 (846.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26840 (829.00 MHz) 26915 (836.50 MHz) 26990 (844.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26865 (831.50 MHz) 26915 (836.50 MHz) 26965 (841.50 MHz) | 15 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 26915 (836.50 MHz) | 15 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 26797 (824.70 MHz) 26915 (836.50 MHz) 27033 (848.30 MHz) | 1.4 MHz | QPSK | 1 RB |
| | 26815 (826.50 MHz) 26915 (836.50 MHz) 27015 (846.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 26865 (831.50 MHz) 26915 (836.50 MHz) 26965 (841.50 MHz) | 15 MHz | QPSK | 1 RB |

For LTE Band 26 (Part 90)

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|--|-------------------|----------------------------------|----------------------------|
| EIRP | 26697 (814.70 MHz) 26740 (819.00 MHz) 26783 (823.30 MHz) | 1.4 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26705 (815.50 MHz) 26740 (819.00 MHz) 26775 (822.50 MHz) | 3 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26715 (816.50 MHz) 26740 (819.00 MHz) 26765 (821.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 26740 (819.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 26740 (819.00 MHz) | 10 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 26697 (814.70 MHz) 26740 (819.00 MHz) 26783 (823.30 MHz) | 1.4 MHz | QPSK | 1 RB |
| | 26715 (816.50 MHz) 26740 (819.00 MHz) 26765 (821.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 26740 (819.00 MHz) | 10 MHz | QPSK | 1 RB |

For LTE Band 38

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|---|-------------------|----------------------------------|----------------------------|
| EIRP | 37775 (2572.5MHz) 38000 (2595.0MHz) 38225 (2617.5MHz) | 5MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 37800 (2575.0MHz) 38000 (2595.0MHz, 38200 (2615.0MHz) | 10MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 37825 (2577.5MHz) 38000 (2595.0MHz) 38175 (2612.5MHz) | 15MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 37850 (2580.0MHz) 38000 (2595.0MHz) 38150 (2610.0MHz) | 20MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 38000 (2595.0MHz) | 20MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 37775 (2572.5MHz) 38000 (2595.0MHz) 38225 (2617.5MHz) | 5MHz | QPSK | 1 RB |
| | 37850 (2580.0MHz) 38000 (2595.0MHz) 38150 (2610.0MHz) | 20MHz | QPSK | 1 RB |

For LTE Band 41

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|---|-------------------|----------------------------------|----------------------------|
| EIRP | 39675 (2498.50 MHz) 40620 (2593.00 MHz) 41565 (2687.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 39700 (2501.00 MHz) 40620 (2593.00 MHz) 41540 (2685.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 39725 (2503.50 MHz) 40620 (2593.00 MHz) 41515 (2682.50 MHz) | 15 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 39750 (2506.00 MHz) 40620 (2593.00 MHz) 41490 (2680.00 MHz) | 20 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 40620 (2593.00 MHz) | 20 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 39675 (2498.50 MHz) 40620 (2593.00 MHz) 41565 (2687.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 39750 (2506.00 MHz) 40620 (2593.00 MHz) 41490 (2680.00 MHz) | 20 MHz | QPSK | 1 RB |

For LTE Band 66

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|--|-------------------|----------------------------------|----------------------------|
| EIRP | 131979 (1710.70 MHz) 132322 (1745.00 MHz) 132665 (1779.30 MHz) | 1.4 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 131987 (1711.50 MHz) 132322 (1745.00 MHz) 132657 (1778.50 MHz) | 3 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 131997 (1712.50 MHz) 132322 (1745.00 MHz) 132647 (1777.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 132022 (1715.00 MHz) 132322 (1745.00 MHz) 132622 (1775.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 132047 (1717.50 MHz) 132322 (1745.00 MHz) 132597 (1772.50 MHz) | 15 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 132072 (1720.00 MHz) 132322 (1745.00 MHz) 132572 (1770.00 MHz) | 20 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 132322 (1745.00 MHz) | 20 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 131979 (1710.70 MHz) 132322 (1745.00 MHz) 132665 (1779.30 MHz) | 1.4 MHz | QPSK | 1 RB |
| | 131997 (1712.50 MHz) 132322 (1745.00 MHz) 132647 (1777.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 132072 (1720.00 MHz) 132322 (1745.00 MHz) 132572 (1770.00 MHz) | 20 MHz | QPSK | 1 RB |


For LTE Band 71

| Test Item | Tested Channel | Channel Bandwidth | Modulation | Mode |
|--|---|-------------------|----------------------------------|----------------------------|
| ERP | 133147 (665.50 MHz) 133297 (680.50 MHz) 133447 (695.50 MHz) | 5 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 133172 (668.00 MHz) 133297 (680.50 MHz) 133422 (693.00 MHz) | 10 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 133197 (670.50 MHz) 133297 (680.50 MHz) 133397 (690.50 MHz) | 15 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| | 133222 (673.00 MHz) 133297 (680.50 MHz) 133372 (688.00 MHz) | 20 MHz | QPSK / 16QAM / 64QAM / 256QAM | 1 RB Half RB Full RB |
| Radiated Spurious Emissions below 1GHz | 133297 (680.50 MHz) | 5 MHz | QPSK | 1 RB |
| Radiated Spurious Emissions above 1GHz | 133147 (665.50 MHz) 133297 (680.50 MHz) 133447 (695.50 MHz) | 5 MHz | QPSK | 1 RB |
| | 133222 (673.00 MHz) 133297 (680.50 MHz) 133372 (688.00 MHz) | 20 MHz | QPSK | 1 RB |

3.4 Test Program Used and Operation Descriptions

There is no need to controlling software during the test, and the EUT can be paired with the Radio Communication Analyzer to test the connection when it is powered on.

3.5 Connection Diagram of EUT and Peripheral Devices

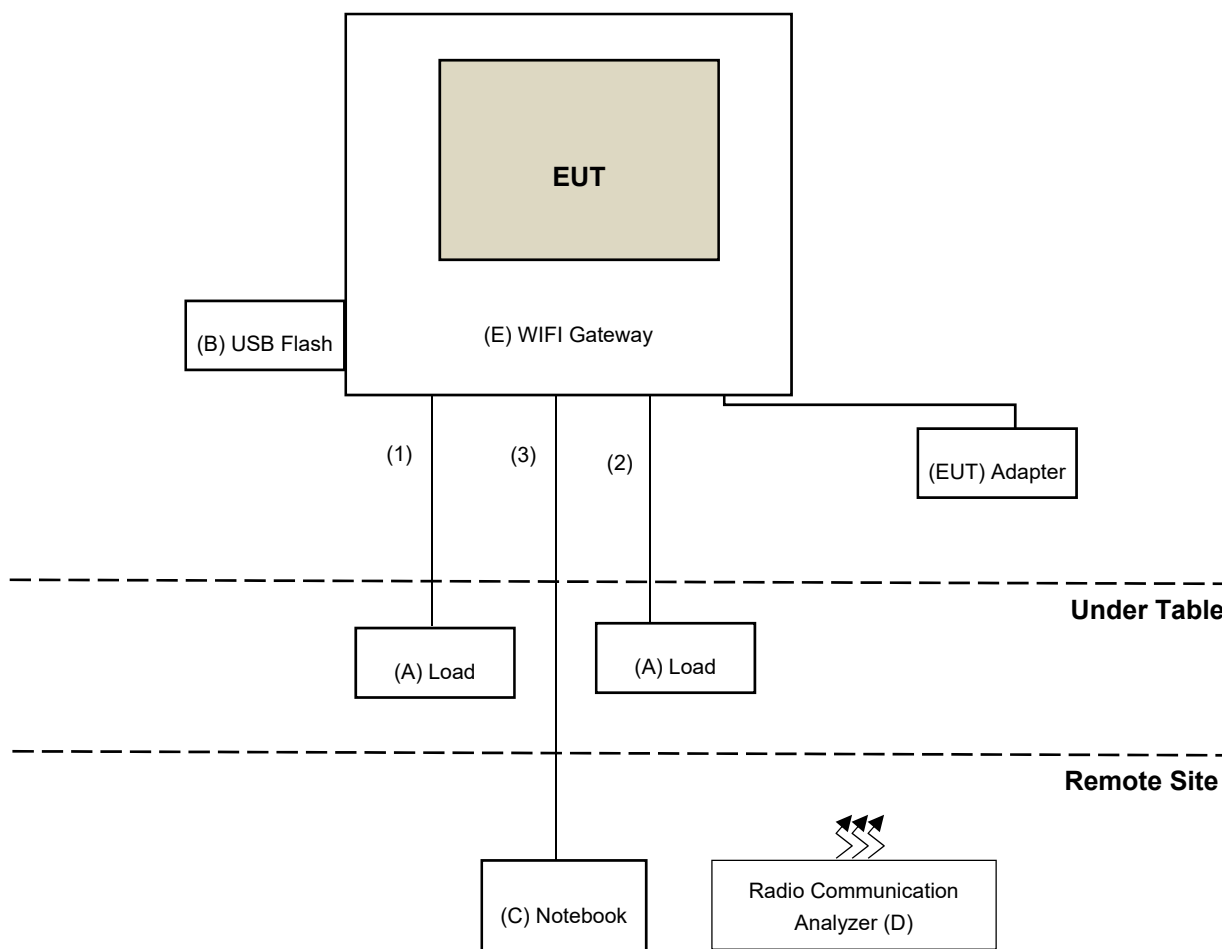

3.6 Configuration of Peripheral Devices and Cable Connections

| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|------------------------------|---------|----------------------------|------------|--------|-----------------------|
| A. | Load*2 | N/A | N/A | N/A | N/A | Provided by Lab |
| B. | USB Flash | SanDisk | SDDDC3-032G | N/A | N/A | Provided by Lab |
| C. | Notebook | Lenovo | X250ALT5 | PC06HPSE | N/A | Provided by Lab |
| D. | Radio Communication Analyzer | Anritsu | MT8821C | 6272278310 | NA | - |
| E. | WIFI Gateway | Vantiva | MGA5331ROG | NA | NA | Provided by applicant |
| F. | Adapter | HONOR | ADS-42FI-12 12042EPCU-L | NA | NA | Provided by applicant |

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item C, D acted as communication partners to transfer data.

| ID | Cable Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|--------------------|------|------------|--------------------|--------------|-----------------|
| 1 | RJ11 Cable | 1 | 1.5 | NO | 0 | Provided by Lab |
| 2 | RJ45 Cable | 4 | 1.5 | NO | 0 | Provided by Lab |
| 3 | RJ45 Cable | 1 | 10 | NO | 0 | Provided by Lab |

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

| Description Manufacturer | Model No. | Serial No. | Calibrated Date | Calibrated Until |
|--|----------------------------------|------------|--------------------|---------------------|
| N9030B - PXA Signal Analyzer KEYSIGHT | N9030B | MY57140488 | 2023/3/6 | 2024/3/5 |
| Radio Communication Analyzer Anritsu | MT8821C | 6201462755 | 2023/3/3 | 2024/3/2 |
| Software BV | ADT_RF Test Software V6.6.5.4 | N/A | N/A | N/A |

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/6/5

4.2 Radiated Spurious Emissions below 1GHz

| Description Manufacturer | Model No. | Serial No. | Calibrated Date | Calibrated Until |
|-----------------------------------|------------------------------|---------------|--------------------|---------------------|
| Antenna Tower & Turn BV ADT | AT100 | AT93021705 | N/A | N/A |
| Bi_Log Antenna Schwarbeck | VULB 9168 | 9168-160 | 2022/10/20 | 2023/10/19 |
| Loop Antenna Electro-Metrics | EM-6879 | 269 | 2022/9/19 | 2023/9/18 |
| Loop Antenna TESEQ | HLA 6121 | 45745 | 2022/7/27 | 2023/7/26 |
| MXE EMI Receiver KEYSIGHT | N9038A | MY55420137 | 2023/5/3 | 2024/5/2 |
| Preamplifier Agilent | 8447D | 2944A10638 | 2023/5/7 | 2024/5/6 |
| Preamplifier EMCI | EMC001340 | 980201 | 2022/9/23 | 2023/9/22 |
| RF Coaxial Cable EMCI | 5D-NM-BM | 140903+140902 | 2023/1/7 | 2024/1/6 |
| RF Coaxial Cable WOKEN | 8D-FB | Cable-CH9-01 | 2023/5/7 | 2024/5/6 |
| Signal & Spectrum Analyzer R&S | FSW43 | 101867 | 2022/12/30 | 2023/12/29 |
| Software BV ADT | ADT_Radiated_ V7.6.15.9.5 | N/A | N/A | N/A |
| Turn Table BV ADT | TT100 | TT93021705 | N/A | N/A |
| Turn Table Controller BV ADT | SC100 | SC93021705 | N/A | N/A |

Notes:

1. The test was performed in HY - 966 chamber 4.
2. Tested Date: 2023/5/23

4.3 Radiated Spurious Emissions above 1GHz

| Description Manufacturer | Model No. | Serial No. | Calibrated Date | Calibrated Until |
|---------------------------------------|-----------------------------------|---------------------------------|--------------------|---------------------|
| Antenna Tower & Turn BV ADT | AT100 | AT93021705 | N/A | N/A |
| Boresight antenna tower fixture BV | BAF-02 | 5 | N/A | N/A |
| Horn Antenna Schwarzbeck | 9120D | 9120D-1169 | 2022/11/13 | 2023/11/12 |
| | BBHA 9170 | 9170-480 | 2022/11/13 | 2023/11/12 |
| | | BBHA9170243 | 2022/11/13 | 2023/11/12 |
| MXE EMI Receiver KEYSIGHT | N9038A | MY55420137 | 2022/4/27 | 2023/4/26 |
| Notch Filter MICRO-TRONICS | BRM17690 | 004 | 2023/1/11 | 2024/1/10 |
| | BRM50716 | 060 | 2023/1/11 | 2024/1/10 |
| Preamplifier Agilent | 8449B | 3008A02367 | 2023/2/15 | 2024/2/14 |
| Preamplifier EMCI | EMC 184045 | 980116 | 2022/10/1 | 2023/9/30 |
| RF Coaxial Cable EMCI | EMC102-KM-KM-600 | 150928 | 2022/7/9 | 2023/7/8 |
| | EMC102-KM-KM-3000 | 150929 | 2022/7/9 | 2023/7/8 |
| RF Coaxial Cable HUBER+SUHNER | SUCOFLEX 104 | CABLE-CH9-(250795/4) | 2023/1/7 | 2024/1/6 |
| RF Coaxial Cable HUBER+SUHNER&EMCI | SUCOFLEX 104& EMC104-SM-SM8000 | CABLE-CH9-02 (248780+171006) | 2023/1/7 | 2024/1/6 |
| Signal & Spectrum Analyzer R&S | FSW43 | 101867 | 2022/12/30 | 2023/12/29 |
| Software BV ADT | ADT_Radiated_ V7.6.15.9.5 | N/A | N/A | N/A |
| Turn Table BV ADT | TT100 | TT93021705 | N/A | N/A |
| Turn Table Controller BV ADT | SC100 | SC93021705 | N/A | N/A |

Notes:

1. The test was performed in HY - 966 chamber 4.
2. Tested Date: 2023/4/17 ~ 2023/4/18

5 Limits of Test Items

5.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

For LTE Band 2, LTE Band 25:

Mobile and portable stations are limited to 2 watts EIRP.

For LTE Band 4, LTE Band 66:

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

For LTE Band 5, LTE Band 26 (Part 22):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

For LTE Band 7, LTE Band 38, LTE Band 41:

Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

For LTE Band 12, LTE Band 71:

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

For LTE Band 13:

Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

For LTE Band 26 (Part 90):

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw) ERP.

5.2 Radiated Spurious Emissions below 1GHz

For LTE Band 2, LTE Band 5, LTE Band 25, LTE Band 26 (Part 22):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

For LTE Band 4:

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB. The limit of emission is equal to -13 dBm.

For LTE Band 7 , LTE Band 38, LTE Band 41:

According to FCC 47 CFR part 27.53(m)(4), on any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log(P)$ dB. The emission limit equal to -25 dBm.

For LTE Band 12, LTE Band 71:

According to FCC 47 CFR part 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. The limit of emissions is equal to -13 dBm.

For LTE Band 13:

According to FCC 47 CFR part 27.53(c)(2), for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. The limit of emissions is equal to -13 dBm.

For operations in the 775-788 MHz, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz (EIRP). The limit of emissions is equal to -40 dBm.

For LTE Band 26 (Part 90):

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

For §90.691(a), RBW = 100 kHz for offset greater than 37.5 kHz from channel edge is allowed.

For LTE Band 66:

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB. The limit of emission is equal to -13 dBm.

5.3 Radiated Spurious Emissions above 1GHz

For LTE Band 2, LTE Band 5, LTE Band 25, LTE Band 26 (Part 22):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

For LTE Band 4:

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB. The limit of emission is equal to -13 dBm.

For LTE Band 7, LTE Band 38, LTE Band 41:

According to FCC 47 CFR part 27.53(m)(4), on any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log(P)$ dB. The emission limit equal to -25 dBm.

For LTE Band 12, LTE Band 71:

According to FCC 47 CFR part 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. The limit of emissions is equal to -13 dBm.

For LTE Band 13:

According to FCC 47 CFR part 27.53(c)(2), for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. The limit of emissions is equal to -13 dBm.

For operations in the 775-788 MHz, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz (EIRP). The limit of emissions is equal to -40 dBm.

For LTE Band 26 (Part 90):

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

For §90.691(a), RBW = 100 kHz for offset greater than 37.5 kHz from channel edge is allowed.

For LTE Band 66:


According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB. The limit of emission is equal to -13 dBm.

6 Test Arrangements

6.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

6.1.1 Test Setup

Conducted Power Measurement:

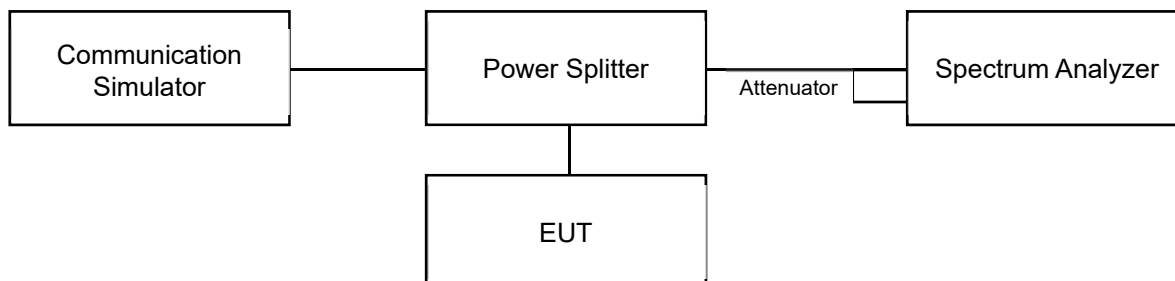

6.1.2 Test Procedure

Conducted Power Measurement:

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology. The power measurement was performed on emulator and power value was measured from power function on emulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Measurement method refers to ANSI C63.26 section 5.2.4.4.

- a. Set span to $2 \times$ to $3 \times$ the OBW.
- b. Set RBW = 1% to 5% of the OBW.
- c. Set VBW $\geq 3 \times$ RBW.
- d. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
- e. Set Sweep time = auto-couple.
- f. Detector = power averaging (rms).
- g. Set sweep trigger to "free run."
- h. Trace average at least 100 traces in power averaging (rms) mode.
- i. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function with band/channel limits set equal to the OBW band edges.
- j. If Duty cycle < 98%, Add $10 \log (1/\text{duty cycle})$ to the measured power level to compute the average power during continuous transmission.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , e.g., dBm or dBW)


P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

6.2 Radiated Spurious Emissions below 1GHz

6.2.1 Test Setup

For radiated emission 30 MHz to 1 GHz

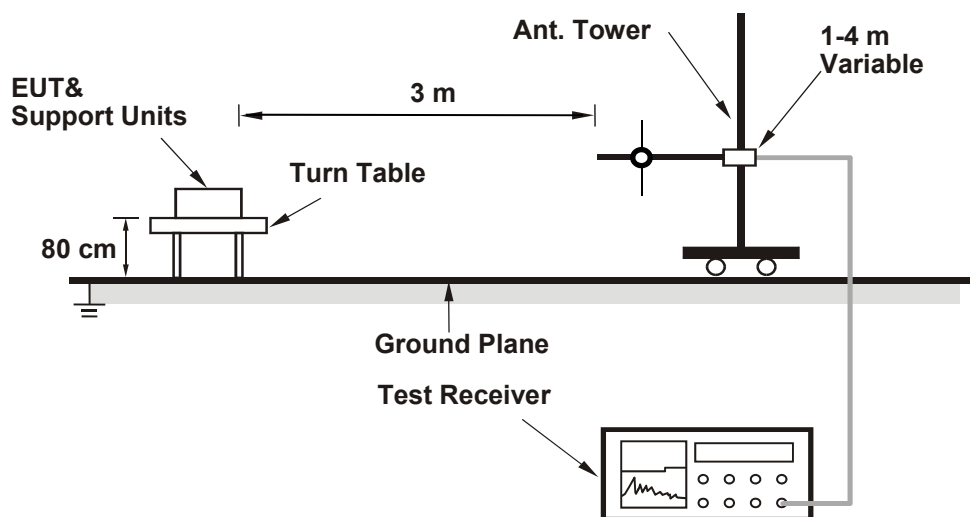

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.2.2 Test Procedure

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following C63.26 section 5.5 and 5.2.7
- $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.


Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
- The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

6.3 Radiated Spurious Emissions above 1GHz

6.3.1 Test Setup

For radiated emission above 1 GHz

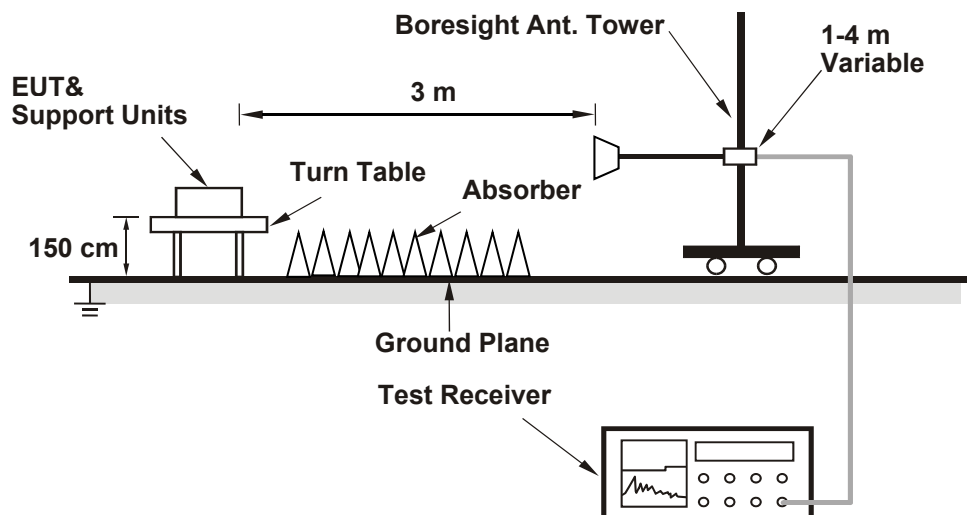

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 1.5 m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following C63.26 section 5.5 and 5.2.7
- $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.

7 Test Results of Test Item

7.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

| | | | | | |
|--------------|----------------|---------------------------|--------------|------------|------------|
| Input Power: | 120 Vac, 60 Hz | Environmental Conditions: | 21°C, 76% RH | Tested By: | Adair Peng |
|--------------|----------------|---------------------------|--------------|------------|------------|

7.1.1 LTE Band 2

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 18700 | 18900 | 19100 |
| | | Frequency (MHz) | | 1860 | 1880 | 1900 |
| 20M | QPSK | 1 | 0 | 21.39 | 21.52 | 21.47 |
| | | 1 | 50 | 21.38 | 21.47 | 21.40 |
| | | 1 | 99 | 21.28 | 21.44 | 21.38 |
| | | 50 | 0 | 20.51 | 20.63 | 20.53 |
| | | 50 | 25 | 20.48 | 20.58 | 20.49 |
| | | 50 | 50 | 20.44 | 20.53 | 20.50 |
| | | 100 | 0 | 20.46 | 20.51 | 20.47 |
| 20M | 16QAM | 1 | 0 | 20.79 | 20.85 | 20.80 |
| | | 1 | 50 | 20.57 | 20.68 | 20.61 |
| | | 1 | 99 | 20.52 | 20.62 | 20.55 |
| | | 50 | 0 | 19.50 | 19.59 | 19.52 |
| | | 50 | 25 | 19.53 | 19.57 | 19.56 |
| | | 50 | 50 | 19.44 | 19.55 | 19.54 |
| | | 100 | 0 | 19.39 | 19.51 | 19.43 |
| 20M | 64QAM | 1 | 0 | 19.36 | 19.54 | 19.44 |
| | | 1 | 50 | 19.40 | 19.51 | 19.50 |
| | | 1 | 99 | 19.44 | 19.48 | 19.47 |
| | | 50 | 0 | 18.47 | 18.62 | 18.55 |
| | | 50 | 25 | 18.40 | 18.53 | 18.48 |
| | | 50 | 50 | 18.41 | 18.52 | 18.51 |
| | | 100 | 0 | 18.47 | 18.61 | 18.55 |
| 20M | 256QAM | 1 | 0 | 16.57 | 16.73 | 16.67 |
| | | 1 | 50 | 16.66 | 16.67 | 16.66 |
| | | 1 | 99 | 16.48 | 16.61 | 16.57 |
| | | 50 | 0 | 16.53 | 16.59 | 16.57 |
| | | 50 | 25 | 16.52 | 16.58 | 16.56 |
| | | 50 | 50 | 16.50 | 16.55 | 16.51 |
| | | 100 | 0 | 16.51 | 16.57 | 16.52 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 18675 | 18900 | 19125 |
| | | Frequency (MHz) | | 1857.5 | 1880 | 1902.5 |
| 15M | QPSK | 1 | 0 | 21.30 | 21.50 | 21.44 |
| | | 1 | 37 | 21.30 | 21.43 | 21.36 |
| | | 1 | 74 | 21.25 | 21.34 | 21.36 |
| | | 36 | 0 | 20.51 | 20.54 | 20.43 |
| | | 36 | 19 | 20.44 | 20.58 | 20.42 |
| | | 36 | 39 | 20.34 | 20.52 | 20.50 |
| | | 75 | 0 | 20.46 | 20.42 | 20.37 |
| 15M | 16QAM | 1 | 0 | 20.78 | 20.77 | 20.74 |
| | | 1 | 37 | 20.47 | 20.63 | 20.56 |
| | | 1 | 74 | 20.43 | 20.57 | 20.48 |
| | | 36 | 0 | 19.47 | 19.56 | 19.49 |
| | | 36 | 19 | 19.47 | 19.50 | 19.56 |
| | | 36 | 39 | 19.37 | 19.54 | 19.49 |
| | | 75 | 0 | 19.34 | 19.42 | 19.36 |
| 15M | 64QAM | 1 | 0 | 19.29 | 19.45 | 19.43 |
| | | 1 | 37 | 19.40 | 19.42 | 19.49 |
| | | 1 | 74 | 19.36 | 19.39 | 19.42 |
| | | 36 | 0 | 18.41 | 18.56 | 18.53 |
| | | 36 | 19 | 18.33 | 18.53 | 18.45 |
| | | 36 | 39 | 18.41 | 18.43 | 18.50 |
| | | 75 | 0 | 18.46 | 18.57 | 18.47 |
| 15M | 256QAM | 1 | 0 | 16.56 | 16.65 | 16.65 |
| | | 1 | 37 | 16.64 | 16.62 | 16.59 |
| | | 1 | 74 | 16.46 | 16.54 | 16.47 |
| | | 36 | 0 | 16.45 | 16.53 | 16.47 |
| | | 36 | 19 | 16.47 | 16.54 | 16.54 |
| | | 36 | 39 | 16.40 | 16.48 | 16.43 |
| | | 75 | 0 | 16.46 | 16.53 | 16.46 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 18650 | 18900 | 19150 |
| | | Frequency (MHz) | | 1855 | 1880 | 1905 |
| 10M | QPSK | 1 | 0 | 21.27 | 21.43 | 21.38 |
| | | 1 | 24 | 21.29 | 21.42 | 21.28 |
| | | 1 | 49 | 21.14 | 21.25 | 21.31 |
| | | 25 | 0 | 20.36 | 20.50 | 20.42 |
| | | 25 | 12 | 20.43 | 20.58 | 20.27 |
| | | 25 | 25 | 20.28 | 20.47 | 20.48 |
| | | 50 | 0 | 20.36 | 20.42 | 20.27 |
| 10M | 16QAM | 1 | 0 | 20.74 | 20.77 | 20.66 |
| | | 1 | 24 | 20.41 | 20.48 | 20.52 |
| | | 1 | 49 | 20.41 | 20.44 | 20.43 |
| | | 25 | 0 | 19.34 | 19.53 | 19.44 |
| | | 25 | 12 | 19.32 | 19.39 | 19.51 |
| | | 25 | 25 | 19.27 | 19.42 | 19.36 |
| | | 50 | 0 | 19.33 | 19.42 | 19.34 |
| 10M | 64QAM | 1 | 0 | 19.14 | 19.39 | 19.34 |
| | | 1 | 24 | 19.35 | 19.33 | 19.44 |
| | | 1 | 49 | 19.26 | 19.25 | 19.28 |
| | | 25 | 0 | 18.34 | 18.43 | 18.39 |
| | | 25 | 12 | 18.33 | 18.51 | 18.35 |
| | | 25 | 25 | 18.38 | 18.40 | 18.45 |
| | | 50 | 0 | 18.44 | 18.45 | 18.38 |
| 10M | 256QAM | 1 | 0 | 16.51 | 16.63 | 16.56 |
| | | 1 | 24 | 16.63 | 16.49 | 16.44 |
| | | 1 | 49 | 16.39 | 16.54 | 16.47 |
| | | 25 | 0 | 16.39 | 16.49 | 16.34 |
| | | 25 | 12 | 16.38 | 16.52 | 16.39 |
| | | 25 | 25 | 16.40 | 16.46 | 16.32 |
| | | 50 | 0 | 16.39 | 16.40 | 16.46 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 18625 | 18900 | 19175 |
| | | Frequency (MHz) | | 1852.5 | 1880 | 1907.5 |
| 5M | QPSK | 1 | 0 | 21.27 | 21.48 | 21.26 |
| | | 1 | 12 | 21.18 | 21.39 | 21.21 |
| | | 1 | 24 | 21.22 | 21.28 | 21.16 |
| | | 12 | 0 | 20.50 | 20.49 | 20.30 |
| | | 12 | 6 | 20.30 | 20.47 | 20.23 |
| | | 12 | 13 | 20.24 | 20.43 | 20.34 |
| | | 25 | 0 | 20.38 | 20.36 | 20.24 |
| 5M | 16QAM | 1 | 0 | 20.70 | 20.62 | 20.62 |
| | | 1 | 12 | 20.38 | 20.60 | 20.41 |
| | | 1 | 24 | 20.32 | 20.48 | 20.48 |
| | | 12 | 0 | 19.46 | 19.43 | 19.47 |
| | | 12 | 6 | 19.45 | 19.42 | 19.41 |
| | | 12 | 13 | 19.33 | 19.50 | 19.47 |
| | | 25 | 0 | 19.23 | 19.35 | 19.30 |
| 5M | 64QAM | 1 | 0 | 19.18 | 19.34 | 19.34 |
| | | 1 | 12 | 19.35 | 19.36 | 19.35 |
| | | 1 | 24 | 19.23 | 19.38 | 19.37 |
| | | 12 | 0 | 18.35 | 18.54 | 18.42 |
| | | 12 | 6 | 18.31 | 18.49 | 18.36 |
| | | 12 | 13 | 18.38 | 18.31 | 18.40 |
| | | 25 | 0 | 18.32 | 18.46 | 18.39 |
| 5M | 256QAM | 1 | 0 | 16.43 | 16.55 | 16.44 |
| | | 1 | 12 | 16.55 | 16.47 | 16.44 |
| | | 1 | 24 | 16.40 | 16.45 | 16.37 |
| | | 12 | 0 | 16.45 | 16.53 | 16.24 |
| | | 12 | 6 | 16.39 | 16.39 | 16.34 |
| | | 12 | 13 | 16.27 | 16.36 | 16.19 |
| | | 25 | 0 | 16.32 | 16.39 | 16.43 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 18615 | 18900 | 19185 |
| | | Frequency (MHz) | | 1851.5 | 1880 | 1908.5 |
| 3M | QPSK | 1 | 0 | 21.28 | 21.37 | 21.37 |
| | | 1 | 7 | 21.18 | 21.38 | 21.25 |
| | | 1 | 14 | 21.11 | 21.21 | 21.25 |
| | | 8 | 0 | 20.47 | 20.39 | 20.31 |
| | | 8 | 3 | 20.38 | 20.47 | 20.27 |
| | | 8 | 7 | 20.19 | 20.43 | 20.41 |
| | | 15 | 0 | 20.46 | 20.39 | 20.37 |
| 3M | 16QAM | 1 | 0 | 20.72 | 20.77 | 20.59 |
| | | 1 | 7 | 20.42 | 20.51 | 20.53 |
| | | 1 | 14 | 20.29 | 20.49 | 20.43 |
| | | 8 | 0 | 19.33 | 19.50 | 19.46 |
| | | 8 | 3 | 19.32 | 19.45 | 19.55 |
| | | 8 | 7 | 19.28 | 19.44 | 19.47 |
| | | 15 | 0 | 19.34 | 19.41 | 19.32 |
| 3M | 64QAM | 1 | 0 | 19.24 | 19.33 | 19.30 |
| | | 1 | 7 | 19.37 | 19.41 | 19.36 |
| | | 1 | 14 | 19.27 | 19.29 | 19.39 |
| | | 8 | 0 | 18.38 | 18.50 | 18.50 |
| | | 8 | 3 | 18.24 | 18.50 | 18.38 |
| | | 8 | 7 | 18.32 | 18.36 | 18.39 |
| | | 15 | 0 | 18.39 | 18.51 | 18.35 |
| 3M | 256QAM | 1 | 0 | 16.49 | 16.59 | 16.58 |
| | | 1 | 7 | 16.60 | 16.58 | 16.53 |
| | | 1 | 14 | 16.35 | 16.51 | 16.48 |
| | | 8 | 0 | 15.41 | 15.48 | 15.45 |
| | | 8 | 3 | 15.34 | 15.43 | 15.36 |
| | | 8 | 7 | 15.37 | 15.35 | 15.50 |
| | | 15 | 0 | 15.26 | 15.39 | 15.42 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 18607 | 18900 | 19193 |
| | | Frequency (MHz) | | 1850.7 | 1880 | 1909.3 |
| 1.4M | QPSK | 1 | 0 | 21.43 | 21.48 | 21.49 |
| | | 1 | 2 | 21.50 | 21.47 | 21.51 |
| | | 1 | 5 | 21.42 | 21.44 | 21.46 |
| | | 3 | 0 | 21.41 | 21.40 | 21.33 |
| | | 3 | 1 | 21.40 | 21.51 | 21.40 |
| | | 3 | 3 | 21.25 | 21.33 | 21.39 |
| | | 6 | 0 | 20.33 | 20.45 | 20.61 |
| 1.4M | 16QAM | 1 | 0 | 20.77 | 20.69 | 20.59 |
| | | 1 | 2 | 20.36 | 20.50 | 20.42 |
| | | 1 | 5 | 20.29 | 20.51 | 20.47 |
| | | 3 | 0 | 20.37 | 20.42 | 20.35 |
| | | 3 | 1 | 20.35 | 20.35 | 20.49 |
| | | 3 | 3 | 20.27 | 20.51 | 20.45 |
| | | 6 | 0 | 19.29 | 19.33 | 19.26 |
| 1.4M | 64QAM | 1 | 0 | 19.23 | 19.43 | 19.43 |
| | | 1 | 2 | 19.36 | 19.33 | 19.49 |
| | | 1 | 5 | 19.27 | 19.39 | 19.37 |
| | | 3 | 0 | 19.34 | 19.55 | 19.52 |
| | | 3 | 1 | 19.25 | 19.50 | 19.35 |
| | | 3 | 3 | 19.39 | 19.36 | 19.46 |
| | | 6 | 0 | 18.35 | 18.56 | 18.47 |
| 1.4M | 256QAM | 1 | 0 | 16.48 | 16.53 | 16.62 |
| | | 1 | 2 | 16.54 | 16.62 | 16.50 |
| | | 1 | 5 | 16.32 | 16.39 | 16.39 |
| | | 3 | 0 | 16.36 | 16.49 | 16.41 |
| | | 3 | 1 | 16.32 | 16.48 | 16.50 |
| | | 3 | 3 | 16.25 | 16.46 | 16.38 |
| | | 6 | 0 | 16.39 | 16.38 | 16.39 |



EIRP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------------|-------|
| | | Channel | | 18700 | 18900 | 19100 |
| | | Frequency (MHz) | | 1860 | 1880 | 1900 |
| 20M | QPSK | 1 | 0 | 26.44 | 26.57 | 26.52 |
| | | 1 | 50 | 26.43 | 26.52 | 26.45 |
| | | 1 | 99 | 26.33 | 26.49 | 26.43 |
| | | 50 | 0 | 25.56 | 25.68 | 25.58 |
| | | 50 | 25 | 25.53 | 25.63 | 25.54 |
| | | 50 | 50 | 25.49 | 25.58 | 25.55 |
| | | 100 | 0 | 25.51 | 25.56 | 25.52 |
| 20M | 16QAM | 1 | 0 | 25.84 | 25.90 | 25.85 |
| | | 1 | 50 | 25.62 | 25.73 | 25.66 |
| | | 1 | 99 | 25.57 | 25.67 | 25.60 |
| | | 50 | 0 | 24.55 | 24.64 | 24.57 |
| | | 50 | 25 | 24.58 | 24.62 | 24.61 |
| | | 50 | 50 | 24.49 | 24.60 | 24.59 |
| | | 100 | 0 | 24.44 | 24.56 | 24.48 |
| 20M | 64QAM | 1 | 0 | 24.41 | 24.59 | 24.49 |
| | | 1 | 50 | 24.45 | 24.56 | 24.55 |
| | | 1 | 99 | 24.49 | 24.53 | 24.52 |
| | | 50 | 0 | 23.52 | 23.67 | 23.60 |
| | | 50 | 25 | 23.45 | 23.58 | 23.53 |
| | | 50 | 50 | 23.46 | 23.57 | 23.56 |
| | | 100 | 0 | 23.52 | 23.66 | 23.60 |
| 20M | 256QAM | 1 | 0 | 21.62 | 21.78 | 21.72 |
| | | 1 | 50 | 21.71 | 21.72 | 21.71 |
| | | 1 | 99 | 21.53 | 21.66 | 21.62 |
| | | 50 | 0 | 21.58 | 21.64 | 21.62 |
| | | 50 | 25 | 21.57 | 21.63 | 21.61 |
| | | 50 | 50 | 21.55 | 21.60 | 21.56 |
| | | 100 | 0 | 21.56 | 21.62 | 21.57 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 18675 | 18900 | 19125 |
| | | Frequency (MHz) | | 1857.5 | 1880 | 1902.5 |
| 15M | QPSK | 1 | 0 | 26.35 | 26.55 | 26.49 |
| | | 1 | 37 | 26.35 | 26.48 | 26.41 |
| | | 1 | 74 | 26.30 | 26.39 | 26.41 |
| | | 36 | 0 | 25.56 | 25.59 | 25.48 |
| | | 36 | 19 | 25.49 | 25.63 | 25.47 |
| | | 36 | 39 | 25.39 | 25.57 | 25.55 |
| | | 75 | 0 | 25.51 | 25.47 | 25.42 |
| 15M | 16QAM | 1 | 0 | 25.83 | 25.82 | 25.79 |
| | | 1 | 37 | 25.52 | 25.68 | 25.61 |
| | | 1 | 74 | 25.48 | 25.62 | 25.53 |
| | | 36 | 0 | 24.52 | 24.61 | 24.54 |
| | | 36 | 19 | 24.52 | 24.55 | 24.61 |
| | | 36 | 39 | 24.42 | 24.59 | 24.54 |
| | | 75 | 0 | 24.39 | 24.47 | 24.41 |
| 15M | 64QAM | 1 | 0 | 24.34 | 24.50 | 24.48 |
| | | 1 | 37 | 24.45 | 24.47 | 24.54 |
| | | 1 | 74 | 24.41 | 24.44 | 24.47 |
| | | 36 | 0 | 23.46 | 23.61 | 23.58 |
| | | 36 | 19 | 23.38 | 23.58 | 23.50 |
| | | 36 | 39 | 23.46 | 23.48 | 23.55 |
| | | 75 | 0 | 23.51 | 23.62 | 23.52 |
| 15M | 256QAM | 1 | 0 | 21.61 | 21.70 | 21.70 |
| | | 1 | 37 | 21.69 | 21.67 | 21.64 |
| | | 1 | 74 | 21.51 | 21.59 | 21.52 |
| | | 36 | 0 | 21.50 | 21.58 | 21.52 |
| | | 36 | 19 | 21.52 | 21.59 | 21.59 |
| | | 36 | 39 | 21.45 | 21.53 | 21.48 |
| | | 75 | 0 | 21.51 | 21.58 | 21.51 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------------|--------------|
| | | Channel | | 18650 | 18900 | 19150 |
| | | Frequency (MHz) | | 1855 | 1880 | 1905 |
| 10M | QPSK | 1 | 0 | 26.32 | 26.48 | 26.43 |
| | | 1 | 24 | 26.34 | 26.47 | 26.33 |
| | | 1 | 49 | 26.19 | 26.30 | 26.36 |
| | | 25 | 0 | 25.41 | 25.55 | 25.47 |
| | | 25 | 12 | 25.48 | 25.63 | 25.32 |
| | | 25 | 25 | 25.33 | 25.52 | 25.53 |
| | | 50 | 0 | 25.41 | 25.47 | 25.32 |
| 10M | 16QAM | 1 | 0 | 25.79 | 25.82 | 25.71 |
| | | 1 | 24 | 25.46 | 25.53 | 25.57 |
| | | 1 | 49 | 25.46 | 25.49 | 25.48 |
| | | 25 | 0 | 24.39 | 24.58 | 24.49 |
| | | 25 | 12 | 24.37 | 24.44 | 24.56 |
| | | 25 | 25 | 24.32 | 24.47 | 24.41 |
| | | 50 | 0 | 24.38 | 24.47 | 24.39 |
| 10M | 64QAM | 1 | 0 | 24.19 | 24.44 | 24.39 |
| | | 1 | 24 | 24.40 | 24.38 | 24.49 |
| | | 1 | 49 | 24.31 | 24.30 | 24.33 |
| | | 25 | 0 | 23.39 | 23.48 | 23.44 |
| | | 25 | 12 | 23.38 | 23.56 | 23.40 |
| | | 25 | 25 | 23.43 | 23.45 | 23.50 |
| | | 50 | 0 | 23.49 | 23.50 | 23.43 |
| 10M | 256QAM | 1 | 0 | 21.56 | 21.68 | 21.61 |
| | | 1 | 24 | 21.68 | 21.54 | 21.49 |
| | | 1 | 49 | 21.44 | 21.59 | 21.52 |
| | | 25 | 0 | 21.44 | 21.54 | 21.39 |
| | | 25 | 12 | 21.43 | 21.57 | 21.44 |
| | | 25 | 25 | 21.45 | 21.51 | 21.37 |
| | | 50 | 0 | 21.44 | 21.45 | 21.51 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 18625 | 18900 | 19175 |
| | | Frequency (MHz) | | 1852.5 | 1880 | 1907.5 |
| 5M | QPSK | 1 | 0 | 26.32 | 26.53 | 26.31 |
| | | 1 | 12 | 26.23 | 26.44 | 26.26 |
| | | 1 | 24 | 26.27 | 26.33 | 26.21 |
| | | 12 | 0 | 25.55 | 25.54 | 25.35 |
| | | 12 | 6 | 25.35 | 25.52 | 25.28 |
| | | 12 | 13 | 25.29 | 25.48 | 25.39 |
| | | 25 | 0 | 25.43 | 25.41 | 25.29 |
| 5M | 16QAM | 1 | 0 | 25.75 | 25.67 | 25.67 |
| | | 1 | 12 | 25.43 | 25.65 | 25.46 |
| | | 1 | 24 | 25.37 | 25.53 | 25.53 |
| | | 12 | 0 | 24.51 | 24.48 | 24.52 |
| | | 12 | 6 | 24.50 | 24.47 | 24.46 |
| | | 12 | 13 | 24.38 | 24.55 | 24.52 |
| | | 25 | 0 | 24.28 | 24.40 | 24.35 |
| 5M | 64QAM | 1 | 0 | 24.23 | 24.39 | 24.39 |
| | | 1 | 12 | 24.40 | 24.41 | 24.40 |
| | | 1 | 24 | 24.28 | 24.43 | 24.42 |
| | | 12 | 0 | 23.40 | 23.59 | 23.47 |
| | | 12 | 6 | 23.36 | 23.54 | 23.41 |
| | | 12 | 13 | 23.43 | 23.36 | 23.45 |
| | | 25 | 0 | 23.37 | 23.51 | 23.44 |
| 5M | 256QAM | 1 | 0 | 21.48 | 21.60 | 21.49 |
| | | 1 | 12 | 21.60 | 21.52 | 21.49 |
| | | 1 | 24 | 21.45 | 21.50 | 21.42 |
| | | 12 | 0 | 21.50 | 21.58 | 21.29 |
| | | 12 | 6 | 21.44 | 21.44 | 21.39 |
| | | 12 | 13 | 21.32 | 21.41 | 21.24 |
| | | 25 | 0 | 21.37 | 21.44 | 21.48 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 18615 | 18900 | 19185 |
| | | Frequency (MHz) | | 1851.5 | 1880 | 1908.5 |
| 3M | QPSK | 1 | 0 | 26.33 | 26.42 | 26.42 |
| | | 1 | 7 | 26.23 | 26.43 | 26.30 |
| | | 1 | 14 | 26.16 | 26.26 | 26.30 |
| | | 8 | 0 | 25.52 | 25.44 | 25.36 |
| | | 8 | 3 | 25.43 | 25.52 | 25.32 |
| | | 8 | 7 | 25.24 | 25.48 | 25.46 |
| | | 15 | 0 | 25.51 | 25.44 | 25.42 |
| 3M | 16QAM | 1 | 0 | 25.77 | 25.82 | 25.64 |
| | | 1 | 7 | 25.47 | 25.56 | 25.58 |
| | | 1 | 14 | 25.34 | 25.54 | 25.48 |
| | | 8 | 0 | 24.38 | 24.55 | 24.51 |
| | | 8 | 3 | 24.37 | 24.50 | 24.60 |
| | | 8 | 7 | 24.33 | 24.49 | 24.52 |
| | | 15 | 0 | 24.39 | 24.46 | 24.37 |
| 3M | 64QAM | 1 | 0 | 24.29 | 24.38 | 24.35 |
| | | 1 | 7 | 24.42 | 24.46 | 24.41 |
| | | 1 | 14 | 24.32 | 24.34 | 24.44 |
| | | 8 | 0 | 23.43 | 23.55 | 23.55 |
| | | 8 | 3 | 23.29 | 23.55 | 23.43 |
| | | 8 | 7 | 23.37 | 23.41 | 23.44 |
| | | 15 | 0 | 23.44 | 23.56 | 23.40 |
| 3M | 256QAM | 1 | 0 | 21.54 | 21.64 | 21.63 |
| | | 1 | 7 | 21.65 | 21.63 | 21.58 |
| | | 1 | 14 | 21.40 | 21.56 | 21.53 |
| | | 8 | 0 | 20.46 | 20.53 | 20.50 |
| | | 8 | 3 | 20.39 | 20.48 | 20.41 |
| | | 8 | 7 | 20.42 | 20.40 | 20.55 |
| | | 15 | 0 | 20.31 | 20.44 | 20.47 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 18607 | 18900 | 19193 |
| | | Frequency (MHz) | | 1850.7 | 1880 | 1909.3 |
| 1.4M | QPSK | 1 | 0 | 26.48 | 26.53 | 26.54 |
| | | 1 | 2 | 26.55 | 26.52 | 26.56 |
| | | 1 | 5 | 26.47 | 26.49 | 26.51 |
| | | 3 | 0 | 26.46 | 26.45 | 26.38 |
| | | 3 | 1 | 26.45 | 26.56 | 26.45 |
| | | 3 | 3 | 26.30 | 26.38 | 26.44 |
| | | 6 | 0 | 25.38 | 25.50 | 25.66 |
| 1.4M | 16QAM | 1 | 0 | 25.82 | 25.74 | 25.64 |
| | | 1 | 2 | 25.41 | 25.55 | 25.47 |
| | | 1 | 5 | 25.34 | 25.56 | 25.52 |
| | | 3 | 0 | 25.42 | 25.47 | 25.40 |
| | | 3 | 1 | 25.40 | 25.40 | 25.54 |
| | | 3 | 3 | 25.32 | 25.56 | 25.50 |
| | | 6 | 0 | 24.34 | 24.38 | 24.31 |
| 1.4M | 64QAM | 1 | 0 | 24.28 | 24.48 | 24.48 |
| | | 1 | 2 | 24.41 | 24.38 | 24.54 |
| | | 1 | 5 | 24.32 | 24.44 | 24.42 |
| | | 3 | 0 | 24.39 | 24.60 | 24.57 |
| | | 3 | 1 | 24.30 | 24.55 | 24.40 |
| | | 3 | 3 | 24.44 | 24.41 | 24.51 |
| | | 6 | 0 | 23.40 | 23.61 | 23.52 |
| 1.4M | 256QAM | 1 | 0 | 21.53 | 21.58 | 21.67 |
| | | 1 | 2 | 21.59 | 21.67 | 21.55 |
| | | 1 | 5 | 21.37 | 21.44 | 21.44 |
| | | 3 | 0 | 21.41 | 21.54 | 21.46 |
| | | 3 | 1 | 21.37 | 21.53 | 21.55 |
| | | 3 | 3 | 21.30 | 21.51 | 21.43 |
| | | 6 | 0 | 21.44 | 21.43 | 21.44 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.2 LTE Band 4

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------|-------|
| | | Channel | | 20050 | 20175 | 20300 |
| | | Frequency (MHz) | | 1720 | 1732.5 | 1745 |
| 20M | QPSK | 1 | 0 | 21.42 | 21.47 | 21.38 |
| | | 1 | 50 | 21.38 | 21.43 | 21.33 |
| | | 1 | 99 | 21.34 | 21.39 | 21.27 |
| | | 50 | 0 | 20.42 | 20.50 | 20.32 |
| | | 50 | 25 | 20.33 | 20.43 | 20.27 |
| | | 50 | 50 | 20.36 | 20.38 | 20.33 |
| | | 100 | 0 | 20.38 | 20.40 | 20.28 |
| 20M | 16QAM | 1 | 0 | 20.55 | 20.57 | 20.51 |
| | | 1 | 50 | 20.48 | 20.55 | 20.40 |
| | | 1 | 99 | 20.41 | 20.47 | 20.36 |
| | | 50 | 0 | 19.43 | 19.47 | 19.41 |
| | | 50 | 25 | 19.37 | 19.42 | 19.33 |
| | | 50 | 50 | 19.37 | 19.40 | 19.30 |
| | | 100 | 0 | 19.34 | 19.41 | 19.25 |
| 20M | 64QAM | 1 | 0 | 19.32 | 19.38 | 19.27 |
| | | 1 | 50 | 19.33 | 19.35 | 19.27 |
| | | 1 | 99 | 19.24 | 19.31 | 19.22 |
| | | 50 | 0 | 18.54 | 18.58 | 18.52 |
| | | 50 | 25 | 18.40 | 18.48 | 18.31 |
| | | 50 | 50 | 18.40 | 18.41 | 18.32 |
| | | 100 | 0 | 18.44 | 18.45 | 18.38 |
| 20M | 256QAM | 1 | 0 | 16.45 | 16.53 | 16.37 |
| | | 1 | 50 | 16.51 | 16.51 | 16.41 |
| | | 1 | 99 | 16.39 | 16.46 | 16.35 |
| | | 50 | 0 | 16.40 | 16.48 | 16.37 |
| | | 50 | 25 | 16.31 | 16.41 | 16.28 |
| | | 50 | 50 | 16.33 | 16.35 | 16.27 |
| | | 100 | 0 | 16.36 | 16.43 | 16.26 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 20025 | 20175 | 20325 |
| | | Frequency (MHz) | | 1717.5 | 1732.5 | 1747.5 |
| 15M | QPSK | 1 | 0 | 21.35 | 21.44 | 21.35 |
| | | 1 | 37 | 21.29 | 21.38 | 21.24 |
| | | 1 | 74 | 21.27 | 21.34 | 21.21 |
| | | 36 | 0 | 20.41 | 20.41 | 20.22 |
| | | 36 | 19 | 20.23 | 20.35 | 20.26 |
| | | 36 | 39 | 20.33 | 20.33 | 20.31 |
| | | 75 | 0 | 20.31 | 20.30 | 20.28 |
| 15M | 16QAM | 1 | 0 | 20.49 | 20.57 | 20.43 |
| | | 1 | 37 | 20.40 | 20.55 | 20.33 |
| | | 1 | 74 | 20.33 | 20.43 | 20.29 |
| | | 36 | 0 | 19.42 | 19.41 | 19.38 |
| | | 36 | 19 | 19.30 | 19.40 | 19.29 |
| | | 36 | 39 | 19.29 | 19.40 | 19.26 |
| | | 75 | 0 | 19.24 | 19.37 | 19.18 |
| 15M | 64QAM | 1 | 0 | 19.25 | 19.31 | 19.19 |
| | | 1 | 37 | 19.31 | 19.30 | 19.19 |
| | | 1 | 74 | 19.19 | 19.26 | 19.16 |
| | | 36 | 0 | 18.47 | 18.50 | 18.42 |
| | | 36 | 19 | 18.39 | 18.46 | 18.25 |
| | | 36 | 39 | 18.37 | 18.40 | 18.27 |
| | | 75 | 0 | 18.44 | 18.38 | 18.32 |
| 15M | 256QAM | 1 | 0 | 16.40 | 16.52 | 16.32 |
| | | 1 | 37 | 16.50 | 16.50 | 16.31 |
| | | 1 | 74 | 16.36 | 16.41 | 16.31 |
| | | 36 | 0 | 16.35 | 16.43 | 16.35 |
| | | 36 | 19 | 16.28 | 16.38 | 16.23 |
| | | 36 | 39 | 16.27 | 16.33 | 16.17 |
| | | 75 | 0 | 16.34 | 16.39 | 16.25 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------|-------|
| | | Channel | | 20000 | 20175 | 20350 |
| | | Frequency (MHz) | | 1715 | 1732.5 | 1750 |
| 10M | QPSK | 1 | 0 | 21.23 | 21.43 | 21.27 |
| | | 1 | 24 | 21.18 | 21.26 | 21.12 |
| | | 1 | 49 | 21.14 | 21.30 | 21.07 |
| | | 25 | 0 | 20.30 | 20.27 | 20.15 |
| | | 25 | 12 | 20.12 | 20.32 | 20.17 |
| | | 25 | 25 | 20.26 | 20.32 | 20.31 |
| | | 50 | 0 | 20.26 | 20.21 | 20.26 |
| 10M | 16QAM | 1 | 0 | 20.49 | 20.45 | 20.40 |
| | | 1 | 24 | 20.27 | 20.48 | 20.20 |
| | | 1 | 49 | 20.31 | 20.29 | 20.23 |
| | | 25 | 0 | 19.36 | 19.35 | 19.33 |
| | | 25 | 12 | 19.20 | 19.36 | 19.17 |
| | | 25 | 25 | 19.18 | 19.35 | 19.22 |
| | | 50 | 0 | 19.13 | 19.27 | 19.13 |
| 10M | 64QAM | 1 | 0 | 19.20 | 19.25 | 19.16 |
| | | 1 | 24 | 19.28 | 19.23 | 19.08 |
| | | 1 | 49 | 19.18 | 19.21 | 19.07 |
| | | 25 | 0 | 18.34 | 18.41 | 18.27 |
| | | 25 | 12 | 18.31 | 18.32 | 18.14 |
| | | 25 | 25 | 18.35 | 18.34 | 18.19 |
| | | 50 | 0 | 18.41 | 18.24 | 18.31 |
| 10M | 256QAM | 1 | 0 | 16.31 | 16.38 | 16.22 |
| | | 1 | 24 | 16.46 | 16.36 | 16.20 |
| | | 1 | 49 | 16.22 | 16.36 | 16.28 |
| | | 25 | 0 | 16.22 | 16.40 | 16.31 |
| | | 25 | 12 | 16.17 | 16.38 | 16.10 |
| | | 25 | 25 | 16.15 | 16.23 | 16.05 |
| | | 50 | 0 | 16.23 | 16.36 | 16.15 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 19975 | 20175 | 20375 |
| | | Frequency (MHz) | | 1712.5 | 1732.5 | 1752.5 |
| 5M | QPSK | 1 | 0 | 21.20 | 21.41 | 21.23 |
| | | 1 | 12 | 21.27 | 21.33 | 21.12 |
| | | 1 | 24 | 21.23 | 21.30 | 21.02 |
| | | 12 | 0 | 20.30 | 20.35 | 20.02 |
| | | 12 | 6 | 20.11 | 20.20 | 20.14 |
| | | 12 | 13 | 20.25 | 20.31 | 20.20 |
| | | 25 | 0 | 20.31 | 20.15 | 20.23 |
| 5M | 16QAM | 1 | 0 | 20.36 | 20.51 | 20.42 |
| | | 1 | 12 | 20.30 | 20.40 | 20.25 |
| | | 1 | 24 | 20.21 | 20.36 | 20.19 |
| | | 12 | 0 | 19.41 | 19.33 | 19.26 |
| | | 12 | 6 | 19.15 | 19.30 | 19.28 |
| | | 12 | 13 | 19.16 | 19.28 | 19.18 |
| | | 25 | 0 | 19.12 | 19.22 | 19.05 |
| 5M | 64QAM | 1 | 0 | 19.11 | 19.29 | 19.16 |
| | | 1 | 12 | 19.17 | 19.15 | 19.10 |
| | | 1 | 24 | 19.08 | 19.18 | 19.06 |
| | | 12 | 0 | 18.36 | 18.47 | 18.38 |
| | | 12 | 6 | 18.34 | 18.32 | 18.13 |
| | | 12 | 13 | 18.28 | 18.30 | 18.22 |
| | | 25 | 0 | 18.41 | 18.33 | 18.21 |
| 5M | 256QAM | 1 | 0 | 16.35 | 16.41 | 16.22 |
| | | 1 | 12 | 16.47 | 16.49 | 16.07 |
| | | 1 | 24 | 16.31 | 16.39 | 16.15 |
| | | 12 | 0 | 16.32 | 16.38 | 16.26 |
| | | 12 | 6 | 16.21 | 16.29 | 15.95 |
| | | 12 | 13 | 16.12 | 16.31 | 16.05 |
| | | 25 | 0 | 16.27 | 16.28 | 16.11 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 19965 | 20175 | 20385 |
| | | Frequency (MHz) | | 1711.5 | 1732.5 | 1753.5 |
| 3M | QPSK | 1 | 0 | 21.26 | 21.33 | 21.21 |
| | | 1 | 7 | 21.27 | 21.32 | 21.18 |
| | | 1 | 14 | 21.27 | 21.29 | 21.11 |
| | | 8 | 0 | 20.29 | 20.32 | 20.13 |
| | | 8 | 3 | 20.20 | 20.20 | 20.17 |
| | | 8 | 7 | 20.18 | 20.27 | 20.22 |
| | | 15 | 0 | 20.24 | 20.17 | 20.15 |
| 3M | 16QAM | 1 | 0 | 20.49 | 20.43 | 20.30 |
| | | 1 | 7 | 20.28 | 20.52 | 20.30 |
| | | 1 | 14 | 20.22 | 20.33 | 20.18 |
| | | 8 | 0 | 19.37 | 19.35 | 19.33 |
| | | 8 | 3 | 19.28 | 19.39 | 19.18 |
| | | 8 | 7 | 19.25 | 19.29 | 19.21 |
| | | 15 | 0 | 19.09 | 19.24 | 19.15 |
| 3M | 64QAM | 1 | 0 | 19.21 | 19.17 | 19.05 |
| | | 1 | 7 | 19.21 | 19.27 | 19.06 |
| | | 1 | 14 | 19.16 | 19.14 | 19.04 |
| | | 8 | 0 | 18.42 | 18.40 | 18.41 |
| | | 8 | 3 | 18.29 | 18.32 | 18.14 |
| | | 8 | 7 | 18.25 | 18.28 | 18.16 |
| | | 15 | 0 | 18.38 | 18.26 | 18.20 |
| 3M | 256QAM | 1 | 0 | 16.40 | 16.50 | 16.30 |
| | | 1 | 7 | 16.44 | 16.41 | 16.25 |
| | | 1 | 14 | 16.24 | 16.35 | 16.29 |
| | | 8 | 0 | 16.25 | 16.43 | 16.21 |
| | | 8 | 3 | 16.28 | 16.29 | 16.15 |
| | | 8 | 7 | 16.12 | 16.19 | 16.08 |
| | | 15 | 0 | 16.20 | 16.25 | 16.11 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 19957 | 20175 | 20393 |
| | | Frequency (MHz) | | 1710.7 | 1732.5 | 1754.3 |
| 1.4M | QPSK | 1 | 0 | 21.22 | 21.39 | 21.28 |
| | | 1 | 2 | 21.28 | 21.34 | 21.12 |
| | | 1 | 5 | 21.16 | 21.26 | 21.07 |
| | | 3 | 0 | 21.39 | 21.41 | 21.17 |
| | | 3 | 1 | 21.13 | 21.30 | 21.23 |
| | | 3 | 3 | 21.21 | 21.27 | 21.17 |
| | | 6 | 0 | 20.20 | 20.30 | 20.21 |
| 1.4M | 16QAM | 1 | 0 | 20.43 | 20.48 | 20.37 |
| | | 1 | 2 | 20.26 | 20.52 | 20.25 |
| | | 1 | 5 | 20.18 | 20.30 | 20.24 |
| | | 3 | 0 | 20.31 | 20.37 | 20.38 |
| | | 3 | 1 | 20.16 | 20.39 | 20.26 |
| | | 3 | 3 | 20.25 | 20.33 | 20.14 |
| | | 6 | 0 | 19.24 | 19.37 | 19.03 |
| 1.4M | 64QAM | 1 | 0 | 19.20 | 19.30 | 19.09 |
| | | 1 | 2 | 19.25 | 19.25 | 19.12 |
| | | 1 | 5 | 19.12 | 19.26 | 19.11 |
| | | 3 | 0 | 19.43 | 19.44 | 19.38 |
| | | 3 | 1 | 19.28 | 19.37 | 19.22 |
| | | 3 | 3 | 19.33 | 19.35 | 19.15 |
| | | 6 | 0 | 18.41 | 18.36 | 18.18 |
| 1.4M | 256QAM | 1 | 0 | 16.31 | 16.51 | 16.18 |
| | | 1 | 2 | 16.36 | 16.47 | 16.31 |
| | | 1 | 5 | 16.33 | 16.37 | 16.19 |
| | | 3 | 0 | 16.31 | 16.39 | 16.34 |
| | | 3 | 1 | 16.19 | 16.27 | 16.08 |
| | | 3 | 3 | 16.21 | 16.18 | 16.03 |
| | | 6 | 0 | 16.27 | 16.35 | 16.22 |



EIRP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------------|-------|
| | | Channel | | 20050 | 20175 | 20300 |
| | | Frequency (MHz) | | 1720 | 1732.5 | 1745 |
| 20M | QPSK | 1 | 0 | 26.26 | 26.31 | 26.22 |
| | | 1 | 50 | 26.22 | 26.27 | 26.17 |
| | | 1 | 99 | 26.18 | 26.23 | 26.11 |
| | | 50 | 0 | 25.26 | 25.34 | 25.16 |
| | | 50 | 25 | 25.17 | 25.27 | 25.11 |
| | | 50 | 50 | 25.20 | 25.22 | 25.17 |
| | | 100 | 0 | 25.22 | 25.24 | 25.12 |
| 20M | 16QAM | 1 | 0 | 25.39 | 25.41 | 25.35 |
| | | 1 | 50 | 25.32 | 25.39 | 25.24 |
| | | 1 | 99 | 25.25 | 25.31 | 25.20 |
| | | 50 | 0 | 24.27 | 24.31 | 24.25 |
| | | 50 | 25 | 24.21 | 24.26 | 24.17 |
| | | 50 | 50 | 24.21 | 24.24 | 24.14 |
| | | 100 | 0 | 24.18 | 24.25 | 24.09 |
| 20M | 64QAM | 1 | 0 | 24.16 | 24.22 | 24.11 |
| | | 1 | 50 | 24.17 | 24.19 | 24.11 |
| | | 1 | 99 | 24.08 | 24.15 | 24.06 |
| | | 50 | 0 | 23.38 | 23.42 | 23.36 |
| | | 50 | 25 | 23.24 | 23.32 | 23.15 |
| | | 50 | 50 | 23.24 | 23.25 | 23.16 |
| | | 100 | 0 | 23.28 | 23.29 | 23.22 |
| 20M | 256QAM | 1 | 0 | 21.29 | 21.37 | 21.21 |
| | | 1 | 50 | 21.35 | 21.35 | 21.25 |
| | | 1 | 99 | 21.23 | 21.30 | 21.19 |
| | | 50 | 0 | 21.24 | 21.32 | 21.21 |
| | | 50 | 25 | 21.15 | 21.25 | 21.12 |
| | | 50 | 50 | 21.17 | 21.19 | 21.11 |
| | | 100 | 0 | 21.20 | 21.27 | 21.10 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 20025 | 20175 | 20325 |
| | | Frequency (MHz) | | 1717.5 | 1732.5 | 1747.5 |
| 15M | QPSK | 1 | 0 | 26.19 | 26.28 | 26.19 |
| | | 1 | 37 | 26.13 | 26.22 | 26.08 |
| | | 1 | 74 | 26.11 | 26.18 | 26.05 |
| | | 36 | 0 | 25.25 | 25.25 | 25.06 |
| | | 36 | 19 | 25.07 | 25.19 | 25.10 |
| | | 36 | 39 | 25.17 | 25.17 | 25.15 |
| | | 75 | 0 | 25.15 | 25.14 | 25.12 |
| 15M | 16QAM | 1 | 0 | 25.33 | 25.41 | 25.27 |
| | | 1 | 37 | 25.24 | 25.39 | 25.17 |
| | | 1 | 74 | 25.17 | 25.27 | 25.13 |
| | | 36 | 0 | 24.26 | 24.25 | 24.22 |
| | | 36 | 19 | 24.14 | 24.24 | 24.13 |
| | | 36 | 39 | 24.13 | 24.24 | 24.10 |
| | | 75 | 0 | 24.08 | 24.21 | 24.02 |
| 15M | 64QAM | 1 | 0 | 24.09 | 24.15 | 24.03 |
| | | 1 | 37 | 24.15 | 24.14 | 24.03 |
| | | 1 | 74 | 24.03 | 24.10 | 24.00 |
| | | 36 | 0 | 23.31 | 23.34 | 23.26 |
| | | 36 | 19 | 23.23 | 23.30 | 23.09 |
| | | 36 | 39 | 23.21 | 23.24 | 23.11 |
| | | 75 | 0 | 23.28 | 23.22 | 23.16 |
| 15M | 256QAM | 1 | 0 | 21.24 | 21.36 | 21.16 |
| | | 1 | 37 | 21.34 | 21.34 | 21.15 |
| | | 1 | 74 | 21.20 | 21.25 | 21.15 |
| | | 36 | 0 | 21.19 | 21.27 | 21.19 |
| | | 36 | 19 | 21.12 | 21.22 | 21.07 |
| | | 36 | 39 | 21.11 | 21.17 | 21.01 |
| | | 75 | 0 | 21.18 | 21.23 | 21.09 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 20000 | 20175 | 20350 |
| | | Frequency (MHz) | | 1715 | 1732.5 | 1750 |
| 10M | QPSK | 1 | 0 | 26.07 | 26.27 | 26.11 |
| | | 1 | 24 | 26.02 | 26.10 | 25.96 |
| | | 1 | 49 | 25.98 | 26.14 | 25.91 |
| | | 25 | 0 | 25.14 | 25.11 | 24.99 |
| | | 25 | 12 | 24.96 | 25.16 | 25.01 |
| | | 25 | 25 | 25.10 | 25.16 | 25.15 |
| | | 50 | 0 | 25.10 | 25.05 | 25.10 |
| 10M | 16QAM | 1 | 0 | 25.33 | 25.29 | 25.24 |
| | | 1 | 24 | 25.11 | 25.32 | 25.04 |
| | | 1 | 49 | 25.15 | 25.13 | 25.07 |
| | | 25 | 0 | 24.20 | 24.19 | 24.17 |
| | | 25 | 12 | 24.04 | 24.20 | 24.01 |
| | | 25 | 25 | 24.02 | 24.19 | 24.06 |
| | | 50 | 0 | 23.97 | 24.11 | 23.97 |
| 10M | 64QAM | 1 | 0 | 24.04 | 24.09 | 24.00 |
| | | 1 | 24 | 24.12 | 24.07 | 23.92 |
| | | 1 | 49 | 24.02 | 24.05 | 23.91 |
| | | 25 | 0 | 23.18 | 23.25 | 23.11 |
| | | 25 | 12 | 23.15 | 23.16 | 22.98 |
| | | 25 | 25 | 23.19 | 23.18 | 23.03 |
| | | 50 | 0 | 23.25 | 23.08 | 23.15 |
| 10M | 256QAM | 1 | 0 | 21.15 | 21.22 | 21.06 |
| | | 1 | 24 | 21.30 | 21.20 | 21.04 |
| | | 1 | 49 | 21.06 | 21.20 | 21.12 |
| | | 25 | 0 | 21.06 | 21.24 | 21.15 |
| | | 25 | 12 | 21.01 | 21.22 | 20.94 |
| | | 25 | 25 | 20.99 | 21.07 | 20.89 |
| | | 50 | 0 | 21.07 | 21.20 | 20.99 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------------|--------|
| | | Channel | | 19975 | 20175 | 20375 |
| | | Frequency (MHz) | | 1712.5 | 1732.5 | 1752.5 |
| 5M | QPSK | 1 | 0 | 26.04 | 26.25 | 26.07 |
| | | 1 | 12 | 26.11 | 26.17 | 25.96 |
| | | 1 | 24 | 26.07 | 26.14 | 25.86 |
| | | 12 | 0 | 25.14 | 25.19 | 24.86 |
| | | 12 | 6 | 24.95 | 25.04 | 24.98 |
| | | 12 | 13 | 25.09 | 25.15 | 25.04 |
| | | 25 | 0 | 25.15 | 24.99 | 25.07 |
| 5M | 16QAM | 1 | 0 | 25.20 | 25.35 | 25.26 |
| | | 1 | 12 | 25.14 | 25.24 | 25.09 |
| | | 1 | 24 | 25.05 | 25.20 | 25.03 |
| | | 12 | 0 | 24.25 | 24.17 | 24.10 |
| | | 12 | 6 | 23.99 | 24.14 | 24.12 |
| | | 12 | 13 | 24.00 | 24.12 | 24.02 |
| | | 25 | 0 | 23.96 | 24.06 | 23.89 |
| 5M | 64QAM | 1 | 0 | 23.95 | 24.13 | 24.00 |
| | | 1 | 12 | 24.01 | 23.99 | 23.94 |
| | | 1 | 24 | 23.92 | 24.02 | 23.90 |
| | | 12 | 0 | 23.20 | 23.31 | 23.22 |
| | | 12 | 6 | 23.18 | 23.16 | 22.97 |
| | | 12 | 13 | 23.12 | 23.14 | 23.06 |
| | | 25 | 0 | 23.25 | 23.17 | 23.05 |
| 5M | 256QAM | 1 | 0 | 21.19 | 21.25 | 21.06 |
| | | 1 | 12 | 21.31 | 21.33 | 20.91 |
| | | 1 | 24 | 21.15 | 21.23 | 20.99 |
| | | 12 | 0 | 21.16 | 21.22 | 21.10 |
| | | 12 | 6 | 21.05 | 21.13 | 20.79 |
| | | 12 | 13 | 20.96 | 21.15 | 20.89 |
| | | 25 | 0 | 21.11 | 21.12 | 20.95 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------------|--------|
| | | Channel | | 19965 | 20175 | 20385 |
| | | Frequency (MHz) | | 1711.5 | 1732.5 | 1753.5 |
| 3M | QPSK | 1 | 0 | 26.10 | 26.17 | 26.05 |
| | | 1 | 7 | 26.11 | 26.16 | 26.02 |
| | | 1 | 14 | 26.11 | 26.13 | 25.95 |
| | | 8 | 0 | 25.13 | 25.16 | 24.97 |
| | | 8 | 3 | 25.04 | 25.04 | 25.01 |
| | | 8 | 7 | 25.02 | 25.11 | 25.06 |
| | | 15 | 0 | 25.08 | 25.01 | 24.99 |
| 3M | 16QAM | 1 | 0 | 25.33 | 25.27 | 25.14 |
| | | 1 | 7 | 25.12 | 25.36 | 25.14 |
| | | 1 | 14 | 25.06 | 25.17 | 25.02 |
| | | 8 | 0 | 24.21 | 24.19 | 24.17 |
| | | 8 | 3 | 24.12 | 24.23 | 24.02 |
| | | 8 | 7 | 24.09 | 24.13 | 24.05 |
| | | 15 | 0 | 23.93 | 24.08 | 23.99 |
| 3M | 64QAM | 1 | 0 | 24.05 | 24.01 | 23.89 |
| | | 1 | 7 | 24.05 | 24.11 | 23.90 |
| | | 1 | 14 | 24.00 | 23.98 | 23.88 |
| | | 8 | 0 | 23.26 | 23.24 | 23.25 |
| | | 8 | 3 | 23.13 | 23.16 | 22.98 |
| | | 8 | 7 | 23.09 | 23.12 | 23.00 |
| | | 15 | 0 | 23.22 | 23.10 | 23.04 |
| 3M | 256QAM | 1 | 0 | 21.24 | 21.34 | 21.14 |
| | | 1 | 7 | 21.28 | 21.25 | 21.09 |
| | | 1 | 14 | 21.08 | 21.19 | 21.13 |
| | | 8 | 0 | 21.09 | 21.27 | 21.05 |
| | | 8 | 3 | 21.12 | 21.13 | 20.99 |
| | | 8 | 7 | 20.96 | 21.03 | 20.92 |
| | | 15 | 0 | 21.04 | 21.09 | 20.95 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------|--------------|--------|
| | | Channel | | 19957 | 20175 | 20393 |
| | | Frequency (MHz) | | 1710.7 | 1732.5 | 1754.3 |
| 1.4M | QPSK | 1 | 0 | 26.06 | 26.23 | 26.12 |
| | | 1 | 2 | 26.12 | 26.18 | 25.96 |
| | | 1 | 5 | 26.00 | 26.10 | 25.91 |
| | | 3 | 0 | 26.23 | 26.25 | 26.01 |
| | | 3 | 1 | 25.97 | 26.14 | 26.07 |
| | | 3 | 3 | 26.05 | 26.11 | 26.01 |
| | | 6 | 0 | 25.04 | 25.14 | 25.05 |
| 1.4M | 16QAM | 1 | 0 | 25.27 | 25.32 | 25.21 |
| | | 1 | 2 | 25.10 | 25.36 | 25.09 |
| | | 1 | 5 | 25.02 | 25.14 | 25.08 |
| | | 3 | 0 | 25.15 | 25.21 | 25.22 |
| | | 3 | 1 | 25.00 | 25.23 | 25.10 |
| | | 3 | 3 | 25.09 | 25.17 | 24.98 |
| | | 6 | 0 | 24.08 | 24.21 | 23.87 |
| 1.4M | 64QAM | 1 | 0 | 24.04 | 24.14 | 23.93 |
| | | 1 | 2 | 24.09 | 24.09 | 23.96 |
| | | 1 | 5 | 23.96 | 24.10 | 23.95 |
| | | 3 | 0 | 24.27 | 24.28 | 24.22 |
| | | 3 | 1 | 24.12 | 24.21 | 24.06 |
| | | 3 | 3 | 24.17 | 24.19 | 23.99 |
| | | 6 | 0 | 23.25 | 23.20 | 23.02 |
| 1.4M | 256QAM | 1 | 0 | 21.15 | 21.35 | 21.02 |
| | | 1 | 2 | 21.20 | 21.31 | 21.15 |
| | | 1 | 5 | 21.17 | 21.21 | 21.03 |
| | | 3 | 0 | 21.15 | 21.23 | 21.18 |
| | | 3 | 1 | 21.03 | 21.11 | 20.92 |
| | | 3 | 3 | 21.05 | 21.02 | 20.87 |
| | | 6 | 0 | 21.11 | 21.19 | 21.06 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.3 LTE Band 5

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 20450 | 20525 | 20600 |
| | | Frequency (MHz) | | 829 | 836.5 | 844 |
| 10M | QPSK | 1 | 0 | 22.65 | 22.66 | 22.61 |
| | | 1 | 24 | 22.59 | 22.63 | 22.55 |
| | | 1 | 49 | 22.53 | 22.59 | 22.52 |
| | | 25 | 0 | 21.58 | 21.61 | 21.49 |
| | | 25 | 12 | 21.57 | 21.57 | 21.47 |
| | | 25 | 25 | 21.52 | 21.55 | 21.45 |
| | | 50 | 0 | 21.49 | 21.54 | 21.41 |
| 10M | 16QAM | 1 | 0 | 21.72 | 21.82 | 21.63 |
| | | 1 | 24 | 21.72 | 21.80 | 21.69 |
| | | 1 | 49 | 21.66 | 21.72 | 21.62 |
| | | 25 | 0 | 20.52 | 20.60 | 20.51 |
| | | 25 | 12 | 20.56 | 20.58 | 20.52 |
| | | 25 | 25 | 20.53 | 20.55 | 20.51 |
| | | 50 | 0 | 20.57 | 20.59 | 20.48 |
| 10M | 64QAM | 1 | 0 | 20.72 | 20.81 | 20.64 |
| | | 1 | 24 | 20.74 | 20.76 | 20.73 |
| | | 1 | 49 | 20.71 | 20.72 | 20.61 |
| | | 25 | 0 | 19.51 | 19.60 | 19.46 |
| | | 25 | 12 | 19.54 | 19.59 | 19.47 |
| | | 25 | 25 | 19.53 | 19.54 | 19.43 |
| | | 50 | 0 | 19.52 | 19.55 | 19.45 |
| 10M | 256QAM | 1 | 0 | 17.61 | 17.71 | 17.51 |
| | | 1 | 24 | 17.65 | 17.66 | 17.64 |
| | | 1 | 49 | 17.54 | 17.59 | 17.51 |
| | | 25 | 0 | 17.59 | 17.63 | 17.56 |
| | | 25 | 12 | 17.56 | 17.61 | 17.47 |
| | | 25 | 25 | 17.59 | 17.60 | 17.53 |
| | | 50 | 0 | 17.58 | 17.63 | 17.56 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 20425 | 20525 | 20625 |
| | | Frequency (MHz) | | 826.5 | 836.5 | 846.5 |
| 5M | QPSK | 1 | 0 | 22.57 | 22.61 | 22.59 |
| | | 1 | 12 | 22.50 | 22.60 | 22.46 |
| | | 1 | 24 | 22.47 | 22.55 | 22.52 |
| | | 12 | 0 | 21.52 | 21.59 | 21.39 |
| | | 12 | 6 | 21.50 | 21.56 | 21.41 |
| | | 12 | 13 | 21.52 | 21.54 | 21.45 |
| | | 25 | 0 | 21.45 | 21.48 | 21.35 |
| 5M | 16QAM | 1 | 0 | 21.67 | 21.72 | 21.56 |
| | | 1 | 12 | 21.69 | 21.70 | 21.65 |
| | | 1 | 24 | 21.57 | 21.65 | 21.54 |
| | | 12 | 0 | 20.44 | 20.55 | 20.41 |
| | | 12 | 6 | 20.51 | 20.48 | 20.46 |
| | | 12 | 13 | 20.47 | 20.45 | 20.48 |
| | | 25 | 0 | 20.57 | 20.54 | 20.39 |
| 5M | 64QAM | 1 | 0 | 20.71 | 20.76 | 20.59 |
| | | 1 | 12 | 20.70 | 20.74 | 20.69 |
| | | 1 | 24 | 20.71 | 20.63 | 20.56 |
| | | 12 | 0 | 19.47 | 19.55 | 19.45 |
| | | 12 | 6 | 19.47 | 19.49 | 19.38 |
| | | 12 | 13 | 19.53 | 19.49 | 19.35 |
| | | 25 | 0 | 19.48 | 19.55 | 19.33 |
| 5M | 256QAM | 1 | 0 | 17.60 | 17.63 | 17.51 |
| | | 1 | 12 | 17.61 | 17.57 | 17.61 |
| | | 1 | 24 | 17.50 | 17.54 | 17.48 |
| | | 12 | 0 | 17.50 | 17.61 | 17.56 |
| | | 12 | 6 | 17.52 | 17.56 | 17.45 |
| | | 12 | 13 | 17.52 | 17.55 | 17.52 |
| | | 25 | 0 | 17.55 | 17.59 | 17.56 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 20415 | 20525 | 20635 |
| | | Frequency (MHz) | | 825.5 | 836.5 | 847.5 |
| 3M | QPSK | 1 | 0 | 22.55 | 22.56 | 22.51 |
| | | 1 | 7 | 22.40 | 22.52 | 22.42 |
| | | 1 | 14 | 22.37 | 22.52 | 22.42 |
| | | 8 | 0 | 21.43 | 21.44 | 21.33 |
| | | 8 | 3 | 21.50 | 21.51 | 21.37 |
| | | 8 | 7 | 21.47 | 21.54 | 21.34 |
| | | 15 | 0 | 21.42 | 21.40 | 21.23 |
| 3M | 16QAM | 1 | 0 | 21.58 | 21.61 | 21.46 |
| | | 1 | 7 | 21.69 | 21.66 | 21.65 |
| | | 1 | 14 | 21.51 | 21.57 | 21.49 |
| | | 8 | 0 | 20.42 | 20.43 | 20.40 |
| | | 8 | 3 | 20.51 | 20.47 | 20.31 |
| | | 8 | 7 | 20.46 | 20.37 | 20.37 |
| | | 15 | 0 | 20.55 | 20.48 | 20.24 |
| 3M | 64QAM | 1 | 0 | 20.63 | 20.74 | 20.55 |
| | | 1 | 7 | 20.68 | 20.59 | 20.54 |
| | | 1 | 14 | 20.60 | 20.50 | 20.47 |
| | | 8 | 0 | 19.36 | 19.40 | 19.44 |
| | | 8 | 3 | 19.37 | 19.40 | 19.31 |
| | | 8 | 7 | 19.50 | 19.38 | 19.24 |
| | | 15 | 0 | 19.41 | 19.49 | 19.22 |
| 3M | 256QAM | 1 | 0 | 17.51 | 17.50 | 17.43 |
| | | 1 | 7 | 17.59 | 17.54 | 17.52 |
| | | 1 | 14 | 17.49 | 17.46 | 17.34 |
| | | 8 | 0 | 17.47 | 17.53 | 17.45 |
| | | 8 | 3 | 17.50 | 17.56 | 17.38 |
| | | 8 | 7 | 17.50 | 17.49 | 17.39 |
| | | 15 | 0 | 17.51 | 17.53 | 17.45 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 20407 | 20525 | 20643 |
| | | Frequency (MHz) | | 824.7 | 836.5 | 848.3 |
| 1.4M | QPSK | 1 | 0 | 22.44 | 22.54 | 22.52 |
| | | 1 | 2 | 22.45 | 22.58 | 22.39 |
| | | 1 | 5 | 22.32 | 22.53 | 22.37 |
| | | 3 | 0 | 22.46 | 22.45 | 22.33 |
| | | 3 | 1 | 22.38 | 22.49 | 22.27 |
| | | 3 | 3 | 22.52 | 22.49 | 22.37 |
| | | 6 | 0 | 21.42 | 21.43 | 21.27 |
| 1.4M | 16QAM | 1 | 0 | 21.67 | 21.65 | 21.53 |
| | | 1 | 2 | 21.63 | 21.61 | 21.58 |
| | | 1 | 5 | 21.48 | 21.52 | 21.42 |
| | | 3 | 0 | 21.38 | 21.49 | 21.38 |
| | | 3 | 1 | 21.42 | 21.40 | 21.45 |
| | | 3 | 3 | 21.41 | 21.40 | 21.39 |
| | | 6 | 0 | 20.57 | 20.44 | 20.37 |
| 1.4M | 64QAM | 1 | 0 | 20.71 | 20.69 | 20.50 |
| | | 1 | 2 | 20.57 | 20.60 | 20.62 |
| | | 1 | 5 | 20.69 | 20.49 | 20.49 |
| | | 3 | 0 | 20.35 | 20.49 | 20.30 |
| | | 3 | 1 | 20.46 | 20.41 | 20.29 |
| | | 3 | 3 | 20.52 | 20.36 | 20.35 |
| | | 6 | 0 | 19.45 | 19.43 | 19.22 |
| 1.4M | 256QAM | 1 | 0 | 17.57 | 17.56 | 17.51 |
| | | 1 | 2 | 17.58 | 17.54 | 17.52 |
| | | 1 | 5 | 17.48 | 17.43 | 17.37 |
| | | 3 | 0 | 17.46 | 17.56 | 17.52 |
| | | 3 | 1 | 17.38 | 17.44 | 17.35 |
| | | 3 | 3 | 17.48 | 17.42 | 17.51 |
| | | 6 | 0 | 17.55 | 17.46 | 17.54 |



ERP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------------|-------|
| | | Channel | | 20450 | 20525 | 20600 |
| | | Frequency (MHz) | | 829 | 836.5 | 844 |
| 10M | QPSK | 1 | 0 | 22.88 | 22.89 | 22.84 |
| | | 1 | 24 | 22.82 | 22.86 | 22.78 |
| | | 1 | 49 | 22.76 | 22.82 | 22.75 |
| | | 25 | 0 | 21.81 | 21.84 | 21.72 |
| | | 25 | 12 | 21.80 | 21.80 | 21.70 |
| | | 25 | 25 | 21.75 | 21.78 | 21.68 |
| | | 50 | 0 | 21.72 | 21.77 | 21.64 |
| 10M | 16QAM | 1 | 0 | 21.95 | 22.05 | 21.86 |
| | | 1 | 24 | 21.95 | 22.03 | 21.92 |
| | | 1 | 49 | 21.89 | 21.95 | 21.85 |
| | | 25 | 0 | 20.75 | 20.83 | 20.74 |
| | | 25 | 12 | 20.79 | 20.81 | 20.75 |
| | | 25 | 25 | 20.76 | 20.78 | 20.74 |
| | | 50 | 0 | 20.80 | 20.82 | 20.71 |
| 10M | 64QAM | 1 | 0 | 20.95 | 21.04 | 20.87 |
| | | 1 | 24 | 20.97 | 20.99 | 20.96 |
| | | 1 | 49 | 20.94 | 20.95 | 20.84 |
| | | 25 | 0 | 19.74 | 19.83 | 19.69 |
| | | 25 | 12 | 19.77 | 19.82 | 19.70 |
| | | 25 | 25 | 19.76 | 19.77 | 19.66 |
| | | 50 | 0 | 19.75 | 19.78 | 19.68 |
| 10M | 256QAM | 1 | 0 | 17.84 | 17.94 | 17.74 |
| | | 1 | 24 | 17.88 | 17.89 | 17.87 |
| | | 1 | 49 | 17.77 | 17.82 | 17.74 |
| | | 25 | 0 | 17.82 | 17.86 | 17.79 |
| | | 25 | 12 | 17.79 | 17.84 | 17.70 |
| | | 25 | 25 | 17.82 | 17.83 | 17.76 |
| | | 50 | 0 | 17.81 | 17.86 | 17.79 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|--------------|-------|
| | | Channel | | 20425 | 20525 | 20625 |
| | | Frequency (MHz) | | 826.5 | 836.5 | 846.5 |
| 5M | QPSK | 1 | 0 | 22.80 | 22.84 | 22.82 |
| | | 1 | 12 | 22.73 | 22.83 | 22.69 |
| | | 1 | 24 | 22.70 | 22.78 | 22.75 |
| | | 12 | 0 | 21.75 | 21.82 | 21.62 |
| | | 12 | 6 | 21.73 | 21.79 | 21.64 |
| | | 12 | 13 | 21.75 | 21.77 | 21.68 |
| | | 25 | 0 | 21.68 | 21.71 | 21.58 |
| 5M | 16QAM | 1 | 0 | 21.90 | 21.95 | 21.79 |
| | | 1 | 12 | 21.92 | 21.93 | 21.88 |
| | | 1 | 24 | 21.80 | 21.88 | 21.77 |
| | | 12 | 0 | 20.67 | 20.78 | 20.64 |
| | | 12 | 6 | 20.74 | 20.71 | 20.69 |
| | | 12 | 13 | 20.70 | 20.68 | 20.71 |
| | | 25 | 0 | 20.80 | 20.77 | 20.62 |
| 5M | 64QAM | 1 | 0 | 20.94 | 20.99 | 20.82 |
| | | 1 | 12 | 20.93 | 20.97 | 20.92 |
| | | 1 | 24 | 20.94 | 20.86 | 20.79 |
| | | 12 | 0 | 19.70 | 19.78 | 19.68 |
| | | 12 | 6 | 19.70 | 19.72 | 19.61 |
| | | 12 | 13 | 19.76 | 19.72 | 19.58 |
| | | 25 | 0 | 19.71 | 19.78 | 19.56 |
| 5M | 256QAM | 1 | 0 | 17.83 | 17.86 | 17.74 |
| | | 1 | 12 | 17.84 | 17.80 | 17.84 |
| | | 1 | 24 | 17.73 | 17.77 | 17.71 |
| | | 12 | 0 | 17.73 | 17.84 | 17.79 |
| | | 12 | 6 | 17.75 | 17.79 | 17.68 |
| | | 12 | 13 | 17.75 | 17.78 | 17.75 |
| | | 25 | 0 | 17.78 | 17.82 | 17.79 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 20415 | 20525 | 20635 |
| | | Frequency (MHz) | | 825.5 | 836.5 | 847.5 |
| 3M | QPSK | 1 | 0 | 22.78 | 22.79 | 22.74 |
| | | 1 | 7 | 22.63 | 22.75 | 22.65 |
| | | 1 | 14 | 22.60 | 22.75 | 22.65 |
| | | 8 | 0 | 21.66 | 21.67 | 21.56 |
| | | 8 | 3 | 21.73 | 21.74 | 21.60 |
| | | 8 | 7 | 21.70 | 21.77 | 21.57 |
| | | 15 | 0 | 21.65 | 21.63 | 21.46 |
| 3M | 16QAM | 1 | 0 | 21.81 | 21.84 | 21.69 |
| | | 1 | 7 | 21.92 | 21.89 | 21.88 |
| | | 1 | 14 | 21.74 | 21.80 | 21.72 |
| | | 8 | 0 | 20.65 | 20.66 | 20.63 |
| | | 8 | 3 | 20.74 | 20.70 | 20.54 |
| | | 8 | 7 | 20.69 | 20.60 | 20.60 |
| | | 15 | 0 | 20.78 | 20.71 | 20.47 |
| 3M | 64QAM | 1 | 0 | 20.86 | 20.97 | 20.78 |
| | | 1 | 7 | 20.91 | 20.82 | 20.77 |
| | | 1 | 14 | 20.83 | 20.73 | 20.70 |
| | | 8 | 0 | 19.59 | 19.63 | 19.67 |
| | | 8 | 3 | 19.60 | 19.63 | 19.54 |
| | | 8 | 7 | 19.73 | 19.61 | 19.47 |
| | | 15 | 0 | 19.64 | 19.72 | 19.45 |
| 3M | 256QAM | 1 | 0 | 17.74 | 17.73 | 17.66 |
| | | 1 | 7 | 17.82 | 17.77 | 17.75 |
| | | 1 | 14 | 17.72 | 17.69 | 17.57 |
| | | 8 | 0 | 17.70 | 17.76 | 17.68 |
| | | 8 | 3 | 17.73 | 17.79 | 17.61 |
| | | 8 | 7 | 17.73 | 17.72 | 17.62 |
| | | 15 | 0 | 17.74 | 17.76 | 17.68 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 20407 | 20525 | 20643 |
| | | Frequency (MHz) | | 824.7 | 836.5 | 848.3 |
| 1.4M | QPSK | 1 | 0 | 22.67 | 22.77 | 22.75 |
| | | 1 | 2 | 22.68 | 22.81 | 22.62 |
| | | 1 | 5 | 22.55 | 22.76 | 22.60 |
| | | 3 | 0 | 22.69 | 22.68 | 22.56 |
| | | 3 | 1 | 22.61 | 22.72 | 22.50 |
| | | 3 | 3 | 22.75 | 22.72 | 22.60 |
| | | 6 | 0 | 21.65 | 21.66 | 21.50 |
| 1.4M | 16QAM | 1 | 0 | 21.90 | 21.88 | 21.76 |
| | | 1 | 2 | 21.86 | 21.84 | 21.81 |
| | | 1 | 5 | 21.71 | 21.75 | 21.65 |
| | | 3 | 0 | 21.61 | 21.72 | 21.61 |
| | | 3 | 1 | 21.65 | 21.63 | 21.68 |
| | | 3 | 3 | 21.64 | 21.63 | 21.62 |
| | | 6 | 0 | 20.80 | 20.67 | 20.60 |
| 1.4M | 64QAM | 1 | 0 | 20.94 | 20.92 | 20.73 |
| | | 1 | 2 | 20.80 | 20.83 | 20.85 |
| | | 1 | 5 | 20.92 | 20.72 | 20.72 |
| | | 3 | 0 | 20.58 | 20.72 | 20.53 |
| | | 3 | 1 | 20.69 | 20.64 | 20.52 |
| | | 3 | 3 | 20.75 | 20.59 | 20.58 |
| | | 6 | 0 | 19.68 | 19.66 | 19.45 |
| 1.4M | 256QAM | 1 | 0 | 17.80 | 17.79 | 17.74 |
| | | 1 | 2 | 17.81 | 17.77 | 17.75 |
| | | 1 | 5 | 17.71 | 17.66 | 17.60 |
| | | 3 | 0 | 17.69 | 17.79 | 17.75 |
| | | 3 | 1 | 17.61 | 17.67 | 17.58 |
| | | 3 | 3 | 17.71 | 17.65 | 17.74 |
| | | 6 | 0 | 17.78 | 17.69 | 17.77 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

7.1.4 LTE Band 7

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|--------------|
| | | Channel | | 20850 | 21100 | 21350 |
| | | Frequency (MHz) | | 2510 | 2535 | 2560 |
| 20M | QPSK | 1 | 0 | 21.62 | 21.63 | 21.68 |
| | | 1 | 50 | 21.57 | 21.59 | 21.65 |
| | | 1 | 99 | 21.44 | 21.54 | 21.56 |
| | | 50 | 0 | 20.54 | 20.57 | 20.65 |
| | | 50 | 25 | 20.47 | 20.50 | 20.58 |
| | | 50 | 50 | 20.53 | 20.58 | 20.62 |
| | | 100 | 0 | 20.61 | 20.62 | 20.63 |
| 20M | 16QAM | 1 | 0 | 20.62 | 20.69 | 20.71 |
| | | 1 | 50 | 20.52 | 20.62 | 20.69 |
| | | 1 | 99 | 20.58 | 20.63 | 20.68 |
| | | 50 | 0 | 19.56 | 19.58 | 19.68 |
| | | 50 | 25 | 19.65 | 19.65 | 19.65 |
| | | 50 | 50 | 19.48 | 19.53 | 19.55 |
| | | 100 | 0 | 19.56 | 19.60 | 19.63 |
| 20M | 64QAM | 1 | 0 | 19.75 | 19.76 | 19.78 |
| | | 1 | 50 | 19.55 | 19.60 | 19.65 |
| | | 1 | 99 | 19.62 | 19.63 | 19.63 |
| | | 50 | 0 | 18.61 | 18.61 | 18.61 |
| | | 50 | 25 | 18.44 | 18.47 | 18.57 |
| | | 50 | 50 | 18.42 | 18.51 | 18.52 |
| | | 100 | 0 | 18.53 | 18.56 | 18.62 |
| 20M | 256QAM | 1 | 0 | 16.68 | 16.71 | 16.78 |
| | | 1 | 50 | 16.51 | 16.58 | 16.67 |
| | | 1 | 99 | 16.58 | 16.60 | 16.65 |
| | | 50 | 0 | 16.62 | 16.69 | 16.72 |
| | | 50 | 25 | 16.62 | 16.63 | 16.69 |
| | | 50 | 50 | 16.46 | 16.54 | 16.62 |
| | | 100 | 0 | 16.55 | 16.59 | 16.61 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 20825 | 21100 | 21375 |
| | | Frequency (MHz) | | 2507.5 | 2535 | 2562.5 |
| 15M | QPSK | 1 | 0 | 21.57 | 21.56 | 21.63 |
| | | 1 | 37 | 21.55 | 21.49 | 21.55 |
| | | 1 | 74 | 21.40 | 21.50 | 21.47 |
| | | 36 | 0 | 20.48 | 20.49 | 20.60 |
| | | 36 | 19 | 20.38 | 20.41 | 20.53 |
| | | 36 | 39 | 20.47 | 20.57 | 20.60 |
| | | 75 | 0 | 20.55 | 20.52 | 20.54 |
| 15M | 16QAM | 1 | 0 | 20.59 | 20.68 | 20.65 |
| | | 1 | 37 | 20.50 | 20.56 | 20.62 |
| | | 1 | 74 | 20.58 | 20.61 | 20.63 |
| | | 36 | 0 | 19.48 | 19.52 | 19.62 |
| | | 36 | 19 | 19.63 | 19.64 | 19.60 |
| | | 36 | 39 | 19.47 | 19.43 | 19.50 |
| | | 75 | 0 | 19.52 | 19.50 | 19.59 |
| 15M | 64QAM | 1 | 0 | 19.69 | 19.74 | 19.68 |
| | | 1 | 37 | 19.45 | 19.58 | 19.59 |
| | | 1 | 74 | 19.55 | 19.57 | 19.53 |
| | | 36 | 0 | 18.51 | 18.57 | 18.58 |
| | | 36 | 19 | 18.34 | 18.41 | 18.52 |
| | | 36 | 39 | 18.38 | 18.47 | 18.42 |
| | | 75 | 0 | 18.44 | 18.50 | 18.62 |
| 15M | 256QAM | 1 | 0 | 16.62 | 16.71 | 16.75 |
| | | 1 | 37 | 16.43 | 16.57 | 16.58 |
| | | 1 | 74 | 16.55 | 16.54 | 16.62 |
| | | 36 | 0 | 16.55 | 16.59 | 16.63 |
| | | 36 | 19 | 16.61 | 16.59 | 16.68 |
| | | 36 | 39 | 16.46 | 16.44 | 16.58 |
| | | 75 | 0 | 16.54 | 16.51 | 16.60 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 20800 | 21100 | 21400 |
| | | Frequency (MHz) | | 2505 | 2535 | 2565 |
| 10M | QPSK | 1 | 0 | 21.51 | 21.53 | 21.57 |
| | | 1 | 24 | 21.50 | 21.39 | 21.48 |
| | | 1 | 49 | 21.29 | 21.47 | 21.45 |
| | | 25 | 0 | 20.37 | 20.36 | 20.45 |
| | | 25 | 12 | 20.24 | 20.39 | 20.42 |
| | | 25 | 25 | 20.38 | 20.50 | 20.46 |
| | | 50 | 0 | 20.45 | 20.51 | 20.50 |
| 10M | 16QAM | 1 | 0 | 20.47 | 20.67 | 20.58 |
| | | 1 | 24 | 20.35 | 20.53 | 20.56 |
| | | 1 | 49 | 20.55 | 20.58 | 20.50 |
| | | 25 | 0 | 19.34 | 19.39 | 19.54 |
| | | 25 | 12 | 19.52 | 19.55 | 19.51 |
| | | 25 | 25 | 19.44 | 19.32 | 19.49 |
| | | 50 | 0 | 19.42 | 19.35 | 19.54 |
| 10M | 64QAM | 1 | 0 | 19.69 | 19.59 | 19.58 |
| | | 1 | 24 | 19.40 | 19.43 | 19.51 |
| | | 1 | 49 | 19.50 | 19.51 | 19.42 |
| | | 25 | 0 | 18.36 | 18.54 | 18.50 |
| | | 25 | 12 | 18.27 | 18.28 | 18.45 |
| | | 25 | 25 | 18.29 | 18.43 | 18.39 |
| | | 50 | 0 | 18.41 | 18.35 | 18.49 |
| 10M | 256QAM | 1 | 0 | 16.56 | 16.59 | 16.71 |
| | | 1 | 24 | 16.41 | 16.45 | 16.57 |
| | | 1 | 49 | 16.40 | 16.52 | 16.60 |
| | | 25 | 0 | 16.41 | 16.59 | 16.54 |
| | | 25 | 12 | 16.55 | 16.56 | 16.64 |
| | | 25 | 25 | 16.43 | 16.43 | 16.47 |
| | | 50 | 0 | 16.50 | 16.47 | 16.52 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 20775 | 21100 | 21425 |
| | | Frequency (MHz) | | 2502.5 | 2535 | 2567.5 |
| 5M | QPSK | 1 | 0 | 21.42 | 21.51 | 21.56 |
| | | 1 | 12 | 21.46 | 21.41 | 21.42 |
| | | 1 | 24 | 21.31 | 21.37 | 21.32 |
| | | 12 | 0 | 20.37 | 20.37 | 20.35 |
| | | 12 | 6 | 20.26 | 20.30 | 20.42 |
| | | 12 | 13 | 20.32 | 20.46 | 20.44 |
| | | 25 | 0 | 20.51 | 20.51 | 20.47 |
| 5M | 16QAM | 1 | 0 | 20.50 | 20.60 | 20.52 |
| | | 1 | 12 | 20.46 | 20.52 | 20.48 |
| | | 1 | 24 | 20.47 | 20.47 | 20.55 |
| | | 12 | 0 | 19.45 | 19.38 | 19.52 |
| | | 12 | 6 | 19.56 | 19.63 | 19.49 |
| | | 12 | 13 | 19.46 | 19.29 | 19.40 |
| | | 25 | 0 | 19.38 | 19.47 | 19.57 |
| 5M | 64QAM | 1 | 0 | 19.58 | 19.63 | 19.62 |
| | | 1 | 12 | 19.42 | 19.44 | 19.58 |
| | | 1 | 24 | 19.45 | 19.49 | 19.50 |
| | | 12 | 0 | 18.48 | 18.55 | 18.48 |
| | | 12 | 6 | 18.25 | 18.27 | 18.39 |
| | | 12 | 13 | 18.30 | 18.38 | 18.33 |
| | | 25 | 0 | 18.39 | 18.43 | 18.60 |
| 5M | 256QAM | 1 | 0 | 16.62 | 16.63 | 16.56 |
| | | 1 | 12 | 16.42 | 16.52 | 16.50 |
| | | 1 | 24 | 16.43 | 16.46 | 16.51 |
| | | 12 | 0 | 16.41 | 16.54 | 16.48 |
| | | 12 | 6 | 16.54 | 16.59 | 16.53 |
| | | 12 | 13 | 16.45 | 16.41 | 16.37 |
| | | 25 | 0 | 16.43 | 16.48 | 16.40 |

EIRP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|--------------|
| | | Channel | | 20850 | 21100 | 21350 |
| | | Frequency (MHz) | | 2510 | 2535 | 2560 |
| 20M | QPSK | 1 | 0 | 27.32 | 27.33 | 27.38 |
| | | 1 | 50 | 27.27 | 27.29 | 27.35 |
| | | 1 | 99 | 27.14 | 27.24 | 27.26 |
| | | 50 | 0 | 26.24 | 26.27 | 26.35 |
| | | 50 | 25 | 26.17 | 26.20 | 26.28 |
| | | 50 | 50 | 26.23 | 26.28 | 26.32 |
| | | 100 | 0 | 26.31 | 26.32 | 26.33 |
| 20M | 16QAM | 1 | 0 | 26.32 | 26.39 | 26.41 |
| | | 1 | 50 | 26.22 | 26.32 | 26.39 |
| | | 1 | 99 | 26.28 | 26.33 | 26.38 |
| | | 50 | 0 | 25.26 | 25.28 | 25.38 |
| | | 50 | 25 | 25.35 | 25.35 | 25.35 |
| | | 50 | 50 | 25.18 | 25.23 | 25.25 |
| | | 100 | 0 | 25.26 | 25.30 | 25.33 |
| 20M | 64QAM | 1 | 0 | 25.45 | 25.46 | 25.48 |
| | | 1 | 50 | 25.25 | 25.30 | 25.35 |
| | | 1 | 99 | 25.32 | 25.33 | 25.33 |
| | | 50 | 0 | 24.31 | 24.31 | 24.31 |
| | | 50 | 25 | 24.14 | 24.17 | 24.27 |
| | | 50 | 50 | 24.12 | 24.21 | 24.22 |
| | | 100 | 0 | 24.23 | 24.26 | 24.32 |
| 20M | 256QAM | 1 | 0 | 22.38 | 22.41 | 22.48 |
| | | 1 | 50 | 22.21 | 22.28 | 22.37 |
| | | 1 | 99 | 22.28 | 22.30 | 22.35 |
| | | 50 | 0 | 22.32 | 22.39 | 22.42 |
| | | 50 | 25 | 22.32 | 22.33 | 22.39 |
| | | 50 | 50 | 22.16 | 22.24 | 22.32 |
| | | 100 | 0 | 22.25 | 22.29 | 22.31 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------------|--------------|
| | | Channel | | 20825 | 21100 | 21375 |
| | | Frequency (MHz) | | 2507.5 | 2535 | 2562.5 |
| 15M | QPSK | 1 | 0 | 27.27 | 27.26 | 27.33 |
| | | 1 | 37 | 27.25 | 27.19 | 27.25 |
| | | 1 | 74 | 27.10 | 27.20 | 27.17 |
| | | 36 | 0 | 26.18 | 26.19 | 26.30 |
| | | 36 | 19 | 26.08 | 26.11 | 26.23 |
| | | 36 | 39 | 26.17 | 26.27 | 26.30 |
| | | 75 | 0 | 26.25 | 26.22 | 26.24 |
| 15M | 16QAM | 1 | 0 | 26.29 | 26.38 | 26.35 |
| | | 1 | 37 | 26.20 | 26.26 | 26.32 |
| | | 1 | 74 | 26.28 | 26.31 | 26.33 |
| | | 36 | 0 | 25.18 | 25.22 | 25.32 |
| | | 36 | 19 | 25.33 | 25.34 | 25.30 |
| | | 36 | 39 | 25.17 | 25.13 | 25.20 |
| | | 75 | 0 | 25.22 | 25.20 | 25.29 |
| 15M | 64QAM | 1 | 0 | 25.39 | 25.44 | 25.38 |
| | | 1 | 37 | 25.15 | 25.28 | 25.29 |
| | | 1 | 74 | 25.25 | 25.27 | 25.23 |
| | | 36 | 0 | 24.21 | 24.27 | 24.28 |
| | | 36 | 19 | 24.04 | 24.11 | 24.22 |
| | | 36 | 39 | 24.08 | 24.17 | 24.12 |
| | | 75 | 0 | 24.14 | 24.20 | 24.32 |
| 15M | 256QAM | 1 | 0 | 22.32 | 22.41 | 22.45 |
| | | 1 | 37 | 22.13 | 22.27 | 22.28 |
| | | 1 | 74 | 22.25 | 22.24 | 22.32 |
| | | 36 | 0 | 22.25 | 22.29 | 22.33 |
| | | 36 | 19 | 22.31 | 22.29 | 22.38 |
| | | 36 | 39 | 22.16 | 22.14 | 22.28 |
| | | 75 | 0 | 22.24 | 22.21 | 22.30 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 20800 | 21100 | 21400 |
| | | Frequency (MHz) | | 2505 | 2535 | 2565 |
| 10M | QPSK | 1 | 0 | 27.21 | 27.23 | 27.27 |
| | | 1 | 24 | 27.20 | 27.09 | 27.18 |
| | | 1 | 49 | 26.99 | 27.17 | 27.15 |
| | | 25 | 0 | 26.07 | 26.06 | 26.15 |
| | | 25 | 12 | 25.94 | 26.09 | 26.12 |
| | | 25 | 25 | 26.08 | 26.20 | 26.16 |
| | | 50 | 0 | 26.15 | 26.21 | 26.20 |
| 10M | 16QAM | 1 | 0 | 26.17 | 26.37 | 26.28 |
| | | 1 | 24 | 26.05 | 26.23 | 26.26 |
| | | 1 | 49 | 26.25 | 26.28 | 26.20 |
| | | 25 | 0 | 25.04 | 25.09 | 25.24 |
| | | 25 | 12 | 25.22 | 25.25 | 25.21 |
| | | 25 | 25 | 25.14 | 25.02 | 25.19 |
| | | 50 | 0 | 25.12 | 25.05 | 25.24 |
| 10M | 64QAM | 1 | 0 | 25.39 | 25.29 | 25.28 |
| | | 1 | 24 | 25.10 | 25.13 | 25.21 |
| | | 1 | 49 | 25.20 | 25.21 | 25.12 |
| | | 25 | 0 | 24.06 | 24.24 | 24.20 |
| | | 25 | 12 | 23.97 | 23.98 | 24.15 |
| | | 25 | 25 | 23.99 | 24.13 | 24.09 |
| | | 50 | 0 | 24.11 | 24.05 | 24.19 |
| 10M | 256QAM | 1 | 0 | 22.26 | 22.29 | 22.41 |
| | | 1 | 24 | 22.11 | 22.15 | 22.27 |
| | | 1 | 49 | 22.10 | 22.22 | 22.30 |
| | | 25 | 0 | 22.11 | 22.29 | 22.24 |
| | | 25 | 12 | 22.25 | 22.26 | 22.34 |
| | | 25 | 25 | 22.13 | 22.13 | 22.17 |
| | | 50 | 0 | 22.20 | 22.17 | 22.22 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------------|--------------|
| | | Channel | | 20775 | 21100 | 21425 |
| | | Frequency (MHz) | | 2502.5 | 2535 | 2567.5 |
| 5M | QPSK | 1 | 0 | 27.12 | 27.21 | 27.26 |
| | | 1 | 12 | 27.16 | 27.11 | 27.12 |
| | | 1 | 24 | 27.01 | 27.07 | 27.02 |
| | | 12 | 0 | 26.07 | 26.07 | 26.05 |
| | | 12 | 6 | 25.96 | 26.00 | 26.12 |
| | | 12 | 13 | 26.02 | 26.16 | 26.14 |
| | | 25 | 0 | 26.21 | 26.21 | 26.17 |
| 5M | 16QAM | 1 | 0 | 26.20 | 26.30 | 26.22 |
| | | 1 | 12 | 26.16 | 26.22 | 26.18 |
| | | 1 | 24 | 26.17 | 26.17 | 26.25 |
| | | 12 | 0 | 25.15 | 25.08 | 25.22 |
| | | 12 | 6 | 25.26 | 25.33 | 25.19 |
| | | 12 | 13 | 25.16 | 24.99 | 25.10 |
| | | 25 | 0 | 25.08 | 25.17 | 25.27 |
| 5M | 64QAM | 1 | 0 | 25.28 | 25.33 | 25.32 |
| | | 1 | 12 | 25.12 | 25.14 | 25.28 |
| | | 1 | 24 | 25.15 | 25.19 | 25.20 |
| | | 12 | 0 | 24.18 | 24.25 | 24.18 |
| | | 12 | 6 | 23.95 | 23.97 | 24.09 |
| | | 12 | 13 | 24.00 | 24.08 | 24.03 |
| | | 25 | 0 | 24.09 | 24.13 | 24.30 |
| 5M | 256QAM | 1 | 0 | 22.32 | 22.33 | 22.26 |
| | | 1 | 12 | 22.12 | 22.22 | 22.20 |
| | | 1 | 24 | 22.13 | 22.16 | 22.21 |
| | | 12 | 0 | 22.11 | 22.24 | 22.18 |
| | | 12 | 6 | 22.24 | 22.29 | 22.23 |
| | | 12 | 13 | 22.15 | 22.11 | 22.07 |
| | | 25 | 0 | 22.13 | 22.18 | 22.10 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.5 LTE Band 12

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 23060 | 23095 | 23130 |
| | | Frequency (MHz) | | 704 | 707.5 | 711 |
| 10M | QPSK | 1 | 0 | 22.61 | 22.57 | 22.55 |
| | | 1 | 24 | 22.59 | 22.52 | 22.46 |
| | | 1 | 49 | 22.46 | 22.36 | 22.30 |
| | | 25 | 0 | 21.68 | 21.58 | 21.56 |
| | | 25 | 12 | 21.61 | 21.54 | 21.50 |
| | | 25 | 25 | 21.53 | 21.47 | 21.39 |
| | | 50 | 0 | 21.65 | 21.56 | 21.52 |
| 10M | 16QAM | 1 | 0 | 21.75 | 21.75 | 21.75 |
| | | 1 | 24 | 21.71 | 21.68 | 21.65 |
| | | 1 | 49 | 21.59 | 21.50 | 21.47 |
| | | 25 | 0 | 20.72 | 20.71 | 20.66 |
| | | 25 | 12 | 20.60 | 20.52 | 20.44 |
| | | 25 | 25 | 20.58 | 20.50 | 20.43 |
| | | 50 | 0 | 20.61 | 20.61 | 20.51 |
| 10M | 64QAM | 1 | 0 | 20.89 | 20.84 | 20.79 |
| | | 1 | 24 | 20.78 | 20.77 | 20.72 |
| | | 1 | 49 | 20.68 | 20.63 | 20.56 |
| | | 25 | 0 | 19.65 | 19.56 | 19.49 |
| | | 25 | 12 | 19.70 | 19.66 | 19.66 |
| | | 25 | 25 | 19.66 | 19.64 | 19.63 |
| | | 50 | 0 | 19.58 | 19.49 | 19.48 |
| 10M | 256QAM | 1 | 0 | 17.75 | 17.71 | 17.66 |
| | | 1 | 24 | 17.73 | 17.64 | 17.56 |
| | | 1 | 49 | 17.68 | 17.60 | 17.51 |
| | | 25 | 0 | 17.64 | 17.61 | 17.58 |
| | | 25 | 12 | 17.60 | 17.58 | 17.49 |
| | | 25 | 25 | 17.55 | 17.46 | 17.39 |
| | | 50 | 0 | 17.63 | 17.62 | 17.59 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 23035 | 23095 | 23155 |
| | | Frequency (MHz) | | 701.5 | 707.5 | 713.5 |
| 5M | QPSK | 1 | 0 | 22.58 | 22.52 | 22.49 |
| | | 1 | 12 | 22.57 | 22.49 | 22.36 |
| | | 1 | 24 | 22.44 | 22.31 | 22.27 |
| | | 12 | 0 | 21.64 | 21.51 | 21.55 |
| | | 12 | 6 | 21.54 | 21.48 | 21.46 |
| | | 12 | 13 | 21.45 | 21.46 | 21.29 |
| | | 25 | 0 | 21.58 | 21.49 | 21.48 |
| 5M | 16QAM | 1 | 0 | 21.74 | 21.75 | 21.68 |
| | | 1 | 12 | 21.66 | 21.65 | 21.62 |
| | | 1 | 24 | 21.57 | 21.44 | 21.47 |
| | | 12 | 0 | 20.67 | 20.65 | 20.61 |
| | | 12 | 6 | 20.54 | 20.42 | 20.40 |
| | | 12 | 13 | 20.53 | 20.40 | 20.43 |
| | | 25 | 0 | 20.54 | 20.51 | 20.44 |
| 5M | 64QAM | 1 | 0 | 20.83 | 20.84 | 20.73 |
| | | 1 | 12 | 20.75 | 20.68 | 20.69 |
| | | 1 | 24 | 20.58 | 20.58 | 20.46 |
| | | 12 | 0 | 19.64 | 19.48 | 19.40 |
| | | 12 | 6 | 19.67 | 19.56 | 19.64 |
| | | 12 | 13 | 19.64 | 19.54 | 19.60 |
| | | 25 | 0 | 19.55 | 19.44 | 19.40 |
| 5M | 256QAM | 1 | 0 | 17.68 | 17.64 | 17.60 |
| | | 1 | 12 | 17.71 | 17.59 | 17.52 |
| | | 1 | 24 | 17.59 | 17.60 | 17.51 |
| | | 12 | 0 | 17.57 | 17.54 | 17.51 |
| | | 12 | 6 | 17.52 | 17.48 | 17.46 |
| | | 12 | 13 | 17.48 | 17.44 | 17.39 |
| | | 25 | 0 | 17.59 | 17.56 | 17.58 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 23025 | 23095 | 23165 |
| | | Frequency (MHz) | | 700.5 | 707.5 | 714.5 |
| 3M | QPSK | 1 | 0 | 22.54 | 22.45 | 22.50 |
| | | 1 | 7 | 22.58 | 22.43 | 22.30 |
| | | 1 | 14 | 22.36 | 22.20 | 22.06 |
| | | 8 | 0 | 21.57 | 21.48 | 21.43 |
| | | 8 | 3 | 21.43 | 21.44 | 21.40 |
| | | 8 | 7 | 21.38 | 21.39 | 21.30 |
| | | 15 | 0 | 21.51 | 21.53 | 21.42 |
| 3M | 16QAM | 1 | 0 | 21.60 | 21.63 | 21.68 |
| | | 1 | 7 | 21.56 | 21.52 | 21.58 |
| | | 1 | 14 | 21.50 | 21.29 | 21.38 |
| | | 8 | 0 | 20.64 | 20.51 | 20.61 |
| | | 8 | 3 | 20.40 | 20.40 | 20.19 |
| | | 8 | 7 | 20.39 | 20.39 | 20.24 |
| | | 15 | 0 | 20.53 | 20.58 | 20.42 |
| 3M | 64QAM | 1 | 0 | 20.79 | 20.72 | 20.67 |
| | | 1 | 7 | 20.64 | 20.74 | 20.61 |
| | | 1 | 14 | 20.60 | 20.43 | 20.44 |
| | | 8 | 0 | 19.55 | 19.44 | 19.42 |
| | | 8 | 3 | 19.64 | 19.57 | 19.53 |
| | | 8 | 7 | 19.59 | 19.52 | 19.45 |
| | | 15 | 0 | 19.44 | 19.40 | 19.42 |
| 3M | 256QAM | 1 | 0 | 17.53 | 17.59 | 17.48 |
| | | 1 | 7 | 17.66 | 17.59 | 17.41 |
| | | 1 | 14 | 17.52 | 17.47 | 17.48 |
| | | 8 | 0 | 17.53 | 17.49 | 17.41 |
| | | 8 | 3 | 17.45 | 17.45 | 17.36 |
| | | 8 | 7 | 17.38 | 17.30 | 17.35 |
| | | 15 | 0 | 17.49 | 17.54 | 17.49 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 23017 | 23095 | 23173 |
| | | Frequency (MHz) | | 699.7 | 707.5 | 715.3 |
| 1.4M | QPSK | 1 | 0 | 22.51 | 22.44 | 22.47 |
| | | 1 | 2 | 22.54 | 22.31 | 22.28 |
| | | 1 | 5 | 22.43 | 22.23 | 22.11 |
| | | 3 | 0 | 22.57 | 22.54 | 22.35 |
| | | 3 | 1 | 22.51 | 22.45 | 22.45 |
| | | 3 | 3 | 22.48 | 22.30 | 22.30 |
| | | 6 | 0 | 21.55 | 21.50 | 21.48 |
| 1.4M | 16QAM | 1 | 0 | 21.59 | 21.63 | 21.64 |
| | | 1 | 2 | 21.58 | 21.66 | 21.50 |
| | | 1 | 5 | 21.48 | 21.28 | 21.28 |
| | | 3 | 0 | 21.56 | 21.51 | 21.47 |
| | | 3 | 1 | 21.40 | 21.33 | 21.28 |
| | | 3 | 3 | 21.53 | 21.26 | 21.30 |
| | | 6 | 0 | 20.53 | 20.51 | 20.31 |
| 1.4M | 64QAM | 1 | 0 | 20.77 | 20.76 | 20.67 |
| | | 1 | 2 | 20.59 | 20.61 | 20.66 |
| | | 1 | 5 | 20.61 | 20.47 | 20.38 |
| | | 3 | 0 | 20.49 | 20.41 | 20.40 |
| | | 3 | 1 | 20.65 | 20.55 | 20.55 |
| | | 3 | 3 | 20.61 | 20.57 | 20.50 |
| | | 6 | 0 | 19.51 | 19.34 | 19.40 |
| 1.4M | 256QAM | 1 | 0 | 17.59 | 17.62 | 17.51 |
| | | 1 | 2 | 17.69 | 17.52 | 17.40 |
| | | 1 | 5 | 17.52 | 17.60 | 17.45 |
| | | 3 | 0 | 17.44 | 17.54 | 17.37 |
| | | 3 | 1 | 17.52 | 17.38 | 17.31 |
| | | 3 | 3 | 17.33 | 17.44 | 17.33 |
| | | 6 | 0 | 17.53 | 17.45 | 17.45 |

ERP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 23060 | 23095 | 23130 |
| | | Frequency (MHz) | | 704 | 707.5 | 711 |
| 10M | QPSK | 1 | 0 | 21.58 | 21.54 | 21.52 |
| | | 1 | 24 | 21.56 | 21.49 | 21.43 |
| | | 1 | 49 | 21.43 | 21.33 | 21.27 |
| | | 25 | 0 | 20.65 | 20.55 | 20.53 |
| | | 25 | 12 | 20.58 | 20.51 | 20.47 |
| | | 25 | 25 | 20.50 | 20.44 | 20.36 |
| | | 50 | 0 | 20.62 | 20.53 | 20.49 |
| 10M | 16QAM | 1 | 0 | 20.72 | 20.72 | 20.72 |
| | | 1 | 24 | 20.68 | 20.65 | 20.62 |
| | | 1 | 49 | 20.56 | 20.47 | 20.44 |
| | | 25 | 0 | 19.69 | 19.68 | 19.63 |
| | | 25 | 12 | 19.57 | 19.49 | 19.41 |
| | | 25 | 25 | 19.55 | 19.47 | 19.40 |
| | | 50 | 0 | 19.58 | 19.58 | 19.48 |
| 10M | 64QAM | 1 | 0 | 19.86 | 19.81 | 19.76 |
| | | 1 | 24 | 19.75 | 19.74 | 19.69 |
| | | 1 | 49 | 19.65 | 19.60 | 19.53 |
| | | 25 | 0 | 18.62 | 18.53 | 18.46 |
| | | 25 | 12 | 18.67 | 18.63 | 18.63 |
| | | 25 | 25 | 18.63 | 18.61 | 18.60 |
| | | 50 | 0 | 18.55 | 18.46 | 18.45 |
| 10M | 256QAM | 1 | 0 | 16.72 | 16.68 | 16.63 |
| | | 1 | 24 | 16.70 | 16.61 | 16.53 |
| | | 1 | 49 | 16.65 | 16.57 | 16.48 |
| | | 25 | 0 | 16.61 | 16.58 | 16.55 |
| | | 25 | 12 | 16.57 | 16.55 | 16.46 |
| | | 25 | 25 | 16.52 | 16.43 | 16.36 |
| | | 50 | 0 | 16.60 | 16.59 | 16.56 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 23035 | 23095 | 23155 |
| | | Frequency (MHz) | | 701.5 | 707.5 | 713.5 |
| 5M | QPSK | 1 | 0 | 21.55 | 21.49 | 21.46 |
| | | 1 | 12 | 21.54 | 21.46 | 21.33 |
| | | 1 | 24 | 21.41 | 21.28 | 21.24 |
| | | 12 | 0 | 20.61 | 20.48 | 20.52 |
| | | 12 | 6 | 20.51 | 20.45 | 20.43 |
| | | 12 | 13 | 20.42 | 20.43 | 20.26 |
| | | 25 | 0 | 20.55 | 20.46 | 20.45 |
| 5M | 16QAM | 1 | 0 | 20.71 | 20.72 | 20.65 |
| | | 1 | 12 | 20.63 | 20.62 | 20.59 |
| | | 1 | 24 | 20.54 | 20.41 | 20.44 |
| | | 12 | 0 | 19.64 | 19.62 | 19.58 |
| | | 12 | 6 | 19.51 | 19.39 | 19.37 |
| | | 12 | 13 | 19.50 | 19.37 | 19.40 |
| | | 25 | 0 | 19.51 | 19.48 | 19.41 |
| 5M | 64QAM | 1 | 0 | 19.80 | 19.81 | 19.70 |
| | | 1 | 12 | 19.72 | 19.65 | 19.66 |
| | | 1 | 24 | 19.55 | 19.55 | 19.43 |
| | | 12 | 0 | 18.61 | 18.45 | 18.37 |
| | | 12 | 6 | 18.64 | 18.53 | 18.61 |
| | | 12 | 13 | 18.61 | 18.51 | 18.57 |
| | | 25 | 0 | 18.52 | 18.41 | 18.37 |
| 5M | 256QAM | 1 | 0 | 16.65 | 16.61 | 16.57 |
| | | 1 | 12 | 16.68 | 16.56 | 16.49 |
| | | 1 | 24 | 16.56 | 16.57 | 16.48 |
| | | 12 | 0 | 16.54 | 16.51 | 16.48 |
| | | 12 | 6 | 16.49 | 16.45 | 16.43 |
| | | 12 | 13 | 16.45 | 16.41 | 16.36 |
| | | 25 | 0 | 16.56 | 16.53 | 16.55 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|-------|--------------|
| | | Channel | | 23025 | 23095 | 23165 |
| | | Frequency (MHz) | | 700.5 | 707.5 | 714.5 |
| 3M | QPSK | 1 | 0 | 21.51 | 21.42 | 21.47 |
| | | 1 | 7 | 21.55 | 21.40 | 21.27 |
| | | 1 | 14 | 21.33 | 21.17 | 21.03 |
| | | 8 | 0 | 20.54 | 20.45 | 20.40 |
| | | 8 | 3 | 20.40 | 20.41 | 20.37 |
| | | 8 | 7 | 20.35 | 20.36 | 20.27 |
| | | 15 | 0 | 20.48 | 20.50 | 20.39 |
| 3M | 16QAM | 1 | 0 | 20.57 | 20.60 | 20.65 |
| | | 1 | 7 | 20.53 | 20.49 | 20.55 |
| | | 1 | 14 | 20.47 | 20.26 | 20.35 |
| | | 8 | 0 | 19.61 | 19.48 | 19.58 |
| | | 8 | 3 | 19.37 | 19.37 | 19.16 |
| | | 8 | 7 | 19.36 | 19.36 | 19.21 |
| | | 15 | 0 | 19.50 | 19.55 | 19.39 |
| 3M | 64QAM | 1 | 0 | 19.76 | 19.69 | 19.64 |
| | | 1 | 7 | 19.61 | 19.71 | 19.58 |
| | | 1 | 14 | 19.57 | 19.40 | 19.41 |
| | | 8 | 0 | 18.52 | 18.41 | 18.39 |
| | | 8 | 3 | 18.61 | 18.54 | 18.50 |
| | | 8 | 7 | 18.56 | 18.49 | 18.42 |
| | | 15 | 0 | 18.41 | 18.37 | 18.39 |
| 3M | 256QAM | 1 | 0 | 16.50 | 16.56 | 16.45 |
| | | 1 | 7 | 16.63 | 16.56 | 16.38 |
| | | 1 | 14 | 16.49 | 16.44 | 16.45 |
| | | 8 | 0 | 16.50 | 16.46 | 16.38 |
| | | 8 | 3 | 16.42 | 16.42 | 16.33 |
| | | 8 | 7 | 16.35 | 16.27 | 16.32 |
| | | 15 | 0 | 16.46 | 16.51 | 16.46 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 23017 | 23095 | 23173 |
| | | Frequency (MHz) | | 699.7 | 707.5 | 715.3 |
| 1.4M | QPSK | 1 | 0 | 21.48 | 21.41 | 21.44 |
| | | 1 | 2 | 21.51 | 21.28 | 21.25 |
| | | 1 | 5 | 21.40 | 21.20 | 21.08 |
| | | 3 | 0 | 21.54 | 21.51 | 21.32 |
| | | 3 | 1 | 21.48 | 21.42 | 21.42 |
| | | 3 | 3 | 21.45 | 21.27 | 21.27 |
| | | 6 | 0 | 20.52 | 20.47 | 20.45 |
| 1.4M | 16QAM | 1 | 0 | 20.56 | 20.60 | 20.61 |
| | | 1 | 2 | 20.55 | 20.63 | 20.47 |
| | | 1 | 5 | 20.45 | 20.25 | 20.25 |
| | | 3 | 0 | 20.53 | 20.48 | 20.44 |
| | | 3 | 1 | 20.37 | 20.30 | 20.25 |
| | | 3 | 3 | 20.50 | 20.23 | 20.27 |
| | | 6 | 0 | 19.50 | 19.48 | 19.28 |
| 1.4M | 64QAM | 1 | 0 | 19.74 | 19.73 | 19.64 |
| | | 1 | 2 | 19.56 | 19.58 | 19.63 |
| | | 1 | 5 | 19.58 | 19.44 | 19.35 |
| | | 3 | 0 | 19.46 | 19.38 | 19.37 |
| | | 3 | 1 | 19.62 | 19.52 | 19.52 |
| | | 3 | 3 | 19.58 | 19.54 | 19.47 |
| | | 6 | 0 | 18.48 | 18.31 | 18.37 |
| 1.4M | 256QAM | 1 | 0 | 16.56 | 16.59 | 16.48 |
| | | 1 | 2 | 16.66 | 16.49 | 16.37 |
| | | 1 | 5 | 16.49 | 16.57 | 16.42 |
| | | 3 | 0 | 16.41 | 16.51 | 16.34 |
| | | 3 | 1 | 16.49 | 16.35 | 16.28 |
| | | 3 | 3 | 16.30 | 16.41 | 16.30 |
| | | 6 | 0 | 16.50 | 16.42 | 16.42 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

7.1.6 LTE Band 13

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Mid |
|-----|-----------|-----------------|-----------|-------|
| | | Channel | | 23230 |
| | | Frequency (MHz) | | 782 |
| 10M | QPSK | 1 | 0 | 22.38 |
| | | 1 | 24 | 22.32 |
| | | 1 | 49 | 22.31 |
| | | 25 | 0 | 21.43 |
| | | 25 | 12 | 21.41 |
| | | 25 | 25 | 21.37 |
| | | 50 | 0 | 21.39 |
| 10M | 16QAM | 1 | 0 | 21.63 |
| | | 1 | 24 | 21.61 |
| | | 1 | 49 | 21.53 |
| | | 25 | 0 | 20.45 |
| | | 25 | 12 | 20.43 |
| | | 25 | 25 | 20.38 |
| | | 50 | 0 | 20.41 |
| 10M | 64QAM | 1 | 0 | 20.63 |
| | | 1 | 24 | 20.57 |
| | | 1 | 49 | 20.61 |
| | | 25 | 0 | 19.43 |
| | | 25 | 12 | 19.41 |
| | | 25 | 25 | 19.38 |
| | | 50 | 0 | 19.37 |
| 10M | 256QAM | 1 | 0 | 17.57 |
| | | 1 | 24 | 17.53 |
| | | 1 | 49 | 17.51 |
| | | 25 | 0 | 17.38 |
| | | 25 | 12 | 17.41 |
| | | 25 | 25 | 17.43 |
| | | 50 | 0 | 17.38 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 23205 | 23230 | 23255 |
| | | Frequency (MHz) | | 779.5 | 782 | 784.5 |
| 5M | QPSK | 1 | 0 | 22.31 | 22.37 | 22.35 |
| | | 1 | 12 | 22.21 | 22.32 | 22.27 |
| | | 1 | 24 | 22.24 | 22.31 | 22.30 |
| | | 12 | 0 | 21.35 | 21.41 | 21.38 |
| | | 12 | 6 | 21.28 | 21.38 | 21.37 |
| | | 12 | 13 | 21.31 | 21.37 | 21.36 |
| | | 25 | 0 | 21.34 | 21.39 | 21.38 |
| 5M | 16QAM | 1 | 0 | 21.52 | 21.63 | 21.55 |
| | | 1 | 12 | 21.42 | 21.61 | 21.52 |
| | | 1 | 24 | 21.44 | 21.53 | 21.53 |
| | | 12 | 0 | 20.37 | 20.45 | 20.40 |
| | | 12 | 6 | 20.32 | 20.43 | 20.34 |
| | | 12 | 13 | 20.30 | 20.38 | 20.32 |
| | | 25 | 0 | 20.27 | 20.41 | 20.36 |
| 5M | 64QAM | 1 | 0 | 20.55 | 20.63 | 20.63 |
| | | 1 | 12 | 20.54 | 20.57 | 20.55 |
| | | 1 | 24 | 20.59 | 20.61 | 20.60 |
| | | 12 | 0 | 19.30 | 19.43 | 19.35 |
| | | 12 | 6 | 19.34 | 19.41 | 19.41 |
| | | 12 | 13 | 19.23 | 19.38 | 19.32 |
| | | 25 | 0 | 19.29 | 19.37 | 19.37 |
| 5M | 256QAM | 1 | 0 | 17.41 | 17.57 | 17.51 |
| | | 1 | 12 | 17.46 | 17.53 | 17.52 |
| | | 1 | 24 | 17.42 | 17.51 | 17.51 |
| | | 12 | 0 | 17.32 | 17.38 | 17.35 |
| | | 12 | 6 | 17.35 | 17.41 | 17.35 |
| | | 12 | 13 | 17.39 | 17.43 | 17.39 |
| | | 25 | 0 | 17.34 | 17.38 | 17.36 |

ERP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Mid |
|-----|-----------|-----------------|-----------|--------------|
| | | Channel | | 23230 |
| | | Frequency (MHz) | | 782 |
| 10M | QPSK | 1 | 0 | 22.25 |
| | | 1 | 24 | 22.19 |
| | | 1 | 49 | 22.18 |
| | | 25 | 0 | 21.30 |
| | | 25 | 12 | 21.28 |
| | | 25 | 25 | 21.24 |
| | | 50 | 0 | 21.26 |
| 10M | 16QAM | 1 | 0 | 21.50 |
| | | 1 | 24 | 21.48 |
| | | 1 | 49 | 21.40 |
| | | 25 | 0 | 20.32 |
| | | 25 | 12 | 20.30 |
| | | 25 | 25 | 20.25 |
| | | 50 | 0 | 20.28 |
| 10M | 64QAM | 1 | 0 | 20.50 |
| | | 1 | 24 | 20.44 |
| | | 1 | 49 | 20.48 |
| | | 25 | 0 | 19.30 |
| | | 25 | 12 | 19.28 |
| | | 25 | 25 | 19.25 |
| | | 50 | 0 | 19.24 |
| 10M | 256QAM | 1 | 0 | 17.44 |
| | | 1 | 24 | 17.40 |
| | | 1 | 49 | 17.38 |
| | | 25 | 0 | 17.25 |
| | | 25 | 12 | 17.28 |
| | | 25 | 25 | 17.30 |
| | | 50 | 0 | 17.25 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|--------------|--------------|
| | | Channel | | 23205 | 23230 | 23255 |
| | | Frequency (MHz) | | 779.5 | 782 | 784.5 |
| 5M | QPSK | 1 | 0 | 22.18 | 22.24 | 22.22 |
| | | 1 | 12 | 22.08 | 22.19 | 22.14 |
| | | 1 | 24 | 22.11 | 22.18 | 22.17 |
| | | 12 | 0 | 21.22 | 21.28 | 21.25 |
| | | 12 | 6 | 21.15 | 21.25 | 21.24 |
| | | 12 | 13 | 21.18 | 21.24 | 21.23 |
| | | 25 | 0 | 21.21 | 21.26 | 21.25 |
| 5M | 16QAM | 1 | 0 | 21.39 | 21.50 | 21.42 |
| | | 1 | 12 | 21.29 | 21.48 | 21.39 |
| | | 1 | 24 | 21.31 | 21.40 | 21.40 |
| | | 12 | 0 | 20.24 | 20.32 | 20.27 |
| | | 12 | 6 | 20.19 | 20.30 | 20.21 |
| | | 12 | 13 | 20.17 | 20.25 | 20.19 |
| | | 25 | 0 | 20.14 | 20.28 | 20.23 |
| 5M | 64QAM | 1 | 0 | 20.42 | 20.50 | 20.50 |
| | | 1 | 12 | 20.41 | 20.44 | 20.42 |
| | | 1 | 24 | 20.46 | 20.48 | 20.47 |
| | | 12 | 0 | 19.17 | 19.30 | 19.22 |
| | | 12 | 6 | 19.21 | 19.28 | 19.28 |
| | | 12 | 13 | 19.10 | 19.25 | 19.19 |
| | | 25 | 0 | 19.16 | 19.24 | 19.24 |
| 5M | 256QAM | 1 | 0 | 17.28 | 17.44 | 17.38 |
| | | 1 | 12 | 17.33 | 17.40 | 17.39 |
| | | 1 | 24 | 17.29 | 17.38 | 17.38 |
| | | 12 | 0 | 17.19 | 17.25 | 17.22 |
| | | 12 | 6 | 17.22 | 17.28 | 17.22 |
| | | 12 | 13 | 17.26 | 17.30 | 17.26 |
| | | 25 | 0 | 17.21 | 17.25 | 17.23 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

7.1.7 LTE Band 25

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------------|-------|
| | | Channel | | 26140 | 26365 | 26590 |
| | | Frequency (MHz) | | 1860 | 1882.5 | 1905 |
| 20M | QPSK | 1 | 0 | 21.55 | 21.63 | 21.51 |
| | | 1 | 50 | 21.52 | 21.61 | 21.47 |
| | | 1 | 99 | 21.49 | 21.57 | 21.42 |
| | | 50 | 0 | 20.61 | 20.62 | 20.52 |
| | | 50 | 25 | 20.51 | 20.57 | 20.48 |
| | | 50 | 50 | 20.47 | 20.55 | 20.41 |
| | | 100 | 0 | 20.52 | 20.58 | 20.43 |
| 20M | 16QAM | 1 | 0 | 20.78 | 20.78 | 20.74 |
| | | 1 | 50 | 20.60 | 20.69 | 20.55 |
| | | 1 | 99 | 20.58 | 20.61 | 20.51 |
| | | 50 | 0 | 19.59 | 19.61 | 19.52 |
| | | 50 | 25 | 19.54 | 19.63 | 19.45 |
| | | 50 | 50 | 19.47 | 19.56 | 19.39 |
| | | 100 | 0 | 19.61 | 19.62 | 19.58 |
| 20M | 64QAM | 1 | 0 | 19.59 | 19.67 | 19.56 |
| | | 1 | 50 | 19.62 | 19.65 | 19.54 |
| | | 1 | 99 | 19.56 | 19.57 | 19.47 |
| | | 50 | 0 | 18.63 | 18.67 | 18.58 |
| | | 50 | 25 | 18.60 | 18.65 | 18.56 |
| | | 50 | 50 | 18.48 | 18.53 | 18.47 |
| | | 100 | 0 | 18.53 | 18.63 | 18.49 |
| 20M | 256QAM | 1 | 0 | 16.67 | 16.68 | 16.61 |
| | | 1 | 50 | 16.65 | 16.66 | 16.59 |
| | | 1 | 99 | 16.59 | 16.63 | 16.59 |
| | | 50 | 0 | 16.58 | 16.61 | 16.51 |
| | | 50 | 25 | 16.55 | 16.58 | 16.49 |
| | | 50 | 50 | 16.50 | 16.55 | 16.40 |
| | | 100 | 0 | 16.53 | 16.59 | 16.44 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 26115 | 26365 | 26615 |
| | | Frequency (MHz) | | 1857.5 | 1882.5 | 1907.5 |
| 15M | QPSK | 1 | 0 | 21.55 | 21.62 | 21.46 |
| | | 1 | 37 | 21.45 | 21.52 | 21.36 |
| | | 1 | 74 | 21.48 | 21.47 | 21.37 |
| | | 36 | 0 | 20.53 | 20.54 | 20.51 |
| | | 36 | 19 | 20.44 | 20.48 | 20.48 |
| | | 36 | 39 | 20.41 | 20.47 | 20.40 |
| | | 75 | 0 | 20.50 | 20.52 | 20.33 |
| 15M | 16QAM | 1 | 0 | 20.73 | 20.77 | 20.65 |
| | | 1 | 37 | 20.50 | 20.59 | 20.49 |
| | | 1 | 74 | 20.53 | 20.60 | 20.46 |
| | | 36 | 0 | 19.58 | 19.52 | 19.45 |
| | | 36 | 19 | 19.45 | 19.62 | 19.37 |
| | | 36 | 39 | 19.38 | 19.50 | 19.31 |
| | | 75 | 0 | 19.58 | 19.52 | 19.51 |
| 15M | 64QAM | 1 | 0 | 19.56 | 19.57 | 19.50 |
| | | 1 | 37 | 19.62 | 19.62 | 19.52 |
| | | 1 | 74 | 19.54 | 19.49 | 19.44 |
| | | 36 | 0 | 18.60 | 18.61 | 18.50 |
| | | 36 | 19 | 18.52 | 18.63 | 18.56 |
| | | 36 | 39 | 18.38 | 18.49 | 18.44 |
| | | 75 | 0 | 18.45 | 18.56 | 18.46 |
| 15M | 256QAM | 1 | 0 | 16.57 | 16.62 | 16.55 |
| | | 1 | 37 | 16.56 | 16.58 | 16.58 |
| | | 1 | 74 | 16.54 | 16.59 | 16.52 |
| | | 36 | 0 | 16.48 | 16.55 | 16.43 |
| | | 36 | 19 | 16.49 | 16.56 | 16.39 |
| | | 36 | 39 | 16.49 | 16.49 | 16.30 |
| | | 75 | 0 | 16.48 | 16.49 | 16.38 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------|-------|
| | | Channel | | 26090 | 26365 | 26640 |
| | | Frequency (MHz) | | 1855 | 1882.5 | 1910 |
| 10M | QPSK | 1 | 0 | 21.54 | 21.54 | 21.36 |
| | | 1 | 24 | 21.36 | 21.49 | 21.22 |
| | | 1 | 49 | 21.40 | 21.44 | 21.26 |
| | | 25 | 0 | 20.49 | 20.43 | 20.42 |
| | | 25 | 12 | 20.38 | 20.38 | 20.37 |
| | | 25 | 25 | 20.29 | 20.43 | 20.30 |
| | | 50 | 0 | 20.36 | 20.51 | 20.21 |
| 10M | 16QAM | 1 | 0 | 20.59 | 20.66 | 20.58 |
| | | 1 | 24 | 20.49 | 20.56 | 20.39 |
| | | 1 | 49 | 20.42 | 20.57 | 20.39 |
| | | 25 | 0 | 19.58 | 19.49 | 19.41 |
| | | 25 | 12 | 19.40 | 19.55 | 19.34 |
| | | 25 | 25 | 19.37 | 19.39 | 19.17 |
| | | 50 | 0 | 19.53 | 19.49 | 19.43 |
| 10M | 64QAM | 1 | 0 | 19.50 | 19.44 | 19.40 |
| | | 1 | 24 | 19.58 | 19.60 | 19.51 |
| | | 1 | 49 | 19.46 | 19.44 | 19.35 |
| | | 25 | 0 | 18.47 | 18.58 | 18.41 |
| | | 25 | 12 | 18.48 | 18.52 | 18.53 |
| | | 25 | 25 | 18.36 | 18.38 | 18.38 |
| | | 50 | 0 | 18.31 | 18.44 | 18.42 |
| 10M | 256QAM | 1 | 0 | 16.57 | 16.60 | 16.47 |
| | | 1 | 24 | 16.56 | 16.57 | 16.49 |
| | | 1 | 49 | 16.48 | 16.51 | 16.49 |
| | | 25 | 0 | 16.47 | 16.41 | 16.40 |
| | | 25 | 12 | 16.48 | 16.44 | 16.24 |
| | | 25 | 25 | 16.37 | 16.40 | 16.19 |
| | | 50 | 0 | 16.36 | 16.39 | 16.32 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 26065 | 26365 | 26665 |
| | | Frequency (MHz) | | 1852.5 | 1882.5 | 1912.5 |
| 5M | QPSK | 1 | 0 | 21.45 | 21.55 | 21.26 |
| | | 1 | 12 | 21.41 | 21.51 | 21.22 |
| | | 1 | 24 | 21.42 | 21.40 | 21.25 |
| | | 12 | 0 | 20.47 | 20.39 | 20.33 |
| | | 12 | 6 | 20.41 | 20.42 | 20.35 |
| | | 12 | 13 | 20.33 | 20.41 | 20.17 |
| | | 25 | 0 | 20.43 | 20.37 | 20.17 |
| 5M | 16QAM | 1 | 0 | 20.69 | 20.73 | 20.53 |
| | | 1 | 12 | 20.38 | 20.57 | 20.41 |
| | | 1 | 24 | 20.53 | 20.45 | 20.41 |
| | | 12 | 0 | 19.51 | 19.50 | 19.36 |
| | | 12 | 6 | 19.39 | 19.49 | 19.23 |
| | | 12 | 13 | 19.31 | 19.38 | 19.21 |
| | | 25 | 0 | 19.55 | 19.45 | 19.44 |
| 5M | 64QAM | 1 | 0 | 19.43 | 19.46 | 19.48 |
| | | 1 | 12 | 19.56 | 19.55 | 19.50 |
| | | 1 | 24 | 19.46 | 19.47 | 19.39 |
| | | 12 | 0 | 18.59 | 18.55 | 18.50 |
| | | 12 | 6 | 18.52 | 18.60 | 18.51 |
| | | 12 | 13 | 18.23 | 18.36 | 18.40 |
| | | 25 | 0 | 18.42 | 18.45 | 18.35 |
| 5M | 256QAM | 1 | 0 | 16.50 | 16.51 | 16.35 |
| | | 1 | 12 | 16.44 | 16.58 | 16.34 |
| | | 1 | 24 | 16.44 | 16.55 | 16.37 |
| | | 12 | 0 | 16.42 | 16.44 | 16.31 |
| | | 12 | 6 | 16.46 | 16.56 | 16.12 |
| | | 12 | 13 | 16.49 | 16.35 | 16.11 |
| | | 25 | 0 | 16.34 | 16.47 | 16.17 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 26055 | 26365 | 26675 |
| | | Frequency (MHz) | | 1851.5 | 1882.5 | 1913.5 |
| 3M | QPSK | 1 | 0 | 21.43 | 21.58 | 21.35 |
| | | 1 | 7 | 21.38 | 21.43 | 21.24 |
| | | 1 | 14 | 21.44 | 21.43 | 21.31 |
| | | 8 | 0 | 20.46 | 20.52 | 20.44 |
| | | 8 | 3 | 20.33 | 20.42 | 20.47 |
| | | 8 | 7 | 20.36 | 20.34 | 20.28 |
| | | 15 | 0 | 20.47 | 20.43 | 20.20 |
| 3M | 16QAM | 1 | 0 | 20.59 | 20.66 | 20.53 |
| | | 1 | 7 | 20.43 | 20.57 | 20.49 |
| | | 1 | 14 | 20.41 | 20.58 | 20.46 |
| | | 8 | 0 | 19.46 | 19.38 | 19.36 |
| | | 8 | 3 | 19.41 | 19.60 | 19.27 |
| | | 8 | 7 | 19.38 | 19.47 | 19.26 |
| | | 15 | 0 | 19.57 | 19.48 | 19.50 |
| 3M | 64QAM | 1 | 0 | 19.49 | 19.45 | 19.45 |
| | | 1 | 7 | 19.58 | 19.60 | 19.51 |
| | | 1 | 14 | 19.39 | 19.44 | 19.31 |
| | | 8 | 0 | 18.47 | 18.61 | 18.35 |
| | | 8 | 3 | 18.45 | 18.62 | 18.55 |
| | | 8 | 7 | 18.29 | 18.39 | 18.36 |
| | | 15 | 0 | 18.30 | 18.55 | 18.44 |
| 3M | 256QAM | 1 | 0 | 16.44 | 16.52 | 16.52 |
| | | 1 | 7 | 16.42 | 16.53 | 16.51 |
| | | 1 | 14 | 16.45 | 16.51 | 16.50 |
| | | 8 | 0 | 16.46 | 16.42 | 16.41 |
| | | 8 | 3 | 16.46 | 16.54 | 16.26 |
| | | 8 | 7 | 16.39 | 16.47 | 16.15 |
| | | 15 | 0 | 16.45 | 16.43 | 16.38 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 26047 | 26365 | 26683 |
| | | Frequency (MHz) | | 1850.7 | 1882.5 | 1914.3 |
| 1.4M | QPSK | 1 | 0 | 21.45 | 21.60 | 21.38 |
| | | 1 | 2 | 21.33 | 21.50 | 21.24 |
| | | 1 | 5 | 21.41 | 21.34 | 21.31 |
| | | 3 | 0 | 21.42 | 21.54 | 21.39 |
| | | 3 | 1 | 21.36 | 21.38 | 21.46 |
| | | 3 | 3 | 21.28 | 21.35 | 21.26 |
| | | 6 | 0 | 20.38 | 20.51 | 20.31 |
| 1.4M | 16QAM | 1 | 0 | 20.68 | 20.65 | 20.58 |
| | | 1 | 2 | 20.48 | 20.45 | 20.36 |
| | | 1 | 5 | 20.42 | 20.58 | 20.40 |
| | | 3 | 0 | 20.44 | 20.41 | 20.44 |
| | | 3 | 1 | 20.43 | 20.56 | 20.32 |
| | | 3 | 3 | 20.28 | 20.37 | 20.31 |
| | | 6 | 0 | 19.50 | 19.39 | 19.42 |
| 1.4M | 64QAM | 1 | 0 | 19.44 | 19.46 | 19.41 |
| | | 1 | 2 | 19.52 | 19.58 | 19.44 |
| | | 1 | 5 | 19.41 | 19.48 | 19.41 |
| | | 3 | 0 | 19.49 | 19.49 | 19.49 |
| | | 3 | 1 | 19.42 | 19.62 | 19.43 |
| | | 3 | 3 | 19.24 | 19.43 | 19.33 |
| | | 6 | 0 | 18.45 | 18.52 | 18.35 |
| 1.4M | 256QAM | 1 | 0 | 16.56 | 16.59 | 16.51 |
| | | 1 | 2 | 16.51 | 16.51 | 16.43 |
| | | 1 | 5 | 16.42 | 16.56 | 16.37 |
| | | 3 | 0 | 16.41 | 16.49 | 16.37 |
| | | 3 | 1 | 16.39 | 16.45 | 16.34 |
| | | 3 | 3 | 16.46 | 16.43 | 16.25 |
| | | 6 | 0 | 16.43 | 16.45 | 16.29 |



EIRP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 26140 | 26365 | 26590 |
| | | Frequency (MHz) | | 1860 | 1882.5 | 1905 |
| 20M | QPSK | 1 | 0 | 26.60 | 26.68 | 26.56 |
| | | 1 | 50 | 26.57 | 26.66 | 26.52 |
| | | 1 | 99 | 26.54 | 26.62 | 26.47 |
| | | 50 | 0 | 25.66 | 25.67 | 25.57 |
| | | 50 | 25 | 25.56 | 25.62 | 25.53 |
| | | 50 | 50 | 25.52 | 25.60 | 25.46 |
| | | 100 | 0 | 25.57 | 25.63 | 25.48 |
| 20M | 16QAM | 1 | 0 | 25.83 | 25.83 | 25.79 |
| | | 1 | 50 | 25.65 | 25.74 | 25.60 |
| | | 1 | 99 | 25.63 | 25.66 | 25.56 |
| | | 50 | 0 | 24.64 | 24.66 | 24.57 |
| | | 50 | 25 | 24.59 | 24.68 | 24.50 |
| | | 50 | 50 | 24.52 | 24.61 | 24.44 |
| | | 100 | 0 | 24.66 | 24.67 | 24.63 |
| 20M | 64QAM | 1 | 0 | 24.64 | 24.72 | 24.61 |
| | | 1 | 50 | 24.67 | 24.70 | 24.59 |
| | | 1 | 99 | 24.61 | 24.62 | 24.52 |
| | | 50 | 0 | 23.68 | 23.72 | 23.63 |
| | | 50 | 25 | 23.65 | 23.70 | 23.61 |
| | | 50 | 50 | 23.53 | 23.58 | 23.52 |
| | | 100 | 0 | 23.58 | 23.68 | 23.54 |
| 20M | 256QAM | 1 | 0 | 21.72 | 21.73 | 21.66 |
| | | 1 | 50 | 21.70 | 21.71 | 21.64 |
| | | 1 | 99 | 21.64 | 21.68 | 21.64 |
| | | 50 | 0 | 21.63 | 21.66 | 21.56 |
| | | 50 | 25 | 21.60 | 21.63 | 21.54 |
| | | 50 | 50 | 21.55 | 21.60 | 21.45 |
| | | 100 | 0 | 21.58 | 21.64 | 21.49 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 26115 | 26365 | 26615 |
| | | Frequency (MHz) | | 1857.5 | 1882.5 | 1907.5 |
| 15M | QPSK | 1 | 0 | 26.60 | 26.67 | 26.51 |
| | | 1 | 37 | 26.50 | 26.57 | 26.41 |
| | | 1 | 74 | 26.53 | 26.52 | 26.42 |
| | | 36 | 0 | 25.58 | 25.59 | 25.56 |
| | | 36 | 19 | 25.49 | 25.53 | 25.53 |
| | | 36 | 39 | 25.46 | 25.52 | 25.45 |
| | | 75 | 0 | 25.55 | 25.57 | 25.38 |
| 15M | 16QAM | 1 | 0 | 25.78 | 25.82 | 25.70 |
| | | 1 | 37 | 25.55 | 25.64 | 25.54 |
| | | 1 | 74 | 25.58 | 25.65 | 25.51 |
| | | 36 | 0 | 24.63 | 24.57 | 24.50 |
| | | 36 | 19 | 24.50 | 24.67 | 24.42 |
| | | 36 | 39 | 24.43 | 24.55 | 24.36 |
| | | 75 | 0 | 24.63 | 24.57 | 24.56 |
| 15M | 64QAM | 1 | 0 | 24.61 | 24.62 | 24.55 |
| | | 1 | 37 | 24.67 | 24.67 | 24.57 |
| | | 1 | 74 | 24.59 | 24.54 | 24.49 |
| | | 36 | 0 | 23.65 | 23.66 | 23.55 |
| | | 36 | 19 | 23.57 | 23.68 | 23.61 |
| | | 36 | 39 | 23.43 | 23.54 | 23.49 |
| | | 75 | 0 | 23.50 | 23.61 | 23.51 |
| 15M | 256QAM | 1 | 0 | 21.62 | 21.67 | 21.60 |
| | | 1 | 37 | 21.61 | 21.63 | 21.63 |
| | | 1 | 74 | 21.59 | 21.64 | 21.57 |
| | | 36 | 0 | 21.53 | 21.60 | 21.48 |
| | | 36 | 19 | 21.54 | 21.61 | 21.44 |
| | | 36 | 39 | 21.54 | 21.54 | 21.35 |
| | | 75 | 0 | 21.53 | 21.54 | 21.43 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 26090 | 26365 | 26640 |
| | | Frequency (MHz) | | 1855 | 1882.5 | 1910 |
| 10M | QPSK | 1 | 0 | 26.59 | 26.59 | 26.41 |
| | | 1 | 24 | 26.41 | 26.54 | 26.27 |
| | | 1 | 49 | 26.45 | 26.49 | 26.31 |
| | | 25 | 0 | 25.54 | 25.48 | 25.47 |
| | | 25 | 12 | 25.43 | 25.43 | 25.42 |
| | | 25 | 25 | 25.34 | 25.48 | 25.35 |
| | | 50 | 0 | 25.41 | 25.56 | 25.26 |
| 10M | 16QAM | 1 | 0 | 25.64 | 25.71 | 25.63 |
| | | 1 | 24 | 25.54 | 25.61 | 25.44 |
| | | 1 | 49 | 25.47 | 25.62 | 25.44 |
| | | 25 | 0 | 24.63 | 24.54 | 24.46 |
| | | 25 | 12 | 24.45 | 24.60 | 24.39 |
| | | 25 | 25 | 24.42 | 24.44 | 24.22 |
| | | 50 | 0 | 24.58 | 24.54 | 24.48 |
| 10M | 64QAM | 1 | 0 | 24.55 | 24.49 | 24.45 |
| | | 1 | 24 | 24.63 | 24.65 | 24.56 |
| | | 1 | 49 | 24.51 | 24.49 | 24.40 |
| | | 25 | 0 | 23.52 | 23.63 | 23.46 |
| | | 25 | 12 | 23.53 | 23.57 | 23.58 |
| | | 25 | 25 | 23.41 | 23.43 | 23.43 |
| | | 50 | 0 | 23.36 | 23.49 | 23.47 |
| 10M | 256QAM | 1 | 0 | 21.62 | 21.65 | 21.52 |
| | | 1 | 24 | 21.61 | 21.62 | 21.54 |
| | | 1 | 49 | 21.53 | 21.56 | 21.54 |
| | | 25 | 0 | 21.52 | 21.46 | 21.45 |
| | | 25 | 12 | 21.53 | 21.49 | 21.29 |
| | | 25 | 25 | 21.42 | 21.45 | 21.24 |
| | | 50 | 0 | 21.41 | 21.44 | 21.37 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 26065 | 26365 | 26665 |
| | | Frequency (MHz) | | 1852.5 | 1882.5 | 1912.5 |
| 5M | QPSK | 1 | 0 | 26.50 | 26.60 | 26.31 |
| | | 1 | 12 | 26.46 | 26.56 | 26.27 |
| | | 1 | 24 | 26.47 | 26.45 | 26.30 |
| | | 12 | 0 | 25.52 | 25.44 | 25.38 |
| | | 12 | 6 | 25.46 | 25.47 | 25.40 |
| | | 12 | 13 | 25.38 | 25.46 | 25.22 |
| | | 25 | 0 | 25.48 | 25.42 | 25.22 |
| 5M | 16QAM | 1 | 0 | 25.74 | 25.78 | 25.58 |
| | | 1 | 12 | 25.43 | 25.62 | 25.46 |
| | | 1 | 24 | 25.58 | 25.50 | 25.46 |
| | | 12 | 0 | 24.56 | 24.55 | 24.41 |
| | | 12 | 6 | 24.44 | 24.54 | 24.28 |
| | | 12 | 13 | 24.36 | 24.43 | 24.26 |
| | | 25 | 0 | 24.60 | 24.50 | 24.49 |
| 5M | 64QAM | 1 | 0 | 24.48 | 24.51 | 24.53 |
| | | 1 | 12 | 24.61 | 24.60 | 24.55 |
| | | 1 | 24 | 24.51 | 24.52 | 24.44 |
| | | 12 | 0 | 23.64 | 23.60 | 23.55 |
| | | 12 | 6 | 23.57 | 23.65 | 23.56 |
| | | 12 | 13 | 23.28 | 23.41 | 23.45 |
| | | 25 | 0 | 23.47 | 23.50 | 23.40 |
| 5M | 256QAM | 1 | 0 | 21.55 | 21.56 | 21.40 |
| | | 1 | 12 | 21.49 | 21.63 | 21.39 |
| | | 1 | 24 | 21.49 | 21.60 | 21.42 |
| | | 12 | 0 | 21.47 | 21.49 | 21.36 |
| | | 12 | 6 | 21.51 | 21.61 | 21.17 |
| | | 12 | 13 | 21.54 | 21.40 | 21.16 |
| | | 25 | 0 | 21.39 | 21.52 | 21.22 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------------|--------|
| | | Channel | | 26055 | 26365 | 26675 |
| | | Frequency (MHz) | | 1851.5 | 1882.5 | 1913.5 |
| 3M | QPSK | 1 | 0 | 26.48 | 26.63 | 26.40 |
| | | 1 | 7 | 26.43 | 26.48 | 26.29 |
| | | 1 | 14 | 26.49 | 26.48 | 26.36 |
| | | 8 | 0 | 25.51 | 25.57 | 25.49 |
| | | 8 | 3 | 25.38 | 25.47 | 25.52 |
| | | 8 | 7 | 25.41 | 25.39 | 25.33 |
| | | 15 | 0 | 25.52 | 25.48 | 25.25 |
| 3M | 16QAM | 1 | 0 | 25.64 | 25.71 | 25.58 |
| | | 1 | 7 | 25.48 | 25.62 | 25.54 |
| | | 1 | 14 | 25.46 | 25.63 | 25.51 |
| | | 8 | 0 | 24.51 | 24.43 | 24.41 |
| | | 8 | 3 | 24.46 | 24.65 | 24.32 |
| | | 8 | 7 | 24.43 | 24.52 | 24.31 |
| | | 15 | 0 | 24.62 | 24.53 | 24.55 |
| 3M | 64QAM | 1 | 0 | 24.54 | 24.50 | 24.50 |
| | | 1 | 7 | 24.63 | 24.65 | 24.56 |
| | | 1 | 14 | 24.44 | 24.49 | 24.36 |
| | | 8 | 0 | 23.52 | 23.66 | 23.40 |
| | | 8 | 3 | 23.50 | 23.67 | 23.60 |
| | | 8 | 7 | 23.34 | 23.44 | 23.41 |
| | | 15 | 0 | 23.35 | 23.60 | 23.49 |
| 3M | 256QAM | 1 | 0 | 21.49 | 21.57 | 21.57 |
| | | 1 | 7 | 21.47 | 21.58 | 21.56 |
| | | 1 | 14 | 21.50 | 21.56 | 21.55 |
| | | 8 | 0 | 21.51 | 21.47 | 21.46 |
| | | 8 | 3 | 21.51 | 21.59 | 21.31 |
| | | 8 | 7 | 21.44 | 21.52 | 21.20 |
| | | 15 | 0 | 21.50 | 21.48 | 21.43 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 26047 | 26365 | 26683 |
| | | Frequency (MHz) | | 1850.7 | 1882.5 | 1914.3 |
| 1.4M | QPSK | 1 | 0 | 26.50 | 26.65 | 26.43 |
| | | 1 | 2 | 26.38 | 26.55 | 26.29 |
| | | 1 | 5 | 26.46 | 26.39 | 26.36 |
| | | 3 | 0 | 26.47 | 26.59 | 26.44 |
| | | 3 | 1 | 26.41 | 26.43 | 26.51 |
| | | 3 | 3 | 26.33 | 26.40 | 26.31 |
| | | 6 | 0 | 25.43 | 25.56 | 25.36 |
| 1.4M | 16QAM | 1 | 0 | 25.73 | 25.70 | 25.63 |
| | | 1 | 2 | 25.53 | 25.50 | 25.41 |
| | | 1 | 5 | 25.47 | 25.63 | 25.45 |
| | | 3 | 0 | 25.49 | 25.46 | 25.49 |
| | | 3 | 1 | 25.48 | 25.61 | 25.37 |
| | | 3 | 3 | 25.33 | 25.42 | 25.36 |
| | | 6 | 0 | 24.55 | 24.44 | 24.47 |
| 1.4M | 64QAM | 1 | 0 | 24.49 | 24.51 | 24.46 |
| | | 1 | 2 | 24.57 | 24.63 | 24.49 |
| | | 1 | 5 | 24.46 | 24.53 | 24.46 |
| | | 3 | 0 | 24.54 | 24.54 | 24.54 |
| | | 3 | 1 | 24.47 | 24.67 | 24.48 |
| | | 3 | 3 | 24.29 | 24.48 | 24.38 |
| | | 6 | 0 | 23.50 | 23.57 | 23.40 |
| 1.4M | 256QAM | 1 | 0 | 21.61 | 21.64 | 21.56 |
| | | 1 | 2 | 21.56 | 21.56 | 21.48 |
| | | 1 | 5 | 21.47 | 21.61 | 21.42 |
| | | 3 | 0 | 21.46 | 21.54 | 21.42 |
| | | 3 | 1 | 21.44 | 21.50 | 21.39 |
| | | 3 | 3 | 21.51 | 21.48 | 21.30 |
| | | 6 | 0 | 21.48 | 21.50 | 21.34 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.8 LTE Band 26 (Part 22)

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 26865 | 26915 | 26965 |
| | | Frequency (MHz) | | 831.5 | 836.5 | 841.5 |
| 15M | QPSK | 1 | 0 | 22.36 | 22.40 | 22.28 |
| | | 1 | 37 | 22.33 | 22.31 | 22.23 |
| | | 1 | 74 | 22.31 | 22.23 | 22.20 |
| | | 36 | 0 | 21.35 | 21.46 | 21.27 |
| | | 36 | 19 | 21.31 | 21.44 | 21.22 |
| | | 36 | 39 | 21.32 | 21.34 | 21.19 |
| | | 75 | 0 | 21.33 | 21.51 | 21.25 |
| 15M | 16QAM | 1 | 0 | 21.63 | 21.41 | 21.56 |
| | | 1 | 37 | 21.53 | 21.31 | 21.43 |
| | | 1 | 74 | 21.51 | 21.24 | 21.44 |
| | | 36 | 0 | 20.36 | 20.47 | 20.25 |
| | | 36 | 19 | 20.33 | 20.40 | 20.27 |
| | | 36 | 39 | 20.31 | 20.40 | 20.29 |
| | | 75 | 0 | 20.35 | 20.46 | 20.24 |
| 15M | 64QAM | 1 | 0 | 20.63 | 20.37 | 20.52 |
| | | 1 | 37 | 20.57 | 20.29 | 20.50 |
| | | 1 | 74 | 20.43 | 20.24 | 20.41 |
| | | 36 | 0 | 19.43 | 19.39 | 19.31 |
| | | 36 | 19 | 19.38 | 19.38 | 19.26 |
| | | 36 | 39 | 19.36 | 19.32 | 19.33 |
| | | 75 | 0 | 19.41 | 19.53 | 19.32 |
| 15M | 256QAM | 1 | 0 | 17.47 | 17.39 | 17.31 |
| | | 1 | 37 | 17.45 | 17.39 | 17.32 |
| | | 1 | 74 | 17.38 | 17.41 | 17.25 |
| | | 36 | 0 | 17.37 | 17.33 | 17.25 |
| | | 36 | 19 | 17.31 | 17.25 | 17.22 |
| | | 36 | 39 | 17.33 | 17.38 | 17.22 |
| | | 75 | 0 | 17.35 | 17.27 | 17.24 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 26840 | 26915 | 26990 |
| | | Frequency (MHz) | | 829 | 836.5 | 844 |
| 10M | QPSK | 1 | 0 | 22.35 | 22.33 | 22.19 |
| | | 1 | 24 | 22.26 | 22.18 | 22.14 |
| | | 1 | 49 | 22.25 | 22.25 | 22.13 |
| | | 25 | 0 | 21.29 | 21.19 | 21.06 |
| | | 25 | 12 | 21.28 | 21.19 | 21.29 |
| | | 25 | 25 | 21.25 | 21.25 | 21.15 |
| | | 50 | 0 | 21.28 | 21.22 | 21.23 |
| 10M | 16QAM | 1 | 0 | 21.63 | 21.57 | 21.53 |
| | | 1 | 24 | 21.49 | 21.47 | 21.34 |
| | | 1 | 49 | 21.50 | 21.48 | 21.43 |
| | | 25 | 0 | 20.28 | 20.28 | 20.19 |
| | | 25 | 12 | 20.27 | 20.19 | 20.26 |
| | | 25 | 25 | 20.30 | 20.30 | 20.23 |
| | | 50 | 0 | 20.30 | 20.24 | 20.15 |
| 10M | 64QAM | 1 | 0 | 20.59 | 20.54 | 20.48 |
| | | 1 | 24 | 20.57 | 20.54 | 20.47 |
| | | 1 | 49 | 20.42 | 20.42 | 20.31 |
| | | 25 | 0 | 19.37 | 19.36 | 19.26 |
| | | 25 | 12 | 19.32 | 19.28 | 19.22 |
| | | 25 | 25 | 19.36 | 19.30 | 19.26 |
| | | 50 | 0 | 19.33 | 19.32 | 19.24 |
| 10M | 256QAM | 1 | 0 | 17.39 | 17.37 | 17.31 |
| | | 1 | 24 | 17.37 | 17.32 | 17.31 |
| | | 1 | 49 | 17.29 | 17.20 | 17.23 |
| | | 25 | 0 | 17.33 | 17.23 | 17.15 |
| | | 25 | 12 | 17.26 | 17.26 | 17.18 |
| | | 25 | 25 | 17.23 | 17.16 | 17.16 |
| | | 50 | 0 | 17.33 | 17.25 | 17.20 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 26815 | 26915 | 27015 |
| | | Frequency (MHz) | | 826.5 | 836.5 | 846.5 |
| 5M | QPSK | 1 | 0 | 22.38 | 22.13 | 22.31 |
| | | 1 | 12 | 22.34 | 22.01 | 22.21 |
| | | 1 | 24 | 22.36 | 21.91 | 22.24 |
| | | 12 | 0 | 21.27 | 20.89 | 21.35 |
| | | 12 | 6 | 21.24 | 21.05 | 21.28 |
| | | 12 | 13 | 21.22 | 21.08 | 21.31 |
| | | 25 | 0 | 21.22 | 21.15 | 21.34 |
| 5M | 16QAM | 1 | 0 | 21.46 | 21.47 | 21.52 |
| | | 1 | 12 | 21.43 | 21.27 | 21.42 |
| | | 1 | 24 | 21.35 | 21.37 | 21.44 |
| | | 12 | 0 | 20.26 | 20.18 | 20.37 |
| | | 12 | 6 | 20.33 | 20.21 | 20.32 |
| | | 12 | 13 | 20.23 | 20.14 | 20.30 |
| | | 25 | 0 | 20.28 | 20.14 | 20.27 |
| 5M | 64QAM | 1 | 0 | 20.37 | 20.46 | 20.55 |
| | | 1 | 12 | 20.40 | 20.45 | 20.54 |
| | | 1 | 24 | 20.21 | 20.31 | 20.59 |
| | | 12 | 0 | 19.24 | 19.23 | 19.30 |
| | | 12 | 6 | 19.27 | 19.11 | 19.34 |
| | | 12 | 13 | 19.22 | 19.25 | 19.23 |
| | | 25 | 0 | 19.36 | 19.13 | 19.29 |
| 5M | 256QAM | 1 | 0 | 17.41 | 17.11 | 17.41 |
| | | 1 | 12 | 17.35 | 17.08 | 17.46 |
| | | 1 | 24 | 17.30 | 17.04 | 17.42 |
| | | 12 | 0 | 17.35 | 17.05 | 17.32 |
| | | 12 | 6 | 17.25 | 17.06 | 17.35 |
| | | 12 | 13 | 17.29 | 17.01 | 17.39 |
| | | 25 | 0 | 17.42 | 17.02 | 17.34 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 26805 | 26915 | 27025 |
| | | Frequency (MHz) | | 825.5 | 836.5 | 847.5 |
| 3M | QPSK | 1 | 0 | 22.05 | 22.24 | 22.19 |
| | | 1 | 7 | 22.04 | 22.17 | 22.09 |
| | | 1 | 14 | 21.88 | 22.32 | 22.05 |
| | | 8 | 0 | 21.07 | 21.17 | 20.92 |
| | | 8 | 3 | 21.04 | 21.11 | 21.23 |
| | | 8 | 7 | 20.98 | 21.02 | 21.01 |
| | | 15 | 0 | 20.98 | 21.19 | 21.17 |
| 3M | 16QAM | 1 | 0 | 20.97 | 21.35 | 21.41 |
| | | 1 | 7 | 20.91 | 21.42 | 21.23 |
| | | 1 | 14 | 20.94 | 21.14 | 21.31 |
| | | 8 | 0 | 20.07 | 20.17 | 20.09 |
| | | 8 | 3 | 20.00 | 20.15 | 20.18 |
| | | 8 | 7 | 20.02 | 20.07 | 20.19 |
| | | 15 | 0 | 20.08 | 20.24 | 20.03 |
| 3M | 64QAM | 1 | 0 | 20.01 | 20.31 | 20.35 |
| | | 1 | 7 | 19.95 | 20.37 | 20.35 |
| | | 1 | 14 | 19.85 | 19.99 | 20.16 |
| | | 8 | 0 | 19.12 | 19.09 | 19.25 |
| | | 8 | 3 | 19.10 | 19.10 | 19.13 |
| | | 8 | 7 | 19.03 | 19.04 | 19.14 |
| | | 15 | 0 | 19.02 | 19.20 | 19.22 |
| 3M | 256QAM | 1 | 0 | 17.08 | 17.32 | 17.22 |
| | | 1 | 7 | 17.07 | 17.20 | 17.25 |
| | | 1 | 14 | 16.92 | 17.06 | 17.21 |
| | | 8 | 0 | 17.03 | 17.29 | 17.13 |
| | | 8 | 3 | 17.06 | 17.15 | 17.08 |
| | | 8 | 7 | 17.02 | 17.14 | 17.16 |
| | | 15 | 0 | 17.09 | 17.25 | 17.11 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 26797 | 26915 | 27033 |
| | | Frequency (MHz) | | 824.7 | 836.5 | 848.3 |
| 1.4M | QPSK | 1 | 0 | 22.10 | 22.07 | 22.04 |
| | | 1 | 2 | 22.13 | 22.03 | 22.09 |
| | | 1 | 5 | 22.06 | 22.06 | 22.13 |
| | | 3 | 0 | 21.34 | 21.24 | 21.93 |
| | | 3 | 1 | 21.33 | 21.25 | 22.14 |
| | | 3 | 3 | 21.20 | 21.20 | 22.06 |
| | | 6 | 0 | 21.22 | 21.21 | 21.18 |
| 1.4M | 16QAM | 1 | 0 | 21.30 | 21.03 | 21.41 |
| | | 1 | 2 | 21.16 | 21.09 | 21.30 |
| | | 1 | 5 | 20.92 | 21.03 | 21.40 |
| | | 3 | 0 | 20.37 | 20.31 | 21.15 |
| | | 3 | 1 | 20.45 | 20.24 | 21.15 |
| | | 3 | 3 | 20.22 | 20.19 | 21.09 |
| | | 6 | 0 | 20.28 | 20.17 | 20.10 |
| 1.4M | 64QAM | 1 | 0 | 20.25 | 20.10 | 20.35 |
| | | 1 | 2 | 20.30 | 20.05 | 20.32 |
| | | 1 | 5 | 20.32 | 20.00 | 20.24 |
| | | 3 | 0 | 19.29 | 19.26 | 20.26 |
| | | 3 | 1 | 19.36 | 19.23 | 20.10 |
| | | 3 | 3 | 19.23 | 19.15 | 20.22 |
| | | 6 | 0 | 19.28 | 19.19 | 19.10 |
| 1.4M | 256QAM | 1 | 0 | 17.22 | 17.17 | 17.20 |
| | | 1 | 2 | 17.16 | 17.12 | 17.20 |
| | | 1 | 5 | 17.42 | 17.32 | 17.11 |
| | | 3 | 0 | 17.25 | 17.21 | 17.08 |
| | | 3 | 1 | 17.16 | 17.13 | 17.03 |
| | | 3 | 3 | 17.22 | 17.22 | 17.12 |
| | | 6 | 0 | 17.09 | 17.01 | 17.05 |



ERP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 26865 | 26915 | 26965 |
| | | Frequency (MHz) | | 831.5 | 836.5 | 841.5 |
| 15M | QPSK | 1 | 0 | 22.59 | 22.63 | 22.51 |
| | | 1 | 37 | 22.56 | 22.54 | 22.46 |
| | | 1 | 74 | 22.54 | 22.46 | 22.43 |
| | | 36 | 0 | 21.58 | 21.69 | 21.50 |
| | | 36 | 19 | 21.54 | 21.67 | 21.45 |
| | | 36 | 39 | 21.55 | 21.57 | 21.42 |
| | | 75 | 0 | 21.56 | 21.74 | 21.48 |
| 15M | 16QAM | 1 | 0 | 21.86 | 21.64 | 21.79 |
| | | 1 | 37 | 21.76 | 21.54 | 21.66 |
| | | 1 | 74 | 21.74 | 21.47 | 21.67 |
| | | 36 | 0 | 20.59 | 20.70 | 20.48 |
| | | 36 | 19 | 20.56 | 20.63 | 20.50 |
| | | 36 | 39 | 20.54 | 20.63 | 20.52 |
| | | 75 | 0 | 20.58 | 20.69 | 20.47 |
| 15M | 64QAM | 1 | 0 | 20.86 | 20.60 | 20.75 |
| | | 1 | 37 | 20.80 | 20.52 | 20.73 |
| | | 1 | 74 | 20.66 | 20.47 | 20.64 |
| | | 36 | 0 | 19.66 | 19.62 | 19.54 |
| | | 36 | 19 | 19.61 | 19.61 | 19.49 |
| | | 36 | 39 | 19.59 | 19.55 | 19.56 |
| | | 75 | 0 | 19.64 | 19.76 | 19.55 |
| 15M | 256QAM | 1 | 0 | 17.70 | 17.62 | 17.54 |
| | | 1 | 37 | 17.68 | 17.62 | 17.55 |
| | | 1 | 74 | 17.61 | 17.64 | 17.48 |
| | | 36 | 0 | 17.60 | 17.56 | 17.48 |
| | | 36 | 19 | 17.54 | 17.48 | 17.45 |
| | | 36 | 39 | 17.56 | 17.61 | 17.45 |
| | | 75 | 0 | 17.58 | 17.50 | 17.47 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 26840 | 26915 | 26990 |
| | | Frequency (MHz) | | 829 | 836.5 | 844 |
| 10M | QPSK | 1 | 0 | 22.55 | 22.58 | 22.42 |
| | | 1 | 24 | 22.48 | 22.49 | 22.37 |
| | | 1 | 49 | 22.49 | 22.48 | 22.36 |
| | | 25 | 0 | 21.48 | 21.52 | 21.29 |
| | | 25 | 12 | 21.48 | 21.51 | 21.52 |
| | | 25 | 25 | 21.48 | 21.48 | 21.38 |
| | | 50 | 0 | 21.51 | 21.51 | 21.46 |
| 10M | 16QAM | 1 | 0 | 21.79 | 21.86 | 21.76 |
| | | 1 | 24 | 21.67 | 21.72 | 21.57 |
| | | 1 | 49 | 21.64 | 21.73 | 21.66 |
| | | 25 | 0 | 20.55 | 20.51 | 20.42 |
| | | 25 | 12 | 20.55 | 20.50 | 20.49 |
| | | 25 | 25 | 20.46 | 20.53 | 20.46 |
| | | 50 | 0 | 20.54 | 20.53 | 20.38 |
| 10M | 64QAM | 1 | 0 | 20.83 | 20.82 | 20.71 |
| | | 1 | 24 | 20.80 | 20.80 | 20.70 |
| | | 1 | 49 | 20.65 | 20.65 | 20.54 |
| | | 25 | 0 | 19.62 | 19.60 | 19.49 |
| | | 25 | 12 | 19.57 | 19.55 | 19.45 |
| | | 25 | 25 | 19.55 | 19.59 | 19.49 |
| | | 50 | 0 | 19.58 | 19.56 | 19.47 |
| 10M | 256QAM | 1 | 0 | 17.66 | 17.62 | 17.54 |
| | | 1 | 24 | 17.64 | 17.60 | 17.54 |
| | | 1 | 49 | 17.58 | 17.52 | 17.46 |
| | | 25 | 0 | 17.56 | 17.56 | 17.38 |
| | | 25 | 12 | 17.52 | 17.49 | 17.41 |
| | | 25 | 25 | 17.46 | 17.46 | 17.39 |
| | | 50 | 0 | 17.55 | 17.56 | 17.43 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 26815 | 26915 | 27015 |
| | | Frequency (MHz) | | 826.5 | 836.5 | 846.5 |
| 5M | QPSK | 1 | 0 | 22.53 | 22.47 | 22.36 |
| | | 1 | 12 | 22.36 | 22.33 | 22.24 |
| | | 1 | 24 | 22.38 | 22.47 | 22.14 |
| | | 12 | 0 | 21.48 | 21.29 | 21.12 |
| | | 12 | 6 | 21.36 | 21.36 | 21.28 |
| | | 12 | 13 | 21.47 | 21.37 | 21.31 |
| | | 25 | 0 | 21.50 | 21.34 | 21.38 |
| 5M | 16QAM | 1 | 0 | 21.70 | 21.75 | 21.70 |
| | | 1 | 12 | 21.59 | 21.62 | 21.50 |
| | | 1 | 24 | 21.53 | 21.71 | 21.60 |
| | | 12 | 0 | 20.50 | 20.46 | 20.41 |
| | | 12 | 6 | 20.46 | 20.30 | 20.44 |
| | | 12 | 13 | 20.33 | 20.50 | 20.37 |
| | | 25 | 0 | 20.54 | 20.43 | 20.37 |
| 5M | 64QAM | 1 | 0 | 20.71 | 20.76 | 20.69 |
| | | 1 | 12 | 20.65 | 20.68 | 20.68 |
| | | 1 | 24 | 20.58 | 20.61 | 20.54 |
| | | 12 | 0 | 19.55 | 19.58 | 19.46 |
| | | 12 | 6 | 19.44 | 19.37 | 19.34 |
| | | 12 | 13 | 19.41 | 19.40 | 19.48 |
| | | 25 | 0 | 19.54 | 19.46 | 19.36 |
| 5M | 256QAM | 1 | 0 | 17.65 | 17.56 | 17.34 |
| | | 1 | 12 | 17.54 | 17.40 | 17.31 |
| | | 1 | 24 | 17.44 | 17.29 | 17.27 |
| | | 12 | 0 | 17.53 | 17.34 | 17.28 |
| | | 12 | 6 | 17.44 | 17.45 | 17.29 |
| | | 12 | 13 | 17.41 | 17.29 | 17.24 |
| | | 25 | 0 | 17.46 | 17.35 | 17.25 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 26805 | 26915 | 27025 |
| | | Frequency (MHz) | | 825.5 | 836.5 | 847.5 |
| 3M | QPSK | 1 | 0 | 22.53 | 22.52 | 22.47 |
| | | 1 | 7 | 22.38 | 22.51 | 22.40 |
| | | 1 | 14 | 22.45 | 22.33 | 22.55 |
| | | 8 | 0 | 21.37 | 21.56 | 21.40 |
| | | 8 | 3 | 21.43 | 21.52 | 21.34 |
| | | 8 | 7 | 21.41 | 21.44 | 21.25 |
| | | 15 | 0 | 21.37 | 21.42 | 21.42 |
| 3M | 16QAM | 1 | 0 | 21.65 | 21.51 | 21.58 |
| | | 1 | 7 | 21.67 | 21.53 | 21.65 |
| | | 1 | 14 | 21.61 | 21.28 | 21.37 |
| | | 8 | 0 | 20.43 | 20.62 | 20.40 |
| | | 8 | 3 | 20.41 | 20.46 | 20.38 |
| | | 8 | 7 | 20.44 | 20.39 | 20.30 |
| | | 15 | 0 | 20.48 | 20.46 | 20.47 |
| 3M | 64QAM | 1 | 0 | 20.82 | 20.50 | 20.54 |
| | | 1 | 7 | 20.77 | 20.46 | 20.60 |
| | | 1 | 14 | 20.55 | 20.32 | 20.22 |
| | | 8 | 0 | 19.48 | 19.55 | 19.32 |
| | | 8 | 3 | 19.51 | 19.43 | 19.33 |
| | | 8 | 7 | 19.44 | 19.37 | 19.27 |
| | | 15 | 0 | 19.50 | 19.48 | 19.43 |
| 3M | 256QAM | 1 | 0 | 17.58 | 17.56 | 17.55 |
| | | 1 | 7 | 17.50 | 17.39 | 17.43 |
| | | 1 | 14 | 17.57 | 17.63 | 17.29 |
| | | 8 | 0 | 17.51 | 17.47 | 17.52 |
| | | 8 | 3 | 17.40 | 17.50 | 17.38 |
| | | 8 | 7 | 17.36 | 17.49 | 17.37 |
| | | 15 | 0 | 17.45 | 17.34 | 17.48 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 26797 | 26915 | 27033 |
| | | Frequency (MHz) | | 824.7 | 836.5 | 848.3 |
| 1.4M | QPSK | 1 | 0 | 22.44 | 22.48 | 22.30 |
| | | 1 | 2 | 22.41 | 22.47 | 22.26 |
| | | 1 | 5 | 22.47 | 22.49 | 22.29 |
| | | 3 | 0 | 22.38 | 21.43 | 21.47 |
| | | 3 | 1 | 22.42 | 21.37 | 21.48 |
| | | 3 | 3 | 22.45 | 21.33 | 21.43 |
| | | 6 | 0 | 21.38 | 21.44 | 21.44 |
| 1.4M | 16QAM | 1 | 0 | 21.72 | 21.66 | 21.26 |
| | | 1 | 2 | 21.67 | 21.66 | 21.32 |
| | | 1 | 5 | 21.70 | 21.56 | 21.26 |
| | | 3 | 0 | 21.47 | 20.49 | 20.54 |
| | | 3 | 1 | 21.28 | 20.50 | 20.47 |
| | | 3 | 3 | 21.48 | 20.41 | 20.42 |
| | | 6 | 0 | 20.40 | 20.45 | 20.40 |
| 1.4M | 64QAM | 1 | 0 | 20.75 | 20.57 | 20.33 |
| | | 1 | 2 | 20.67 | 20.57 | 20.28 |
| | | 1 | 5 | 20.60 | 20.36 | 20.23 |
| | | 3 | 0 | 20.48 | 19.47 | 19.49 |
| | | 3 | 1 | 20.50 | 19.49 | 19.46 |
| | | 3 | 3 | 20.40 | 19.37 | 19.38 |
| | | 6 | 0 | 19.42 | 19.57 | 19.42 |
| 1.4M | 256QAM | 1 | 0 | 17.57 | 17.61 | 17.40 |
| | | 1 | 2 | 17.48 | 17.53 | 17.35 |
| | | 1 | 5 | 17.30 | 17.45 | 17.55 |
| | | 3 | 0 | 17.32 | 17.57 | 17.44 |
| | | 3 | 1 | 17.38 | 17.41 | 17.36 |
| | | 3 | 3 | 17.26 | 17.42 | 17.45 |
| | | 6 | 0 | 17.37 | 17.56 | 17.24 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

7.1.9 LTE Band 26 (Part 90)
Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Mid |
|-----|-----------|-----------------|-----------|-------|
| | | Channel | | 26740 |
| | | Frequency (MHz) | | 819 |
| 10M | QPSK | 1 | 0 | 22.32 |
| | | 1 | 24 | 22.25 |
| | | 1 | 49 | 22.26 |
| | | 25 | 0 | 21.25 |
| | | 25 | 12 | 21.25 |
| | | 25 | 25 | 21.25 |
| | | 50 | 0 | 21.28 |
| 10M | 16QAM | 1 | 0 | 21.56 |
| | | 1 | 24 | 21.44 |
| | | 1 | 49 | 21.41 |
| | | 25 | 0 | 20.32 |
| | | 25 | 12 | 20.32 |
| | | 25 | 25 | 20.23 |
| | | 50 | 0 | 20.31 |
| 10M | 64QAM | 1 | 0 | 20.60 |
| | | 1 | 24 | 20.57 |
| | | 1 | 49 | 20.42 |
| | | 25 | 0 | 19.39 |
| | | 25 | 12 | 19.34 |
| | | 25 | 25 | 19.32 |
| | | 50 | 0 | 19.35 |
| 10M | 256QAM | 1 | 0 | 17.43 |
| | | 1 | 24 | 17.41 |
| | | 1 | 49 | 17.35 |
| | | 25 | 0 | 17.33 |
| | | 25 | 12 | 17.29 |
| | | 25 | 25 | 17.23 |
| | | 50 | 0 | 17.32 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 26715 | 26740 | 26765 |
| | | Frequency (MHz) | | 816.5 | 819 | 821.5 |
| 5M | QPSK | 1 | 0 | 22.30 | 22.28 | 22.24 |
| | | 1 | 12 | 22.13 | 22.13 | 22.10 |
| | | 1 | 24 | 22.15 | 21.93 | 22.24 |
| | | 12 | 0 | 21.25 | 21.35 | 21.06 |
| | | 12 | 6 | 21.13 | 21.26 | 21.13 |
| | | 12 | 13 | 21.24 | 21.25 | 21.14 |
| | | 25 | 0 | 21.27 | 21.28 | 21.11 |
| 5M | 16QAM | 1 | 0 | 21.47 | 21.30 | 21.52 |
| | | 1 | 12 | 21.36 | 21.18 | 21.39 |
| | | 1 | 24 | 21.30 | 20.96 | 21.48 |
| | | 12 | 0 | 20.27 | 20.31 | 20.23 |
| | | 12 | 6 | 20.23 | 20.27 | 20.07 |
| | | 12 | 13 | 20.10 | 20.25 | 20.27 |
| | | 25 | 0 | 20.31 | 20.30 | 20.20 |
| 5M | 64QAM | 1 | 0 | 20.48 | 20.41 | 20.53 |
| | | 1 | 12 | 20.42 | 20.28 | 20.45 |
| | | 1 | 24 | 20.35 | 20.08 | 20.38 |
| | | 12 | 0 | 19.32 | 19.32 | 19.35 |
| | | 12 | 6 | 19.21 | 19.29 | 19.14 |
| | | 12 | 13 | 19.18 | 19.19 | 19.17 |
| | | 25 | 0 | 19.31 | 19.28 | 19.23 |
| 5M | 256QAM | 1 | 0 | 17.42 | 17.32 | 17.33 |
| | | 1 | 12 | 17.31 | 17.19 | 17.17 |
| | | 1 | 24 | 17.21 | 17.06 | 17.06 |
| | | 12 | 0 | 17.30 | 17.28 | 17.11 |
| | | 12 | 6 | 17.21 | 17.26 | 17.22 |
| | | 12 | 13 | 17.18 | 17.24 | 17.06 |
| | | 25 | 0 | 17.23 | 17.25 | 17.12 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 26705 | 26740 | 26775 |
| | | Frequency (MHz) | | 815.5 | 819 | 822.5 |
| 3M | QPSK | 1 | 0 | 22.30 | 22.26 | 22.29 |
| | | 1 | 7 | 22.15 | 22.12 | 22.28 |
| | | 1 | 14 | 22.22 | 22.14 | 22.10 |
| | | 8 | 0 | 21.14 | 21.05 | 21.33 |
| | | 8 | 3 | 21.20 | 21.16 | 21.29 |
| | | 8 | 7 | 21.18 | 21.20 | 21.21 |
| | | 15 | 0 | 21.14 | 21.10 | 21.19 |
| 3M | 16QAM | 1 | 0 | 21.42 | 21.57 | 21.28 |
| | | 1 | 7 | 21.44 | 21.46 | 21.30 |
| | | 1 | 14 | 21.38 | 21.47 | 21.05 |
| | | 8 | 0 | 20.20 | 20.27 | 20.39 |
| | | 8 | 3 | 20.18 | 20.08 | 20.23 |
| | | 8 | 7 | 20.21 | 20.18 | 20.16 |
| | | 15 | 0 | 20.25 | 20.15 | 20.23 |
| 3M | 64QAM | 1 | 0 | 20.59 | 20.54 | 20.27 |
| | | 1 | 7 | 20.54 | 20.44 | 20.23 |
| | | 1 | 14 | 20.32 | 20.33 | 20.09 |
| | | 8 | 0 | 19.25 | 19.34 | 19.32 |
| | | 8 | 3 | 19.28 | 19.16 | 19.20 |
| | | 8 | 7 | 19.21 | 19.17 | 19.14 |
| | | 15 | 0 | 19.27 | 19.30 | 19.25 |
| 3M | 256QAM | 1 | 0 | 17.35 | 17.34 | 17.33 |
| | | 1 | 7 | 17.27 | 17.31 | 17.16 |
| | | 1 | 14 | 17.34 | 17.07 | 17.40 |
| | | 8 | 0 | 17.28 | 17.12 | 17.24 |
| | | 8 | 3 | 17.17 | 17.23 | 17.27 |
| | | 8 | 7 | 17.13 | 17.05 | 17.26 |
| | | 15 | 0 | 17.22 | 17.22 | 17.11 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 26697 | 26740 | 26783 |
| | | Frequency (MHz) | | 814.7 | 819 | 823.3 |
| 1.4M | QPSK | 1 | 0 | 22.21 | 22.26 | 22.25 |
| | | 1 | 2 | 22.18 | 22.24 | 22.24 |
| | | 1 | 5 | 22.24 | 22.19 | 22.26 |
| | | 3 | 0 | 22.15 | 22.22 | 21.20 |
| | | 3 | 1 | 22.19 | 22.22 | 21.14 |
| | | 3 | 3 | 22.22 | 22.17 | 21.10 |
| | | 6 | 0 | 21.15 | 21.15 | 21.21 |
| 1.4M | 16QAM | 1 | 0 | 21.49 | 21.48 | 21.43 |
| | | 1 | 2 | 21.44 | 21.39 | 21.43 |
| | | 1 | 5 | 21.47 | 21.39 | 21.33 |
| | | 3 | 0 | 21.24 | 21.25 | 20.26 |
| | | 3 | 1 | 21.05 | 21.32 | 20.27 |
| | | 3 | 3 | 21.25 | 21.13 | 20.18 |
| | | 6 | 0 | 20.17 | 20.20 | 20.22 |
| 1.4M | 64QAM | 1 | 0 | 20.52 | 20.47 | 20.34 |
| | | 1 | 2 | 20.44 | 20.51 | 20.34 |
| | | 1 | 5 | 20.37 | 20.28 | 20.13 |
| | | 3 | 0 | 20.25 | 20.38 | 19.24 |
| | | 3 | 1 | 20.27 | 20.29 | 19.26 |
| | | 3 | 3 | 20.17 | 20.20 | 19.14 |
| | | 6 | 0 | 19.19 | 19.31 | 19.34 |
| 1.4M | 256QAM | 1 | 0 | 17.34 | 17.36 | 17.38 |
| | | 1 | 2 | 17.25 | 17.26 | 17.30 |
| | | 1 | 5 | 17.07 | 17.33 | 17.22 |
| | | 3 | 0 | 17.09 | 17.25 | 17.34 |
| | | 3 | 1 | 17.15 | 17.26 | 17.18 |
| | | 3 | 3 | 17.03 | 17.10 | 17.19 |
| | | 6 | 0 | 17.14 | 17.22 | 17.33 |

ERP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Mid |
|-----|-----------|-----------------|-----------|--------------|
| | | Channel | | 26740 |
| | | Frequency (MHz) | | 819 |
| 10M | QPSK | 1 | 0 | 22.47 |
| | | 1 | 24 | 22.40 |
| | | 1 | 49 | 22.41 |
| | | 25 | 0 | 21.40 |
| | | 25 | 12 | 21.40 |
| | | 25 | 25 | 21.40 |
| | | 50 | 0 | 21.43 |
| 10M | 16QAM | 1 | 0 | 21.71 |
| | | 1 | 24 | 21.59 |
| | | 1 | 49 | 21.56 |
| | | 25 | 0 | 20.47 |
| | | 25 | 12 | 20.47 |
| | | 25 | 25 | 20.38 |
| | | 50 | 0 | 20.46 |
| 10M | 64QAM | 1 | 0 | 20.75 |
| | | 1 | 24 | 20.72 |
| | | 1 | 49 | 20.57 |
| | | 25 | 0 | 19.54 |
| | | 25 | 12 | 19.49 |
| | | 25 | 25 | 19.47 |
| | | 50 | 0 | 19.50 |
| 10M | 256QAM | 1 | 0 | 17.58 |
| | | 1 | 24 | 17.56 |
| | | 1 | 49 | 17.50 |
| | | 25 | 0 | 17.48 |
| | | 25 | 12 | 17.44 |
| | | 25 | 25 | 17.38 |
| | | 50 | 0 | 17.47 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|-------|--------------|
| | | Channel | | 26715 | 26740 | 26765 |
| | | Frequency (MHz) | | 816.5 | 819 | 821.5 |
| 5M | QPSK | 1 | 0 | 22.45 | 22.43 | 22.39 |
| | | 1 | 12 | 22.28 | 22.28 | 22.25 |
| | | 1 | 24 | 22.30 | 22.08 | 22.39 |
| | | 12 | 0 | 21.40 | 21.50 | 21.21 |
| | | 12 | 6 | 21.28 | 21.41 | 21.28 |
| | | 12 | 13 | 21.39 | 21.40 | 21.29 |
| | | 25 | 0 | 21.42 | 21.43 | 21.26 |
| 5M | 16QAM | 1 | 0 | 21.62 | 21.45 | 21.67 |
| | | 1 | 12 | 21.51 | 21.33 | 21.54 |
| | | 1 | 24 | 21.45 | 21.11 | 21.63 |
| | | 12 | 0 | 20.42 | 20.46 | 20.38 |
| | | 12 | 6 | 20.38 | 20.42 | 20.22 |
| | | 12 | 13 | 20.25 | 20.40 | 20.42 |
| | | 25 | 0 | 20.46 | 20.45 | 20.35 |
| 5M | 64QAM | 1 | 0 | 20.63 | 20.56 | 20.68 |
| | | 1 | 12 | 20.57 | 20.43 | 20.60 |
| | | 1 | 24 | 20.50 | 20.23 | 20.53 |
| | | 12 | 0 | 19.47 | 19.47 | 19.50 |
| | | 12 | 6 | 19.36 | 19.44 | 19.29 |
| | | 12 | 13 | 19.33 | 19.34 | 19.32 |
| | | 25 | 0 | 19.46 | 19.43 | 19.38 |
| 5M | 256QAM | 1 | 0 | 17.57 | 17.47 | 17.48 |
| | | 1 | 12 | 17.46 | 17.34 | 17.32 |
| | | 1 | 24 | 17.36 | 17.21 | 17.21 |
| | | 12 | 0 | 17.45 | 17.43 | 17.26 |
| | | 12 | 6 | 17.36 | 17.41 | 17.37 |
| | | 12 | 13 | 17.33 | 17.39 | 17.21 |
| | | 25 | 0 | 17.38 | 17.40 | 17.27 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 26705 | 26740 | 26775 |
| | | Frequency (MHz) | | 815.5 | 819 | 822.5 |
| 3M | QPSK | 1 | 0 | 22.45 | 22.41 | 22.44 |
| | | 1 | 7 | 22.30 | 22.27 | 22.43 |
| | | 1 | 14 | 22.37 | 22.29 | 22.25 |
| | | 8 | 0 | 21.29 | 21.20 | 21.48 |
| | | 8 | 3 | 21.35 | 21.31 | 21.44 |
| | | 8 | 7 | 21.33 | 21.35 | 21.36 |
| | | 15 | 0 | 21.29 | 21.25 | 21.34 |
| 3M | 16QAM | 1 | 0 | 21.57 | 21.72 | 21.43 |
| | | 1 | 7 | 21.59 | 21.61 | 21.45 |
| | | 1 | 14 | 21.53 | 21.62 | 21.20 |
| | | 8 | 0 | 20.35 | 20.42 | 20.54 |
| | | 8 | 3 | 20.33 | 20.23 | 20.38 |
| | | 8 | 7 | 20.36 | 20.33 | 20.31 |
| | | 15 | 0 | 20.40 | 20.30 | 20.38 |
| 3M | 64QAM | 1 | 0 | 20.74 | 20.69 | 20.42 |
| | | 1 | 7 | 20.69 | 20.59 | 20.38 |
| | | 1 | 14 | 20.47 | 20.48 | 20.24 |
| | | 8 | 0 | 19.40 | 19.49 | 19.47 |
| | | 8 | 3 | 19.43 | 19.31 | 19.35 |
| | | 8 | 7 | 19.36 | 19.32 | 19.29 |
| | | 15 | 0 | 19.42 | 19.45 | 19.40 |
| 3M | 256QAM | 1 | 0 | 17.50 | 17.49 | 17.48 |
| | | 1 | 7 | 17.42 | 17.46 | 17.31 |
| | | 1 | 14 | 17.49 | 17.22 | 17.55 |
| | | 8 | 0 | 17.43 | 17.27 | 17.39 |
| | | 8 | 3 | 17.32 | 17.38 | 17.42 |
| | | 8 | 7 | 17.28 | 17.20 | 17.41 |
| | | 15 | 0 | 17.37 | 17.37 | 17.26 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 26697 | 26740 | 26783 |
| | | Frequency (MHz) | | 814.7 | 819 | 823.3 |
| 1.4M | QPSK | 1 | 0 | 22.36 | 22.41 | 22.40 |
| | | 1 | 2 | 22.33 | 22.39 | 22.39 |
| | | 1 | 5 | 22.39 | 22.34 | 22.41 |
| | | 3 | 0 | 22.30 | 22.37 | 21.35 |
| | | 3 | 1 | 22.34 | 22.37 | 21.29 |
| | | 3 | 3 | 22.37 | 22.32 | 21.25 |
| | | 6 | 0 | 21.30 | 21.30 | 21.36 |
| 1.4M | 16QAM | 1 | 0 | 21.64 | 21.63 | 21.58 |
| | | 1 | 2 | 21.59 | 21.54 | 21.58 |
| | | 1 | 5 | 21.62 | 21.54 | 21.48 |
| | | 3 | 0 | 21.39 | 21.40 | 20.41 |
| | | 3 | 1 | 21.20 | 21.47 | 20.42 |
| | | 3 | 3 | 21.40 | 21.28 | 20.33 |
| | | 6 | 0 | 20.32 | 20.35 | 20.37 |
| 1.4M | 64QAM | 1 | 0 | 20.67 | 20.62 | 20.49 |
| | | 1 | 2 | 20.59 | 20.66 | 20.49 |
| | | 1 | 5 | 20.52 | 20.43 | 20.28 |
| | | 3 | 0 | 20.40 | 20.53 | 19.39 |
| | | 3 | 1 | 20.42 | 20.44 | 19.41 |
| | | 3 | 3 | 20.32 | 20.35 | 19.29 |
| | | 6 | 0 | 19.34 | 19.46 | 19.49 |
| 1.4M | 256QAM | 1 | 0 | 17.49 | 17.51 | 17.53 |
| | | 1 | 2 | 17.40 | 17.41 | 17.45 |
| | | 1 | 5 | 17.22 | 17.48 | 17.37 |
| | | 3 | 0 | 17.24 | 17.40 | 17.49 |
| | | 3 | 1 | 17.30 | 17.41 | 17.33 |
| | | 3 | 3 | 17.18 | 17.25 | 17.34 |
| | | 6 | 0 | 17.29 | 17.37 | 17.48 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

7.1.10 LTE Band 38 (Power Class III)

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|-------|-------|
| | | Channel | | 37850 | 38000 | 38150 |
| | | Frequency (MHz) | | 2580 | 2595 | 2610 |
| 20M | QPSK | 1 | 0 | 22.32 | 22.16 | 22.08 |
| | | 1 | 50 | 22.18 | 22.13 | 22.06 |
| | | 1 | 99 | 22.02 | 21.95 | 21.87 |
| | | 50 | 0 | 21.38 | 21.31 | 21.21 |
| | | 50 | 25 | 21.32 | 21.27 | 21.20 |
| | | 50 | 50 | 21.28 | 21.26 | 21.17 |
| | | 100 | 0 | 21.33 | 21.30 | 21.24 |
| 20M | 16QAM | 1 | 0 | 21.35 | 21.30 | 21.28 |
| | | 1 | 50 | 21.18 | 21.18 | 21.10 |
| | | 1 | 99 | 21.05 | 20.95 | 20.86 |
| | | 50 | 0 | 20.36 | 20.29 | 20.20 |
| | | 50 | 25 | 20.31 | 20.26 | 20.24 |
| | | 50 | 50 | 20.27 | 20.18 | 20.15 |
| | | 100 | 0 | 20.33 | 20.33 | 20.24 |
| 20M | 64QAM | 1 | 0 | 20.48 | 20.46 | 20.41 |
| | | 1 | 50 | 20.32 | 20.30 | 20.23 |
| | | 1 | 99 | 20.11 | 20.08 | 20.06 |
| | | 50 | 0 | 19.39 | 19.34 | 19.31 |
| | | 50 | 25 | 19.36 | 19.27 | 19.21 |
| | | 50 | 50 | 19.28 | 19.22 | 19.15 |
| | | 100 | 0 | 19.31 | 19.27 | 19.20 |
| 20M | 256QAM | 1 | 0 | 17.36 | 17.31 | 17.26 |
| | | 1 | 50 | 17.28 | 17.24 | 17.15 |
| | | 1 | 99 | 17.15 | 17.08 | 17.06 |
| | | 50 | 0 | 17.32 | 17.22 | 17.12 |
| | | 50 | 25 | 17.27 | 17.17 | 17.16 |
| | | 50 | 50 | 17.25 | 17.25 | 17.22 |
| | | 100 | 0 | 17.31 | 17.22 | 17.11 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 37825 | 38000 | 38175 |
| | | Frequency (MHz) | | 2577.5 | 2595 | 2612.5 |
| 15M | QPSK | 1 | 0 | 22.28 | 22.12 | 22.04 |
| | | 1 | 37 | 22.13 | 22.06 | 22.05 |
| | | 1 | 74 | 21.93 | 21.89 | 21.82 |
| | | 36 | 0 | 21.35 | 21.29 | 21.14 |
| | | 36 | 19 | 21.26 | 21.23 | 21.19 |
| | | 36 | 39 | 21.25 | 21.19 | 21.17 |
| | | 75 | 0 | 21.28 | 21.20 | 21.24 |
| 15M | 16QAM | 1 | 0 | 21.30 | 21.23 | 21.24 |
| | | 1 | 37 | 21.18 | 21.13 | 21.00 |
| | | 1 | 74 | 20.96 | 20.94 | 20.81 |
| | | 36 | 0 | 20.31 | 20.24 | 20.20 |
| | | 36 | 19 | 20.27 | 20.17 | 20.15 |
| | | 36 | 39 | 20.25 | 20.18 | 20.13 |
| | | 75 | 0 | 20.30 | 20.29 | 20.23 |
| 15M | 64QAM | 1 | 0 | 20.41 | 20.37 | 20.38 |
| | | 1 | 37 | 20.28 | 20.28 | 20.16 |
| | | 1 | 74 | 20.08 | 20.01 | 20.03 |
| | | 36 | 0 | 19.32 | 19.32 | 19.31 |
| | | 36 | 19 | 19.29 | 19.22 | 19.20 |
| | | 36 | 39 | 19.19 | 19.12 | 19.10 |
| | | 75 | 0 | 19.28 | 19.22 | 19.16 |
| 15M | 256QAM | 1 | 0 | 17.32 | 17.28 | 17.20 |
| | | 1 | 37 | 17.19 | 17.21 | 17.08 |
| | | 1 | 74 | 17.06 | 17.06 | 17.02 |
| | | 36 | 0 | 17.28 | 17.19 | 17.05 |
| | | 36 | 19 | 17.26 | 17.11 | 17.07 |
| | | 36 | 39 | 17.24 | 17.16 | 17.15 |
| | | 75 | 0 | 17.25 | 17.18 | 17.08 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 37800 | 38000 | 38200 |
| | | Frequency (MHz) | | 2575 | 2595 | 2615 |
| 10M | QPSK | 1 | 0 | 22.27 | 22.03 | 22.04 |
| | | 1 | 24 | 22.13 | 22.04 | 22.03 |
| | | 1 | 49 | 21.86 | 21.74 | 21.77 |
| | | 25 | 0 | 21.34 | 21.14 | 21.11 |
| | | 25 | 12 | 21.16 | 21.09 | 21.10 |
| | | 25 | 25 | 21.15 | 21.05 | 21.10 |
| | | 50 | 0 | 21.22 | 21.12 | 21.11 |
| 10M | 16QAM | 1 | 0 | 21.28 | 21.10 | 21.19 |
| | | 1 | 24 | 21.17 | 21.11 | 20.85 |
| | | 1 | 49 | 20.83 | 20.91 | 20.67 |
| | | 25 | 0 | 20.31 | 20.11 | 20.05 |
| | | 25 | 12 | 20.15 | 20.05 | 20.10 |
| | | 25 | 25 | 20.18 | 20.03 | 20.11 |
| | | 50 | 0 | 20.21 | 20.26 | 20.21 |
| 10M | 64QAM | 1 | 0 | 20.29 | 20.23 | 20.32 |
| | | 1 | 24 | 20.13 | 20.27 | 20.07 |
| | | 1 | 49 | 19.94 | 19.94 | 19.91 |
| | | 25 | 0 | 19.28 | 19.31 | 19.24 |
| | | 25 | 12 | 19.28 | 19.20 | 19.19 |
| | | 25 | 25 | 19.19 | 19.09 | 19.09 |
| | | 50 | 0 | 19.13 | 19.20 | 19.01 |
| 10M | 256QAM | 1 | 0 | 17.25 | 17.26 | 17.08 |
| | | 1 | 24 | 17.09 | 17.15 | 17.03 |
| | | 1 | 49 | 16.94 | 16.92 | 16.91 |
| | | 25 | 0 | 17.20 | 17.18 | 17.02 |
| | | 25 | 12 | 17.25 | 17.10 | 16.96 |
| | | 25 | 25 | 17.22 | 17.11 | 17.04 |
| | | 50 | 0 | 17.23 | 17.16 | 17.02 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 37775 | 38000 | 38225 |
| | | Frequency (MHz) | | 2572.5 | 2595 | 2617.5 |
| 5M | QPSK | 1 | 0 | 22.25 | 22.00 | 21.94 |
| | | 1 | 12 | 22.06 | 21.98 | 21.90 |
| | | 1 | 24 | 21.87 | 21.76 | 21.64 |
| | | 12 | 0 | 21.30 | 21.21 | 21.01 |
| | | 12 | 6 | 21.17 | 21.22 | 21.04 |
| | | 12 | 13 | 21.22 | 21.17 | 21.10 |
| | | 25 | 0 | 21.24 | 21.15 | 21.03 |
| 5M | 16QAM | 1 | 0 | 21.24 | 21.11 | 21.17 |
| | | 1 | 12 | 21.11 | 21.10 | 21.00 |
| | | 1 | 24 | 20.96 | 20.80 | 20.69 |
| | | 12 | 0 | 20.23 | 20.13 | 20.13 |
| | | 12 | 6 | 20.27 | 20.04 | 20.06 |
| | | 12 | 13 | 20.25 | 20.18 | 20.03 |
| | | 25 | 0 | 20.23 | 20.21 | 20.08 |
| 5M | 64QAM | 1 | 0 | 20.32 | 20.34 | 20.38 |
| | | 1 | 12 | 20.24 | 20.19 | 20.15 |
| | | 1 | 24 | 20.00 | 19.94 | 19.95 |
| | | 12 | 0 | 19.32 | 19.20 | 19.24 |
| | | 12 | 6 | 19.24 | 19.22 | 19.12 |
| | | 12 | 13 | 19.07 | 19.07 | 19.06 |
| | | 25 | 0 | 19.28 | 19.13 | 19.12 |
| 5M | 256QAM | 1 | 0 | 17.23 | 17.28 | 17.05 |
| | | 1 | 12 | 17.12 | 17.15 | 16.89 |
| | | 1 | 24 | 16.97 | 16.92 | 16.87 |
| | | 12 | 0 | 17.21 | 17.12 | 17.01 |
| | | 12 | 6 | 17.17 | 17.06 | 16.85 |
| | | 12 | 13 | 17.18 | 17.11 | 16.98 |
| | | 25 | 0 | 17.17 | 17.09 | 16.91 |

EIRP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|-------|-------|
| | | Channel | | 37850 | 38000 | 38150 |
| | | Frequency (MHz) | | 2580 | 2595 | 2610 |
| 20M | QPSK | 1 | 0 | 28.43 | 28.27 | 28.19 |
| | | 1 | 50 | 28.29 | 28.24 | 28.17 |
| | | 1 | 99 | 28.13 | 28.06 | 27.98 |
| | | 50 | 0 | 27.49 | 27.42 | 27.32 |
| | | 50 | 25 | 27.43 | 27.38 | 27.31 |
| | | 50 | 50 | 27.39 | 27.37 | 27.28 |
| | | 100 | 0 | 27.44 | 27.41 | 27.35 |
| 20M | 16QAM | 1 | 0 | 27.46 | 27.41 | 27.39 |
| | | 1 | 50 | 27.29 | 27.29 | 27.21 |
| | | 1 | 99 | 27.16 | 27.06 | 26.97 |
| | | 50 | 0 | 26.47 | 26.40 | 26.31 |
| | | 50 | 25 | 26.42 | 26.37 | 26.35 |
| | | 50 | 50 | 26.38 | 26.29 | 26.26 |
| | | 100 | 0 | 26.44 | 26.44 | 26.35 |
| 20M | 64QAM | 1 | 0 | 26.59 | 26.57 | 26.52 |
| | | 1 | 50 | 26.43 | 26.41 | 26.34 |
| | | 1 | 99 | 26.22 | 26.19 | 26.17 |
| | | 50 | 0 | 25.50 | 25.45 | 25.42 |
| | | 50 | 25 | 25.47 | 25.38 | 25.32 |
| | | 50 | 50 | 25.39 | 25.33 | 25.26 |
| | | 100 | 0 | 25.42 | 25.38 | 25.31 |
| 20M | 256QAM | 1 | 0 | 23.47 | 23.42 | 23.37 |
| | | 1 | 50 | 23.39 | 23.35 | 23.26 |
| | | 1 | 99 | 23.26 | 23.19 | 23.17 |
| | | 50 | 0 | 23.43 | 23.33 | 23.23 |
| | | 50 | 25 | 23.38 | 23.28 | 23.27 |
| | | 50 | 50 | 23.36 | 23.36 | 23.33 |
| | | 100 | 0 | 23.42 | 23.33 | 23.22 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|-------|--------|
| | | Channel | | 37825 | 38000 | 38175 |
| | | Frequency (MHz) | | 2577.5 | 2595 | 2612.5 |
| 15M | QPSK | 1 | 0 | 28.39 | 28.23 | 28.15 |
| | | 1 | 37 | 28.24 | 28.17 | 28.16 |
| | | 1 | 74 | 28.04 | 28.00 | 27.93 |
| | | 36 | 0 | 27.46 | 27.40 | 27.25 |
| | | 36 | 19 | 27.37 | 27.34 | 27.30 |
| | | 36 | 39 | 27.36 | 27.30 | 27.28 |
| | | 75 | 0 | 27.39 | 27.31 | 27.35 |
| 15M | 16QAM | 1 | 0 | 27.41 | 27.34 | 27.35 |
| | | 1 | 37 | 27.29 | 27.24 | 27.11 |
| | | 1 | 74 | 27.07 | 27.05 | 26.92 |
| | | 36 | 0 | 26.42 | 26.35 | 26.31 |
| | | 36 | 19 | 26.38 | 26.28 | 26.26 |
| | | 36 | 39 | 26.36 | 26.29 | 26.24 |
| | | 75 | 0 | 26.41 | 26.40 | 26.34 |
| 15M | 64QAM | 1 | 0 | 26.52 | 26.48 | 26.49 |
| | | 1 | 37 | 26.39 | 26.39 | 26.27 |
| | | 1 | 74 | 26.19 | 26.12 | 26.14 |
| | | 36 | 0 | 25.43 | 25.43 | 25.42 |
| | | 36 | 19 | 25.40 | 25.33 | 25.31 |
| | | 36 | 39 | 25.30 | 25.23 | 25.21 |
| | | 75 | 0 | 25.39 | 25.33 | 25.27 |
| 15M | 256QAM | 1 | 0 | 23.43 | 23.39 | 23.31 |
| | | 1 | 37 | 23.30 | 23.32 | 23.19 |
| | | 1 | 74 | 23.17 | 23.17 | 23.13 |
| | | 36 | 0 | 23.39 | 23.30 | 23.16 |
| | | 36 | 19 | 23.37 | 23.22 | 23.18 |
| | | 36 | 39 | 23.35 | 23.27 | 23.26 |
| | | 75 | 0 | 23.36 | 23.29 | 23.19 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 37800 | 38000 | 38200 |
| | | Frequency (MHz) | | 2575 | 2595 | 2615 |
| 10M | QPSK | 1 | 0 | 28.38 | 28.14 | 28.15 |
| | | 1 | 24 | 28.24 | 28.15 | 28.14 |
| | | 1 | 49 | 27.97 | 27.85 | 27.88 |
| | | 25 | 0 | 27.45 | 27.25 | 27.22 |
| | | 25 | 12 | 27.27 | 27.20 | 27.21 |
| | | 25 | 25 | 27.26 | 27.16 | 27.21 |
| | | 50 | 0 | 27.33 | 27.23 | 27.22 |
| 10M | 16QAM | 1 | 0 | 27.39 | 27.21 | 27.30 |
| | | 1 | 24 | 27.28 | 27.22 | 26.96 |
| | | 1 | 49 | 26.94 | 27.02 | 26.78 |
| | | 25 | 0 | 26.42 | 26.22 | 26.16 |
| | | 25 | 12 | 26.26 | 26.16 | 26.21 |
| | | 25 | 25 | 26.29 | 26.14 | 26.22 |
| | | 50 | 0 | 26.32 | 26.37 | 26.32 |
| 10M | 64QAM | 1 | 0 | 26.40 | 26.34 | 26.43 |
| | | 1 | 24 | 26.24 | 26.38 | 26.18 |
| | | 1 | 49 | 26.05 | 26.05 | 26.02 |
| | | 25 | 0 | 25.39 | 25.42 | 25.35 |
| | | 25 | 12 | 25.39 | 25.31 | 25.30 |
| | | 25 | 25 | 25.30 | 25.20 | 25.20 |
| | | 50 | 0 | 25.24 | 25.31 | 25.12 |
| 10M | 256QAM | 1 | 0 | 23.36 | 23.37 | 23.19 |
| | | 1 | 24 | 23.20 | 23.26 | 23.14 |
| | | 1 | 49 | 23.05 | 23.03 | 23.02 |
| | | 25 | 0 | 23.31 | 23.29 | 23.13 |
| | | 25 | 12 | 23.36 | 23.21 | 23.07 |
| | | 25 | 25 | 23.33 | 23.22 | 23.15 |
| | | 50 | 0 | 23.34 | 23.27 | 23.13 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 37775 | 38000 | 38225 |
| | | Frequency (MHz) | | 2572.5 | 2595 | 2617.5 |
| 5M | QPSK | 1 | 0 | 28.36 | 28.11 | 28.05 |
| | | 1 | 12 | 28.17 | 28.09 | 28.01 |
| | | 1 | 24 | 27.98 | 27.87 | 27.75 |
| | | 12 | 0 | 27.41 | 27.32 | 27.12 |
| | | 12 | 6 | 27.28 | 27.33 | 27.15 |
| | | 12 | 13 | 27.33 | 27.28 | 27.21 |
| | | 25 | 0 | 27.35 | 27.26 | 27.14 |
| 5M | 16QAM | 1 | 0 | 27.35 | 27.22 | 27.28 |
| | | 1 | 12 | 27.22 | 27.21 | 27.11 |
| | | 1 | 24 | 27.07 | 26.91 | 26.80 |
| | | 12 | 0 | 26.34 | 26.24 | 26.24 |
| | | 12 | 6 | 26.38 | 26.15 | 26.17 |
| | | 12 | 13 | 26.36 | 26.29 | 26.14 |
| | | 25 | 0 | 26.34 | 26.32 | 26.19 |
| 5M | 64QAM | 1 | 0 | 26.43 | 26.45 | 26.49 |
| | | 1 | 12 | 26.35 | 26.30 | 26.26 |
| | | 1 | 24 | 26.11 | 26.05 | 26.06 |
| | | 12 | 0 | 25.43 | 25.31 | 25.35 |
| | | 12 | 6 | 25.35 | 25.33 | 25.23 |
| | | 12 | 13 | 25.18 | 25.18 | 25.17 |
| | | 25 | 0 | 25.39 | 25.24 | 25.23 |
| 5M | 256QAM | 1 | 0 | 23.34 | 23.39 | 23.16 |
| | | 1 | 12 | 23.23 | 23.26 | 23.00 |
| | | 1 | 24 | 23.08 | 23.03 | 22.98 |
| | | 12 | 0 | 23.32 | 23.23 | 23.12 |
| | | 12 | 6 | 23.28 | 23.17 | 22.96 |
| | | 12 | 13 | 23.29 | 23.22 | 23.09 |
| | | 25 | 0 | 23.28 | 23.20 | 23.02 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.11 LTE Band 38 (Power Class II)

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------------|-------|
| | | Channel | | 37850 | 38000 | 38150 |
| | | Frequency (MHz) | | 2580 | 2595 | 2610 |
| 20M | QPSK | 1 | 0 | 24.26 | 24.31 | 24.29 |
| | | 1 | 50 | 24.17 | 24.22 | 24.20 |
| | | 1 | 99 | 24.10 | 24.15 | 24.13 |
| | | 50 | 0 | 23.32 | 23.37 | 23.35 |
| | | 50 | 25 | 23.23 | 23.28 | 23.26 |
| | | 50 | 50 | 23.16 | 23.21 | 23.19 |
| | | 100 | 0 | 23.19 | 23.24 | 23.22 |
| 20M | 16QAM | 1 | 0 | 23.28 | 23.33 | 23.31 |
| | | 1 | 50 | 23.20 | 23.25 | 23.23 |
| | | 1 | 99 | 23.12 | 23.17 | 23.15 |
| | | 50 | 0 | 22.31 | 22.36 | 22.34 |
| | | 50 | 25 | 22.26 | 22.31 | 22.29 |
| | | 50 | 50 | 22.17 | 22.22 | 22.20 |
| | | 100 | 0 | 22.21 | 22.26 | 22.24 |
| 20M | 64QAM | 1 | 0 | 22.29 | 22.34 | 22.32 |
| | | 1 | 50 | 22.20 | 22.25 | 22.23 |
| | | 1 | 99 | 22.11 | 22.16 | 22.14 |
| | | 50 | 0 | 21.34 | 21.39 | 21.37 |
| | | 50 | 25 | 21.28 | 21.33 | 21.31 |
| | | 50 | 50 | 21.16 | 21.21 | 21.19 |
| | | 100 | 0 | 21.21 | 21.26 | 21.24 |
| 20M | 256QAM | 1 | 0 | 19.29 | 19.34 | 19.32 |
| | | 1 | 50 | 19.18 | 19.23 | 19.21 |
| | | 1 | 99 | 19.09 | 19.14 | 19.12 |
| | | 50 | 0 | 19.22 | 19.27 | 19.25 |
| | | 50 | 25 | 19.17 | 19.22 | 19.20 |
| | | 50 | 50 | 19.09 | 19.14 | 19.12 |
| | | 100 | 0 | 19.13 | 19.18 | 19.16 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 37825 | 38000 | 38175 |
| | | Frequency (MHz) | | 2577.5 | 2595 | 2612.5 |
| 15M | QPSK | 1 | 0 | 24.26 | 24.25 | 24.29 |
| | | 1 | 37 | 24.07 | 24.21 | 24.17 |
| | | 1 | 74 | 24.04 | 24.06 | 24.06 |
| | | 36 | 0 | 23.30 | 23.33 | 23.25 |
| | | 36 | 19 | 23.15 | 23.23 | 23.23 |
| | | 36 | 39 | 23.08 | 23.18 | 23.12 |
| | | 75 | 0 | 23.12 | 23.14 | 23.20 |
| 15M | 16QAM | 1 | 0 | 23.22 | 23.31 | 23.28 |
| | | 1 | 37 | 23.17 | 23.21 | 23.14 |
| | | 1 | 74 | 23.07 | 23.14 | 23.13 |
| | | 36 | 0 | 22.27 | 22.30 | 22.31 |
| | | 36 | 19 | 22.20 | 22.23 | 22.25 |
| | | 36 | 39 | 22.15 | 22.20 | 22.17 |
| | | 75 | 0 | 22.13 | 22.22 | 22.16 |
| 15M | 64QAM | 1 | 0 | 22.27 | 22.32 | 22.31 |
| | | 1 | 37 | 22.11 | 22.20 | 22.15 |
| | | 1 | 74 | 22.10 | 22.11 | 22.10 |
| | | 36 | 0 | 21.28 | 21.39 | 21.36 |
| | | 36 | 19 | 21.25 | 21.28 | 21.23 |
| | | 36 | 39 | 21.16 | 21.18 | 21.12 |
| | | 75 | 0 | 21.18 | 21.22 | 21.14 |
| 15M | 256QAM | 1 | 0 | 19.27 | 19.31 | 19.24 |
| | | 1 | 37 | 19.12 | 19.20 | 19.12 |
| | | 1 | 74 | 19.08 | 19.10 | 19.05 |
| | | 36 | 0 | 19.15 | 19.18 | 19.23 |
| | | 36 | 19 | 19.13 | 19.14 | 19.11 |
| | | 36 | 39 | 19.01 | 19.09 | 19.12 |
| | | 75 | 0 | 19.03 | 19.10 | 19.13 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 37800 | 38000 | 38200 |
| | | Frequency (MHz) | | 2575 | 2595 | 2615 |
| 10M | QPSK | 1 | 0 | 24.20 | 24.22 | 24.17 |
| | | 1 | 24 | 23.99 | 24.04 | 24.12 |
| | | 1 | 49 | 23.94 | 24.01 | 23.92 |
| | | 25 | 0 | 23.27 | 23.24 | 23.21 |
| | | 25 | 12 | 23.03 | 23.15 | 23.13 |
| | | 25 | 25 | 23.00 | 23.12 | 22.94 |
| | | 50 | 0 | 23.02 | 23.10 | 23.00 |
| 10M | 16QAM | 1 | 0 | 23.09 | 23.30 | 23.15 |
| | | 1 | 24 | 23.16 | 23.19 | 23.15 |
| | | 1 | 49 | 22.93 | 23.06 | 22.99 |
| | | 25 | 0 | 22.12 | 22.18 | 22.18 |
| | | 25 | 12 | 22.07 | 22.18 | 22.14 |
| | | 25 | 25 | 22.03 | 22.10 | 22.07 |
| | | 50 | 0 | 22.08 | 22.17 | 22.10 |
| 10M | 64QAM | 1 | 0 | 22.18 | 22.18 | 22.23 |
| | | 1 | 24 | 22.04 | 22.16 | 22.12 |
| | | 1 | 49 | 21.97 | 22.02 | 22.02 |
| | | 25 | 0 | 21.27 | 21.28 | 21.22 |
| | | 25 | 12 | 21.05 | 21.16 | 21.12 |
| | | 25 | 25 | 21.03 | 21.18 | 21.13 |
| | | 50 | 0 | 21.05 | 21.16 | 21.05 |
| 10M | 256QAM | 1 | 0 | 19.13 | 19.21 | 19.09 |
| | | 1 | 24 | 18.96 | 19.16 | 19.08 |
| | | 1 | 49 | 18.95 | 18.94 | 18.99 |
| | | 25 | 0 | 19.16 | 19.12 | 19.07 |
| | | 25 | 12 | 19.11 | 18.99 | 19.07 |
| | | 25 | 25 | 18.92 | 18.99 | 18.99 |
| | | 50 | 0 | 18.97 | 19.15 | 18.92 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 37775 | 38000 | 38225 |
| | | Frequency (MHz) | | 2572.5 | 2595 | 2617.5 |
| 5M | QPSK | 1 | 0 | 24.16 | 24.22 | 24.22 |
| | | 1 | 12 | 24.14 | 24.17 | 24.14 |
| | | 1 | 24 | 24.10 | 24.15 | 24.11 |
| | | 12 | 0 | 23.26 | 23.31 | 23.26 |
| | | 12 | 6 | 23.18 | 23.27 | 23.19 |
| | | 12 | 13 | 23.16 | 23.20 | 23.18 |
| | | 25 | 0 | 23.19 | 23.17 | 23.22 |
| 5M | 16QAM | 1 | 0 | 23.26 | 23.29 | 23.24 |
| | | 1 | 12 | 23.16 | 23.19 | 23.21 |
| | | 1 | 24 | 23.07 | 23.12 | 23.12 |
| | | 12 | 0 | 22.25 | 22.36 | 22.28 |
| | | 12 | 6 | 22.20 | 22.22 | 22.25 |
| | | 12 | 13 | 22.09 | 22.19 | 22.18 |
| | | 25 | 0 | 22.18 | 22.18 | 22.17 |
| 5M | 64QAM | 1 | 0 | 22.19 | 22.30 | 22.27 |
| | | 1 | 12 | 22.12 | 22.23 | 22.13 |
| | | 1 | 24 | 22.09 | 22.09 | 22.11 |
| | | 12 | 0 | 21.24 | 21.39 | 21.34 |
| | | 12 | 6 | 21.21 | 21.31 | 21.26 |
| | | 12 | 13 | 21.13 | 21.13 | 21.15 |
| | | 25 | 0 | 21.13 | 21.17 | 21.22 |
| 5M | 256QAM | 1 | 0 | 19.21 | 19.27 | 19.22 |
| | | 1 | 12 | 19.11 | 19.21 | 19.14 |
| | | 1 | 24 | 19.01 | 19.14 | 19.02 |
| | | 12 | 0 | 19.13 | 19.22 | 19.21 |
| | | 12 | 6 | 19.16 | 19.15 | 19.18 |
| | | 12 | 13 | 19.09 | 19.11 | 19.06 |
| | | 25 | 0 | 19.13 | 19.10 | 19.13 |



EIRP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------------|-------|
| | | Channel | | 37850 | 38000 | 38150 |
| | | Frequency (MHz) | | 2580 | 2595 | 2610 |
| 20M | QPSK | 1 | 0 | 30.37 | 30.42 | 30.40 |
| | | 1 | 50 | 30.28 | 30.33 | 30.31 |
| | | 1 | 99 | 30.21 | 30.26 | 30.24 |
| | | 50 | 0 | 29.43 | 29.48 | 29.46 |
| | | 50 | 25 | 29.34 | 29.39 | 29.37 |
| | | 50 | 50 | 29.27 | 29.32 | 29.30 |
| | | 100 | 0 | 29.30 | 29.35 | 29.33 |
| 20M | 16QAM | 1 | 0 | 29.39 | 29.44 | 29.42 |
| | | 1 | 50 | 29.31 | 29.36 | 29.34 |
| | | 1 | 99 | 29.23 | 29.28 | 29.26 |
| | | 50 | 0 | 28.42 | 28.47 | 28.45 |
| | | 50 | 25 | 28.37 | 28.42 | 28.40 |
| | | 50 | 50 | 28.28 | 28.33 | 28.31 |
| | | 100 | 0 | 28.32 | 28.37 | 28.35 |
| 20M | 64QAM | 1 | 0 | 28.40 | 28.45 | 28.43 |
| | | 1 | 50 | 28.31 | 28.36 | 28.34 |
| | | 1 | 99 | 28.22 | 28.27 | 28.25 |
| | | 50 | 0 | 27.45 | 27.50 | 27.48 |
| | | 50 | 25 | 27.39 | 27.44 | 27.42 |
| | | 50 | 50 | 27.27 | 27.32 | 27.30 |
| | | 100 | 0 | 27.32 | 27.37 | 27.35 |
| 20M | 256QAM | 1 | 0 | 25.40 | 25.45 | 25.43 |
| | | 1 | 50 | 25.29 | 25.34 | 25.32 |
| | | 1 | 99 | 25.20 | 25.25 | 25.23 |
| | | 50 | 0 | 25.33 | 25.38 | 25.36 |
| | | 50 | 25 | 25.28 | 25.33 | 25.31 |
| | | 50 | 50 | 25.20 | 25.25 | 25.23 |
| | | 100 | 0 | 25.24 | 25.29 | 25.27 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------------|--------------|
| | | Channel | | 37825 | 38000 | 38175 |
| | | Frequency (MHz) | | 2577.5 | 2595 | 2612.5 |
| 15M | QPSK | 1 | 0 | 30.37 | 30.36 | 30.40 |
| | | 1 | 37 | 30.18 | 30.32 | 30.28 |
| | | 1 | 74 | 30.15 | 30.17 | 30.17 |
| | | 36 | 0 | 29.41 | 29.44 | 29.36 |
| | | 36 | 19 | 29.26 | 29.34 | 29.34 |
| | | 36 | 39 | 29.19 | 29.29 | 29.23 |
| | | 75 | 0 | 29.23 | 29.25 | 29.31 |
| 15M | 16QAM | 1 | 0 | 29.33 | 29.42 | 29.39 |
| | | 1 | 37 | 29.28 | 29.32 | 29.25 |
| | | 1 | 74 | 29.18 | 29.25 | 29.24 |
| | | 36 | 0 | 28.38 | 28.41 | 28.42 |
| | | 36 | 19 | 28.31 | 28.34 | 28.36 |
| | | 36 | 39 | 28.26 | 28.31 | 28.28 |
| | | 75 | 0 | 28.24 | 28.33 | 28.27 |
| 15M | 64QAM | 1 | 0 | 28.38 | 28.43 | 28.42 |
| | | 1 | 37 | 28.22 | 28.31 | 28.26 |
| | | 1 | 74 | 28.21 | 28.22 | 28.21 |
| | | 36 | 0 | 27.39 | 27.50 | 27.47 |
| | | 36 | 19 | 27.36 | 27.39 | 27.34 |
| | | 36 | 39 | 27.27 | 27.29 | 27.23 |
| | | 75 | 0 | 27.29 | 27.33 | 27.25 |
| 15M | 256QAM | 1 | 0 | 25.38 | 25.42 | 25.35 |
| | | 1 | 37 | 25.23 | 25.31 | 25.23 |
| | | 1 | 74 | 25.19 | 25.21 | 25.16 |
| | | 36 | 0 | 25.26 | 25.29 | 25.34 |
| | | 36 | 19 | 25.24 | 25.25 | 25.22 |
| | | 36 | 39 | 25.12 | 25.20 | 25.23 |
| | | 75 | 0 | 25.14 | 25.21 | 25.24 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|--------------|--------------|
| | | Channel | | 37800 | 38000 | 38200 |
| | | Frequency (MHz) | | 2575 | 2595 | 2615 |
| 10M | QPSK | 1 | 0 | 30.31 | 30.33 | 30.28 |
| | | 1 | 24 | 30.10 | 30.15 | 30.23 |
| | | 1 | 49 | 30.05 | 30.12 | 30.03 |
| | | 25 | 0 | 29.38 | 29.35 | 29.32 |
| | | 25 | 12 | 29.14 | 29.26 | 29.24 |
| | | 25 | 25 | 29.11 | 29.23 | 29.05 |
| | | 50 | 0 | 29.13 | 29.21 | 29.11 |
| 10M | 16QAM | 1 | 0 | 29.20 | 29.41 | 29.26 |
| | | 1 | 24 | 29.27 | 29.30 | 29.26 |
| | | 1 | 49 | 29.04 | 29.17 | 29.10 |
| | | 25 | 0 | 28.23 | 28.29 | 28.29 |
| | | 25 | 12 | 28.18 | 28.29 | 28.25 |
| | | 25 | 25 | 28.14 | 28.21 | 28.18 |
| | | 50 | 0 | 28.19 | 28.28 | 28.21 |
| 10M | 64QAM | 1 | 0 | 28.29 | 28.29 | 28.34 |
| | | 1 | 24 | 28.15 | 28.27 | 28.23 |
| | | 1 | 49 | 28.08 | 28.13 | 28.13 |
| | | 25 | 0 | 27.38 | 27.39 | 27.33 |
| | | 25 | 12 | 27.16 | 27.27 | 27.23 |
| | | 25 | 25 | 27.14 | 27.29 | 27.24 |
| | | 50 | 0 | 27.16 | 27.27 | 27.16 |
| 10M | 256QAM | 1 | 0 | 25.24 | 25.32 | 25.20 |
| | | 1 | 24 | 25.07 | 25.27 | 25.19 |
| | | 1 | 49 | 25.06 | 25.05 | 25.10 |
| | | 25 | 0 | 25.27 | 25.23 | 25.18 |
| | | 25 | 12 | 25.22 | 25.10 | 25.18 |
| | | 25 | 25 | 25.03 | 25.10 | 25.10 |
| | | 50 | 0 | 25.08 | 25.26 | 25.03 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------------|--------------|
| | | Channel | | 37775 | 38000 | 38225 |
| | | Frequency (MHz) | | 2572.5 | 2595 | 2617.5 |
| 5M | QPSK | 1 | 0 | 30.27 | 30.33 | 30.33 |
| | | 1 | 12 | 30.25 | 30.28 | 30.25 |
| | | 1 | 24 | 30.21 | 30.26 | 30.22 |
| | | 12 | 0 | 29.37 | 29.42 | 29.37 |
| | | 12 | 6 | 29.29 | 29.38 | 29.30 |
| | | 12 | 13 | 29.27 | 29.31 | 29.29 |
| | | 25 | 0 | 29.30 | 29.28 | 29.33 |
| 5M | 16QAM | 1 | 0 | 29.37 | 29.40 | 29.35 |
| | | 1 | 12 | 29.27 | 29.30 | 29.32 |
| | | 1 | 24 | 29.18 | 29.23 | 29.23 |
| | | 12 | 0 | 28.36 | 28.47 | 28.39 |
| | | 12 | 6 | 28.31 | 28.33 | 28.36 |
| | | 12 | 13 | 28.20 | 28.30 | 28.29 |
| | | 25 | 0 | 28.29 | 28.29 | 28.28 |
| 5M | 64QAM | 1 | 0 | 28.30 | 28.41 | 28.38 |
| | | 1 | 12 | 28.23 | 28.34 | 28.24 |
| | | 1 | 24 | 28.20 | 28.20 | 28.22 |
| | | 12 | 0 | 27.35 | 27.50 | 27.45 |
| | | 12 | 6 | 27.32 | 27.42 | 27.37 |
| | | 12 | 13 | 27.24 | 27.24 | 27.26 |
| | | 25 | 0 | 27.24 | 27.28 | 27.33 |
| 5M | 256QAM | 1 | 0 | 25.32 | 25.38 | 25.33 |
| | | 1 | 12 | 25.22 | 25.32 | 25.25 |
| | | 1 | 24 | 25.12 | 25.25 | 25.13 |
| | | 12 | 0 | 25.24 | 25.33 | 25.32 |
| | | 12 | 6 | 25.27 | 25.26 | 25.29 |
| | | 12 | 13 | 25.20 | 25.22 | 25.17 |
| | | 25 | 0 | 25.24 | 25.21 | 25.24 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.12 LTE Band 41 (Power Class III)
Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 39750 | 40620 | 41490 |
| | | Frequency (MHz) | | 2506 | 2593 | 2680 |
| 20M | QPSK | 1 | 0 | 22.45 | 22.37 | 22.08 |
| | | 1 | 50 | 22.38 | 22.35 | 22.05 |
| | | 1 | 99 | 22.27 | 22.17 | 22.03 |
| | | 50 | 0 | 21.52 | 21.51 | 21.35 |
| | | 50 | 25 | 21.50 | 21.46 | 21.32 |
| | | 50 | 50 | 21.45 | 21.37 | 21.25 |
| | | 100 | 0 | 21.47 | 21.38 | 21.22 |
| 20M | 16QAM | 1 | 0 | 21.54 | 21.47 | 21.35 |
| | | 1 | 50 | 21.38 | 21.29 | 21.16 |
| | | 1 | 99 | 21.29 | 21.19 | 20.91 |
| | | 50 | 0 | 20.56 | 20.55 | 20.36 |
| | | 50 | 25 | 20.60 | 20.50 | 20.37 |
| | | 50 | 50 | 20.47 | 20.43 | 20.24 |
| | | 100 | 0 | 20.49 | 20.41 | 20.34 |
| 20M | 64QAM | 1 | 0 | 20.57 | 20.50 | 20.32 |
| | | 1 | 50 | 20.55 | 20.53 | 20.36 |
| | | 1 | 99 | 20.46 | 20.46 | 20.35 |
| | | 50 | 0 | 19.52 | 19.45 | 19.33 |
| | | 50 | 25 | 19.52 | 19.52 | 19.36 |
| | | 50 | 50 | 19.48 | 19.38 | 19.24 |
| | | 100 | 0 | 19.46 | 19.44 | 19.20 |
| 20M | 256QAM | 1 | 0 | 17.43 | 17.41 | 17.23 |
| | | 1 | 50 | 17.41 | 17.34 | 17.18 |
| | | 1 | 99 | 17.46 | 17.46 | 17.41 |
| | | 50 | 0 | 17.44 | 17.39 | 17.16 |
| | | 50 | 25 | 17.37 | 17.35 | 17.17 |
| | | 50 | 50 | 17.43 | 17.43 | 17.31 |
| | | 100 | 0 | 17.36 | 17.31 | 17.12 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 39725 | 40620 | 41515 |
| | | Frequency (MHz) | | 2503.5 | 2593 | 2682.5 |
| 15M | QPSK | 1 | 0 | 22.42 | 22.30 | 22.04 |
| | | 1 | 37 | 22.34 | 22.28 | 22.03 |
| | | 1 | 74 | 22.23 | 22.13 | 21.93 |
| | | 36 | 0 | 21.51 | 21.44 | 21.25 |
| | | 36 | 19 | 21.41 | 21.44 | 21.33 |
| | | 36 | 39 | 21.41 | 21.35 | 21.15 |
| | | 75 | 0 | 21.41 | 21.31 | 21.15 |
| 15M | 16QAM | 1 | 0 | 21.50 | 21.39 | 21.02 |
| | | 1 | 37 | 21.37 | 21.20 | 20.99 |
| | | 1 | 74 | 21.29 | 21.09 | 20.94 |
| | | 36 | 0 | 20.56 | 20.48 | 20.21 |
| | | 36 | 19 | 20.57 | 20.41 | 20.30 |
| | | 36 | 39 | 20.40 | 20.42 | 20.16 |
| | | 75 | 0 | 20.42 | 20.41 | 20.15 |
| 15M | 64QAM | 1 | 0 | 20.55 | 20.42 | 20.01 |
| | | 1 | 37 | 20.51 | 20.49 | 20.05 |
| | | 1 | 74 | 20.38 | 20.44 | 20.03 |
| | | 36 | 0 | 19.42 | 19.37 | 19.22 |
| | | 36 | 19 | 19.50 | 19.51 | 19.31 |
| | | 36 | 39 | 19.46 | 19.31 | 19.19 |
| | | 75 | 0 | 19.39 | 19.35 | 19.18 |
| 15M | 256QAM | 1 | 0 | 17.35 | 17.35 | 17.13 |
| | | 1 | 37 | 17.40 | 17.26 | 17.10 |
| | | 1 | 74 | 17.40 | 17.38 | 17.38 |
| | | 36 | 0 | 17.40 | 17.29 | 17.16 |
| | | 36 | 19 | 17.28 | 17.25 | 17.11 |
| | | 36 | 39 | 17.35 | 17.36 | 17.31 |
| | | 75 | 0 | 17.34 | 17.30 | 17.10 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 39700 | 40620 | 41540 |
| | | Frequency (MHz) | | 2501 | 2593 | 2685 |
| 10M | QPSK | 1 | 0 | 22.37 | 22.26 | 21.99 |
| | | 1 | 24 | 22.34 | 22.20 | 21.98 |
| | | 1 | 49 | 22.21 | 22.09 | 21.92 |
| | | 25 | 0 | 21.50 | 21.41 | 21.25 |
| | | 25 | 12 | 21.37 | 21.38 | 21.28 |
| | | 25 | 25 | 21.39 | 21.33 | 21.08 |
| | | 50 | 0 | 21.32 | 21.28 | 21.11 |
| 10M | 16QAM | 1 | 0 | 21.42 | 21.23 | 21.01 |
| | | 1 | 24 | 21.29 | 21.26 | 20.94 |
| | | 1 | 49 | 21.23 | 21.11 | 20.87 |
| | | 25 | 0 | 20.45 | 20.42 | 20.25 |
| | | 25 | 12 | 20.40 | 20.40 | 20.24 |
| | | 25 | 25 | 20.32 | 20.28 | 20.13 |
| | | 50 | 0 | 20.39 | 20.24 | 20.10 |
| 10M | 64QAM | 1 | 0 | 20.39 | 20.27 | 19.99 |
| | | 1 | 24 | 20.27 | 20.20 | 19.99 |
| | | 1 | 49 | 20.21 | 20.12 | 19.92 |
| | | 25 | 0 | 19.46 | 19.40 | 19.24 |
| | | 25 | 12 | 19.36 | 19.34 | 19.33 |
| | | 25 | 25 | 19.41 | 19.26 | 19.15 |
| | | 50 | 0 | 19.32 | 19.25 | 19.10 |
| 10M | 256QAM | 1 | 0 | 17.28 | 17.34 | 17.11 |
| | | 1 | 24 | 17.40 | 17.17 | 17.00 |
| | | 1 | 49 | 17.40 | 17.28 | 17.36 |
| | | 25 | 0 | 17.39 | 17.22 | 17.06 |
| | | 25 | 12 | 17.19 | 17.25 | 17.03 |
| | | 25 | 25 | 17.34 | 17.36 | 17.28 |
| | | 50 | 0 | 17.32 | 17.22 | 17.08 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 39675 | 40620 | 41565 |
| | | Frequency (MHz) | | 2498.5 | 2593 | 2687.5 |
| 5M | QPSK | 1 | 0 | 22.35 | 22.29 | 21.98 |
| | | 1 | 12 | 22.29 | 22.24 | 22.03 |
| | | 1 | 24 | 22.16 | 22.11 | 21.88 |
| | | 12 | 0 | 21.43 | 21.36 | 21.18 |
| | | 12 | 6 | 21.40 | 21.40 | 21.29 |
| | | 12 | 13 | 21.40 | 21.27 | 21.05 |
| | | 25 | 0 | 21.36 | 21.30 | 21.12 |
| 5M | 16QAM | 1 | 0 | 21.35 | 21.25 | 21.01 |
| | | 1 | 12 | 21.29 | 21.20 | 20.96 |
| | | 1 | 24 | 21.17 | 21.03 | 20.83 |
| | | 12 | 0 | 20.47 | 20.44 | 20.15 |
| | | 12 | 6 | 20.36 | 20.34 | 20.29 |
| | | 12 | 13 | 20.40 | 20.30 | 20.12 |
| | | 25 | 0 | 20.33 | 20.21 | 20.06 |
| 5M | 64QAM | 1 | 0 | 20.32 | 20.23 | 19.95 |
| | | 1 | 12 | 20.33 | 20.20 | 19.96 |
| | | 1 | 24 | 20.16 | 20.07 | 19.83 |
| | | 12 | 0 | 19.45 | 19.35 | 19.24 |
| | | 12 | 6 | 19.39 | 19.34 | 19.31 |
| | | 12 | 13 | 19.41 | 19.33 | 19.09 |
| | | 25 | 0 | 19.36 | 19.22 | 19.06 |
| 5M | 256QAM | 1 | 0 | 17.32 | 17.29 | 17.13 |
| | | 1 | 12 | 17.32 | 17.21 | 17.04 |
| | | 1 | 24 | 17.30 | 17.29 | 17.31 |
| | | 12 | 0 | 17.32 | 17.28 | 17.10 |
| | | 12 | 6 | 17.18 | 17.21 | 17.01 |
| | | 12 | 13 | 17.26 | 17.34 | 17.22 |
| | | 25 | 0 | 17.34 | 17.22 | 17.04 |

EIRP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 39750 | 40620 | 41490 |
| | | Frequency (MHz) | | 2506 | 2593 | 2680 |
| 20M | QPSK | 1 | 0 | 28.62 | 28.54 | 28.25 |
| | | 1 | 50 | 28.55 | 28.52 | 28.22 |
| | | 1 | 99 | 28.44 | 28.34 | 28.20 |
| | | 50 | 0 | 27.69 | 27.68 | 27.52 |
| | | 50 | 25 | 27.67 | 27.63 | 27.49 |
| | | 50 | 50 | 27.62 | 27.54 | 27.42 |
| | | 100 | 0 | 27.64 | 27.55 | 27.39 |
| 20M | 16QAM | 1 | 0 | 27.71 | 27.64 | 27.52 |
| | | 1 | 50 | 27.55 | 27.46 | 27.33 |
| | | 1 | 99 | 27.46 | 27.36 | 27.08 |
| | | 50 | 0 | 26.73 | 26.72 | 26.53 |
| | | 50 | 25 | 26.77 | 26.67 | 26.54 |
| | | 50 | 50 | 26.64 | 26.60 | 26.41 |
| | | 100 | 0 | 26.66 | 26.58 | 26.51 |
| 20M | 64QAM | 1 | 0 | 26.74 | 26.67 | 26.49 |
| | | 1 | 50 | 26.72 | 26.70 | 26.53 |
| | | 1 | 99 | 26.63 | 26.63 | 26.52 |
| | | 50 | 0 | 25.69 | 25.62 | 25.50 |
| | | 50 | 25 | 25.69 | 25.69 | 25.53 |
| | | 50 | 50 | 25.65 | 25.55 | 25.41 |
| | | 100 | 0 | 25.63 | 25.61 | 25.37 |
| 20M | 256QAM | 1 | 0 | 23.60 | 23.58 | 23.40 |
| | | 1 | 50 | 23.58 | 23.51 | 23.35 |
| | | 1 | 99 | 23.63 | 23.63 | 23.58 |
| | | 50 | 0 | 23.61 | 23.56 | 23.33 |
| | | 50 | 25 | 23.54 | 23.52 | 23.34 |
| | | 50 | 50 | 23.60 | 23.60 | 23.48 |
| | | 100 | 0 | 23.53 | 23.48 | 23.29 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|-------|--------|
| | | Channel | | 39725 | 40620 | 41515 |
| | | Frequency (MHz) | | 2503.5 | 2593 | 2682.5 |
| 15M | QPSK | 1 | 0 | 28.59 | 28.47 | 28.21 |
| | | 1 | 37 | 28.51 | 28.45 | 28.20 |
| | | 1 | 74 | 28.40 | 28.30 | 28.10 |
| | | 36 | 0 | 27.68 | 27.61 | 27.42 |
| | | 36 | 19 | 27.58 | 27.61 | 27.50 |
| | | 36 | 39 | 27.58 | 27.52 | 27.32 |
| | | 75 | 0 | 27.58 | 27.48 | 27.32 |
| 15M | 16QAM | 1 | 0 | 27.67 | 27.56 | 27.19 |
| | | 1 | 37 | 27.54 | 27.37 | 27.16 |
| | | 1 | 74 | 27.46 | 27.26 | 27.11 |
| | | 36 | 0 | 26.73 | 26.65 | 26.38 |
| | | 36 | 19 | 26.74 | 26.58 | 26.47 |
| | | 36 | 39 | 26.57 | 26.59 | 26.33 |
| | | 75 | 0 | 26.59 | 26.58 | 26.32 |
| 15M | 64QAM | 1 | 0 | 26.72 | 26.59 | 26.18 |
| | | 1 | 37 | 26.68 | 26.66 | 26.22 |
| | | 1 | 74 | 26.55 | 26.61 | 26.20 |
| | | 36 | 0 | 25.59 | 25.54 | 25.39 |
| | | 36 | 19 | 25.67 | 25.68 | 25.48 |
| | | 36 | 39 | 25.63 | 25.48 | 25.36 |
| | | 75 | 0 | 25.56 | 25.52 | 25.35 |
| 15M | 256QAM | 1 | 0 | 23.52 | 23.52 | 23.30 |
| | | 1 | 37 | 23.57 | 23.43 | 23.27 |
| | | 1 | 74 | 23.57 | 23.55 | 23.55 |
| | | 36 | 0 | 23.57 | 23.46 | 23.33 |
| | | 36 | 19 | 23.45 | 23.42 | 23.28 |
| | | 36 | 39 | 23.52 | 23.53 | 23.48 |
| | | 75 | 0 | 23.51 | 23.47 | 23.27 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|-------|-------|
| | | Channel | | 39700 | 40620 | 41540 |
| | | Frequency (MHz) | | 2501 | 2593 | 2685 |
| 10M | QPSK | 1 | 0 | 28.54 | 28.43 | 28.16 |
| | | 1 | 24 | 28.51 | 28.37 | 28.15 |
| | | 1 | 49 | 28.38 | 28.26 | 28.09 |
| | | 25 | 0 | 27.67 | 27.58 | 27.42 |
| | | 25 | 12 | 27.54 | 27.55 | 27.45 |
| | | 25 | 25 | 27.56 | 27.50 | 27.25 |
| | | 50 | 0 | 27.49 | 27.45 | 27.28 |
| 10M | 16QAM | 1 | 0 | 27.59 | 27.40 | 27.18 |
| | | 1 | 24 | 27.46 | 27.43 | 27.11 |
| | | 1 | 49 | 27.40 | 27.28 | 27.04 |
| | | 25 | 0 | 26.62 | 26.59 | 26.42 |
| | | 25 | 12 | 26.57 | 26.57 | 26.41 |
| | | 25 | 25 | 26.49 | 26.45 | 26.30 |
| | | 50 | 0 | 26.56 | 26.41 | 26.27 |
| 10M | 64QAM | 1 | 0 | 26.56 | 26.44 | 26.16 |
| | | 1 | 24 | 26.44 | 26.37 | 26.16 |
| | | 1 | 49 | 26.38 | 26.29 | 26.09 |
| | | 25 | 0 | 25.63 | 25.57 | 25.41 |
| | | 25 | 12 | 25.53 | 25.51 | 25.50 |
| | | 25 | 25 | 25.58 | 25.43 | 25.32 |
| | | 50 | 0 | 25.49 | 25.42 | 25.27 |
| 10M | 256QAM | 1 | 0 | 23.45 | 23.51 | 23.28 |
| | | 1 | 24 | 23.57 | 23.34 | 23.17 |
| | | 1 | 49 | 23.57 | 23.45 | 23.53 |
| | | 25 | 0 | 23.56 | 23.39 | 23.23 |
| | | 25 | 12 | 23.36 | 23.42 | 23.20 |
| | | 25 | 25 | 23.51 | 23.53 | 23.45 |
| | | 50 | 0 | 23.49 | 23.39 | 23.25 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 39675 | 40620 | 41565 |
| | | Frequency (MHz) | | 2498.5 | 2593 | 2687.5 |
| 5M | QPSK | 1 | 0 | 28.52 | 28.46 | 28.15 |
| | | 1 | 12 | 28.46 | 28.41 | 28.20 |
| | | 1 | 24 | 28.33 | 28.28 | 28.05 |
| | | 12 | 0 | 27.60 | 27.53 | 27.35 |
| | | 12 | 6 | 27.57 | 27.57 | 27.46 |
| | | 12 | 13 | 27.57 | 27.44 | 27.22 |
| | | 25 | 0 | 27.53 | 27.47 | 27.29 |
| 5M | 16QAM | 1 | 0 | 27.52 | 27.42 | 27.18 |
| | | 1 | 12 | 27.46 | 27.37 | 27.13 |
| | | 1 | 24 | 27.34 | 27.20 | 27.00 |
| | | 12 | 0 | 26.64 | 26.61 | 26.32 |
| | | 12 | 6 | 26.53 | 26.51 | 26.46 |
| | | 12 | 13 | 26.57 | 26.47 | 26.29 |
| | | 25 | 0 | 26.50 | 26.38 | 26.23 |
| 5M | 64QAM | 1 | 0 | 26.49 | 26.40 | 26.12 |
| | | 1 | 12 | 26.50 | 26.37 | 26.13 |
| | | 1 | 24 | 26.33 | 26.24 | 26.00 |
| | | 12 | 0 | 25.62 | 25.52 | 25.41 |
| | | 12 | 6 | 25.56 | 25.51 | 25.48 |
| | | 12 | 13 | 25.58 | 25.50 | 25.26 |
| | | 25 | 0 | 25.53 | 25.39 | 25.23 |
| 5M | 256QAM | 1 | 0 | 23.49 | 23.46 | 23.30 |
| | | 1 | 12 | 23.49 | 23.38 | 23.21 |
| | | 1 | 24 | 23.47 | 23.46 | 23.48 |
| | | 12 | 0 | 23.49 | 23.45 | 23.27 |
| | | 12 | 6 | 23.35 | 23.38 | 23.18 |
| | | 12 | 13 | 23.43 | 23.51 | 23.39 |
| | | 25 | 0 | 23.51 | 23.39 | 23.21 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.13 LTE Band 41 (Power Class II)
Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 39750 | 40620 | 41490 |
| | | Frequency (MHz) | | 2506 | 2593 | 2680 |
| 20M | QPSK | 1 | 0 | 24.33 | 24.32 | 24.14 |
| | | 1 | 50 | 24.24 | 24.23 | 24.05 |
| | | 1 | 99 | 24.18 | 24.17 | 23.99 |
| | | 50 | 0 | 23.37 | 23.36 | 23.18 |
| | | 50 | 25 | 23.31 | 23.30 | 23.12 |
| | | 50 | 50 | 23.26 | 23.25 | 23.07 |
| | | 100 | 0 | 23.28 | 23.27 | 23.09 |
| 20M | 16QAM | 1 | 0 | 23.32 | 23.31 | 23.13 |
| | | 1 | 50 | 23.27 | 23.26 | 23.08 |
| | | 1 | 99 | 23.19 | 23.18 | 23.00 |
| | | 50 | 0 | 22.40 | 22.39 | 22.21 |
| | | 50 | 25 | 22.36 | 22.35 | 22.17 |
| | | 50 | 50 | 22.30 | 22.29 | 22.11 |
| | | 100 | 0 | 22.32 | 22.31 | 22.13 |
| 20M | 64QAM | 1 | 0 | 22.37 | 22.36 | 22.18 |
| | | 1 | 50 | 22.31 | 22.30 | 22.12 |
| | | 1 | 99 | 22.26 | 22.25 | 22.07 |
| | | 50 | 0 | 21.34 | 21.33 | 21.15 |
| | | 50 | 25 | 21.29 | 21.28 | 21.10 |
| | | 50 | 50 | 21.21 | 21.20 | 21.02 |
| | | 100 | 0 | 21.26 | 21.25 | 21.07 |
| 20M | 256QAM | 1 | 0 | 19.39 | 19.38 | 19.20 |
| | | 1 | 50 | 19.36 | 19.35 | 19.17 |
| | | 1 | 99 | 19.30 | 19.29 | 19.11 |
| | | 50 | 0 | 19.32 | 19.31 | 19.13 |
| | | 50 | 25 | 19.26 | 19.25 | 19.07 |
| | | 50 | 50 | 19.19 | 19.18 | 19.00 |
| | | 100 | 0 | 19.24 | 19.23 | 19.05 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 39725 | 40620 | 41515 |
| | | Frequency (MHz) | | 2503.5 | 2593 | 2682.5 |
| 15M | QPSK | 1 | 0 | 24.28 | 24.32 | 24.10 |
| | | 1 | 37 | 24.15 | 24.21 | 24.01 |
| | | 1 | 74 | 24.13 | 24.13 | 23.90 |
| | | 36 | 0 | 23.33 | 23.34 | 23.17 |
| | | 36 | 19 | 23.27 | 23.20 | 23.05 |
| | | 36 | 39 | 23.25 | 23.22 | 23.00 |
| | | 75 | 0 | 23.23 | 23.20 | 23.08 |
| 15M | 16QAM | 1 | 0 | 23.25 | 23.28 | 23.07 |
| | | 1 | 37 | 23.21 | 23.16 | 23.04 |
| | | 1 | 74 | 23.08 | 23.08 | 22.96 |
| | | 36 | 0 | 22.27 | 22.33 | 22.09 |
| | | 36 | 19 | 22.27 | 22.29 | 22.07 |
| | | 36 | 39 | 22.21 | 22.16 | 22.07 |
| | | 75 | 0 | 22.28 | 22.24 | 22.07 |
| 15M | 64QAM | 1 | 0 | 22.30 | 22.29 | 22.11 |
| | | 1 | 37 | 22.20 | 22.16 | 21.99 |
| | | 1 | 74 | 22.13 | 22.16 | 21.96 |
| | | 36 | 0 | 21.37 | 21.26 | 21.16 |
| | | 36 | 19 | 21.26 | 21.28 | 21.08 |
| | | 36 | 39 | 21.16 | 21.17 | 21.07 |
| | | 75 | 0 | 21.23 | 21.23 | 21.08 |
| 15M | 256QAM | 1 | 0 | 19.32 | 19.31 | 19.05 |
| | | 1 | 37 | 19.18 | 19.18 | 19.02 |
| | | 1 | 74 | 19.08 | 19.15 | 18.95 |
| | | 36 | 0 | 19.27 | 19.26 | 19.16 |
| | | 36 | 19 | 19.28 | 19.29 | 19.09 |
| | | 36 | 39 | 19.23 | 19.18 | 18.98 |
| | | 75 | 0 | 19.24 | 19.21 | 19.04 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|-------|-------|-------|
| | | Channel | | 39700 | 40620 | 41540 |
| | | Frequency (MHz) | | 2501 | 2593 | 2685 |
| 10M | QPSK | 1 | 0 | 24.28 | 24.20 | 24.03 |
| | | 1 | 24 | 24.14 | 24.13 | 23.94 |
| | | 1 | 49 | 24.14 | 24.11 | 23.87 |
| | | 25 | 0 | 23.28 | 23.26 | 23.15 |
| | | 25 | 12 | 23.17 | 23.23 | 23.01 |
| | | 25 | 25 | 23.19 | 23.11 | 23.05 |
| | | 50 | 0 | 23.25 | 23.20 | 23.00 |
| 10M | 16QAM | 1 | 0 | 23.24 | 23.20 | 23.04 |
| | | 1 | 24 | 23.16 | 23.08 | 23.00 |
| | | 1 | 49 | 23.11 | 23.08 | 22.94 |
| | | 25 | 0 | 22.22 | 22.22 | 22.13 |
| | | 25 | 12 | 22.24 | 22.21 | 22.08 |
| | | 25 | 25 | 22.16 | 22.12 | 22.01 |
| | | 50 | 0 | 22.25 | 22.17 | 22.07 |
| 10M | 64QAM | 1 | 0 | 22.19 | 22.21 | 22.00 |
| | | 1 | 24 | 22.11 | 22.14 | 21.93 |
| | | 1 | 49 | 22.07 | 22.17 | 21.91 |
| | | 25 | 0 | 21.31 | 21.23 | 21.07 |
| | | 25 | 12 | 21.16 | 21.21 | 21.04 |
| | | 25 | 25 | 21.18 | 21.07 | 21.07 |
| | | 50 | 0 | 21.23 | 21.22 | 21.05 |
| 10M | 256QAM | 1 | 0 | 19.26 | 19.28 | 19.07 |
| | | 1 | 24 | 19.16 | 19.09 | 18.94 |
| | | 1 | 49 | 19.17 | 19.15 | 18.85 |
| | | 25 | 0 | 19.30 | 19.17 | 19.07 |
| | | 25 | 12 | 19.24 | 19.23 | 19.07 |
| | | 25 | 25 | 19.22 | 19.12 | 19.02 |
| | | 50 | 0 | 19.19 | 19.07 | 19.07 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|-------|--------|
| | | Channel | | 39675 | 40620 | 41565 |
| | | Frequency (MHz) | | 2498.5 | 2593 | 2687.5 |
| 5M | QPSK | 1 | 0 | 24.28 | 24.24 | 24.05 |
| | | 1 | 12 | 24.15 | 24.15 | 23.98 |
| | | 1 | 24 | 24.14 | 24.15 | 23.96 |
| | | 12 | 0 | 23.28 | 23.28 | 23.13 |
| | | 12 | 6 | 23.31 | 23.29 | 23.12 |
| | | 12 | 13 | 23.26 | 23.15 | 23.06 |
| | | 25 | 0 | 23.20 | 23.19 | 22.99 |
| 5M | 16QAM | 1 | 0 | 23.30 | 23.30 | 23.06 |
| | | 1 | 12 | 23.20 | 23.20 | 23.03 |
| | | 1 | 24 | 23.16 | 23.14 | 22.96 |
| | | 12 | 0 | 22.29 | 22.28 | 22.09 |
| | | 12 | 6 | 22.28 | 22.21 | 22.06 |
| | | 12 | 13 | 22.16 | 22.23 | 22.03 |
| | | 25 | 0 | 22.21 | 22.21 | 21.99 |
| 5M | 64QAM | 1 | 0 | 22.26 | 22.25 | 22.07 |
| | | 1 | 12 | 22.14 | 22.21 | 22.03 |
| | | 1 | 24 | 22.17 | 22.10 | 21.94 |
| | | 12 | 0 | 21.27 | 21.29 | 21.10 |
| | | 12 | 6 | 21.30 | 21.20 | 21.07 |
| | | 12 | 13 | 21.21 | 21.22 | 20.98 |
| | | 25 | 0 | 21.23 | 21.19 | 21.00 |
| 5M | 256QAM | 1 | 0 | 19.32 | 19.27 | 19.06 |
| | | 1 | 12 | 19.18 | 19.16 | 19.03 |
| | | 1 | 24 | 19.15 | 19.11 | 18.93 |
| | | 12 | 0 | 19.36 | 19.28 | 19.11 |
| | | 12 | 6 | 19.27 | 19.30 | 19.11 |
| | | 12 | 13 | 19.18 | 19.21 | 18.99 |
| | | 25 | 0 | 19.18 | 19.26 | 19.00 |



EIRP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|-------|-------|
| | | Channel | | 39750 | 40620 | 41490 |
| | | Frequency (MHz) | | 2506 | 2593 | 2680 |
| 20M | QPSK | 1 | 0 | 30.50 | 30.49 | 30.31 |
| | | 1 | 50 | 30.41 | 30.40 | 30.22 |
| | | 1 | 99 | 30.35 | 30.34 | 30.16 |
| | | 50 | 0 | 29.54 | 29.53 | 29.35 |
| | | 50 | 25 | 29.48 | 29.47 | 29.29 |
| | | 50 | 50 | 29.43 | 29.42 | 29.24 |
| | | 100 | 0 | 29.45 | 29.44 | 29.26 |
| 20M | 16QAM | 1 | 0 | 29.49 | 29.48 | 29.30 |
| | | 1 | 50 | 29.44 | 29.43 | 29.25 |
| | | 1 | 99 | 29.36 | 29.35 | 29.17 |
| | | 50 | 0 | 28.57 | 28.56 | 28.38 |
| | | 50 | 25 | 28.53 | 28.52 | 28.34 |
| | | 50 | 50 | 28.47 | 28.46 | 28.28 |
| | | 100 | 0 | 28.49 | 28.48 | 28.30 |
| 20M | 64QAM | 1 | 0 | 28.54 | 28.53 | 28.35 |
| | | 1 | 50 | 28.48 | 28.47 | 28.29 |
| | | 1 | 99 | 28.43 | 28.42 | 28.24 |
| | | 50 | 0 | 27.51 | 27.50 | 27.32 |
| | | 50 | 25 | 27.46 | 27.45 | 27.27 |
| | | 50 | 50 | 27.38 | 27.37 | 27.19 |
| | | 100 | 0 | 27.43 | 27.42 | 27.24 |
| 20M | 256QAM | 1 | 0 | 25.56 | 25.55 | 25.37 |
| | | 1 | 50 | 25.53 | 25.52 | 25.34 |
| | | 1 | 99 | 25.47 | 25.46 | 25.28 |
| | | 50 | 0 | 25.49 | 25.48 | 25.30 |
| | | 50 | 25 | 25.43 | 25.42 | 25.24 |
| | | 50 | 50 | 25.36 | 25.35 | 25.17 |
| | | 100 | 0 | 25.41 | 25.40 | 25.22 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 39725 | 40620 | 41515 |
| | | Frequency (MHz) | | 2503.5 | 2593 | 2682.5 |
| 15M | QPSK | 1 | 0 | 30.45 | 30.49 | 30.27 |
| | | 1 | 37 | 30.32 | 30.38 | 30.18 |
| | | 1 | 74 | 30.30 | 30.30 | 30.07 |
| | | 36 | 0 | 29.50 | 29.51 | 29.34 |
| | | 36 | 19 | 29.44 | 29.37 | 29.22 |
| | | 36 | 39 | 29.42 | 29.39 | 29.17 |
| | | 75 | 0 | 29.40 | 29.37 | 29.25 |
| 15M | 16QAM | 1 | 0 | 29.42 | 29.45 | 29.24 |
| | | 1 | 37 | 29.38 | 29.33 | 29.21 |
| | | 1 | 74 | 29.25 | 29.25 | 29.13 |
| | | 36 | 0 | 28.44 | 28.50 | 28.26 |
| | | 36 | 19 | 28.44 | 28.46 | 28.24 |
| | | 36 | 39 | 28.38 | 28.33 | 28.24 |
| | | 75 | 0 | 28.45 | 28.41 | 28.24 |
| 15M | 64QAM | 1 | 0 | 28.47 | 28.46 | 28.28 |
| | | 1 | 37 | 28.37 | 28.33 | 28.16 |
| | | 1 | 74 | 28.30 | 28.33 | 28.13 |
| | | 36 | 0 | 27.54 | 27.43 | 27.33 |
| | | 36 | 19 | 27.43 | 27.45 | 27.25 |
| | | 36 | 39 | 27.33 | 27.34 | 27.24 |
| | | 75 | 0 | 27.40 | 27.40 | 27.25 |
| 15M | 256QAM | 1 | 0 | 25.49 | 25.48 | 25.22 |
| | | 1 | 37 | 25.35 | 25.35 | 25.19 |
| | | 1 | 74 | 25.25 | 25.32 | 25.12 |
| | | 36 | 0 | 25.44 | 25.43 | 25.33 |
| | | 36 | 19 | 25.45 | 25.46 | 25.26 |
| | | 36 | 39 | 25.40 | 25.35 | 25.15 |
| | | 75 | 0 | 25.41 | 25.38 | 25.21 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|-------|
| | | Channel | | 39700 | 40620 | 41540 |
| | | Frequency (MHz) | | 2501 | 2593 | 2685 |
| 10M | QPSK | 1 | 0 | 30.45 | 30.37 | 30.20 |
| | | 1 | 24 | 30.31 | 30.30 | 30.11 |
| | | 1 | 49 | 30.31 | 30.28 | 30.04 |
| | | 25 | 0 | 29.45 | 29.43 | 29.32 |
| | | 25 | 12 | 29.34 | 29.40 | 29.18 |
| | | 25 | 25 | 29.36 | 29.28 | 29.22 |
| | | 50 | 0 | 29.42 | 29.37 | 29.17 |
| 10M | 16QAM | 1 | 0 | 29.41 | 29.37 | 29.21 |
| | | 1 | 24 | 29.33 | 29.25 | 29.17 |
| | | 1 | 49 | 29.28 | 29.25 | 29.11 |
| | | 25 | 0 | 28.39 | 28.39 | 28.30 |
| | | 25 | 12 | 28.41 | 28.38 | 28.25 |
| | | 25 | 25 | 28.33 | 28.29 | 28.18 |
| | | 50 | 0 | 28.42 | 28.34 | 28.24 |
| 10M | 64QAM | 1 | 0 | 28.36 | 28.38 | 28.17 |
| | | 1 | 24 | 28.28 | 28.31 | 28.10 |
| | | 1 | 49 | 28.24 | 28.34 | 28.08 |
| | | 25 | 0 | 27.48 | 27.40 | 27.24 |
| | | 25 | 12 | 27.33 | 27.38 | 27.21 |
| | | 25 | 25 | 27.35 | 27.24 | 27.24 |
| | | 50 | 0 | 27.40 | 27.39 | 27.22 |
| 10M | 256QAM | 1 | 0 | 25.43 | 25.45 | 25.24 |
| | | 1 | 24 | 25.33 | 25.26 | 25.11 |
| | | 1 | 49 | 25.34 | 25.32 | 25.02 |
| | | 25 | 0 | 25.47 | 25.34 | 25.24 |
| | | 25 | 12 | 25.41 | 25.40 | 25.24 |
| | | 25 | 25 | 25.39 | 25.29 | 25.19 |
| | | 50 | 0 | 25.36 | 25.24 | 25.24 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 39675 | 40620 | 41565 |
| | | Frequency (MHz) | | 2498.5 | 2593 | 2687.5 |
| 5M | QPSK | 1 | 0 | 30.45 | 30.41 | 30.22 |
| | | 1 | 12 | 30.32 | 30.32 | 30.15 |
| | | 1 | 24 | 30.31 | 30.32 | 30.13 |
| | | 12 | 0 | 29.45 | 29.45 | 29.30 |
| | | 12 | 6 | 29.48 | 29.46 | 29.29 |
| | | 12 | 13 | 29.43 | 29.32 | 29.23 |
| | | 25 | 0 | 29.37 | 29.36 | 29.16 |
| 5M | 16QAM | 1 | 0 | 29.47 | 29.47 | 29.23 |
| | | 1 | 12 | 29.37 | 29.37 | 29.20 |
| | | 1 | 24 | 29.33 | 29.31 | 29.13 |
| | | 12 | 0 | 28.46 | 28.45 | 28.26 |
| | | 12 | 6 | 28.45 | 28.38 | 28.23 |
| | | 12 | 13 | 28.33 | 28.40 | 28.20 |
| | | 25 | 0 | 28.38 | 28.38 | 28.16 |
| 5M | 64QAM | 1 | 0 | 28.43 | 28.42 | 28.24 |
| | | 1 | 12 | 28.31 | 28.38 | 28.20 |
| | | 1 | 24 | 28.34 | 28.27 | 28.11 |
| | | 12 | 0 | 27.44 | 27.46 | 27.27 |
| | | 12 | 6 | 27.47 | 27.37 | 27.24 |
| | | 12 | 13 | 27.38 | 27.39 | 27.15 |
| | | 25 | 0 | 27.40 | 27.36 | 27.17 |
| 5M | 256QAM | 1 | 0 | 25.49 | 25.44 | 25.23 |
| | | 1 | 12 | 25.35 | 25.33 | 25.20 |
| | | 1 | 24 | 25.32 | 25.28 | 25.10 |
| | | 12 | 0 | 25.53 | 25.45 | 25.28 |
| | | 12 | 6 | 25.44 | 25.47 | 25.28 |
| | | 12 | 13 | 25.35 | 25.38 | 25.16 |
| | | 25 | 0 | 25.35 | 25.43 | 25.17 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.14 LTE Band 66

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 132072 | 132322 | 132572 |
| | | Frequency (MHz) | | 1720 | 1745 | 1770 |
| 20M | QPSK | 1 | 0 | 21.48 | 21.55 | 21.52 |
| | | 1 | 50 | 21.35 | 21.43 | 21.37 |
| | | 1 | 99 | 21.31 | 21.48 | 21.39 |
| | | 50 | 0 | 20.35 | 20.47 | 20.41 |
| | | 50 | 25 | 20.33 | 20.43 | 20.37 |
| | | 50 | 50 | 20.27 | 20.41 | 20.35 |
| | | 100 | 0 | 20.28 | 20.45 | 20.36 |
| 20M | 16QAM | 1 | 0 | 20.52 | 20.63 | 20.59 |
| | | 1 | 50 | 20.46 | 20.58 | 20.56 |
| | | 1 | 99 | 20.44 | 20.57 | 20.53 |
| | | 50 | 0 | 19.28 | 19.48 | 19.38 |
| | | 50 | 25 | 19.37 | 19.45 | 19.37 |
| | | 50 | 50 | 19.25 | 19.43 | 19.33 |
| | | 100 | 0 | 19.36 | 19.47 | 19.39 |
| 20M | 64QAM | 1 | 0 | 19.52 | 19.56 | 19.54 |
| | | 1 | 50 | 19.58 | 19.62 | 19.60 |
| | | 1 | 99 | 19.44 | 19.58 | 19.49 |
| | | 50 | 0 | 18.48 | 18.51 | 18.50 |
| | | 50 | 25 | 18.35 | 18.53 | 18.43 |
| | | 50 | 50 | 18.42 | 18.48 | 18.47 |
| | | 100 | 0 | 18.41 | 18.52 | 18.50 |
| 20M | 256QAM | 1 | 0 | 16.55 | 16.65 | 16.61 |
| | | 1 | 50 | 16.46 | 16.56 | 16.55 |
| | | 1 | 99 | 16.55 | 16.59 | 16.57 |
| | | 50 | 0 | 16.41 | 16.47 | 16.41 |
| | | 50 | 25 | 16.34 | 16.42 | 16.35 |
| | | 50 | 50 | 16.37 | 16.39 | 16.39 |
| | | 100 | 0 | 16.36 | 16.46 | 16.42 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 132047 | 132322 | 132597 |
| | | Frequency (MHz) | | 1717.5 | 1745 | 1772.5 |
| 15M | QPSK | 1 | 0 | 21.44 | 21.50 | 21.52 |
| | | 1 | 37 | 21.26 | 21.36 | 21.36 |
| | | 1 | 74 | 21.22 | 21.44 | 21.31 |
| | | 36 | 0 | 20.34 | 20.39 | 20.40 |
| | | 36 | 19 | 20.30 | 20.34 | 20.27 |
| | | 36 | 39 | 20.23 | 20.33 | 20.34 |
| | | 75 | 0 | 20.19 | 20.36 | 20.34 |
| 15M | 16QAM | 1 | 0 | 20.49 | 20.61 | 20.54 |
| | | 1 | 37 | 20.46 | 20.57 | 20.50 |
| | | 1 | 74 | 20.43 | 20.48 | 20.52 |
| | | 36 | 0 | 19.25 | 19.47 | 19.30 |
| | | 36 | 19 | 19.31 | 19.43 | 19.32 |
| | | 36 | 39 | 19.23 | 19.37 | 19.30 |
| | | 75 | 0 | 19.26 | 19.43 | 19.37 |
| 15M | 64QAM | 1 | 0 | 19.43 | 19.53 | 19.47 |
| | | 1 | 37 | 19.55 | 19.61 | 19.57 |
| | | 1 | 74 | 19.40 | 19.49 | 19.43 |
| | | 36 | 0 | 18.39 | 18.50 | 18.45 |
| | | 36 | 19 | 18.27 | 18.45 | 18.41 |
| | | 36 | 39 | 18.35 | 18.48 | 18.40 |
| | | 75 | 0 | 18.36 | 18.48 | 18.47 |
| 15M | 256QAM | 1 | 0 | 16.53 | 16.60 | 16.51 |
| | | 1 | 37 | 16.41 | 16.52 | 16.52 |
| | | 1 | 74 | 16.54 | 16.58 | 16.49 |
| | | 36 | 0 | 16.38 | 16.38 | 16.36 |
| | | 36 | 19 | 16.29 | 16.33 | 16.31 |
| | | 36 | 39 | 16.34 | 16.32 | 16.30 |
| | | 75 | 0 | 16.31 | 16.40 | 16.37 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 132022 | 132322 | 132622 |
| | | Frequency (MHz) | | 1715 | 1745 | 1775 |
| 10M | QPSK | 1 | 0 | 21.31 | 21.40 | 21.41 |
| | | 1 | 24 | 21.16 | 21.29 | 21.27 |
| | | 1 | 49 | 21.21 | 21.30 | 21.26 |
| | | 25 | 0 | 20.31 | 20.34 | 20.39 |
| | | 25 | 12 | 20.21 | 20.24 | 20.14 |
| | | 25 | 25 | 20.16 | 20.25 | 20.20 |
| | | 50 | 0 | 20.09 | 20.32 | 20.20 |
| 10M | 16QAM | 1 | 0 | 20.37 | 20.54 | 20.49 |
| | | 1 | 24 | 20.38 | 20.45 | 20.40 |
| | | 1 | 49 | 20.33 | 20.43 | 20.52 |
| | | 25 | 0 | 19.11 | 19.42 | 19.23 |
| | | 25 | 12 | 19.16 | 19.38 | 19.27 |
| | | 25 | 25 | 19.22 | 19.31 | 19.15 |
| | | 50 | 0 | 19.13 | 19.40 | 19.22 |
| 10M | 64QAM | 1 | 0 | 19.31 | 19.43 | 19.47 |
| | | 1 | 24 | 19.52 | 19.52 | 19.46 |
| | | 1 | 49 | 19.33 | 19.45 | 19.37 |
| | | 25 | 0 | 18.24 | 18.35 | 18.41 |
| | | 25 | 12 | 18.21 | 18.34 | 18.37 |
| | | 25 | 25 | 18.32 | 18.40 | 18.40 |
| | | 50 | 0 | 18.34 | 18.44 | 18.46 |
| 10M | 256QAM | 1 | 0 | 16.50 | 16.52 | 16.45 |
| | | 1 | 24 | 16.36 | 16.51 | 16.39 |
| | | 1 | 49 | 16.44 | 16.44 | 16.49 |
| | | 25 | 0 | 16.36 | 16.36 | 16.33 |
| | | 25 | 12 | 16.15 | 16.23 | 16.27 |
| | | 25 | 25 | 16.29 | 16.32 | 16.25 |
| | | 50 | 0 | 16.31 | 16.38 | 16.24 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 131997 | 132322 | 132647 |
| | | Frequency (MHz) | | 1712.5 | 1745 | 1777.5 |
| 5M | QPSK | 1 | 0 | 21.43 | 21.48 | 21.33 |
| | | 1 | 12 | 21.13 | 21.34 | 21.18 |
| | | 1 | 24 | 21.12 | 21.31 | 21.19 |
| | | 12 | 0 | 20.28 | 20.35 | 20.25 |
| | | 12 | 6 | 20.21 | 20.22 | 20.05 |
| | | 12 | 13 | 20.16 | 20.25 | 20.16 |
| | | 25 | 0 | 20.13 | 20.27 | 20.17 |
| 5M | 16QAM | 1 | 0 | 20.38 | 20.58 | 20.46 |
| | | 1 | 12 | 20.39 | 20.44 | 20.48 |
| | | 1 | 24 | 20.39 | 20.38 | 20.45 |
| | | 12 | 0 | 19.18 | 19.43 | 19.24 |
| | | 12 | 6 | 19.18 | 19.34 | 19.24 |
| | | 12 | 13 | 19.14 | 19.35 | 19.27 |
| | | 25 | 0 | 19.13 | 19.35 | 19.26 |
| 5M | 64QAM | 1 | 0 | 19.30 | 19.42 | 19.46 |
| | | 1 | 12 | 19.47 | 19.46 | 19.57 |
| | | 1 | 24 | 19.27 | 19.36 | 19.43 |
| | | 12 | 0 | 18.28 | 18.35 | 18.37 |
| | | 12 | 6 | 18.19 | 18.37 | 18.27 |
| | | 12 | 13 | 18.35 | 18.44 | 18.38 |
| | | 25 | 0 | 18.34 | 18.37 | 18.45 |
| 5M | 256QAM | 1 | 0 | 16.41 | 16.47 | 16.43 |
| | | 1 | 12 | 16.31 | 16.49 | 16.35 |
| | | 1 | 24 | 16.52 | 16.48 | 16.38 |
| | | 12 | 0 | 16.26 | 16.32 | 16.22 |
| | | 12 | 6 | 16.26 | 16.26 | 16.16 |
| | | 12 | 13 | 16.23 | 16.27 | 16.12 |
| | | 25 | 0 | 16.26 | 16.37 | 16.20 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 131987 | 132322 | 132657 |
| | | Frequency (MHz) | | 1711.5 | 1745 | 1778.5 |
| 3M | QPSK | 1 | 0 | 21.30 | 21.37 | 21.51 |
| | | 1 | 7 | 21.15 | 21.30 | 21.28 |
| | | 1 | 14 | 21.09 | 21.41 | 21.22 |
| | | 8 | 0 | 20.24 | 20.27 | 20.37 |
| | | 8 | 3 | 20.27 | 20.30 | 20.27 |
| | | 8 | 7 | 20.17 | 20.27 | 20.19 |
| | | 15 | 0 | 20.17 | 20.32 | 20.33 |
| 3M | 16QAM | 1 | 0 | 20.39 | 20.53 | 20.44 |
| | | 1 | 7 | 20.38 | 20.50 | 20.37 |
| | | 1 | 14 | 20.30 | 20.33 | 20.45 |
| | | 8 | 0 | 19.24 | 19.43 | 19.24 |
| | | 8 | 3 | 19.19 | 19.41 | 19.31 |
| | | 8 | 7 | 19.18 | 19.22 | 19.28 |
| | | 15 | 0 | 19.13 | 19.34 | 19.26 |
| 3M | 64QAM | 1 | 0 | 19.38 | 19.41 | 19.35 |
| | | 1 | 7 | 19.44 | 19.56 | 19.56 |
| | | 1 | 14 | 19.35 | 19.37 | 19.39 |
| | | 8 | 0 | 18.38 | 18.36 | 18.34 |
| | | 8 | 3 | 18.17 | 18.34 | 18.34 |
| | | 8 | 7 | 18.25 | 18.45 | 18.38 |
| | | 15 | 0 | 18.33 | 18.44 | 18.44 |
| 3M | 256QAM | 1 | 0 | 16.45 | 16.53 | 16.39 |
| | | 1 | 7 | 16.30 | 16.39 | 16.51 |
| | | 1 | 14 | 16.42 | 16.53 | 16.40 |
| | | 8 | 0 | 16.25 | 16.38 | 16.24 |
| | | 8 | 3 | 16.24 | 16.23 | 16.18 |
| | | 8 | 7 | 16.28 | 16.31 | 16.26 |
| | | 15 | 0 | 16.23 | 16.37 | 16.32 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 131979 | 132322 | 132665 |
| | | Frequency (MHz) | | 1710.7 | 1745 | 1779.3 |
| 1.4M | QPSK | 1 | 0 | 21.38 | 21.43 | 21.51 |
| | | 1 | 2 | 21.24 | 21.23 | 21.30 |
| | | 1 | 5 | 21.16 | 21.36 | 21.29 |
| | | 3 | 0 | 21.23 | 21.29 | 21.25 |
| | | 3 | 1 | 21.25 | 21.28 | 21.15 |
| | | 3 | 3 | 21.20 | 21.19 | 21.21 |
| | | 6 | 0 | 20.10 | 20.26 | 20.28 |
| 1.4M | 16QAM | 1 | 0 | 20.46 | 20.60 | 20.47 |
| | | 1 | 2 | 20.34 | 20.55 | 20.35 |
| | | 1 | 5 | 20.42 | 20.33 | 20.52 |
| | | 3 | 0 | 20.11 | 20.33 | 20.16 |
| | | 3 | 1 | 20.28 | 20.43 | 20.19 |
| | | 3 | 3 | 20.22 | 20.35 | 20.21 |
| | | 6 | 0 | 19.13 | 19.41 | 19.28 |
| 1.4M | 64QAM | 1 | 0 | 19.38 | 19.53 | 19.43 |
| | | 1 | 2 | 19.42 | 19.53 | 19.48 |
| | | 1 | 5 | 19.35 | 19.34 | 19.39 |
| | | 3 | 0 | 19.34 | 19.40 | 19.39 |
| | | 3 | 1 | 19.24 | 19.32 | 19.27 |
| | | 3 | 3 | 19.23 | 19.34 | 19.25 |
| | | 6 | 0 | 18.30 | 18.37 | 18.39 |
| 1.4M | 256QAM | 1 | 0 | 16.50 | 16.59 | 16.42 |
| | | 1 | 2 | 16.35 | 16.42 | 16.52 |
| | | 1 | 5 | 16.39 | 16.46 | 16.39 |
| | | 3 | 0 | 16.33 | 16.28 | 16.21 |
| | | 3 | 1 | 16.25 | 16.30 | 16.29 |
| | | 3 | 3 | 16.25 | 16.29 | 16.21 |
| | | 6 | 0 | 16.28 | 16.31 | 16.35 |



EIRP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------------|--------|
| | | Channel | | 132072 | 132322 | 132572 |
| | | Frequency (MHz) | | 1720 | 1745 | 1770 |
| 20M | QPSK | 1 | 0 | 26.32 | 26.39 | 26.36 |
| | | 1 | 50 | 26.19 | 26.27 | 26.21 |
| | | 1 | 99 | 26.15 | 26.32 | 26.23 |
| | | 50 | 0 | 25.19 | 25.31 | 25.25 |
| | | 50 | 25 | 25.17 | 25.27 | 25.21 |
| | | 50 | 50 | 25.11 | 25.25 | 25.19 |
| | | 100 | 0 | 25.12 | 25.29 | 25.20 |
| 20M | 16QAM | 1 | 0 | 25.36 | 25.47 | 25.43 |
| | | 1 | 50 | 25.30 | 25.42 | 25.40 |
| | | 1 | 99 | 25.28 | 25.41 | 25.37 |
| | | 50 | 0 | 24.12 | 24.32 | 24.22 |
| | | 50 | 25 | 24.21 | 24.29 | 24.21 |
| | | 50 | 50 | 24.09 | 24.27 | 24.17 |
| | | 100 | 0 | 24.20 | 24.31 | 24.23 |
| 20M | 64QAM | 1 | 0 | 24.36 | 24.40 | 24.38 |
| | | 1 | 50 | 24.42 | 24.46 | 24.44 |
| | | 1 | 99 | 24.28 | 24.42 | 24.33 |
| | | 50 | 0 | 23.32 | 23.35 | 23.34 |
| | | 50 | 25 | 23.19 | 23.37 | 23.27 |
| | | 50 | 50 | 23.26 | 23.32 | 23.31 |
| | | 100 | 0 | 23.25 | 23.36 | 23.34 |
| 20M | 256QAM | 1 | 0 | 21.39 | 21.49 | 21.45 |
| | | 1 | 50 | 21.30 | 21.40 | 21.39 |
| | | 1 | 99 | 21.39 | 21.43 | 21.41 |
| | | 50 | 0 | 21.25 | 21.31 | 21.25 |
| | | 50 | 25 | 21.18 | 21.26 | 21.19 |
| | | 50 | 50 | 21.21 | 21.23 | 21.23 |
| | | 100 | 0 | 21.20 | 21.30 | 21.26 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------------|--------------|
| | | Channel | | 132047 | 132322 | 132597 |
| | | Frequency (MHz) | | 1717.5 | 1745 | 1772.5 |
| 15M | QPSK | 1 | 0 | 26.28 | 26.34 | 26.36 |
| | | 1 | 37 | 26.10 | 26.20 | 26.20 |
| | | 1 | 74 | 26.06 | 26.28 | 26.15 |
| | | 36 | 0 | 25.18 | 25.23 | 25.24 |
| | | 36 | 19 | 25.14 | 25.18 | 25.11 |
| | | 36 | 39 | 25.07 | 25.17 | 25.18 |
| | | 75 | 0 | 25.03 | 25.20 | 25.18 |
| 15M | 16QAM | 1 | 0 | 25.33 | 25.45 | 25.38 |
| | | 1 | 37 | 25.30 | 25.41 | 25.34 |
| | | 1 | 74 | 25.27 | 25.32 | 25.36 |
| | | 36 | 0 | 24.09 | 24.31 | 24.14 |
| | | 36 | 19 | 24.15 | 24.27 | 24.16 |
| | | 36 | 39 | 24.07 | 24.21 | 24.14 |
| | | 75 | 0 | 24.10 | 24.27 | 24.21 |
| 15M | 64QAM | 1 | 0 | 24.27 | 24.37 | 24.31 |
| | | 1 | 37 | 24.39 | 24.45 | 24.41 |
| | | 1 | 74 | 24.24 | 24.33 | 24.27 |
| | | 36 | 0 | 23.23 | 23.34 | 23.29 |
| | | 36 | 19 | 23.11 | 23.29 | 23.25 |
| | | 36 | 39 | 23.19 | 23.32 | 23.24 |
| | | 75 | 0 | 23.20 | 23.32 | 23.31 |
| 15M | 256QAM | 1 | 0 | 21.37 | 21.44 | 21.35 |
| | | 1 | 37 | 21.25 | 21.36 | 21.36 |
| | | 1 | 74 | 21.38 | 21.42 | 21.33 |
| | | 36 | 0 | 21.22 | 21.22 | 21.20 |
| | | 36 | 19 | 21.13 | 21.17 | 21.15 |
| | | 36 | 39 | 21.18 | 21.16 | 21.14 |
| | | 75 | 0 | 21.15 | 21.24 | 21.21 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 132022 | 132322 | 132622 |
| | | Frequency (MHz) | | 1715 | 1745 | 1775 |
| 10M | QPSK | 1 | 0 | 26.15 | 26.24 | 26.25 |
| | | 1 | 24 | 26.00 | 26.13 | 26.11 |
| | | 1 | 49 | 26.05 | 26.14 | 26.10 |
| | | 25 | 0 | 25.15 | 25.18 | 25.23 |
| | | 25 | 12 | 25.05 | 25.08 | 24.98 |
| | | 25 | 25 | 25.00 | 25.09 | 25.04 |
| | | 50 | 0 | 24.93 | 25.16 | 25.04 |
| 10M | 16QAM | 1 | 0 | 25.21 | 25.38 | 25.33 |
| | | 1 | 24 | 25.22 | 25.29 | 25.24 |
| | | 1 | 49 | 25.17 | 25.27 | 25.36 |
| | | 25 | 0 | 23.95 | 24.26 | 24.07 |
| | | 25 | 12 | 24.00 | 24.22 | 24.11 |
| | | 25 | 25 | 24.06 | 24.15 | 23.99 |
| | | 50 | 0 | 23.97 | 24.24 | 24.06 |
| 10M | 64QAM | 1 | 0 | 24.15 | 24.27 | 24.31 |
| | | 1 | 24 | 24.36 | 24.36 | 24.30 |
| | | 1 | 49 | 24.17 | 24.29 | 24.21 |
| | | 25 | 0 | 23.08 | 23.19 | 23.25 |
| | | 25 | 12 | 23.05 | 23.18 | 23.21 |
| | | 25 | 25 | 23.16 | 23.24 | 23.24 |
| | | 50 | 0 | 23.18 | 23.28 | 23.30 |
| 10M | 256QAM | 1 | 0 | 21.34 | 21.36 | 21.29 |
| | | 1 | 24 | 21.20 | 21.35 | 21.23 |
| | | 1 | 49 | 21.28 | 21.28 | 21.33 |
| | | 25 | 0 | 21.20 | 21.20 | 21.17 |
| | | 25 | 12 | 20.99 | 21.07 | 21.11 |
| | | 25 | 25 | 21.13 | 21.16 | 21.09 |
| | | 50 | 0 | 21.15 | 21.22 | 21.08 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|--------------|
| | | Channel | | 131997 | 132322 | 132647 |
| | | Frequency (MHz) | | 1712.5 | 1745 | 1777.5 |
| 5M | QPSK | 1 | 0 | 26.27 | 26.32 | 26.17 |
| | | 1 | 12 | 25.97 | 26.18 | 26.02 |
| | | 1 | 24 | 25.96 | 26.15 | 26.03 |
| | | 12 | 0 | 25.12 | 25.19 | 25.09 |
| | | 12 | 6 | 25.05 | 25.06 | 24.89 |
| | | 12 | 13 | 25.00 | 25.09 | 25.00 |
| | | 25 | 0 | 24.97 | 25.11 | 25.01 |
| 5M | 16QAM | 1 | 0 | 25.22 | 25.42 | 25.30 |
| | | 1 | 12 | 25.23 | 25.28 | 25.32 |
| | | 1 | 24 | 25.23 | 25.22 | 25.29 |
| | | 12 | 0 | 24.02 | 24.27 | 24.08 |
| | | 12 | 6 | 24.02 | 24.18 | 24.08 |
| | | 12 | 13 | 23.98 | 24.19 | 24.11 |
| | | 25 | 0 | 23.97 | 24.19 | 24.10 |
| 5M | 64QAM | 1 | 0 | 24.14 | 24.26 | 24.30 |
| | | 1 | 12 | 24.31 | 24.30 | 24.41 |
| | | 1 | 24 | 24.11 | 24.20 | 24.27 |
| | | 12 | 0 | 23.12 | 23.19 | 23.21 |
| | | 12 | 6 | 23.03 | 23.21 | 23.11 |
| | | 12 | 13 | 23.19 | 23.28 | 23.22 |
| | | 25 | 0 | 23.18 | 23.21 | 23.29 |
| 5M | 256QAM | 1 | 0 | 21.25 | 21.31 | 21.27 |
| | | 1 | 12 | 21.15 | 21.33 | 21.19 |
| | | 1 | 24 | 21.36 | 21.32 | 21.22 |
| | | 12 | 0 | 21.10 | 21.16 | 21.06 |
| | | 12 | 6 | 21.10 | 21.10 | 21.00 |
| | | 12 | 13 | 21.07 | 21.11 | 20.96 |
| | | 25 | 0 | 21.10 | 21.21 | 21.04 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------------|--------------|
| | | Channel | | 131987 | 132322 | 132657 |
| | | Frequency (MHz) | | 1711.5 | 1745 | 1778.5 |
| 3M | QPSK | 1 | 0 | 26.14 | 26.21 | 26.35 |
| | | 1 | 7 | 25.99 | 26.14 | 26.12 |
| | | 1 | 14 | 25.93 | 26.25 | 26.06 |
| | | 8 | 0 | 25.08 | 25.11 | 25.21 |
| | | 8 | 3 | 25.11 | 25.14 | 25.11 |
| | | 8 | 7 | 25.01 | 25.11 | 25.03 |
| | | 15 | 0 | 25.01 | 25.16 | 25.17 |
| 3M | 16QAM | 1 | 0 | 25.23 | 25.37 | 25.28 |
| | | 1 | 7 | 25.22 | 25.34 | 25.21 |
| | | 1 | 14 | 25.14 | 25.17 | 25.29 |
| | | 8 | 0 | 24.08 | 24.27 | 24.08 |
| | | 8 | 3 | 24.03 | 24.25 | 24.15 |
| | | 8 | 7 | 24.02 | 24.06 | 24.12 |
| | | 15 | 0 | 23.97 | 24.18 | 24.10 |
| 3M | 64QAM | 1 | 0 | 24.22 | 24.25 | 24.19 |
| | | 1 | 7 | 24.28 | 24.40 | 24.40 |
| | | 1 | 14 | 24.19 | 24.21 | 24.23 |
| | | 8 | 0 | 23.22 | 23.20 | 23.18 |
| | | 8 | 3 | 23.01 | 23.18 | 23.18 |
| | | 8 | 7 | 23.09 | 23.29 | 23.22 |
| | | 15 | 0 | 23.17 | 23.28 | 23.28 |
| 3M | 256QAM | 1 | 0 | 21.29 | 21.37 | 21.23 |
| | | 1 | 7 | 21.14 | 21.23 | 21.35 |
| | | 1 | 14 | 21.26 | 21.37 | 21.24 |
| | | 8 | 0 | 21.09 | 21.22 | 21.08 |
| | | 8 | 3 | 21.08 | 21.07 | 21.02 |
| | | 8 | 7 | 21.12 | 21.15 | 21.10 |
| | | 15 | 0 | 21.07 | 21.21 | 21.16 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|------|-----------|-----------------|-----------|--------|--------------|--------------|
| | | Channel | | 131979 | 132322 | 132665 |
| | | Frequency (MHz) | | 1710.7 | 1745 | 1779.3 |
| 1.4M | QPSK | 1 | 0 | 26.22 | 26.27 | 26.35 |
| | | 1 | 2 | 26.08 | 26.07 | 26.14 |
| | | 1 | 5 | 26.00 | 26.20 | 26.13 |
| | | 3 | 0 | 26.07 | 26.13 | 26.09 |
| | | 3 | 1 | 26.09 | 26.12 | 25.99 |
| | | 3 | 3 | 26.04 | 26.03 | 26.05 |
| | | 6 | 0 | 24.94 | 25.10 | 25.12 |
| 1.4M | 16QAM | 1 | 0 | 25.30 | 25.44 | 25.31 |
| | | 1 | 2 | 25.18 | 25.39 | 25.19 |
| | | 1 | 5 | 25.26 | 25.17 | 25.36 |
| | | 3 | 0 | 24.95 | 25.17 | 25.00 |
| | | 3 | 1 | 25.12 | 25.27 | 25.03 |
| | | 3 | 3 | 25.06 | 25.19 | 25.05 |
| | | 6 | 0 | 23.97 | 24.25 | 24.12 |
| 1.4M | 64QAM | 1 | 0 | 24.22 | 24.37 | 24.27 |
| | | 1 | 2 | 24.26 | 24.37 | 24.32 |
| | | 1 | 5 | 24.19 | 24.18 | 24.23 |
| | | 3 | 0 | 24.18 | 24.24 | 24.23 |
| | | 3 | 1 | 24.08 | 24.16 | 24.11 |
| | | 3 | 3 | 24.07 | 24.18 | 24.09 |
| | | 6 | 0 | 23.14 | 23.21 | 23.23 |
| 1.4M | 256QAM | 1 | 0 | 21.34 | 21.43 | 21.26 |
| | | 1 | 2 | 21.19 | 21.26 | 21.36 |
| | | 1 | 5 | 21.23 | 21.30 | 21.23 |
| | | 3 | 0 | 21.17 | 21.12 | 21.05 |
| | | 3 | 1 | 21.09 | 21.14 | 21.13 |
| | | 3 | 3 | 21.09 | 21.13 | 21.05 |
| | | 6 | 0 | 21.12 | 21.15 | 21.19 |

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.15 LTE Band 71

Conducted Output Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 133222 | 133297 | 133372 |
| | | Frequency (MHz) | | 673 | 680.5 | 688 |
| 20M | QPSK | 1 | 0 | 22.38 | 22.44 | 22.30 |
| | | 1 | 50 | 22.34 | 22.36 | 22.24 |
| | | 1 | 99 | 22.36 | 22.40 | 22.26 |
| | | 50 | 0 | 21.27 | 21.32 | 21.20 |
| | | 50 | 25 | 21.24 | 21.28 | 21.14 |
| | | 50 | 50 | 21.22 | 21.23 | 21.10 |
| | | 100 | 0 | 21.22 | 21.31 | 21.21 |
| 20M | 16QAM | 1 | 0 | 21.46 | 21.47 | 21.43 |
| | | 1 | 50 | 21.43 | 21.44 | 21.43 |
| | | 1 | 99 | 21.35 | 21.40 | 21.33 |
| | | 50 | 0 | 20.26 | 20.31 | 20.26 |
| | | 50 | 25 | 20.33 | 20.36 | 20.27 |
| | | 50 | 50 | 20.23 | 20.24 | 20.18 |
| | | 100 | 0 | 20.28 | 20.33 | 20.22 |
| 20M | 64QAM | 1 | 0 | 20.37 | 20.42 | 20.34 |
| | | 1 | 50 | 20.40 | 20.40 | 20.34 |
| | | 1 | 99 | 20.21 | 20.27 | 20.13 |
| | | 50 | 0 | 19.24 | 19.33 | 19.24 |
| | | 50 | 25 | 19.27 | 19.32 | 19.26 |
| | | 50 | 50 | 19.22 | 19.27 | 19.14 |
| | | 100 | 0 | 19.36 | 19.38 | 19.34 |
| 20M | 256QAM | 1 | 0 | 17.41 | 17.43 | 17.38 |
| | | 1 | 50 | 17.35 | 17.41 | 17.30 |
| | | 1 | 99 | 17.30 | 17.40 | 17.22 |
| | | 50 | 0 | 17.35 | 17.37 | 17.34 |
| | | 50 | 25 | 17.25 | 17.34 | 17.18 |
| | | 50 | 50 | 17.29 | 17.31 | 17.19 |
| | | 100 | 0 | 17.42 | 17.48 | 17.33 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 133197 | 133297 | 133397 |
| | | Frequency (MHz) | | 670.5 | 680.5 | 690.5 |
| 15M | QPSK | 1 | 0 | 22.36 | 22.40 | 22.30 |
| | | 1 | 37 | 22.30 | 22.27 | 22.22 |
| | | 1 | 74 | 22.33 | 22.39 | 22.18 |
| | | 36 | 0 | 21.23 | 21.22 | 21.12 |
| | | 36 | 19 | 21.20 | 21.19 | 21.12 |
| | | 36 | 39 | 21.16 | 21.15 | 21.05 |
| | | 75 | 0 | 21.19 | 21.23 | 21.12 |
| 15M | 16QAM | 1 | 0 | 21.41 | 21.38 | 21.35 |
| | | 1 | 37 | 21.43 | 21.44 | 21.42 |
| | | 1 | 74 | 21.25 | 21.38 | 21.26 |
| | | 36 | 0 | 20.20 | 20.30 | 20.16 |
| | | 36 | 19 | 20.29 | 20.35 | 20.21 |
| | | 36 | 39 | 20.15 | 20.17 | 20.14 |
| | | 75 | 0 | 20.24 | 20.25 | 20.13 |
| 15M | 64QAM | 1 | 0 | 20.33 | 20.40 | 20.26 |
| | | 1 | 37 | 20.40 | 20.30 | 20.33 |
| | | 1 | 74 | 20.14 | 20.19 | 20.13 |
| | | 36 | 0 | 19.21 | 19.26 | 19.14 |
| | | 36 | 19 | 19.22 | 19.26 | 19.21 |
| | | 36 | 39 | 19.17 | 19.22 | 19.08 |
| | | 75 | 0 | 19.26 | 19.35 | 19.26 |
| 15M | 256QAM | 1 | 0 | 17.40 | 17.40 | 17.28 |
| | | 1 | 37 | 17.27 | 17.36 | 17.28 |
| | | 1 | 74 | 17.21 | 17.34 | 17.20 |
| | | 36 | 0 | 17.31 | 17.29 | 17.30 |
| | | 36 | 19 | 17.22 | 17.24 | 17.11 |
| | | 36 | 39 | 17.22 | 17.29 | 17.10 |
| | | 75 | 0 | 17.37 | 17.47 | 17.28 |

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 133172 | 133297 | 133422 |
| | | Frequency (MHz) | | 668 | 680.5 | 693 |
| 10M | QPSK | 1 | 0 | 22.24 | 22.33 | 22.25 |
| | | 1 | 24 | 22.17 | 22.12 | 22.15 |
| | | 1 | 49 | 22.32 | 22.29 | 22.13 |
| | | 25 | 0 | 21.17 | 21.20 | 21.08 |
| | | 25 | 12 | 21.11 | 21.16 | 20.97 |
| | | 25 | 25 | 21.02 | 21.14 | 21.04 |
| | | 50 | 0 | 21.19 | 21.14 | 21.11 |
| 10M | 16QAM | 1 | 0 | 21.35 | 21.24 | 21.21 |
| | | 1 | 24 | 21.42 | 21.38 | 21.36 |
| | | 1 | 49 | 21.14 | 21.29 | 21.20 |
| | | 25 | 0 | 20.17 | 20.25 | 20.03 |
| | | 25 | 12 | 20.15 | 20.31 | 20.10 |
| | | 25 | 25 | 20.07 | 20.06 | 20.01 |
| | | 50 | 0 | 20.24 | 20.24 | 20.01 |
| 10M | 64QAM | 1 | 0 | 20.31 | 20.30 | 20.14 |
| | | 1 | 24 | 20.37 | 20.24 | 20.19 |
| | | 1 | 49 | 19.99 | 20.14 | 20.10 |
| | | 25 | 0 | 19.09 | 19.15 | 19.03 |
| | | 25 | 12 | 19.10 | 19.15 | 19.19 |
| | | 25 | 25 | 19.04 | 19.07 | 18.94 |
| | | 50 | 0 | 19.20 | 19.26 | 19.21 |
| 10M | 256QAM | 1 | 0 | 17.32 | 17.29 | 17.24 |
| | | 1 | 24 | 17.20 | 17.31 | 17.20 |
| | | 1 | 49 | 17.06 | 17.30 | 17.19 |
| | | 25 | 0 | 17.29 | 17.22 | 17.25 |
| | | 25 | 12 | 17.15 | 17.20 | 16.98 |
| | | 25 | 25 | 17.14 | 17.27 | 17.03 |
| | | 50 | 0 | 17.25 | 17.39 | 17.20 |



| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------|--------|--------|
| | | Channel | | 133147 | 133297 | 133447 |
| | | Frequency (MHz) | | 665.5 | 680.5 | 695.5 |
| 5M | QPSK | 1 | 0 | 22.34 | 22.42 | 22.24 |
| | | 1 | 12 | 22.30 | 22.23 | 22.10 |
| | | 1 | 24 | 22.24 | 22.24 | 22.08 |
| | | 12 | 0 | 21.08 | 21.21 | 21.00 |
| | | 12 | 6 | 21.06 | 21.04 | 20.97 |
| | | 12 | 13 | 21.02 | 21.06 | 21.00 |
| | | 25 | 0 | 21.18 | 21.12 | 20.96 |
| 5M | 16QAM | 1 | 0 | 21.37 | 21.27 | 21.35 |
| | | 1 | 12 | 21.35 | 21.36 | 21.28 |
| | | 1 | 24 | 21.11 | 21.35 | 21.14 |
| | | 12 | 0 | 20.15 | 20.23 | 20.08 |
| | | 12 | 6 | 20.19 | 20.23 | 20.20 |
| | | 12 | 13 | 20.04 | 20.13 | 20.05 |
| | | 25 | 0 | 20.20 | 20.20 | 20.07 |
| 5M | 64QAM | 1 | 0 | 20.26 | 20.33 | 20.19 |
| | | 1 | 12 | 20.29 | 20.27 | 20.21 |
| | | 1 | 24 | 20.12 | 20.09 | 20.00 |
| | | 12 | 0 | 19.20 | 19.20 | 19.14 |
| | | 12 | 6 | 19.10 | 19.15 | 19.15 |
| | | 12 | 13 | 19.04 | 19.13 | 19.01 |
| | | 25 | 0 | 19.24 | 19.35 | 19.13 |
| 5M | 256QAM | 1 | 0 | 17.36 | 17.28 | 17.09 |
| | | 1 | 12 | 17.17 | 17.33 | 17.08 |
| | | 1 | 24 | 17.10 | 17.29 | 17.07 |
| | | 12 | 0 | 17.24 | 17.25 | 17.11 |
| | | 12 | 6 | 17.11 | 17.12 | 16.84 |
| | | 12 | 13 | 17.19 | 17.26 | 16.93 |
| | | 25 | 0 | 17.27 | 17.32 | 17.12 |

ERP Power (dBm)

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------------|--------|
| | | Channel | | 133222 | 133297 | 133372 |
| | | Frequency (MHz) | | 673 | 680.5 | 688 |
| 20M | QPSK | 1 | 0 | 21.35 | 21.41 | 21.27 |
| | | 1 | 50 | 21.31 | 21.33 | 21.21 |
| | | 1 | 99 | 21.33 | 21.37 | 21.23 |
| | | 50 | 0 | 20.24 | 20.29 | 20.17 |
| | | 50 | 25 | 20.21 | 20.25 | 20.11 |
| | | 50 | 50 | 20.19 | 20.20 | 20.07 |
| | | 100 | 0 | 20.19 | 20.28 | 20.18 |
| 20M | 16QAM | 1 | 0 | 20.43 | 20.44 | 20.40 |
| | | 1 | 50 | 20.40 | 20.41 | 20.40 |
| | | 1 | 99 | 20.32 | 20.37 | 20.30 |
| | | 50 | 0 | 19.23 | 19.28 | 19.23 |
| | | 50 | 25 | 19.30 | 19.33 | 19.24 |
| | | 50 | 50 | 19.20 | 19.21 | 19.15 |
| | | 100 | 0 | 19.25 | 19.30 | 19.19 |
| 20M | 64QAM | 1 | 0 | 19.34 | 19.39 | 19.31 |
| | | 1 | 50 | 19.37 | 19.37 | 19.31 |
| | | 1 | 99 | 19.18 | 19.24 | 19.10 |
| | | 50 | 0 | 18.21 | 18.30 | 18.21 |
| | | 50 | 25 | 18.24 | 18.29 | 18.23 |
| | | 50 | 50 | 18.19 | 18.24 | 18.11 |
| | | 100 | 0 | 18.33 | 18.35 | 18.31 |
| 20M | 256QAM | 1 | 0 | 16.38 | 16.40 | 16.35 |
| | | 1 | 50 | 16.32 | 16.38 | 16.27 |
| | | 1 | 99 | 16.27 | 16.37 | 16.19 |
| | | 50 | 0 | 16.32 | 16.34 | 16.31 |
| | | 50 | 25 | 16.22 | 16.31 | 16.15 |
| | | 50 | 50 | 16.26 | 16.28 | 16.16 |
| | | 100 | 0 | 16.39 | 16.45 | 16.30 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------|--------------|--------|
| | | Channel | | 133197 | 133297 | 133397 |
| | | Frequency (MHz) | | 670.5 | 680.5 | 690.5 |
| 15M | QPSK | 1 | 0 | 21.33 | 21.37 | 21.27 |
| | | 1 | 37 | 21.27 | 21.24 | 21.19 |
| | | 1 | 74 | 21.30 | 21.36 | 21.15 |
| | | 36 | 0 | 20.20 | 20.19 | 20.09 |
| | | 36 | 19 | 20.17 | 20.16 | 20.09 |
| | | 36 | 39 | 20.13 | 20.12 | 20.02 |
| | | 75 | 0 | 20.16 | 20.20 | 20.09 |
| 15M | 16QAM | 1 | 0 | 20.38 | 20.35 | 20.32 |
| | | 1 | 37 | 20.40 | 20.41 | 20.39 |
| | | 1 | 74 | 20.22 | 20.35 | 20.23 |
| | | 36 | 0 | 19.17 | 19.27 | 19.13 |
| | | 36 | 19 | 19.26 | 19.32 | 19.18 |
| | | 36 | 39 | 19.12 | 19.14 | 19.11 |
| | | 75 | 0 | 19.21 | 19.22 | 19.10 |
| 15M | 64QAM | 1 | 0 | 19.30 | 19.37 | 19.23 |
| | | 1 | 37 | 19.37 | 19.27 | 19.30 |
| | | 1 | 74 | 19.11 | 19.16 | 19.10 |
| | | 36 | 0 | 18.18 | 18.23 | 18.11 |
| | | 36 | 19 | 18.19 | 18.23 | 18.18 |
| | | 36 | 39 | 18.14 | 18.19 | 18.05 |
| | | 75 | 0 | 18.23 | 18.32 | 18.23 |
| 15M | 256QAM | 1 | 0 | 16.37 | 16.37 | 16.25 |
| | | 1 | 37 | 16.24 | 16.33 | 16.25 |
| | | 1 | 74 | 16.18 | 16.31 | 16.17 |
| | | 36 | 0 | 16.28 | 16.26 | 16.27 |
| | | 36 | 19 | 16.19 | 16.21 | 16.08 |
| | | 36 | 39 | 16.19 | 16.26 | 16.07 |
| | | 75 | 0 | 16.34 | 16.44 | 16.25 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|-----|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 133172 | 133297 | 133422 |
| | | Frequency (MHz) | | 668 | 680.5 | 693 |
| 10M | QPSK | 1 | 0 | 21.21 | 21.30 | 21.22 |
| | | 1 | 24 | 21.14 | 21.09 | 21.12 |
| | | 1 | 49 | 21.29 | 21.26 | 21.10 |
| | | 25 | 0 | 20.14 | 20.17 | 20.05 |
| | | 25 | 12 | 20.08 | 20.13 | 19.94 |
| | | 25 | 25 | 19.99 | 20.11 | 20.01 |
| | | 50 | 0 | 20.16 | 20.11 | 20.08 |
| 10M | 16QAM | 1 | 0 | 20.32 | 20.21 | 20.18 |
| | | 1 | 24 | 20.39 | 20.35 | 20.33 |
| | | 1 | 49 | 20.11 | 20.26 | 20.17 |
| | | 25 | 0 | 19.14 | 19.22 | 19.00 |
| | | 25 | 12 | 19.12 | 19.28 | 19.07 |
| | | 25 | 25 | 19.04 | 19.03 | 18.98 |
| | | 50 | 0 | 19.21 | 19.21 | 18.98 |
| 10M | 64QAM | 1 | 0 | 19.28 | 19.27 | 19.11 |
| | | 1 | 24 | 19.34 | 19.21 | 19.16 |
| | | 1 | 49 | 18.96 | 19.11 | 19.07 |
| | | 25 | 0 | 18.06 | 18.12 | 18.00 |
| | | 25 | 12 | 18.07 | 18.12 | 18.16 |
| | | 25 | 25 | 18.01 | 18.04 | 17.91 |
| | | 50 | 0 | 18.17 | 18.23 | 18.18 |
| 10M | 256QAM | 1 | 0 | 16.29 | 16.26 | 16.21 |
| | | 1 | 24 | 16.17 | 16.28 | 16.17 |
| | | 1 | 49 | 16.03 | 16.27 | 16.16 |
| | | 25 | 0 | 16.26 | 16.19 | 16.22 |
| | | 25 | 12 | 16.12 | 16.17 | 15.95 |
| | | 25 | 25 | 16.11 | 16.24 | 16.00 |
| | | 50 | 0 | 16.22 | 16.36 | 16.17 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

| BW | MCS Index | RB Size | RB Offset | Low | Mid | High |
|----|-----------|-----------------|-----------|--------------|--------------|--------|
| | | Channel | | 133147 | 133297 | 133447 |
| | | Frequency (MHz) | | 665.5 | 680.5 | 695.5 |
| 5M | QPSK | 1 | 0 | 21.31 | 21.39 | 21.21 |
| | | 1 | 12 | 21.27 | 21.20 | 21.07 |
| | | 1 | 24 | 21.21 | 21.21 | 21.05 |
| | | 12 | 0 | 20.05 | 20.18 | 19.97 |
| | | 12 | 6 | 20.03 | 20.01 | 19.94 |
| | | 12 | 13 | 19.99 | 20.03 | 19.97 |
| | | 25 | 0 | 20.15 | 20.09 | 19.93 |
| 5M | 16QAM | 1 | 0 | 20.34 | 20.24 | 20.32 |
| | | 1 | 12 | 20.32 | 20.33 | 20.25 |
| | | 1 | 24 | 20.08 | 20.32 | 20.11 |
| | | 12 | 0 | 19.12 | 19.20 | 19.05 |
| | | 12 | 6 | 19.16 | 19.20 | 19.17 |
| | | 12 | 13 | 19.01 | 19.10 | 19.02 |
| | | 25 | 0 | 19.17 | 19.17 | 19.04 |
| 5M | 64QAM | 1 | 0 | 19.23 | 19.30 | 19.16 |
| | | 1 | 12 | 19.26 | 19.24 | 19.18 |
| | | 1 | 24 | 19.09 | 19.06 | 18.97 |
| | | 12 | 0 | 18.17 | 18.17 | 18.11 |
| | | 12 | 6 | 18.07 | 18.12 | 18.12 |
| | | 12 | 13 | 18.01 | 18.10 | 17.98 |
| | | 25 | 0 | 18.21 | 18.32 | 18.10 |
| 5M | 256QAM | 1 | 0 | 16.33 | 16.25 | 16.06 |
| | | 1 | 12 | 16.14 | 16.30 | 16.05 |
| | | 1 | 24 | 16.07 | 16.26 | 16.04 |
| | | 12 | 0 | 16.21 | 16.22 | 16.08 |
| | | 12 | 6 | 16.08 | 16.09 | 15.81 |
| | | 12 | 13 | 16.16 | 16.23 | 15.90 |
| | | 25 | 0 | 16.24 | 16.29 | 16.09 |

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

7.2 Radiated Spurious Emissions below 1GHz

7.2.1 LTE Band 2


| | | | |
|------------------------|---------------------------------------|--|-----------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 5MHz | Channel | CH 19175 : 1907.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 80.61 | -52.50 | -13.00 | -39.50 | 1.00 H | 207 | 56.02 | -108.52 |
| 2 | 105.91 | -51.45 | -13.00 | -38.45 | 1.99 H | 6 | 56.21 | -107.66 |
| 3 | 146.68 | -49.24 | -13.00 | -36.24 | 1.99 H | 93 | 54.64 | -103.88 |
| 4 | 221.19 | -53.83 | -13.00 | -40.83 | 1.49 H | 259 | 52.68 | -106.51 |
| 5 | 299.91 | -55.99 | -13.00 | -42.99 | 1.49 H | 186 | 46.64 | -102.63 |
| 6 | 585.29 | -55.89 | -13.00 | -42.89 | 1.00 H | 162 | 41.60 | -97.49 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

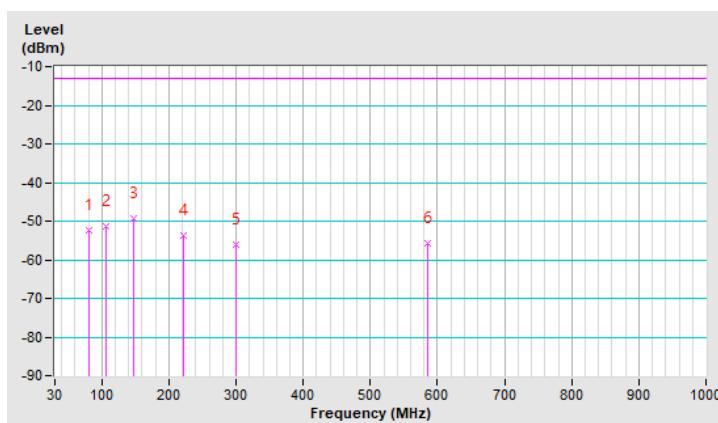


| | | | |
|------------------------|---------------------------------------|--|-----------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 5MHz | Channel | CH 19175 : 1907.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 48.28 | -55.29 | -13.00 | -42.29 | 1.00 V | 16 | 48.84 | -104.13 |
| 2 | 104.51 | -56.50 | -13.00 | -43.50 | 1.99 V | 16 | 51.30 | -107.80 |
| 3 | 143.87 | -49.32 | -13.00 | -36.32 | 1.00 V | 40 | 54.79 | -104.11 |
| 4 | 233.84 | -54.63 | -13.00 | -41.63 | 1.00 V | 16 | 50.98 | -105.61 |
| 5 | 299.91 | -53.75 | -13.00 | -40.75 | 1.49 V | 65 | 48.88 | -102.63 |
| 6 | 574.04 | -55.99 | -13.00 | -42.99 | 1.49 V | 85 | 41.93 | -97.92 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

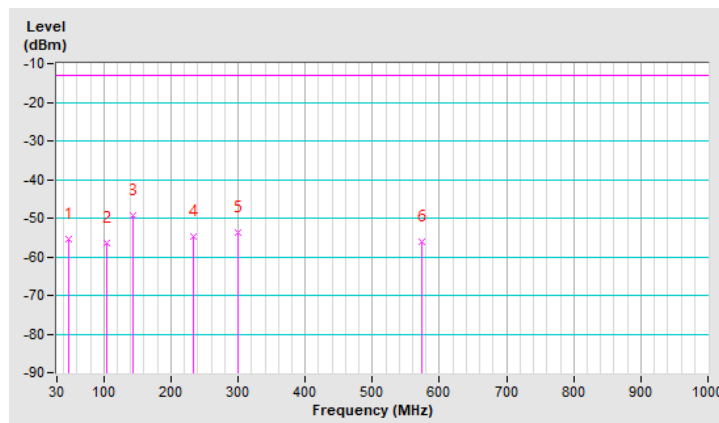


7.2.2 LTE Band 4

| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 20MHz | Channel | CH 20300 : 1745 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 70.77 | -53.97 | -13.00 | -40.97 | 1.00 H | 6 | 52.29 | -106.26 |
| 2 | 101.70 | -48.48 | -13.00 | -35.48 | 1.00 H | 238 | 59.83 | -108.31 |
| 3 | 149.49 | -50.85 | -13.00 | -37.85 | 1.50 H | 103 | 53.00 | -103.85 |
| 4 | 228.22 | -54.50 | -13.00 | -41.50 | 1.00 H | 257 | 51.88 | -106.38 |
| 5 | 299.91 | -55.59 | -13.00 | -42.59 | 1.00 H | 191 | 47.04 | -102.63 |
| 6 | 583.88 | -56.20 | -13.00 | -43.20 | 1.50 H | 351 | 41.35 | -97.55 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

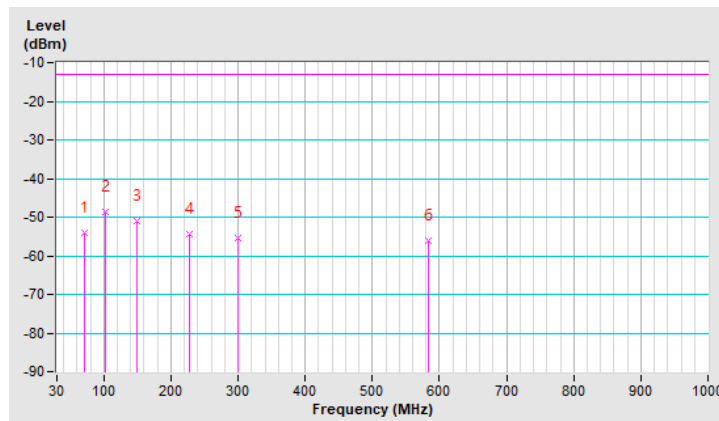


| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 20MHz | Channel | CH 20300 : 1745 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 48.28 | -55.34 | -13.00 | -42.34 | 1.00 V | 183 | 48.79 | -104.13 |
| 2 | 100.29 | -55.17 | -13.00 | -42.17 | 1.49 V | 115 | 53.32 | -108.49 |
| 3 | 145.28 | -51.45 | -13.00 | -38.45 | 1.00 V | 36 | 52.57 | -104.02 |
| 4 | 229.62 | -55.94 | -13.00 | -42.94 | 1.00 V | 30 | 50.33 | -106.27 |
| 5 | 299.91 | -55.14 | -13.00 | -42.14 | 1.49 V | 6 | 47.49 | -102.63 |
| 6 | 353.33 | -59.81 | -13.00 | -46.81 | 1.00 V | 154 | 42.07 | -101.88 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

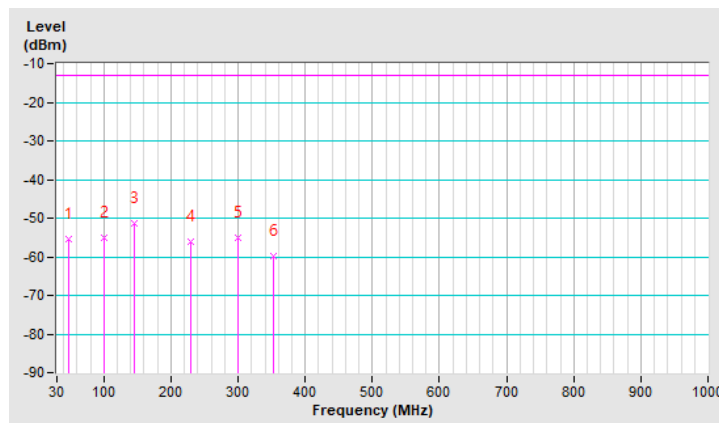

7.2.3 LTE Band 5


| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 10MHz | Channel | CH 20525 : 836.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 80.61 | -57.15 | -13.00 | -44.15 | 1.00 H | 228 | 53.52 | -110.67 |
| 2 | 145.28 | -52.22 | -13.00 | -39.22 | 1.00 H | 78 | 53.95 | -106.17 |
| 3 | 221.19 | -56.53 | -13.00 | -43.53 | 1.00 H | 265 | 52.13 | -108.66 |
| 4 | 299.91 | -58.56 | -13.00 | -45.56 | 1.00 H | 208 | 46.22 | -104.78 |
| 5 | 375.83 | -63.13 | -13.00 | -50.13 | 1.49 H | 156 | 40.30 | -103.43 |
| 6 | 617.62 | -58.41 | -13.00 | -45.41 | 1.00 H | 319 | 40.29 | -98.70 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

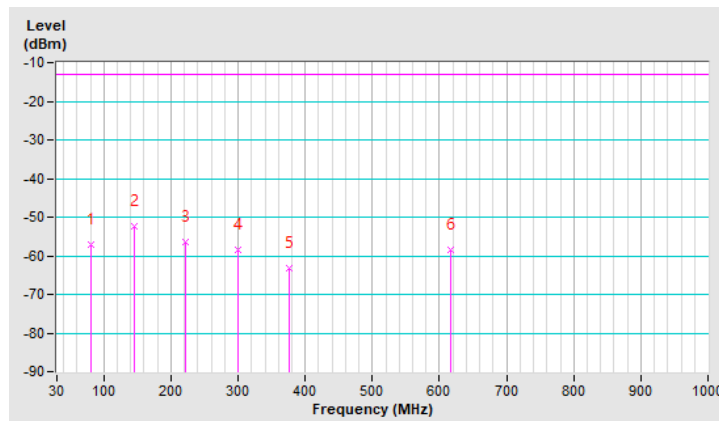


| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 10MHz | Channel | CH 20525 : 836.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 48.28 | -58.78 | -13.00 | -45.78 | 1.01 V | 199 | 47.50 | -106.28 |
| 2 | 110.13 | -58.92 | -13.00 | -45.92 | 1.01 V | 171 | 50.41 | -109.33 |
| 3 | 142.46 | -53.06 | -13.00 | -40.06 | 1.01 V | 43 | 53.28 | -106.34 |
| 4 | 233.84 | -58.11 | -13.00 | -45.11 | 1.01 V | 195 | 49.65 | -107.76 |
| 5 | 299.91 | -57.00 | -13.00 | -44.00 | 1.50 V | 11 | 47.78 | -104.78 |
| 6 | 585.29 | -59.22 | -13.00 | -46.22 | 1.01 V | 250 | 40.42 | -99.64 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

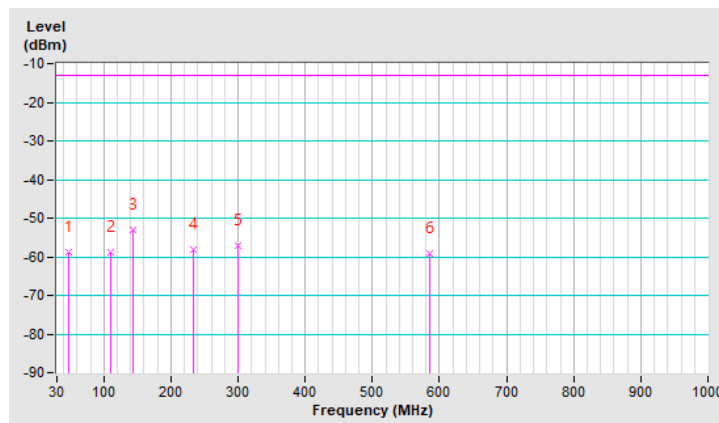

7.2.4 LTE Band 7


| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 7 Channel Bandwidth: 20MHz | Channel | CH 21100 : 2535 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 59.52 | -59.70 | -25.00 | -34.70 | 1.50 H | 25 | 44.88 | -104.58 |
| 2 | 82.01 | -52.06 | -25.00 | -27.06 | 1.01 H | 17 | 56.74 | -108.80 |
| 3 | 101.70 | -49.80 | -25.00 | -24.80 | 1.01 H | 6 | 58.51 | -108.31 |
| 4 | 142.46 | -50.73 | -25.00 | -25.73 | 1.50 H | 82 | 53.46 | -104.19 |
| 5 | 299.91 | -55.47 | -25.00 | -30.47 | 1.01 H | 122 | 47.16 | -102.63 |
| 6 | 515.00 | -59.38 | -25.00 | -34.38 | 1.01 H | 73 | 39.68 | -99.06 |

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

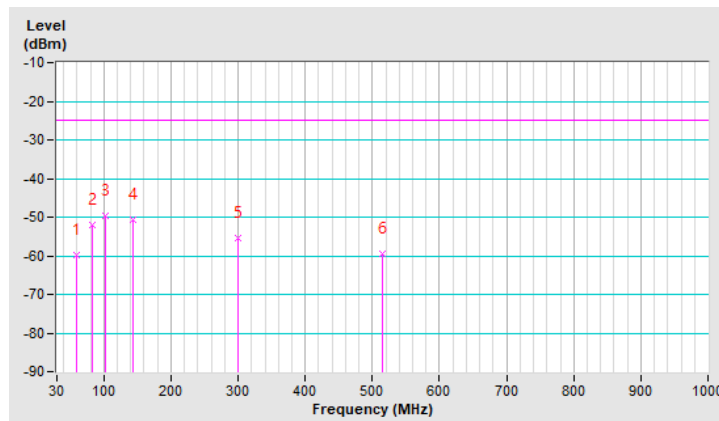


| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 7 Channel Bandwidth: 20MHz | Channel | CH 21100 : 2535 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 48.28 | -56.59 | -25.00 | -31.59 | 1.00 V | 196 | 47.54 | -104.13 |
| 2 | 110.13 | -56.58 | -25.00 | -31.58 | 1.00 V | 4 | 50.60 | -107.18 |
| 3 | 146.68 | -50.69 | -25.00 | -25.69 | 1.00 V | 17 | 53.19 | -103.88 |
| 4 | 228.22 | -56.04 | -25.00 | -31.04 | 1.00 V | 3 | 50.34 | -106.38 |
| 5 | 299.91 | -54.85 | -25.00 | -29.85 | 1.49 V | 81 | 47.78 | -102.63 |
| 6 | 658.39 | -56.25 | -25.00 | -31.25 | 1.00 V | 209 | 39.92 | -96.17 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

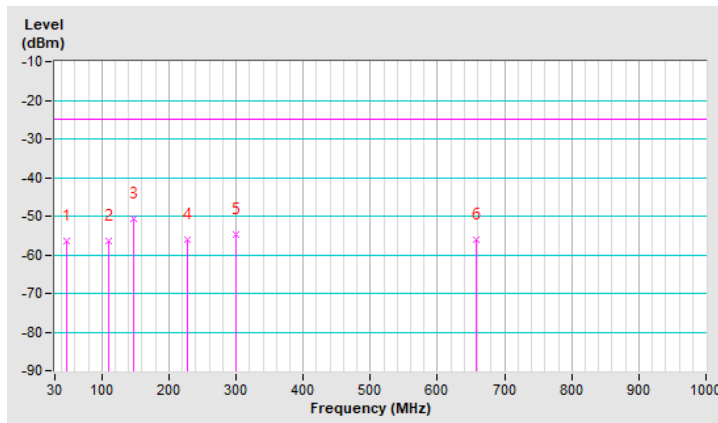


7.2.5 LTE Band 12

| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 10MHz | Channel | CH 23095 : 707.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 49.68 | -60.81 | -13.00 | -47.81 | 1.50 H | 27 | 45.45 | -106.26 |
| 2 | 77.80 | -54.22 | -13.00 | -41.22 | 1.00 H | 102 | 55.65 | -109.87 |
| 3 | 107.32 | -52.09 | -13.00 | -39.09 | 1.00 H | 9 | 57.47 | -109.56 |
| 4 | 145.28 | -51.83 | -13.00 | -38.83 | 1.50 H | 106 | 54.34 | -106.17 |
| 5 | 179.01 | -57.42 | -13.00 | -44.42 | 1.00 H | 251 | 49.78 | -107.20 |
| 6 | 246.49 | -59.87 | -13.00 | -46.87 | 1.50 H | 260 | 46.85 | -106.72 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

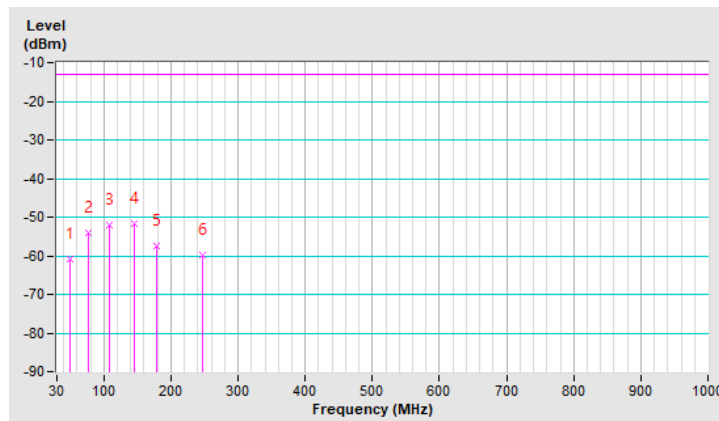


| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 10MHz | Channel | CH 23095 : 707.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 48.28 | -58.55 | -13.00 | -45.55 | 1.01 V | 191 | 47.73 | -106.28 |
| 2 | 111.54 | -57.99 | -13.00 | -44.99 | 1.01 V | 340 | 51.19 | -109.18 |
| 3 | 145.28 | -51.04 | -13.00 | -38.04 | 1.01 V | 30 | 55.13 | -106.17 |
| 4 | 224.00 | -58.71 | -13.00 | -45.71 | 1.01 V | 27 | 50.01 | -108.72 |
| 5 | 299.91 | -56.79 | -13.00 | -43.79 | 1.50 V | 102 | 47.99 | -104.78 |
| 6 | 637.30 | -58.41 | -13.00 | -45.41 | 1.01 V | 152 | 39.99 | -98.40 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

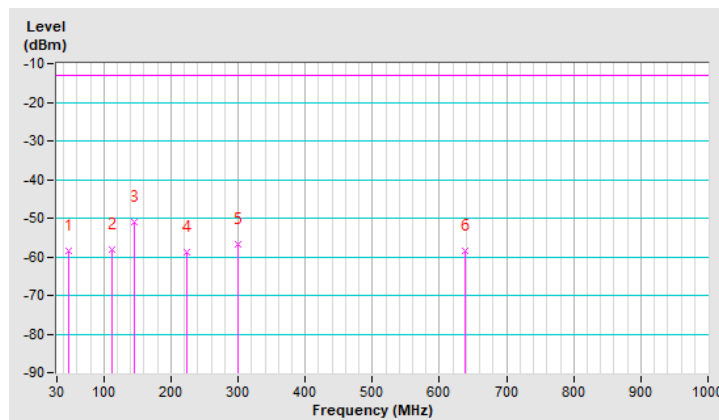

7.2.6 LTE Band 13


| | | | |
|------------------------|---|--|--------------------|
| RF Mode | LTE Band 13 Channel Bandwidth: 10MHz | Channel | CH 23230 : 782 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 73.58 | -58.06 | -13.00 | -45.06 | 1.01 H | 6 | 50.81 | -108.87 |
| 2 | 101.70 | -54.82 | -13.00 | -41.82 | 1.01 H | 48 | 55.64 | -110.46 |
| 3 | 139.65 | -52.82 | -13.00 | -39.82 | 1.50 H | 98 | 53.75 | -106.57 |
| 4 | 216.97 | -56.66 | -13.00 | -43.66 | 1.01 H | 86 | 51.95 | -108.61 |
| 5 | 299.91 | -57.71 | -13.00 | -44.71 | 1.01 H | 123 | 47.07 | -104.78 |
| 6 | 523.43 | -61.59 | -13.00 | -48.59 | 1.01 H | 6 | 39.51 | -101.10 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

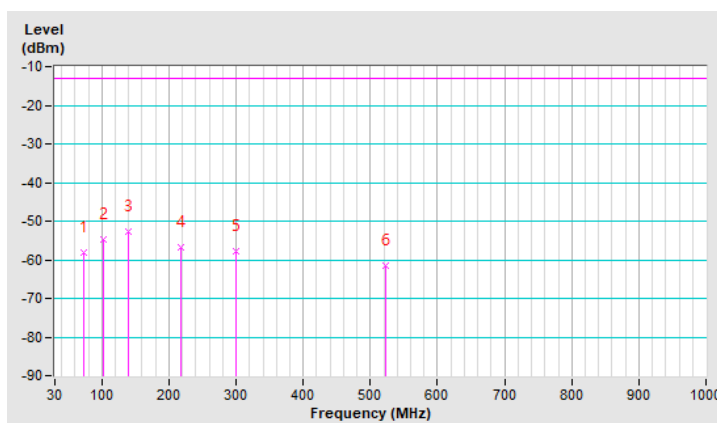


| | | | |
|------------------------|---|--|--------------------|
| RF Mode | LTE Band 13 Channel Bandwidth: 10MHz | Channel | CH 23230 : 782 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 46.87 | -59.29 | -13.00 | -46.29 | 1.00 V | 169 | 47.11 | -106.40 |
| 2 | 93.26 | -62.04 | -13.00 | -49.04 | 1.49 V | 191 | 49.61 | -111.65 |
| 3 | 146.68 | -52.86 | -13.00 | -39.86 | 1.00 V | 56 | 53.17 | -106.03 |
| 4 | 174.80 | -58.54 | -13.00 | -45.54 | 1.49 V | 324 | 48.21 | -106.75 |
| 5 | 233.84 | -58.19 | -13.00 | -45.19 | 1.00 V | 15 | 49.57 | -107.76 |
| 6 | 299.91 | -57.50 | -13.00 | -44.50 | 1.49 V | 90 | 47.28 | -104.78 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

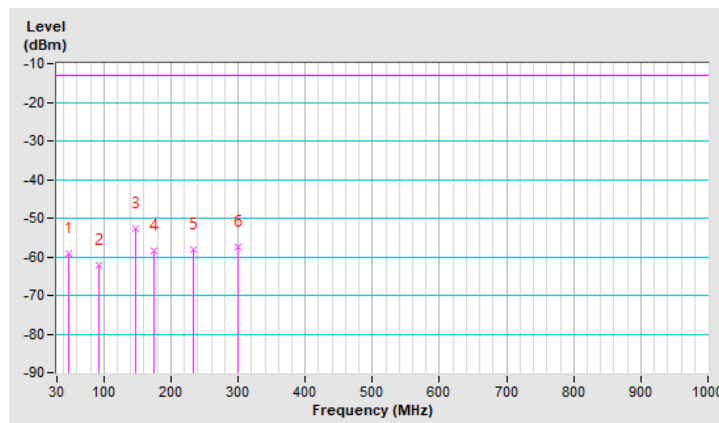


7.2.7 LTE Band 25

| | | | |
|------------------------|---|--|-----------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 20MHz | Channel | CH 26365 : 1882.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 83.42 | -49.82 | -13.00 | -36.82 | 1.00 H | 109 | 59.27 | -109.09 |
| 2 | 142.46 | -51.44 | -13.00 | -38.44 | 1.50 H | 91 | 52.75 | -104.19 |
| 3 | 180.42 | -54.21 | -13.00 | -41.21 | 1.00 H | 239 | 51.03 | -105.24 |
| 4 | 222.59 | -55.50 | -13.00 | -42.50 | 1.00 H | 262 | 51.04 | -106.54 |
| 5 | 299.91 | -55.00 | -13.00 | -42.00 | 1.00 H | 118 | 47.63 | -102.63 |
| 6 | 509.38 | -58.48 | -13.00 | -45.48 | 1.00 H | 24 | 40.65 | -99.13 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

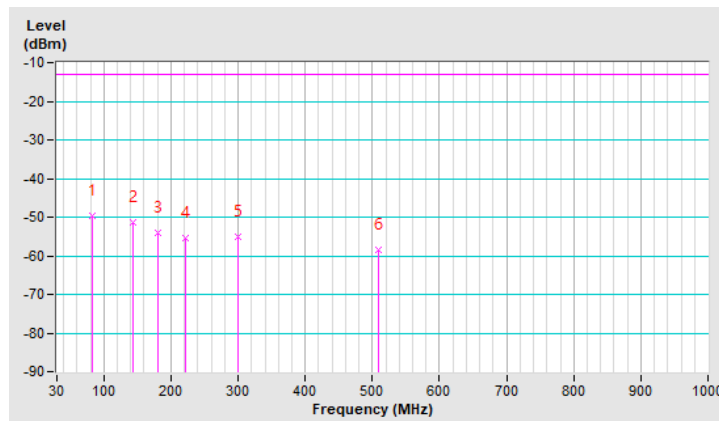


| | | | |
|------------------------|---|--|-----------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 20MHz | Channel | CH 26365 : 1882.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 48.28 | -56.55 | -13.00 | -43.55 | 1.01 V | 185 | 47.58 | -104.13 |
| 2 | 111.54 | -56.32 | -13.00 | -43.32 | 1.01 V | 193 | 50.71 | -107.03 |
| 3 | 146.68 | -51.07 | -13.00 | -38.07 | 1.01 V | 109 | 52.81 | -103.88 |
| 4 | 219.78 | -56.23 | -13.00 | -43.23 | 1.01 V | 12 | 50.24 | -106.47 |
| 5 | 299.91 | -54.86 | -13.00 | -41.86 | 1.50 V | 2 | 47.77 | -102.63 |
| 6 | 583.88 | -56.16 | -13.00 | -43.16 | 1.01 V | 253 | 41.39 | -97.55 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

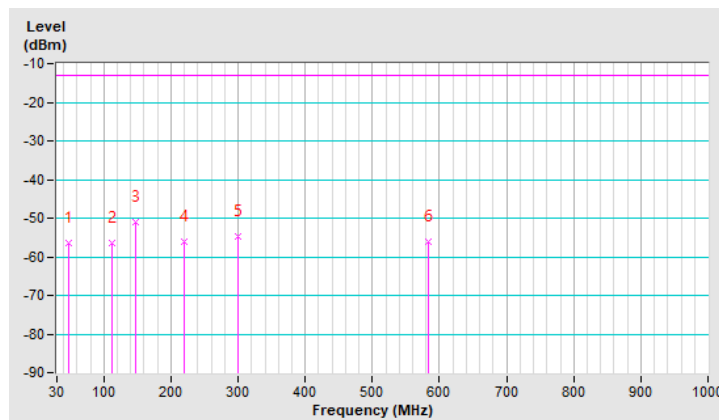

7.2.8 LTE Band 26 (Part 22)


| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 15MHz | Channel | CH 26915 : 836.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 82.01 | -53.59 | -13.00 | -40.59 | 1.00 H | 17 | 57.36 | -110.95 |
| 2 | 146.68 | -51.11 | -13.00 | -38.11 | 1.00 H | 87 | 54.92 | -106.03 |
| 3 | 228.22 | -57.64 | -13.00 | -44.64 | 1.00 H | 256 | 50.89 | -108.53 |
| 4 | 299.91 | -58.02 | -13.00 | -45.02 | 1.00 H | 207 | 46.76 | -104.78 |
| 5 | 395.51 | -63.58 | -13.00 | -50.58 | 1.49 H | 12 | 39.71 | -103.29 |
| 6 | 507.97 | -60.89 | -13.00 | -47.89 | 1.00 H | 89 | 40.43 | -101.32 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

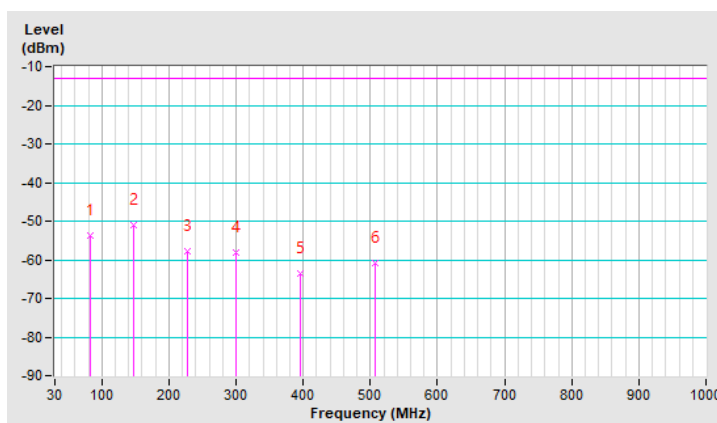


| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 15MHz | Channel | CH 26915 : 836.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 65.14 | -57.99 | -13.00 | -44.99 | 1.01 V | 288 | 49.63 | -107.62 |
| 2 | 110.13 | -58.68 | -13.00 | -45.68 | 1.01 V | 6 | 50.65 | -109.33 |
| 3 | 146.68 | -51.13 | -13.00 | -38.13 | 1.01 V | 27 | 54.90 | -106.03 |
| 4 | 222.59 | -57.69 | -13.00 | -44.69 | 1.01 V | 18 | 51.00 | -108.69 |
| 5 | 299.91 | -57.34 | -13.00 | -44.34 | 1.50 V | 314 | 47.44 | -104.78 |
| 6 | 413.78 | -63.23 | -13.00 | -50.23 | 1.50 V | 216 | 39.84 | -103.07 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

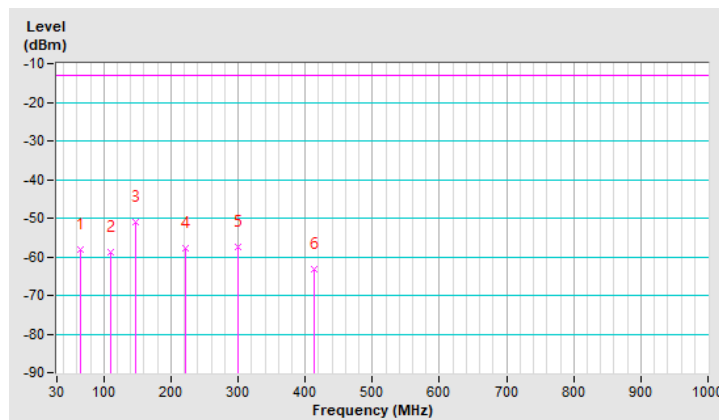


7.2.9 LTE Band 26 (Part 90)

| | | | |
|------------------------|---|--|--------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 10MHz | Channel | CH 26740 : 819 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 79.20 | -50.64 | -13.00 | -37.64 | 1.01 H | 325 | 59.57 | -110.21 |
| 2 | 101.70 | -54.42 | -13.00 | -41.42 | 1.01 H | 355 | 56.04 | -110.46 |
| 3 | 143.87 | -52.87 | -13.00 | -39.87 | 1.50 H | 99 | 53.39 | -106.26 |
| 4 | 228.22 | -58.21 | -13.00 | -45.21 | 1.01 H | 266 | 50.32 | -108.53 |
| 5 | 299.91 | -57.85 | -13.00 | -44.85 | 1.01 H | 198 | 46.93 | -104.78 |
| 6 | 583.88 | -58.72 | -13.00 | -45.72 | 1.50 H | 265 | 40.98 | -99.70 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

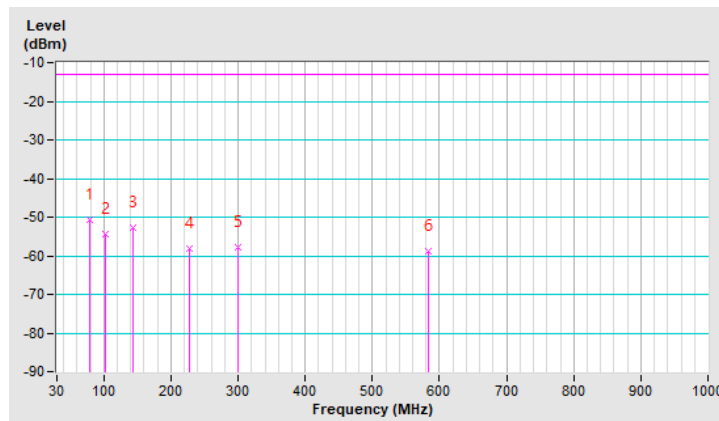


| | | | |
|------------------------|---|--|--------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 10MHz | Channel | CH 26740 : 819 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 48.28 | -58.47 | -13.00 | -45.47 | 1.00 V | 270 | 47.81 | -106.28 |
| 2 | 110.13 | -57.40 | -13.00 | -44.40 | 1.00 V | 12 | 51.93 | -109.33 |
| 3 | 143.87 | -54.22 | -13.00 | -41.22 | 1.00 V | 353 | 52.04 | -106.26 |
| 4 | 219.78 | -57.91 | -13.00 | -44.91 | 1.00 V | 5 | 50.71 | -108.62 |
| 5 | 299.91 | -57.17 | -13.00 | -44.17 | 1.49 V | 309 | 47.61 | -104.78 |
| 6 | 541.71 | -59.32 | -13.00 | -46.32 | 1.00 V | 69 | 41.55 | -100.87 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

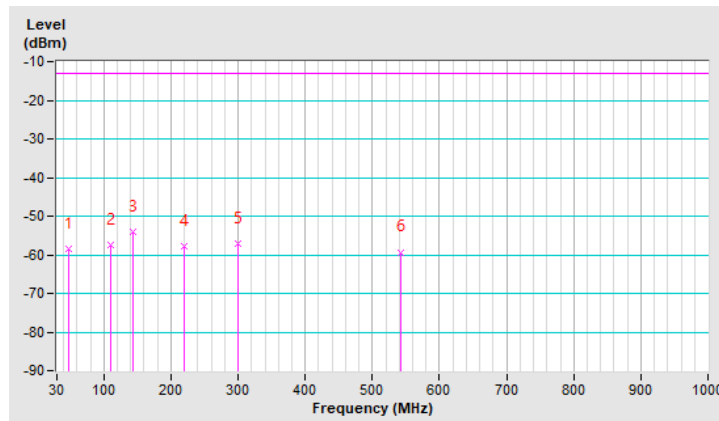


7.2.10 LTE Band 38

| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 38 Channel Bandwidth: 20MHz | Channel | CH 38000 : 2595 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|---------------|---------------|---------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 82.01 | -55.51 | -25.00 | -30.51 | 1.00 H | 270 | 53.29 | -108.80 |
| 2 | 110.13 | -54.13 | -25.00 | -29.13 | 1.99 H | 216 | 53.05 | -107.18 |
| 3 | 146.68 | -49.79 | -25.00 | -24.79 | 1.49 H | 82 | 54.09 | -103.88 |
| 4 | 187.45 | -54.76 | -25.00 | -29.76 | 1.49 H | 259 | 51.34 | -106.10 |
| 5 | 224.00 | -56.41 | -25.00 | -31.41 | 1.00 H | 72 | 50.16 | -106.57 |
| 6 | 299.91 | -55.47 | -25.00 | -30.47 | 1.00 H | 198 | 47.16 | -102.63 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

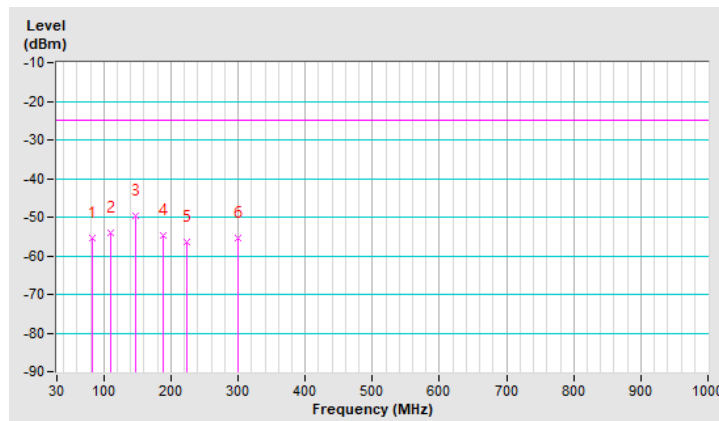


| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 38 Channel Bandwidth: 20MHz | Channel | CH 38000 : 2595 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 48.28 | -56.61 | -25.00 | -31.61 | 1.00 V | 6 | 47.52 | -104.13 |
| 2 | 111.54 | -56.32 | -25.00 | -31.32 | 1.00 V | 310 | 50.71 | -107.03 |
| 3 | 145.28 | -50.31 | -25.00 | -25.31 | 1.00 V | 40 | 53.71 | -104.02 |
| 4 | 226.81 | -55.91 | -25.00 | -30.91 | 1.00 V | 17 | 50.57 | -106.48 |
| 5 | 299.91 | -54.58 | -25.00 | -29.58 | 1.49 V | 37 | 48.05 | -102.63 |
| 6 | 522.03 | -59.59 | -25.00 | -34.59 | 1.49 V | 158 | 39.39 | -98.98 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

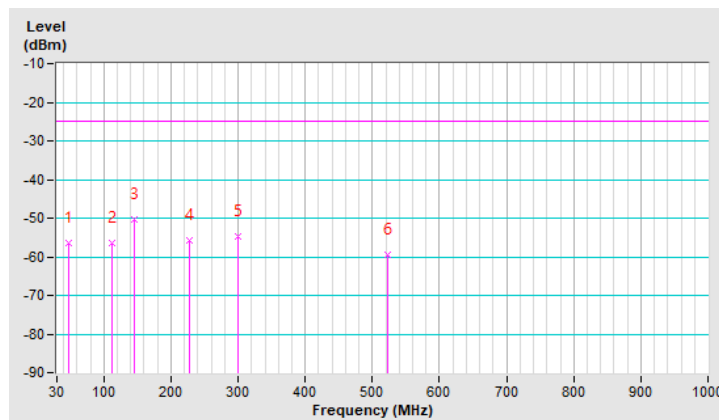


7.2.11 LTE Band 41

| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 41 Channel Bandwidth: 20MHz | Channel | CH 40620 : 2593 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 79.20 | -51.40 | -25.00 | -26.40 | 1.50 H | 258 | 56.66 | -108.06 |
| 2 | 107.32 | -51.97 | -25.00 | -26.97 | 1.00 H | 6 | 55.44 | -107.41 |
| 3 | 146.68 | -50.38 | -25.00 | -25.38 | 1.50 H | 110 | 53.50 | -103.88 |
| 4 | 183.23 | -55.88 | -25.00 | -30.88 | 1.50 H | 253 | 49.67 | -105.55 |
| 5 | 221.19 | -55.63 | -25.00 | -30.63 | 1.00 H | 80 | 50.88 | -106.51 |
| 6 | 299.91 | -54.06 | -25.00 | -29.06 | 1.00 H | 192 | 48.57 | -102.63 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

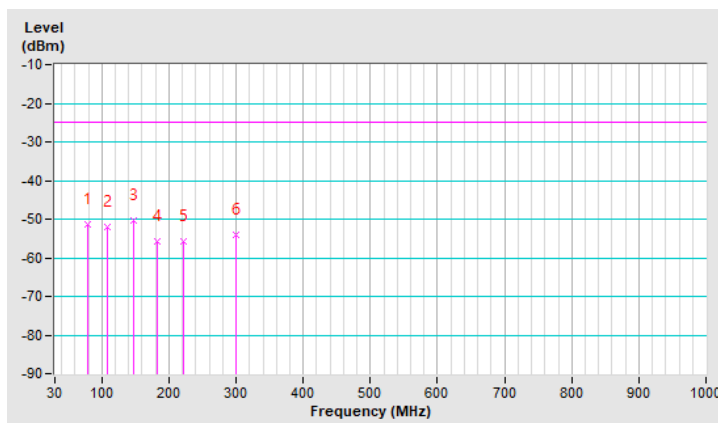


| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 41 Channel Bandwidth: 20MHz | Channel | CH 40620 : 2593 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 48.28 | -56.53 | -25.00 | -31.53 | 1.00 V | 18 | 47.60 | -104.13 |
| 2 | 104.51 | -55.16 | -25.00 | -30.16 | 1.49 V | 81 | 52.64 | -107.80 |
| 3 | 146.68 | -50.74 | -25.00 | -25.74 | 1.49 V | 6 | 53.14 | -103.88 |
| 4 | 222.59 | -55.31 | -25.00 | -30.31 | 1.00 V | 4 | 51.23 | -106.54 |
| 5 | 299.91 | -54.66 | -25.00 | -29.66 | 1.49 V | 72 | 47.97 | -102.63 |
| 6 | 337.87 | -57.85 | -25.00 | -32.85 | 1.49 V | 319 | 44.18 | -102.03 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

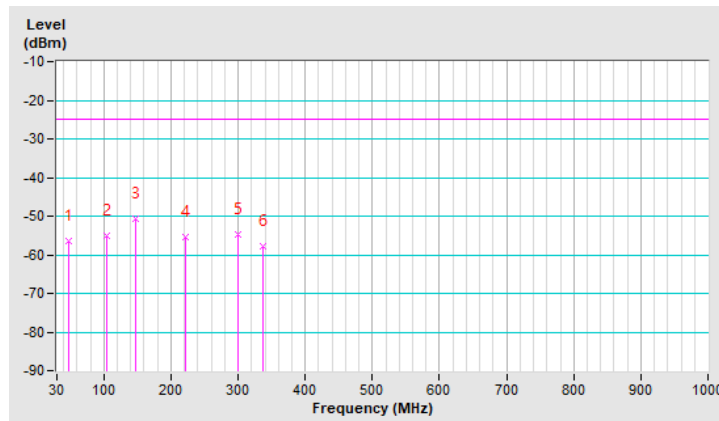

7.2.12 LTE Band 66


| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 20MHz | Channel | CH 132322 : 1745 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 69.36 | -54.46 | -13.00 | -41.46 | 1.50 H | 144 | 51.71 | -106.17 |
| 2 | 103.10 | -47.65 | -13.00 | -34.65 | 1.01 H | 244 | 60.42 | -108.07 |
| 3 | 145.28 | -50.36 | -13.00 | -37.36 | 1.50 H | 88 | 53.66 | -104.02 |
| 4 | 219.78 | -55.23 | -13.00 | -42.23 | 1.50 H | 251 | 51.24 | -106.47 |
| 5 | 321.00 | -56.75 | -13.00 | -43.75 | 1.01 H | 134 | 45.40 | -102.15 |
| 6 | 583.88 | -56.50 | -13.00 | -43.50 | 1.50 H | 172 | 41.05 | -97.55 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

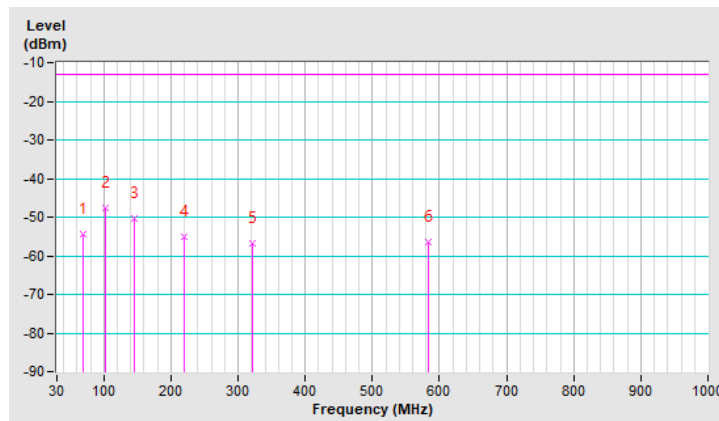


| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 20MHz | Channel | CH 132322 : 1745 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 48.28 | -56.10 | -13.00 | -43.10 | 1.49 V | 5 | 48.03 | -104.13 |
| 2 | 112.94 | -56.93 | -13.00 | -43.93 | 1.00 V | 152 | 49.97 | -106.90 |
| 3 | 145.28 | -51.35 | -13.00 | -38.35 | 1.00 V | 53 | 52.67 | -104.02 |
| 4 | 226.81 | -56.09 | -13.00 | -43.09 | 1.00 V | 9 | 50.39 | -106.48 |
| 5 | 299.91 | -55.53 | -13.00 | -42.53 | 1.49 V | 69 | 47.10 | -102.63 |
| 6 | 534.68 | -58.08 | -13.00 | -45.08 | 1.00 V | 267 | 40.73 | -98.81 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

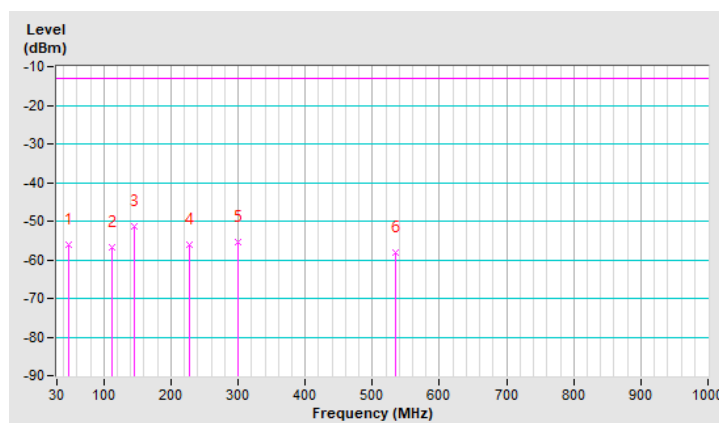


7.2.13 LTE Band 71

| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 71 Channel Bandwidth: 5MHz | Channel | CH 133297 : 680.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 87.64 | -52.54 | -13.00 | -39.54 | 1.00 H | 84 | 59.30 | -111.84 |
| 2 | 145.28 | -53.18 | -13.00 | -40.18 | 1.00 H | 71 | 52.99 | -106.17 |
| 3 | 190.26 | -58.46 | -13.00 | -45.46 | 1.00 H | 262 | 50.06 | -108.52 |
| 4 | 225.41 | -56.89 | -13.00 | -43.89 | 1.00 H | 258 | 51.84 | -108.73 |
| 5 | 299.91 | -56.60 | -13.00 | -43.60 | 1.00 H | 113 | 48.18 | -104.78 |
| 6 | 572.64 | -58.74 | -13.00 | -45.74 | 1.49 H | 213 | 41.39 | -100.13 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

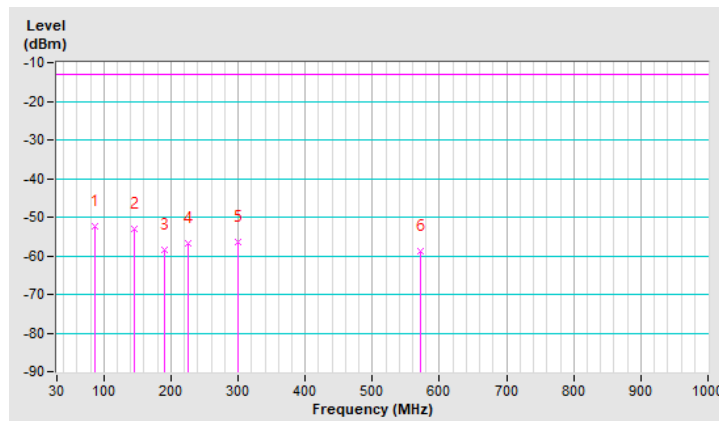


| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 71 Channel Bandwidth: 5MHz | Channel | CH 133297 : 680.5 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 66% RH |
| Tested By | Titan Hsu | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 48.28 | -58.77 | -13.00 | -45.77 | 1.01 V | 5 | 47.51 | -106.28 |
| 2 | 107.32 | -58.19 | -13.00 | -45.19 | 1.50 V | 10 | 51.37 | -109.56 |
| 3 | 141.06 | -51.89 | -13.00 | -38.89 | 1.01 V | 30 | 54.64 | -106.53 |
| 4 | 229.62 | -58.21 | -13.00 | -45.21 | 1.01 V | 43 | 50.21 | -108.42 |
| 5 | 299.91 | -57.01 | -13.00 | -44.01 | 1.50 V | 283 | 47.77 | -104.78 |
| 6 | 578.26 | -58.41 | -13.00 | -45.41 | 1.01 V | 257 | 41.49 | -99.90 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

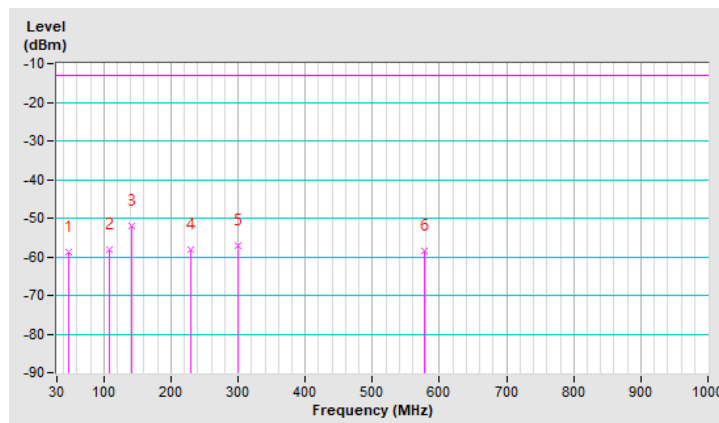

7.3 Radiated Spurious Emissions above 1GHz

7.3.1 LTE Band 2

| | | | |
|------------------------|---|--|-----------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 1.4MHz | Channel | CH 18607 : 1850.7 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 3701.40 | -44.78 | -13.00 | -31.78 | 1.14 H | 36 | 48.29 | -93.07 |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 3701.40 | -44.61 | -13.00 | -31.61 | 1.84 V | 247 | 48.46 | -93.07 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 1.4MHz | Channel | CH 18900 : 1880 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3760.00 | -44.55 | -13.00 | -31.55 | 1.12 H | 38 | 48.39 | -92.94 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3760.00 | -44.37 | -13.00 | -31.37 | 1.83 V | 247 | 48.57 | -92.94 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|-----------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 1.4MHz | Channel | CH 19193 : 1909.3 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3818.60 | -45.16 | -13.00 | -32.16 | 1.08 H | 37 | 47.62 | -92.78 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3818.60 | -45.12 | -13.00 | -32.12 | 1.83 V | 246 | 47.66 | -92.78 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---------------------------------------|--|-----------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 5MHz | Channel | CH 18625 : 1852.5 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3705.00 | -45.03 | -13.00 | -32.03 | 1.78 H | 250 | 48.03 | -93.06 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3705.00 | -44.81 | -13.00 | -31.81 | 1.16 V | 37 | 48.25 | -93.06 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|---------------------------------------|--|---------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 5MHz | Channel | CH 18900 : 1880 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3760.00 | -44.83 | -13.00 | -31.83 | 1.16 H | 42 | 48.11 | -92.94 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3760.00 | -44.56 | -13.00 | -31.56 | 1.80 V | 245 | 48.38 | -92.94 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---------------------------------------|--|-----------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 5MHz | Channel | CH 19175 : 1907.5 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3815.00 | -44.53 | -13.00 | -31.53 | 1.10 H | 36 | 48.24 | -92.77 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3815.00 | -44.25 | -13.00 | -31.25 | 1.88 V | 244 | 48.52 | -92.77 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 20MHz | Channel | CH 18700 : 1860 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3720.00 | -45.40 | -13.00 | -32.40 | 1.07 H | 35 | 47.64 | -93.04 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3720.00 | -45.35 | -13.00 | -32.35 | 1.86 V | 251 | 47.69 | -93.04 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 20MHz | Channel | CH 18900 : 1880 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3760.00 | -44.55 | -13.00 | -31.55 | 1.07 H | 42 | 48.39 | -92.94 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3760.00 | -44.30 | -13.00 | -31.30 | 1.88 V | 252 | 48.64 | -92.94 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 2 Channel Bandwidth: 20MHz | Channel | CH 19100 : 1900 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3800.00 | -44.57 | -13.00 | -31.57 | 1.09 H | 40 | 48.16 | -92.73 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3800.00 | -44.31 | -13.00 | -31.31 | 1.84 V | 247 | 48.42 | -92.73 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.3.2 LTE Band 4

| | | | |
|------------------------|---|--|-----------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 1.4MHz | Channel | CH 19957 : 1710.7 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3421.40 | -46.36 | -13.00 | -33.36 | 1.63 H | 19 | 47.96 | -94.32 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3421.40 | -45.35 | -13.00 | -32.35 | 1.53 V | 7 | 48.97 | -94.32 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|-----------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 1.4MHz | Channel | CH 20175 : 1732.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3465.00 | -45.41 | -13.00 | -32.41 | 1.60 H | 24 | 48.44 | -93.85 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3465.00 | -44.53 | -13.00 | -31.53 | 1.50 V | 8 | 49.32 | -93.85 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|-----------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 1.4MHz | Channel | CH 20393 : 1754.3 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3508.60 | -45.90 | -13.00 | -32.90 | 1.60 H | 24 | 47.46 | -93.36 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3508.60 | -44.62 | -13.00 | -31.62 | 1.55 V | 5 | 48.74 | -93.36 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---------------------------------------|--|-----------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 5MHz | Channel | CH 19975 : 1712.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3425.00 | -46.24 | -13.00 | -33.24 | 1.56 H | 22 | 48.06 | -94.30 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3425.00 | -45.33 | -13.00 | -32.33 | 1.46 V | 11 | 48.97 | -94.30 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---------------------------------------|--|-----------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 5MHz | Channel | CH 20175 : 1732.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3465.00 | -45.93 | -13.00 | -32.93 | 1.64 H | 21 | 47.92 | -93.85 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3465.00 | -44.83 | -13.00 | -31.83 | 1.55 V | 10 | 49.02 | -93.85 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---------------------------------------|--|-----------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 5MHz | Channel | CH 20375 : 1752.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3505.00 | -47.20 | -13.00 | -34.20 | 1.63 H | 24 | 46.16 | -93.36 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3505.00 | -44.90 | -13.00 | -31.90 | 1.46 V | 11 | 48.46 | -93.36 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 20MHz | Channel | CH 20050 : 1720 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3440.00 | -46.07 | -13.00 | -33.07 | 1.59 H | 24 | 48.07 | -94.14 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3440.00 | -44.92 | -13.00 | -31.92 | 1.46 V | 12 | 49.22 | -94.14 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 20MHz | Channel | CH 20175 : 1732.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3465.00 | -45.51 | -13.00 | -32.51 | 1.58 H | 22 | 48.34 | -93.85 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3465.00 | -44.53 | -13.00 | -31.53 | 1.49 V | 10 | 49.32 | -93.85 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 4 Channel Bandwidth: 20MHz | Channel | CH 20300 : 1745 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3490.00 | -45.65 | -13.00 | -32.65 | 1.62 H | 22 | 47.88 | -93.53 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3490.00 | -44.32 | -13.00 | -31.32 | 1.46 V | 12 | 49.21 | -93.53 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.3.3 LTE Band 5

| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 1.4MHz | Channel | CH 20407 : 824.7 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1649.40 | -55.87 | -13.00 | -42.87 | 1.58 H | 276 | 46.57 | -102.44 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1649.40 | -55.94 | -13.00 | -42.94 | 2.39 V | 136 | 46.50 | -102.44 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 1.4MHz | Channel | CH 20525 : 836.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -55.26 | -13.00 | -42.26 | 1.53 H | 279 | 47.11 | -102.37 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -55.55 | -13.00 | -42.55 | 2.42 V | 138 | 46.82 | -102.37 |

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 1.4MHz | Channel | CH 20643 : 848.3 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1696.60 | -56.05 | -13.00 | -43.05 | 1.50 H | 279 | 46.24 | -102.29 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1696.60 | -56.23 | -13.00 | -43.23 | 2.40 V | 141 | 46.06 | -102.29 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|---------------------------------------|--|----------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 5MHz | Channel | CH 20425 : 826.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1653.00 | -55.90 | -13.00 | -42.90 | 1.56 H | 283 | 46.53 | -102.43 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1653.00 | -56.36 | -13.00 | -43.36 | 2.45 V | 144 | 46.07 | -102.43 |

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

| | | | |
|------------------------|---------------------------------------|--|----------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 5MHz | Channel | CH 20525 : 836.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -55.64 | -13.00 | -42.64 | 1.52 H | 278 | 46.73 | -102.37 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -56.41 | -13.00 | -43.41 | 2.44 V | 137 | 45.96 | -102.37 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

| | | | |
|------------------------|---------------------------------------|--|----------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 5MHz | Channel | CH 20625 : 846.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1693.00 | -55.33 | -13.00 | -42.33 | 1.53 H | 280 | 46.98 | -102.31 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1693.00 | -56.04 | -13.00 | -43.04 | 2.41 V | 141 | 46.27 | -102.31 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

| | | | |
|------------------------|--|--|--------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 10MHz | Channel | CH 20450 : 829 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1658.00 | -55.94 | -13.00 | -42.94 | 1.53 H | 276 | 46.47 | -102.41 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1658.00 | -56.25 | -13.00 | -43.25 | 2.41 V | 143 | 46.16 | -102.41 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 10MHz | Channel | CH 20525 : 836.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -55.22 | -13.00 | -42.22 | 1.50 H | 280 | 47.15 | -102.37 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -55.55 | -13.00 | -42.55 | 2.38 V | 138 | 46.82 | -102.37 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|--------------------|
| RF Mode | LTE Band 5 Channel Bandwidth: 10MHz | Channel | CH 20600 : 844 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1688.00 | -55.74 | -13.00 | -42.74 | 1.58 H | 278 | 46.59 | -102.33 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1688.00 | -55.78 | -13.00 | -42.78 | 2.41 V | 143 | 46.55 | -102.33 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.3.4 LTE Band 7

| | | | |
|------------------------|---------------------------------------|--|-----------------------|
| RF Mode | LTE Band 7 Channel Bandwidth: 5MHz | Channel | CH 20775 : 2502.5 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 5005.00 | -40.41 | -25.00 | -15.41 | 2.47 H | 32 | 49.90 | -90.31 |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 5005.00 | -40.99 | -25.00 | -15.99 | 1.32 V | 139 | 49.32 | -90.31 |

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---------------------------------------|--|---------------------|
| RF Mode | LTE Band 7 Channel Bandwidth: 5MHz | Channel | CH 21100 : 2535 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5070.00 | -39.73 | -25.00 | -14.73 | 2.43 H | 28 | 50.22 | -89.95 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5070.00 | -40.07 | -25.00 | -15.07 | 1.36 V | 139 | 49.88 | -89.95 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---------------------------------------|--|-----------------------|
| RF Mode | LTE Band 7 Channel Bandwidth: 5MHz | Channel | CH 21425 : 2567.5 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5135.00 | -40.40 | -25.00 | -15.40 | 2.48 H | 28 | 49.45 | -89.85 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5135.00 | -40.48 | -25.00 | -15.48 | 1.32 V | 140 | 49.37 | -89.85 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 7 Channel Bandwidth: 20MHz | Channel | CH 20850 : 2510 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5020.00 | -40.60 | -25.00 | -15.60 | 2.42 H | 31 | 49.64 | -90.24 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5020.00 | -41.20 | -25.00 | -16.20 | 1.33 V | 143 | 49.04 | -90.24 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 7 Channel Bandwidth: 20MHz | Channel | CH 21100 : 2535 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5070.00 | -39.43 | -25.00 | -14.43 | 2.43 H | 30 | 50.52 | -89.95 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5070.00 | -40.03 | -25.00 | -15.03 | 1.37 V | 141 | 49.92 | -89.95 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 7 Channel Bandwidth: 20MHz | Channel | CH 21350 : 2560 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5120.00 | -39.88 | -25.00 | -14.88 | 2.41 H | 34 | 49.89 | -89.77 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5120.00 | -40.66 | -25.00 | -15.66 | 1.38 V | 142 | 49.11 | -89.77 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.3.5 LTE Band 12

| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 1.4MHz | Channel | CH 23017 : 699.7 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1399.40 | -55.41 | -13.00 | -42.41 | 3.09 H | 65 | 46.61 | -102.02 |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1399.40 | -54.44 | -13.00 | -41.44 | 1.84 V | 168 | 47.58 | -102.02 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 1.4MHz | Channel | CH 23095 : 707.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1415.00 | -55.74 | -13.00 | -42.74 | 2.99 H | 60 | 46.28 | -102.02 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1415.00 | -54.40 | -13.00 | -41.40 | 1.89 V | 165 | 47.62 | -102.02 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 1.4MHz | Channel | CH 23173 : 715.3 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1430.60 | -55.34 | -13.00 | -42.34 | 3.06 H | 64 | 46.69 | -102.03 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1430.60 | -54.65 | -13.00 | -41.65 | 1.84 V | 167 | 47.38 | -102.03 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 5MHz | Channel | CH 23035 : 701.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1403.00 | -55.50 | -13.00 | -42.50 | 2.99 H | 61 | 46.52 | -102.02 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1403.00 | -54.36 | -13.00 | -41.36 | 1.89 V | 161 | 47.66 | -102.02 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 5MHz | Channel | CH 23095 : 707.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1415.00 | -55.73 | -13.00 | -42.73 | 3.08 H | 66 | 46.29 | -102.02 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1415.00 | -54.37 | -13.00 | -41.37 | 1.88 V | 162 | 47.65 | -102.02 |

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 5MHz | Channel | CH 23155 : 713.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1427.00 | -55.46 | -13.00 | -42.46 | 3.05 H | 66 | 46.58 | -102.04 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1427.00 | -54.57 | -13.00 | -41.57 | 1.83 V | 162 | 47.47 | -102.04 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|---|--|--------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 10MHz | Channel | CH 23060 : 704 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1408.00 | -55.45 | -13.00 | -42.45 | 3.01 H | 59 | 46.57 | -102.02 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1408.00 | -54.96 | -13.00 | -41.96 | 1.87 V | 167 | 47.06 | -102.02 |

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 10MHz | Channel | CH 23095 : 707.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1415.00 | -54.78 | -13.00 | -41.78 | 2.95 H | 64 | 47.24 | -102.02 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1415.00 | -54.14 | -13.00 | -41.14 | 1.85 V | 166 | 47.88 | -102.02 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|---|--|--------------------|
| RF Mode | LTE Band 12 Channel Bandwidth: 10MHz | Channel | CH 23130 : 711 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1422.00 | -55.26 | -13.00 | -42.26 | 3.00 H | 61 | 46.77 | -102.03 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1422.00 | -54.71 | -13.00 | -41.71 | 1.85 V | 162 | 47.32 | -102.03 |

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

7.3.6 LTE Band 13

| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 13 Channel Bandwidth: 5MHz | Channel | CH 23205 : 779.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1559.00 | -55.32 | -40.00 | -15.32 | 2.00 H | 180 | 46.93 | -102.25 |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1559.00 | -55.96 | -40.00 | -15.96 | 1.61 V | 178 | 46.29 | -102.25 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|--------------------|
| RF Mode | LTE Band 13 Channel Bandwidth: 5MHz | Channel | CH 23230 : 782 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1564.00 | -54.72 | -40.00 | -14.72 | 2.02 H | 183 | 47.55 | -102.27 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1564.00 | -55.21 | -40.00 | -15.21 | 1.64 V | 177 | 47.06 | -102.27 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 13 Channel Bandwidth: 5MHz | Channel | CH 23255 : 784.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1569.00 | -55.19 | -40.00 | -15.19 | 1.99 H | 185 | 47.09 | -102.28 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1569.00 | -55.72 | -40.00 | -15.72 | 1.71 V | 174 | 46.56 | -102.28 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|--------------------|
| RF Mode | LTE Band 13 Channel Bandwidth: 10MHz | Channel | CH 23230 : 782 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1564.00 | -54.69 | -40.00 | -14.69 | 2.06 H | 184 | 47.58 | -102.27 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1564.00 | -55.16 | -40.00 | -15.16 | 1.62 V | 181 | 47.11 | -102.27 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.3.7 LTE Band 25

| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 1.4MHz | Channel | CH 26047 : 1850.7 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 3701.40 | -44.93 | -13.00 | -31.93 | 1.91 H | 65 | 48.14 | -93.07 |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 3701.40 | -46.00 | -13.00 | -33.00 | 3.42 V | 114 | 47.07 | -93.07 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 1.4MHz | Channel | CH 26365 : 1882.5 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3765.00 | -44.39 | -13.00 | -31.39 | 1.89 H | 61 | 48.52 | -92.91 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3765.00 | -45.23 | -13.00 | -32.23 | 3.44 V | 111 | 47.68 | -92.91 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 1.4MHz | Channel | CH 26683 : 1914.3 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3828.60 | -44.79 | -13.00 | -31.79 | 1.85 H | 59 | 48.02 | -92.81 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3828.60 | -45.93 | -13.00 | -32.93 | 3.40 V | 112 | 46.88 | -92.81 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 5MHz | Channel | CH 26065 : 1852.5 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3705.00 | -44.99 | -13.00 | -31.99 | 1.87 H | 62 | 48.07 | -93.06 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3705.00 | -45.94 | -13.00 | -32.94 | 3.44 V | 115 | 47.12 | -93.06 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 5MHz | Channel | CH 26365 : 1882.5 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3765.00 | -44.80 | -13.00 | -31.80 | 1.91 H | 64 | 48.11 | -92.91 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3765.00 | -45.38 | -13.00 | -32.38 | 3.48 V | 111 | 47.53 | -92.91 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 5MHz | Channel | CH 26665 : 1912.5 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3825.00 | -45.15 | -13.00 | -32.15 | 1.88 H | 58 | 47.64 | -92.79 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3825.00 | -45.23 | -13.00 | -32.23 | 3.47 V | 115 | 47.56 | -92.79 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 20MHz | Channel | CH 26140 : 1860 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3720.00 | -45.25 | -13.00 | -32.25 | 1.94 H | 65 | 47.79 | -93.04 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3720.00 | -45.66 | -13.00 | -32.66 | 3.44 V | 115 | 47.38 | -93.04 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|-----------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 20MHz | Channel | CH 26365 : 1882.5 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3765.00 | -44.32 | -13.00 | -31.32 | 1.89 H | 58 | 48.59 | -92.91 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3765.00 | -45.22 | -13.00 | -32.22 | 3.46 V | 112 | 47.69 | -92.91 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 25 Channel Bandwidth: 20MHz | Channel | CH 26590 : 1905 MHz |
| Frequency Range | 1 GHz ~ 20 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3810.00 | -44.54 | -13.00 | -31.54 | 1.90 H | 62 | 48.22 | -92.76 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3810.00 | -45.52 | -13.00 | -32.52 | 3.42 V | 115 | 47.24 | -92.76 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.3.8 LTE Band 26 (Part 22)

| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 1.4MHz | Channel | CH 26797 : 824.7 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1649.40 | -57.60 | -13.00 | -44.60 | 1.17 H | 172 | 44.84 | -102.44 |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1649.40 | -58.33 | -13.00 | -45.33 | 1.98 V | 55 | 44.11 | -102.44 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 1.4MHz | Channel | CH 26915 : 836.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -57.41 | -13.00 | -44.41 | 1.12 H | 173 | 44.96 | -102.37 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -57.55 | -13.00 | -44.55 | 1.96 V | 58 | 44.82 | -102.37 |

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 1.4MHz | Channel | CH 27033 : 848.3 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1696.60 | -58.12 | -13.00 | -45.12 | 1.11 H | 174 | 44.17 | -102.29 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1696.60 | -58.22 | -13.00 | -45.22 | 1.97 V | 61 | 44.07 | -102.29 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 5MHz | Channel | CH 26815 : 826.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1653.00 | -57.77 | -13.00 | -44.77 | 1.10 H | 177 | 44.66 | -102.43 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1653.00 | -58.00 | -13.00 | -45.00 | 1.93 V | 56 | 44.43 | -102.43 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 5MHz | Channel | CH 26915 : 836.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -58.04 | -13.00 | -45.04 | 1.17 H | 170 | 44.33 | -102.37 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -58.41 | -13.00 | -45.41 | 2.00 V | 59 | 43.96 | -102.37 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 5MHz | Channel | CH 27015 : 846.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1693.00 | -57.73 | -13.00 | -44.73 | 1.11 H | 171 | 44.58 | -102.31 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1693.00 | -57.92 | -13.00 | -44.92 | 1.98 V | 55 | 44.39 | -102.31 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 15MHz | Channel | CH 26865 : 831.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1663.00 | -57.63 | -13.00 | -44.63 | 1.11 H | 173 | 44.77 | -102.40 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1663.00 | -57.84 | -13.00 | -44.84 | 1.94 V | 55 | 44.56 | -102.40 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 15MHz | Channel | CH 26915 : 836.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -57.35 | -13.00 | -44.35 | 1.09 H | 177 | 45.02 | -102.37 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1673.00 | -57.45 | -13.00 | -44.45 | 1.94 V | 64 | 44.92 | -102.37 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 15MHz | Channel | CH 26965 : 841.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1683.00 | -57.47 | -13.00 | -44.47 | 1.11 H | 171 | 44.86 | -102.33 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1683.00 | -57.61 | -13.00 | -44.61 | 2.01 V | 59 | 44.72 | -102.33 |

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

7.3.9 LTE Band 26 (Part 90)

| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 1.4MHz | Channel | CH 26697 : 814.7 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1629.40 | -57.84 | -13.00 | -44.84 | 1.07 H | 172 | 44.58 | -102.42 |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1629.40 | -58.15 | -13.00 | -45.15 | 1.99 V | 59 | 44.27 | -102.42 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|--------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 1.4MHz | Channel | CH 26740 : 819 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1638.00 | -57.94 | -13.00 | -44.94 | 1.16 H | 172 | 44.49 | -102.43 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1638.00 | -58.03 | -13.00 | -45.03 | 2.00 V | 64 | 44.40 | -102.43 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 1.4MHz | Channel | CH 26783 : 823.3 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1646.60 | -57.78 | -13.00 | -44.78 | 1.07 H | 174 | 44.65 | -102.43 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1646.60 | -58.15 | -13.00 | -45.15 | 1.92 V | 56 | 44.28 | -102.43 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 5MHz | Channel | CH 26715 : 816.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1633.00 | -57.96 | -13.00 | -44.96 | 1.14 H | 173 | 44.47 | -102.43 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1633.00 | -58.31 | -13.00 | -45.31 | 2.01 V | 56 | 44.12 | -102.43 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|--------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 5MHz | Channel | CH 26740 : 819 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1638.00 | -57.97 | -13.00 | -44.97 | 1.11 H | 177 | 44.46 | -102.43 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1638.00 | -58.54 | -13.00 | -45.54 | 1.94 V | 59 | 43.89 | -102.43 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 5MHz | Channel | CH 26765 : 816.47 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1643.00 | -57.85 | -13.00 | -44.85 | 1.13 H | 171 | 44.58 | -102.43 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1643.00 | -58.22 | -13.00 | -45.22 | 1.92 V | 57 | 44.21 | -102.43 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|---|--|--------------------|
| RF Mode | LTE Band 26 Channel Bandwidth: 10MHz | Channel | CH 26740 : 819 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1638.00 | -57.39 | -13.00 | -44.39 | 1.09 H | 172 | 45.04 | -102.43 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1638.00 | -57.58 | -13.00 | -44.58 | 2.01 V | 66 | 44.85 | -102.43 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.3.10 LTE Band 38

| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 38 Channel Bandwidth: 5MHz | Channel | CH 37775 : 2572.5 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|---|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5145.00 | -46.03 | -25.00 | -21.03 | 3.99 H | 92 | 43.86 | -89.89 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5145.00 | -44.93 | -25.00 | -19.93 | 1.54 V | 150 | 44.96 | -89.89 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 38 Channel Bandwidth: 5MHz | Channel | CH 38000 : 2595 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5190.00 | -45.73 | -25.00 | -20.73 | 3.95 H | 90 | 44.35 | -90.08 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5190.00 | -44.89 | -25.00 | -19.89 | 1.60 V | 149 | 45.19 | -90.08 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 38 Channel Bandwidth: 5MHz | Channel | CH 38225 : 2617.5 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5235.00 | -45.98 | -25.00 | -20.98 | 4.00 H | 91 | 44.26 | -90.24 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5235.00 | -45.40 | -25.00 | -20.40 | 1.54 V | 146 | 44.84 | -90.24 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 38 Channel Bandwidth: 20MHz | Channel | CH 37850 : 2580 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5235.00 | -46.08 | -25.00 | -21.08 | 3.92 H | 91 | 44.16 | -90.24 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5235.00 | -45.04 | -25.00 | -20.04 | 1.61 V | 144 | 45.20 | -90.24 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 38 Channel Bandwidth: 20MHz | Channel | CH 38000 : 2595 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5190.00 | -45.60 | -25.00 | -20.60 | 3.97 H | 94 | 44.48 | -90.08 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5190.00 | -44.71 | -25.00 | -19.71 | 1.55 V | 148 | 45.37 | -90.08 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 38 Channel Bandwidth: 20MHz | Channel | CH 38150 : 2610 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5220.00 | -45.84 | -25.00 | -20.84 | 4.00 H | 96 | 44.35 | -90.19 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5220.00 | -45.27 | -25.00 | -20.27 | 1.54 V | 145 | 44.92 | -90.19 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.3.11 LTE Band 41

| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 41 Channel Bandwidth: 5MHz | Channel | CH 39675 : 2498.5 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|---|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 4997.00 | -48.58 | -25.00 | -23.58 | 1.61 H | 120 | 41.77 | -90.35 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 4997.00 | -47.61 | -25.00 | -22.61 | 2.48 V | 341 | 42.74 | -90.35 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|---------------------|
| RF Mode | LTE Band 41 Channel Bandwidth: 5MHz | Channel | CH 40620 : 2593 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5186.00 | -48.57 | -25.00 | -23.57 | 1.60 H | 127 | 41.51 | -90.08 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5186.00 | -46.90 | -25.00 | -21.90 | 2.41 V | 336 | 43.18 | -90.08 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 41 Channel Bandwidth: 5MHz | Channel | CH 41565 : 2687.5 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5375.00 | -47.86 | -25.00 | -22.86 | 1.57 H | 125 | 42.12 | -89.98 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5375.00 | -47.04 | -25.00 | -22.04 | 2.48 V | 339 | 42.94 | -89.98 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 41 Channel Bandwidth: 20MHz | Channel | CH 39750 : 2506 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5012.00 | -48.62 | -25.00 | -23.62 | 1.55 H | 124 | 41.66 | -90.28 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5012.00 | -47.69 | -25.00 | -22.69 | 2.47 V | 340 | 42.59 | -90.28 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 41 Channel Bandwidth: 20MHz | Channel | CH 40620 : 2593 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5186.00 | -47.59 | -25.00 | -22.59 | 1.61 H | 124 | 42.49 | -90.08 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5186.00 | -46.70 | -25.00 | -21.70 | 2.47 V | 336 | 43.38 | -90.08 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 41 Channel Bandwidth: 20MHz | Channel | CH 41490 : 2680 MHz |
| Frequency Range | 1 GHz ~ 27 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5360.00 | -47.97 | -25.00 | -22.97 | 1.53 H | 124 | 42.07 | -90.04 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 5360.00 | -47.16 | -25.00 | -22.16 | 2.40 V | 340 | 42.88 | -90.04 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.3.12 LTE Band 66

| | | | |
|------------------------|--|--|------------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 1.4MHz | Channel | CH 131979 : 1710.7 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|---|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3421.40 | -50.01 | -13.00 | -37.01 | 2.21 H | 234 | 44.31 | -94.32 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3421.40 | -49.30 | -13.00 | -36.30 | 3.55 V | 30 | 45.02 | -94.32 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 1.4MHz | Channel | CH 132322 : 1745 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3490.00 | -48.65 | -13.00 | -35.65 | 2.22 H | 236 | 44.88 | -93.53 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3490.00 | -47.89 | -13.00 | -34.89 | 3.52 V | 28 | 45.64 | -93.53 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|------------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 1.4MHz | Channel | CH 132665 : 1779.3 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3558.60 | -49.02 | -13.00 | -36.02 | 2.26 H | 234 | 44.16 | -93.18 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3558.60 | -48.49 | -13.00 | -35.49 | 3.51 V | 31 | 44.69 | -93.18 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|------------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 5MHz | Channel | CH 131997 : 1712.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3425.00 | -50.23 | -13.00 | -37.23 | 2.19 H | 240 | 44.07 | -94.30 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3425.00 | -49.48 | -13.00 | -36.48 | 3.54 V | 32 | 44.82 | -94.30 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|----------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 5MHz | Channel | CH 132322 : 1745 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 3490.00 | -49.36 | -13.00 | -36.36 | 2.22 H | 234 | 44.17 | -93.53 |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 3490.00 | -48.76 | -13.00 | -35.76 | 3.58 V | 30 | 44.77 | -93.53 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|--|--|------------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 5MHz | Channel | CH 132647 : 1777.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3555.00 | -48.75 | -13.00 | -35.75 | 2.20 H | 236 | 44.44 | -93.19 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3555.00 | -48.13 | -13.00 | -35.13 | 3.53 V | 27 | 45.06 | -93.19 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 20MHz | Channel | CH 132072 : 1720 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3440.00 | -49.76 | -13.00 | -36.76 | 2.21 H | 239 | 44.38 | -94.14 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3440.00 | -48.72 | -13.00 | -35.72 | 3.60 V | 25 | 45.42 | -94.14 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 20MHz | Channel | CH 132322 : 1745 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3490.00 | -48.61 | -13.00 | -35.61 | 2.21 H | 236 | 44.92 | -93.53 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3490.00 | -47.89 | -13.00 | -34.89 | 3.52 V | 25 | 45.64 | -93.53 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

| | | | |
|------------------------|---|--|----------------------|
| RF Mode | LTE Band 66 Channel Bandwidth: 20MHz | Channel | CH 132572 : 1770 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|------------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3540.00 | -49.01 | -13.00 | -36.01 | 2.17 H | 244 | 44.22 | -93.23 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 3540.00 | -47.92 | -13.00 | -34.92 | 3.54 V | 28 | 45.31 | -93.23 |

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.3.13 LTE Band 71

| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 71 Channel Bandwidth: 5MHz | Channel | CH 133147 : 665.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

Antenna Polarity & Test Distance : Horizontal at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1331.00 | -56.91 | -13.00 | -43.91 | 1.80 H | 22 | 45.39 | -102.30 |

Antenna Polarity & Test Distance : Vertical at 3 m

| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1331.00 | -57.06 | -13.00 | -44.06 | 1.04 V | 12 | 45.24 | -102.30 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 71 Channel Bandwidth: 5MHz | Channel | CH 133297 : 680.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1361.00 | -56.52 | -13.00 | -43.52 | 1.83 H | 22 | 45.69 | -102.21 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1361.00 | -56.92 | -13.00 | -43.92 | 1.83 V | 28 | 45.29 | -102.21 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|--|--|-----------------------|
| RF Mode | LTE Band 71 Channel Bandwidth: 5MHz | Channel | CH 133447 : 695.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1391.00 | -57.12 | -13.00 | -44.12 | 1.82 H | 32 | 44.94 | -102.06 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1391.00 | -57.37 | -13.00 | -44.37 | 1.05 V | 10 | 44.69 | -102.06 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 71 Channel Bandwidth: 20MHz | Channel | CH 133222 : 673 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1346.00 | -57.31 | -13.00 | -44.31 | 1.87 H | 17 | 44.96 | -102.27 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1346.00 | -57.80 | -13.00 | -44.80 | 1.02 V | 15 | 44.47 | -102.27 |

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



| | | | |
|------------------------|---|--|-----------------------|
| RF Mode | LTE Band 71 Channel Bandwidth: 20MHz | Channel | CH 133297 : 680.5 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1361.00 | -56.77 | -13.00 | -43.77 | 1.78 H | 16 | 45.44 | -102.21 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1361.00 | -57.05 | -13.00 | -44.05 | 1.04 V | 11 | 45.16 | -102.21 |

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



| | | | |
|------------------------|---|--|---------------------|
| RF Mode | LTE Band 71 Channel Bandwidth: 20MHz | Channel | CH 133372 : 688 MHz |
| Frequency Range | 1 GHz ~ 18 GHz | Detector Function & Bandwidth | 1 MHz/3 MHz (RMS) |
| Input Power | 120 Vac, 60 Hz | Environmental Conditions | 21°C, 76% RH |
| Tested By | Rex Wnag | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-----------|-------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1376.00 | -56.95 | -13.00 | -43.95 | 1.83 H | 15 | 45.18 | -102.13 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1376.00 | -57.36 | -13.00 | -44.36 | 1.06 V | 13 | 44.77 | -102.13 |

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---