



731 Enterprise Drive
Lexington, KY 40510

Telephone: 859-226-1000
Facsimile: 859-226-1040
www.intertek-etlsemko.com

TEST REPORT

Report Number: 101483717LEX-001
Project Number: G101483717

Report Issue Date: 1/10/2014


Product Name: TCA203
Model Number: TCA203
FCCID: G95TCA203
ICID: 431C-TCA203
FCC Standards: FCC Part 22 Subpart H
FCC Part 24 Subpart E

Industry Canada Standards: RSS-132 Issue 3
RSS-133 Issue 6


Tested by:
Intertek Testing Services NA, Inc.
731 Enterprise Drive
Lexington, KY 40510

Client:
Technicolor USA, Inc.
101 West 103rd St
Indianapolis, IN 46290

Report prepared by

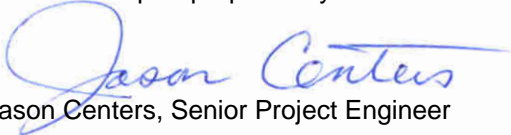
Jason Centers, Senior Project Engineer

Report reviewed by


Bryan Taylor, Team Leader - Engineering



This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TABLE OF CONTENTS

1 Introduction and Conclusion 3

2 Test Summary 3

3 Description of Equipment Under Test 4

4 Conducted Output Power..... 7

5 Occupied Bandwidth 15

6 Conducted Spurious Emissions at Antenna Terminals..... 19

7 Radiated Output Power 51

8 Radiated Spurious Emissions (Transmitter)..... 52

9 Frequency Stability..... 60

10 Measurement Uncertainty..... 64

11 Revision History 65

1 Introduction and Conclusion

The tests indicated in Section 2 were performed on the product constructed as described in Section 3. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test method, a list of the actual test equipment used, documentation photos, results and raw data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested complied with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

The INTERTEK-Lexington laboratory is located at 731 Enterprise Drive, Lexington Kentucky, 40510. The radiated emission test site is a 10-meter semi-anechoic chamber. The chamber meets the characteristics of CISPR 16-1 and ANSI C63.4. For measurements, a remotely controlled flush-mount metal-top turntable is used to rotate the EUT a full 360 degrees. A remote controlled non-conductive antenna mast is used to scan the antenna height from one to four meters. The test site is listed with the FCC under Registration Number 485103.

2 Test Summary

Page	Test full name	FCC Reference	Industry Canada	Result
7	Conducted Output Power	§2.1046 §24.232(d)	RSS-132 (4.4), RSS-133 (4.1), RSS-133 (6.4)	Pass
15	Occupied Bandwidth	§2.1049, §22.917(b)(d), and §24.238(a)	RSS-GEN (4.6.1), RSS-133 (2.3)	Pass
19	Conducted Spurious Emissions	§2.1049, §2.1051, §22.917(a)(b), and § 24.238(a)(b)	RSS-132 (4.5), RSS-133 (6.5.1)	Pass
45	Radiated Output Power	§ 22.913(a) and § 24.232(c)	RSS-132 (4.4), RSS-133 (6.4)	Pass
52	Radiated Spurious Emissions (Transmitter)	§2.1053, §22.917(a)(b), and §24.238(a)(b)	RSS-132 (4.5), RSS-133 (6.5)	Pass
60	Frequency Stability	§2.1055, §22.355, and §24.235	RSS-132 (4.3), RSS-133 (6.3)	Pass

3 Description of Equipment Under Test

Equipment Under Test	
Manufacturer	Technicolor USA, Inc.
Model Number	TCA203
Serial Number	3440151188835
FCC Identifier	G95TCA203
IC Identifier	431C-TCA203
Receive Date	12/18/2013
Test Start Date	12/18/2013
Test End Date	1/10/2014
Device Received Condition	Good
Test Sample Type	Production
Frequency Band	824MHz - 849MHz (GSM 850 Band) 1850MHz - 1910MHz (GSM 1900 Band)
Modulation Type	GSM (GMSK), GPRS (GMSK), EDGE (8-PSK)
Transmission Control	Base Station Simulator
Maximum Output Power (Conducted)	32.19 dBm (GSM 850 - GMSK) 28.72 dBm (GSM 1900 - GMSK) 26.47dBm (GSM 850 - EDGE / 8PSK) 25.32 dBm (GSM 1900 - EDGE / 8PSK) 22.1 dBm (WCDMA Band V) 21.98 dBm (WCDMA Band II)
Test Channels	128, 190, & 251 (GSM 850 Band) 512, 661, & 810 (GSM 1900 Band) 4132, 4182, 4233 (WCDMA Band V) 9262, 9400, 9538 (WCDMA Band II)
Antenna Type	Internal
Operating Voltage	115VAC/60Hz (Via AC / DC Power Adapter)

Description of Equipment Under Test

The TCA203 is a touch screen alarm panel that contains a zigbee, 802.11b/g/n, and cellular modules. This report contains data pertaining to the cellular transmissions.

Operating modes of the EUT:


No.	Descriptions of EUT Exercising
1	Transmitting a GPRS, EDGE or WCDMA signal
2	Receive / idle mode

3.1 System setup including cable interconnection details, support equipment and simplified block diagram

3.2 EUT Block Diagram:



Block Diagram for Radiated Tests

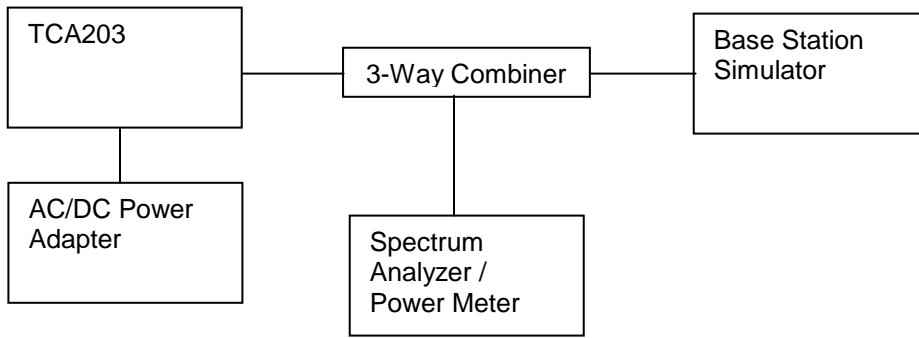

Block Diagram for Conducted Tests at the Antenna Port

3.3 Cables:

Cables					
Description	Length	Shielding	Ferrites	Connection	
				From	To
Ethernet Cable	50 ft	None	None	Test Sample	Ethernet Hub
DC Power Cable	5 ft	None	None	Test Sample	AC/DC Power Converter

3.4 Support Equipment:

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
Ethernet Hub	Netgear	EN106	ENT6B03054560

4 Conducted Output Power

4.1 Test Limits

§ 2.1046

For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in §2.1033(c)(8).

§ 24.232 (d)

Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2 Test Procedure

The transmitter output was connected to a coaxial cable, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The EUT was placed into a call and the burst average power was measured with a power meter dBm. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. Tests were performed at three frequencies (low, middle, and high channels) and on the highest power levels, which can be setup on the transmitters.

The peak-to-average ratio (PAR) was measured using a spectrum analyzer with a RBW wider than the EBW of the measured signal. The delta between the peak and average trace was recorded.

4.3 Test Equipment Used:

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
Base Station Simulator	3917	Rohde&Schwarz	CMW500	9/26/2013	9/26/2014
Environmental Chamber	3947	Test Equity	115A	Time Of Use	Time Of Use
Spectrum Analyzer	3720	Rohde & Schwarz	FSEK 30	9/10/2013	9/10/2014
Multimeter/Temp Meter	3400	Fluke	289	5/29/2013	5/29/2014
Spectrum Analyzer	3099	Rohde & Schwarz	FSP7	9/12/2013	9/12/2014
Directional Coupler	08736	Narda	4226-20	Time of Use	Time of Use

4.4 Results:**Conducted Output Power (GPRS & EDGE Modes)**


Burst Average Power (dBm)				
Band	Channel	Frequency (MHz)	GSM (GMSK)	EDGE (8PSK)
GSM 850	128	824.2	32.19	26.47
	192	837	32.04	26.31
	251	848.8	31.77	26.09
GSM 1900	512	1850.2	28.37	25.28
	661	1880	28.58	25.32
	810	1909.8	28.72	25.3

Conducted Output Power (UMTS Modes)

Average Power (dBm)			
Band	Channel	Frequency (MHz)	Avg. Pwr.
WCDMA Band V	4132	826.4	22.10
	4182	836.4	22.10
	4233	846.6	22.02
WCDMA Band II	9262	1852.4	21.98
	9400	1880	21.95
	9538	1907.6	21.75

Peak-to-Average Ratio – GPRS Mode (GSM850 Band)

RBW 10 MHz

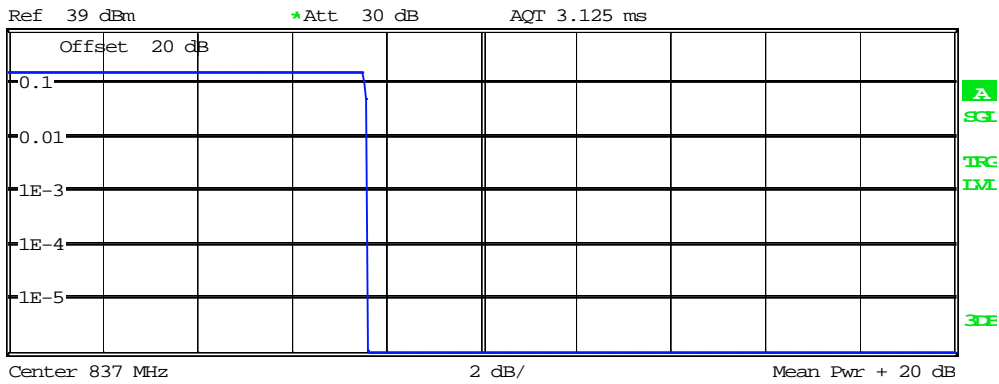

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 23.68 dBm

Peak 31.30 dBm

Crest 7.62 dB

10 % 7.56 dB

1 % 7.64 dB

.1 % 7.64 dB

.01 % 7.64 dB

Date: 13.JAN.2014 15:46:05

Peak-to-Average Ratio – EDGE Mode (GSM850 Band)

RBW 10 MHz



Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 18.24 dBm

Peak 28.90 dBm

Crest 10.66 dB

10 % 7.04 dB

1 % 10.16 dB


.1 % 10.60 dB

.01 % 10.68 dB

Date: 13.JAN.2014 15:44:23

Peak-to-Average Ratio – GPRS Mode (GSM1900 Band)

RBW 10 MHz

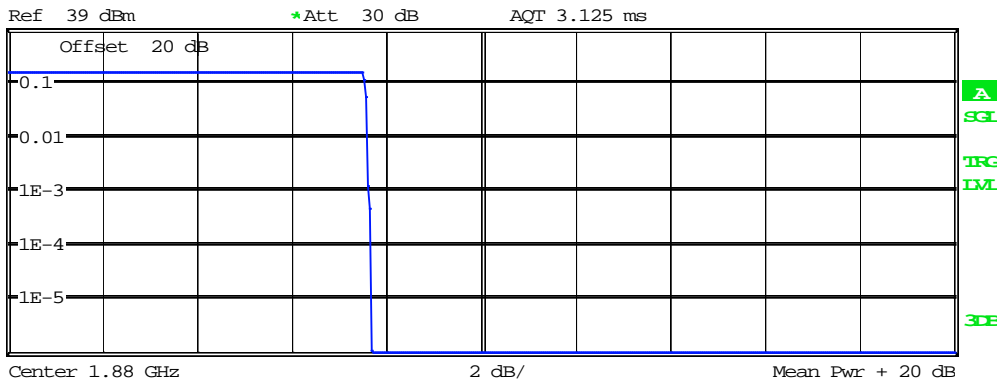

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 19.52 dBm

Peak 27.21 dBm

Crest 7.69 dB

10 % 7.56 dB

1 % 7.64 dB


.1 % 7.64 dB

.01 % 7.72 dB

Date: 13.JAN.2014 15:58:18

Peak-to-Average Ratio – EDGE Mode (GSM1900 Band)

RBW 10 MHz

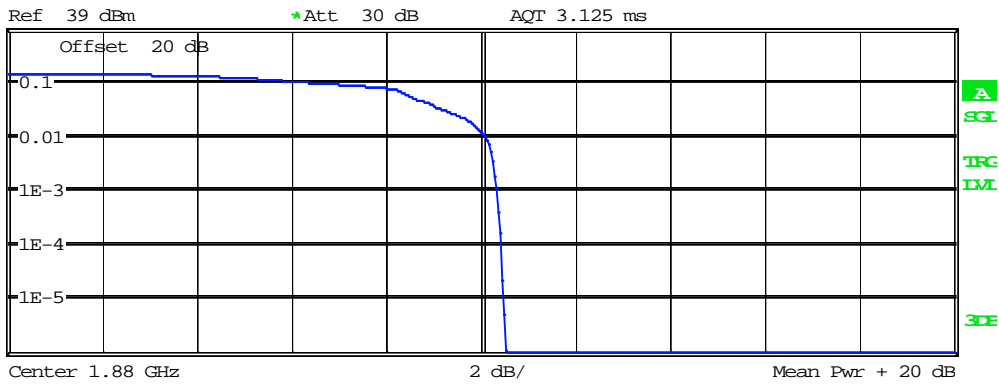

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 16.49 dBm

Peak 27.00 dBm

Crest 10.51 dB

10 % 7.28 dB

1 % 10.12 dB


.1 % 10.36 dB

.01 % 10.44 dB

Date: 13.JAN.2014 15:59:33

Peak-to-Average Ratio – WCDMA Band V

RBW 10 MHz

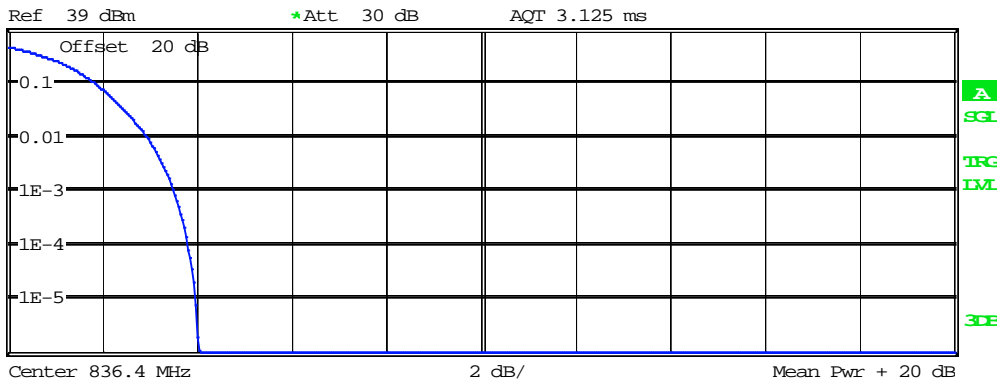

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 21.05 dBm

Peak 25.09 dBm

Crest 4.05 dB

10 % 1.88 dB

1 % 2.96 dB


.1 % 3.52 dB

.01 % 3.84 dB

Date: 13.JAN.2014 15:55:31

Peak-to-Average Ratio – WCDMA Band II

RBW 10 MHz

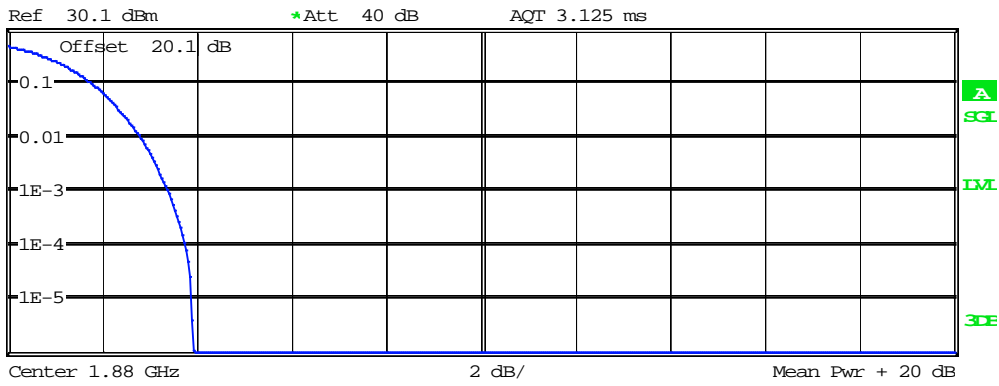

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 20.62 dBm

Peak 24.54 dBm

Crest 3.92 dB

10 % 1.80 dB

1 % 2.84 dB

.1 % 3.40 dB

.01 % 3.76 dB

Date: 9.JAN.2014 11:40:48

5 Occupied Bandwidth

5.1 Test Limits

§2.1049:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

5.2 Test Procedure


The EUT was connected to a spectrum analyzer using a coaxial cable and power divider. The EUT was placed into a call using base station simulator. The base station simulator was set to force the EUT to its maximum power setting. The occupied bandwidth function of the analyzer was used to automatically generate the occupied bandwidth plots below. A peak detector was used for this measurement.

5.3 Test Equipment Used:

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
Base Station Simulator	3917	Rohde&Schwarz	CMW500	9/26/2013	9/26/2014
Spectrum Analyzer	3099	Rohde & Schwarz	FSP7	9/12/2013	9/12/2014
Directional Coupler	08736	Narda	4226-20	Time of Use	Time of Use


5.4 Results:

GSM 850 Band, Mid Channel – GPRS

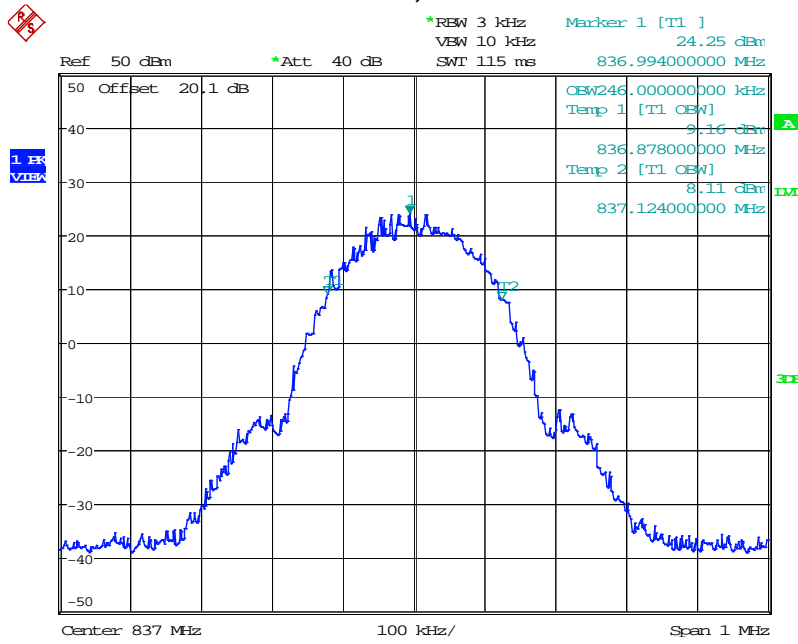


Date: 9.JAN.2014 13:49:41

GSM 1900 Band, Mid Channel – GPRS

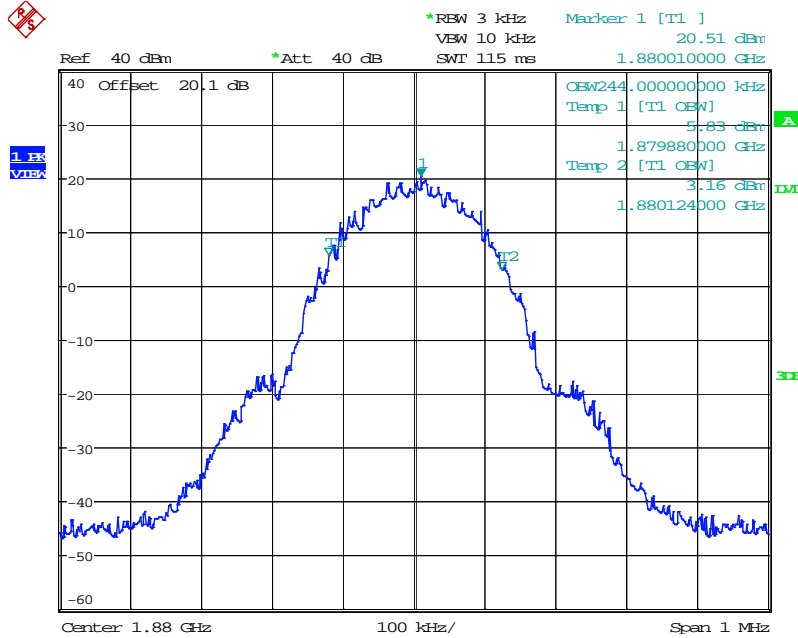


Date: 9.JAN.2014 13:55:54

GSM 850 Band, Mid Channel – EDGE

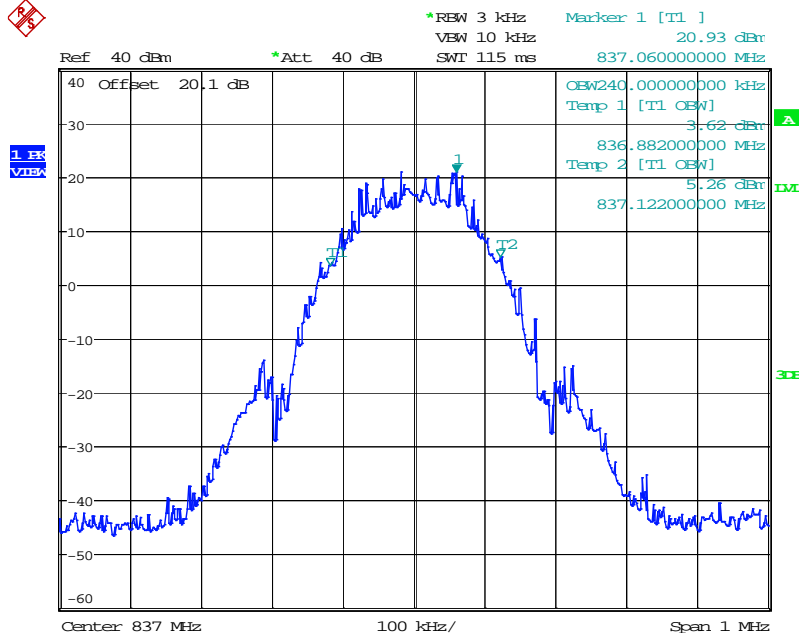


Date: 9.JAN.2014 13:51:58

GSM 1900 Band, Mid Channel – EDGE

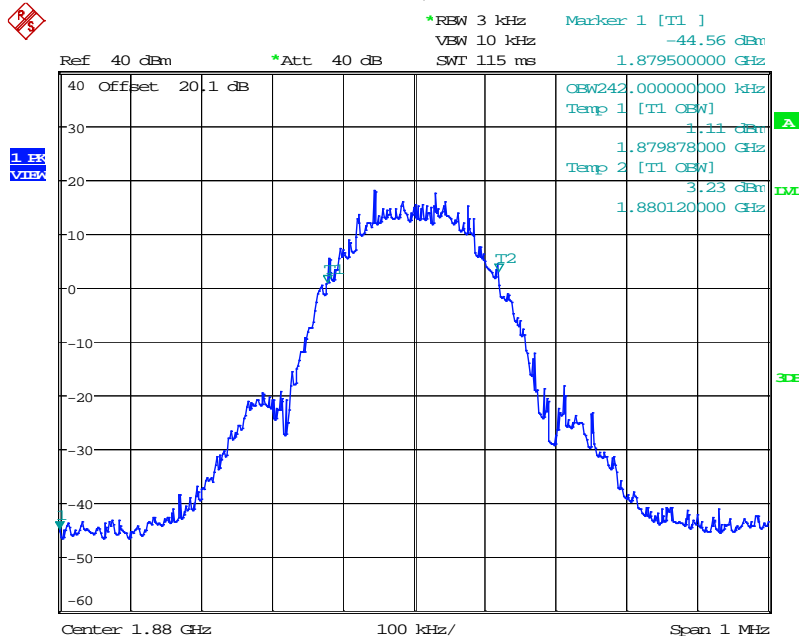


Date: 9.JAN.2014 13:54:56

WCDMA Band V, Mid Channel

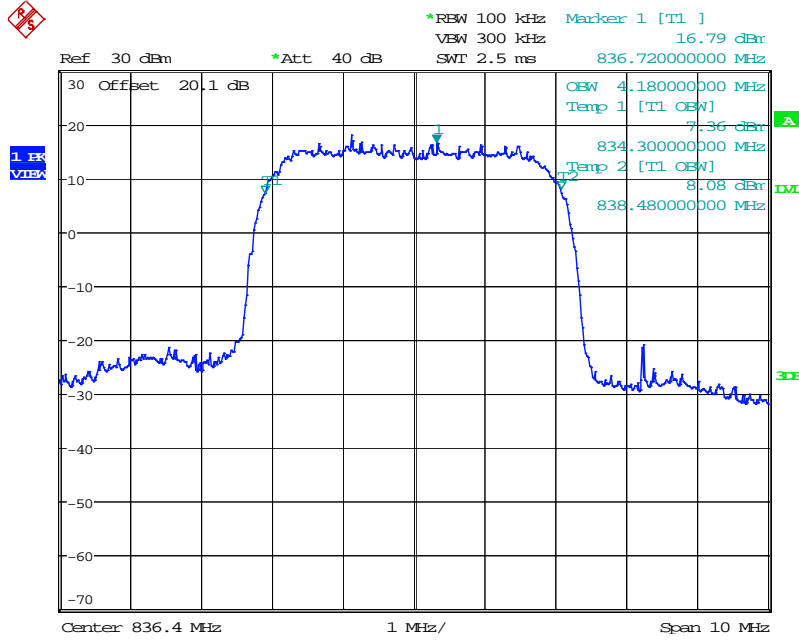

Date: 9.JAN.2014 13:45:21

WCDMA Band II, Mid Channel

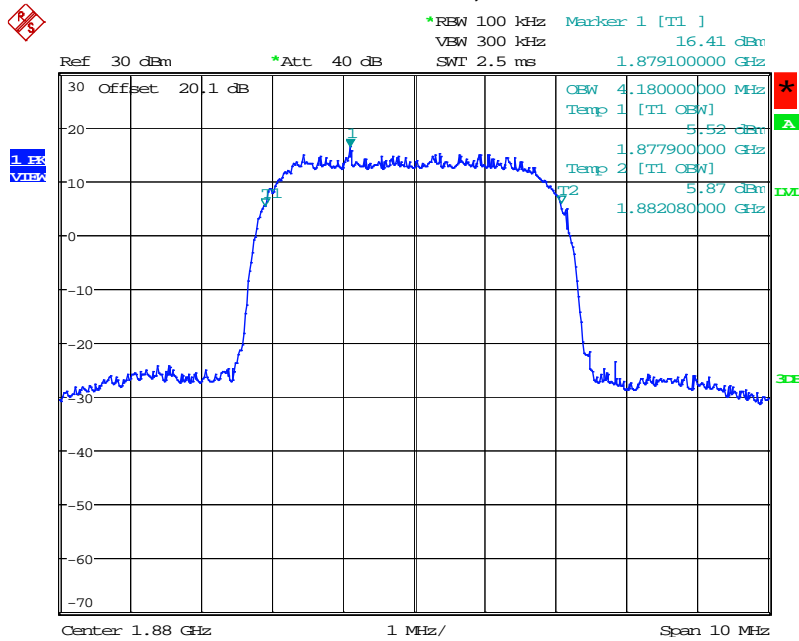

Date: 9.JAN.2014 13:44:22

6 Conducted Spurious Emissions at Antenna Terminals

6.1 Test Limits

§ 2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

- (h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

§ 2.1051

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 22.917

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

§ 24.238

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

6.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The base station simulator was set to force the EUT to its maximum power setting. The resolution bandwidth of the spectrum analyzer was set at 100kHz or 1MHz depending on the transmit band and the detector was set to peak detection for general scans up to the 10th harmonic. Emissions scans near the fundamental were measured using an RMS detector. Sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.



6.3 Test Equipment Used:

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
Base Station Simulator	3917	Rohde&Schwarz	CMW500	9/26/2013	9/26/2014
Spectrum Analyzer	3720	Rohde & Schwarz	FSEK 30	9/10/2013	9/10/2014
Multimeter/Temp Meter	3400	Fluke	289	5/29/2013	5/29/2014
Spectrum Analyzer	3099	Rohde & Schwarz	FSP7	9/12/2013	9/12/2014
Directional Coupler	08736	Narda	4226-20	Time of Use	Time of Use

6.4 Results:



The following plots show that all spurious emissions are attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. Plots for emissions within 1MHz of the band edge as well as for emission outside of this range are shown.

GSM 850 Band - Low Channel - GPRS

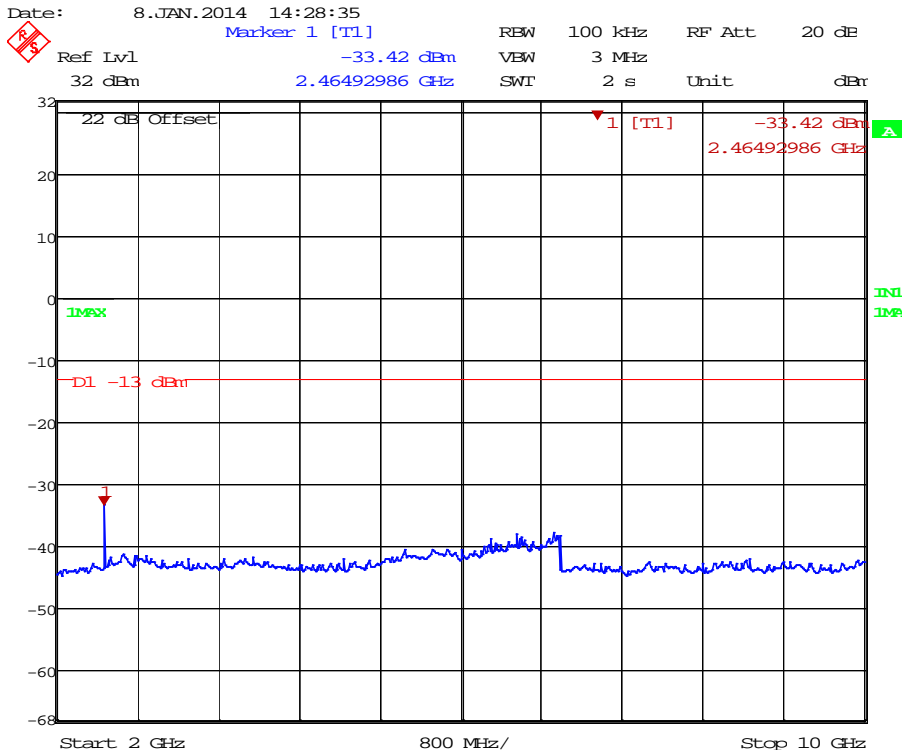
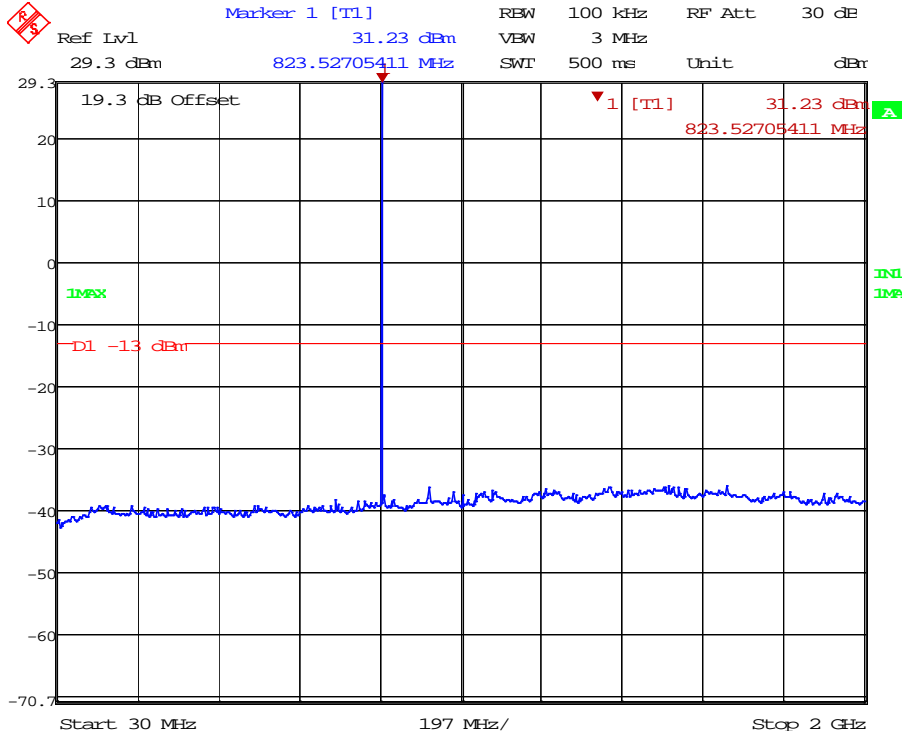


Date: 8.JAN.2014 15:03:35



GSM 850 Band – Mid Channel – GPRS

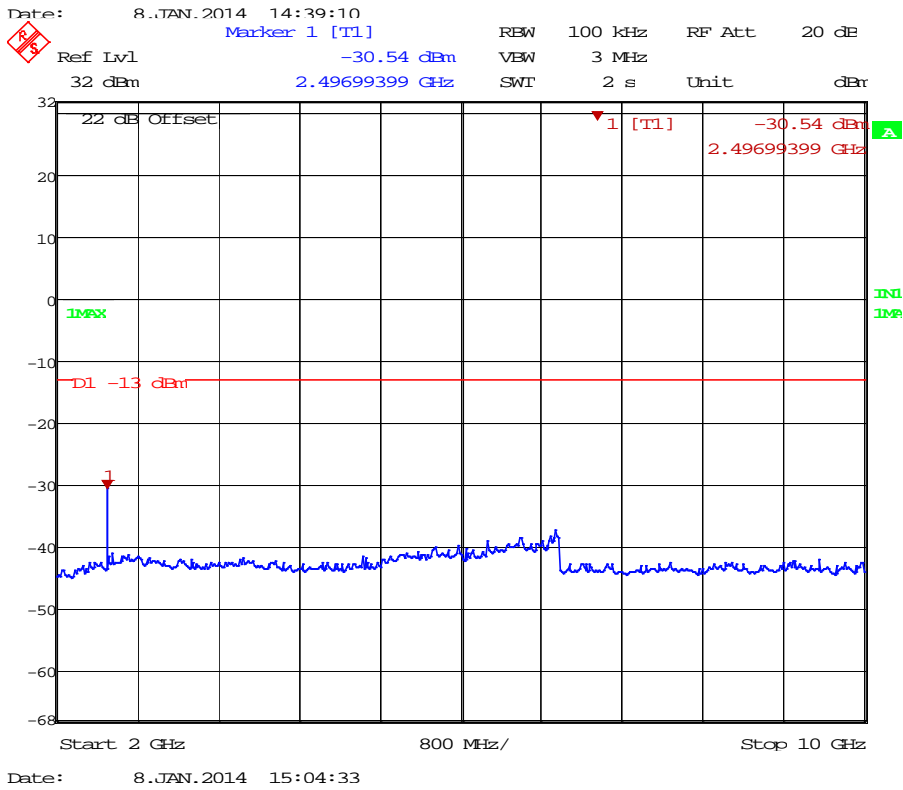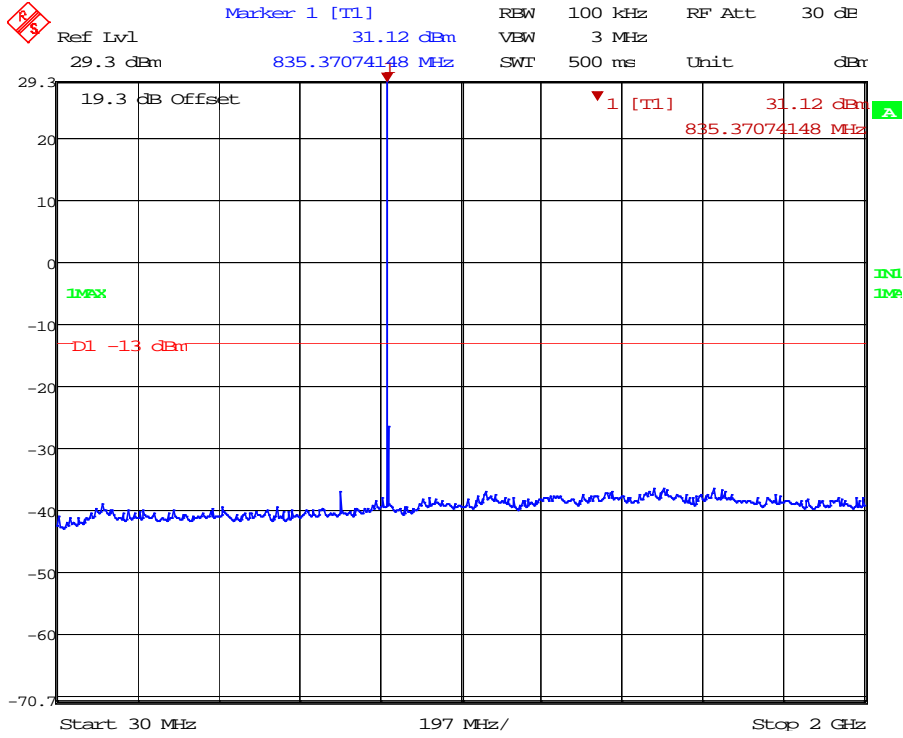



GSM 850 Band - High Channel - GPRS

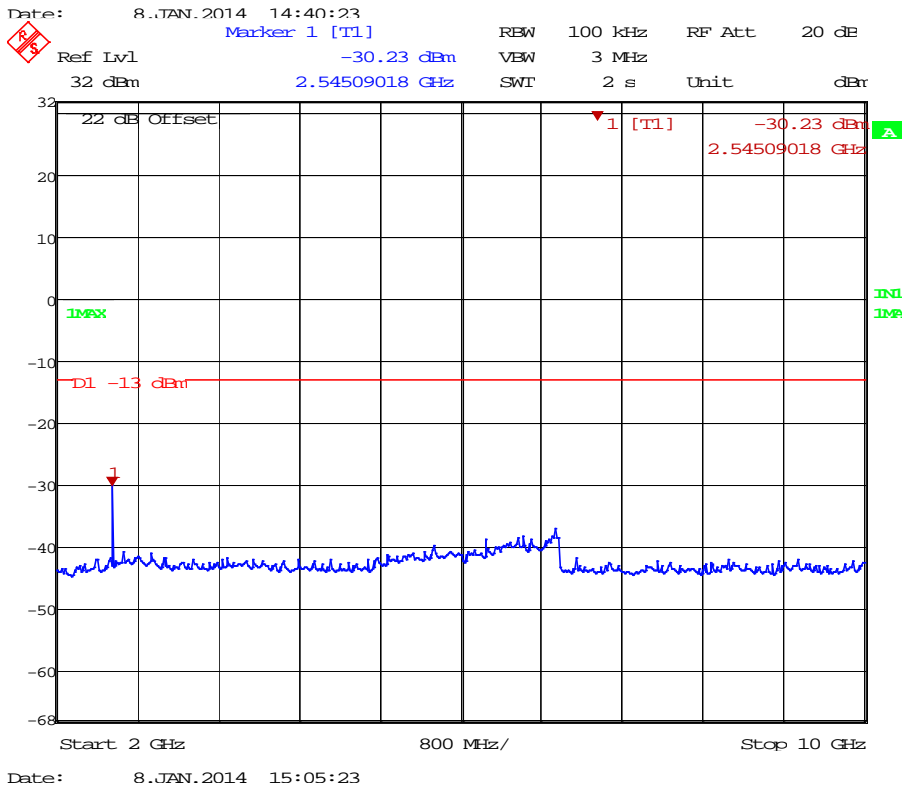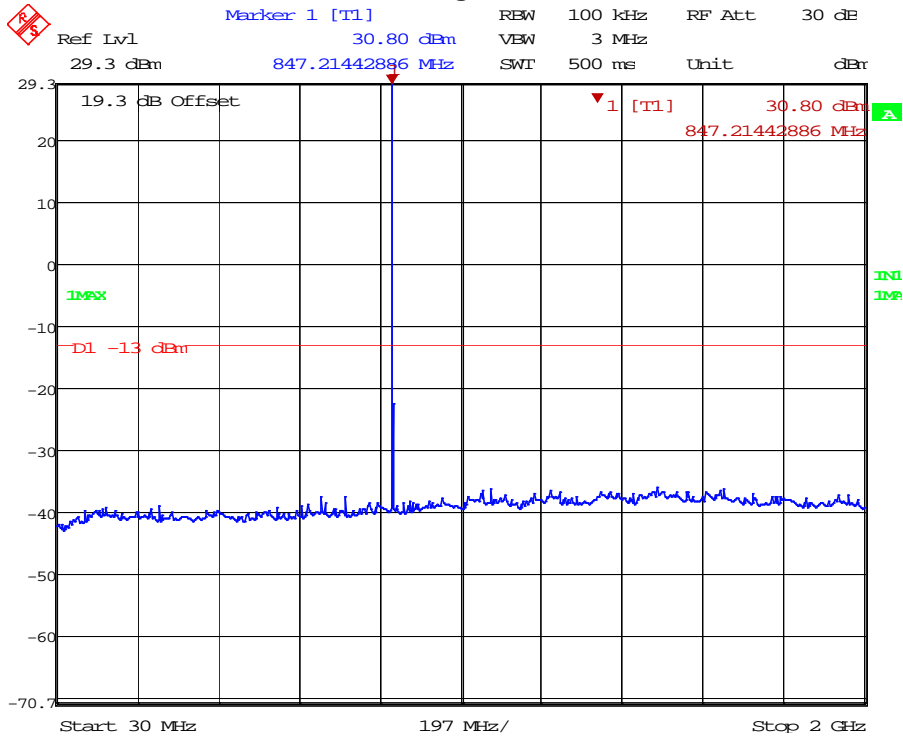

GSM 1900 Band - Low Channel - GPRS

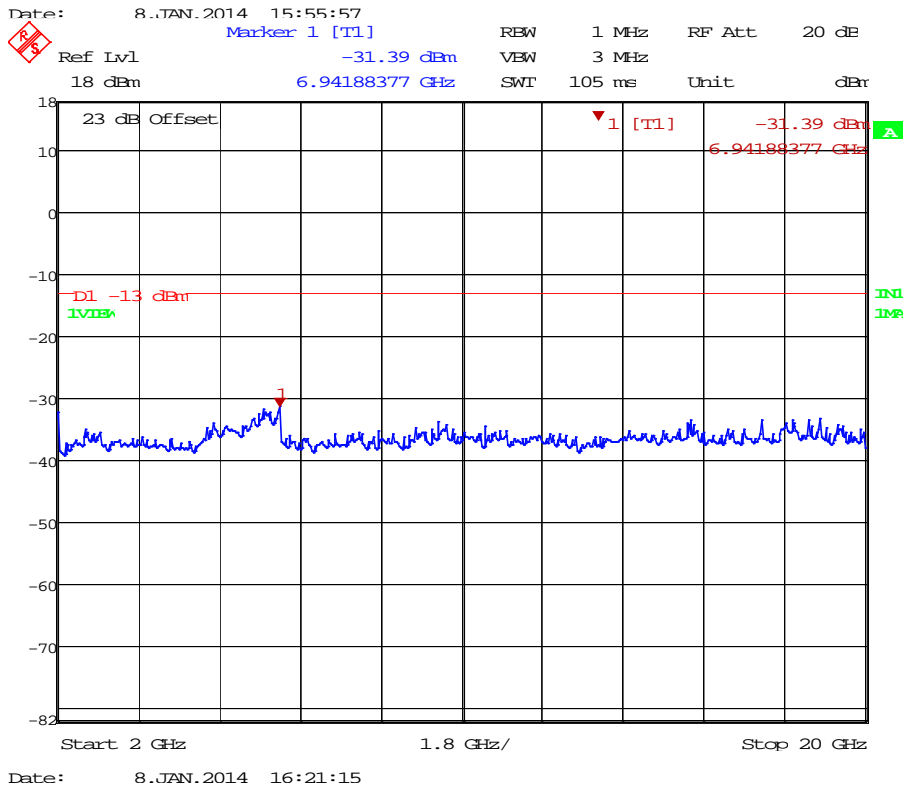
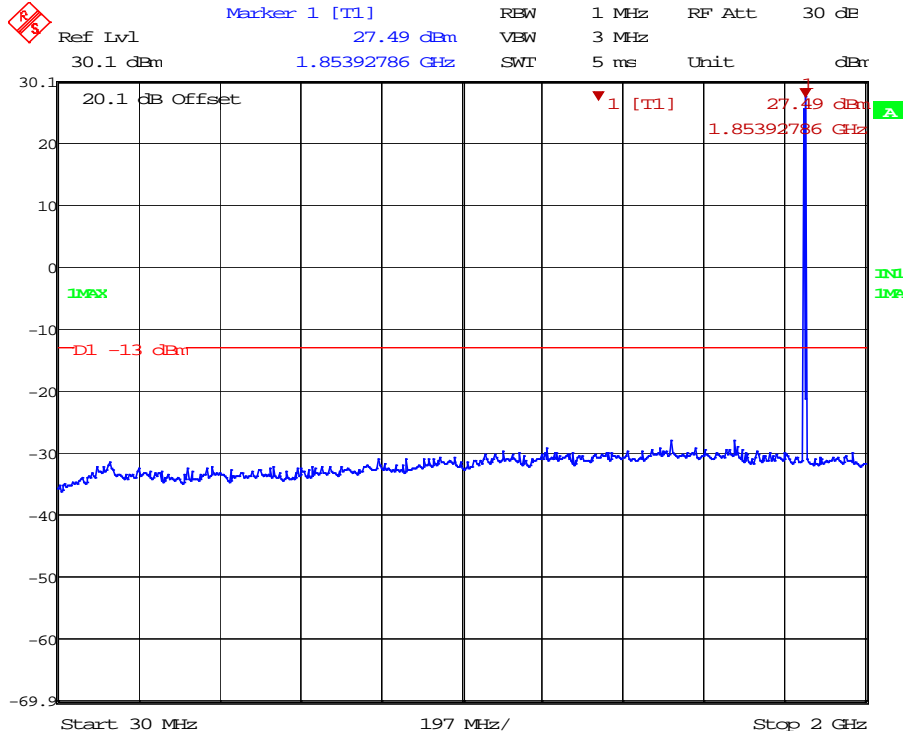


GSM 1900 Band – Mid Channel – GPRS

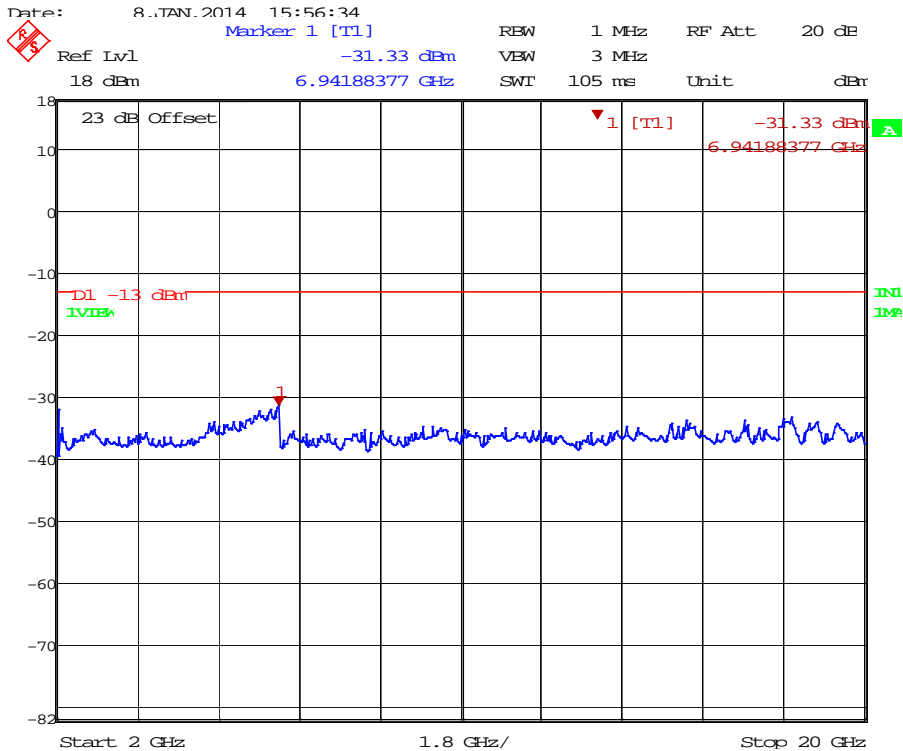
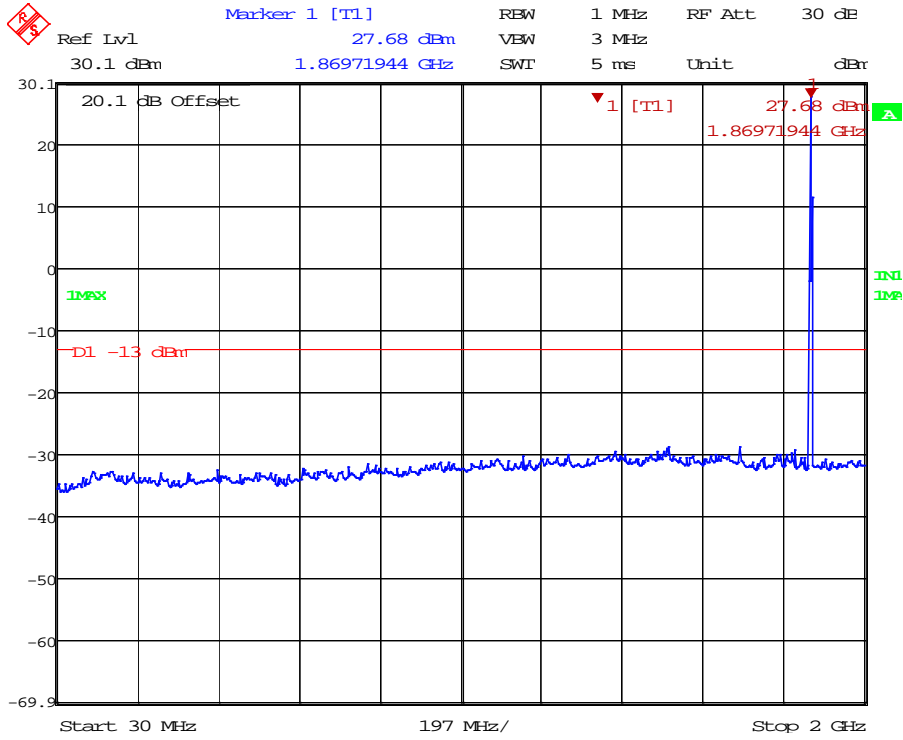


Date: 8.JAN.2014 16:21:48



GSM 1900 Band - High Channel - GPRS

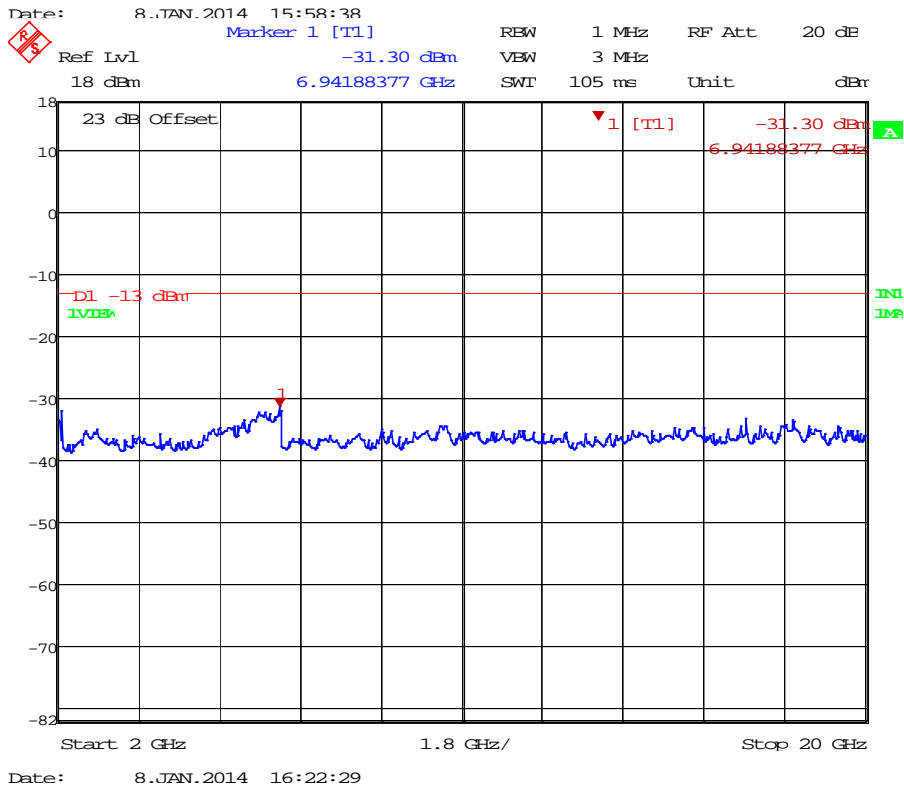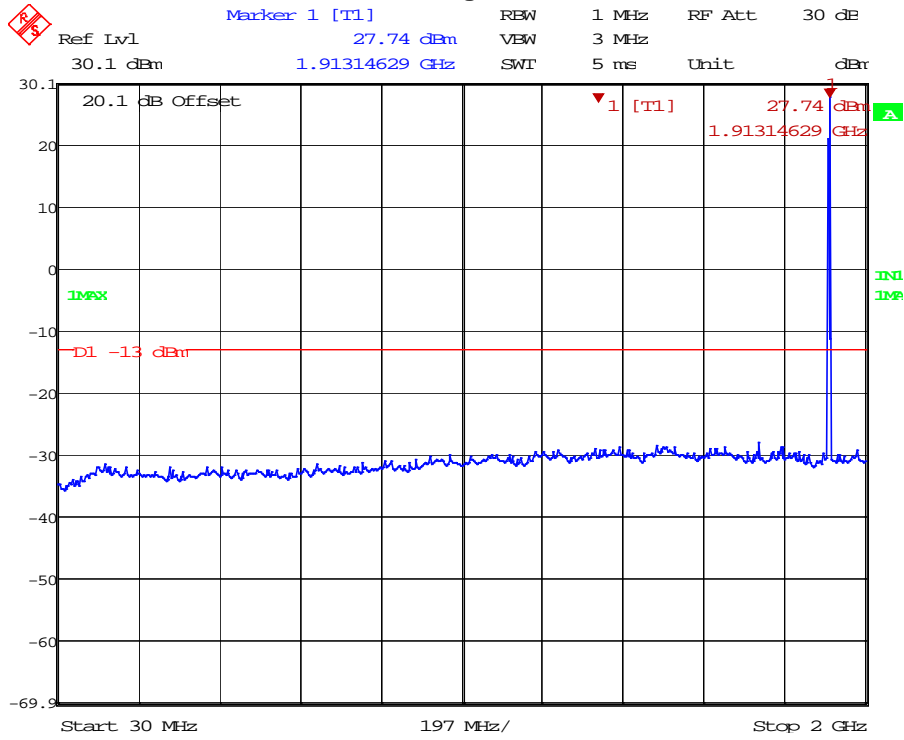



GSM 850 Band - Low Channel - EDGE

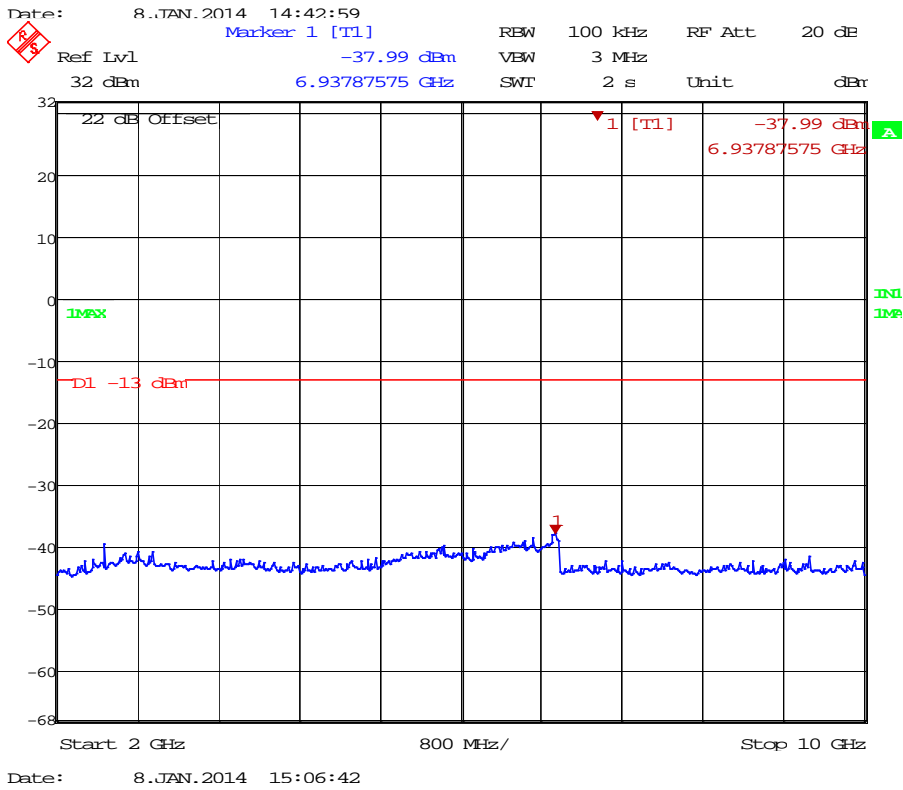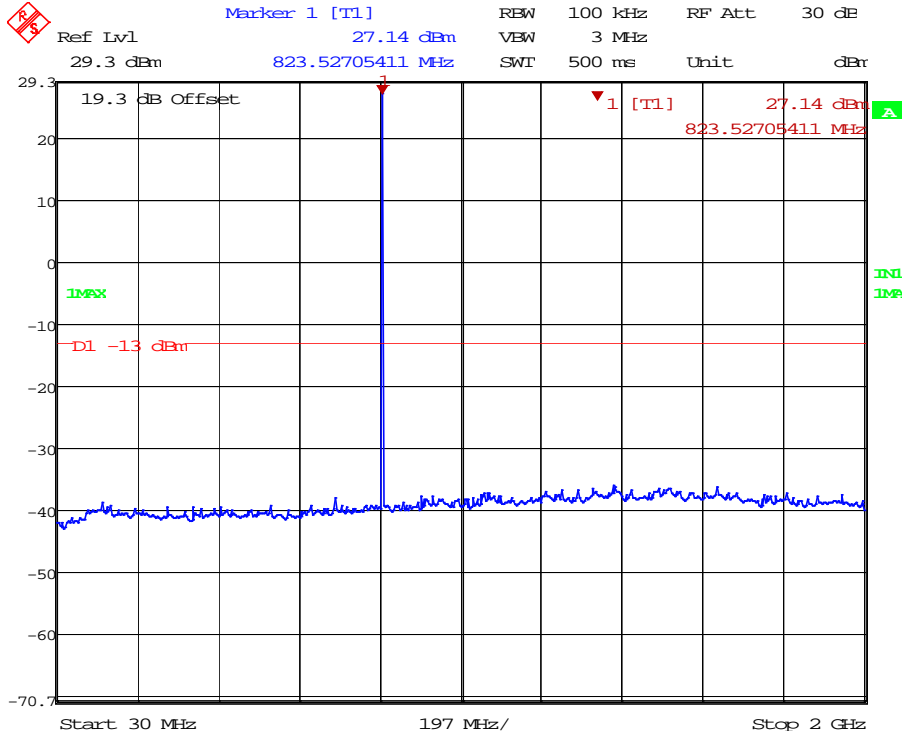

GSM 850 Band – Mid Channel – EDGE

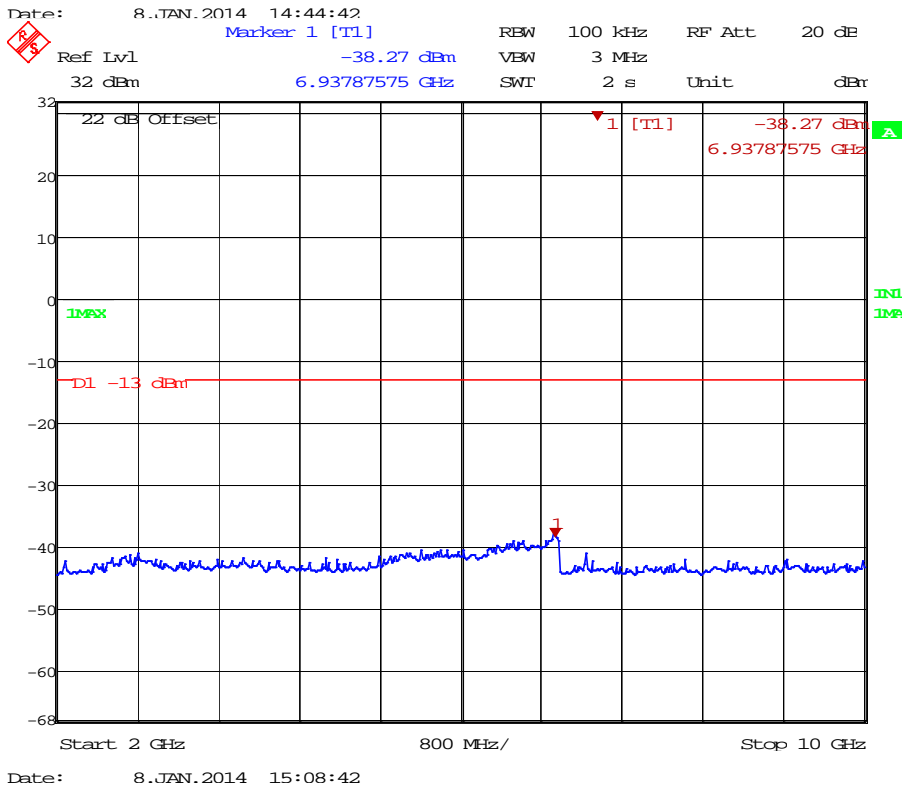
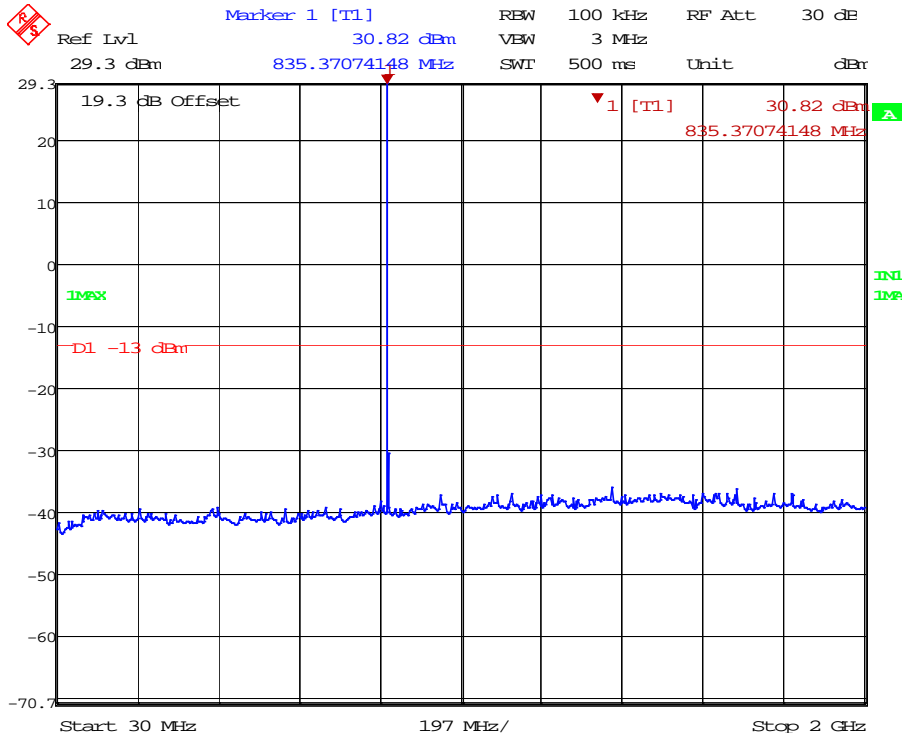


GSM 850 Band - High Channel - EDGE

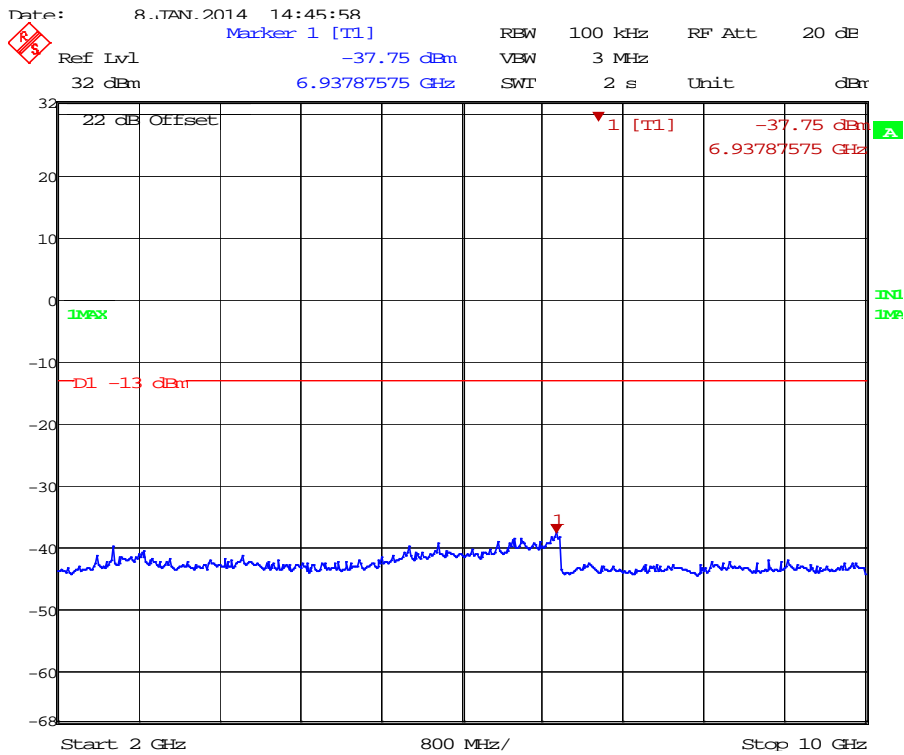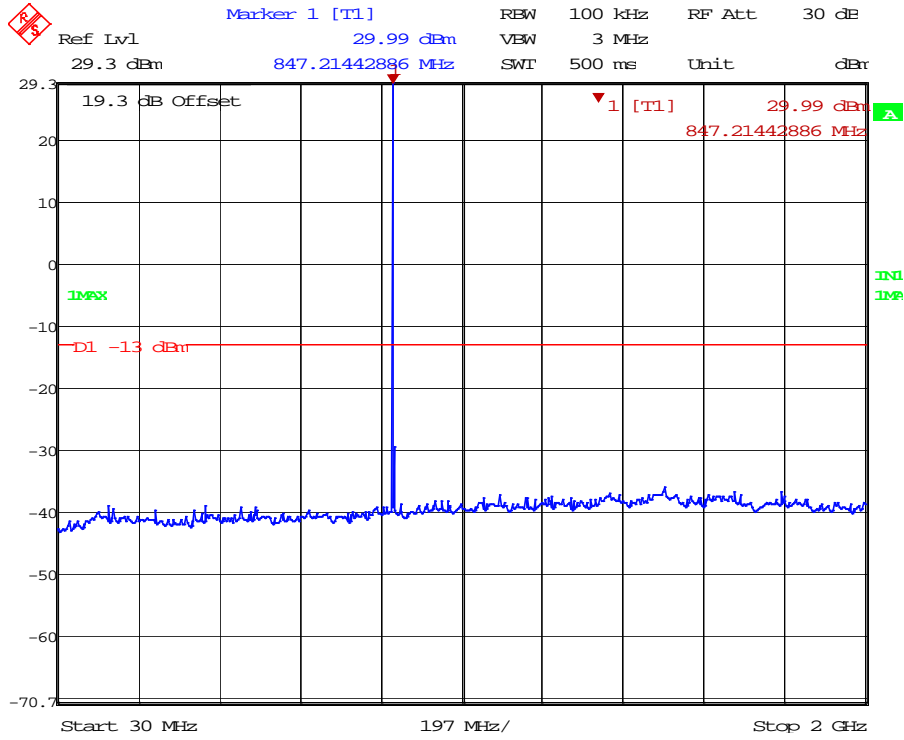


Date: 8.JAN.2014 15:10:11

GSM 1900 Band - Low Channel - EDGE

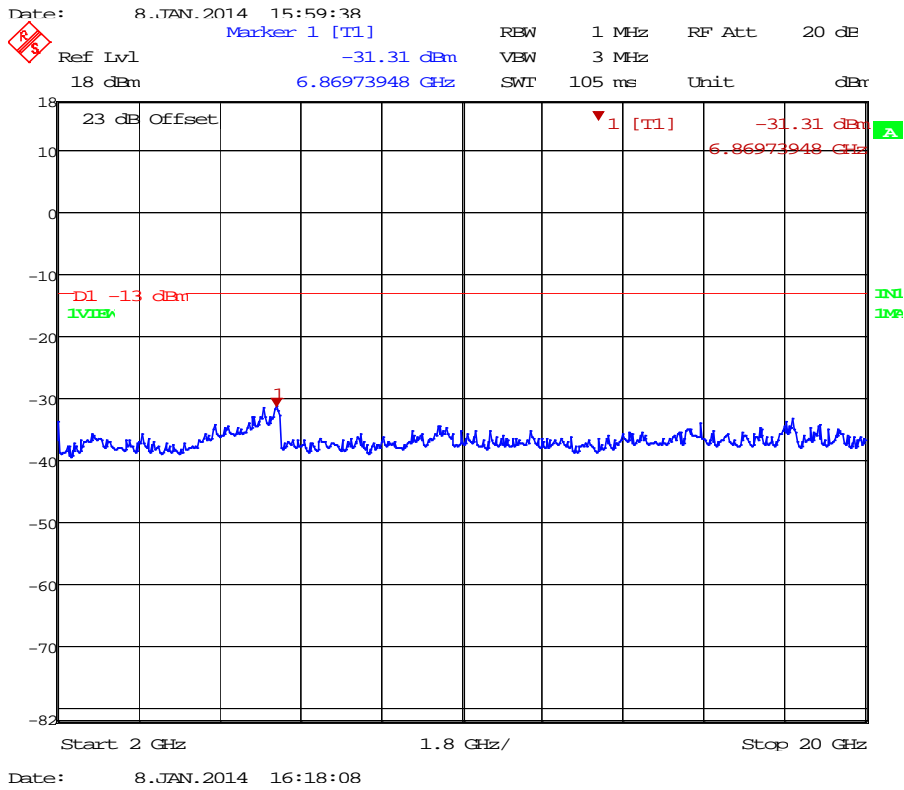
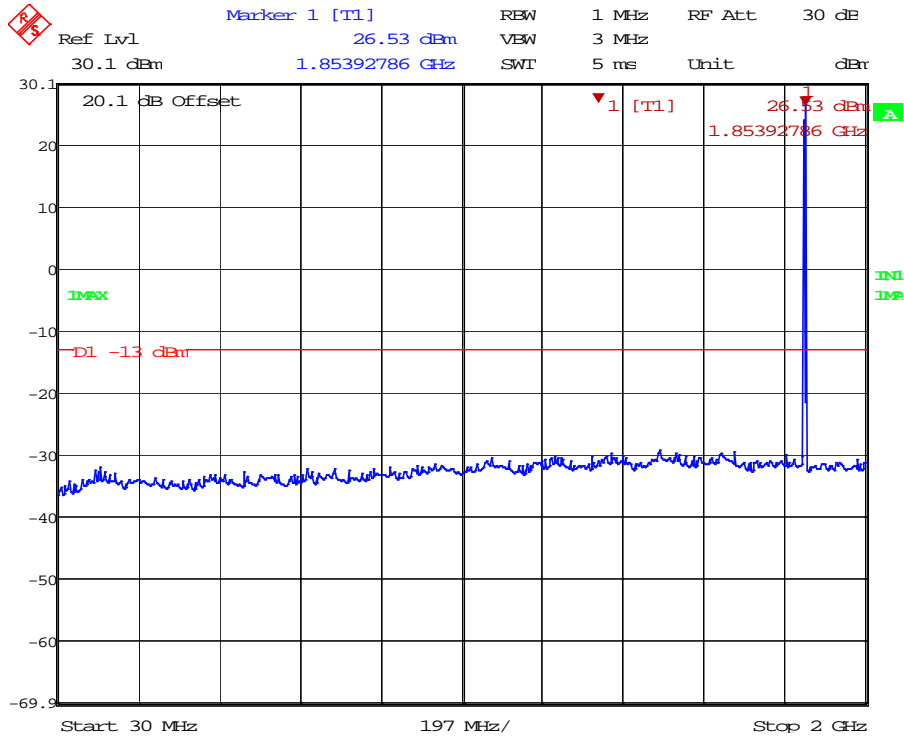


GSM 1900 Band – Mid Channel – EDGE


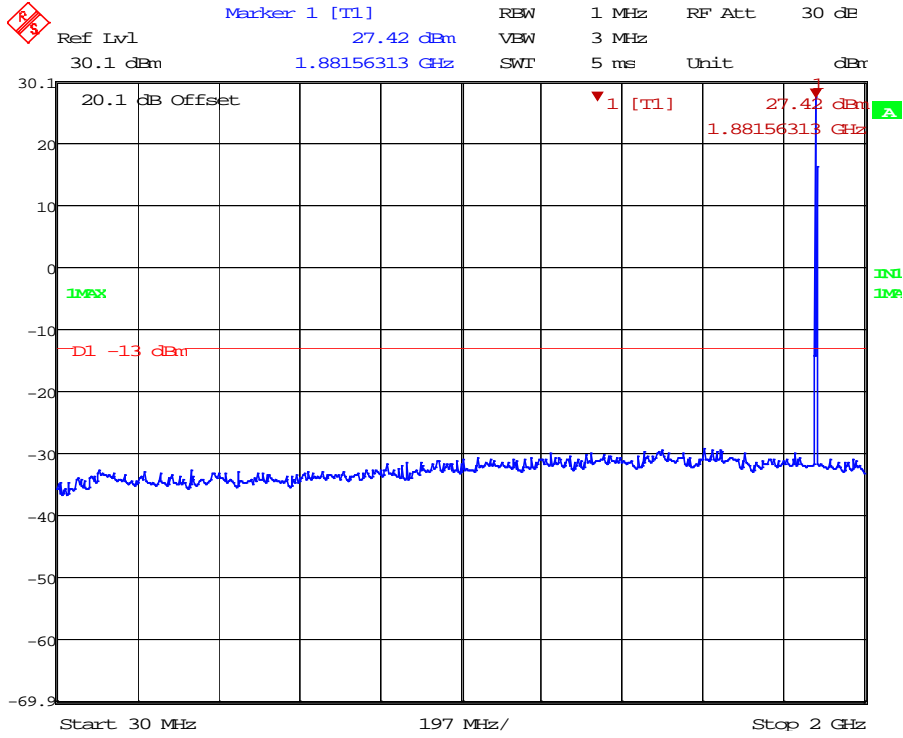


Date: 8.JAN.2014 16:18:47

GSM 1900 Band - High Channel - EDGE

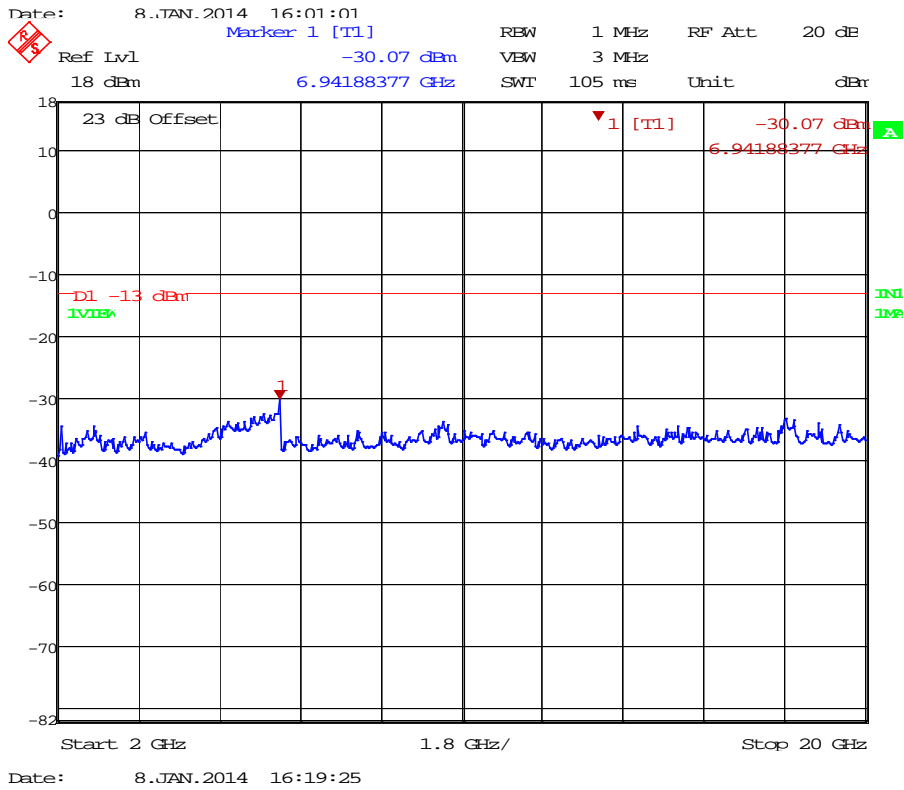
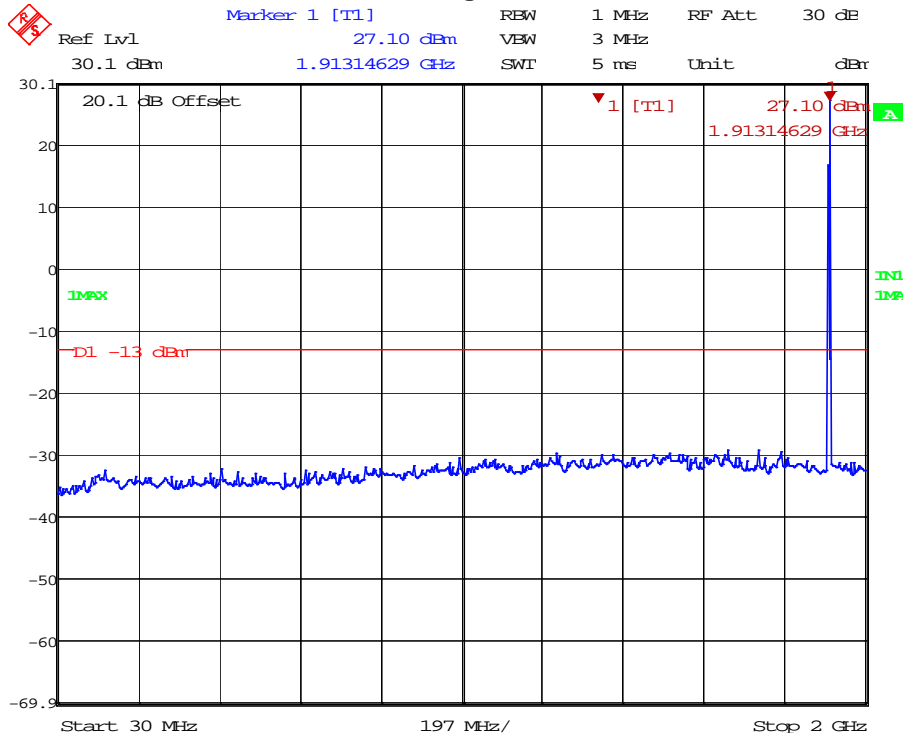


WCDMA Band V - Low Channel

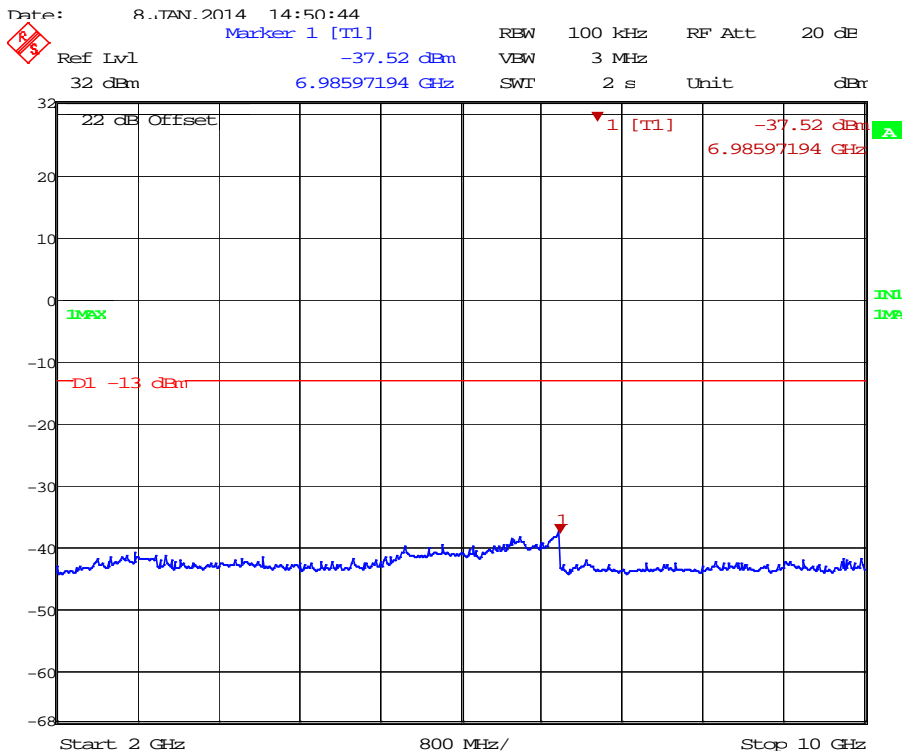
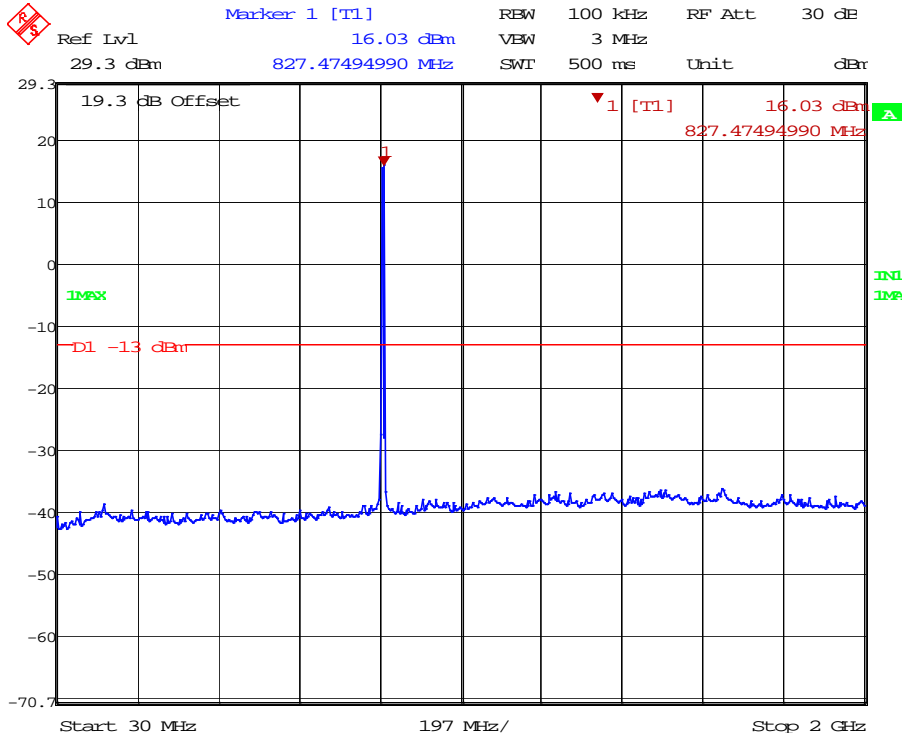


Date: 8.JAN.2014 14:59:03

WCDMA Band V - Mid Channel

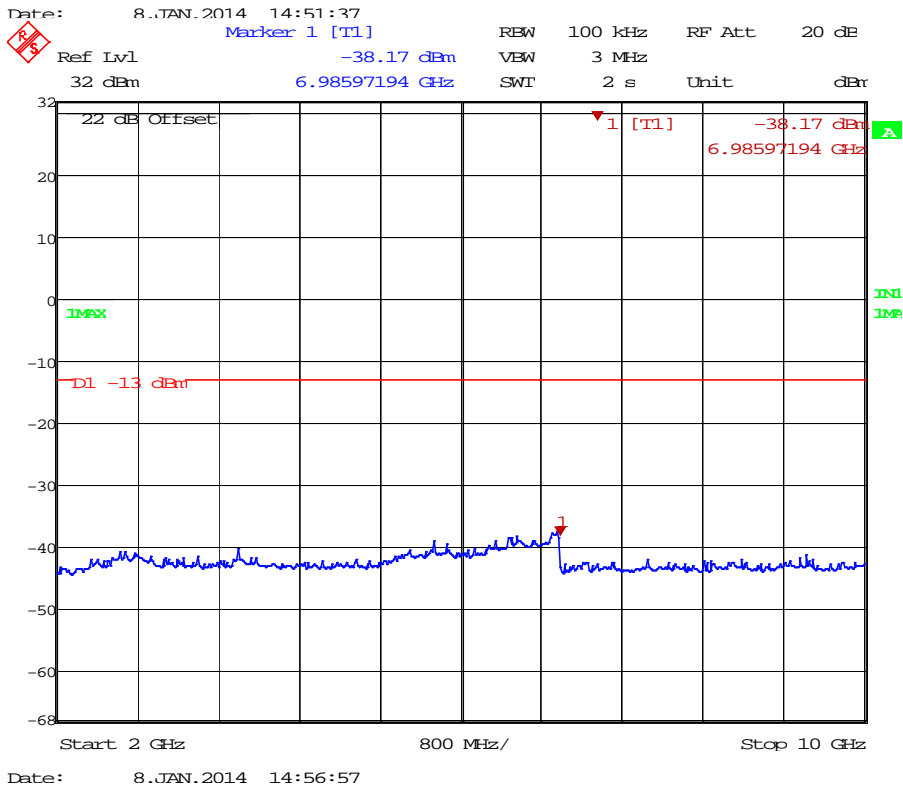
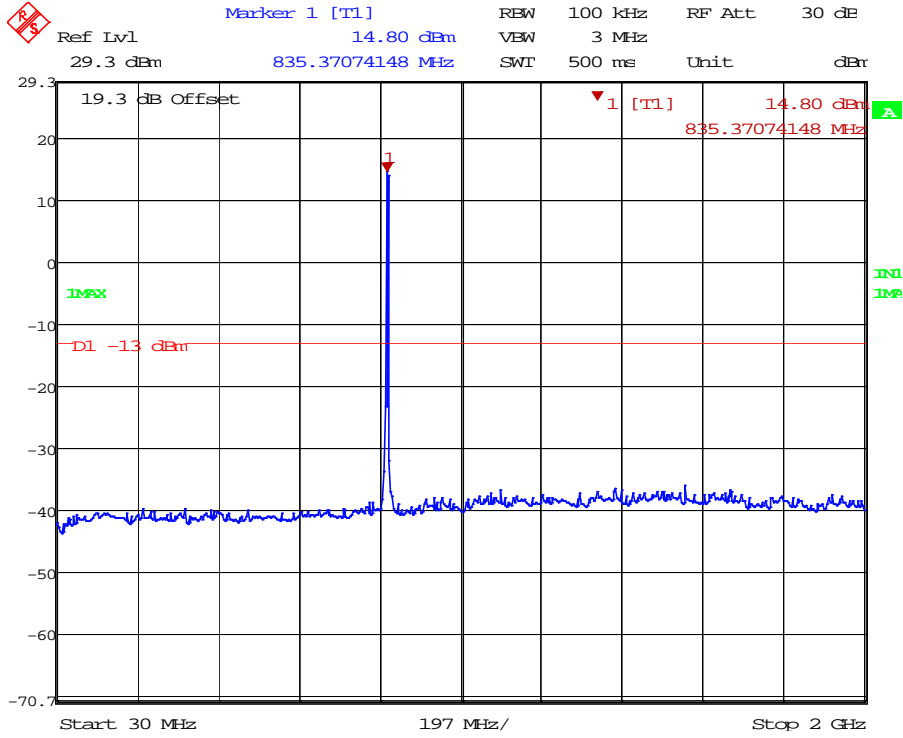


WCDMA Band V - High Channel

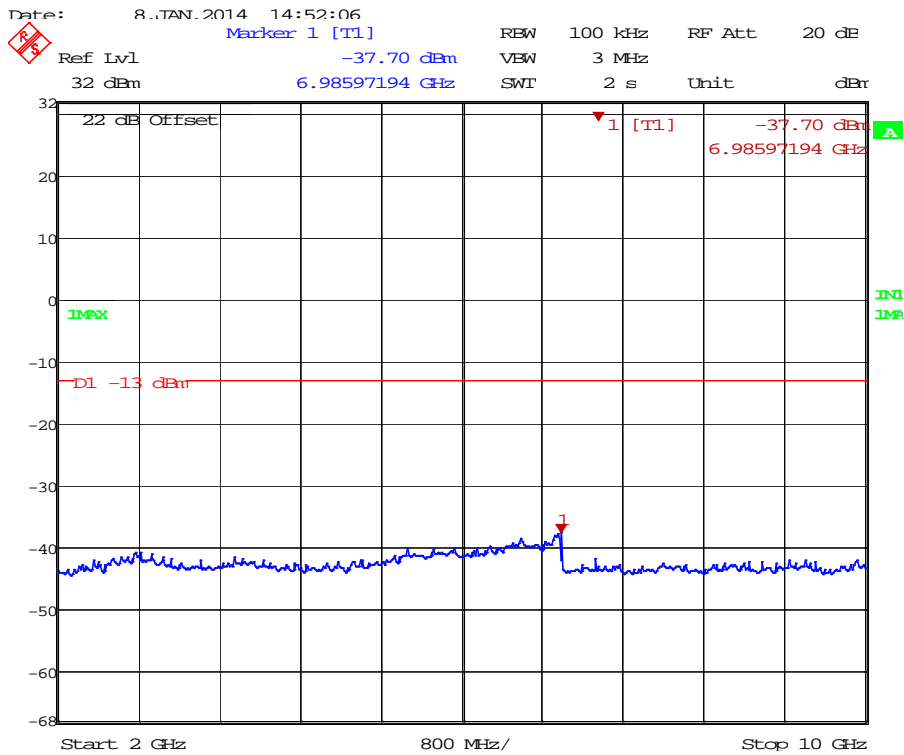
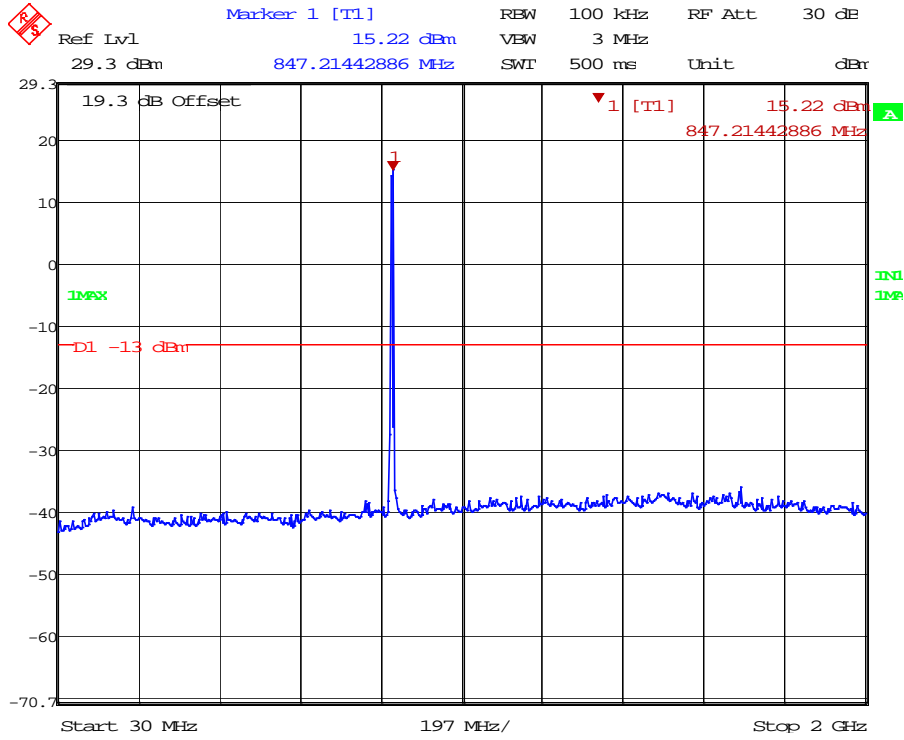


Date: 8.JAN.2014 14:55:15

WCDMA Band II - Low Channel

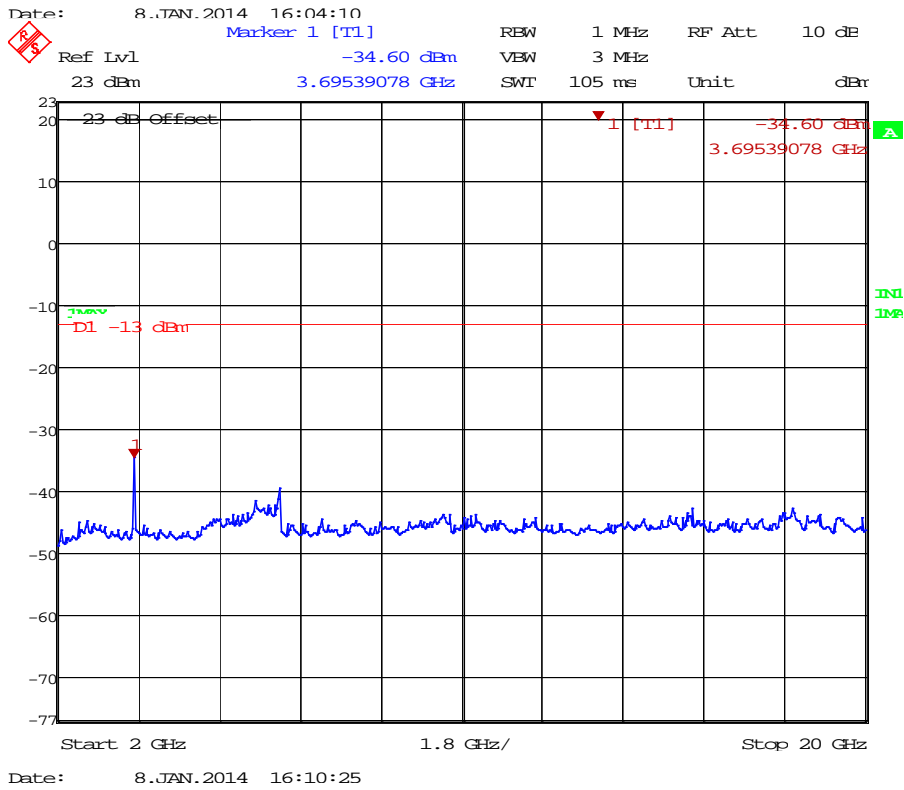
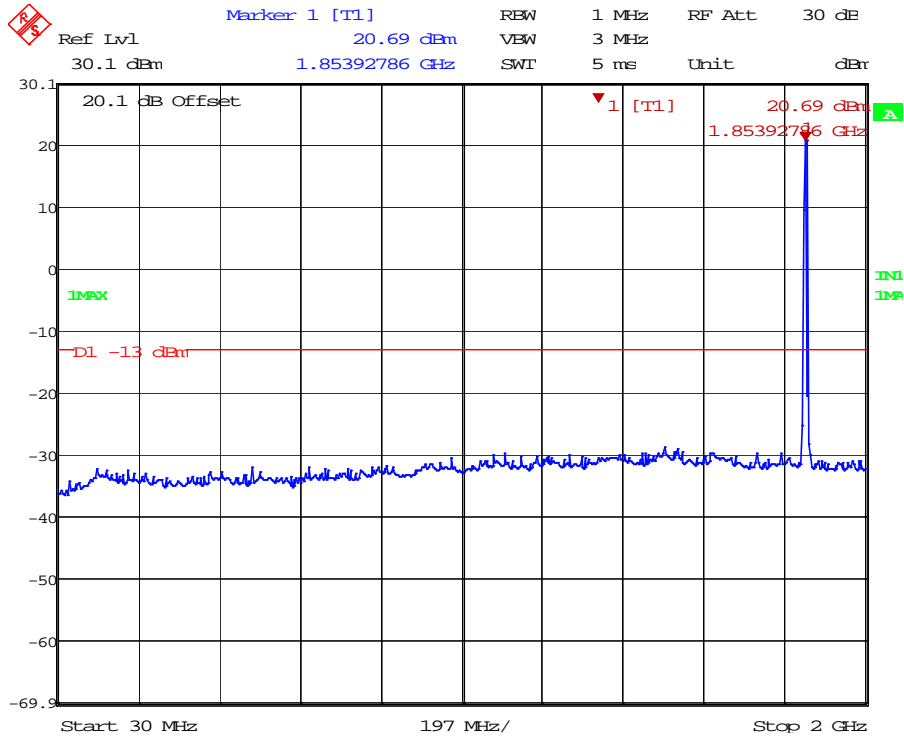


WCDMA Band II - Mid Channel

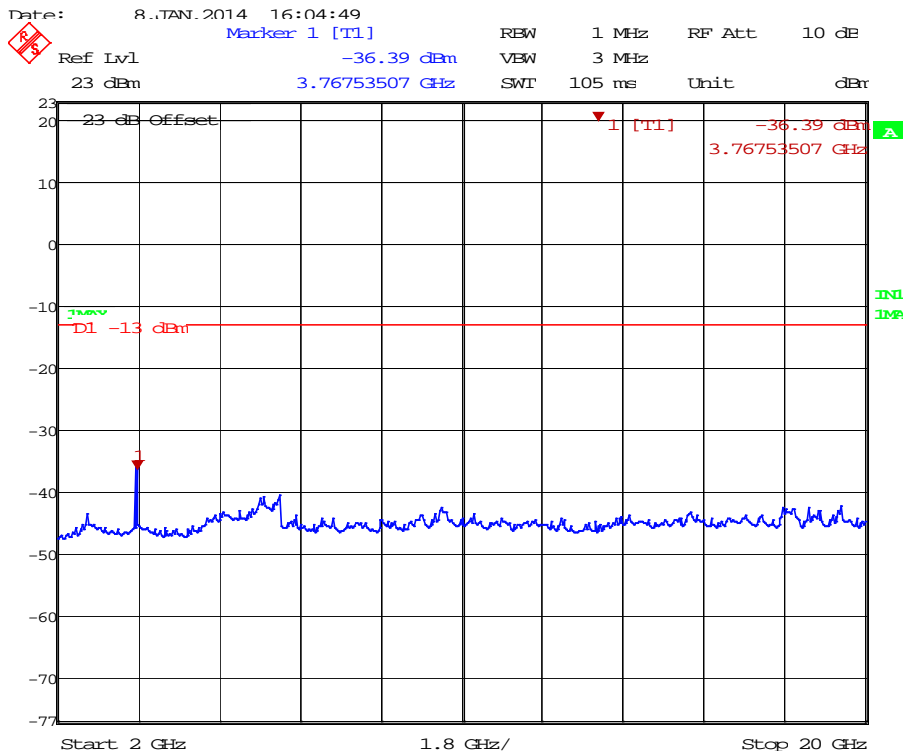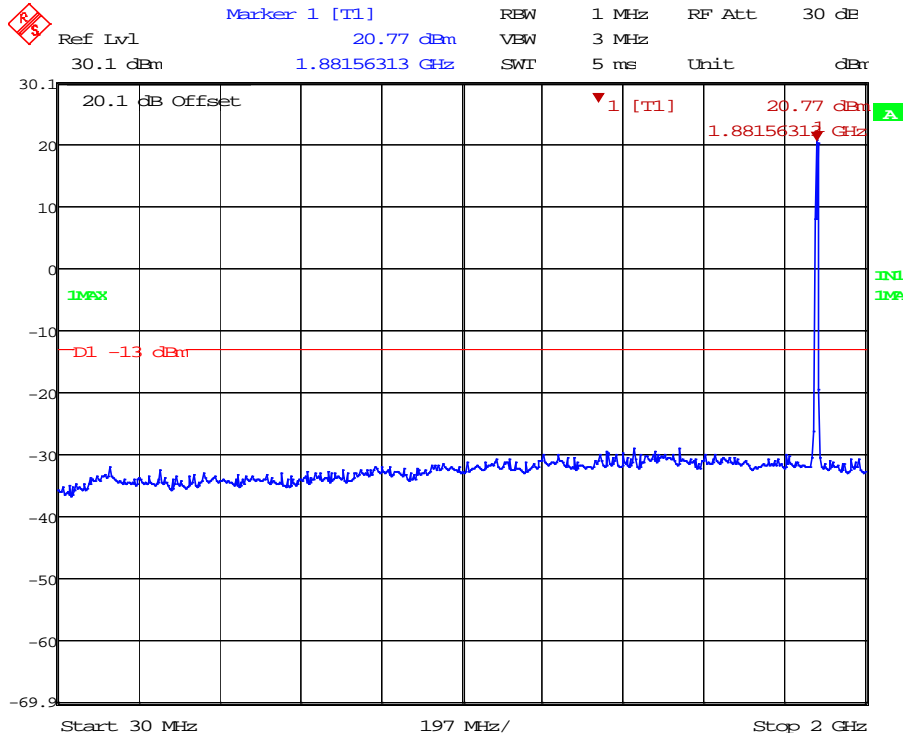


Date: 8.JAN.2014 16:09:32

WCDMA Band II - High Channel

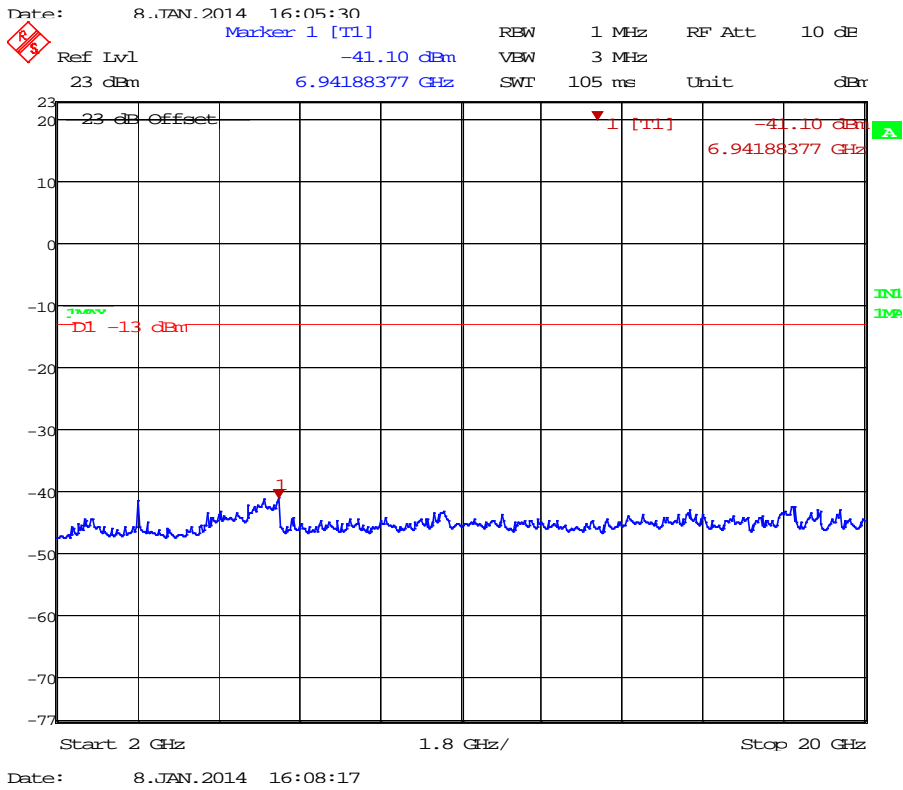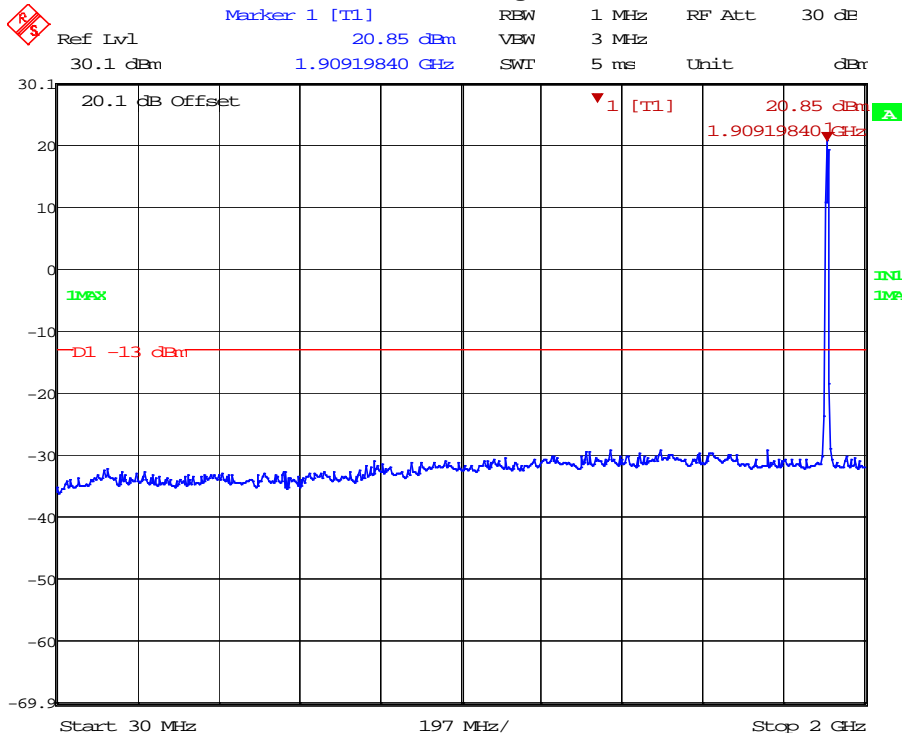


Emissions within 1MHz of the band edge:

GSM 850 Band – Low Channel – GPRS

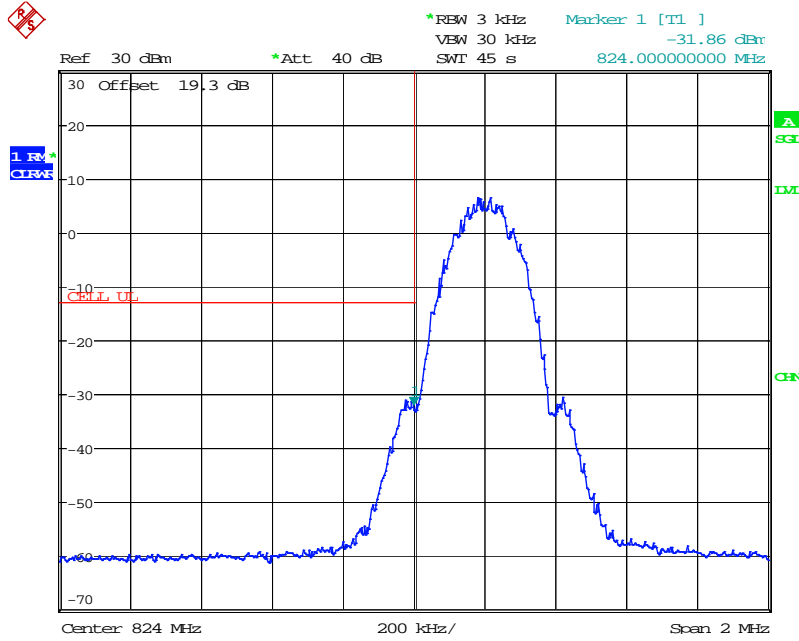


Date: 9.JAN.2014 14:02:12

GSM 850 Band – High Channel – GPRS

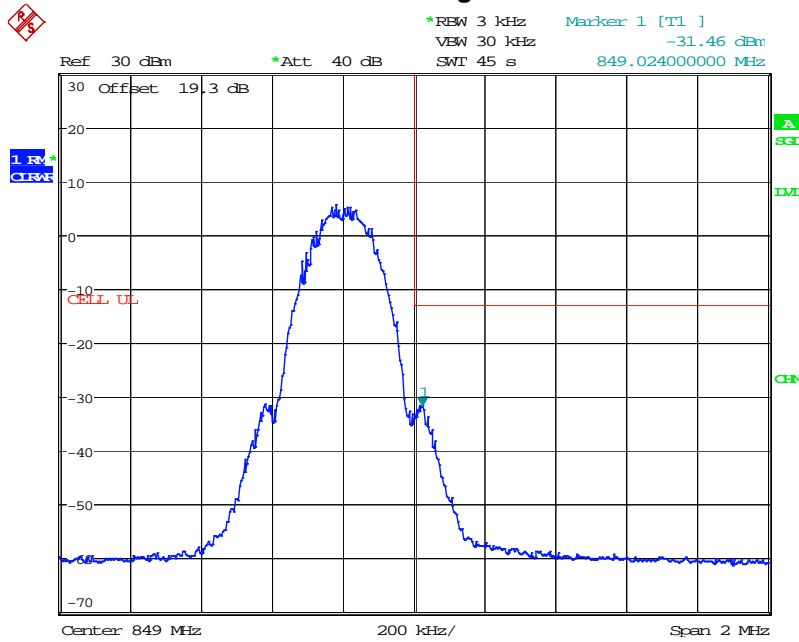


Date: 9.JAN.2014 14:03:32

GSM 1900 Band – Low Channel - GPRS

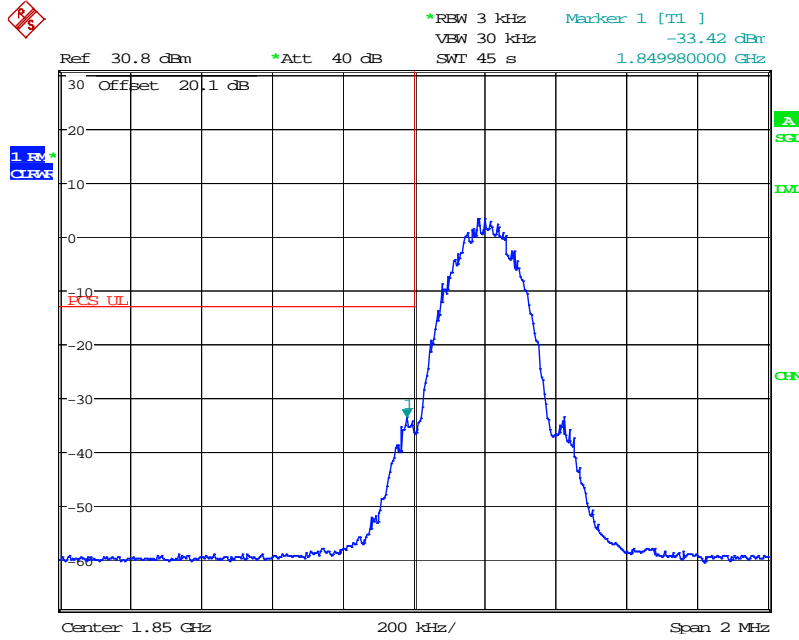


Date: 9.JAN.2014 14:57:23

GSM 1900 Band – High Channel – GPRS

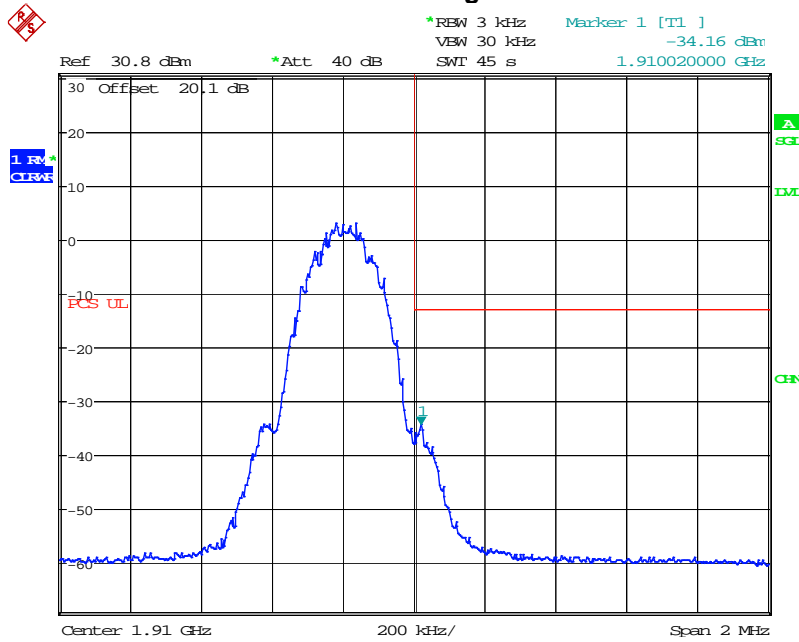


Date: 9.JAN.2014 14:58:51

GSM 850 Band – Low Channel – EDGE

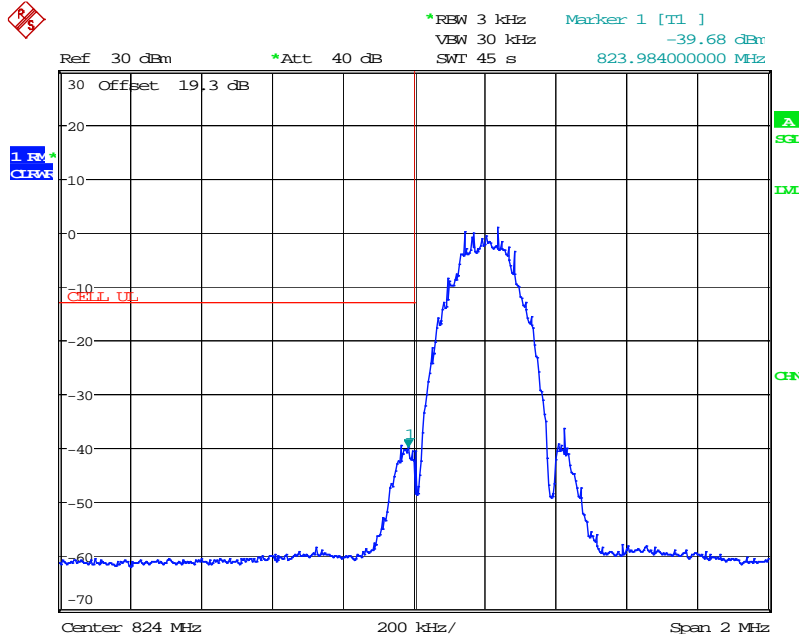


Date: 9.JAN.2014 14:07:49

GSM 850 Band – High Channel - EDGE

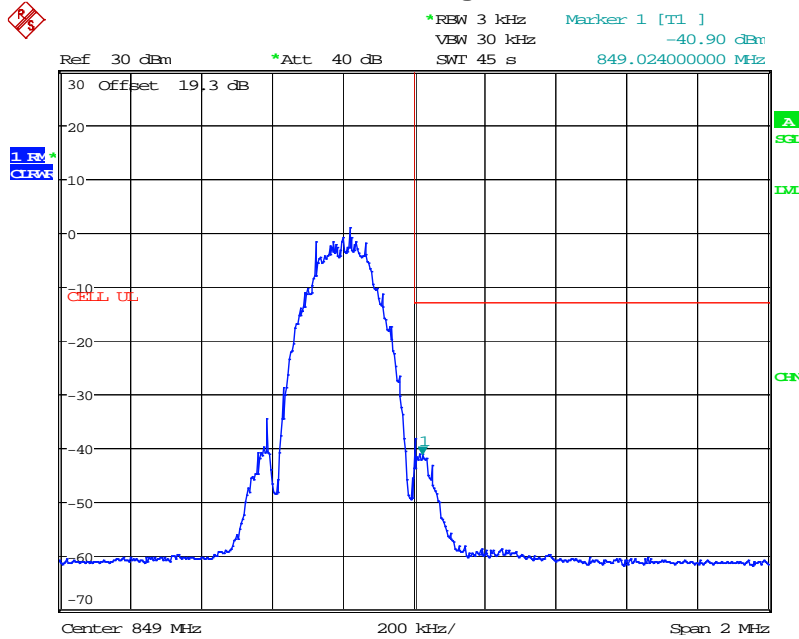


Date: 9.JAN.2014 14:05:22

GSM 1900 Band – Low Channel - EDGE

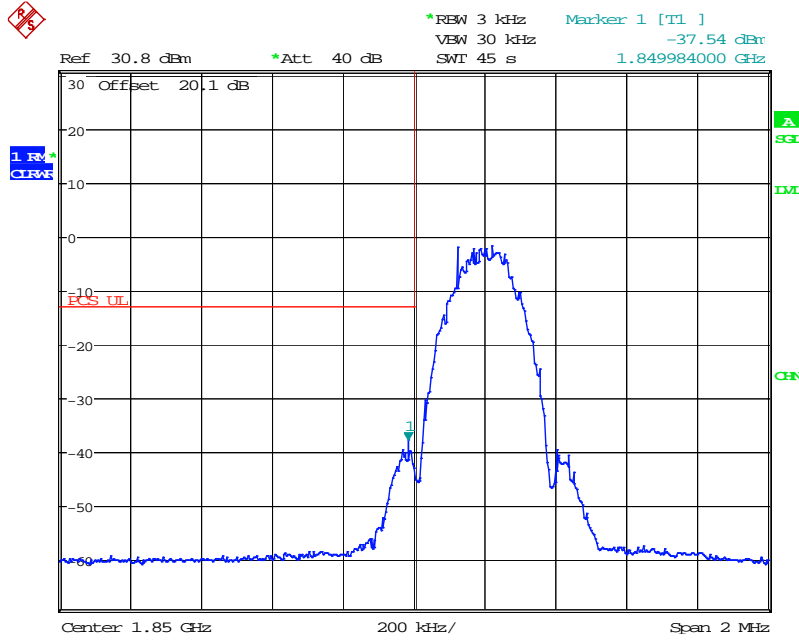


Date: 9.JAN.2014 15:01:09

GSM 1900 Band – High Channel – EDGE

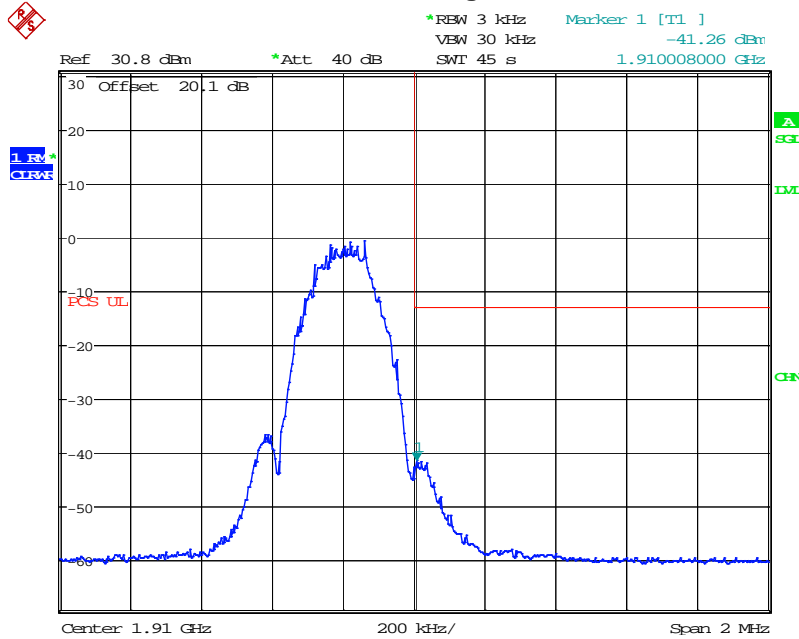


Date: 9.JAN.2014 15:00:05

WCDMA Band V – Low Channel

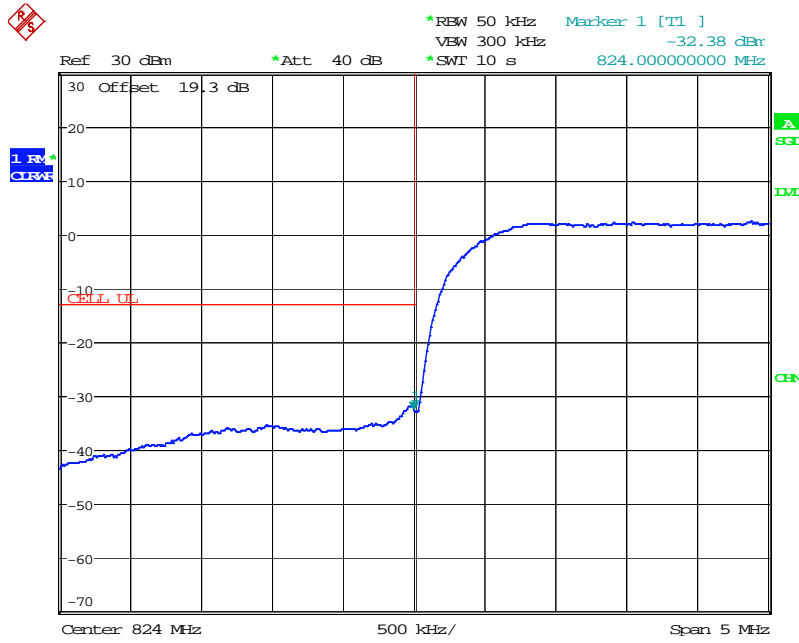


Date: 9.JAN.2014 14:12:44

WCDMA Band V – High Channel

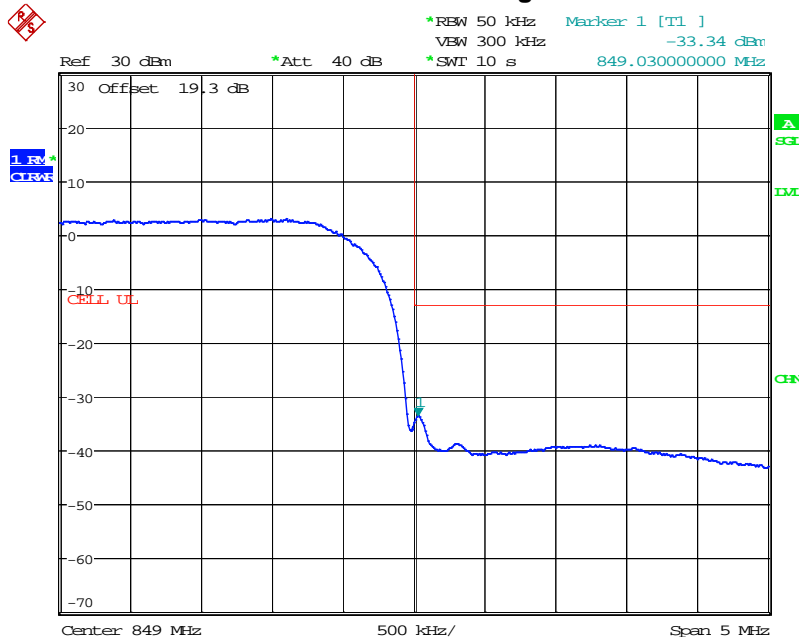


Date: 9.JAN.2014 14:13:55

WCDMA Band II – Low Channel

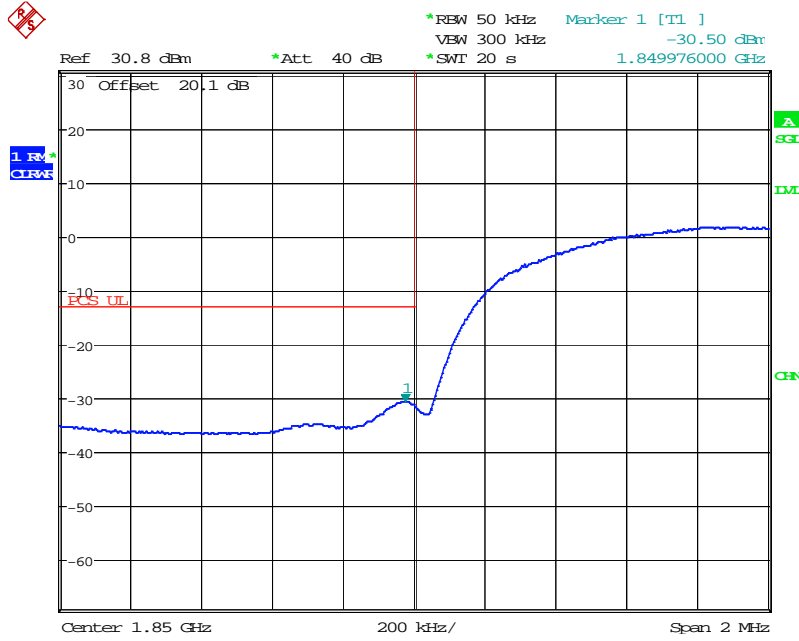

Date: 9.JAN.2014 15:09:20


WCDMA Band II – High Channel

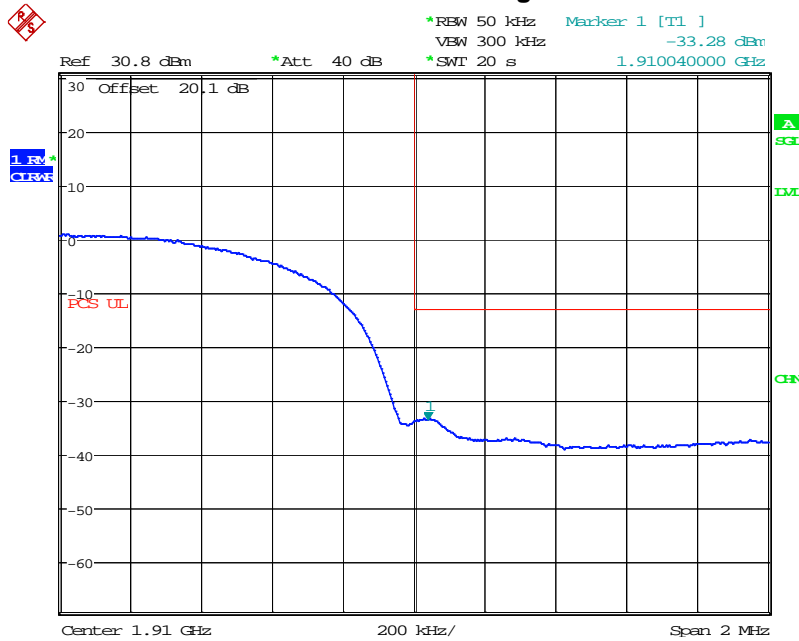

Date: 9.JAN.2014 15:10:25


Emissions within 4MHz of the block edge:

GSM 850 Band – Low Channel Band Edge – GPRS

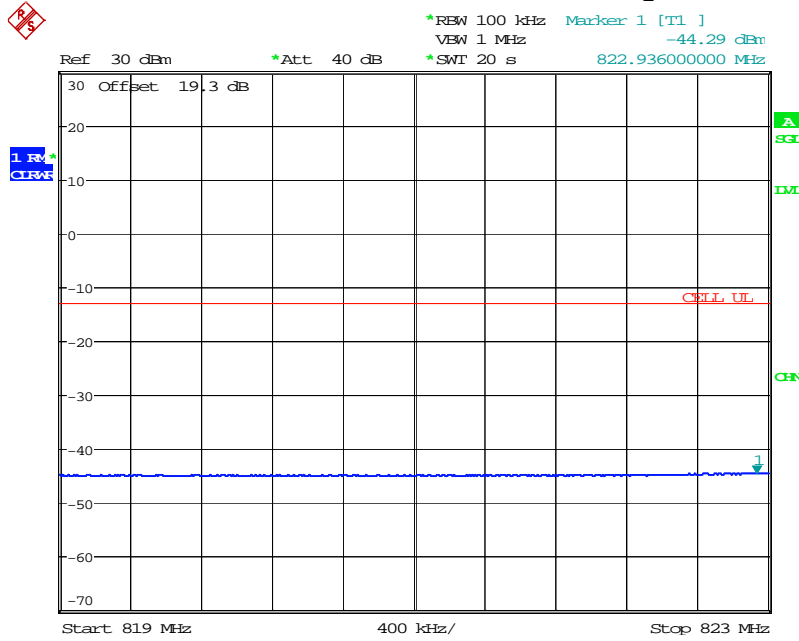


Date: 9.JAN.2014 14:51:46

GSM 850 Band – High Channel Band Edge - GPRS

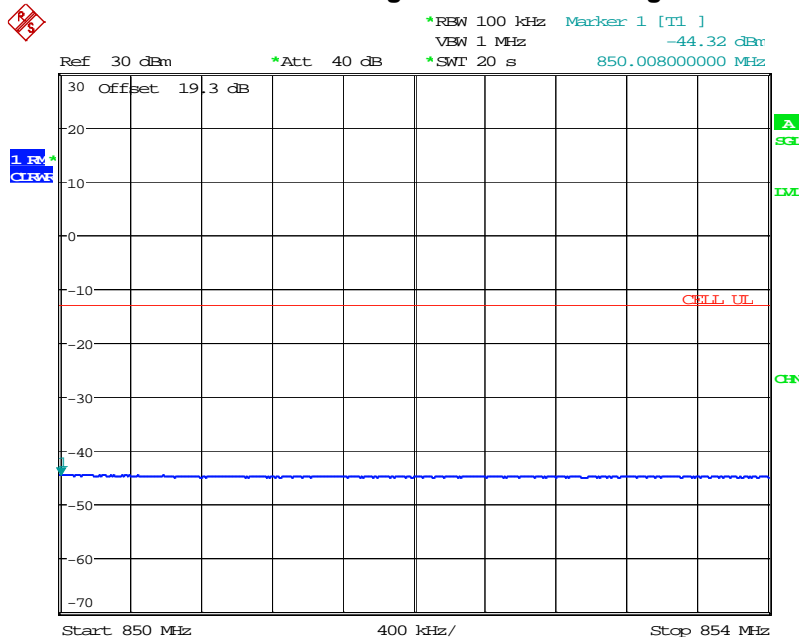


Date: 9.JAN.2014 14:48:38

GSM 1900 Band – Low Channel Band Edge - GPRS

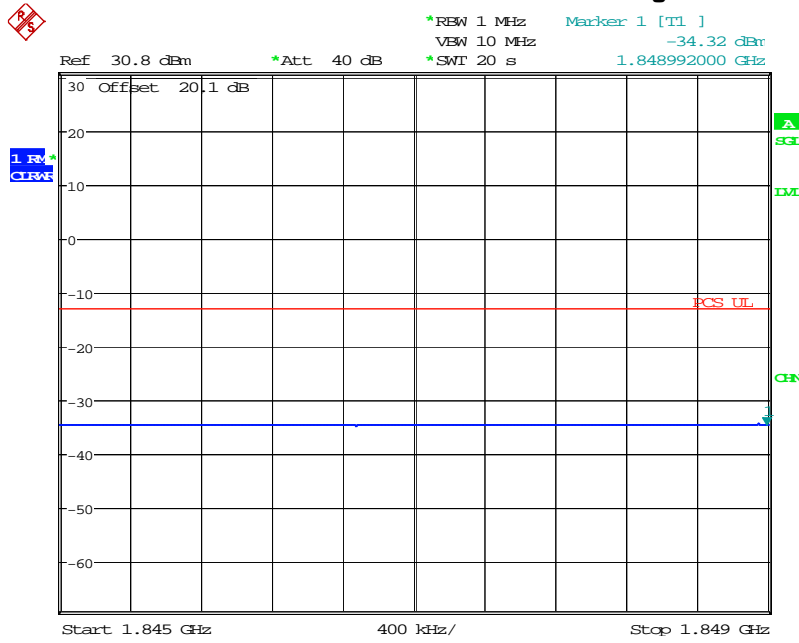


Date: 9.JAN.2014 15:19:47

GSM 1900 Band – High Channel Band Edge – GPRS

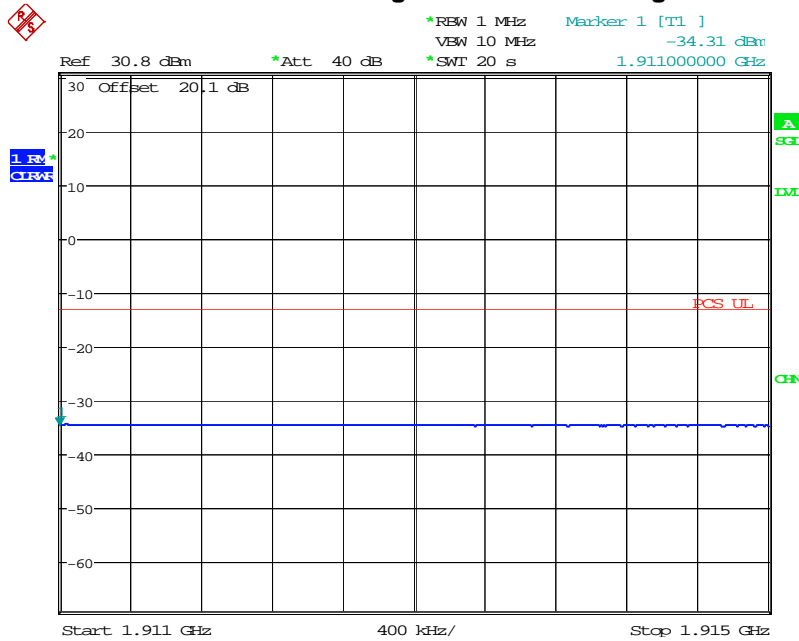


Date: 9.JAN.2014 15:21:07

GSM 850 Band – Low Channel Band Edge – EDGE

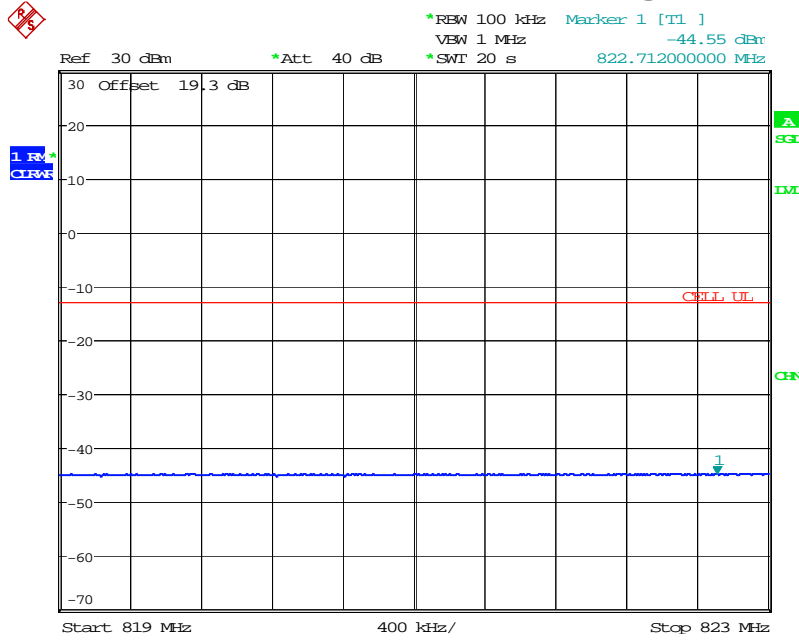


Date: 9.JAN.2014 14:50:50

GSM 850 Band – High Channel Band Edge – EDGE

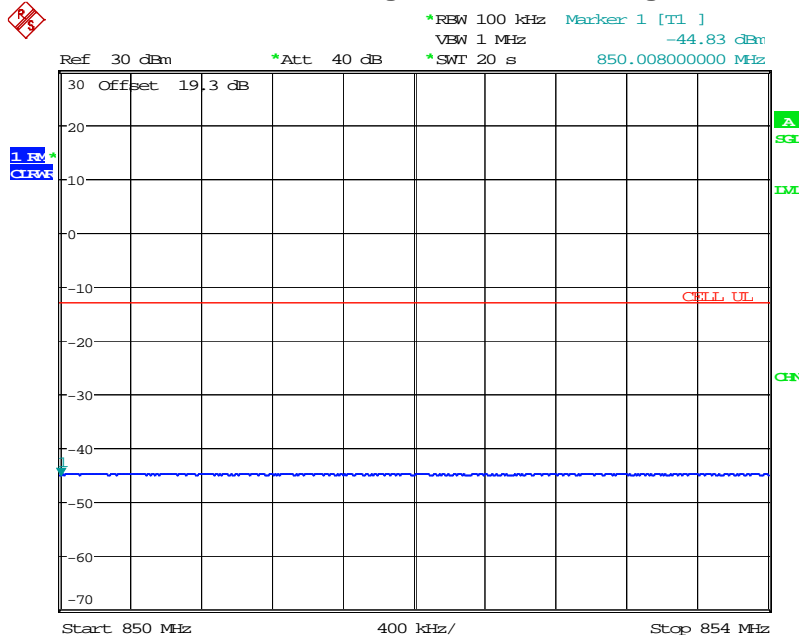


Date: 9.JAN.2014 14:49:43

GSM 1900 Band – Low Channel Band Edge - EDGE

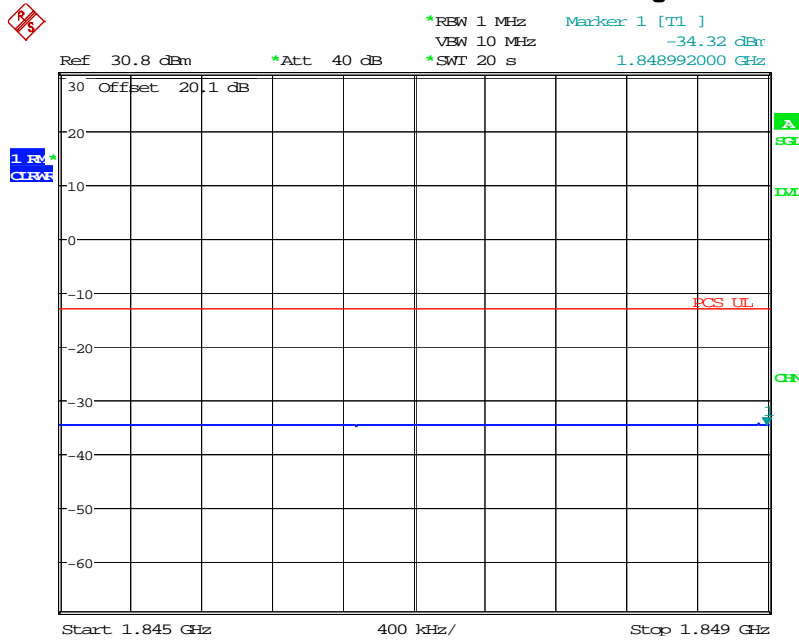


Date: 9.JAN.2014 15:19:47

GSM 1900 Band – High Channel Band Edge – EDGE

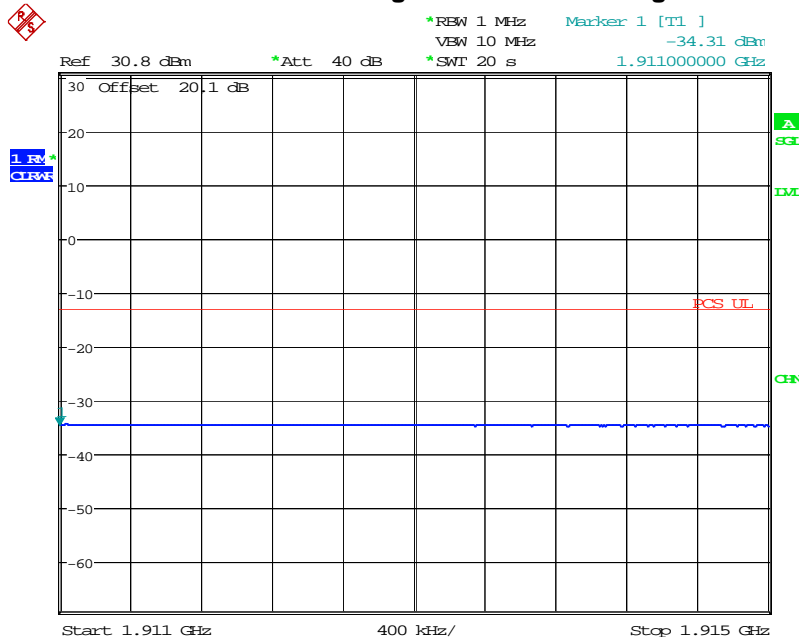


Date: 9.JAN.2014 15:21:07

WCDMA Band V Band Edge – Low Channel

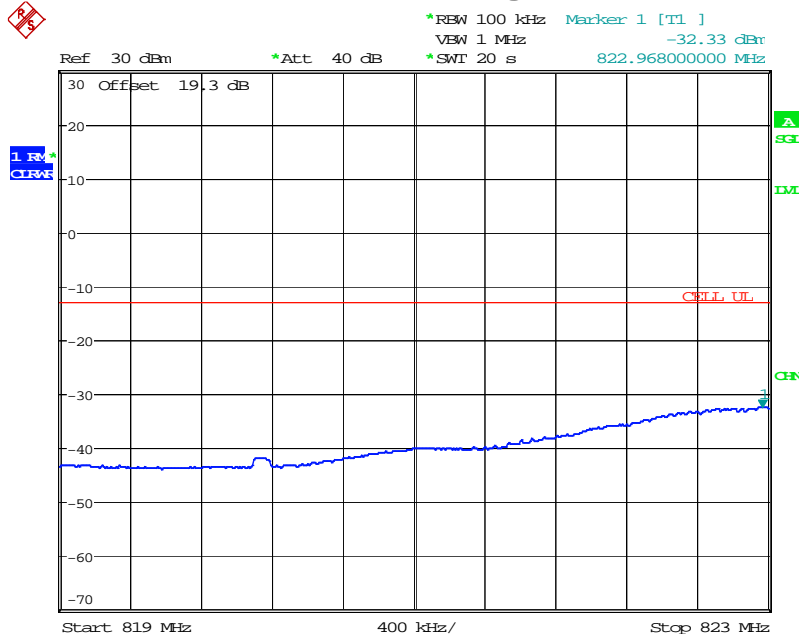


Date: 9.JAN.2014 14:42:52

WCDMA Band V Band Edge – High Channel

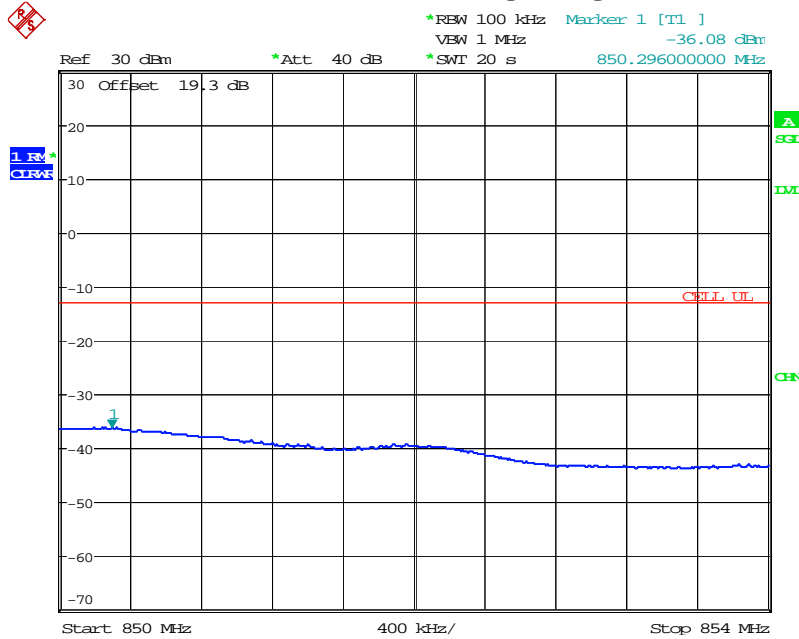


Date: 9.JAN.2014 14:45:47

WCDMA Band II Band Edge – Low Channel

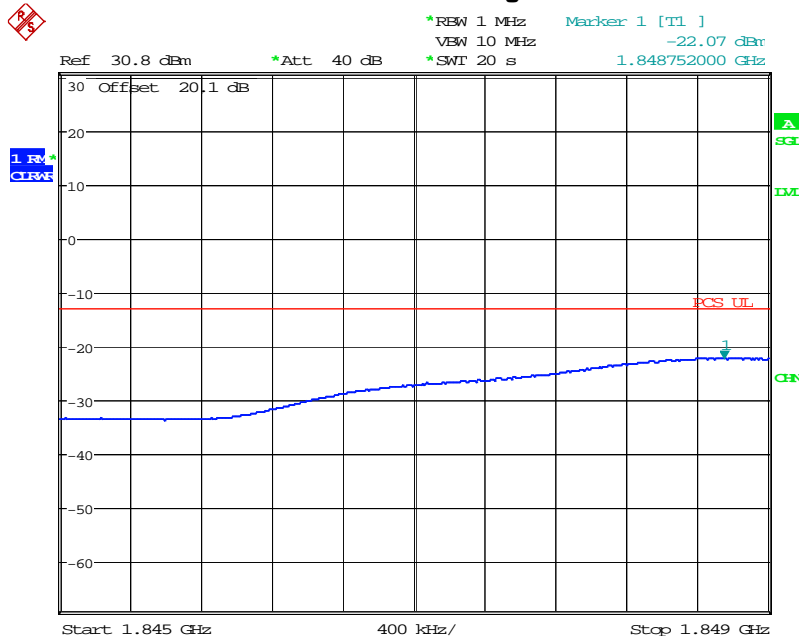

Date: 9.JAN.2014 15:15:19

WCDMA Band II Band Edge – High Channel

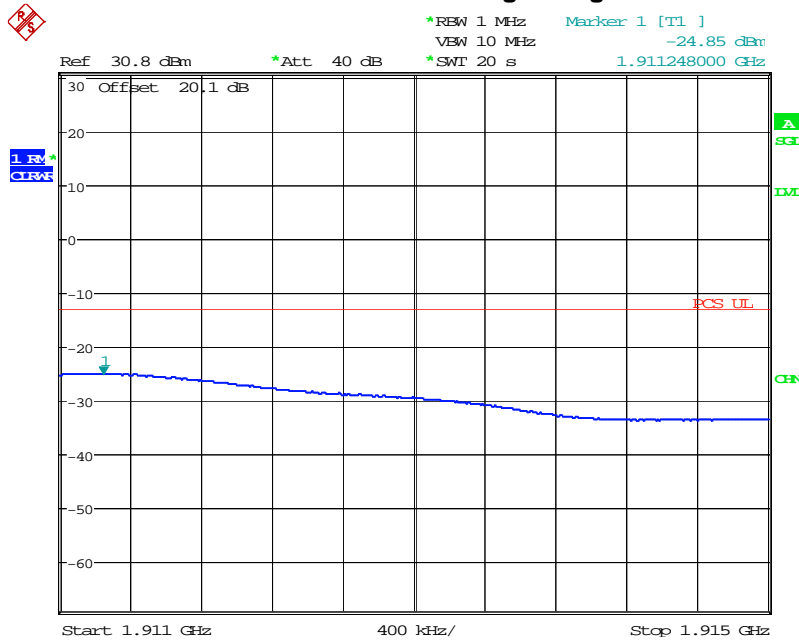

Date: 9.JAN.2014 15:24:52

7 Radiated Output Power

7.1 Test Limits

§ 22.913

(a) (2) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

§ 24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

7.2 Test Procedure

The radiated output power was determined by adding the peak antenna gain to the measured conducted output power to determine the peak radiated power.

$$ERP = ConductedOutputPower(dBm) + AntennaGain(dBi) - 2.15$$

$$EIRP = ConductedOutputPower(dBm) + AntennaGain(dBi)$$

7.3 Results:

The TCA203 meets the radiated power requirements of FCC §22.913 and §24.232.

Radiated Output Power						
Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Peak Antenna Gain (dBi)	EIRP (dBm)	ERP(dBm)
GSM 850 (GPRS)	128	824.2	32.19	4.28	36.47	34.32
	190	836.6	32.04	4.28	36.32	34.17
	251	848.8	31.77	4.28	36.05	33.90
GSM 850 (EDGE)	128	824.2	26.47	4.28	30.75	28.60
	190	836.6	26.31	4.28	30.59	28.44
	251	848.8	26.09	4.28	30.37	28.22
GSM 1900 (GPRS)	512	1850.2	28.37	3.00	31.37	29.22
	661	1880	28.58	3.00	31.58	29.43
	810	1909.8	28.72	3.00	31.72	29.57
GSM 1900 (EDGE)	512	1850.2	25.28	3.00	28.28	26.13
	661	1880	25.32	3.00	28.32	26.17
	810	1909.8	25.3	3.00	28.30	26.15
WCDMA Band V	4132	826.4	22.10	4.28	26.38	24.23
	4182	836.4	22.10	4.28	26.38	24.23
	4233	846.6	22.02	4.28	26.30	24.15
WCDMA Band II	9262	1852.4	21.98	3.00	24.98	22.83
	9400	1880	21.95	3.00	24.95	22.80
	9538	1907.6	21.75	3.00	24.75	22.60

8 Radiated Spurious Emissions (Transmitter)

8.1 Test Limits

§ 2.1053

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

§ 22.917

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

§ 24.238

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

8.2 Test Procedure

The EUT was placed on a non-conductive turntable. The measurement antenna was placed at a distance of 3 meters from the EUT. The EUT was forced to transmit at its maximum output power setting. During the tests, the antenna height and EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to tenth harmonic was investigated in order to identify the spurious emission. Once the spurious emissions were identified, the power of the emission was determined using the substitution method described in TIA-603-C. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and at the spurious emissions frequency.

8.3 Test Equipment Used:

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	1302.6005.40	Rohde & Schwarz	ESU40	9/11/2013	9/11/2014
Preamplifier	122005	Rohde&Schwarz	TS-PR18	9/19/2013	9/19/2014
Biconnilog Antenna	00051864	ETS	3142C	12/17/2013	12/17/2014
Horn Antenna	1096	Antenna Research	DRG118A	4/24/2013	4/24/2014
Horn Antenna	6556	ETS	3115	4/24/2013	4/24/2014
System Controller	121701-1	Sunol Sciences	SC99V	Calibration Not Required	Calibration Not Required
Base Station Simulator	3917	Rohde&Schwarz	CMW500	9/26/2013	9/26/2014
Signal Generator	3782	Rohde&Schwarz	SMB100A	9/12/2013	9/12/2014
High Pass Filter	013	Micro-Tronics	HPM50108	Time Of Use	Time Of Use
Band Reject Filter	109	Micro-Tronics	BRM50707	Time Of Use	Time Of Use
Environmental Chamber	3947	Test Equity	115A	Time Of Use	Time Of Use
Multimeter/Temp Meter	3400	Fluke	289	5/29/2013	5/29/2014

8.4 Results:

All radiated spurious emissions were attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB which is equivalent to -13dBm. The emissions were measured using an RMS detector and the analyzer was gated so that the emission was only measured during the on-times of the transmitter.

Worst Case Spurious Measurements – GSM 850 Bands – GPRS Mode

Radiated Spurious Emissions Measurement								
Test Engineer:		Jason Centers						
Test Date:		12/26/2013						
Temp. / Humidity / Pressure:		24.2C/20.1%/996.6mbar						
Bandwidth Settings:		RBW = VBW = 1MHz						
Notes:		Spurious emissions not reported here were below the measurement noise floor.						
Band/Channel	Spurious Frequency (MHz)	Polarity	A Device Reading (dBm)	B Signal Generator Level (dBm)	C Cable Loss (dB)	D Tx Antenna Gain (dBd)	E Limit (dBm)	F Radiated Spurious Emission Level (dBm)
GSM 850/Channel 128	1648.4	H	-53.46	-51.65	2.84	6.70	-13	-47.78
	1648.4	V	-55.85	-52.83	2.84	6.70	-13	-48.96
	2472.6	H	-47.56	-40.57	3.78	7.16	-13	-37.19
	2472.6	V	-52.86	-44.1	3.78	7.16	-13	-40.72
	3296.8	H	-67.61	-58.91	4.42	7.14	-13	-56.19
	3296.8	V	-66.63	-56.87	4.42	7.14	-13	-54.15
	4121	H	-63.29	-52.36	5.31	8.15	-13	-49.53
	4121	V	-65.13	-54.22	5.31	8.15	-13	-51.39
	4945.2	H	-64.27	-50.11	6.24	8.80	-13	-47.55
	4945.2	V	-65.91	-52.46	6.24	8.80	-13	-49.90
	5769.4	H	-68.66	-52.97	6.55	9.27	-13	-50.25
	5769.4	V	-72.09	-57.58	6.55	9.27	-13	-54.86
	6593.6	H	-63.93	-46.9	7.10	9.96	-13	-44.03
	6593.6	V	-69.14	-52.76	7.10	9.96	-13	-49.89
7417.8	H	-65.67	-47.62	7.71	8.72	-13	-46.61	
7417.8	V	-67.06	-49.87	7.71	8.72	-13	-48.86	
8242	H	-74.57	-54.65	8.25	9.16	-13	-53.74	
8242	V	-74.92	-56.06	8.25	9.16	-13	-55.15	
GSM 850/Channel 192	1674	H	-51.49	-48.83	2.93	6.70	-13	-45.06
	1674	V	-54.45	-50.67	2.93	6.70	-13	-46.90
	2511	H	-49.87	-42.8	3.69	7.43	-13	-39.06
	2511	V	-49.43	-40.63	3.69	7.43	-13	-36.89
	3348	H	-59.99	-51.53	4.53	7.19	-13	-48.88
	3348	V	-62.45	-52.98	4.53	7.19	-13	-50.33
	4185	H	-58.86	-47.46	5.36	8.15	-13	-44.67
	4185	V	-66.73	-55.82	5.36	8.15	-13	-53.03
	5022	H	-62.44	-47.78	6.54	8.87	-13	-45.46
	5022	V	-65.53	-51.9	6.54	8.87	-13	-49.58
	5859	H	-65.23	-49.03	6.76	9.57	-13	-46.22
	5859	V	-66.37	-50.91	6.76	9.57	-13	-48.10
	6696	H	-62.88	-44.93	7.23	9.81	-13	-42.35
	6696	V	-69.28	-52.02	7.23	9.81	-13	-49.44
7533	H	-66.06	-47.59	7.62	9.02	-13	-46.19	
7533	V	-69.82	-52.54	7.62	9.02	-13	-51.14	
8370	H	-66.35	-46.88	8.27	9.22	-13	-45.93	
8370	V	-69.54	-50.96	8.27	9.22	-13	-50.01	
GSM 850/Channel 251	1697.6	H	-47.26	-44.32	2.95	6.70	-13	-40.57
	1697.6	V	-51.76	-47.44	2.95	6.70	-13	-43.69
	2546.4	H	-42.39	-34.98	3.75	7.43	-13	-31.31
	2546.4	V	-45.02	-35.67	3.75	7.43	-13	-32.00
	3395.2	H	-61.23	-52.32	4.54	7.19	-13	-49.68
	3395.2	V	-65.51	-55.89	4.54	7.19	-13	-53.25
	4244	H	-66.59	-55.29	5.48	8.37	-13	-52.41
	4244	V	-70.26	-59.57	5.48	8.37	-13	-56.69
	5092.8	H	-59.7	-45.4	6.56	8.87	-13	-43.10
	5092.8	V	-63.78	-50.47	6.56	8.87	-13	-48.17
	5941.6	H	-65.67	-49.12	6.85	9.53	-13	-46.44
	5941.6	V	-67.34	-51.52	6.85	9.53	-13	-48.84
	6790.4	H	-62.7	-44.45	7.43	9.55	-13	-42.33
	6790.4	V	-67.91	-50.84	7.43	9.55	-13	-48.72
	7639.2	H	-66.93	-48.55	7.43	9.20	-13	-46.78
	7639.2	V	-71.16	-54.01	7.43	9.20	-13	-52.24
8488	H	-74.23	-54.64	8.36	9.13	-13	-53.87	
8488	V	-75.47	-56.84	8.36	9.13	-13	-56.07	

F=B-C+D

Worst Case Spurious Measurements – GSM 850 Band – EDGE Mode

Radiated Spurious Emissions Measurement								
Test Engineer:		Jason Centers						
Test Date:		12/26/2013						
Temp. / Humidity / Pressure:		24.2C/20.1%/996.6mbar						
Bandwidth Settings:		RBW = VBW = 1MHz						
Notes:		Spurious emissions not reported here were below the measurement noise floor.						
Band/Channel	Spurious Frequency (MHz)	Polarity	A Device Reading (dBm)	B Signal Generator Level (dBm)	C Cable Loss (dB)	D Tx Antenna Gain (dBd)	E Limit (dBm)	F Radiated Spurious Emission Level (dBm)
GSM 850/Channel 128	1648.4	H	-55.4	-53.59	2.84	6.70	-13	-49.72
	1648.4	V	-52.16	-49.14	2.84	6.70	-13	-45.27
	2472.6	H	-50.08	-43.09	3.78	7.16	-13	-39.71
	2472.6	V	-57.89	-49.13	3.78	7.16	-13	-45.75
	3296.8	H	-74.66	-65.96	4.42	7.14	-13	-63.24
	3296.8	V	-74.31	-64.55	4.42	7.14	-13	-61.83
	4121	H	-64.15	-53.22	5.31	8.15	-13	-50.39
	4121	V	-69.41	-58.5	5.31	8.15	-13	-55.67
	4945.2	H	-64.94	-50.78	6.24	8.80	-13	-48.22
	4945.2	V	-68.35	-54.9	6.24	8.80	-13	-52.34
	5769.4	H	-68.71	-53.02	6.55	9.27	-13	-50.30
	5769.4	V	-71.72	-57.21	6.55	9.27	-13	-54.49
	6593.6	H	-67.78	-50.75	7.10	9.96	-13	-47.88
	6593.6	V	-71.04	-54.66	7.10	9.96	-13	-51.79
	7417.8	H	-67.1	-49.05	7.71	8.72	-13	-48.04
	7417.8	V	-68.89	-51.7	7.71	8.72	-13	-50.69
8242	H	-73.97	-54.05	8.25	9.16	-13	-53.14	
8242	V	-75.38	-56.52	8.25	9.16	-13	-55.61	
GSM 850/Channel 192	1674	H	-55.25	-52.59	2.93	6.70	-13	-48.82
	1674	V	-52.79	-49.01	2.93	6.70	-13	-45.24
	2511	H	-48.23	-41.16	3.69	7.43	-13	-37.42
	2511	V	-53.55	-44.75	3.69	7.43	-13	-41.01
	3348	H	-64.12	-55.66	4.53	7.19	-13	-53.01
	3348	V	-64.45	-54.98	4.53	7.19	-13	-52.33
	4185	H	-66.33	-54.93	5.36	8.15	-13	-52.14
	4185	V	-67.31	-56.4	5.36	8.15	-13	-53.61
	5022	H	-64.01	-49.35	6.54	8.87	-13	-47.03
	5022	V	-65.13	-51.5	6.54	8.87	-13	-49.18
	5859	H	-66.68	-50.48	6.76	9.57	-13	-47.67
	5859	V	-68.61	-53.15	6.76	9.57	-13	-50.34
	6696	H	-68.08	-50.13	7.23	9.81	-13	-47.55
	6696	V	-67.08	-49.82	7.23	9.81	-13	-47.24
	7533	H	-67.39	-48.92	7.62	9.02	-13	-47.52
	7533	V	-71.23	-53.95	7.62	9.02	-13	-52.55
8370	H	-75.53	-56.06	8.27	9.22	-13	-55.11	
8370	V	-75.47	-56.89	8.27	9.22	-13	-55.94	
GSM 850/Channel 251	1697.6	H	-50.18	-47.24	2.95	6.70	-13	-43.49
	1697.6	V	-54.91	-50.59	2.95	6.70	-13	-46.84
	2546.4	H	-45.58	-38.17	3.75	7.43	-13	-34.50
	2546.4	V	-48.92	-39.57	3.75	7.43	-13	-35.90
	3395.2	H	-65.01	-56.1	4.54	7.19	-13	-53.46
	3395.2	V	-64.21	-54.59	4.54	7.19	-13	-51.95
	4244	H	-67.38	-56.08	5.48	8.37	-13	-53.20
	4244	V	-68.57	-57.88	5.48	8.37	-13	-55.00
	5092.8	H	-59.43	-45.13	6.56	8.87	-13	-42.83
	5092.8	V	-64.33	-51.02	6.56	8.87	-13	-48.72
	5941.6	H	-68.44	-51.89	6.85	9.53	-13	-49.21
	5941.6	V	-68.17	-52.35	6.85	9.53	-13	-49.67
	6790.4	H	-67.07	-48.82	7.43	9.55	-13	-46.70
	6790.4	V	-69.73	-52.66	7.43	9.55	-13	-50.54
	7639.2	H	-70.12	-51.74	7.43	9.20	-13	-49.97
	7639.2	V	-72.22	-55.07	7.43	9.20	-13	-53.30
8488	H	-74.55	-54.96	8.36	9.13	-13	-54.19	
8488	V	-74.52	-55.89	8.36	9.13	-13	-55.12	
								F=B-C+D

Worst Case Spurious Measurements – GSM 1900 Band – GPRS Mode

Radiated Spurious Emissions Measurement								
Test Engineer:		Jason Centers						
Test Date:		12/27/2013						
Temp. / Humidity / Pressure:		22.9C/20.7%/997.1mbar						
Bandwidth Settings:		RBW = VBW = 1MHz						
Notes:		Spurious emissions not reported here were below the measurement noise floor.						
Band/Channel	Spurious Frequency (MHz)	Polarity	A Device Reading (dBm)	B Signal Generator Level (dBm)	C Cable Loss (dB)	D Tx Antenna Gain (dBd)	E Limit (dBm)	F Radiated Spurious Emission Level (dBm)
GSM 1900/Channel 512	3700.4	H	-45.83	-35.36	4.92	7.07	-13	-33.21
	3700.4	V	-49.01	-36.7	4.92	7.07	-13	-34.55
	5550.6	H	-49.37	-35.03	6.46	8.48	-13	-33.01
	5550.6	V	-52.5	-38.83	6.46	8.48	-13	-36.81
	7400.8	H	-67.33	-49.56	7.71	8.72	-13	-48.55
	7400.8	V	-72.43	-55.56	7.71	8.72	-13	-54.55
	9251	H	-69.48	-42.87	9.40	9.41	-13	-42.87
	9251	V	-67.44	-48.24	9.40	9.41	-13	-48.24
	11101.2	H	-74.71	-48.36	9.01	10.70	-13	-46.67
	11101.2	V	-75.06	-48.76	9.01	10.70	-13	-47.07
	12951.4	H	-72.42	-45.25	13.02	11.17	-13	-47.10
	12951.4	V	-73.55	-48.53	13.02	11.17	-13	-50.38
	14801.6	H	-77.66	-33.52	13.60	10.37	-13	-36.75
	14801.6	V	-78.5	-36.98	13.60	10.37	-13	-40.21
	16651.8	H	-77.73	-32.92	17.75	13.70	-13	-36.97
	16651.8	V	-78.1	-31.38	17.75	13.70	-13	-35.43
18502	H	-79.96	-33.09	16.73	7.78	-13	-42.04	
18502	V	-79.56	-32.49	16.73	7.78	-13	-41.44	
GSM 1900/Channel 661	3760	H	-47.32	-37.17	4.87	7.07	-13	-34.97
	3760	V	-50.82	-39.64	4.87	7.07	-13	-37.44
	5640	H	-52.4	-38.63	6.45	8.84	-13	-36.24
	5640	V	-53.64	-40.84	6.45	8.84	-13	-38.45
	7520	H	-74.04	-55.99	7.62	9.02	-13	-54.59
	7520	V	-72.18	-55.25	7.62	9.02	-13	-53.85
	9400	H	-70.37	-46.85	9.50	9.52	-13	-46.83
	9400	V	-70.64	-49.58	9.50	9.52	-13	-49.56
	11280	H	-71.36	-45.56	8.02	10.65	-13	-42.94
	11280	V	-72.07	-45.93	8.02	10.65	-13	-43.31
	13160	H	-71.64	-43.84	13.67	10.82	-13	-46.70
	13160	V	-71.97	-46.61	13.67	10.82	-13	-49.47
	15040	H	-79.14	-28.07	14.10	10.93	-13	-31.24
	15040	V	-79.34	-30.49	14.10	10.93	-13	-33.66
	16920	H	-77.32	-38.58	15.57	12.01	-13	-42.14
	16920	V	-73.99	-33.28	15.57	12.01	-13	-36.84
18800	H	-79.4	-31	15.81	7.28	-13	-39.52	
18800	V	-79.24	-33.5	15.81	7.28	-13	-42.02	
GSM 1900/Channel 810	3819.6	H	-48.93	-38.04	4.99	6.73	-13	-36.29
	3819.6	V	-49.58	-38.28	4.99	6.73	-13	-36.53
	5729.4	H	-53.03	-37.11	6.71	9.27	-13	-34.55
	5729.4	V	-55.25	-40.15	6.71	9.27	-13	-37.59
	7639.2	H	-71.24	-52.83	7.43	9.20	-13	-51.06
	7639.2	V	-71.64	-54.21	7.43	9.20	-13	-52.44
	9549	H	-70.1	-46.8	9.61	9.77	-13	-46.63
	9549	V	-69.06	-48.09	9.61	9.77	-13	-47.92
	11458.8	H	-72.96	-48.12	9.19	10.54	-13	-46.77
	11458.8	V	-73.59	-49.31	9.19	10.54	-13	-47.96
	13368.6	H	-66.3	-39.19	13.51	10.70	-13	-42.00
	13368.6	V	-66.98	-41.97	13.51	10.70	-13	-44.78
	15278.4	H	-78.34	-40.39	13.99	11.91	-13	-42.47
	15278.4	V	-78.47	-42.45	13.99	11.91	-13	-44.53
	17188.2	H	-70.83	-28.18	13.11	11.27	-13	-30.02
	17188.2	V	-70.49	-27.34	13.11	11.27	-13	-29.18
19098	H	-79.6	-31.64	15.36	5.52	-13	-41.48	
19098	V	-79.37	-34.95	15.36	5.52	-13	-44.79	

F=B-C+D

Worst Case Spurious Measurements – GSM 1900 Band – EDGE Mode

Radiated Spurious Emissions Measurement								
Test Engineer:		Jason Centers						
Test Date:		12/27/2013						
Temp. / Humidity / Pressure:		22.9C/20.7%/997.1mbar						
Bandwidth Settings:		RBW = VBW = 1MHz						
Notes:		Spurious emissions not reported here were below the measurement noise floor.						
Band/Channel	Spurious Frequency (MHz)	Polarity	Device Reading (dBm)	Signal Generator Level (dBm)	Cable Loss (dB)	Tx Antenna Gain (dBd)	Limit (dBm)	Radiated Spurious Emission Level (dBm)
GSM 1900/Channel 512	3700.4	H	-50.36	-39.89	4.92	7.07	-13	-37.74
	3700.4	V	-49.84	-37.53	4.92	7.07	-13	-35.38
	5550.6	H	-51.63	-37.29	6.46	8.48	-13	-35.27
	5550.6	V	-48.49	-34.82	6.46	8.48	-13	-32.80
	7400.8	H	-68.92	-51.15	7.71	8.72	-13	-50.14
	7400.8	V	-71.93	-55.06	7.71	8.72	-13	-54.05
	9251	H	-67.28	-40.67	9.40	9.41	-13	-40.67
	9251	V	-66.43	-47.23	9.40	9.41	-13	-47.23
	11101.2	H	-75.46	-49.11	9.01	10.70	-13	-47.42
	11101.2	V	-75.03	-48.73	9.01	10.70	-13	-47.04
	12951.4	H	-73.54	-46.37	13.02	11.17	-13	-48.22
	12951.4	V	-73.51	-48.49	13.02	11.17	-13	-50.34
	14801.6	H	-78.23	-34.09	13.60	10.37	-13	-37.32
	14801.6	V	-77.85	-36.33	13.60	10.37	-13	-39.56
	16651.8	H	-78.44	-33.63	17.75	13.70	-13	-37.68
	16651.8	V	-78.81	-32.09	17.75	13.70	-13	-36.14
18502	H	-79.79	-32.92	16.73	7.78	-13	-41.87	
18502	V	-79.22	-32.15	16.73	7.78	-13	-41.10	
GSM 1900/Channel 661	3760	H	-49.26	-39.11	4.87	7.07	-13	-36.91
	3760	V	-52.34	-41.16	4.87	7.07	-13	-38.96
	5640	H	-51.72	-37.95	6.45	8.84	-13	-35.56
	5640	V	-46.07	-33.27	6.45	8.84	-13	-30.88
	7520	H	-71.75	-53.7	7.62	9.02	-13	-52.30
	7520	V	-72.7	-55.77	7.62	9.02	-13	-54.37
	9400	H	-70.19	-46.67	9.50	9.52	-13	-46.65
	9400	V	-67.24	-46.18	9.50	9.52	-13	-46.16
	11280	H	-72.59	-46.79	8.02	10.65	-13	-44.17
	11280	V	-70.02	-43.88	8.02	10.65	-13	-41.26
	13160	H	-72.38	-44.58	13.67	10.82	-13	-47.44
	13160	V	-73.61	-48.25	13.67	10.82	-13	-51.11
	15040	H	-78.81	-27.74	14.10	10.93	-13	-30.91
	15040	V	-79.3	-30.45	14.10	10.93	-13	-33.62
	16920	H	-77.54	-38.8	15.57	12.01	-13	-42.36
	16920	V	-77.88	-37.17	15.57	12.01	-13	-40.73
18800	H	-78.25	-29.85	15.81	7.28	-13	-38.37	
18800	V	-79.15	-33.41	15.81	7.28	-13	-41.93	
GSM 1900/Channel 810	3819.6	H	-48.76	-37.87	4.99	6.73	-13	-36.12
	3819.6	V	-51.15	-39.85	4.99	6.73	-13	-38.10
	5729.4	H	-45.2	-29.28	6.71	9.27	-13	-26.72
	5729.4	V	-50.24	-35.14	6.71	9.27	-13	-32.58
	7639.2	H	-72.24	-53.83	7.43	9.20	-13	-52.06
	7639.2	V	-71.98	-54.55	7.43	9.20	-13	-52.78
	9549	H	-70.5	-47.2	9.61	9.77	-13	-47.03
	9549	V	-68.4	-47.43	9.61	9.77	-13	-47.26
	11458.8	H	-70.7	-45.86	9.19	10.54	-13	-44.51
	11458.8	V	-71.48	-47.2	9.19	10.54	-13	-45.85
	13368.6	H	-66.82	-39.71	13.51	10.70	-13	-42.52
	13368.6	V	-68	-42.99	13.51	10.70	-13	-45.80
	15278.4	H	-78.53	-40.58	13.99	11.91	-13	-42.66
	15278.4	V	-78.01	-41.99	13.99	11.91	-13	-44.07
	17188.2	H	-65.83	-23.18	13.11	11.27	-13	-25.02
	17188.2	V	-65.95	-22.8	13.11	11.27	-13	-24.64
19098	H	-79.05	-31.09	15.36	5.52	-13	-40.93	
19098	V	-78.8	-34.38	15.36	5.52	-13	-44.22	
								F=B-C+D

Worst Case Spurious Measurements – WCDMA Band V

Radiated Spurious Emissions Measurement								
Test Engineer:		Jason Centers						
Test Date:		12/26/2013						
Temp. / Humidity / Pressure:		24.2C/20.1%/996.6mbar						
Bandwidth Settings:		RBW = VBW = 1MHz						
Notes:		Spurious emissions not reported here were below the measurement noise floor.						
Band/Channel	Spurious Frequency (MHz)	Polarity	A Device Reading (dBm)	B Signal Generator Level (dBm)	C Cable Loss (dB)	D Tx Antenna Gain (dBd)	E Limit (dBm)	F Radiated Spurious Emission Level (dBm)
WCDMA Band V / Channel 4132	1652.8	H	-53.99	-52.18	2.84	6.70	-13	-48.32
	1652.8	V	-51.92	-48.9	2.84	6.70	-13	-45.04
	2479.2	H	-65.01	-58.02	3.62	7.16	-13	-54.48
	2479.2	V	-66.02	-57.26	3.62	7.16	-13	-53.72
	3305.6	H	-74.76	-66.06	4.48	7.19	-13	-63.35
	3305.6	V	-74.32	-64.56	4.48	7.19	-13	-61.85
	4132	H	-79.87	-68.94	5.34	8.15	-13	-66.14
	4132	V	-79.79	-68.88	5.34	8.15	-13	-66.08
	4958.4	H	-81.08	-66.92	6.32	8.80	-13	-64.44
	4958.4	V	-80.8	-67.35	6.32	8.80	-13	-64.87
	5784.8	H	-81.74	-66.05	6.43	9.27	-13	-63.21
	5784.8	V	-81.56	-67.05	6.43	9.27	-13	-64.21
	6611.2	H	-81.25	-64.22	7.23	9.81	-13	-61.64
	6611.2	V	-80.65	-64.27	7.23	9.81	-13	-61.69
	7437.6	H	-81.23	-63.18	7.71	8.72	-13	-62.17
7437.6	V	-81.38	-64.19	7.71	8.72	-13	-63.18	
8264	H	-82.37	-62.45	8.25	9.16	-13	-61.54	
8264	V	-82.48	-63.62	8.25	9.16	-13	-62.71	
WCDMA Band V / Channel 4182	1672.8	H	-47.12	-44.46	2.93	6.70	-13	-40.69
	1672.8	V	-49.27	-45.49	2.93	6.70	-13	-41.72
	2509.2	H	-73.12	-66.05	3.69	7.43	-13	-62.31
	2509.2	V	-73.04	-64.24	3.69	7.43	-13	-60.50
	3345.6	H	-74.57	-66.11	4.53	7.19	-13	-63.46
	3345.6	V	-74.58	-65.11	4.53	7.19	-13	-62.46
	4182	H	-80.4	-69	5.36	8.15	-13	-66.21
	4182	V	-80.14	-69.23	5.36	8.15	-13	-66.44
	5018.4	H	-81.38	-66.72	6.29	8.87	-13	-64.14
	5018.4	V	-81.52	-67.89	6.29	8.87	-13	-65.31
	5854.8	H	-81.56	-65.36	6.44	9.57	-13	-62.23
	5854.8	V	-81.61	-66.15	6.44	9.57	-13	-63.02
	6691.2	H	-81.54	-63.59	7.23	9.81	-13	-61.01
	6691.2	V	-81.41	-64.15	7.23	9.81	-13	-61.57
	7527.6	H	-81.23	-62.76	7.62	9.02	-13	-61.36
7527.6	V	-81.28	-64	7.62	9.02	-13	-62.60	
8364	H	-81.96	-62.49	8.27	9.22	-13	-61.54	
8364	V	-82.08	-63.5	8.27	9.22	-13	-62.55	
WCDMA Band V / Channel 4233	1693.2	H	-44.9	-41.96	2.94	6.70	-13	-38.19
	1693.2	V	-46.89	-42.57	2.94	6.70	-13	-38.80
	2539.8	H	-68.62	-61.21	3.78	7.43	-13	-57.57
	2539.8	V	-60.92	-51.57	3.78	7.43	-13	-47.93
	3386.4	H	-75.49	-66.58	4.62	7.19	-13	-64.01
	3386.4	V	-72.02	-62.4	4.62	7.19	-13	-59.83
	4233	H	-80.18	-68.88	5.52	8.37	-13	-66.03
	4233	V	-80.06	-69.37	5.52	8.37	-13	-66.52
	5079.6	H	-81.18	-66.88	6.34	8.87	-13	-64.35
	5079.6	V	-81.2	-67.89	6.34	8.87	-13	-65.36
	5926.2	H	-81.32	-64.77	7.11	9.53	-13	-62.35
	5926.2	V	-81.47	-65.65	7.11	9.53	-13	-63.23
	6772.8	H	-80.88	-62.63	7.43	9.55	-13	-60.51
	6772.8	V	-81.02	-63.95	7.43	9.55	-13	-61.83
	7619.4	H	-80.96	-62.58	7.43	9.20	-13	-60.81
7619.4	V	-81.28	-64.13	7.43	9.20	-13	-62.36	
8466	H	-81.77	-62.18	8.36	9.13	-13	-61.41	
8466	V	-81.72	-63.09	8.36	9.13	-13	-62.32	

F=B-C+D

Worst Case Spurious Measurements – WCDMA Band II

Radiated Spurious Emissions Measurement								
Test Engineer:		Jason Centers						
Test Date:		12/27/2013						
Temp. / Humidity / Pressure:		22.9C/20.7%/997.1mbar						
Bandwidth Settings:		RBW = VBW = 1MHz						
Notes:		Spurious emissions not reported here were below the measurement noise floor.						
Band/Channel	Spurious Frequency (MHz)	Polarity	A Device Reading (dBm)	B Signal Generator Level (dBm)	C Cable Loss (dB)	D Tx Antenna Gain (dBd)	E Limit (dBm)	F Radiated Spurious Emission Level (dBm)
UMTS Band II/Channel 9262	3704.8	H	-63.83	-53.36	4.88	7.07	-13	-51.17
	3704.8	V	-68.34	-56.03	4.88	7.07	-13	-53.84
	5557.2	H	-75.41	-61.07	6.52	8.48	-13	-59.11
	5557.2	V	-64.81	-51.14	6.52	8.48	-13	-49.18
	7409.6	H	-80.56	-62.79	7.71	8.72	-13	-61.78
	7409.6	V	-80.83	-63.96	7.71	8.72	-13	-62.95
	9262	H	-79.5	-52.89	9.40	9.41	-13	-52.89
	9262	V	-78.96	-59.76	9.40	9.41	-13	-59.76
	11114.4	H	-83.7	-57.35	9.01	10.70	-13	-55.66
	11114.4	V	-83.72	-57.42	9.01	10.70	-13	-55.73
	12966.8	H	-83.53	-56.36	13.02	11.17	-13	-58.21
	12966.8	V	-83.58	-58.56	13.02	11.17	-13	-60.41
	14819.2	H	-84.13	-39.99	13.60	10.37	-13	-43.22
	14819.2	V	-84.05	-42.53	13.60	10.37	-13	-45.76
	16671.6	H	-83.66	-38.85	17.75	13.70	-13	-42.90
	16671.6	V	-83.51	-36.79	17.75	13.70	-13	-40.84
UMTS Band II/Channel 9400	18524	H	-85.03	-38.16	16.73	7.78	-13	-47.11
	18524	V	-85.17	-38.1	16.73	7.78	-13	-47.05
	3760	H	-63.12	-52.97	4.87	7.07	-13	-50.77
	3760	V	-60.9	-49.72	4.87	7.07	-13	-47.52
	5640	H	-72.28	-58.51	6.45	8.84	-13	-56.12
	5640	V	-71.42	-58.62	6.45	8.84	-13	-56.23
	7520	H	-80.76	-62.71	7.62	9.02	-13	-61.31
	7520	V	-81.37	-64.44	7.62	9.02	-13	-63.04
	9400	H	-82.56	-59.04	9.50	9.52	-13	-59.02
	9400	V	-82.65	-61.59	9.50	9.52	-13	-61.57
	11280	H	-83.35	-57.55	8.02	10.65	-13	-54.93
	11280	V	-83.2	-57.06	8.02	10.65	-13	-54.44
	13160	H	-83.57	-55.77	13.67	10.82	-13	-58.63
	13160	V	-83.03	-57.67	13.67	10.82	-13	-60.53
	15040	H	-84.56	-33.49	14.10	10.93	-13	-36.66
	15040	V	-85.03	-36.18	14.10	10.93	-13	-39.35
UMTS Band II/Channel 9538	16920	H	-83.7	-44.96	15.57	12.01	-13	-48.52
	16920	V	-83.5	-42.79	15.57	12.01	-13	-46.35
	18800	H	-84.51	-36.11	15.81	7.28	-13	-44.63
	18800	V	-84.3	-38.56	15.81	7.28	-13	-47.08
	3815.2	H	-59.97	-49.08	5.00	6.73	-13	-47.35
	3815.2	V	-60.67	-49.37	5.00	6.73	-13	-47.64
	5722.8	H	-63.78	-47.86	6.89	9.27	-13	-45.49
	5722.8	V	-61.13	-46.03	6.89	9.27	-13	-43.66
	7630.4	H	-81.94	-63.53	7.43	9.20	-13	-61.76
	7630.4	V	-81.18	-63.75	7.43	9.20	-13	-61.98
	9538	H	-82.07	-58.77	9.61	9.77	-13	-58.60
	9538	V	-82.84	-61.87	9.61	9.77	-13	-61.70
	11445.6	H	-82.83	-57.99	9.19	10.54	-13	-56.64
	11445.6	V	-83.1	-58.82	9.19	10.54	-13	-57.47
	13353.2	H	-83.65	-56.54	13.51	10.70	-13	-59.35
	13353.2	V	-82.93	-57.92	13.51	10.70	-13	-60.73
15260.8	H	-83.75	-45.8	13.99	11.91	-13	-47.88	
15260.8	V	-84.09	-48.07	13.99	11.91	-13	-50.15	
17168.4	H	-83.83	-41.18	13.11	11.27	-13	-43.02	
17168.4	V	-83.89	-40.74	13.11	11.27	-13	-42.58	
19076	H	-84.9	-36.94	15.36	5.52	-13	-46.78	
19076	V	-84.96	-40.54	15.36	5.52	-13	-50.38	

F=B-C+D

9 Frequency Stability

9.1 Test Limits

§ 2.1055, §22.355, §24.235

The frequency stability of the transmitter was required to maintain a ± 2.5 ppm tolerance.

9.2 Test Procedure

The equipment under test was connected to an AC variac and the RF output was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for that purpose. After the temperature stabilized for approximately 30 minutes, the frequency error was read from the base station simulator. At 20C the input voltage was varied from 85% to 115% and the frequency stability vs input voltage was recorded.

9.3 Test Equipment Used:

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
Base Station Simulator	3917	Rohde&Schwarz	CMW500	9/26/2013	9/26/2014
Environmental Chamber	3947	Test Equity	115A	Time Of Use	Time Of Use
Multimeter/Temp Meter	3400	Fluke	289	5/29/2013	5/29/2014

9.4 Results:

The tables below show the frequency stability data for both Cell and PCS Bands. In both cases the test sample met the ± 2.5 ppm limit.

Frequency Stability for GSM 850 Band – GPRS Mode

Operating Frequency: 837,000,000 Hz					
Channel: 192					
Reference Voltage: 115 VAC					
Deviation Limit: 2.5 ppm					
Notes: Frequency Stability in GSM 850 Band, GPRS Mode					
Voltage (%)	Voltage (VAC)	Temp (°C)	Frequency Error (Hz)	Deviation (%)	Deviation (ppm)
100%	115	-30	41.75	0.0000050	0.0499
100%	115	-20	38.75	0.0000046	0.0463
100%	115	-10	34.23	0.0000041	0.0409
100%	115	0	39.07	0.0000047	0.0467
100%	115	10	35.89	0.0000043	0.0429
100%	115	20	32.3	0.0000039	0.0386
100%	115	30	36.2	0.0000043	0.0432
100%	115	40	34.26	0.0000041	0.0409
100%	115	50	41.41	0.0000049	0.0495
100%	115	60	12.98	0.0000016	0.0155
115%	138	20	41.4	0.0000049	0.0495
85%	93.5	20	35.1	0.0000042	0.0419

Frequency Stability for GSM 1900 Band – GPRS Mode

Operating Frequency: 1,880,000,000 Hz					
Channel: 661					
Reference Voltage: 115 VAC					
Deviation Limit: 2.5 ppm					
Notes: Frequency Stability in GSM 1900 Band, GPRS Mode					
Voltage (%)	Voltage (VAC)	Temp (°C)	Frequency Error (Hz)	Deviation (%)	Deviation (ppm)
100%	115	-30	80.65	0.0000043	0.0429
100%	115	-20	41.65	0.0000022	0.0222
100%	115	-10	32.42	0.0000017	0.0172
100%	115	0	19.73	0.0000010	0.0105
100%	115	10	21.71	0.0000012	0.0115
100%	115	20	18.8	0.0000010	0.0100
100%	115	30	23.61	0.0000013	0.0126
100%	115	40	24.2	0.0000013	0.0129
100%	115	50	29.82	0.0000016	0.0159
100%	115	60	52.81	0.0000028	0.0281
115%	138	20	22.1	0.0000012	0.0118
85%	93.5	20	27.5	0.0000015	0.0146

Frequency Stability for GSM 850 Band – EDGE Mode

Operating Frequency:		837,000,000 Hz			
Channel:		192			
Reference Voltage:		115 VAC			
Deviation Limit:		2.5 ppm			
Notes:		Frequency Stability in GSM 850 Band, EDGE Mode			
Voltage (%)	Voltage (VAC)	Temp (°C)	Frequency Error (Hz)	Deviation (%)	Deviation (ppm)
100%	115	-30	27.44	0.0000033	0.0328
100%	115	-20	29.51	0.0000035	0.0353
100%	115	-10	30.98	0.0000037	0.0370
100%	115	0	32.87	0.0000039	0.0393
100%	115	10	36.7	0.0000044	0.0438
100%	115	20	11.43	0.0000014	0.0137
100%	115	30	28.14	0.0000034	0.0336
100%	115	40	46.04	0.0000055	0.0550
100%	115	50	38.78	0.0000046	0.0463
100%	115	60	36.01	0.0000043	0.0430
115%	138	20	31.4	0.0000038	0.0375
85%	93.5	20	31.87	0.0000038	0.0381

Frequency Stability for GSM 1900 Band – EDGE Mode

Operating Frequency:		1,880,000,000 Hz			
Channel:		661			
Reference Voltage:		115 VAC			
Deviation Limit:		2.5 ppm			
Notes:		Frequency Stability in GSM 1900 Band, EDGE Mode			
Voltage (%)	Voltage (VAC)	Temp (°C)	Frequency Error (Hz)	Deviation (%)	Deviation (ppm)
100%	115	-30	43.75	0.0000023	0.0233
100%	115	-20	48.91	0.0000026	0.0260
100%	115	-10	35.98	0.0000019	0.0191
100%	115	0	56.98	0.0000030	0.0303
100%	115	10	39.16	0.0000021	0.0208
100%	115	20	14.6	0.0000008	0.0078
100%	115	30	57.37	0.0000031	0.0305
100%	115	40	60.4	0.0000032	0.0321
100%	115	50	57.15	0.0000030	0.0304
100%	115	60	66.12	0.0000035	0.0352
115%	138	20	16.2	0.0000009	0.0086
85%	93.5	20	15.9	0.0000008	0.0085

Frequency Stability for WCDMA Band V

Operating Frequency:		836,400,000 Hz			
Channel:		4182			
Reference Voltage:		115 VAC			
Deviation Limit:		2.5 ppm			
Notes: Frequency Stability in WCDMA Band V Mode					
Voltage (%)	Voltage (VAC)	Temp (°C)	Frequency Error (Hz)	Deviation (%)	Deviation (ppm)
100%	115	-30	31.78	0.0000038	0.0380
100%	115	-20	34.42	0.0000041	0.0411
100%	115	-10	28.71	0.0000034	0.0343
100%	115	0	24.48	0.0000029	0.0292
100%	115	10	21.65	0.0000026	0.0259
100%	115	20	22.49	0.0000027	0.0269
100%	115	30	28.81	0.0000034	0.0344
100%	115	40	16.87	0.0000020	0.0202
100%	115	50	22.54	0.0000027	0.0269
100%	115	60	26.34	0.0000031	0.0315
115%	138	20	25.79	0.0000031	0.0308
85%	93.5	20	18.74	0.0000022	0.0224

Frequency Stability for WCDMA Band II

Operating Frequency:		1,880,000,000 Hz			
Channel:		9400			
Reference Voltage:		115 VAC			
Deviation Limit:		2.5 ppm			
Notes: Frequency Stability in WCDMA Band II Mode					
Voltage (%)	Voltage (VAC)	Temp (°C)	Frequency Error (Hz)	Deviation (%)	Deviation (ppm)
100%	115	-30	60.3	0.0000032	0.0321
100%	115	-20	54.59	0.0000029	0.0290
100%	115	-10	42.68	0.0000023	0.0227
100%	115	0	47.48	0.0000025	0.0253
100%	115	10	39.88	0.0000021	0.0212
100%	115	20	47.97	0.0000026	0.0255
100%	115	30	52.83	0.0000028	0.0281
100%	115	40	45.03	0.0000024	0.0240
100%	115	50	41.43	0.0000022	0.0220
100%	115	60	56.6	0.0000030	0.0301
115%	138	20	37.87	0.0000020	0.0201
85%	93.5	20	32.67	0.0000017	0.0174

10 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of $k = 2$, providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement uncertainty Table

Parameter	Uncertainty	Notes
Radiated emissions, 30 to 1000 MHz	+3.9dB	
Radiated emissions, 1 to 18 GHz	+4.2dB	
Radiated emissions, 18 to 40 GHz	+4.3dB	
Power Port Conducted emissions, 150kHz to 30 MHz	+2.8dB	

11 Revision History

Revision Level	Date	Report Number	Notes
0	1/10/2014	101483717LEX-001	Original Issue