

TEST RESULT SUMMARY

FCC PART 15 SUBPART C

Section 15.245

MANUFACTURER'S NAME	Bureau d'Electronique Appliquee (B.E.A) Inc.
NAME OF EQUIPMENT	K-Band Transceiver with Antennas
MODEL NUMBER	10.0599 10.0600 10.0603 10.0604 10.0605
MANUFACTURER'S ADDRESS	100 Enterprise Drive RIDC Park West Pittsburgh PA 15275
TEST REPORT NUMBER	WC403462.2 Rev2
TEST DATE	12, 17, 20 August & 23 October 2004


According to testing performed at TÜV Product Service Inc, the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in FCC Part 15

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

TÜV Product Service Inc, as an independent testing laboratory, declares that the equipment tested as specified above conforms to the requirements of FCC Part 15.

Date: 23 October 2004

Location: Taylors Falls MN
USA



G. S. Jakubowski
Tested By




T. K. Swanson
Reviewed By

Not Transferable

REVISION RECORD

REVISION	TOTAL NUMBER OF PAGES	DATE	DESCRIPTION
1	36	04 October 2004	Initial Release
2	43	23 October 2004	Revisions include: <ul style="list-style-type: none"> ▪ Changed “no emissions detected” statements on pages 10, A11, and A12. ▪ Added October 23 test date. ▪ Added data summary table on page A3. ▪ Added Appendix A page directory on page A2. ▪ Replaced band edge plots and added 4 more band edge plots. ▪ Changed ANSI C63.4 date to 2001.

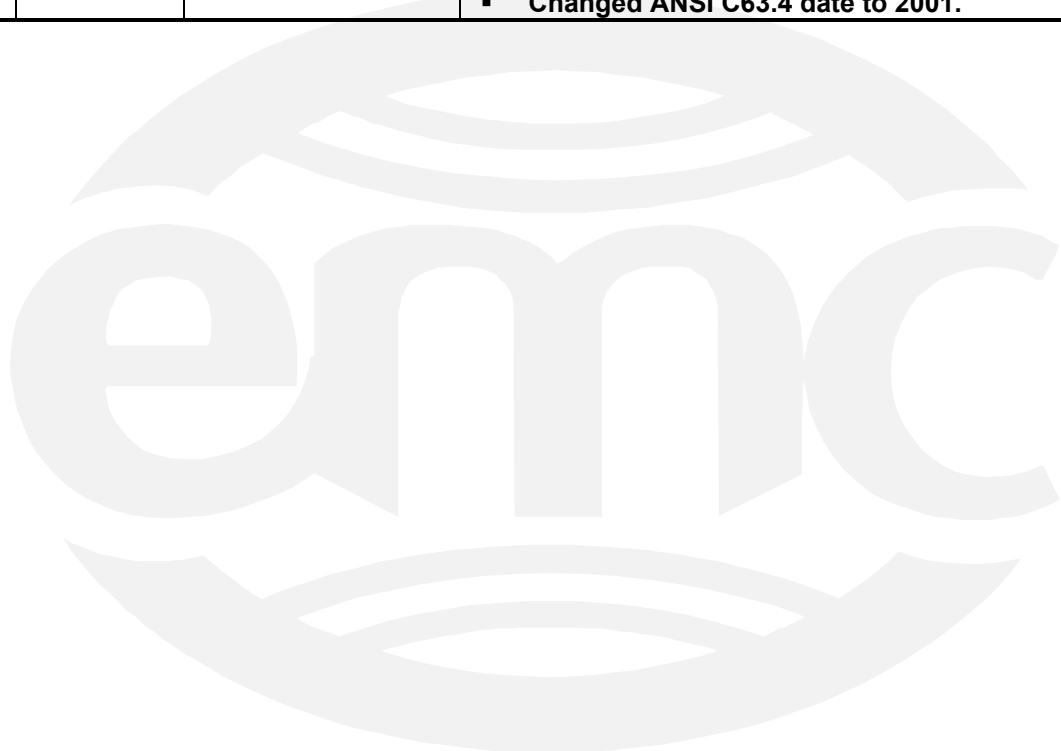

EMC EMISSION - TEST REPORT

Test Report File No. : **WC403462.2 Rev2** Date of issue: 23 October 2004

Model No. : **10.0599**
10.0600
10.0603
10.0604
10.0605

Product Name : **K-Band Transceiver with Antennas**

Applicant : **Bureau d'Electronique Appliquee (B.E.A) Inc.**

Manufacturer : **Bureau d'Electronique Appliquee (B.E.A) Inc.**

License holder : **Bureau d'Electronique Appliquee (B.E.A) Inc.**

Address : **100 Enterprise Drive RIDC Park West**
Pittsburgh PA 15275

Test Result : **Positive** **Negative**

Test Project Number Reference(s) : **WC403462.2 Rev2**

Total pages including Appendices : **43**

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.

TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

D I R E C T O R Y - E M I S S I O N S

		Page(s)
A)	Documentation	
	Test report	<u>1 - 11</u>
	Revision Record	<u>2</u>
	Directory	<u>3</u>
	Test Regulations	<u>4</u>
	Deviations from standard / Summary	<u>11</u>
	Test-setups (Photos)	<u>12</u>
	Test-setup (drawing)	<u>Appendix A</u>
B)	Test data	
	Conducted emissions 10/150 kHz - 30 MHz	<u>6</u>
	Radiated emissions 10 kHz - 30 MHz	<u>6</u>
	Radiated emissions 30 MHz - 1000 MHz	<u>7, 10</u>
	Interference power 30 MHz - 300 MHz	<u>7</u>
	Equivalent Radiated emissions 1 GHz - 25 GHz	<u>8, 10</u>
C)	Appendix A	
	Directory	<u>A2</u>
	Data Summary Table showing models & configurations tested	<u>A3</u>
	Test Data Sheets	<u>A4 – A22</u>
D)	Appendix B	
	Constructional Data Form(s) and/or Product Information Form(s)	<u>B1 – B7</u>
E)	Appendix C	
	Measurement Protocol	<u>C1 - C2</u>

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- EN 50081-1 / 1991
 - EN 55011 / 1998
 - w/Amendment A1:1999
 - EN 55013 / 1990
 - EN 55014 / 1987


 - EN 55014 / A2:1990
 - EN 55014 / 1993

 - EN 55015 / 1987
 - EN 55015 / A1: 1990
 - EN 55015 / 1993
 - EN 55022 / 1987
 - FCC Part 15 Subpart C Section 15.245
- Group 1
 - Class A

 - Household appliances and similar
 - Portable tools
 - Semiconductor devices

 - Household appliances and similar
 - Portable tools
 - Semiconductor devices

 - Class A
 - Class B

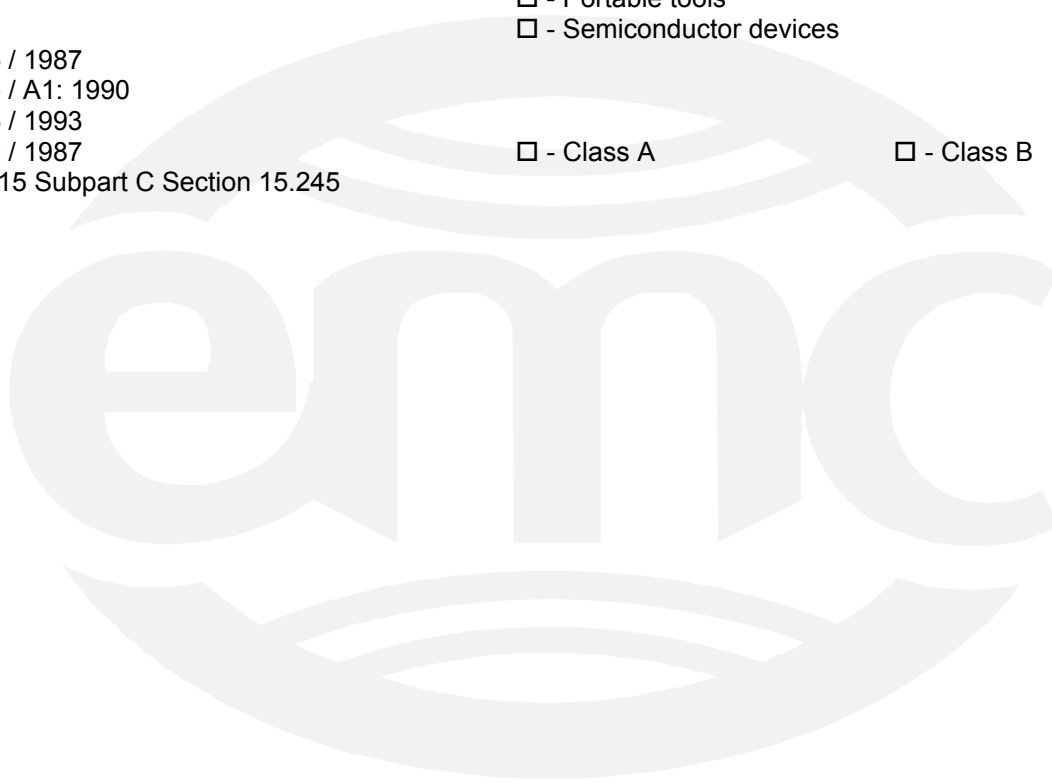

Environmental conditions in the lab:

	<u>Actual</u>
Temperature	: 23 °C
Relative Humidity	: 41 %
Atmospheric pressure	: 99.0 kPa
Power supply system	: 5 VDC

Sign Explanations:

- not applicable
- applicable



Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The *CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)* measurements were performed at the following test location:

- Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room
- New Brighton Lab Shielded Room

Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)

The *RADIATED EMISSIONS (MAGNETIC FIELD)* measurements were performed at the following test location:

- Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)

at a test distance of :

- 3 meters
- 30 meters

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *RADIATED EMISSIONS (ELECTRIC FIELD)* measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location:

- Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site) – NSA measurements made 2-03, due 2-05.
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)

at a test distance of :

- 3 meters
- 10 meters
- 30 meters

Test equipment used:

TUV ID	Model Number	Manufacturer	Description	Serial Number	Cal Due
<input checked="" type="checkbox"/> - 3204	EM-6917B	Electro-Metrics	Biconicalog Periodic	102	24-Oct-04
<input checked="" type="checkbox"/> - 8052	8566B	Hewlett-Packard	Spectrum Analyzer	2115a00853	14-Aug-05
<input checked="" type="checkbox"/> - 8051	85662A	Hewlett-Packard	Analyzer Display	2112A02220	14-Aug-05
<input checked="" type="checkbox"/> - 2682	85650A	Hewlett-Packard	Quasi-Peak Adapter	2811A01127	14-Aug-05
<input checked="" type="checkbox"/> - 2668	8447D	Electro-Mechanics (EMCO)	Preamplifier	1937A02209	Code B

Cal Code B = Calibration verification performed internally. Cal Code Y = Calibration not required when used with other calibrated equipment.

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Emissions Test Conditions: INTERFERENCE POWER

The *INTERFERENCE POWER* measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

- Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room
- New Brighton Lab Shielded Room

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *EQUIVALENT RADIATED EMISSIONS* measurements in the frequency range 1 GHz - 110 GHz were performed in a horizontal and vertical polarization at the following test location:

- Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room

at a test distance of:

- 1 meter
- 3 meters
- 10 meters

Test equipment used:

	TUV ID	Model Number	Manufacturer	Description	Serial Number	Cal Due
<input checked="" type="checkbox"/>	8052	8566B	Hewlett-Packard	Spectrum Analyzer	2115a00853	14-Aug-05
<input checked="" type="checkbox"/>	8051	85662A	Hewlett-Packard	Analyzer Display	2112A02220	14-Aug-05
<input checked="" type="checkbox"/>	2682	85650A	Hewlett-Packard	Quasi-Peak Adapter	2811A01127	14-Aug-05
<input checked="" type="checkbox"/>	3957	SL18B4020	Phase One Microwave	Preamplifier 1 – 18 GHz	0001	Code B
<input checked="" type="checkbox"/>	2075	3115	Electro-Mechanics (EMCO)	Ridge Guide Ant. 1-18 GHz	9001-3275	19-Nov-04
<input checked="" type="checkbox"/>	2127	11975A	Hewlett Packard	Amplifier 2- 8 GHz	2738A01200	Code B
<input checked="" type="checkbox"/>	2662	11970K	Hewlett-Packard	Harm Mixer – 18-26.5 GHz	2332A01170	7-11-06
<input checked="" type="checkbox"/>	2661	11970A	Hewlett-Packard	Harm Mixer – 26.5-40 GHz	2332A01861	7-11-06
<input checked="" type="checkbox"/>	2919	11970U	Hewlett-Packard	Harm Mixer – 40-60 GHz	3003A01395	7-11-06
<input checked="" type="checkbox"/>	2920	11970V	Hewlett-Packard	Harm Mixer – 50-75 GHz	2521A01172	10-23-04
<input checked="" type="checkbox"/>	2922	11970W	Hewlett-Packard	Harm Mixer – 75-110 GHz	2521A01336	10-23-04
<input checked="" type="checkbox"/>	2788	3116	Electro-Mechanics (EMCO)	Ridge Guide Ant 18-40 GHz	2005	7-11-05
<input checked="" type="checkbox"/>	2916	10-7025		Horn Antenna - 75-110 GHz		N/A
<input checked="" type="checkbox"/>	2917	15-7025		Horn Antenna – 50-75 GHz		N/A
<input checked="" type="checkbox"/>	2918	19-7025		Horn Antenna – 40-60 GHz		N/A

Cal Code B = Calibration verification performed internally.

Cal Code Y = Calibration not required when used with other calibrated equipment.

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Equipment Under Test (EUT) Test Operation Mode - Emission tests :

The device under test was operated under the following conditions during emissions testing:

- Standby
- Test program (H - Pattern)
- Test program (color bar)
- Test program (customer specific)
- Practice operation
- Normal Operating Mode
- _____

Configuration of the device under test:

- See Constructional Data Form in Appendix B - Page B2
- See Product Information Form in Appendix B - beginning on Page B3

The following peripheral devices and interface cables were connected during the measurement:

- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- _____ Type : _____

- unshielded power cable
- unshielded cables
- shielded cables MPS.No.: _____
- customer specific cables
- _____

Emission Test Results:

Fundamental Field Strength [15.245 (b)]

The requirements are - MET - NOT MET
 Minimum margin of compliance 14 dB at 24.12 GHz [15.245(b)]
 Remarks: The fundamental was measured to be 114.2 dBuV/m (512.86 mV/m) in peak mode compared to a limit of 127.95 dBuV/m (2500mV/m). See data summary table on page A3.

Harmonic Emissions [15.245 (b)(1)]

The requirements are - MET - NOT MET
 Minimum margin of compliance for Harmonics >10 dB at GHz [15.245(b)(1)]
 Remarks: No harmonic emissions were detected above the noise level of the measuring system. The noise level of the measuring system is a minimum of 10 dB below the limit.

Radiated Emissions outside of the specified frequency bands [15.245 (b)(3)]

The requirements are - MET - NOT MET
 Minimum margin of compliance for spurious emissions >10 dB at MHz [15.245(b)(3)]
 Remarks: No emissions were detected above the noise level of the measuring system. The noise level of the measuring system is a minimum of 10 dB below the limit.

Band Edge Compliance [15.245 (b)(3)]

The requirements are - MET - NOT MET
 Remarks: Allowed band is 24.075 GHz to 24.175 GHz. (See pages A15 to A22 for band edge plots).

DEVIATIONS FROM STANDARD:

None

GENERAL REMARKS:

SUMMARY:

The requirements according to the technical regulations are

- met

- **not** met.

The device under test does

- fulfill the general approval requirements mentioned on page 3.

- **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date: 12 August 2004

Testing End Date: 23 October 2004

- TÜV PRODUCT SERVICE INC -

Thomas K. Swanson

T. K. Swanson
Reviewed By

G. S. Jakubowski

Tested By:
G. S. Jakubowski

Test-setup photo(s):
Conducted emission 10/150 kHz - 30 MHz

Not Applicable

Test-setup photo(s):
Radiated emission 30 MHz - 110000 MHz

Refer to the Test Setup Submittal Exhibit



Appendix A

Test Data Sheets



Appendix A Page Directory

Assembly P/N	Transceiver	Antenna	Fundamental Frequency & Power Page number(s)	Band Edge Compliance Plot Page number
10.0599	M/A COM Microwave Transceiver	41.4285 (1x3)	4	15
10.0599	BEA Microwave Transceiver	41.4284 (2x3)	5	16
10.0600	M/A COM Microwave Transceiver	41.4285 (1x3)	6	17
10.0600	BEA Microwave Transceiver	41.4284 (2x3)	7	18
10.0603	M/A COM Microwave Transceiver	41.4771 (3x3)	8	19
10.0604	M/A COM Microwave Transceiver	41.4285 (1x3)	9	20
10.0604	BEA Microwave Transceiver	41.4771 (3x3)	10	21
10.0605	BEA Microwave Transceiver	41.4771 (3x3)	11	22

Data summary table
Fundamental Frequency and Power results

Assembly P/N	Transceiver	Antenna	Fundamental Frequency	Power	Power Limit	Margin of compliance
10.0599	M/A COM Microwave Transceiver	41.4285 (1x3)	24.122 GHz	111 dBuV/m	128 dBuV/m	17 dB
10.0599	BEA Microwave Transceiver	41.4284 (2x3)	24.124 GHz	112.4 dBuV/m	128 dBuV/m	15.6 dB
10.0600	M/A COM Microwave Transceiver	41.4285 (1x3)	24.125 GHz	110.6 dBuV/m	128 dBuV/m	17.4 dB
10.0600	BEA Microwave Transceiver	41.4284 (2x3)	24.122 GHz	112.0 dBuV/m	128 dBuV/m	16 dB
10.0603	M/A COM Microwave Transceiver	41.4771 (3x3)	24.121 GHz	114.2 dBuV/m	128 dBuV/m	13.8 dB
10.0604	M/A COM Microwave Transceiver	41.4285 (1x3)	24.123 GHz	110.4 dBuV/m	128 dBuV/m	17.6 dB
10.0604	BEA Microwave Transceiver	41.4771 (3x3)	24.127 GHz	112.7 dBuV/m	128 dBuV/m	15.3 dB
10.0605	BEA Microwave Transceiver	41.4771 (3x3)	24.122 GHz	113.5 dBuV/m	128 dBuV/m	14.5 dB

Fundamental Frequency & Power per FCC Part 15 Subpart C Sec. 15.245

Customer: BEA EUT Description: 24GHz Transceiver Notes: M/A com xcvr, Eagle 3x1 antenna, Single mixer, Sample 3

EUT Model #: 10.0599 with M/A com Xcvt EUT Serial #: n/a EUT Power: 5VDC


Test Report #: WC403462 Test Area: LTS Distance: 3 meters Date: 12 Aug, 2004

MKR 24.122 30 GHz
65.40 dB μ V

hp REF 65.7 dB μ V HARMONIC 6L

10 dB/

CNVLOSS
16.7
dB

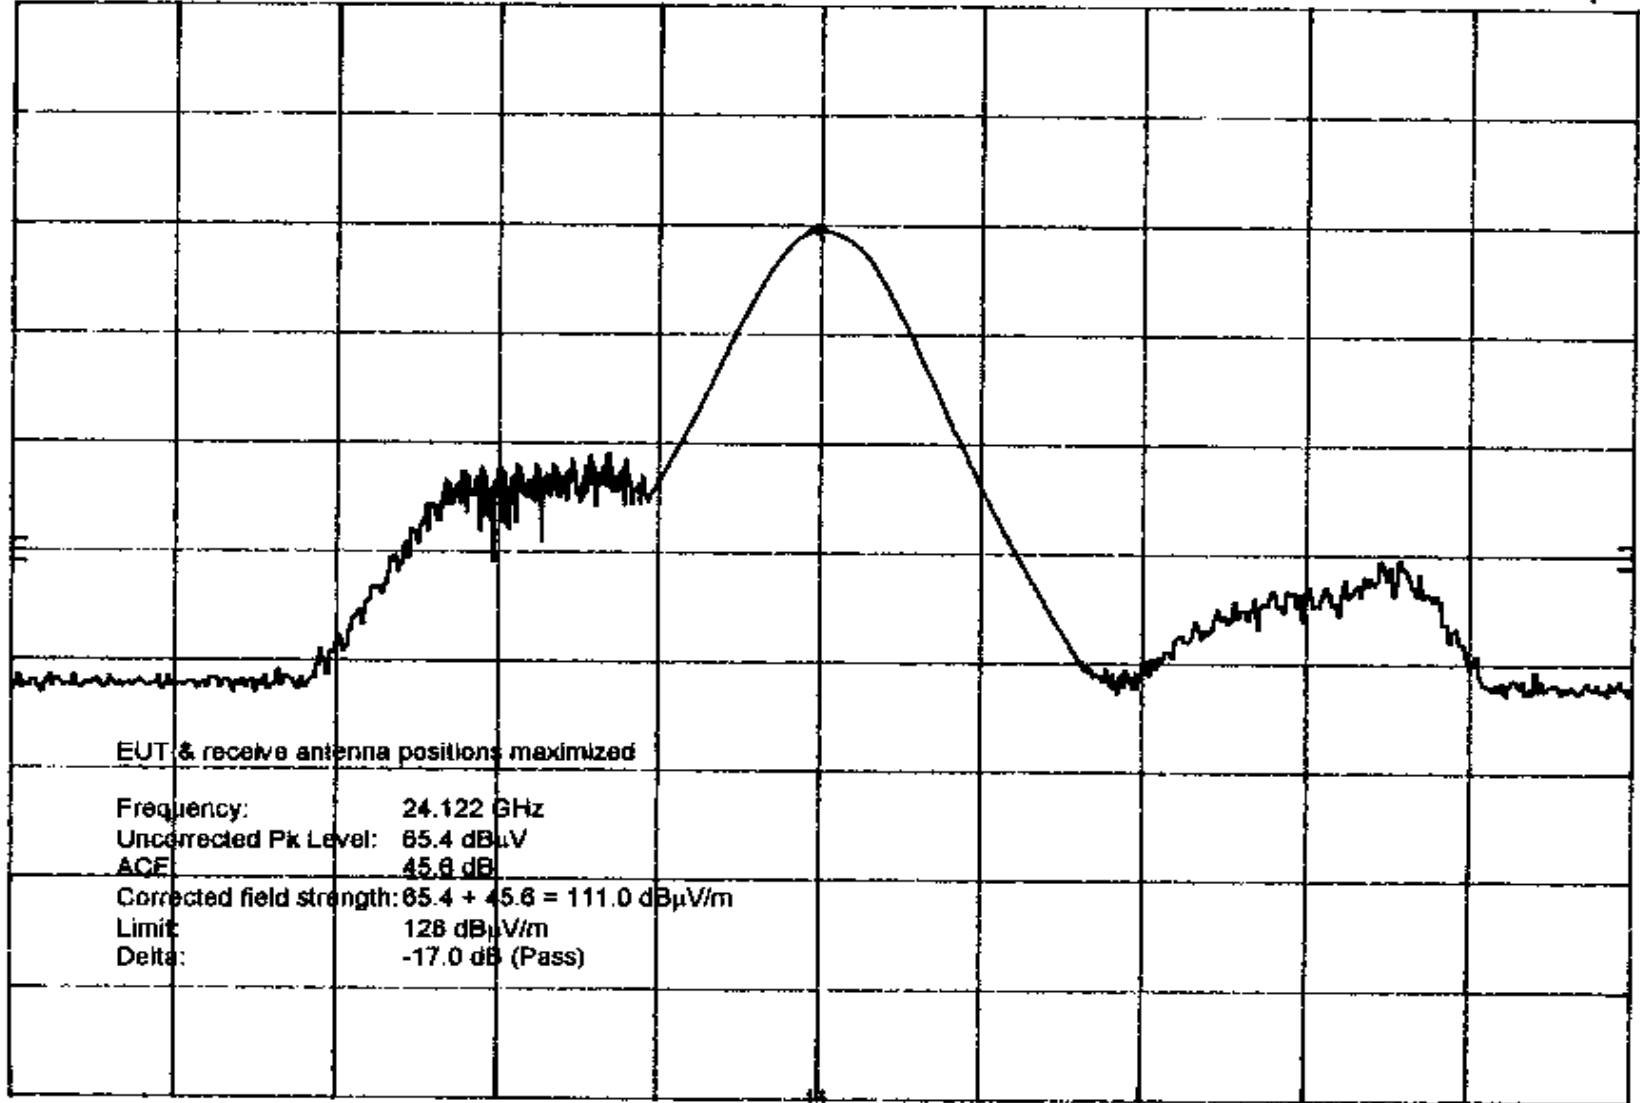

CENTER 24.122 3 GHz
RES BW 1 MHz

VBW 300 kHz

SPAN 20.0 MHz
SWP 20.0 msec

Fundamental Frequency & Power per FCC Part 15 Subpart C Sec. 15.245

Customer: BEA EUT Description: 24GHz Transceiver Notes: BEA xcvr, Eagle 3x2 antenna, Single mixer, *SAMPLE 12*

EUT Model #: 10.0599 w/BEA Xcvt EUT Serial #: n/a EUT Power: 5VDC


Test Report #: WC403462 Test Area: LTS Distance: 3 meters Date: 12 Aug, 2004

MKR 24.124 20 GHz
66.80 dB μ V

hp REF 85.7 dB μ V HARMONIC 6L

10 dB/

CNVLOSS
16.7
dB

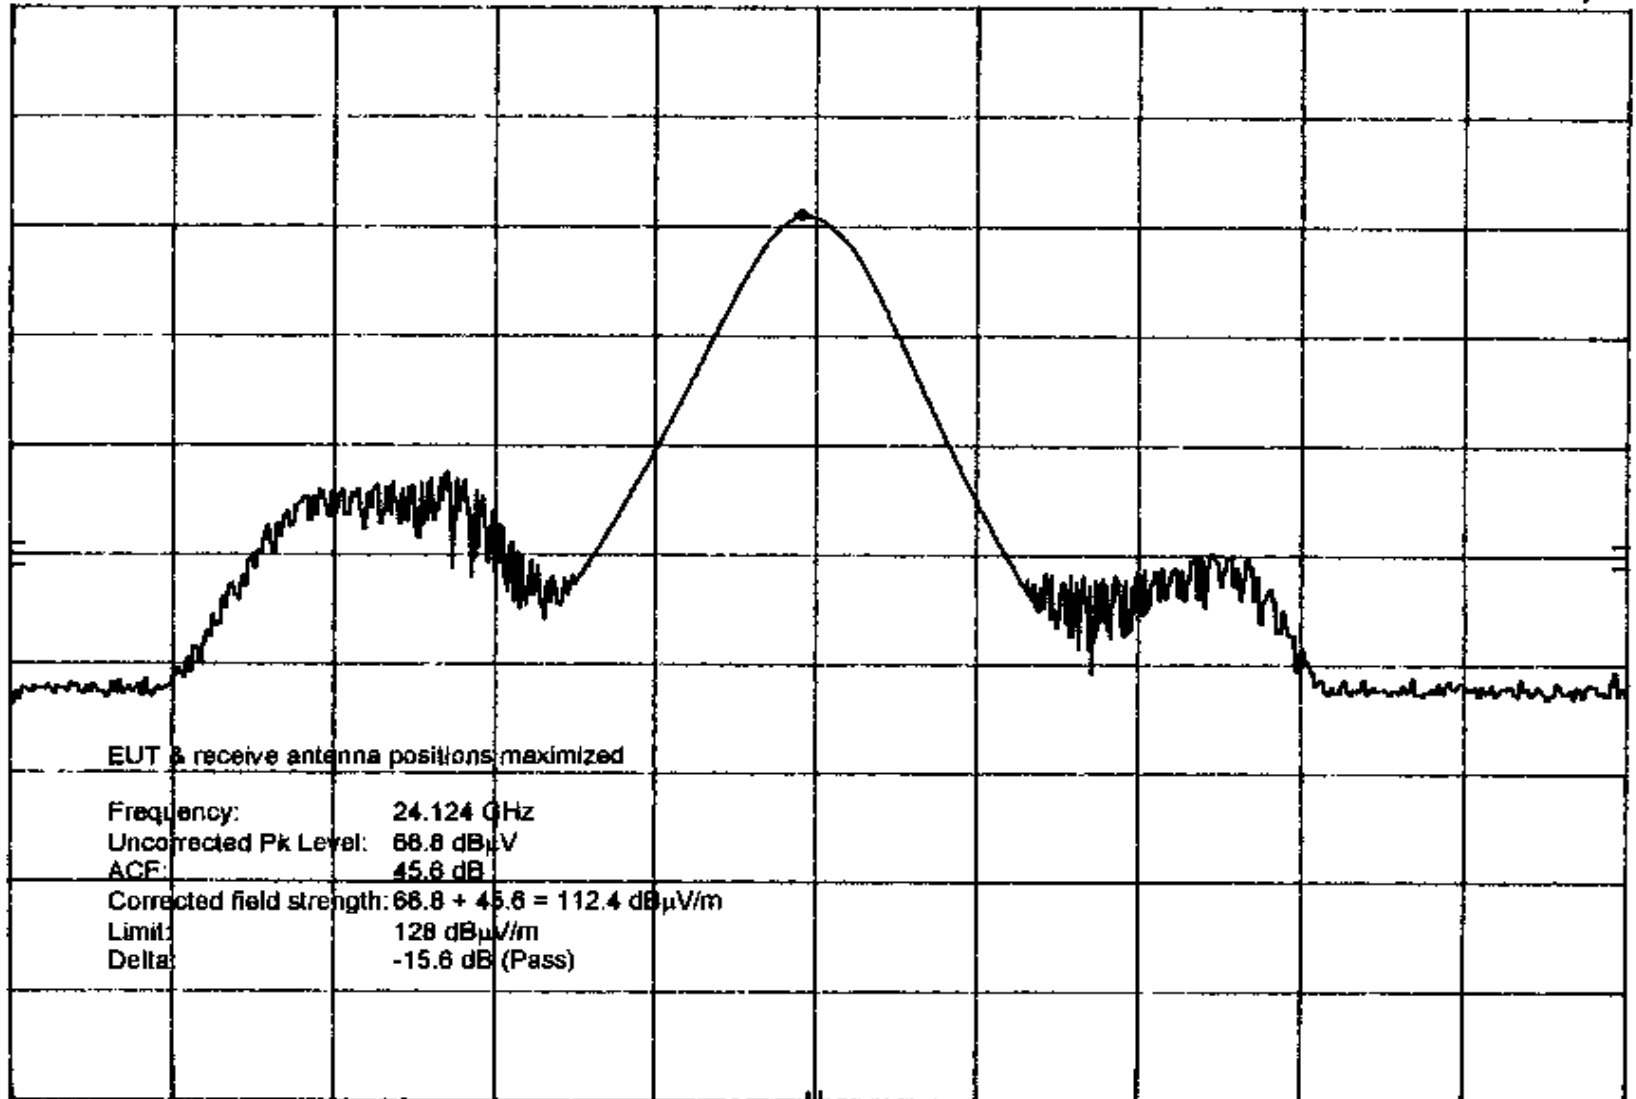

CENTER 24.124 3 GHz
RES BW 1 MHz

VBW 300 kHz

SPAN 20.0 MHz
SWP 20.0 msec

Fundamental Frequency & Power per FCC Part 15 Subpart C Sec. 15.245

Customer: BEA EUT Description: 24GHz Transceiver Notes: M/A com xcvr, Eagle 3x1 antenna, Dual mixer, Sample 1

EUT Model #: 10.0600 with M/A com Xcvr EUT Serial #: n/a EUT Power: 5VDC


Test Report #: WC403462 Test Area: LTS Distance: 3 meters Date: 12 Aug, 2004

MKR 24.125 03 GHz
65.00 dB μ V

hp REF 65.7 dB μ V HARMONIC 6L

10 dB/

CNVLOSS
16.7
dB

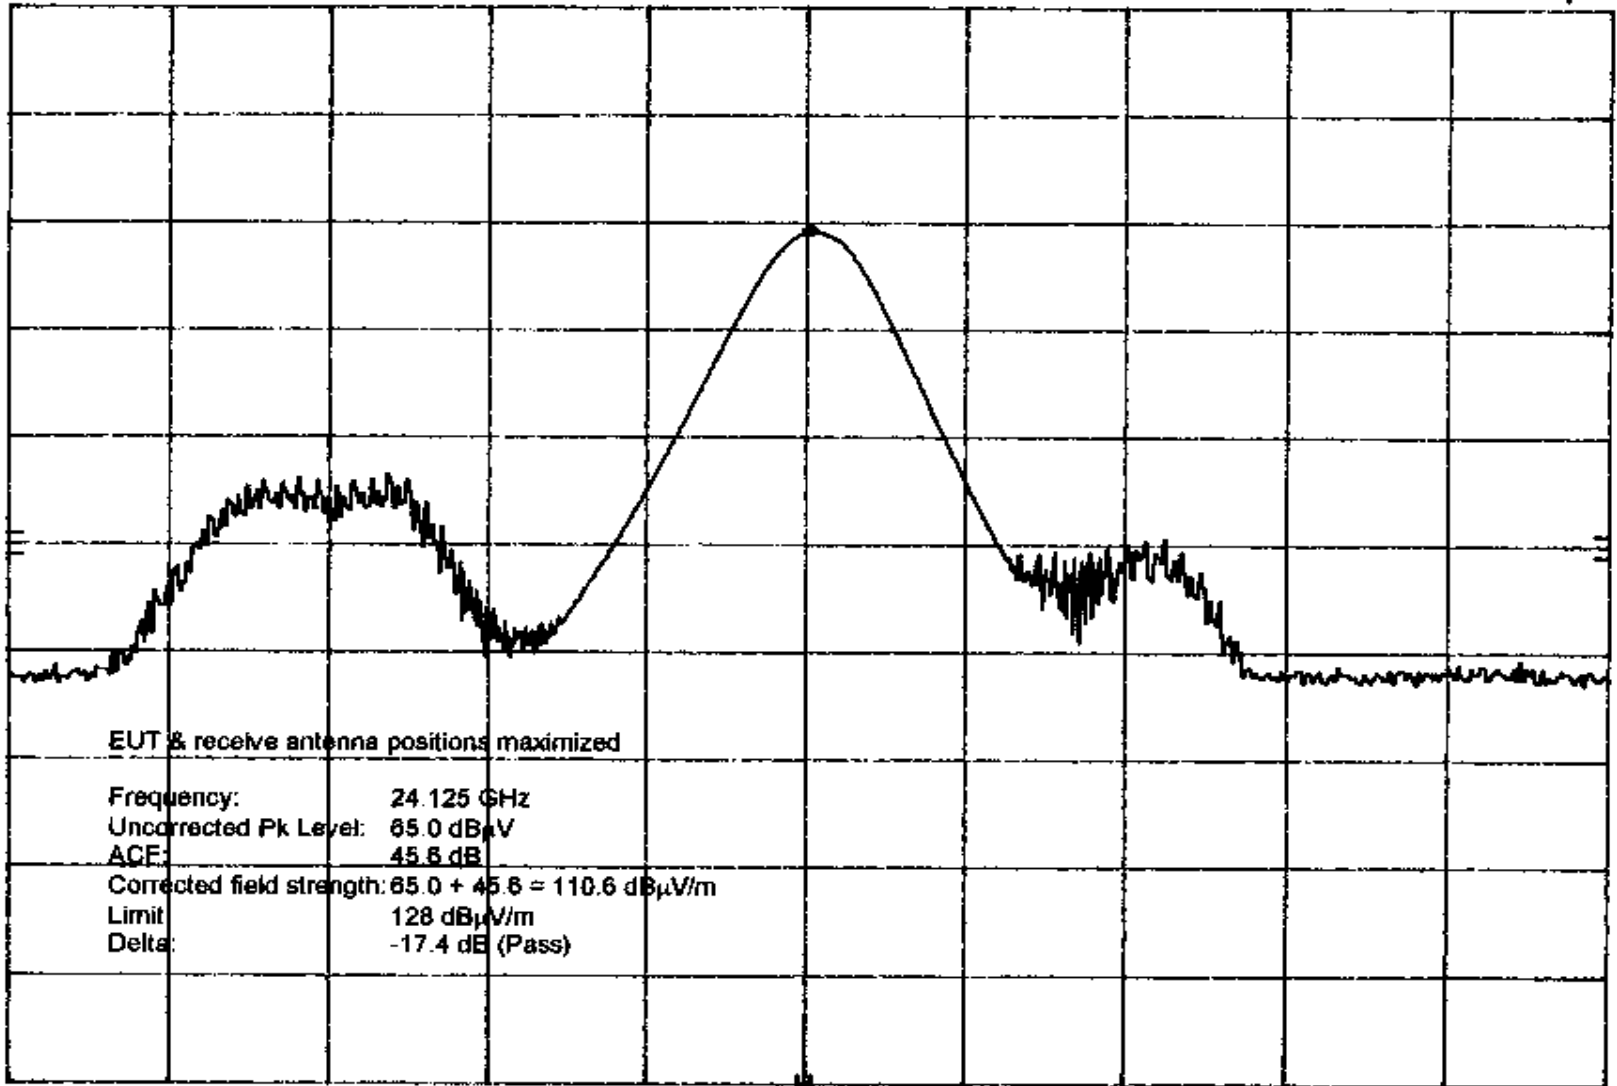

EUT & receive antenna positions maximized

Frequency: 24.125 GHz
Uncorrected Pk Level: 65.0 dB μ V
ACE: 45.8 dB
Corrected field strength: $65.0 + 45.8 = 110.6$ dB μ V/m
Limit: 128 dB μ V/m
Delta: -17.4 dB (Pass)

CENTER 24.124 9 GHz
RES BW 1 MHz

VBW 300 kHz

SPAN 20.0 MHz
SWP 20.0 msec

Fundamental Frequency & Power per FCC Part 15 Subpart C Sec. 15.245

Customer: BEA EUT Description: 24GHz Transceiver Notes: BEA xcvr, Eagle 3x2 antenna, Dual mixer, Sample 9


EUT Model #: 10.0600 w/BEA Xcvt EUT Serial #: n/a EUT Power: 5VDC

Test Report #: WC403462 Test Area: LTS Distance: 3 meters Date: 12 Aug, 2004

MKR 24.121 81 GHz
66.40 dB μ V

hp
10 dB/

CNVLOSS
16.7
dB

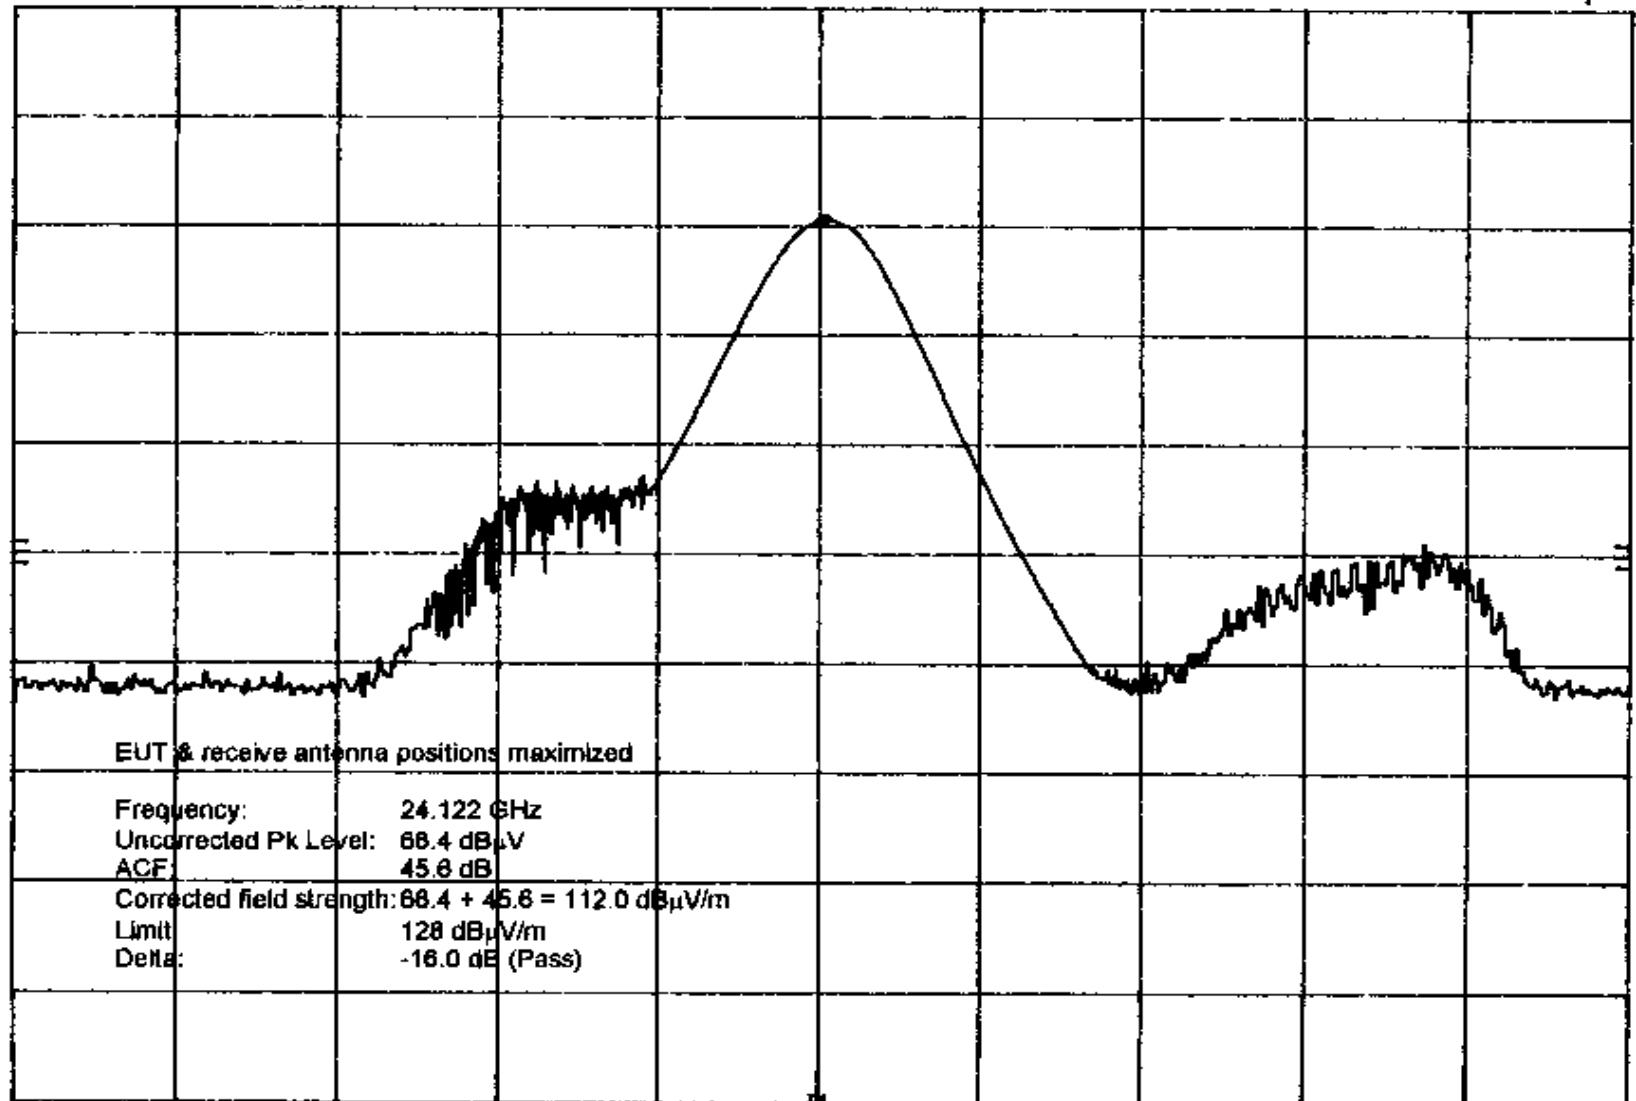

CENTER 24.121 7 GHz
RES BW 1 MHz

VBW 300 kHz

SPAN 20.0 MHz
SWP 20.0 msec

Fundamental Frequency & Power per FCC Part 15 Subpart C Sec. 15.245

Customer: BEA

EUT Description: 24GHz Transceiver

Notes: M/A com xcvr, Eagle 3x3 antenna, Single mixer, *SAMPLE 5*

EUT Model #: 10.0603 w/BEA Xcvt

EUT Serial #: n/a

EUT Power: 5VDC

Test Report #: WC403462

Test Area: LTS

Distance: 3 meters

Date: 12 Aug, 2004


MKR 24.120 74 GHz

68.60 dB μ V

hp
10 dB/

REF 65.7 dB μ V HARMONIC 6L

CNVLOSS
16.7
dB

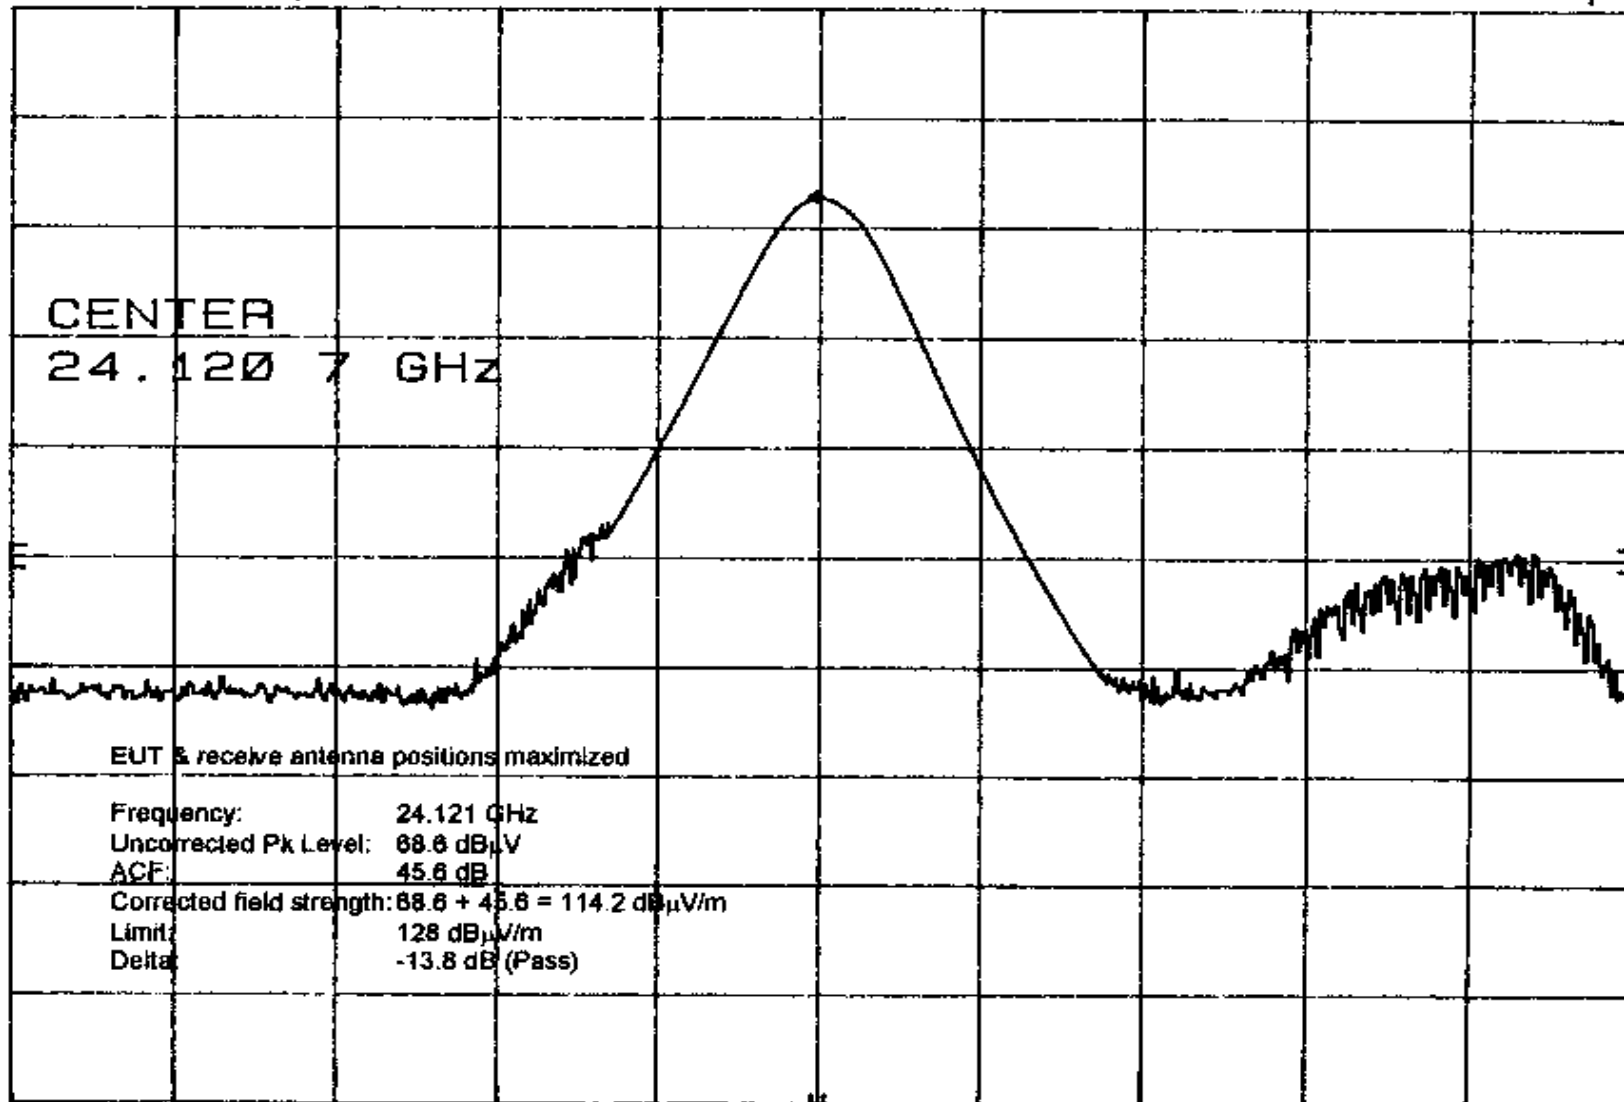

CENTER 24.120 7 GHz
RES BW 1 MHz

VBW 300 kHz

SPAN 20.0 MHz
SWP 20.0 msec

Fundamental Frequency & Power per FCC Part 15 Subpart C Sec. 15.245

Customer: BEA EUT Description: 24GHz Transceiver Notes: M/A com xcvr, Falcon 3x1 antenna, Dual mixer, Sample 6

EUT Model #: 10.0604 with M/A com Xcvr EUT Serial #: n/a EUT Power: 5VDC

Test Report #: WC403462 Test Area: LTS Distance: 3 meters Date: 12 Aug, 2004

MKR 24.123 14 GHz


64.80 dB μ V

hp REF 85.7 dB μ V HARMONIC 6L

10 dB/

CNVLOSS

16.7
dB

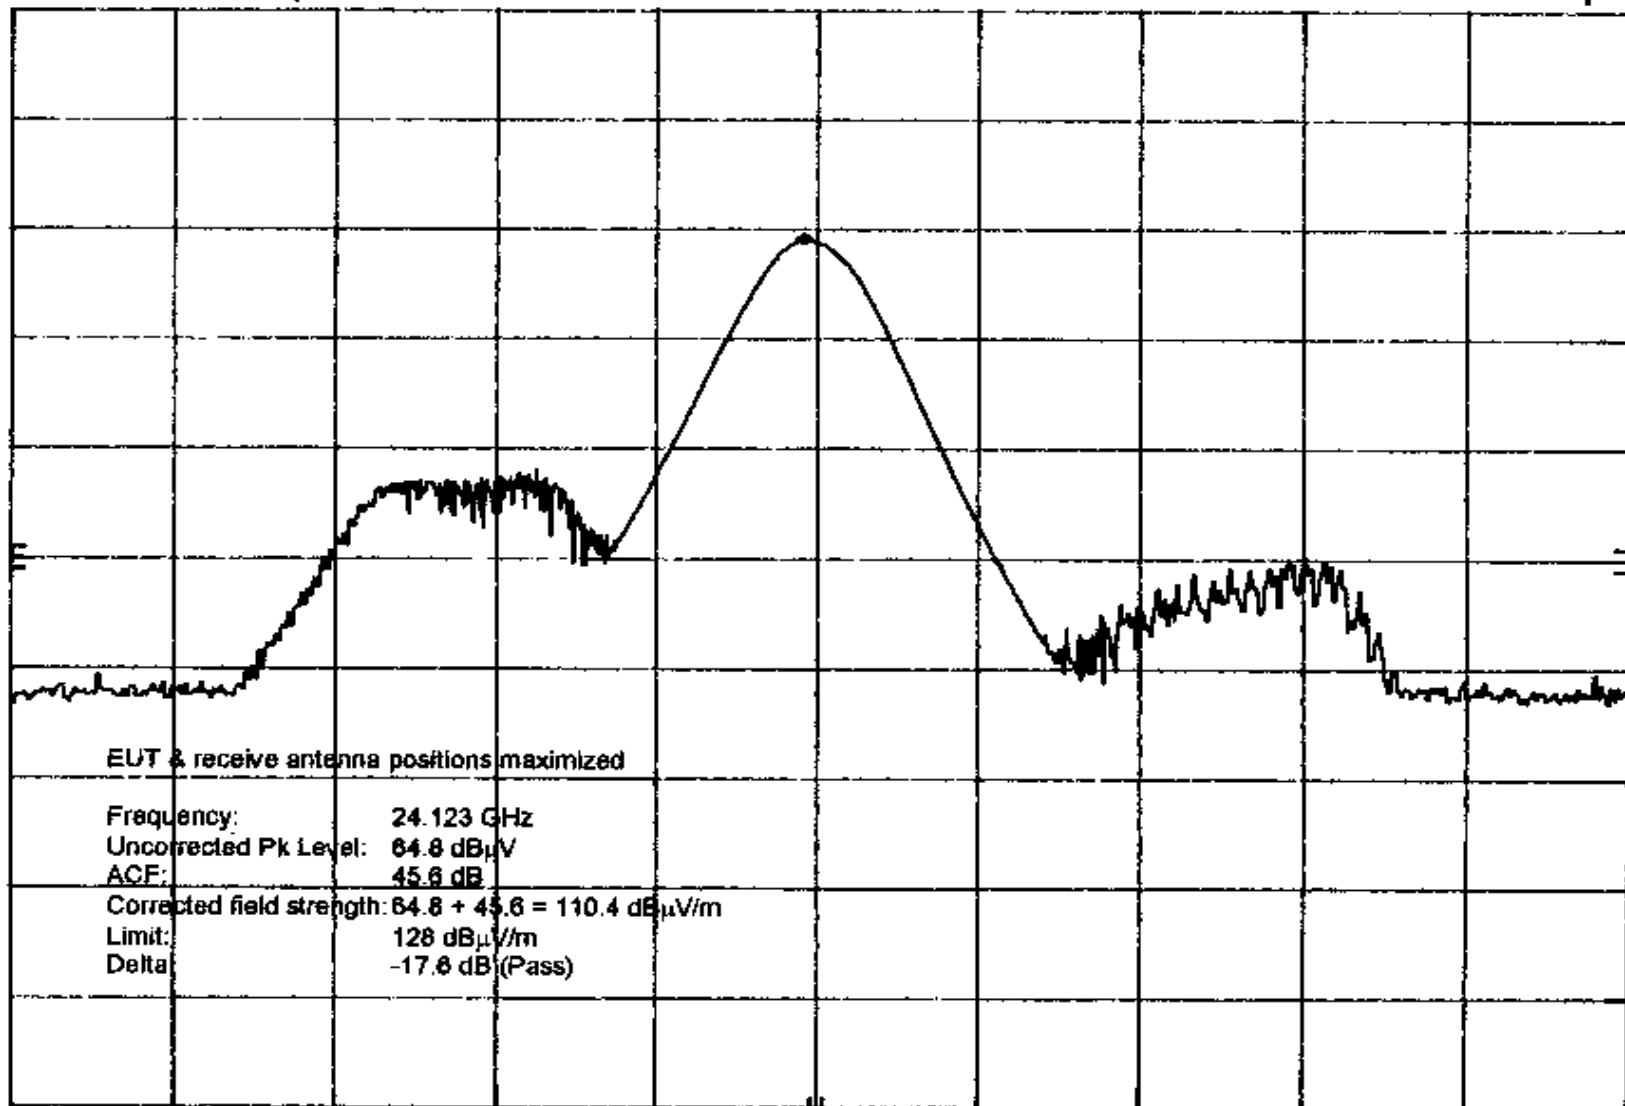

CENTER 24.123 3 GHz

RES BW 1 MHz

VBW 300 KHz

SPAN 20.0 MHz


SWP 20.0 msec

Fundamental Frequency & Power per FCC Part 15 Subpart C Sec. 15.245

Customer: BEA EUT Description: 24GHz Transceiver Notes: BEA xcvr, Falcon 3x3 antenna, Dual mixer, Sample 14
EUT Model #: 10.0604 with BEA Xcvr EUT Serial #: n/a EUT Power: 5VDC
Test Report #: WC403462 Test Area: LTS Distance: 3 meters Date: 12 Aug, 2004

MKR 24.126 62 GHz
67.10 dB μ V

hp
REF 85.7 dB μ V
HARMONIC 6L
10 dB/
CNVLOSS
16.7
dB

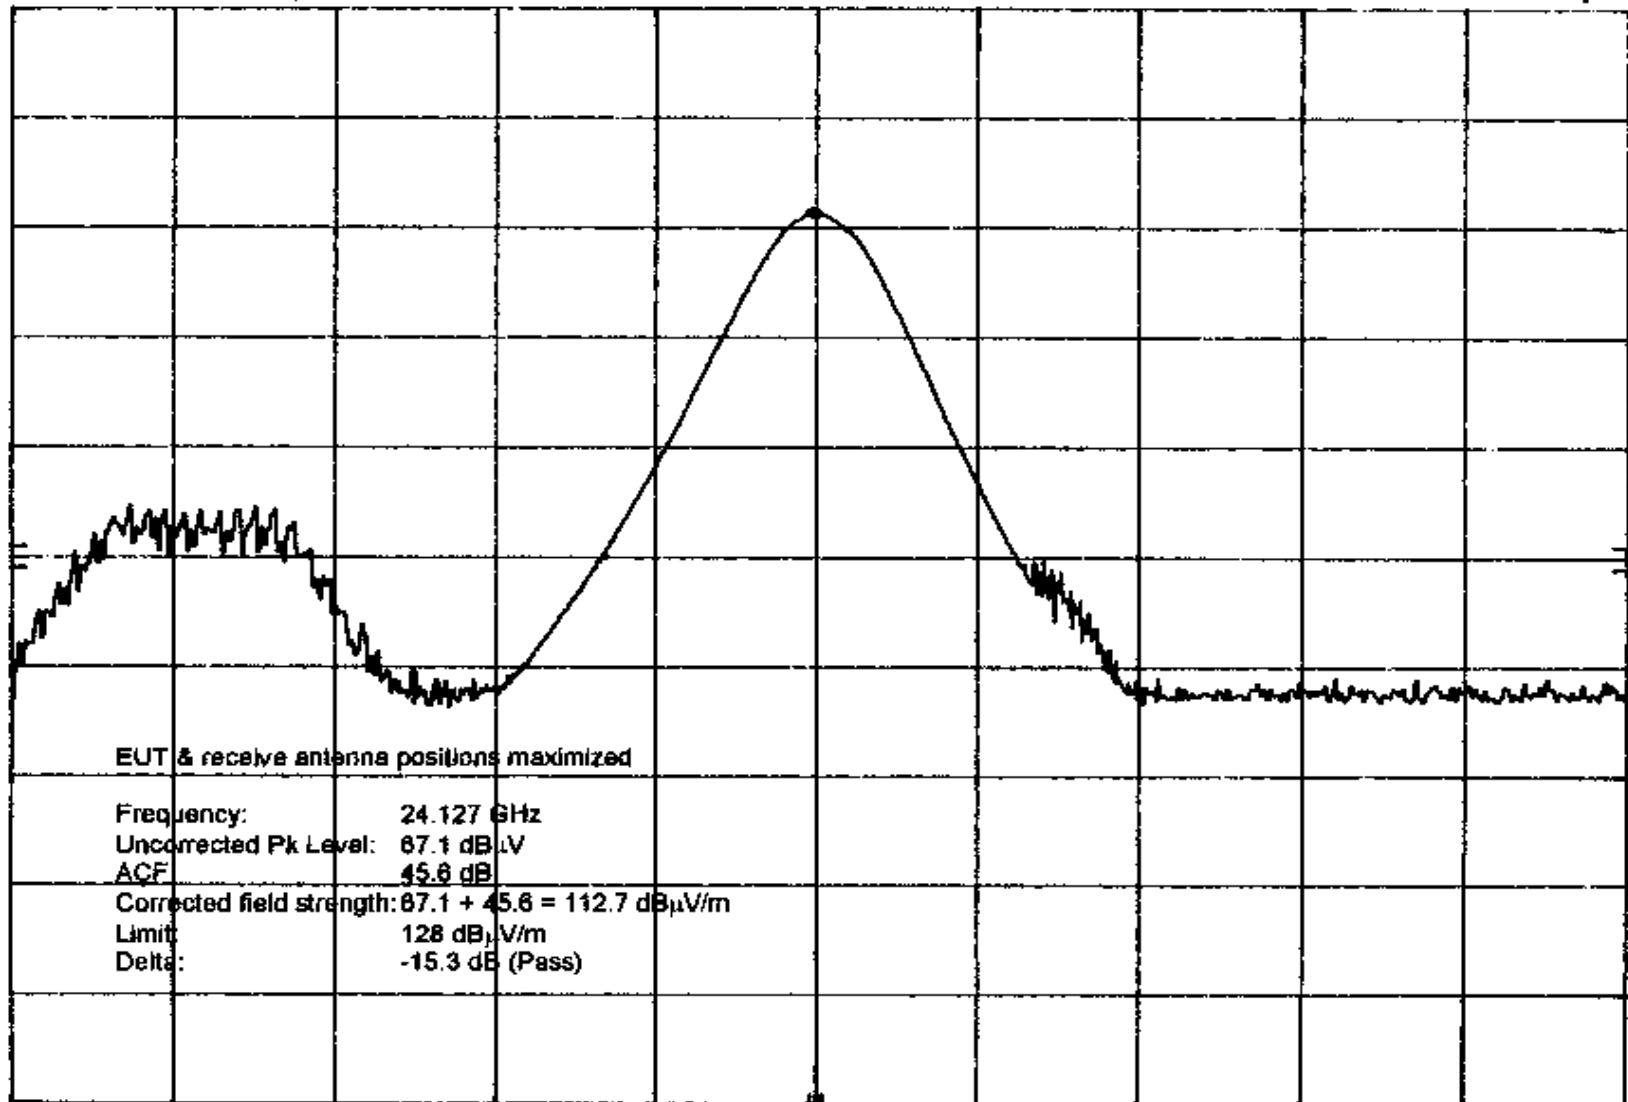

CENTER 24.126 6 GHz SPAN 20.0 MHz
RES BW 1 MHz VBW 300 kHz SWP 20.0 msec

Fundamental Frequency & Power per FCC Part 15 Subpart C Sec. 15.245

Customer: BEA EUT Description: 24GHz Transceiver Notes: BEA xcvr, Eagle 3x3 antenna, Dual mixer, *SAMPLE 11*


EUT Model #: 10.0605 w/BEA Xcvr EUT Serial #: n/a EUT Power: 5VDC

Test Report #: WC403462 Test Area: LTS Distance: 3 meters Date: 12 Aug, 2004

MKR 24.121 52 GHz
67.90 dB μ V

hp
10 dB/
CNVLOSS
16.7
dB

REF 85.7 dB μ V HARMONIC 6L

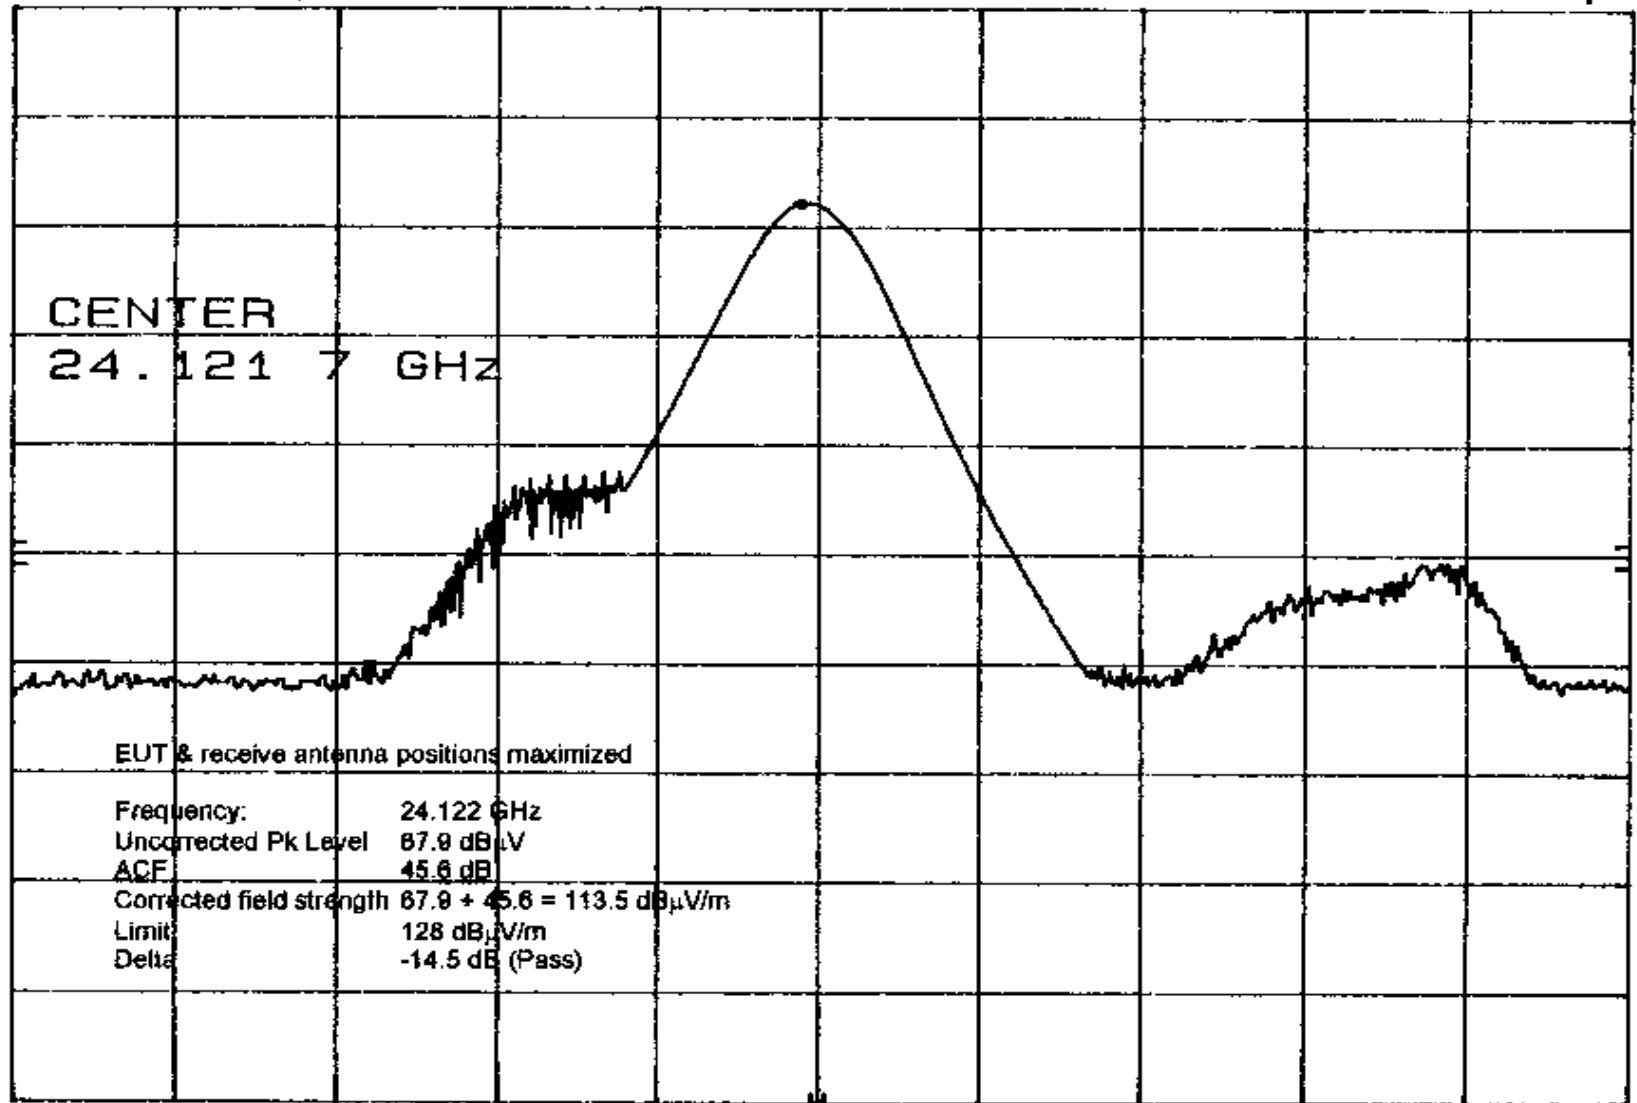

CENTER 24.121 7 GHz
RES BW 1 MHz

VBW 300 kHz

SPAN 20.0 MHz
SWP 20.0 msec

RADIATED EMISSIONS



Test Report #: WC403432 Test Area: STS - 3 meters
EUT Model #: 10.0605 w/BEA xcvr Date: 8/6/04
EUT Serial #: n/a EUT Power: 5VDC Temperature: 23.0 °C
Test Method: FCC Part 15 Subpart C Sec. 15.245 Air Pressure: 99.0 kPa
Customer: B.E.A Rel. Humidity: 38.0 %

EUT Description: 24GHz Xcvr

Notes: BEA Xcvr, Eagle 3x3 Antenna, Dual Mixer

Data File Name: _____ Page: 1

Fundamental:

Measurement Distance: 3 meters
Fundamental Signal: 24.118GHz
Uncorrected Peak Level: 67.9dBuV (Maximized EUT / Antenna orientation)
ACF: 45.6dB/m
Corrected Field Strength: 67.9dBuV + 45.6dB ACF = 113.5dBuV/m Pk
Limit: 128dBuV/m
Delta From Limit: -14.5dB (Pass)

Tested by: G Jakubowski

Printed



Signature

RADIATED EMISSIONS



Test Report #: WC403462 Run 1 Test Area: STS
 EUT Model #: [8 different models, see notes] Date: 8/20/04
 EUT Serial #: n/a EUT Power: 5 VDC Temperature: 23.0 °C
 Test Method: FCC Part 15 subpart C sec. 15.245 Air Pressure: 99.0 kPa
 Customer: BEA Rel. Humidity: 35.0 %

EUT Description: 24GHz Radar

Notes: _____

Data File Name: 3462 30-1000 re.dat Page: 1 of 1

List of measurements for run #: 1

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC-B <1GHz 3m	DELTA2
All 8 samples tested						
Notes: Model nos. - 10.0600 w/BEA, 10.0599 w/BEA, 10.0605 w/BEA, 10.0604 w/BEA, 10.0600 w/ M/A com 10.0599 w/ M/a com, 10.0603 w/ M/A com, 10.0604 w/ M/A com						
No emissions detected above the noise level from 30MHz to 1000 MHz. The system noise level is a minimum of 10 dB below the Limit from 30 MHz to 1000 MHz.						
EUT rotated 360 degrees, receive antenna both horizontal & vertical, 1 to 4 meters high						

Tested by: G Jakubowski

 Printed



 Signature

Reviewed by: TKS

 Printed



 Signature

RADIATED EMISSIONS



Test Report #: WC403462 Run 1 Test Area: LTS
 EUT Model #: [8 models, see notes] Date: 8/20/04
 EUT Serial #: n/a EUT Power: 5 VDC Temperature: 23.0 °C
 Test Method: FCC Part 15 subpart C sec. 15.245 Air Pressure: 99.0 kPa
 Customer: BEA Rel. Humidity: 41.0 %

EUT Description: 24GHz Radar

Notes: _____

Data File Name: 3462 01 RE 18-110GHz.dat Page: 1 of 1

List of measurements for run #: 1

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC B >1GHz 3m	DELTA2
All 8 samples tested						
Notes: Model nos. - 10.0600 w/BEA, 10.0599 w/BEA, 10.0605 w/BEA, 10.0604 w/BEA, 10.0600 w/ M/A com 10.0599 w/ M/a com, 10.0603 w/ M/A com, 10.0604 w/ M/A com						
No emissions detected 1GHz to 18GHz above the noise level. The noise level is a minimum of 10 dB below the limit. EUT rotated 360 degrees, receive antenna both horizontal & vertical, 1 to 4 meters high						
Using harmonic mixer & horn combinations, Other than the Fundamental, No emissions detected 18 GHz to 110 GHz above the noise level. The noise level is a minimum of 10 dB below the limit.						
See plots for fundamental power levels, frequency, & BW						

Tested by: G Jakubowski


 Printed



 Signature


Reviewed by: TKS


 Printed





 Signature


-50 dBc Band Edge - Model 10.0599 with M/A Xcvr - Test Distance <1 M - 23 October 2004

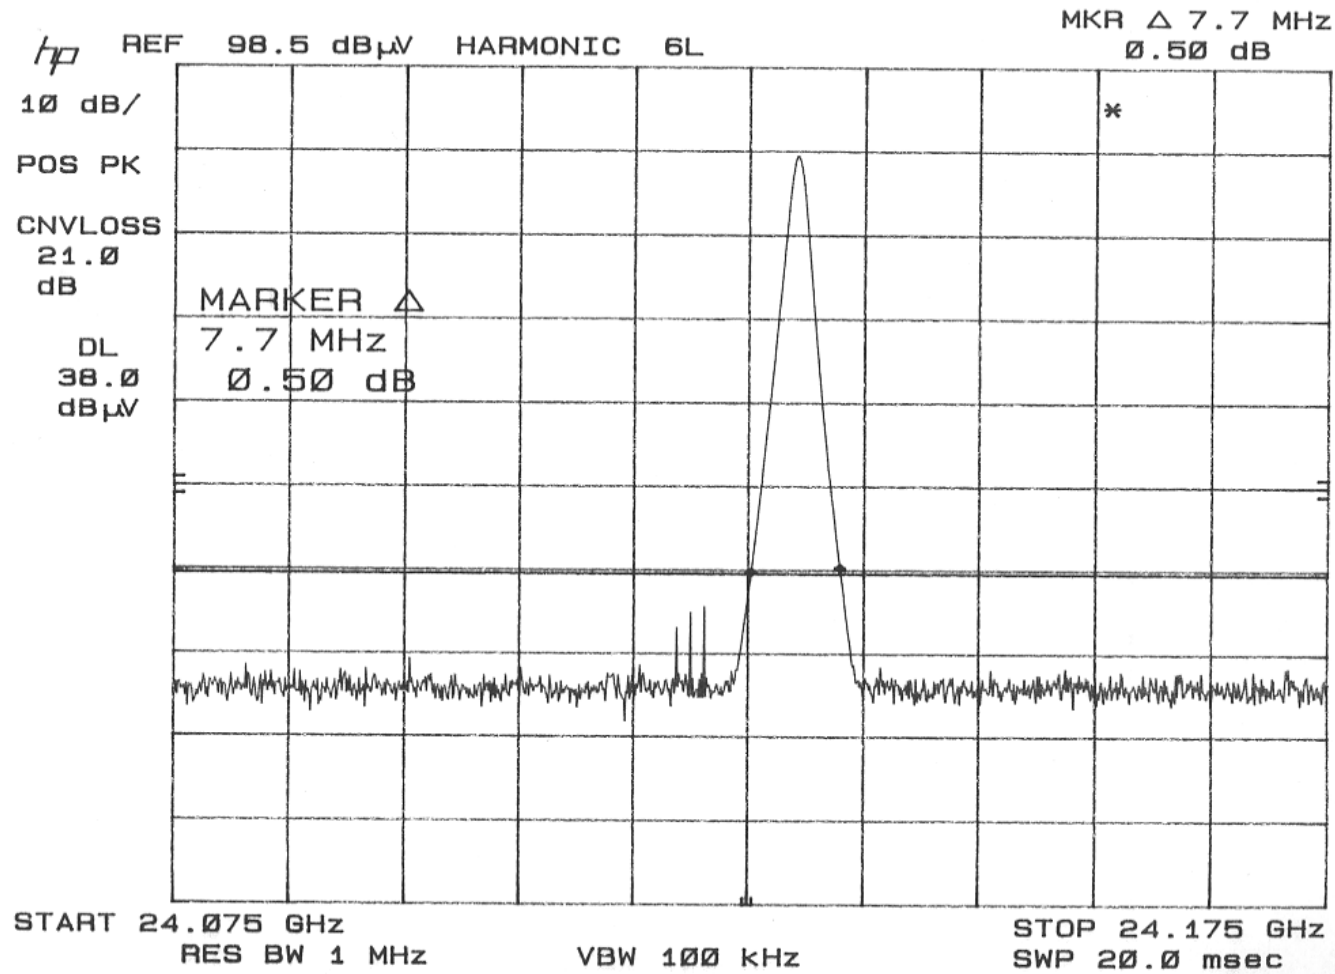

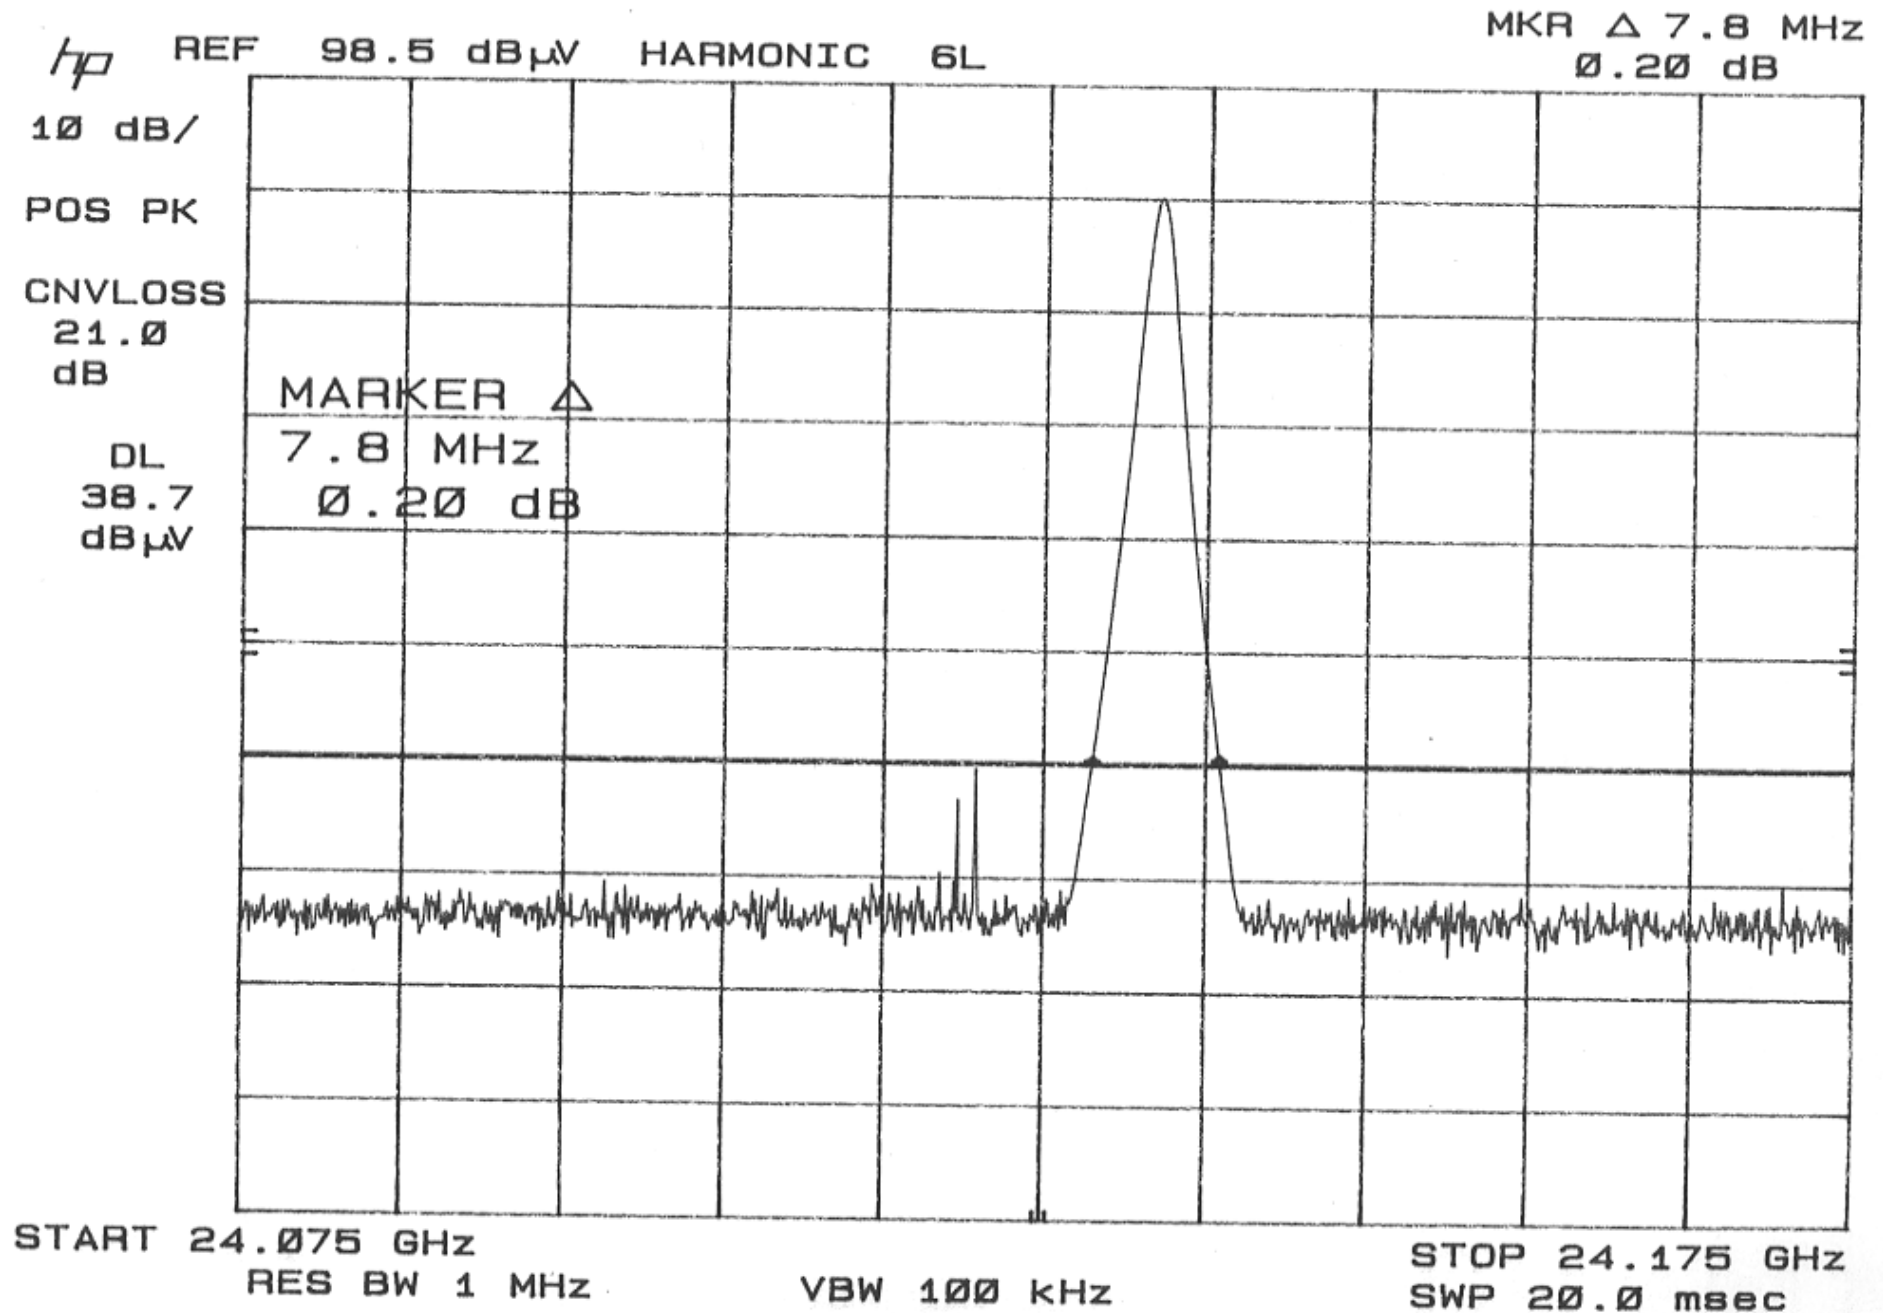


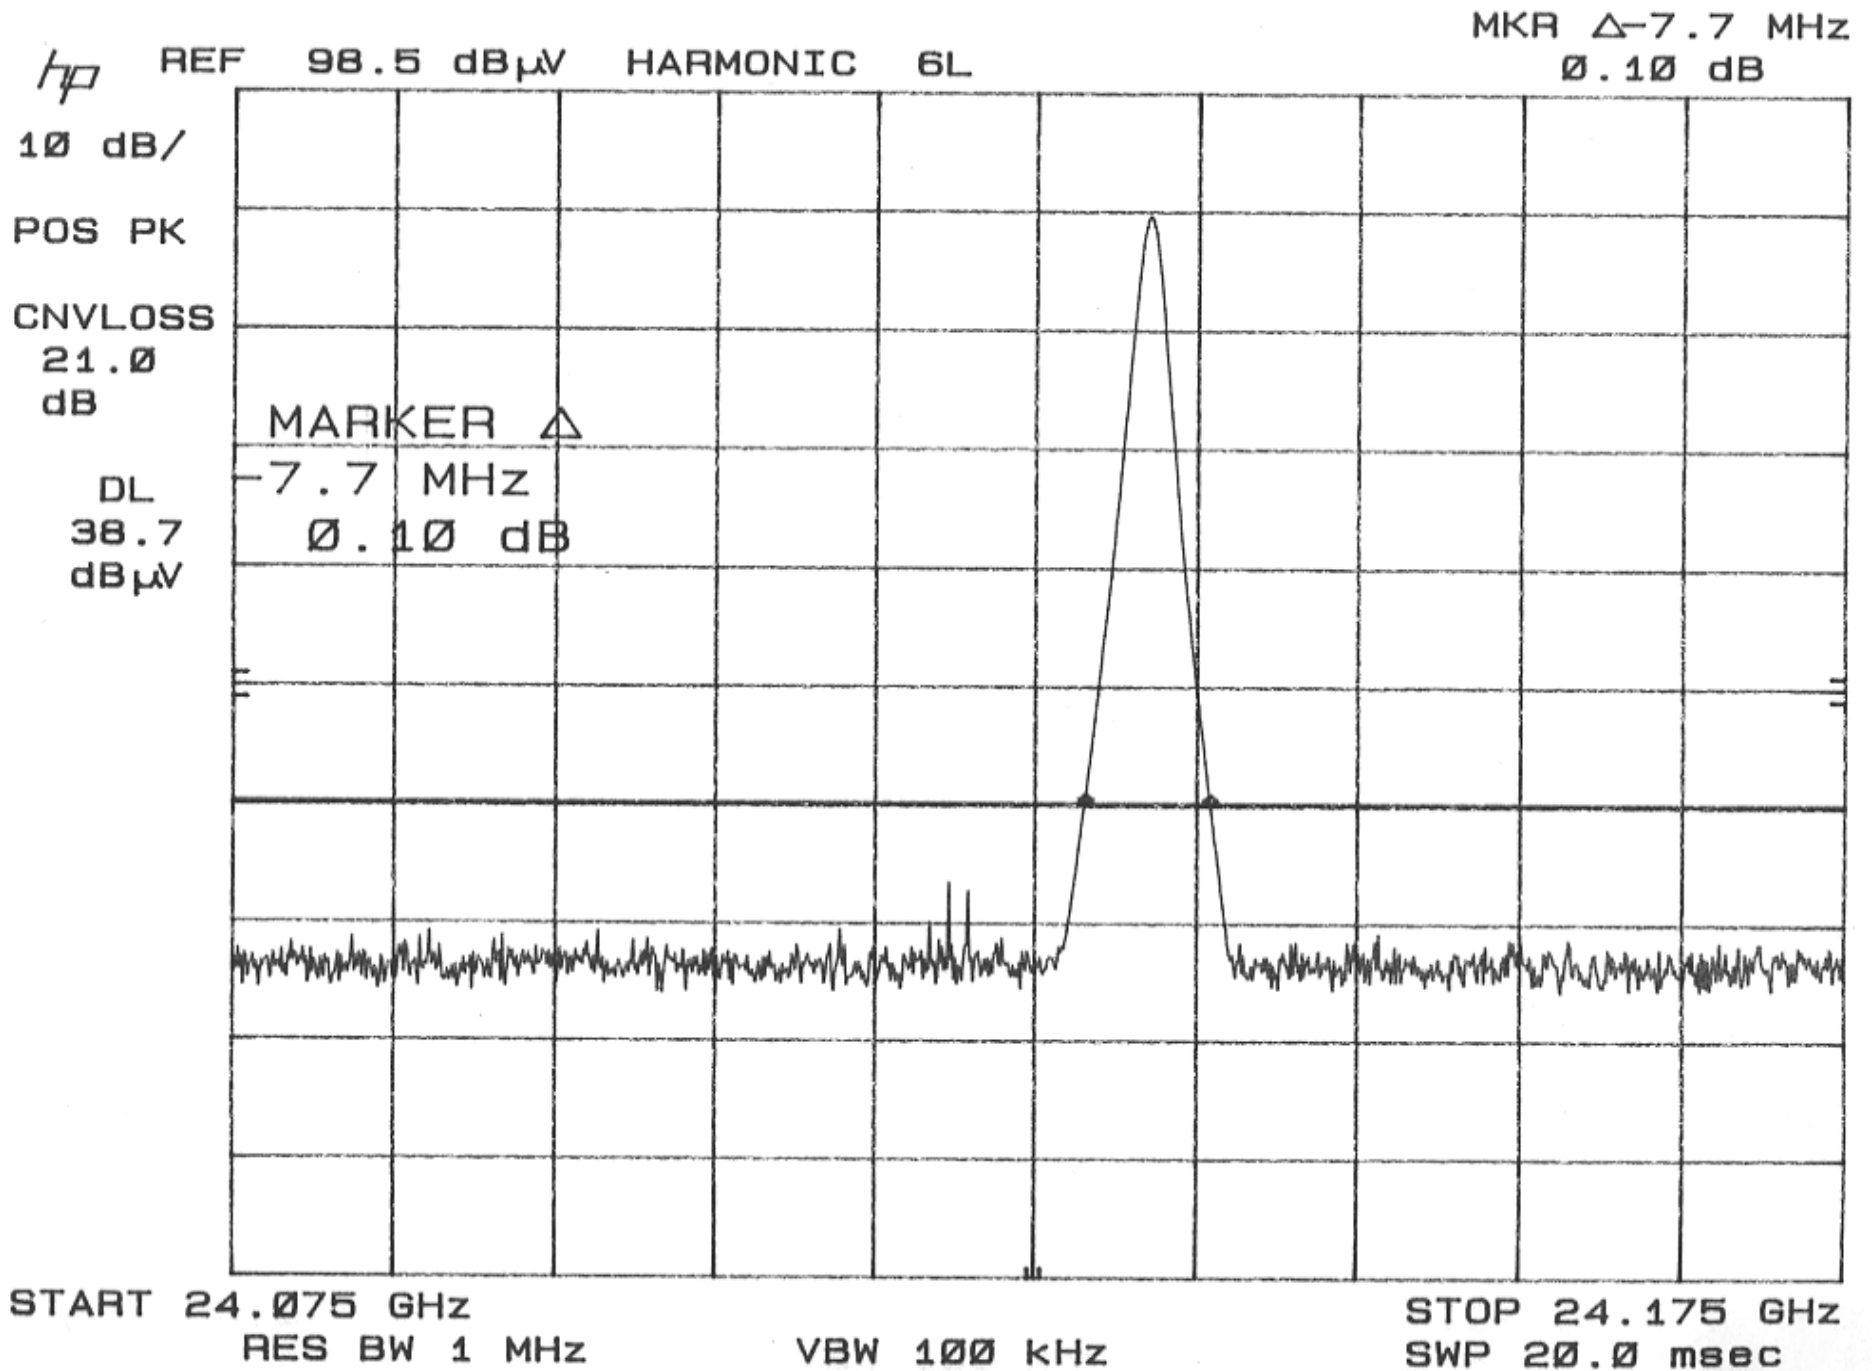

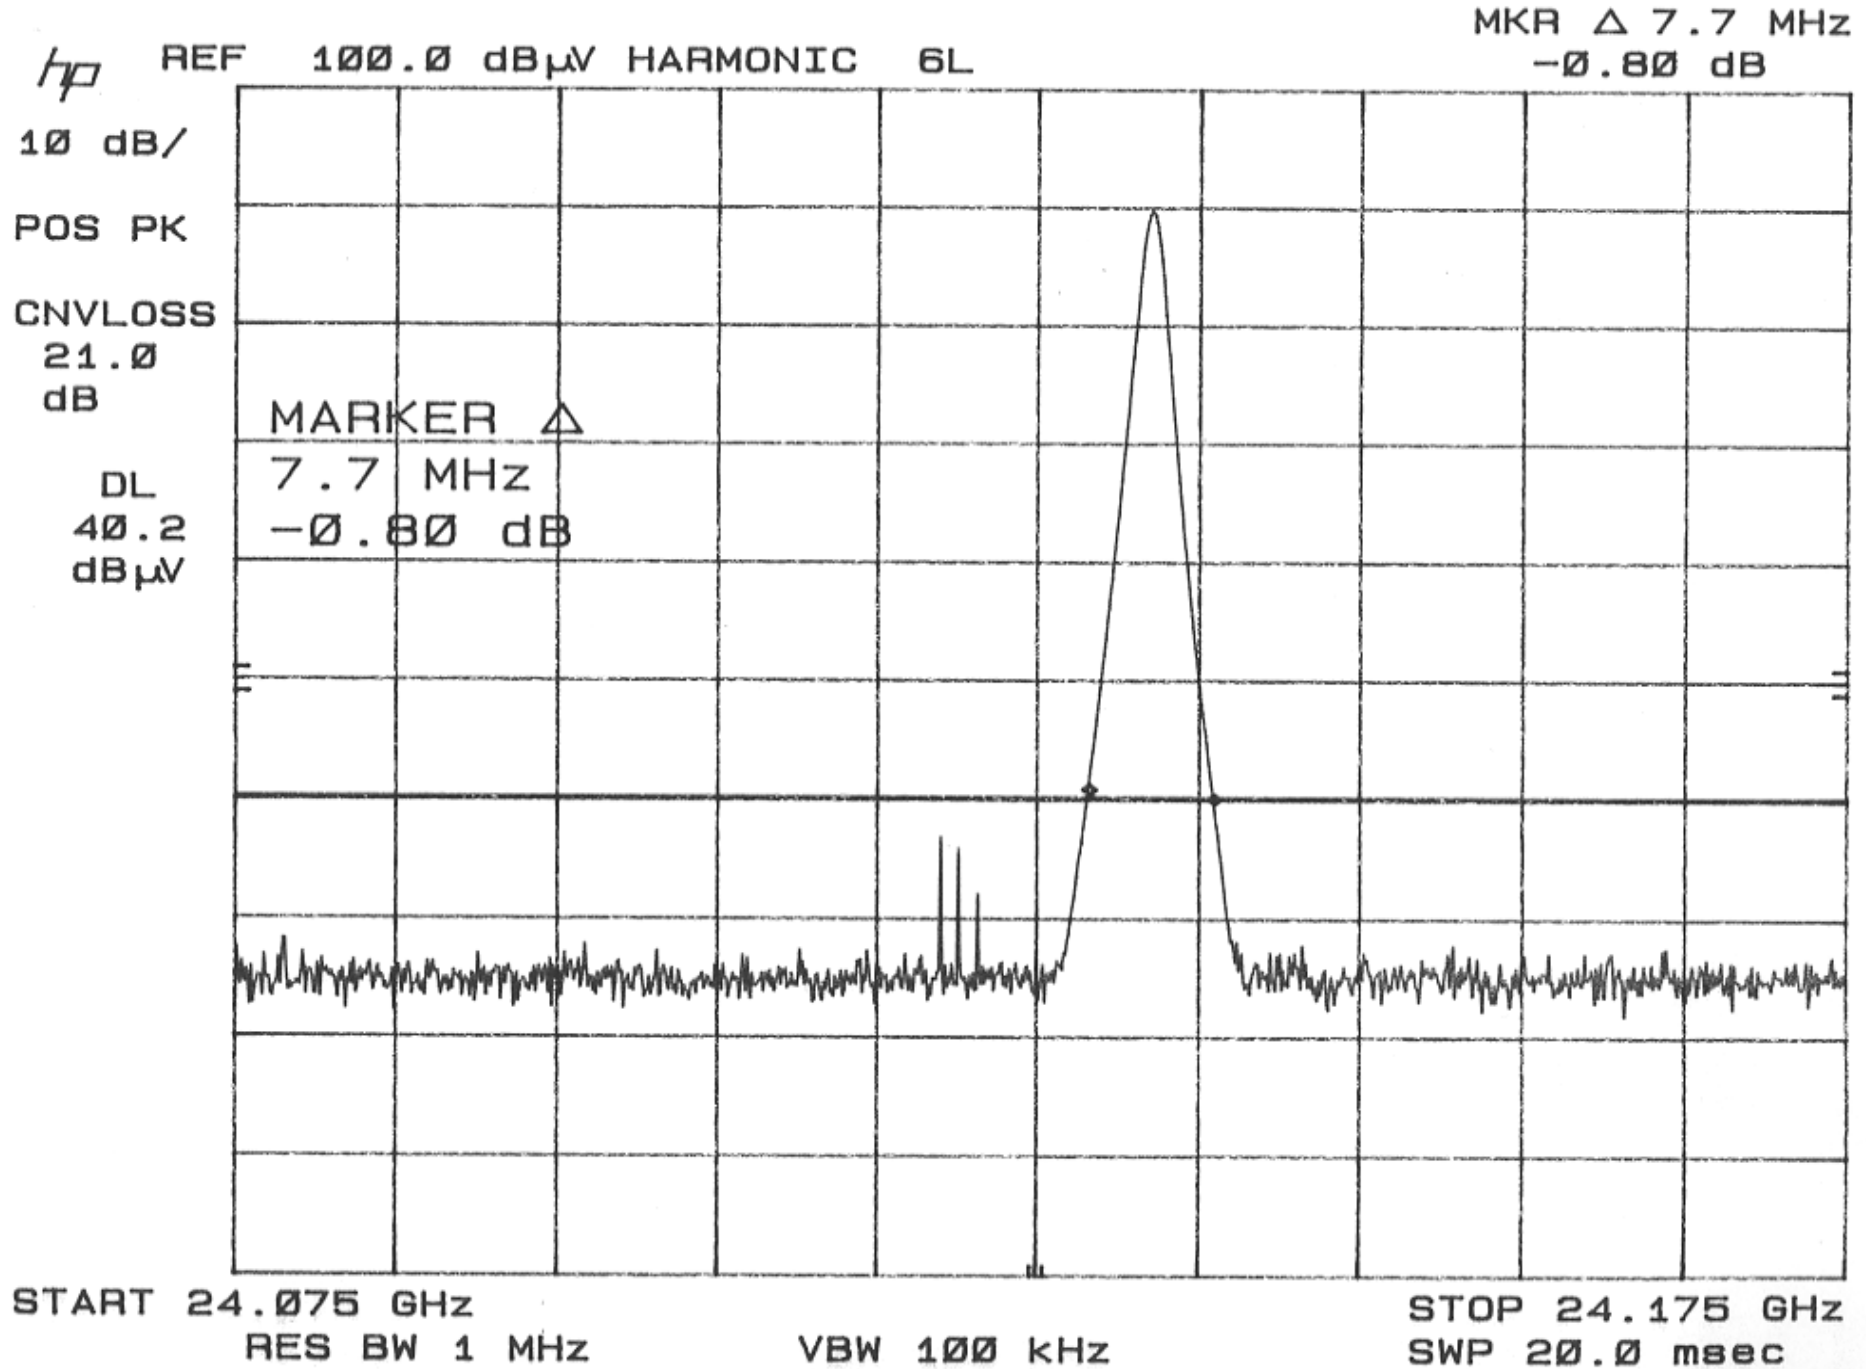

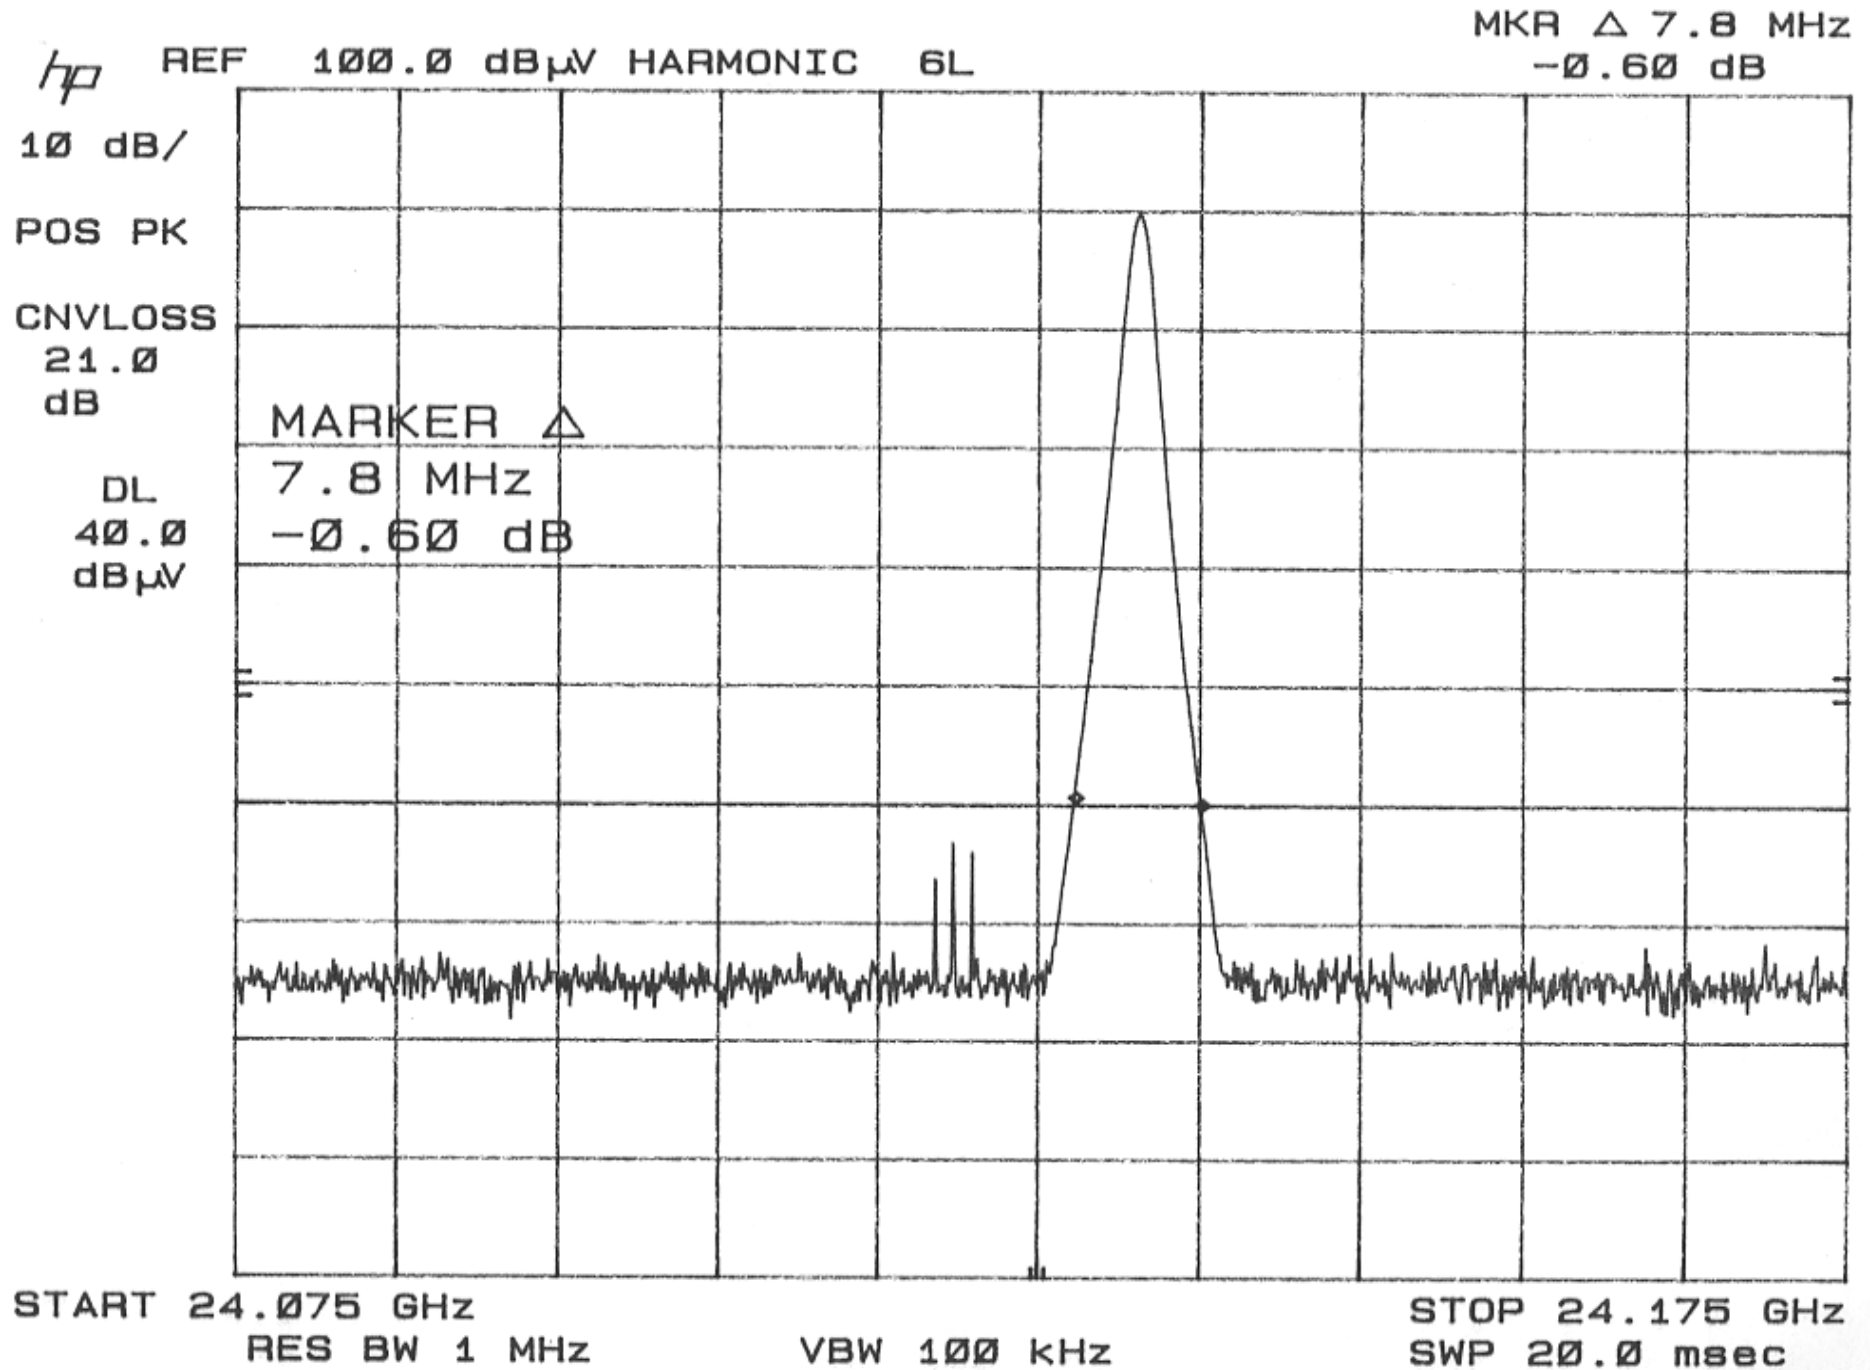


MKR Δ -7.8 MHz
-0.20 dB

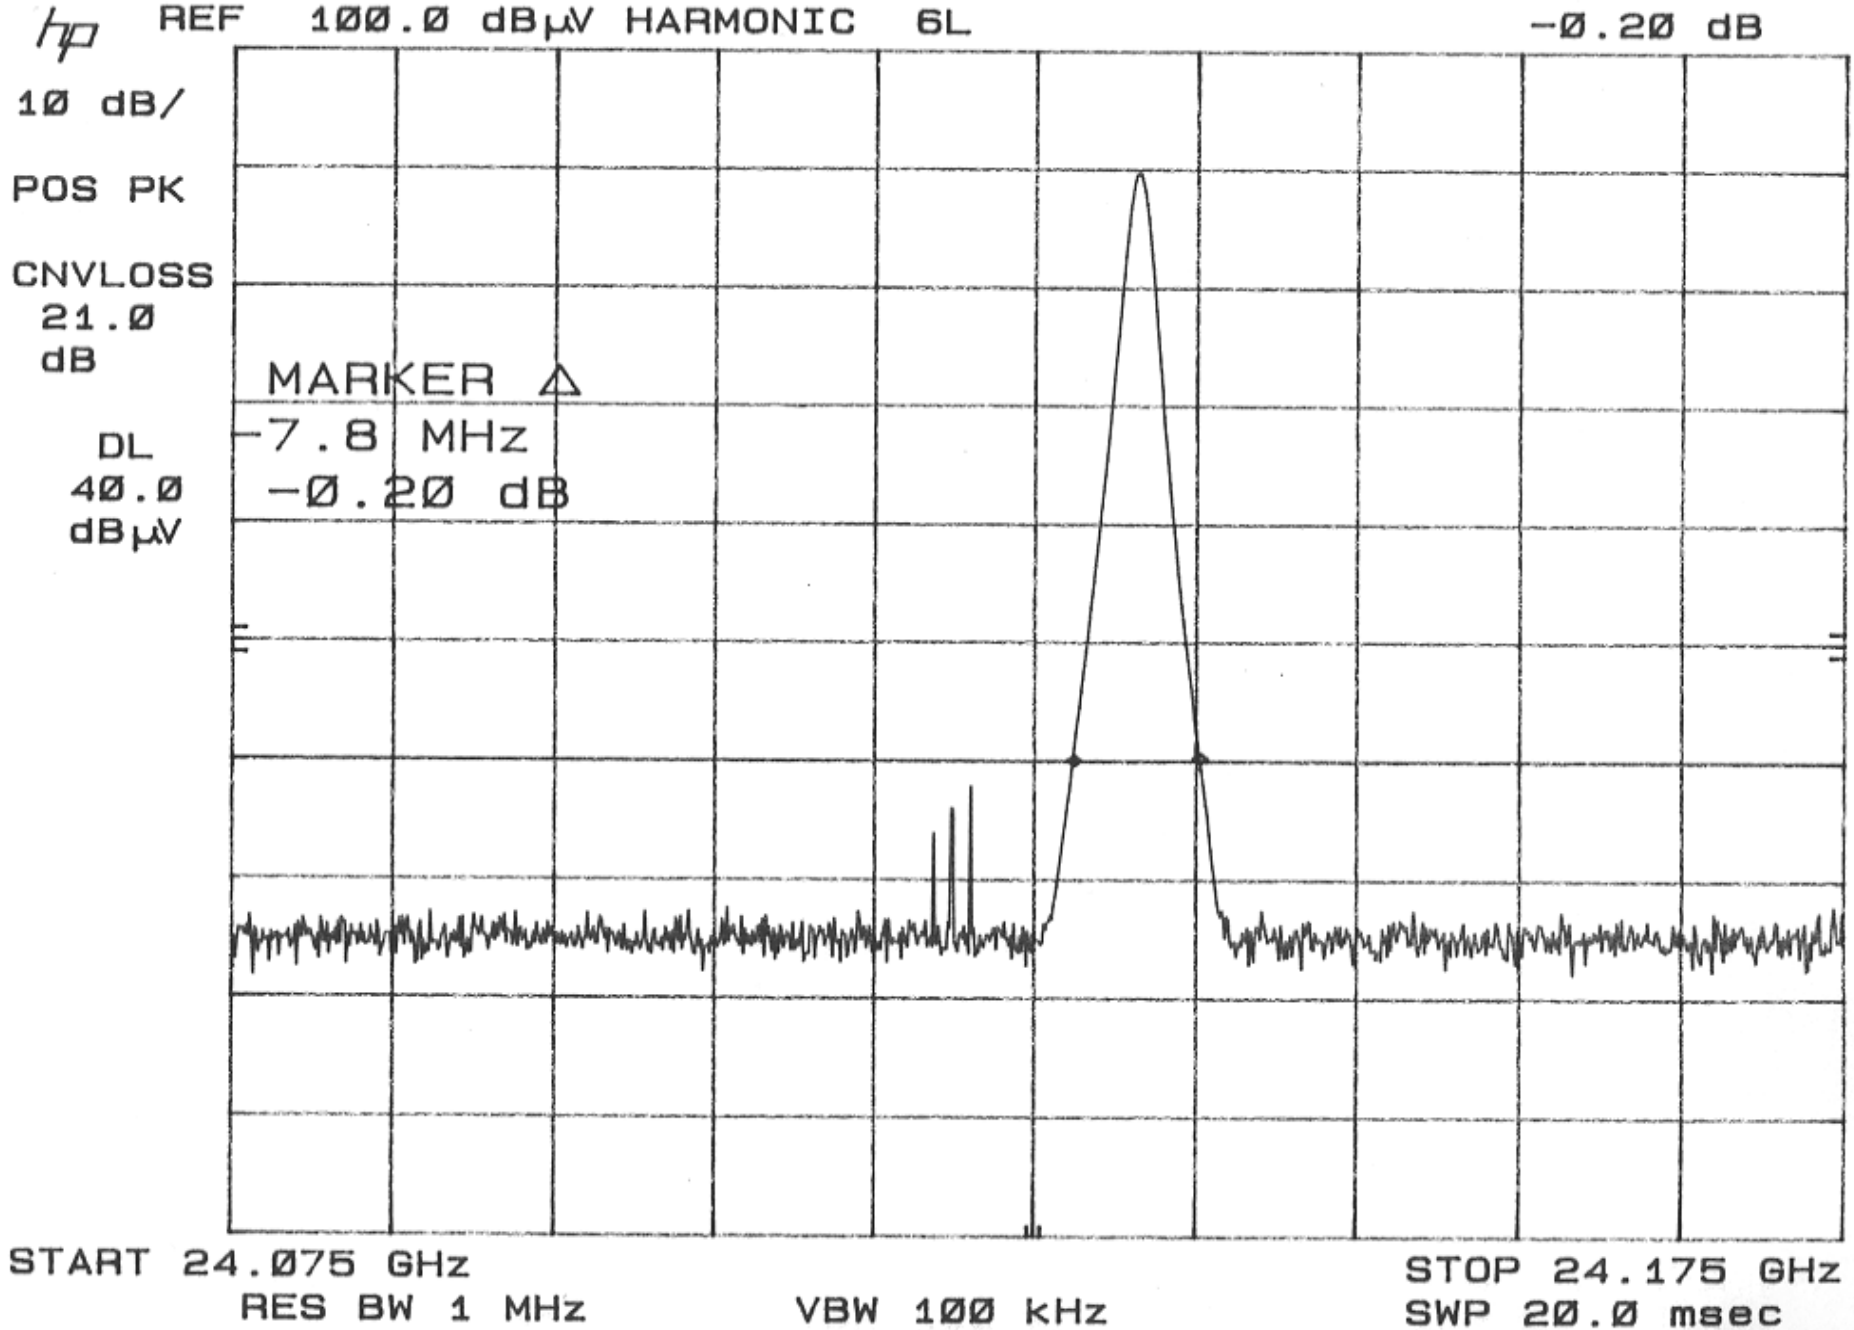

MKR Δ 7.8 MHz
0.00 dB


hp
10 dB/
POS PK
CNVLOSS
21.0
dB
DL
40.0
dB μ V

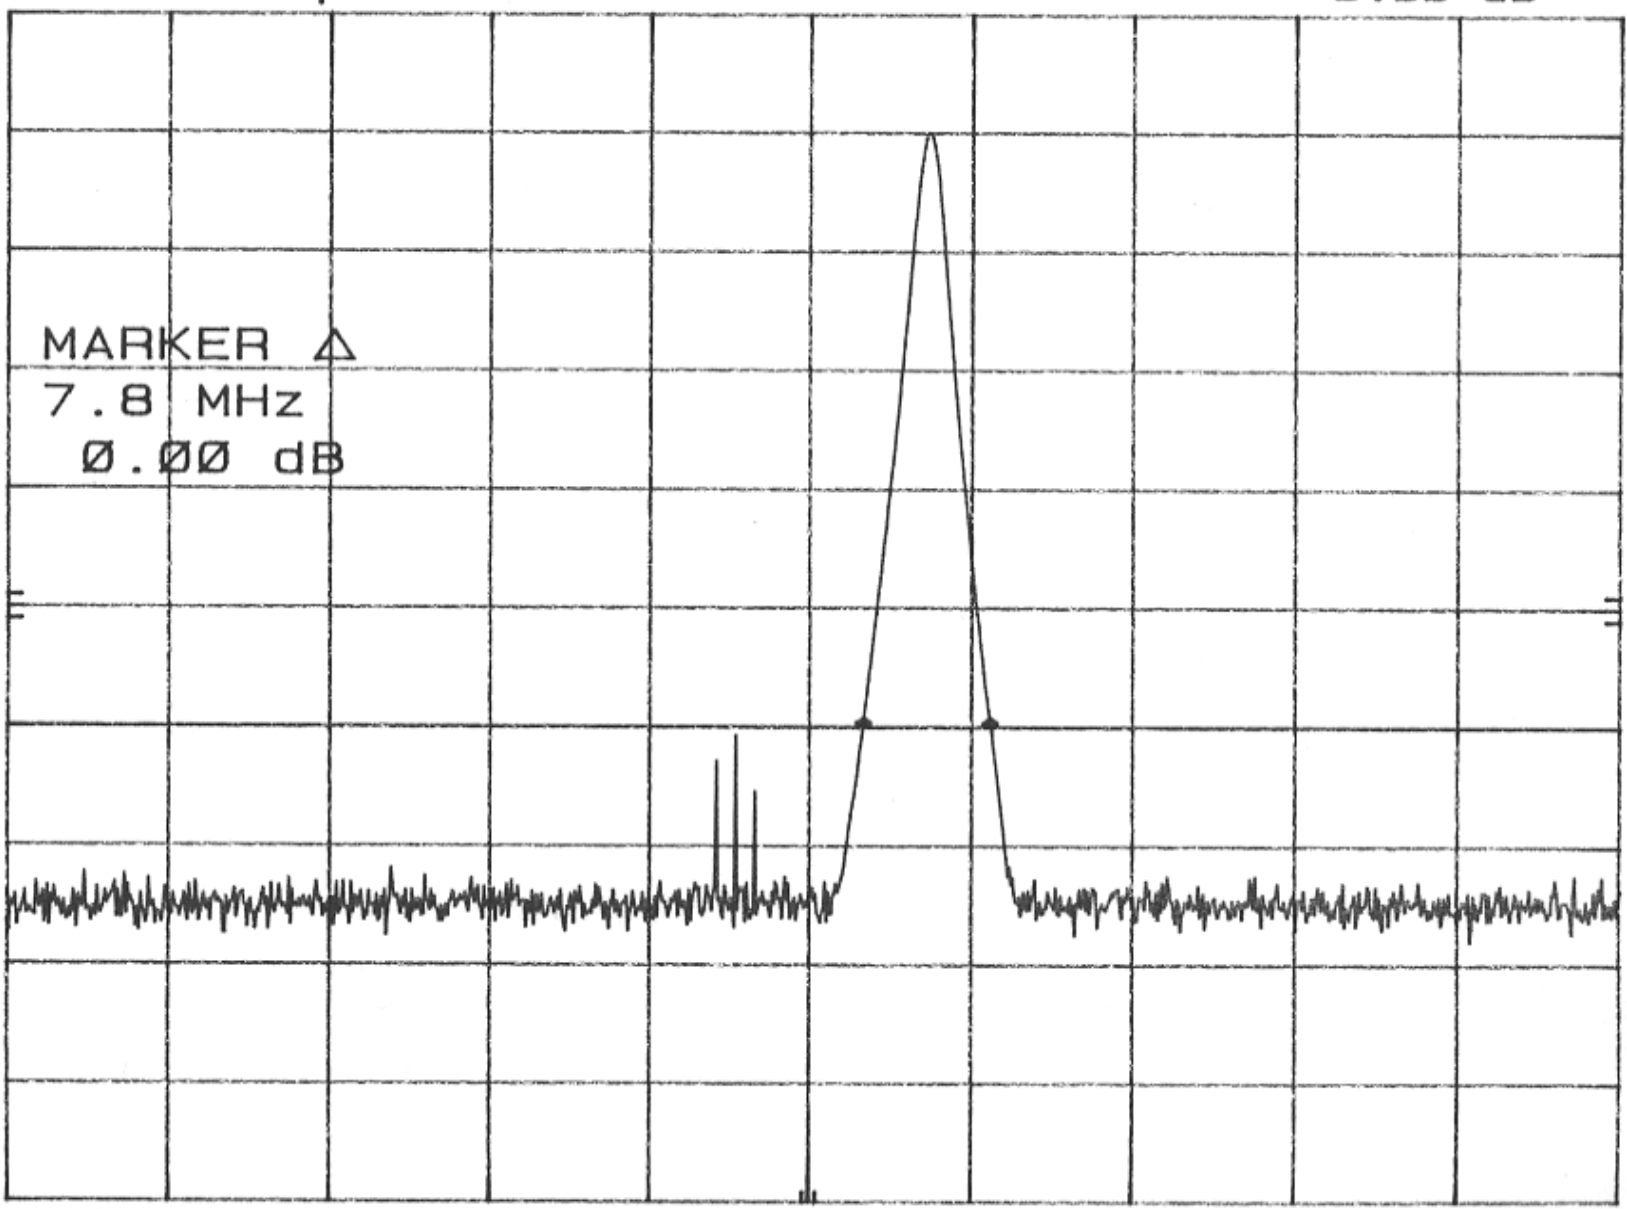

START 24.075 GHz
RES BW 1 MHz

VBW 100 kHz

STOP 24.175 GHz
SWP 20.0 msec

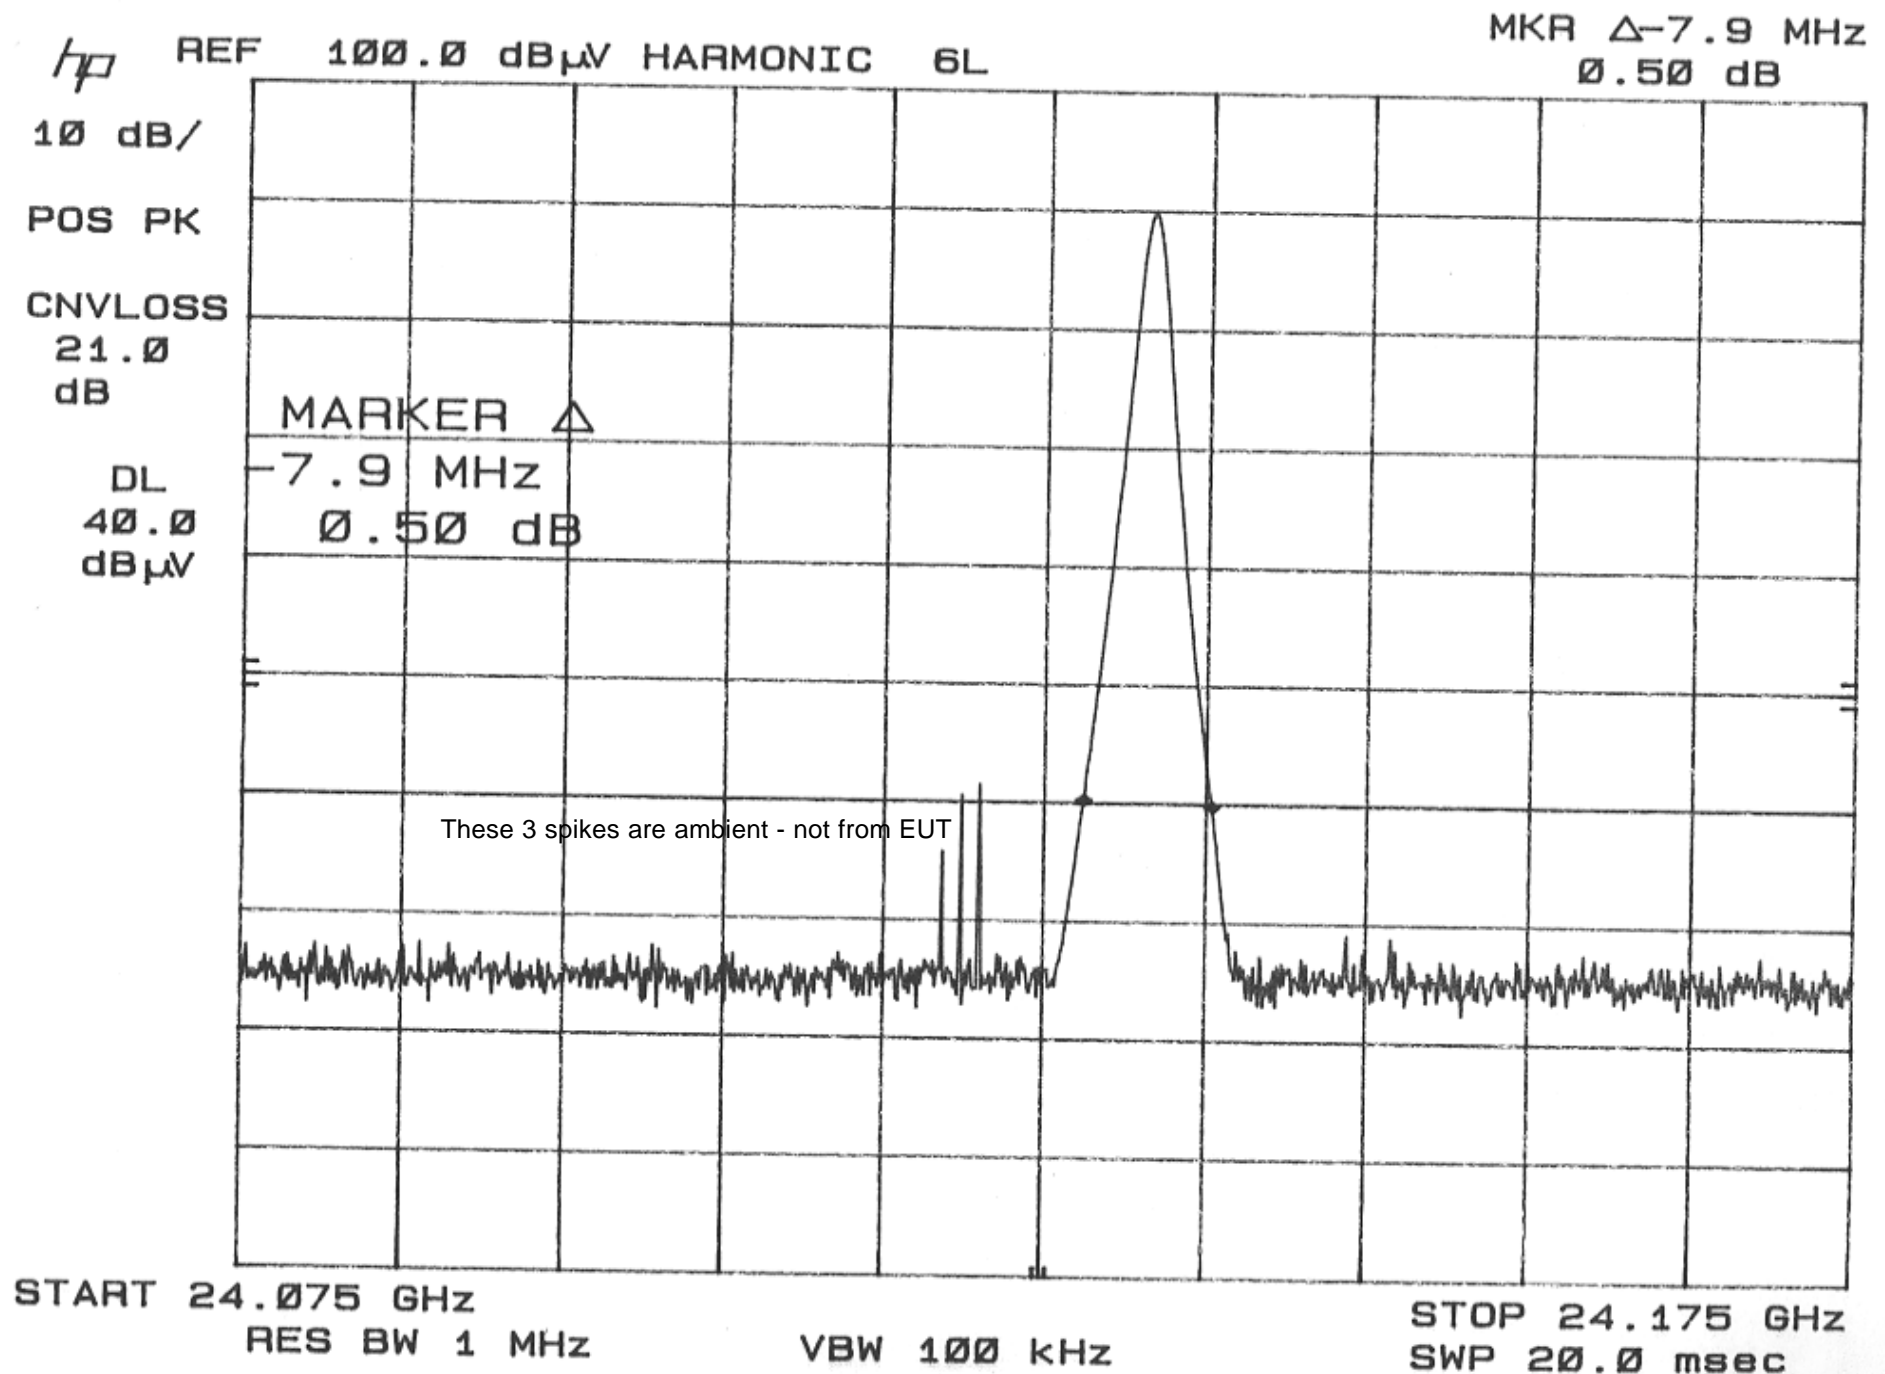


Appendix B

Constructional Data Form(s)

and/or

Product Information Form(s)

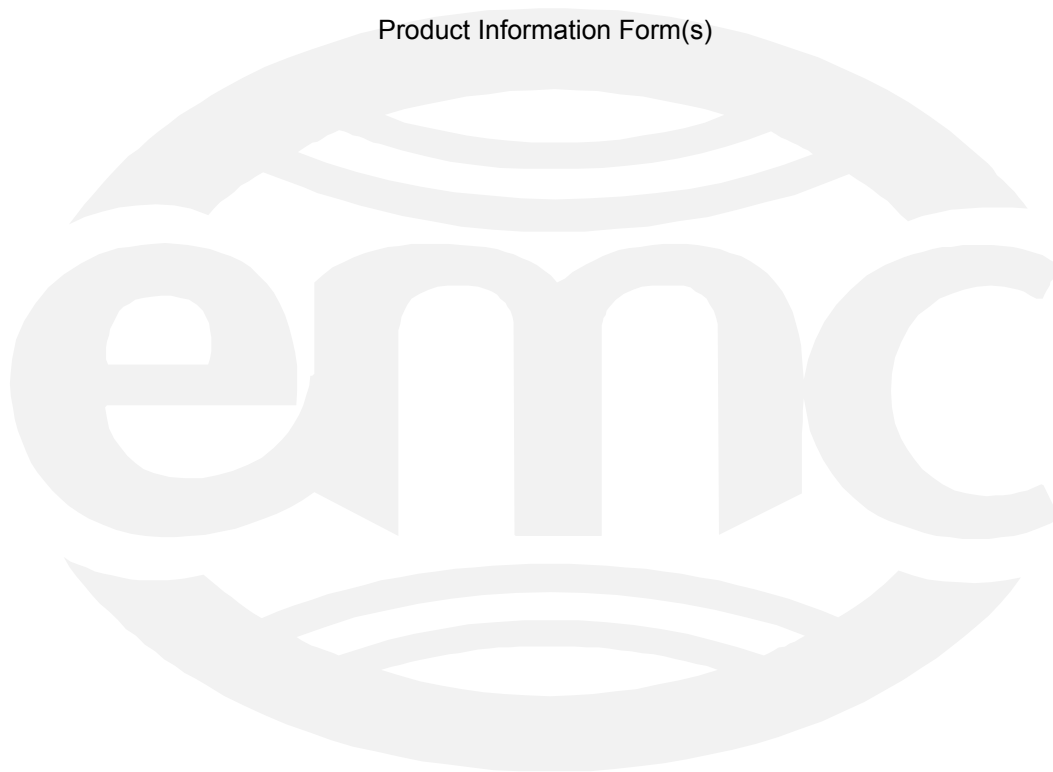

EMC Test Plan and Constructional Data Form

PLEASE COMPLETE THIS DOCUMENT IN FULL, ENTERING N/A IF THE FIELD IS NOT APPLICABLE.
Applicant -- NOTE: This information will be input into your test report as shown below.
Press the F1 key at any time to get HELP for the current field selected.

Company: Bureau d'Electronique Appliquee (B.E.A.) Inc.
 Address: 100 Enterprise Drive
RIDC Park West
Pittsburgh, PA 15275
 Contact: Thomas Schlupe Position: Vice President of Engineering
 Phone: 412 249 4100 Fax: 412 249 4101
 E-mail Address: tpsclupe@beainc.com

General Equipment Description -- NOTE: This information will be input into your test report as shown below.

EUT Description K-Band Transceiver with Antennas
 EUT Name K-Band Transceiver
 Model No.: 10.0599 Serial No.: N/A
10.0600
10.0603
10.0604
10.0605
 Product Options: N/A
 Configurations to be tested: 2 - 10.0599
2 - 10.0600
1 - 10.0603
2 - 10.0604
1 - 10.0605

Test Objective

- | | |
|---|--|
| <input type="checkbox"/> EMC Directive 89/336/EEC (EMC)
Std: _____
<input type="checkbox"/> Machinery Directive 89/392/EEC (EMC)
Std: _____
<input type="checkbox"/> Medical Device Directive 93/42/EEC (EMC)
Std: _____
<input type="checkbox"/> Vehicle Directive 72/245/EEC (EMC)
Std: _____
<input type="checkbox"/> FDA Reviewers Guidance for Premarket
Notification Submissions (EMC) | <input type="checkbox"/> FCC: Class <input type="checkbox"/> A <input checked="" type="checkbox"/> B Part <u>15</u>
<input type="checkbox"/> VCCI: Class <input type="checkbox"/> A <input type="checkbox"/> B
<input type="checkbox"/> BSMI: Class <input type="checkbox"/> A <input type="checkbox"/> B
<input type="checkbox"/> Canada: Class <input type="checkbox"/> A <input checked="" type="checkbox"/> B
<input type="checkbox"/> Australia: Class <input type="checkbox"/> A <input type="checkbox"/> B
<input type="checkbox"/> Other: _____ |
|---|--|

TÜV Product Service Certification Requested

- | | |
|---|--|
| <input type="checkbox"/> Attestation of Conformity (AoC)
<input type="checkbox"/> Certificate of Conformity (CoC)
Protection Class (N/A for vehicles) | <input type="checkbox"/> EMC Certification (used with Octagon Mark)
<input type="checkbox"/> Compliance Document
<input type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III |
|---|--|



EMC Test Plan and Constructional Data Form

(Press F1 when field is selected to show additional information on Protection Class.)

Attendance

Test will be: Attended by the customer Unattended by the customer

Failure - Complete this section if testing will not be attended by the customer.

If a failure occurs, TUV Product Service should:

- Call contact listed above, if not available then stop testing. (After hrs phone): _____
- Continue testing to complete test series.
- Continue testing to define corrective action.
- Stop testing.

EUT Specifications and Requirements

Length: 27mm 67mm	Width: 37mm 68mm	Height: 28mm 33mm	Weight: 60g 120g
----------------------	---------------------	----------------------	---------------------

Power Requirements

Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)

Voltage: 5VDC (If battery powered, make sure battery life is sufficient to complete testing.)

of Phases: _____

Current (Amps/phase(max)): _____ Current (Amps/phase(nominal)): _____

Other _____

Other Special Requirements

Typical Installation and/or Operating Environment

(ie. Hospital, Small Business, Industrial/Factory, etc.)
In sensor systems for low energy-, swing-, sliding-, bifolding-, or revolving automatic doors.
Commercial or residential applications.

EUT Power Cable

Permanent OR Removable Length (in meters): _____

Shielded OR Unshielded

Not Applicable

EMC Test Plan and Constructional Data Form

EUT Interface Ports and Cables														
Type	During Test		Qty	Shielding		Termination	Connector Type	Port Termination	Length tested (in meters)	Removable		Permanent		
	Analog	Digital		Active	Passive					Yes	No	Type	Removable	Permanent
EXAMPLE: RS232 5VDC	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Foil over braid	Coaxial	Metallized 9-pin D-Sub	Characteristic Impedance	6	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>		N/A	4-pin JST with leads for PWR supply	N/A	0	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>

EMC Test Plan and Constructional Data Form

EUT Software.

Revision Level:

Description:

Equipment Under Test (EUT) Operating Modes to be Tested -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing. Consult with your TÜV Product Service Representative if additional assistance is required.

1. As stand a modular Device

- 2.

- 3.

Equipment Under Test (EUT) System Components -- List and describe all components which are part of the EUT. For FCC & Taiwan testing a minimum configuration is required. (ie. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc)

Description	Model #	Serial #	FCC ID #
Transceiver (mono, ss, 1x3, 2x3)	10.0599		G9B-10.0599
Transceiver (stereo, ss, 1x3, 2x3)	10.0600		G9B-10.0600
Transceiver (mono, hm, 3x3)	10.0603		G9B-10.0603
Transceiver (stereo, ls, 1x3, 2x3, 3x3)	10.0604		G9B-10.0604
Transceiver (stereo, hm, 3x3)	10.0605		G9B-10.0605

EMC Test Plan and Constructional Data Form

Support Equipment -- List and describe all support equipment which is not part of the EUT. (i.e. peripherals, simulators, etc)
This information is required for FCC & Taiwan testing.

Description	Model #	Serial #	FCC ID #

Oscillator Frequencies

Frequency	Derived Frequency	Component # / Location	Description of Use

Power Supply

Manufacturer	Model #	Serial #	Type
			<input type="checkbox"/> Switched-mode: (Frequency) _____ <input type="checkbox"/> Linear <input type="checkbox"/> Other: _____
			<input type="checkbox"/> Switched-mode: (Frequency) _____ <input type="checkbox"/> Linear <input type="checkbox"/> Other: _____

Power Line Filters

Manufacturer	Model #	Location in EUT

EMC Test Plan and Constructional Data Form


Critical EMI Components (Capacitors, ferrites, etc.)

Description	Manufacturer	Part # or Value	Qty	Component # / Location

EMC Critical Detail -- Describe other EMC Design details used to reduce high frequency noise.

(PLEASE INSERT "ELECTRONIC SIGNATURE" BELOW IF POSSIBLE)

Authorization Signatures

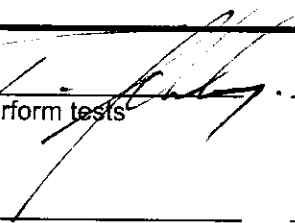
Thomas P. Schlupe  07/15/2004

Customer authorization to perform tests according to this test plan. _____ Date

Test Plan/CDF Prepared By (please print) _____ Date

APPROVED

JUL 15 2004

BEA INC.
ENGINEERING 

Appendix C

MEASUREMENT PROTOCOL

GENERAL INFORMATION

Test Methodology

The test methods used comply with ANSI C63.4-2001 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. These test systems have a measurement uncertainty of ± 4.8 dB. The equipment comprising the test systems are calibrated on an annual basis.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

CONDUCTED EMISSIONS

The final level, expressed in $\text{dB}\mu\text{V}$, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the CISPR limit.

To convert between $\text{dB}\mu\text{V}$ and μV , the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

RADIATED EMISSIONS

The final level, expressed in $\text{dB}\mu\text{V}/\text{m}$, is arrived at by taking the reading from the spectrum analyzer (Level $\text{dB}\mu\text{V}$), adding the antenna correction factor and cable loss factor (Factor dB) to it, then subtracting the preamp gain. This result then has the CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets in Attachment A.

Example:

FREQ (MHz)	LEVEL ($\text{dB}\mu\text{V}$)	CABLE/ANT/PREAMP (dB)	FINAL ($\text{dB}\mu\text{V}/\text{m}$)	POL/HGT/AZ (m) (deg)	DELTA1 EN 55022 A
60.80	42.5Qp	+ 1.2 + 10.9 - 25.5 =	29.1	V 1.0 0.0	-10.9

DETAILS OF TEST PROCEDURES

General Standard Information

The test methods used comply with ANSI C63.4-2001 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

Conducted Emissions

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 110000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3, 10 or 30 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. The transmitter is rotated through 3 orthogonal axes in order to determine the maximum emission levels.