

# Marstech Limited

11 Kelfield Street, Etobicoke, Ontario, Canada, M9W 5A1

Telephone (416) 246-1116, Fax (416) 246-1020

Authorized by:  
Professional Engineers  
Ontario


Engineering &  
Administrative



Testing For FCC  
Submissions/Verifications

Approved Test Facility



TEST REPORT			
REPORT DATE:		18 January 2000	
REPORT NO:		99641D	
CONTENTS:	See Table of Contents		
SUBMITTOR:	THOMSON CONSUMER ELECTRONICS, INC. Audio & Communications Product Dev. 101 West 103 <sup>rd</sup> Street Indianapolis, IN 46290-1102 USA		
SUBJECT:	Model No:	26975	
	FCC ID:	G9H2-6975	
TEST SPECIFICATION	CFR 47 FCC Part 15 Sections: 15.35, 15.109, 15.209 and 15.249 NOTE: Tests Conducted Are "Type" Tests.		
DATE SAMPLE RECEIVED:	4 January 2000	DATE TESTED:	5 & 17 January 2000
RESULTS:	Equipment tested complies with referenced specification.		
ALTERATIONS	None		
Tested by:	Original signed by:	 <i>Robert G. Marshall</i> Approved by: ALL Date: Jan 18/00	
	Jim Sims		
	<i>Ed. Chang</i> Edward Chang		
<b>THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF MARSTECH LIMITED.</b> This report was prepared by Marstech Limited for the account of the "Submitter". The material in it reflects Marstech's judgement in light of the information available to it at the time of preparation. Any use which a Third Party makes of this report, or any reliance on decisions to be made based on it, are the responsibility of such Third Parties. Marstech accepts no responsibility for damages, if any, suffered by any Third Party as a result of decisions made or actions based on this report.			

TECHNICAL REPORT - FCC 2.1033(b)

Applicant

Thomson Consumer Electronics Inc.  
Audio & Communications Product Dev.  
101 West 103<sup>rd</sup> Street  
Indianapolis, IN  
46290-1102 USA

FCC Identifier

G9H2-6975

Manufacturer

Cal-Comp Electronics (Thailand) Co., Ltd.  
60 Moo 8, Sethakij Road, Klong Maduea, Kratoom Bean  
Samuthsakorn 74110 THAILAND

Southern Telecommunication Development Co. Ltd.  
Block 7, 21, Yunshan East Road, Jiangbei  
Huizhou, Guangdong, PRC China

TABLE OF CONTENTS

<u>Exhibit</u>	<u>Description</u>	<u>FCC Ref.</u>	<u>Page</u>
A	Installation and Operating Instructions Furnished to the User.	2.1033(b)(3)	Exhibit A Exhibit A(1)-1
B	Description of Circuit Functions	2.1033(b)(4)	Exhibit B Exhibit B(1)-1 to -15
C	Block Diagram Schematic Diagram	2.1033(b)(5)	Exhibit C Exhibit C(1)-1 to -4 Exhibit C(2)-1 to -6
D	Report of Measurements Device Measured Test Facility and Equipment Test Results and Methods	2.1033(b)(6)	Exhibit D Exhibit D(1)-1 Exhibit D(2)-1 to -3 Exhibit D(3)-1 to -9
E	Photographs Label Equipment	2.1033(b)(7)	Exhibit E Exhibit E(1)-1 to -2 Exhibit E(2)-1 to -8

EXHIBIT D

[FCC Ref. 2.1033(b)(6)]

"Report of Measurements"

EXHIBIT D(1)

DEVICE MEASURED

(FCC Ref. 2.1033(b)(6))

APPLICANT:

Thomson Consumer Electronics Inc.  
Audio & Communications Product Dev.  
101 West 103<sup>rd</sup> Street  
Indianapolis, IN  
46290-1102 USA

MANUFACTURER:

Cal-Comp Electronics (Thailand) Co., Ltd.  
60 Moo 8, Sethakij Road, Klong Maduea,  
Kratoom Bean, Samuthsakorn 74110 THAILAND

Southern Telecommunication Development Co. Ltd.  
Block 7, 21, Yunshan East Road, Jiangbei  
Huizhou, Guangdong, PRC China

FCC IDENTIFIER:

G9H2-6975

MODEL NUMBER:

26975


SERIAL NO.:

Not Marked

Marstech Limited  
11 Kelfield Street  
Etobicoke, Ontario  
M9W 5A1 CANADA

TECHNICIANS:

Jim Sims - Com-Serve Corp.  
Edward Chang - Marstech Limited

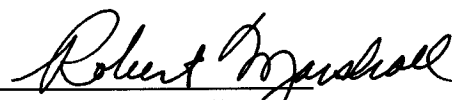  
Robert G. Marshall, P. Eng.

Date: Jan 18/00

EXHIBIT D(2)

TEST FACILITY AND EQUIPMENT LIST

FACILITIES

Radiated      ANSI C63.4 (FCC OET/55) open field 3 metre test range. This test range is protected from the cold and moisture by a non-conductive enclosure.

Conducted     2.5m Anechoic Chamber

EQUIPMENT

Anritsu 2601 A spectrum analyzer.  
Hewlett-Packard RF generator # 8640 B with an 002 doubler  
Hewlett-Packard 8449B Preamp. (30 dB) .. 1.0 MHz to 26.5 GHz  
A.H. Systems biconical antenna; ..... 20 MHz to 330 MHz  
A.H. Systems log periodic antenna; ..... 300 MHz to 1.8 GHz  
A.H. Systems log periodic antenna; ..... 1.0 GHz to 12.4 GHz  
Eaton dipole antennas; T1, T2, T3 ..... 25 MHz to 1.0 GHz  
Roberts dipole antennas; T1, T2, T3 & T4 25 MHz to 1.0 GHz  
Compliance Design P950 Preamp (16 dB) ... 25 MHz to 1.0 GHz  
Notch Filter; Model FIL01605001 ..... 30 dB at 920 MHz  
M/A-COM High Frequency Cable Assembly; No. 2026-0600

NOTE:

The Anritsu 2601 A spectrum analyzer and the Advantest R3261A spectrum analyzer are calibrated annually, and that calibration is directly traceable to the National Research Council of Canada. (NRC) This equipment is only used by qualified technicians and only for the purpose of EMI measurements. The three metre test range has been carefully evaluated to the ANSI document C63.4 and will be remeasured for reflections and losses every three years.

# FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road  
Columbia, MD 21046  
Telephone: 301-725-1585 (ext-218)  
Facsimile: 301-344-2050

September 23, 1997

IN REPLY REFER TO  
31040/SIT  
1300F2

Electrohome Electronics Ltd  
809 Wellington Street, North  
Kitchener, Ontario N2G 4J6, Canada

Attention: Gerry Gallagher


Re: Measurement facility located at Roseville  
(3 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is published periodically and is also available on the Laboratory's Public Access Link as described in the enclosed Public Notice.

Sincerely,



Thomas W. Phillips  
Electronics Engineer  
Customer Service Branch

EXHIBIT D(2)

SPECTRUM ANALYZER -

ANRITSU MS2601A S/N MT64544 -  
NEXT CALIBRATION APRIL 2000

**SUMMARY OF RESULTS**COMPLIANCE  
(yes) (no)**FIELD STRENGTH OF THE CARRIER FREQUENCIES**

Handset, Low Channel:	(X)	( )
Handset, High Channel:	(X)	( )
Base Station, Low Channel:	(X)	( )
Base Station, High Channel:	(X)	( )

**SPURIOUS RADIATED EMISSIONS (15.109)**

Handset:	(X)	( )
Base Station:	(X)	( )

**SPURIOUS RADIATED EMISSIONS (15.209)**

Handset, Low Channel:	(X)	( )
Handset, High Channel:	(X)	( )
Base Station, Low Channel:	(X)	( )
Base Station, High Channel:	(X)	( )

**SPURIOUS RADIATED EMISSIONS (15.249)**

Handset, Low Channel:	(X)	( )
Handset, High Channel:	(X)	( )
Base Station, Low Channel:	(X)	( )
Base Station, High Channel:	(X)	( )

**LINE CONDUCTED SPURIOUS EMISSIONS**

Base Station: <u>Telephone mode:</u>	(X)	( )
--------------------------------------	-----	-----

**EQUIPMENT REQUIREMENTS AND IDENTIFICATION**

a) Manufacturers or applicants name:	(x)	( )
b) FCC ID:	(x)	( )
c) Serial number:	(N/M)	( )
d) Antenna:	(x)	( )
e) Operator controls:	(x)	( )
f) Security Coding	(x)	( )
g) Equipment/Packaging Marking	(x)	( )



## CARRIER FIELD STRENGTH

### RESULTS

#### Handset:

Low Channel: **Maximum field strength of 10,810  $\mu$ V/M; at 926.275 MHz.**

High Channel: **Maximum field strength of 12,623  $\mu$ V/M; at 927.675 MHz.**

Note: *A remote headset was attached to the handset during carrier level tests.*

#### Base Station:

Low Channel: **Maximum field strength of 13,374  $\mu$ V/M; at 902.275 MHz.**

High Channel: **Maximum field strength of 10,924  $\mu$ V/M; at 903.675 MHz.**

Note: *All other channels were checked for carrier frequency field strength levels.*

### TEST CONDITIONS

#### Equipment Positioning:

Handset: standing vertically

Base Station: standing vertically with the antenna extended in the vertical plane.

#### Antenna Polarization:

Handset: vertical

Base Station: vertical

#### Antenna Type:

T.4; tuned half wave dipole

#### Measurement Bandwidth:

100 KHz

#### Supply Voltages:

Handset: 3.6 VDC from an internal battery.

Base Station: 120 VAC/60 Hz to 12 VDC (adapter)

### METHODS OF MEASUREMENT

The cordless phone components were placed in turn on a one metre high, non-metallic turntable and set at maximum output level. Measurements were made in a minimum of 3 positions for the handset and 2 for the base station. If adjustable, the whip antennas were fully extended.

For each of the above conditions the turntable was rotated through 360 degrees while the receiving antenna, at three (3) metres from the EUT, was varied in height from 1 to 4 metres and set in both planes of polarization to find the maximum signal strength. The level was measured using a spectrum analyzer. The measured level was converted to a field strength using the antenna correction factors and cable losses.

All base station measurements were made with the equipment under test connected to an artificial telephone line network, with 48 VDC applied.

## SPURIOUS RADIATED EMISSIONS

### RESULTS

The maximum field strength of any harmonic or spurious emission with respect to the applicable limit, while transmitting or receiving was:

Handset:

**Maximum field strength of: NONE FOUND at 000.00 MHz Spurious Emissions.**

**Maximum field strength of: NONE FOUND at 0.0000 GHz Harmonic Emissions.**

Note: A remote headset was attached to the handset during all tests.

Base Station:

**Maximum field strength of: 063.8  $\mu$ V/M at 228.99 MHz Spurious Emissions.**

**Maximum field strength of: NONE FOUND at 0.0000 GHz Harmonic Emissions.**

### TEST CONDITIONS

Equipment Positioning:

Handset: SPURIOUS

standing vertically and laying on its sides

Handset: HARMONICS

standing vertically and laying on its sides

Base Station: SPURIOUS

standing on its back with the antenna extended in the vertical plane.

Base Station: HARMONICS

standing vertically and on its back with the antenna extended in the vertical plane.

Antenna Polarization:

Handset: SPURIOUS

vertical and horizontal

Handset: HARMONICS

vertical and horizontal

Base Station: SPURIOUS

horizontal

Base Station: HARMONICS

vertical and horizontal

Measurement Bandwidth:

100/120 KHz(IF) & 1 MHz(IF) for frequencies above 1.0 GHz.

Supply Voltages:

Handset:

3.6 VDC from an internal battery.

Base Station:

120 VAC/60 Hz to 12 VDC (adapter)

### METHODS OF MEASUREMENT

The cordless phone components were placed in turn on a one metre high, non-metallic turntable and set at maximum output level. Measurements were made in a minimum of 3 positions for the handset and 2 for the base station. If adjustable, the whip antennas were fully extended.

For each of the above conditions the turntable was rotated through 360 degrees while the receiving antenna, at three (3) metres from the EUT, was varied in height from 1 to 4 metres and set in both planes of polarization to find the maximum signal strength. The level was measured using a spectrum analyzer. The measured level was converted to a field strength using the antenna correction factors and cable losses.

All base station measurements were made with the equipment under test connected to an artificial telephone line network, with 48 VDC applied.

**RADIATED EMISSION RESULTS**

BW: 100 &amp; 120 KHz

Span: 5 to 50 MHz

**HANDSET**

TEST #	FREQ MHz MODE BAND	LEVEL $\mu V$	ANT. TYPE (PZ)	ANT. FACT.	F.S. $\mu V/M$	LIMIT $\mu V/M$	DIFF TO DETECTOR LIMIT dB & BW KHz	
CARRIER	926.275	230	RT.4 V	47	10810.0	50000	-13.30	PK 100
CARRIER	927.675	268	RT.4 V	47.1	12622.8	50000	-11.96	PK 100

**BASE STATION**

TEST #	FREQ MHz MODE BAND	LEVEL $\mu V$	ANT. TYPE (PZ)	ANT. FACT.	F.S. $\mu V/M$	LIMIT $\mu V/M$	DIFF TO DETECTOR LIMIT dB & BW KHz	
CARRIER	902.275	292	RT.4 V	45.8	13373.6	50000	-11.45	PK 100
CARRIER	903.675	238	RT.4 V	45.9	10924.2	50000	-13.21	PK 100
01 RX	221.86	6	B/C H	7.5	45.0	200	-12.96	QP 120
02 RX	225.47	7.8	B/C H	8	62.4	200	-10.12	QP 120
03 RX	228.99	7.5	B/C H	8.5	63.8	200	-9.93	QP 120

## POWER LINE CONDUCTED EMISSIONS

### RESULTS

The largest RF voltages on the AC power lines, over the frequency range of 450 KHz to 30 MHz, was **7.98 $\mu$ V (18.40 dB $\mu$ V) at 28.26MHz** from the base station while transmitting and/or receiving. (A side of the line in the telephone mode) Refer to the attached results.

### TEST CONDITIONS

<u>Measurement Bandwidth:</u>	9 KHz Q.P. (IF)
<u>AC Test Voltage:</u>	120 VAC (filtered and stabilized)
<u>Mode of Operation:</u>	Telephone

### METHODS OF MEASUREMENT

The base station portion of the cordless phone was placed on a wooden table directly above a 50 ohm line impedance stabilization network.(LISN) If adjustable, the whip antenna was fully extended vertically and the AC power attachment cord went directly down to the LISN. The LISN is grounded directly to the floor of the test facility. Excess AC cord was coiled in a figure eight pattern before connecting directly to the 50 micro-henry LISN.


The base station was connected to a simulated 9,000 foot phone line and 48 VDC was applied. The 9,000 foot phone line network was grounded to the nearest AC outlet with a test lead.

A length of low loss RF foam cable was used to couple the RF voltages from the LISN to the spectrum analyzer. The base station transmitter was keyed on by the handset transmitting nearby. All of the RF voltages were recorded and are attached.


The base station was tested in all modes of operation which were applicable to the specific equipment under test. This included operating modes such as "calling/paging", quiescent or receive mode and standard telephone/transmit operation.

If the cordless phone contained an intercom mode of operation, then this test was repeated in that mode. The attached results represent the **worst case results** in each test condition.

POWER LINE CONDUCTED EMISSIONS  
MODEL 26975; SIDE: A

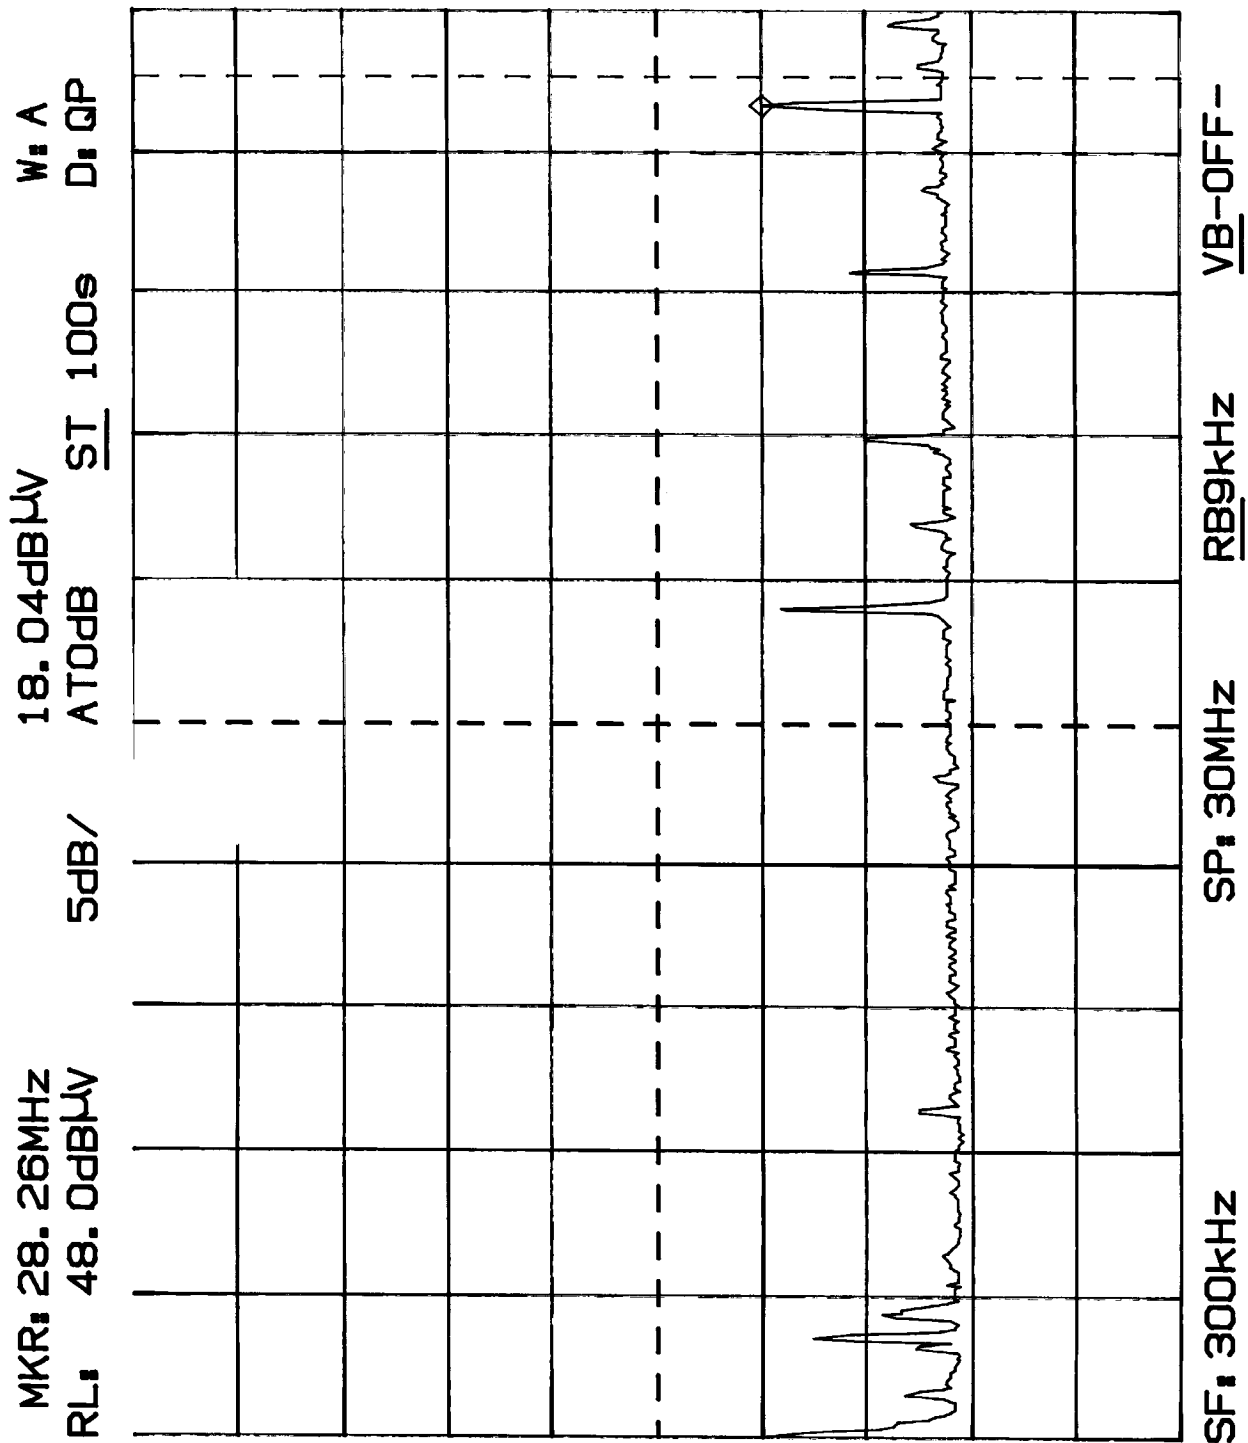

POWER LINE CONDUCTED EMISSIONS  
MODEL 26975; SIDE: B

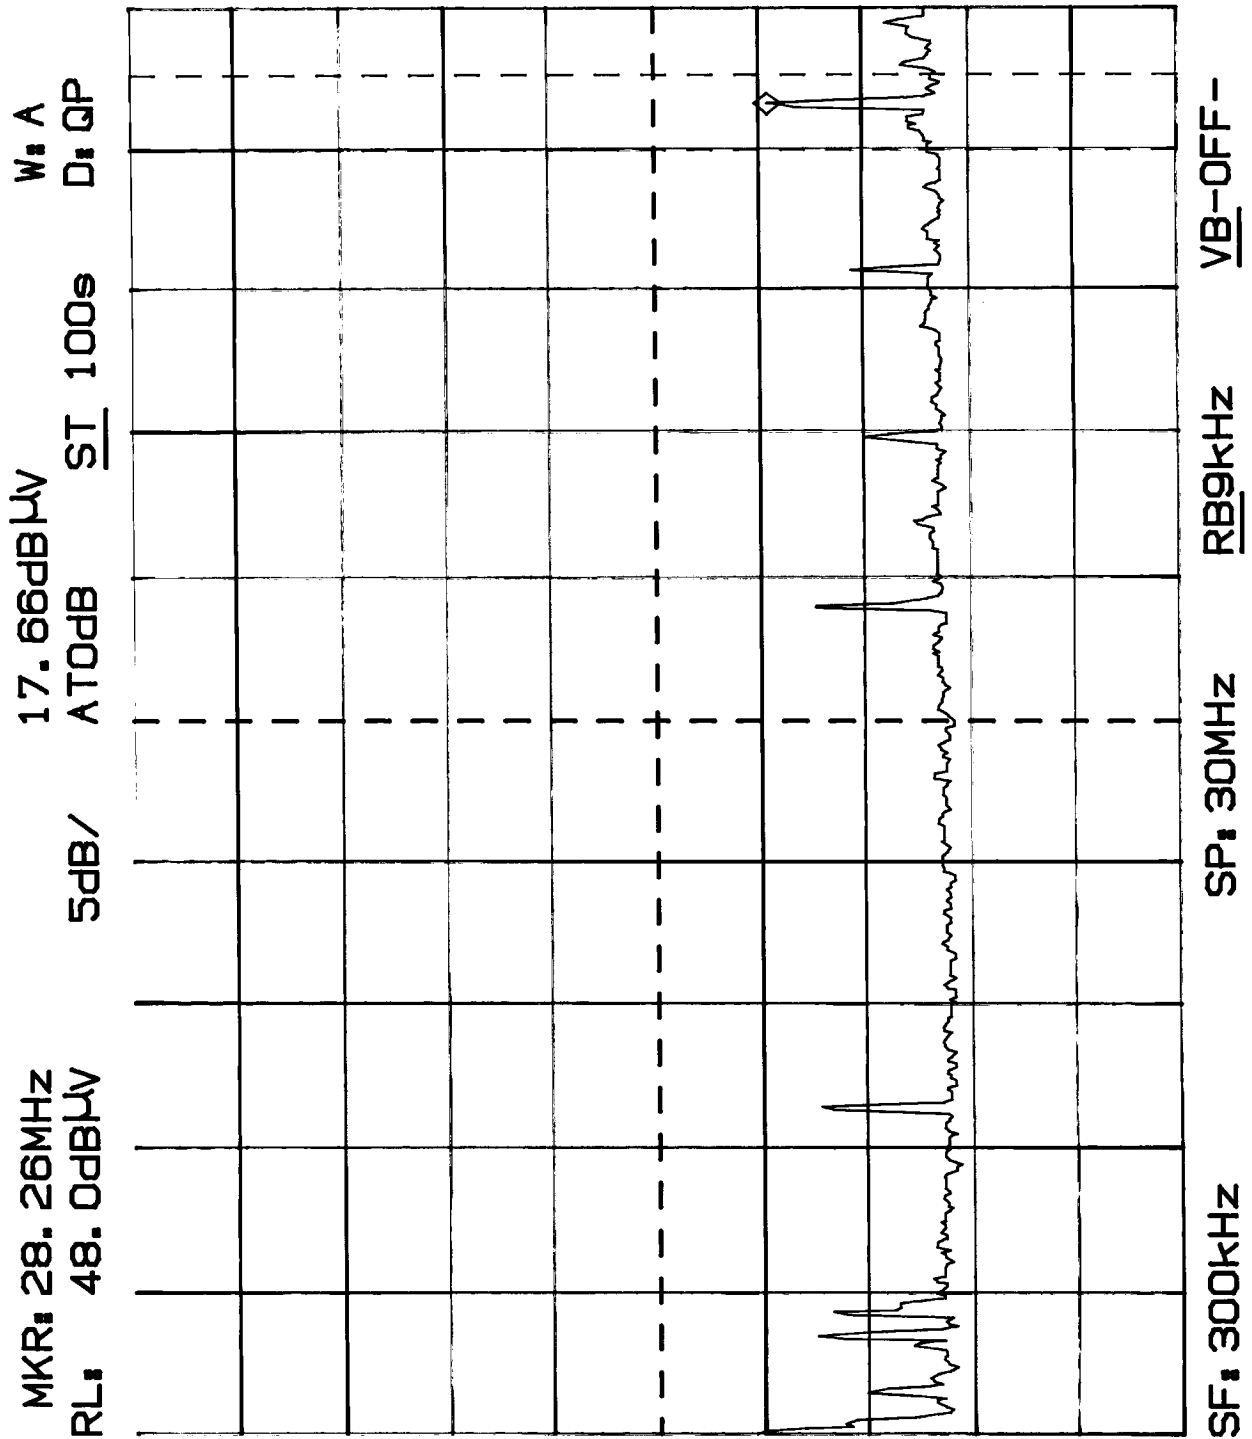

BAND EDGE TEST  
MODEL 26975

17:14:28 JAN 05. 2000  
*hp*

MARKER  $\Delta$   
-328 KHz  
56.77 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR -328 KHz  
56.77 dB

MARKER  
NORMAL


MARKER  
 $\Delta$

MARKER  
AMPTD

SELECT  
1 2 3 4

MARKER 1  
ON OFF

More  
1 of 3

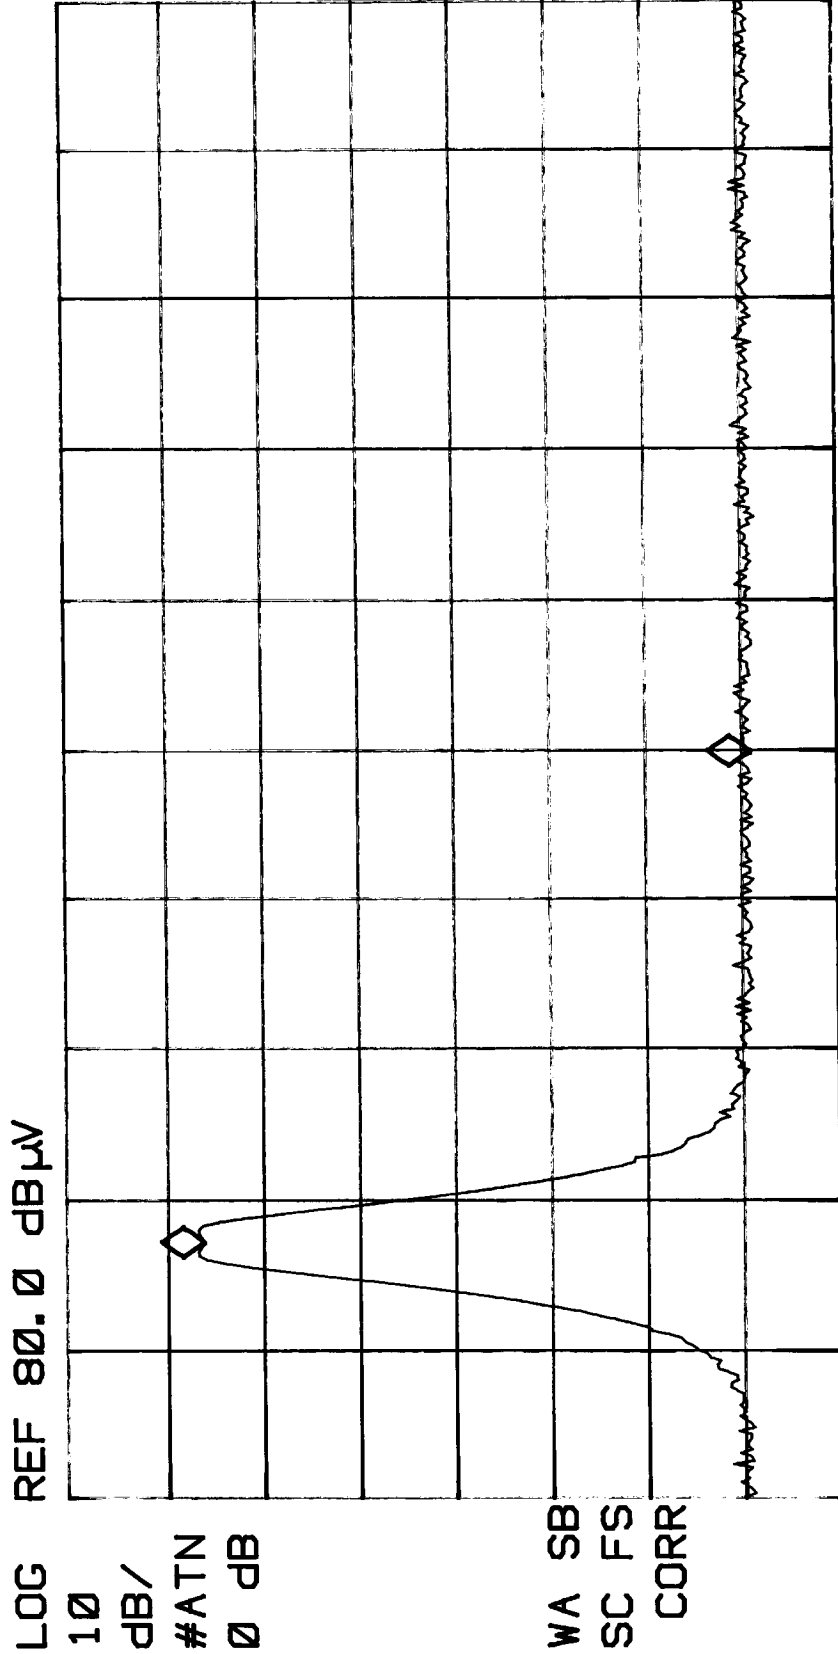

CENTER 928.000 MHz  
#IF BW 10 KHz

SPAN 1.000 MHz  
#SWP 20.0 sec

#AVG BW 1 MHz

# BAND EDGE TEST MODEL 26975

17:03:39 JAN 05. 2000

MARKER  $\Delta$   
125.0 kHz  
50.94 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 125.0 kHz  
50.94 dB

MARKER  
NORMAL

MARKER  
 $\Delta$


MARKER  
AMPTD

SELECT  
1 2 3 4

MARKER 1  
ON OFF

More  
1 of 3

LOG REF 80.0 dB $\mu$ V

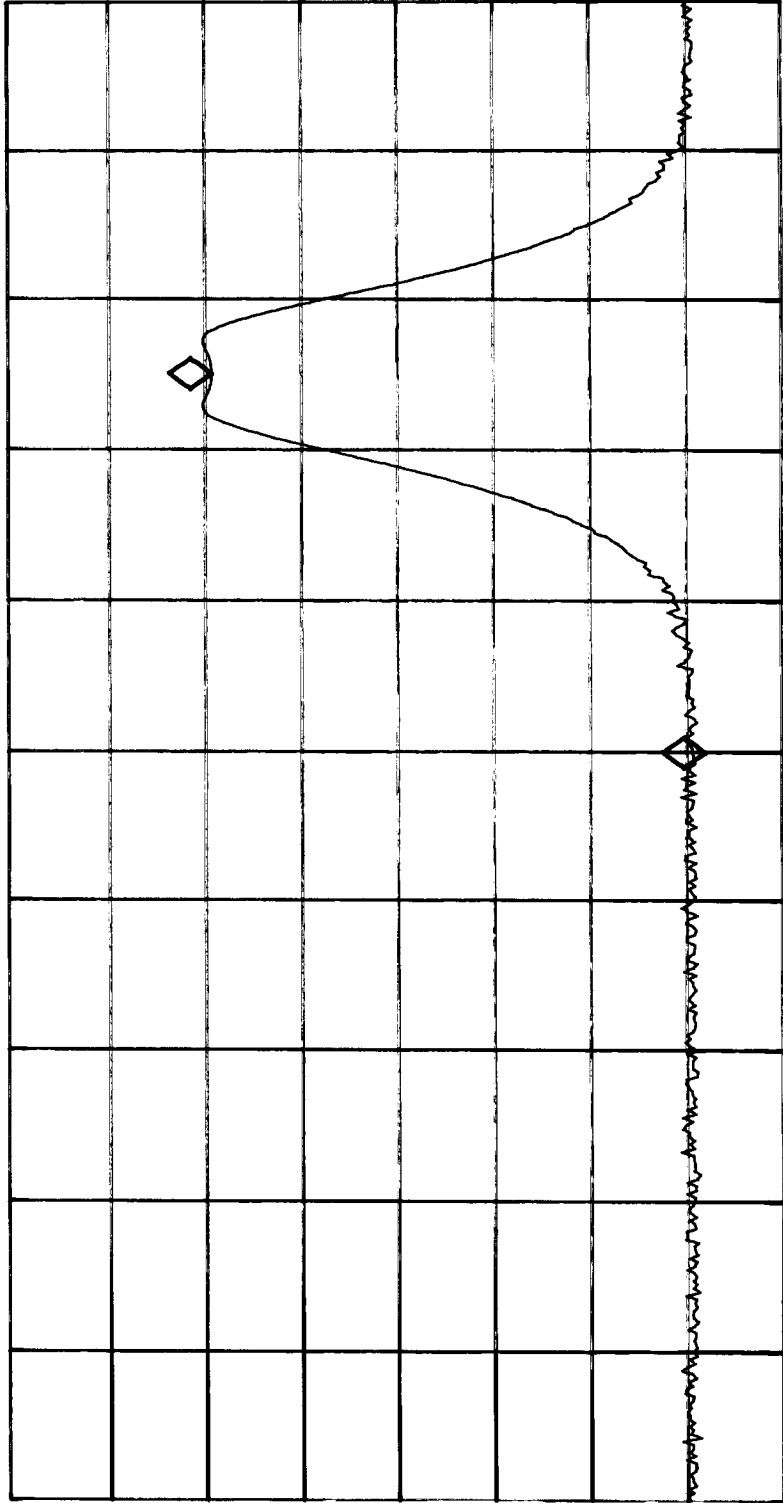

10  
dB/  
#ATN  
0 dB

WA SB  
SC FS  
CORR

CENTER 902.0000 MHz  
#IF BW 10 kHz

#AVG BW 1 MHz

SPAN 500.0 kHz  
#SWP 20.0 sec