

Marstech Limited

11 Kelfield Street, Etobicoke, Ontario, Canada, M9W 5A1
Telephone (416) 246-1116, Fax (416) 246-1020

Authorized by:
Professional Engineers
Ontario



Engineering &
Administrative



Testing For FCC
Submissions/Verifications



Approved Test Facility



TEST REPORT

REPORT DATE:	20 August 2002	REPORT NO:	22217D
CONTENTS:	See Table of Contents		
SUBMITTOR:	ATLINKS USA, Inc. 101 West 103 rd Street Indianapolis, IN 46290-1102 USA		
SUBJECT:	Model No:	27673XXX-A	
	FCC ID:	G9H2-7673A	
TEST SPECIFICATION	FCC 47 CFR Part 15 NOTE: Tests Conducted Are "Type" Tests.		
DATE SAMPLE RECEIVED:	29 July 2002	DATE TESTED:	9 and 14 August 2002
RESULTS:	Equipment tested complies with referenced specification, with satisfactory results		
ALTERATIONS	None.		
Tested by:	Edward Chang	Approved by:	Robert G. Marshall
Date:	Aug 22/02		Robert G. Marshall, P. Eng.
THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF MARSTECH LIMITED. This report was prepared by Marstech Limited for the account of the "Submitter". The material in it reflects Marstech's judgement in light of the information available to it at the time of preparation. Any use which a Third Party makes of this report, or any reliance on decisions to be made based on it, are the responsibility of such Third Parties. Marstech accepts no responsibility for damages, if any, suffered by any Third Party as a result of decisions made or actions based on this report.			

TECHNICAL REPORT - FCC 2.1033(b)Applicant

ATLINKS USA, Inc.
101 West 103rd Street
Indianapolis, IN
46290-1102 USA

FCC Identifier

G9H2-7673A

Manufacturer

Huiyang CCT Telecommunications Products Co. Ltd.
CCT Technology Park, San He Economic Experimental Zone
Huiyang City, Guangdong Province
P. R. of China

TABLE OF CONTENTS

<u>Exhibit</u>	<u>Description</u>	<u>FCC Ref.</u>	<u>Page</u>
A	Installation and Operating Instructions Furnished to the User.	2.1033(b)(3)	Exhibit A Exhibit A(1)
B	Description of Circuit Functions and Statement of Security Code	2.1033(b)(4)	Exhibit B Exhibit B(1)-1 to -3
C	Block Diagram Schematic Diagram	2.1033(b)(5)	Exhibit C Exhibit C(1)-1 to -2 Exhibit C(2)-1 to -8
D	Report of Measurements	2.1033(b)(6)	Exhibit D
E	Photographs Label Equipment - External Photos Internal Photos	2.1033(b)(7)	Exhibit E Exhibit E(1) Exhibit E(2)-1 to -2 Exhibit E(2)-3 to -8
F	Verification Report (Not Part of Certification Package)		Exhibit F(1)

EXHIBIT D

[FCC Ref. 2.1033(b)(6)]

"Report of Measurements"

Exhibit D(1)-1 to D(1)-21 - Test Data/Measurements
Exhibit D(2)-1 to D(2)-2 - Test Set-Up Photo
Exhibit D(3) - Measurement Facility (3 meter site)

TABLE OF CONTENTS

TEST REPORT CONTAINING:

Exhibit D(1)-2 to -4	Product Description
Exhibit D(1)-5 to -6	Test Equipment List
Exhibit D(1)-7	Test Procedure
Exhibit D(1)-8 to -10	Power Line Conducted Interference
Exhibit D(1)-11 to -13	Band Edges
Exhibit D(1)-14 to -18	Bandwidth
Exhibit D(1)-19 to -21	Field Strength of Emissions
Exhibit D(2)-1 to -2	Test Set Up Photo
Exhibit D(3)	Measurement Facility (3 meter site)

PRODUCT DESCRIPTION

The Model 27673XXX-A is a single-line 2.4GHz cordless telephone with caller ID and stuttered dial tone detection, that operates from 2402.3 to 2480.55 MHz. The antenna used for the base and the handset is permanently attached to the EUT. Its actual frequency range is:

Base: 2402.30 MHz to 2408.15 MHz

Handset: 2474.75 MHz to 2480.59 MHz

A complete frequency list is shown on the following pages.

A. Base Unit (Unit : MHz)

Channel Spacing : ± 150 kHz

Ch.	Tx	Rx	Ch.	Tx	Rx
1	2402.30	2474.70	21	2405.30	2477.70
2	2402.45	2474.85	22	2405.45	2477.85
3	2402.60	2475.00	23	2405.60	2478.00
4	2402.75	2475.15	24	2405.75	2478.15
5	2402.90	2475.30	25	2405.90	2478.30
6	2403.05	2475.45	26	2406.05	2478.45
7	2403.20	2475.60	27	2406.20	2478.60
8	2403.35	2475.75	28	2406.35	2478.75
9	2403.50	2475.90	29	2406.50	2478.90
10	2403.65	2476.05	30	2406.65	2479.05
11	2403.80	2476.20	31	2406.80	2479.20
12	2403.95	2476.35	32	2406.95	2479.35
13	2404.10	2476.50	33	2407.10	2479.50
14	2404.25	2476.65	34	2407.25	2479.65
15	2404.40	2476.80	35	2407.40	2479.80
16	2404.55	2476.95	36	2407.55	2479.95
17	2404.70	2477.10	37	2407.70	2480.10
18	2404.85	2477.25	38	2407.85	2480.25
19	2405.00	2477.40	39	2408.00	2480.40
20	2405.15	2477.55	40	2408.15	2480.55

B. Handset (Unit : MHz)

Channel Spacing : ± 150 kHz

Ch.	Tx	Rx	Ch.	Tx	Rx
1	2474.70	2402.30	21	2477.70	2405.30
2	2474.85	2402.45	22	2477.85	2405.45
3	2475.00	2402.60	23	2478.00	2405.60
4	2475.15	2402.75	24	2478.15	2405.75
5	2475.30	2402.90	25	2478.30	2405.90
6	2475.45	2403.05	26	2478.45	2406.05
7	2475.60	2403.20	27	2478.60	2406.20
8	2475.75	2403.35	28	2478.75	2406.35
9	2475.90	2403.50	29	2478.90	2406.50
10	2476.05	2403.65	30	2479.05	2406.65
11	2476.20	2403.80	31	2479.20	2406.80
12	2476.35	2403.95	32	2479.35	2406.95
13	2476.50	2404.10	33	2479.50	2407.10
14	2476.65	2404.25	34	2479.65	2407.25
15	2476.80	2404.40	35	2479.80	2407.40
16	2476.95	2404.55	36	2479.95	2407.55
17	2477.10	2404.70	37	2480.10	2407.70
18	2477.25	2404.85	38	2480.25	2407.85
19	2477.40	2405.00	39	2480.40	2408.00
20	2477.55	2405.15	40	2480.55	2408.15

TEST FACILITY AND EQUIPMENT LIST

FACILITIES:

Radiated: ANSI C63.4 (FCC OET/55) open field 3 metre test range. This test range is protected from the cold and moisture by a non-conductive enclosure.

Conducted: 2.5m Anechoic Chamber

EQUIPMENT

Anritsu 2601A Spectrum Analyzer
Advantest R3261A Spectrum Analyzer
Hewlett-Packard RF generator # 8640 B with an 002 doubler
A.H. Systems biconical antenna; 20 MHz to 330 MHz
A.H. Systems log periodic antenna; 300 MHz to 1.8 GHz
Eaton dipole antennas; T1, T2, T3 25 MHz to 1.0 GHz
Roberts dipole antennas; T1, T2, T3 & T4 25 MHz to 1.0 GHz
Compliance Design P950 Preamp (16 dB) ... 25 MHz to 1.0 GHz

NOTE:

The Anritsu 2601A Spectrum Analyzer and the Advantest R3261A Spectrum Analyzer are calibrated annually, and that calibration is directly traceable to the National Research Council of Canada. (NRC) This equipment is only used by qualified technicians and only for the purpose of EMI measurements. The three metre test range has been carefully evaluated to the ANSI document C63.4 and will be remeasured for reflections and losses every three years.

ADDITIONAL TEST EQUIPMENT LIST

1. Spectrum Analyzer: HP 8591EM, S/N 3639A00995, Calibrated April 2002
2. Spectrum Analyzer: ANRITSU 2601A, S/N MT64544, Calibrated May 2002
3. Spectrum Analyzer: IFR AN940, S/N 635001039, Calibrated March 2002
4. Preamp: HP 8449B, S/N 3008A00378, Calibrated August 2002
5. Horn Antenna: Q-PAR 6878/24, S/N 1721, 1.5-18GHz
6. Line Impedance Stabilization Network.: Marstech, Cal. July 2002

TEST PROCEDURE

GENERAL:

Shielded interface cables were used in all cases except for cables connecting to the telephone line and the power cords. A test program was run which simulated a normal transmission.

POWER LINE CONDUCTED INTERFERENCE:

The procedure used was ANSI STANDARD C63.4 1992 using a 50uH LISN. Both lines were observed with the EUT transmitting. The bandwidth of the spectrum analyzer was 9KHz QP with an appropriate sweep speed. The ambient temperature of the EUT was 24°C with a humidity of 60%.

BANDWIDTH 6.0dB:

The measurements were made with the spectrum analyzer's resolution bandwidth (RBW)=1.0MHz and the video bandwidth (VBW)=1.0MHz and the span set as shown on plot.

POWER OUTPUT:

The radiated output power was measured with the spectrum analyzer and Horn Antenna.

RADIATION INTERFERENCE:

The test procedure used was ANSI STANDARD C63.4-1992 using an appropriate spectrum analyzer, as listed in the Test Equipment List. The bandwidth (RBW) of the spectrum analyzer was 100KHz/120KHz up to 1GHz with an appropriate sweep speed. The VBW above 1.0GHz was = 1.0GHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the EUT was 24°C with a humidity of 60%.

15.107 (a) POWER LINE CONDUCTED INTERFERENCE

Requirements: 0.45 - 30MHz 250 μ V or 47.96dB μ V

Test Procedure: ANSI STANDARD C63.4-1992.
The spectrum was scanned from 0.45 to 30MHz.

Test Data:


The highest emission read for LINE was 28.09 dB μ V@ 1.35 MHz.
The highest emission read for NEUTRAL was 25.77 dB μ V@ 1.29 MHz.

The graphs on Exhibit D(1)-9 to -10 represent the emissions taken for this device.


Test Results:

Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

POWER LINE CONDUCTED EMISSIONS
MODEL 27673XXX-A
LINE

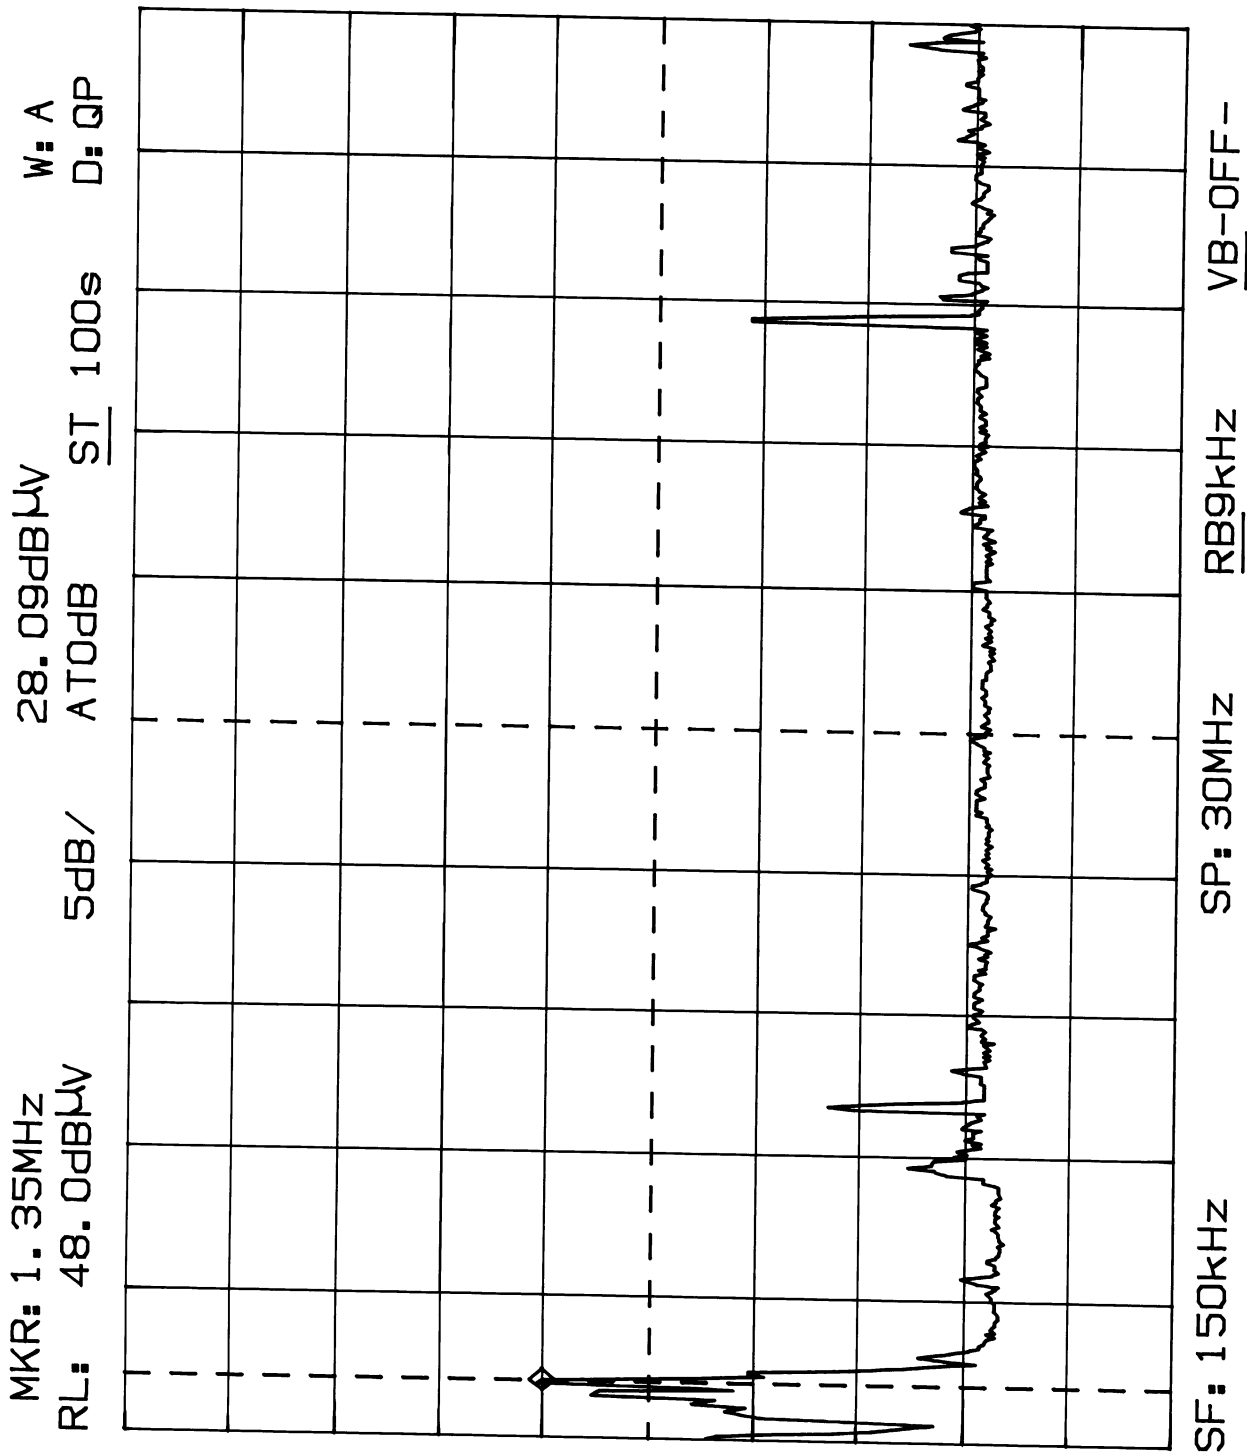

POWER LINE CONDUCTED EMISSIONS
MODEL 27673XXX-A
NEUTRAL

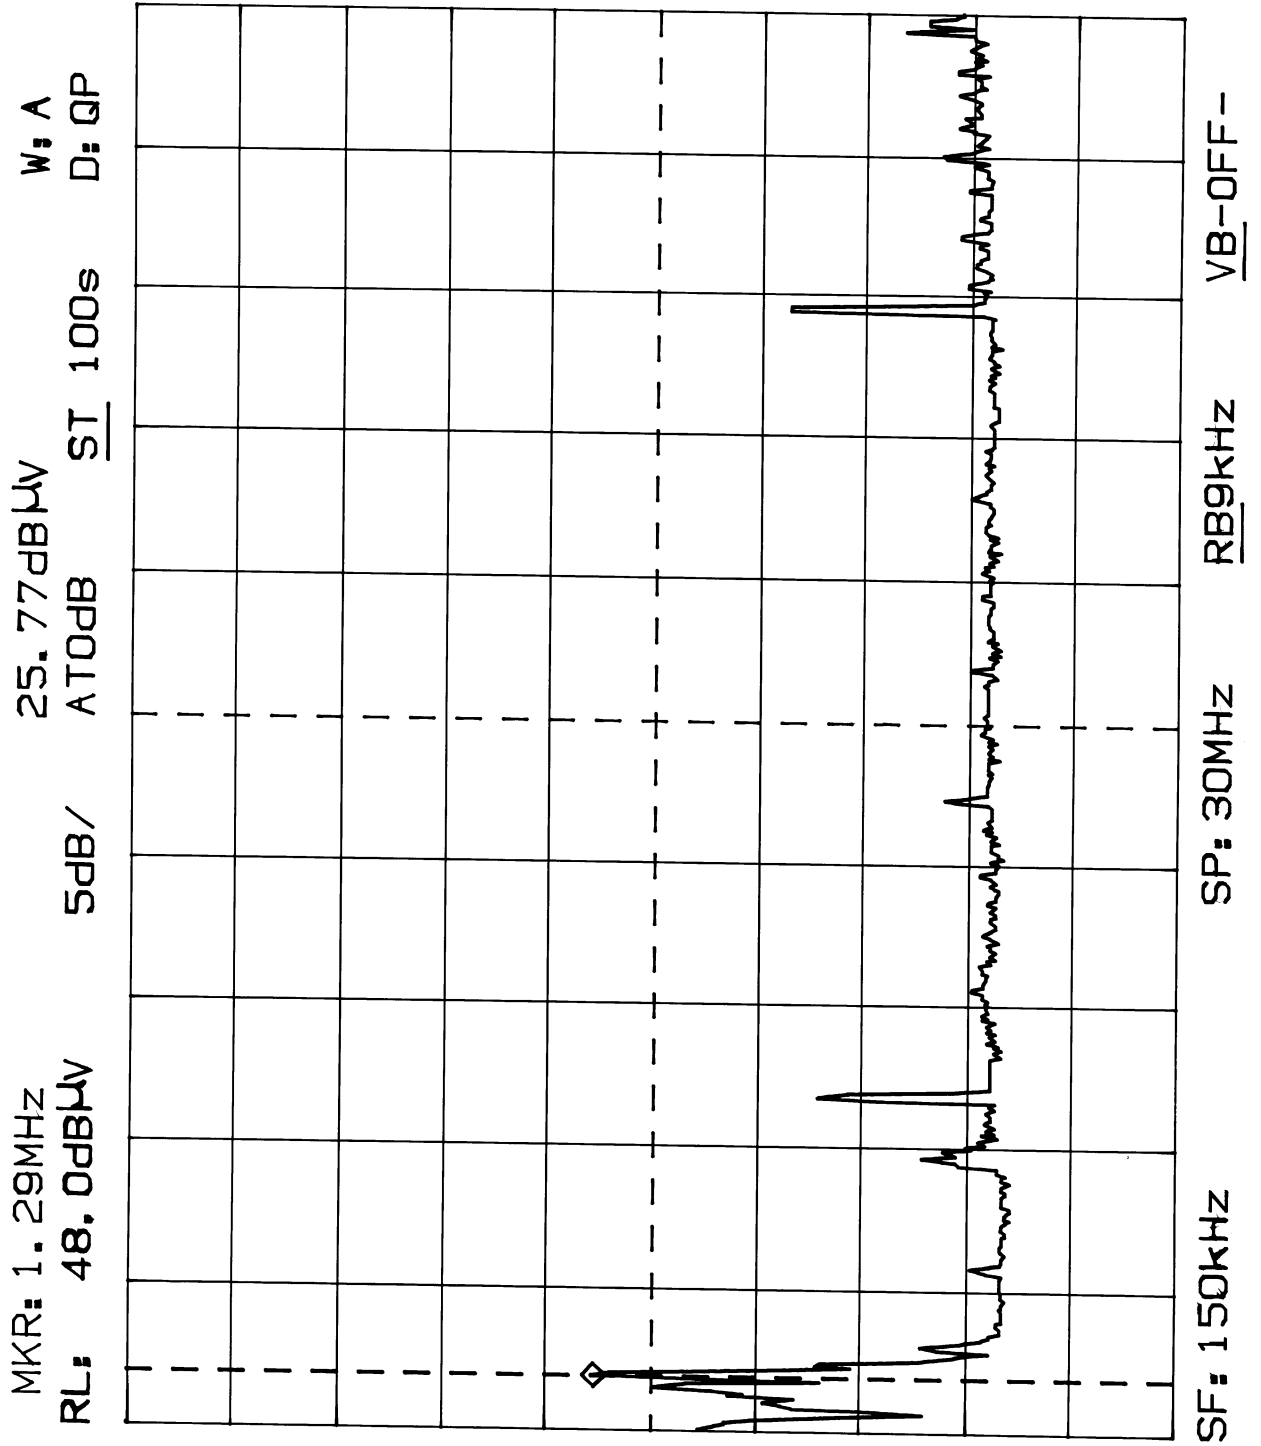


15.249 (c) BAND EDGES

Requirements: Emissions outside of the frequency band must be attenuated 50dB below the fundamental.

Measurement: The base was attenuated by 50 dB. The handset was attenuated by 50 dB.


Measurement Data: The Bandedge was measured at the Low end of the band for the base, and the High end of the band for the handset. See Plots [Exhibits D(1)-11 to -12].

BAND EDGE (Base)
MODEL 27673XXX-A

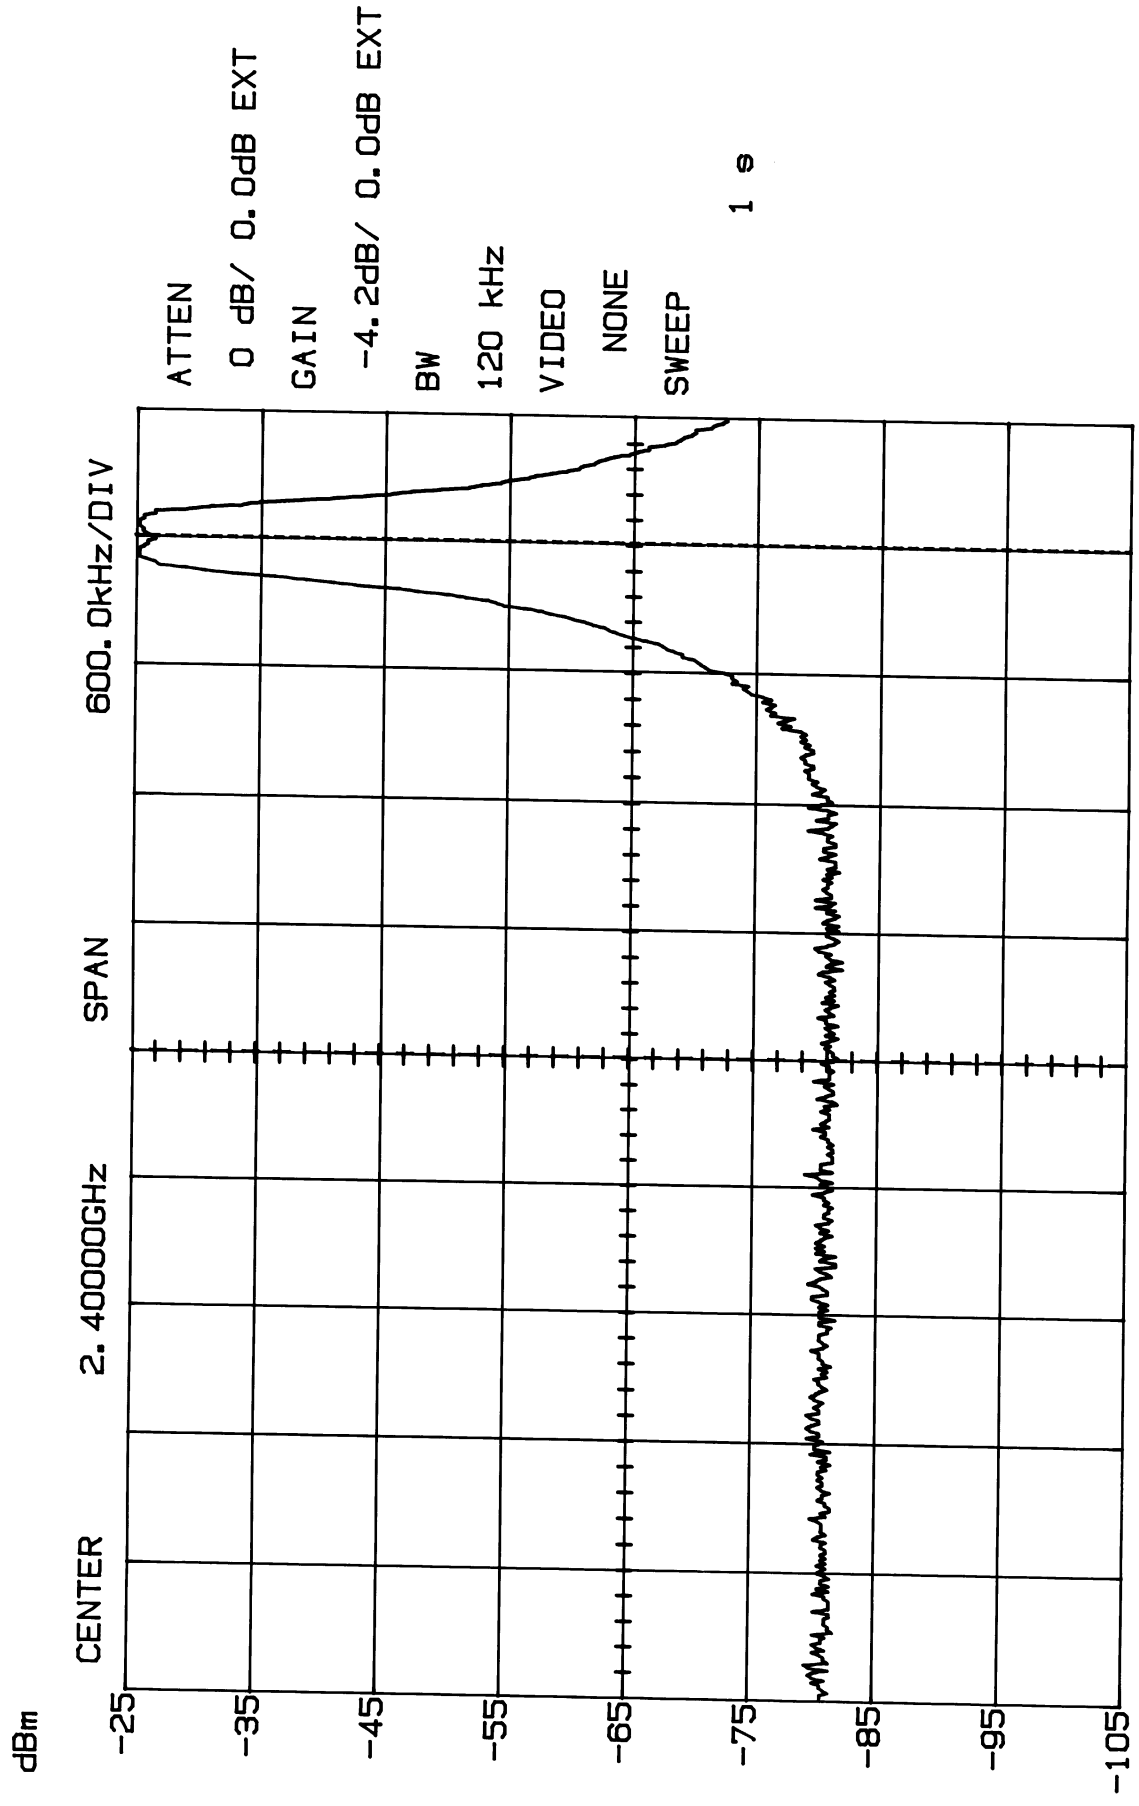

M1 -82.36dB/ 2.40000GHz Δ55.00dB/ 2.40MHz

BAND EDGE (Handset) MODEL 27673XXX-A

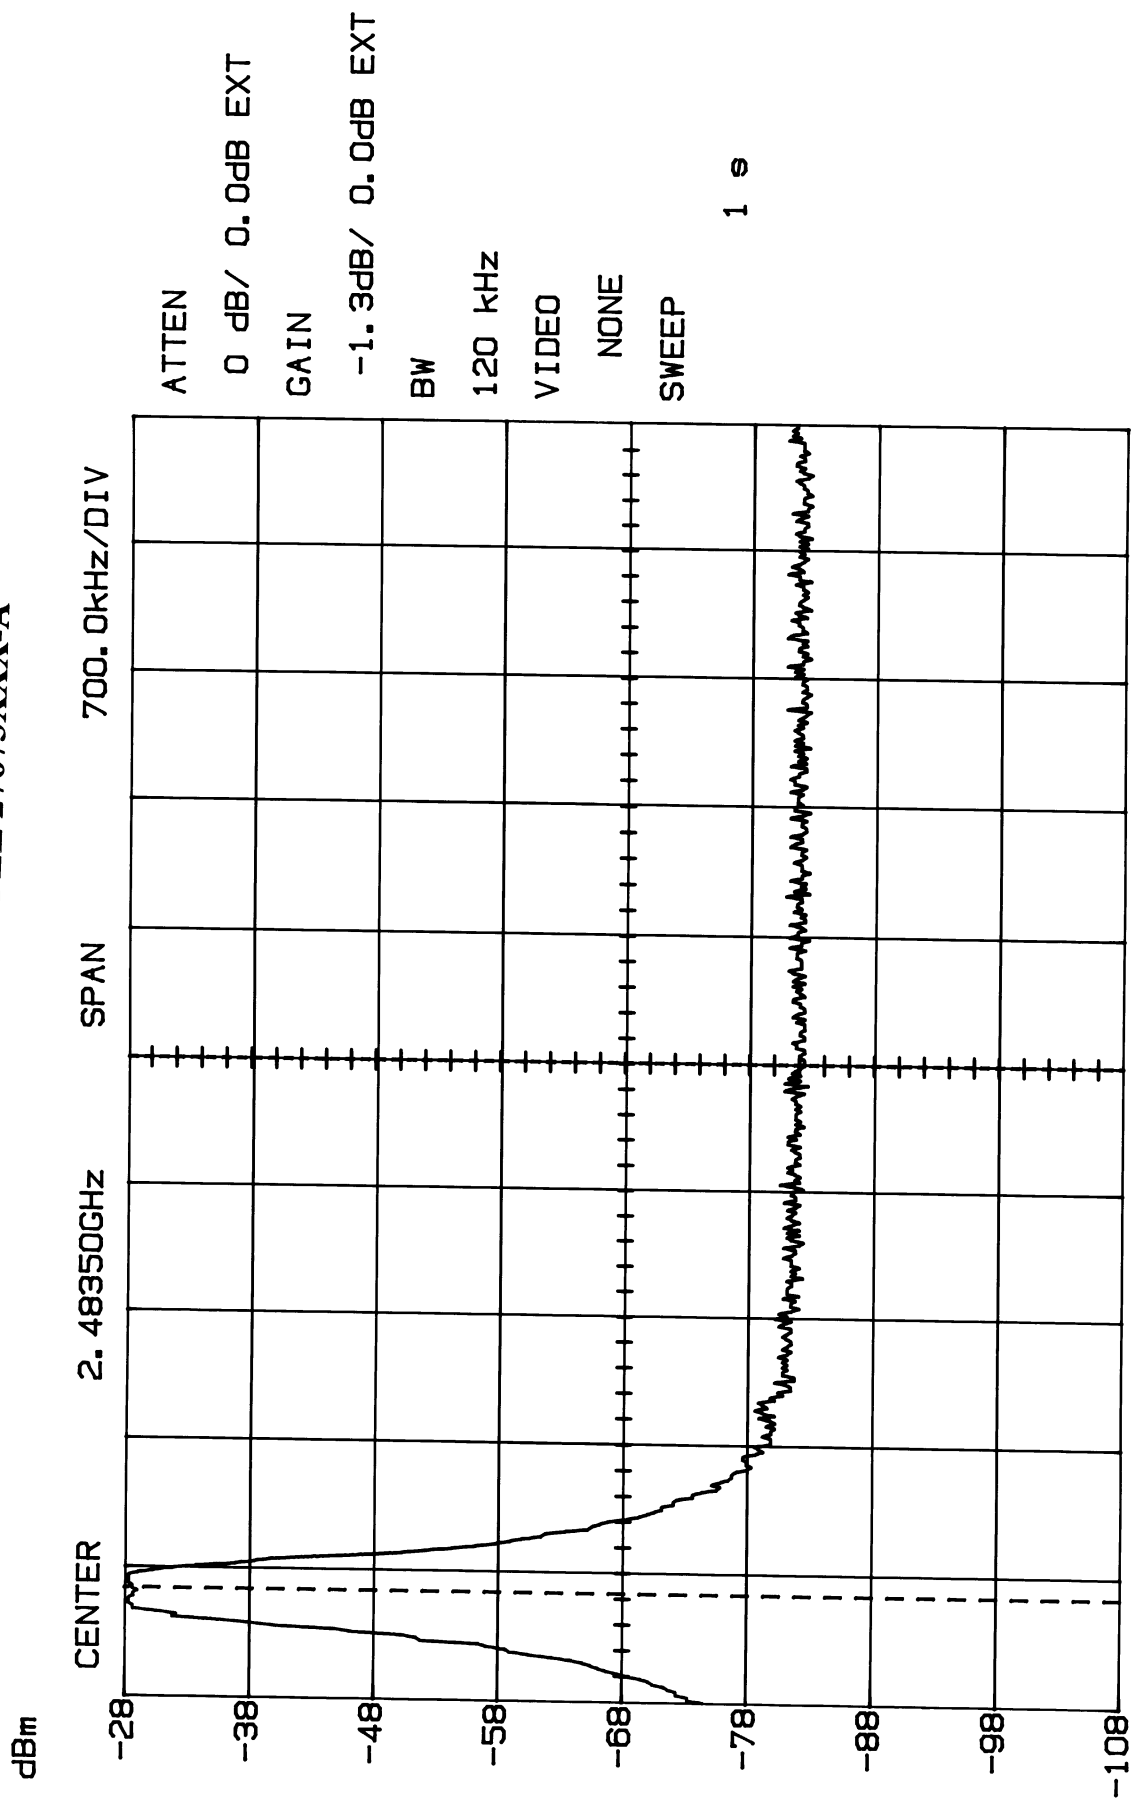

M2 -83.07dB/ 2.48350GHz Δ 53.75dB/ 2.91MHz

2.202 BANDWIDTH

Base:

Channel 1: **0.249 MHz** [Refer to Exhibit D(1)-15]

Channel 40: **0.233 MHz** [Refer to Exhibit D(1)-16]


Handset:

Channel 1: **0.314 MHz** [Refer to Exhibit D(1)-17]

Channel 40: **0.310 MHz** [Refer to Exhibit D(1)-18]


BANDWIDTH = **0.249 MHz (Base)**
 0.314 MHz (Handset)

20dB BANDWIDTH
Channel 1 - Base
MODEL 27673XXX-A

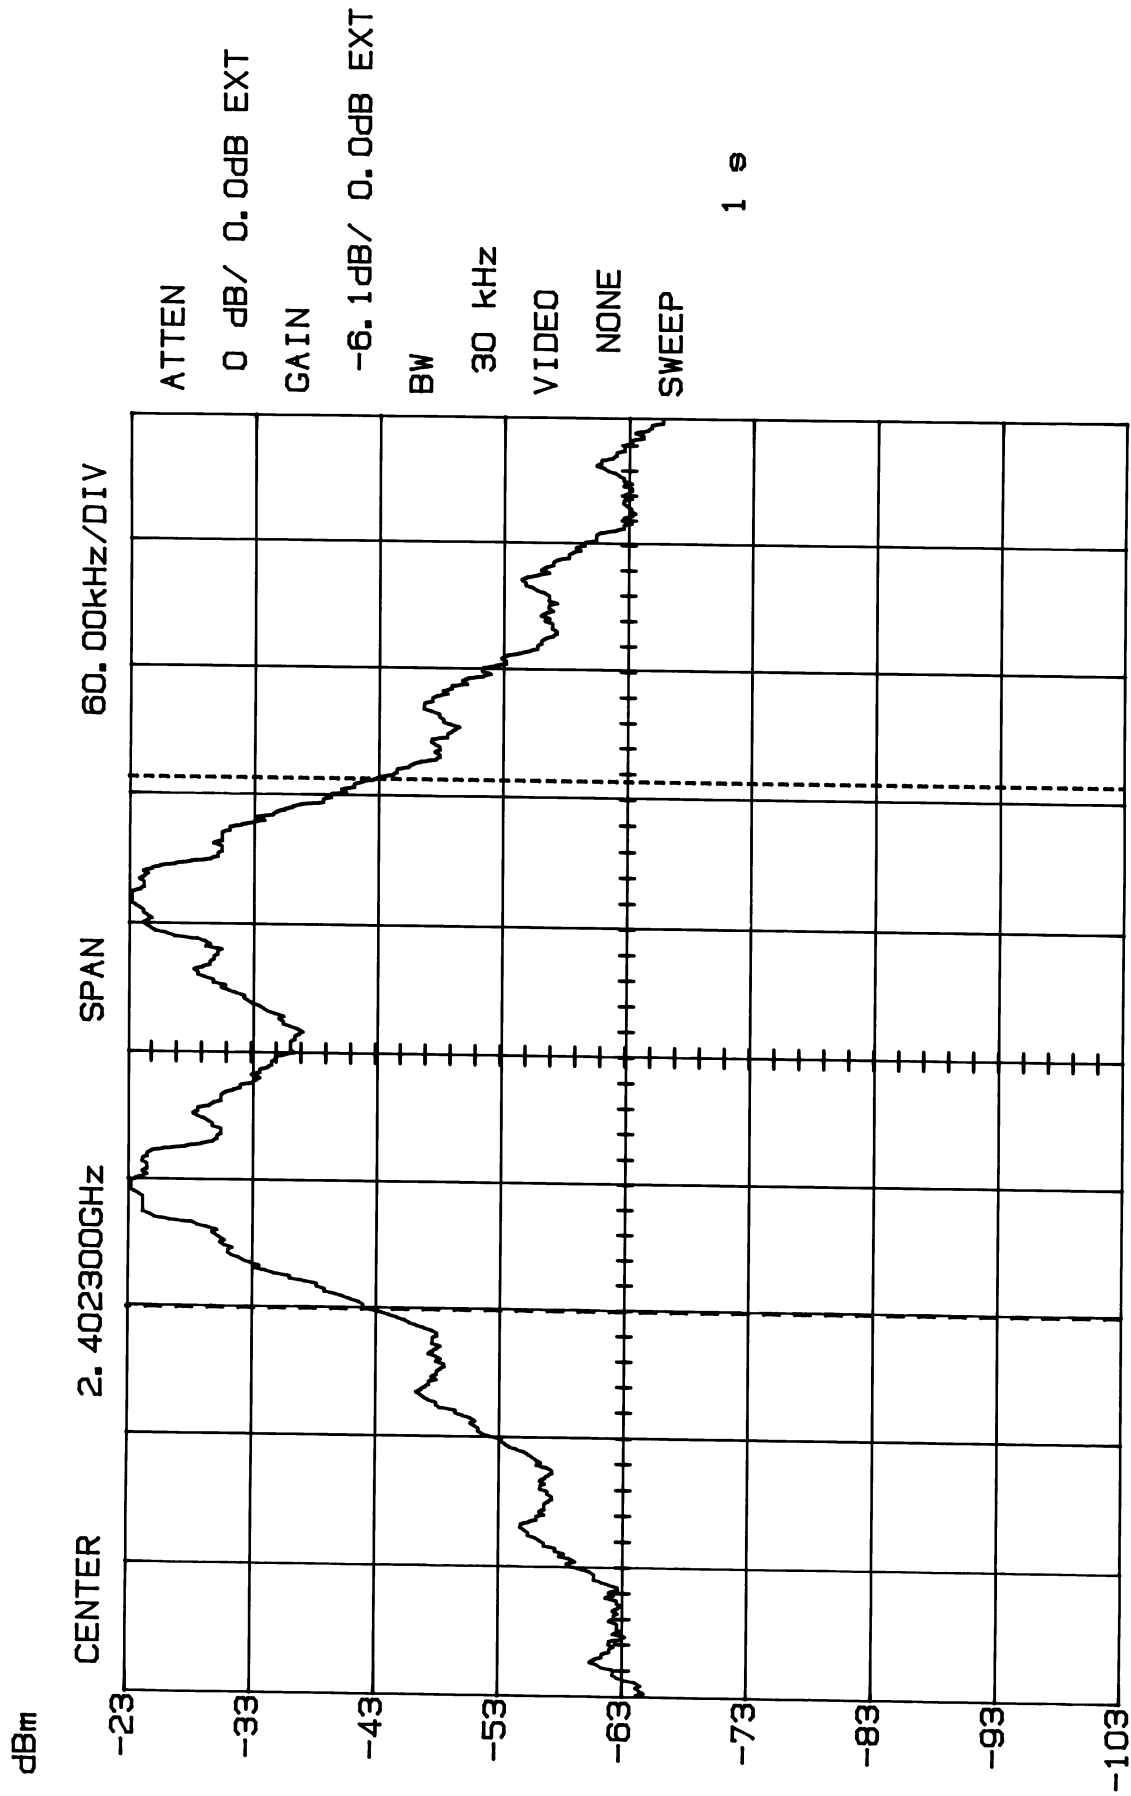


M1 -43.58dB/ 2.402179GHz Δ 0.00dB/ 249.000kHz


20dB BANDWIDTH
Channel 40 - Base
MODEL 27673XXX-A

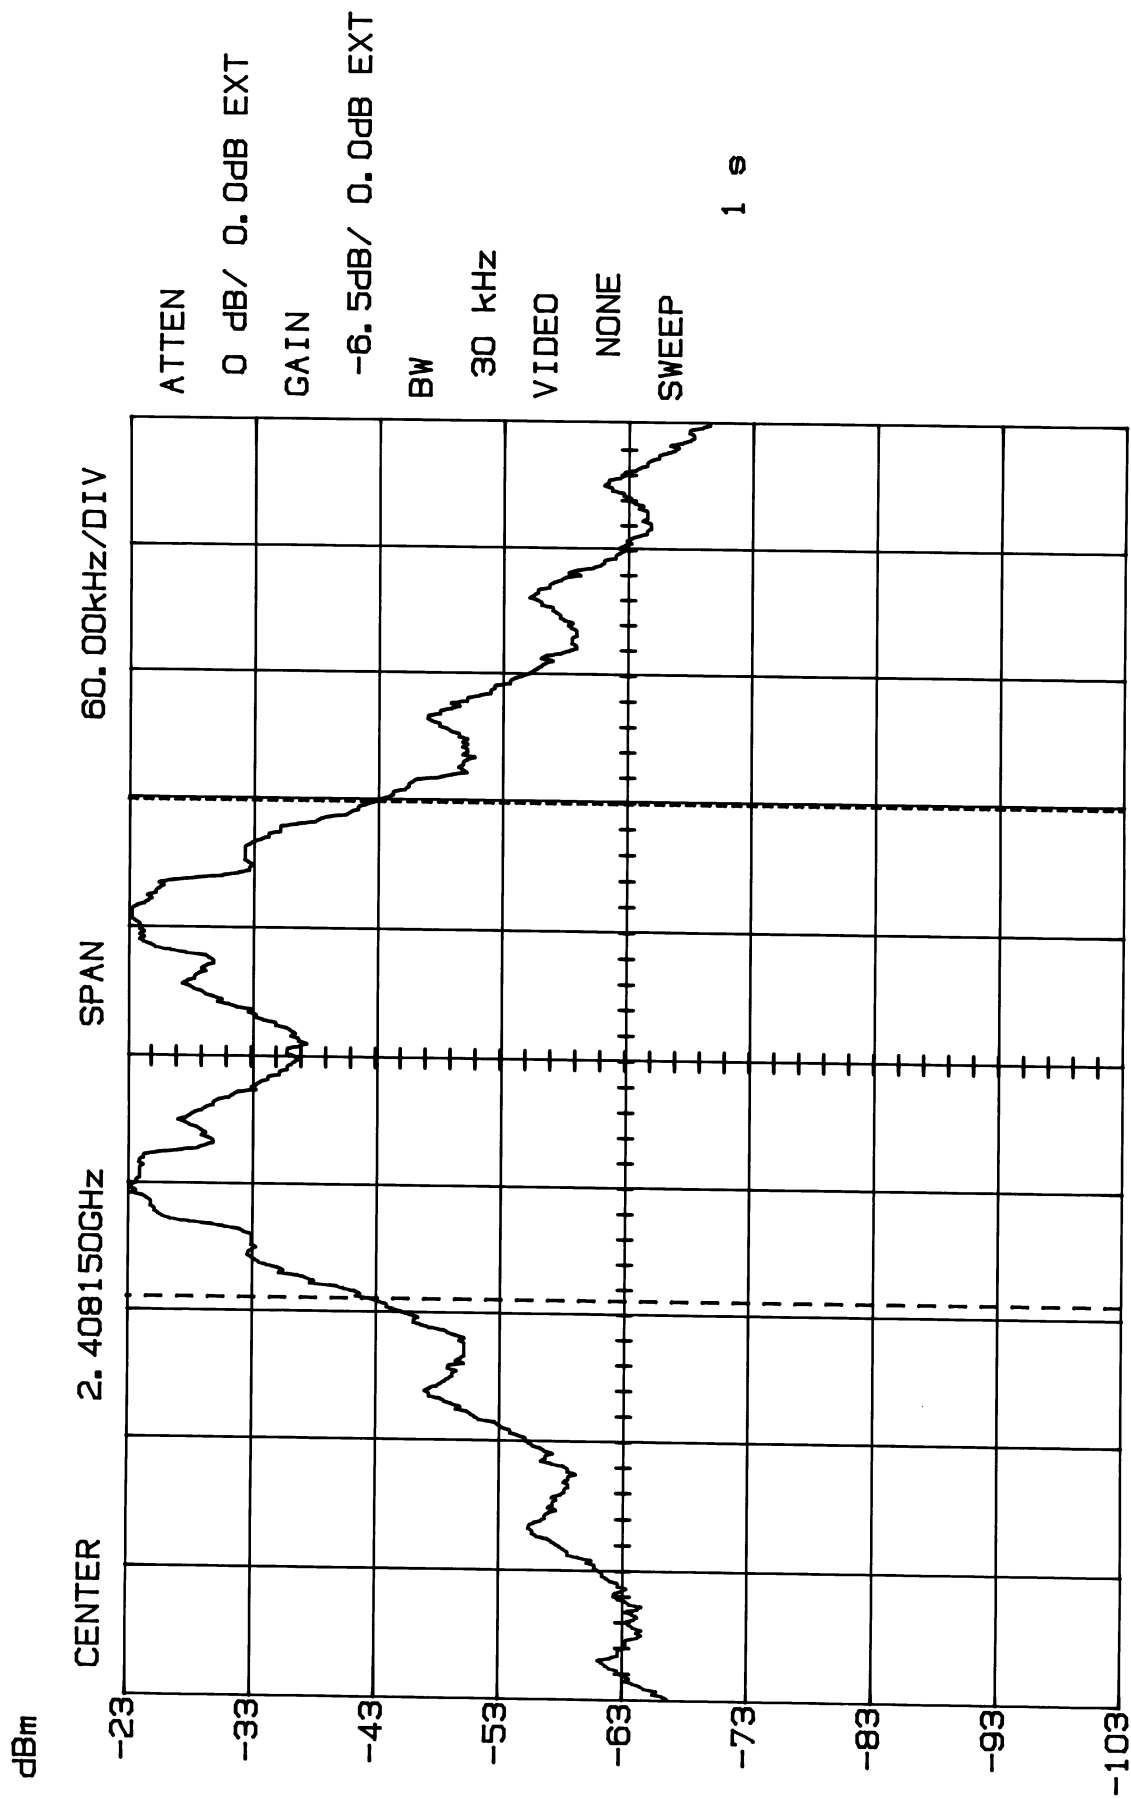

20dB BANDWIDTH
Channel 1 - Handset
MODEL 27673XXX-A

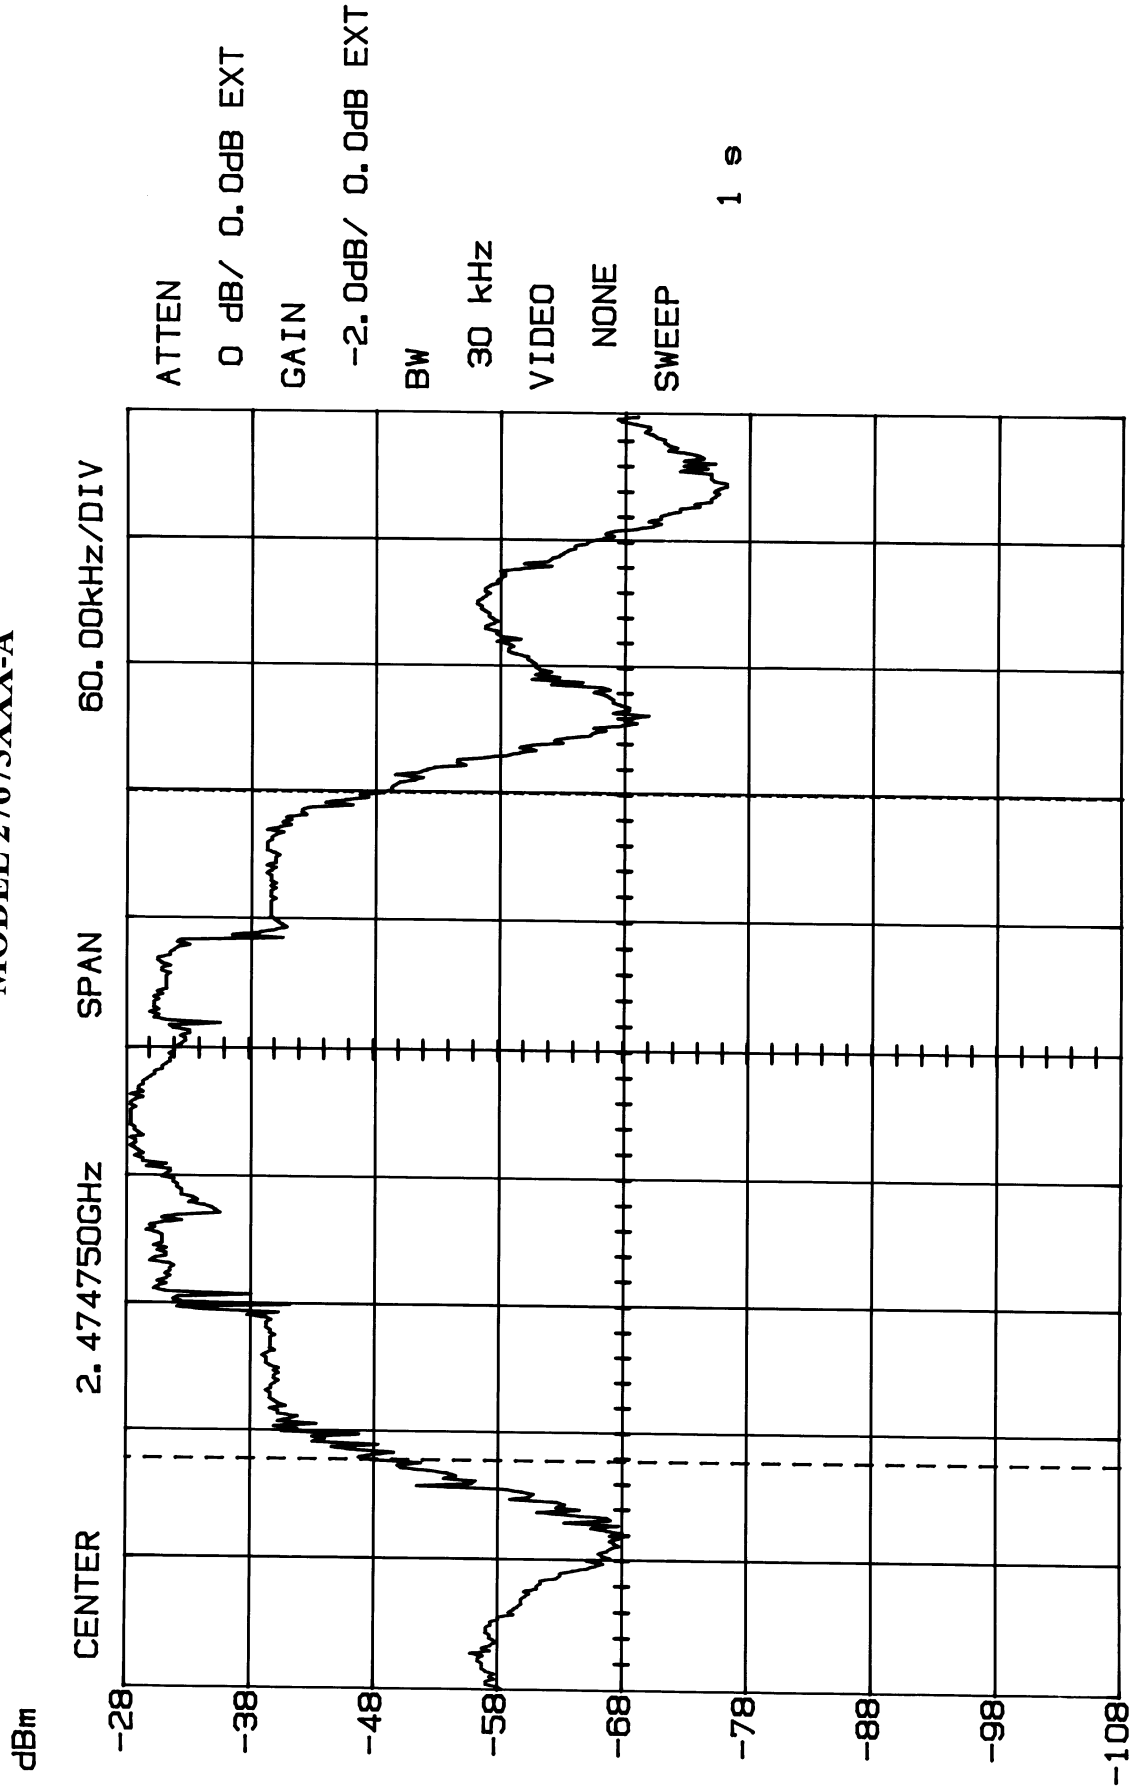

20dB BANDWIDTH
Channel 40 - Handset
MODEL 27673XXX-A

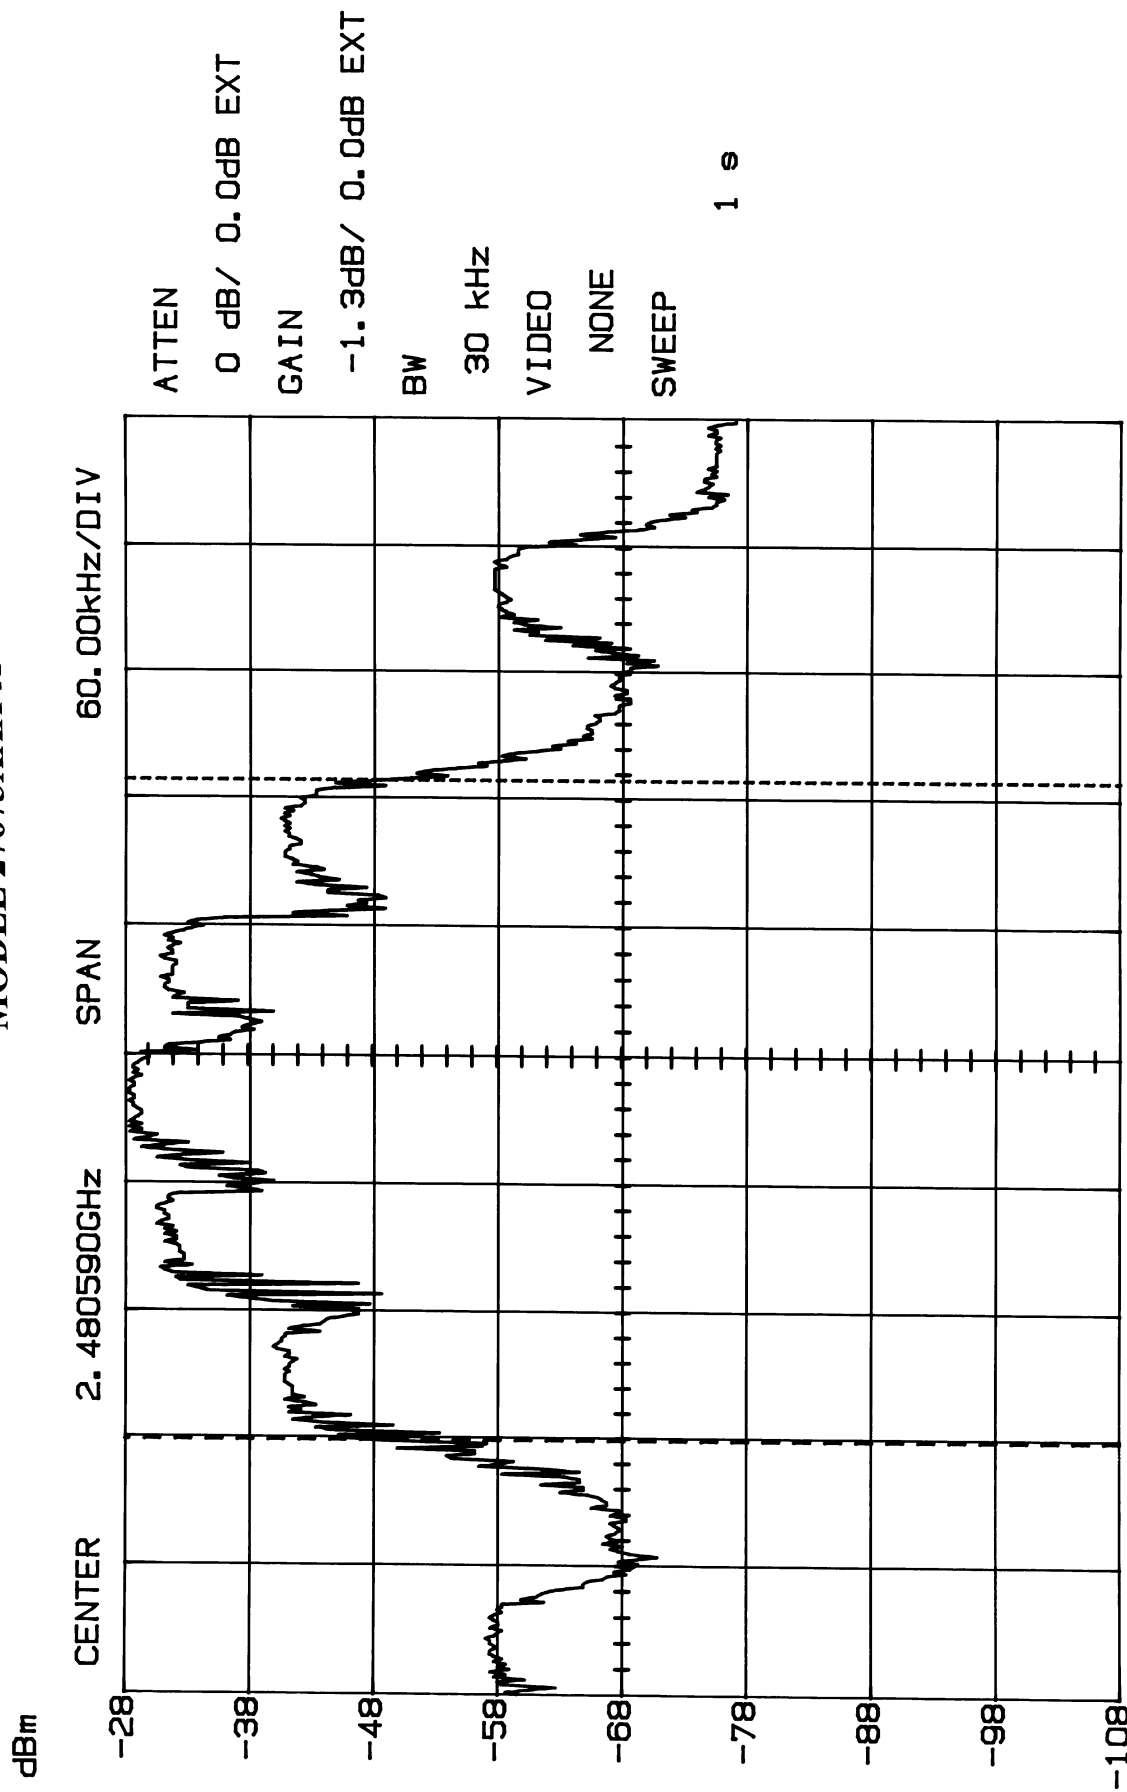

M2 -48.38dB/ 2.480719GHz Δ 1.25dB/ 310.000kHz

15.249 (a) and 15.249 (b)
FIELD STRENGTH OF EMISSIONS

Page 1 of 3

Requirements:

Field Strength of Fundamental		Field Strength of Harmonics	15.209	
			30-88 MHz	40 dB μ V/m@ 3m
2.4023-2.4806 GHz	94dB μ V	54 dB μ V/m@ 3m	88-216 MHz	43.5
			216-960 MHz	46
			Above 960 MHz	54

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

Emissions that fall in the restricted bands (15.205) must be less than 54dB μ V/m

FIELD STRENGTH OF EMISSIONS

Test Data:**BASE UNIT**

Emission Frequency MHz	Meter Reading @3m dB μ V	Antenna	Cable and ACF dB	Field Strength dB μ V/M	FCC Limit dB μ V/M	Margin dB	Detector & BW KHz
<u>Channel 1</u>							
2402.30	55.00	Horn H	33.38	88.38	94	-5.62	PK 1000
4804.60	---						
7206.90	---						
9609.20	---						
<u>Channel 40</u>							
2408.15	54.00	Horn H	33.38	87.38	94	-6.62	PK 1000
4816.30	---						
7224.45	---						

FIELD STRENGTH OF EMISSIONS**Test Data:****HANDSET UNIT**

Emission Frequency MHz	Meter Reading @3m dB μ V	Antenna	Cable and ACF dB	Field Strength dB μ V/M	FCC Limit dB μ V/M	Margin dB	Detector & BW KHz
<u>Channel 1</u>							
2474.75	55.00	Horn V	33.50	88.50	94	-5.50	PK 1000
4949.50	9.00	Horn V	38.74	47.74	54	-6.26	PK 1000
7424.25	---						
<u>Channel 40</u>							
2480.59	55.00	Horn V	33.51	88.51	94	-5.49	PK 1000
4961.18	9.00	Horn V	38.74	47.74	54	-6.26	PK 1000
7441.77	---						