

Left Tilted

Date/Time: 2/13/2007 1:35:09 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: DECT Philips; Type: PP; Serial: 27909XXX-X

Communication System: US DECT-1900; Frequency: 1925 MHz; Duty Cycle: 1:24
Medium parameters used: $f = 1925$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Air temperature: 26 degC; Liquid temperature: 21.3 degC;
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1791; ConvF(5, 5, 5); Calibrated: 9/19/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LT-MID/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.03 V/m; Power Drift = 0.197 dB

Peak SAR (extrapolated) = 0.017 W/kg


SAR(1 g) = 0.00633 mW/g; SAR(10 g) = 0.00351 mW/g

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.


Maximum value of SAR (measured) = 0.007 mW/g

LT-MID/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.017 mW/g

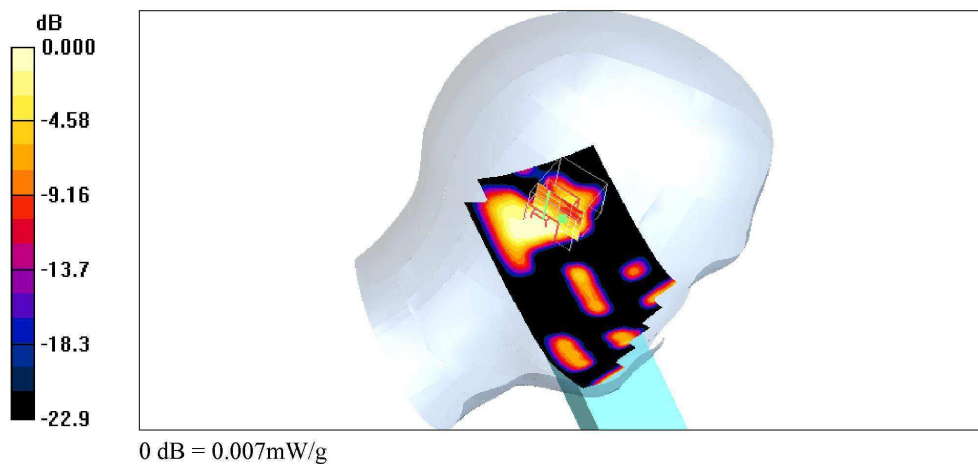

Right Head

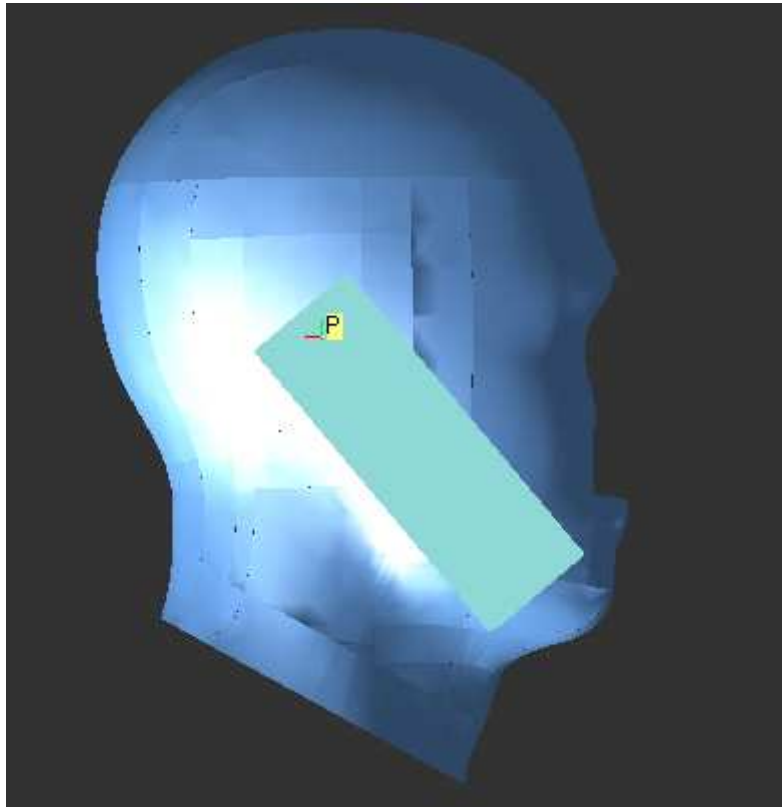

Right Cheek

Date/Time: 2/13/2007 2:00:23 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: DECT Philips; Type: PP; Serial: 27909XXX-X

Communication System: US DECT-1900; Frequency: 1925 MHz; Duty Cycle: 1:24
Medium parameters used: $f = 1925$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Air temperature: 26 degC; Liquid temperature: 21.5 degC;
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1791; ConvF(5, 5, 5); Calibrated: 9/19/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RC-MID/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.69 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 0.031 W/kg


SAR(1 g) = 0.00885 mW/g; SAR(10 g) = 0.00449 mW/g

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.010 mW/g

RC-MID/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.030 mW/g

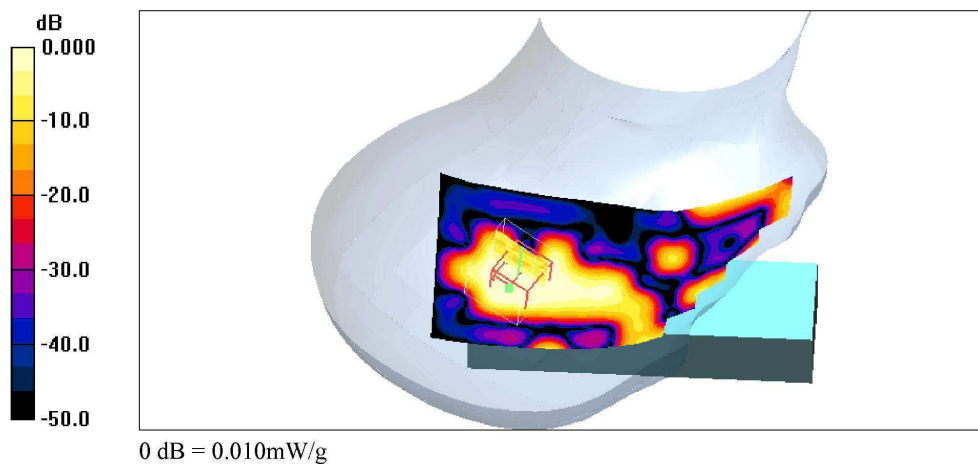

Right Tilted

Date/Time: 2/13/2007 2:10:31 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: DECT Philips; Type: PP; Serial: 27909XXX-X


Communication System: US DECT-1900; Frequency: 1925 MHz; Duty Cycle: 1:24
Medium parameters used: $f = 1925$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Air temperature: 26 degC; Liquid temperature: 21.6 degC;
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1791; ConvF(5, 5, 5); Calibrated: 9/19/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

RT-MID/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.017 mW/g

RT-MID/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.89 V/m; Power Drift = 0.059 dB
Peak SAR (extrapolated) = 0.013 W/kg
SAR(1 g) = 0.00514 mW/g; SAR(10 g) = 0.00259 mW/g
Maximum value of SAR (measured) = 0.005 mW/g

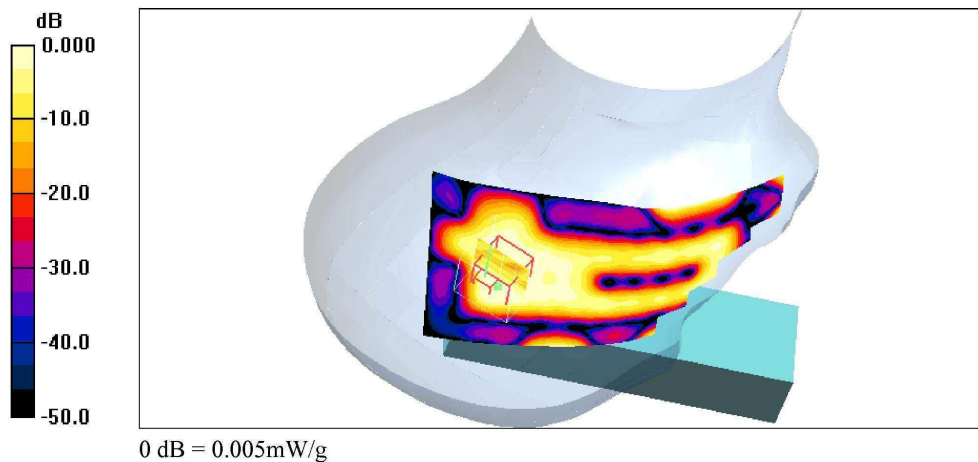

Left Cheek

Date/Time: 2/13/2007 2:33:33 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: DECT Philips; Type: PP; Serial: 27909XXX-X

Communication System: US DECT-1900; Frequency: 1928.5 MHz; Duty Cycle: 1:24
Medium parameters used: $f = 1928.5$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Air temperature: 26 degC; Liquid temperature: 21.8 degC;
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1791; ConvF(5, 5, 5); Calibrated: 9/19/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn629;
- Phantom: SAM 12-2; Type: SAM4.0; Serial: TP-1347
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

LC-HIGH/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.018 mW/g

LC-HIGH/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.10 V/m; Power Drift = 0.166 dB
Peak SAR (extrapolated) = 0.034 W/kg
SAR(1 g) = 0.0119 mW/g; SAR(10 g) = 0.00654 mW/g

Warning: Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement. Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.013 mW/g

