



Report No.: HK08041602-1
Speakerphone with Charger
AC Port "L"


Report No.:HK08041602

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW0090

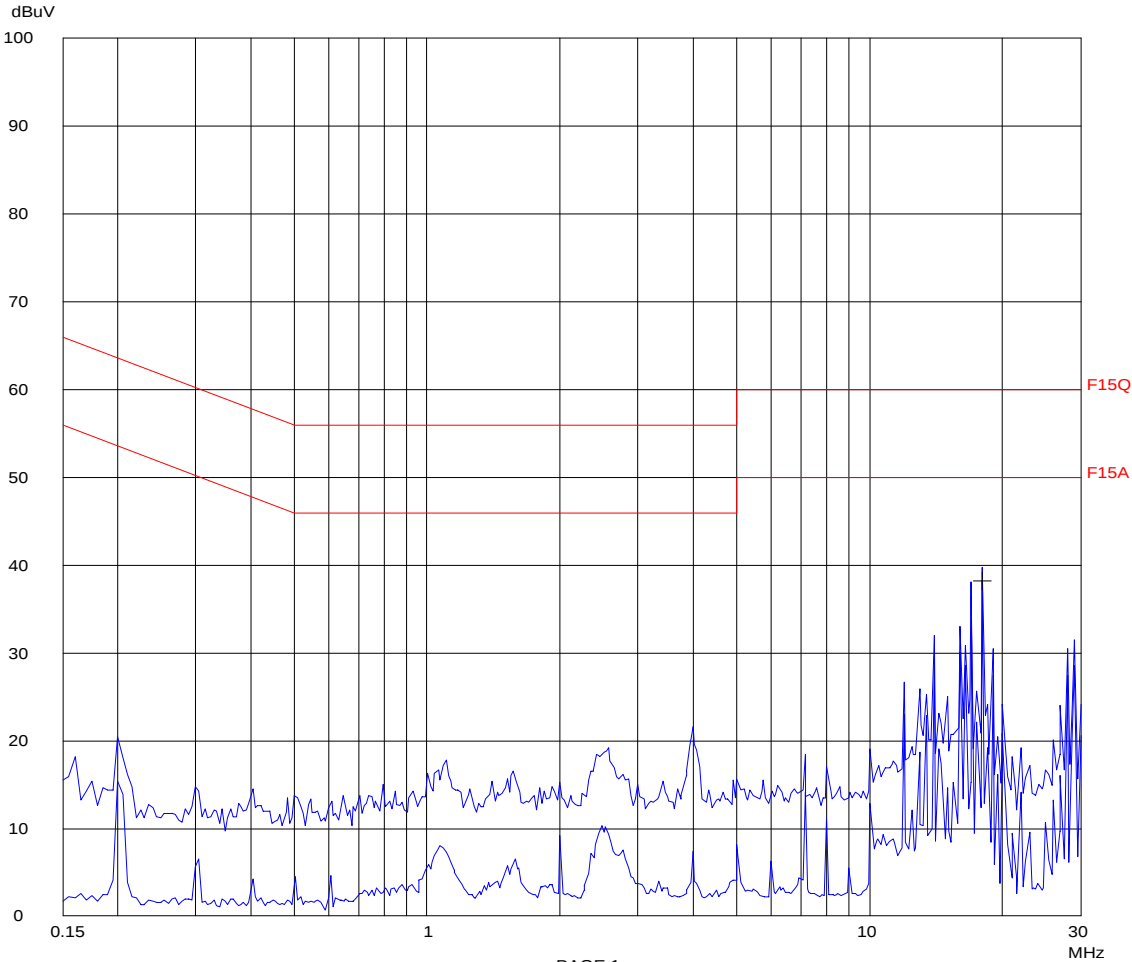

Ctrl No.: N/A



Report No.: HK08041602-1
Speakerphone with Charger
AC Port "L"

Report No.:HK08041602

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB

no Results

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB

18.00000	38.1	50.0	-11.9
----------	------	------	-------

* limit exceeded



Report No.: HK08041602-1
Speakerphone with Charger
AC Port "N"

Report No.: HK08041602

Scan Settings (1 Range)

|----- Frequencies -----|----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s


Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
----------------	-------	------	------

2	1	9k	30M	EW0699
---	---	----	-----	--------

12	9k	30M	EW0090
----	----	-----	--------

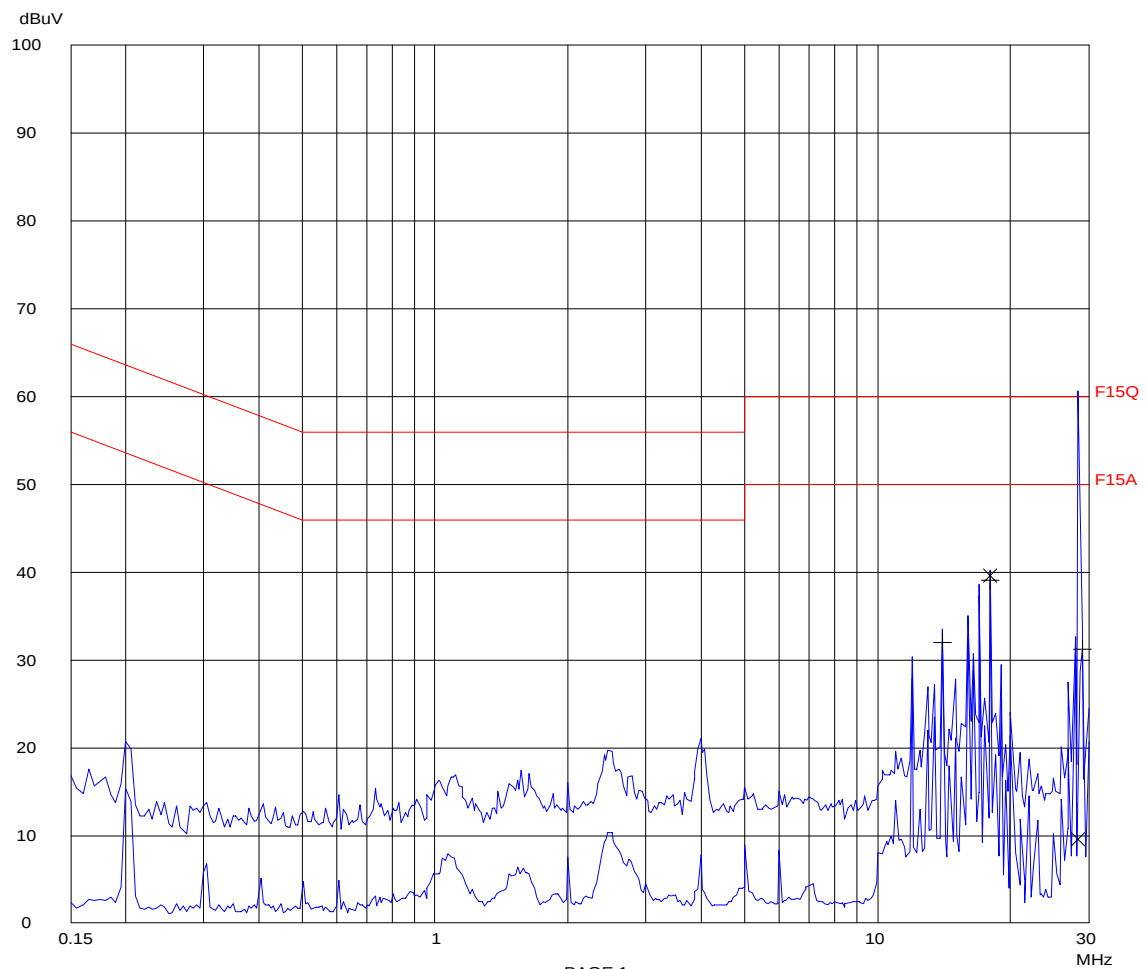

Ctrl No.: N/A



Report No.: HK08041602-1
Speakerphone with Charger
AC Port "N"

Report No.:HK08041602

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB

18.00000	39.6	60.0	-20.4
28.46500	9.5	60.0	-50.5

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB

14.00000	31.9	50.0	-18.1
18.00000	39.0	50.0	-11.0
29.00000	31.2	50.0	-18.8

* limit exceeded

Ctrl No.: N/A