





Test report no.: 77619/5

Item tested: DECT 6.0 Gateway

Type of equipment: Isochronous UPCS Device

FCC ID: G9H2-8310A

Client: Thomson Inc.

FCC Part 15, subparts B and D

Isochronous UPCS Device 1920 - 1930 MHz

Industry Canada RSS-213, Issue 2

2 GHz Licence-exempt Personal Communications Service Devices (LE-PCS)

24 January 2007

Authorized by:6911 Slan

Egil Hauger V
Technical Verificator



CONTENTS

1	GENERAL INFORMATION	
1.1	Testhouse Info	
1.2	Client Information	
1.3	Manufacturer (if other than client)	3
_		
2	TEST INFORMATION	
2.1	Tested Item	
2.2	Test Environment	
2.3	Test Period	
2.4	Test Engineer(s)	
2.5	Test Equipment	
2.6	Other Comments	5
2	TEST REPORT SUMMARY	6
3 3.1	General	
	Test Summary	
3.2	•	
4	TEST RESULTS	8
4.1	Power Line Conducted Emissions	
4.2	Coordination with fixed microwave	
4.3	Digital Modulation Techniques	
4.4	Labelling Requirements	
4.5	Antenna Requirement	14
4.6	Channel Frequencies	
4.7	Automatic Discontinuation of Transmission	15
4.8	Peak Power Output	
4.9	Emission Bandwidth B	
4.10	Power Spectral Density	
4.11	In-Band Unwanted Emissions, Conducted	24
4.12	Out-of-band Emissions, Conducted	26
4.13	Carrier Frequency Stability	30
4.14	Frame Repetition Stability	31
4.15	Frame Period and Jitter	
4.16	Monitoring Threshold, Least Interfered Channel	34
4.17	Threshold Monitoring Bandwidth	35
4.18	Reaction Time and Monitoring Interval	36
4.19	Time and Spectrum Window Access Procedure	วถ
4.20	Acknowledgements and Transmission Duration	⊿1
4.21	Dual Access Criteria Check	41 12
4.22	Alternative Monitoring Interval	
4.23	Duty Cycle Correction Factor Calculation	7 ∠
4.24	Spurious Emissions (Radiated)	40 11
4.25	Receiver Spurious Emissions	
4.23	·	
5	TEST SETUPS	55
5.1	Frequency Measurements	55
5.2	Timing Measurements	
5.3	Conducted Emission Test	
5.4	Radiated Emissions Test	
5.5	Power Line Conducted Emissions Test	
5.6	Monitoring Tests	
_	TEST FOUIDMENT USED	
6	IEST ENTIDMENT USEN	52



1 GENERAL INFORMATION

1.1 Testhouse Info

Name: Nemko Comlab

Address: Gåsevikveien 8, Box 96

N-2027 Kjeller, NORWAY

Telephone: +47 64 84 57 00 Fax: +47 64 84 57 05

E-mail: comlab@nemko.com

FCC test firm

registration #: 994405

IC OATS

registration #: 4443

Total Number

of Pages: 58

1.2 Client Information

Name: Thomson Inc.

Address: 10330 North Meridian St., INH-210, Indianapolis, IN, 46290 USA

Contact:

Name: Roger Hunt Telephone: 317-587-3095

E-mail: roger.hunt@thomson.net

1.3 Manufacturer (if other than client)

Name: RTX Products A/S

Address: Stroemmen 6, 9400 Noerresundby, Denmark

Contact:

Name: Klaus Ahlbeck Telephone: +45 9632 2300

E-mail: kal@rtx.dk



2 Test Information

2.1 Tested Item

Name :	Thomson
FCC ID:	G9H2-8310A
Industry Canada ID :	3765A-28310A
Model/version :	USA: 28310EE1-A
	Canada: 28310EE1-A TC28310EE1-A
Serial number :	/
Hardware identity and/or version:	V6
Software identity and/or version :	V0008 / V0009
Frequency Range :	1921.536 – 1928.448 MHz
Number of Channels :	5 RF Channels, 5x12 = 60 TDMA Duplex Channels
Type of Modulation :	GFSK
User Frequency Adjustment :	None
Rated Output Power :	100 mW Peak Power, Less than 18 mW Time Averaged Power
Type of Power Supply :	AC Adaptor, Salom Model: SSW-1328US
Antenna Connector :	None
Antenna Diversity Supported :	Yes
Number of Antennas :	2

Description of Tested Device(s)

The tested equipment is a DECT base which complies with ETSI EN 300 175. The frequencies have been reprogrammed, the output power reduced and the software updated to comply with the FCC requirements to an Isochronous UPCS device after FCC Part 15D.

The EUT is an responding device as described in ANSI C63.17 and is designed to operate together with a DECT portable part (i.e. a handset), which is then the initiating device.

This equipment has both a normal PSTN interface and an Ethernet Interface. The Ethernet Interface can be connected to an Internet Gateway and used to make Skype calls if a handset with this functionality is used.

Exposure Evaluation

The EUT is designed to be fixed to a wall etc. and the user manual contains text that it shall be mounted with a separation distance of at least 20 cm from any humans. For the purposes of exposure evaluation this EUT is a mobile or fixed device. MPE Calculation at 20cm satisfying FCC requirements is submitted as a separate document.

The EUT is exempted from RF Exposure Evaluation to Industry Canada SAR requirements since the output power is below the limit in RSS-102 Issue 2, clause 2.5.2 for General Public Use.



2.2 Test Environment

Temperature: $22 - 25 \,^{\circ}\text{C}$ Relative humidity: $30 - 40 \,^{\circ}\text{M}$ Normal test voltage: $115 \,^{\circ}\text{V}$ AC

The EUT was powered from the supplied AC Adaptor during all tests.

The values are the limit registered during the test period.

2.3 Test Period

Item received date: 2006-12-11

Test period: from 2006-12-11 to 2007-01-24

2.4 Test Engineers

Frode Sveinsen / Tore Løvlien

2.5 Test Equipment

See list of test equipment in clause 6.

2.6 Other Comments

The Monitoring and Time and Spectrum Window Access tests were performed with Test Set-Up 6 (Ref. clause 5). A clock signal from the companion device was used to synchronize the Pulse Pattern Generator and the Spectrum Analyzer to the start of the DECT time window. The EUT was limited by administrative commands to operate on only two frequency carriers. For the tests where the EUT was required to operate on only one frequency carrier, one carrier was blocked by applying a CW interfering signal from RF Generator 3. The Pulse Pattern Generator was used to apply time synchronized interference to time windows where this was required.

Since the EUT was programmed to operate on only two RF carriers, it was only necessary with two RF generators for the monitoring tests, however a third generator was applied for the tests that required specific time slots to be blocked.

All tests except the Radiated Spurious Emissions, Radiated Power and the Power line conducted emissions tests were performed in conducted mode with a temporary antenna connector.

It was checked that 85% of the lowest and 115% of the operating voltage did not have any influence on the measurement results.

The Radiated Emissions tests were performed with all ports populated and operating.



3 TEST REPORT SUMMARY

3.1 General Manufacturer: RTX Products A/S Model No.: See subclause 2.1 Serial No .: All measurements are traceable to national standards. The tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC CFR47 Part 15, paragraph 15.323 for Isochronous UPCS Devices and Industry Canada RSS-213 Issue 2. The conducted test methods have been in accordance with ANSI C63.17-2006 Draft 3.5 where applicable. Radiated tests were conducted is accordance with ANSI C63.4-2003. Radiated emissions are made in a 10m semi-anechoic chamber. A description of the test facility is on file with the FCC and Industry Canada. Production Unit Pre-production Unit Class II Permissive Change PUB Equipment Code ☐ Family Listing

THIS TEST REPORT RELATES ONLY TO THE ITEM (S) TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".



TEST REPORT NO: 77619/5

TESTED BY : ______ DATE: 24 January 2007

Nemko Comlab authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Comlab.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Comlab accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.



3.2 Test Summary

Name of test	FCC CFR 47 Paragraph #	IC RSS-213 Paragraph #	Verdict
Coordination with fixed microwave	15.307(b)	N/A	Complies
Digital Modulation Techniques	15.319(b)	6.1	Complies
Labelling requirements	15.19(a)(3)	RSS-GEN 5.2	Complies
Antenna Requirement	15.317, 15.203	4.1(e)	Complies
Power Line Conducted Emission	15.107(a) 15.207(a)	6.3 RSS-GEN 7.2.2	Complies
Emission Bandwidth	15.323(a)	6.4	Complies
In-band emissions	15.323(d)	6.7.2	Complies
Out-of-band emissions	15.323(d)	6.7.1	Complies
Peak transmit Power	15.319(c), 15.31(e)	6.5	Complies
Power Spectral Density	15.319(d)	4.3.2.1	Complies
Automatic discontinuation of transmission	15.319(f)	4.3.4(a)	Complies
Carrier frequency stability	15.323(f)	6.2	Complies
Frame repetition stability	15.323(e)	4.3.4(c)	Complies
Frame period and jitter	15.323(e)	4.3.4(c)	Complies
Monitoring threshold, Least interfered channel	15.323(c)(2);(5); (9)	4.3.4(b)	Complies
Monitoring of intended transmit window and maximum reaction time	15.323(c)(1)	4.3.4	Complies
Threshold monitoring bandwidth	15.323(c)(7)	4.3.4	Complies
Reaction time and monitoring interval	15.323(c)(1);(5); (7)	4.3.4	Complies
Access criteria test interval	15.323(c)(4);(6)	4.3.4	Complies
Access Criteria functional test	15.323(c)(4);(6)	4.3.4	Complies
Acknowledgements	15.323(c)(4)	4.3.4	Complies
Transmission duration	15.323(c)(3)	4.3.4	N/A ¹
Dual access criteria	15.323(c)(10)	4.3.4	N/A ¹
Alterative monitoring interval	15.323(c)(10);(11)	4.3.4	N/A ²
Spurious Emissions (Antenna Conducted)	15.323(d)	6.7.1	Complies ³
Spurious Emissions (Radiated)	15.319(g) 15.109(a) 15.209(a)	4.3.3 RSS-GEN 7.2.3	Complies
Receiver Spurious Emissions	N/A	6.8	Complies

¹ Only applies for EUT that can be initiating device

² The client declares that the tested equipment does not implement this provision

³ The tested equipment has integrated antennas only



4 TEST RESULTS

4.1 Power Line Conducted Emissions

Para. No.: 15.207 (a)

Test Performed By: Tore Løvlien Date of Test: 12 Dec 2006

Measurement procedure: ANSI C63.4-2003 using 50 μH/50 ohms LISN.

Test Results: Complies

Measurement Data: See attached graph, (Peak detector).

Highest measured value (L1 and N):

Frequency	Detector	Measured value	Limit	Margin
MHz	Peak/QP/A V	dΒμV	dBμV	dB
18.2445	QP	49.5	56	6.5
	AV	40.9	46	5.1
19.7115	QP	48.2	56	7.8
	AV	40.7	46	5.3
20.2605	QP	46.5	60	13.5
	AV	40.2	50	9.8
23.1315	QP	46.4	60	13.6
	AV	44.1	50	5.9



NEMKO COMLAB 12. Dec 06 14:42


Peak

Operator: Tlo
Comment: Thomson RF US sample 2

AC 115V 60Hz N to gnd off hook mode

Scan Settings (1 Range)

	Frequencies			Receiver	Settings
Start	Stop	Step	IF BW	Detector	M-Time Atten Preamp OpRge
150k	30M	4.5k	9k	PK	50ms AUTO LN OFF 60dB

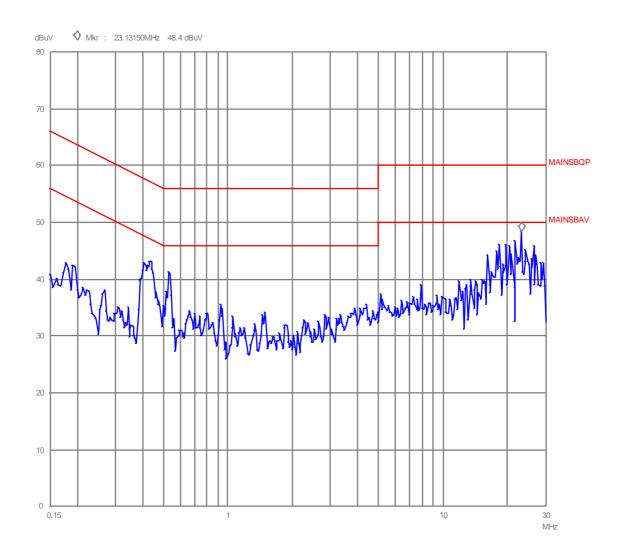

Phase N, Off Hook



NEMKO COMLAB 12. Dec 06 15:01

Peak

Operator: Tlo


Comment: Thomson RF US sample 2

AC 115V 60Hz L1 to gnd off hook mode

EN55022B

Scan Settings (1 Range)

	Frequencies			Receiver	Settings		
Start	Stop	Step	IF BW	Detector	M-Time	Atten Pream	p OpRge
150k	30M	4.5k	9k	PK !	50ms AU	TO LN OFF	60dB

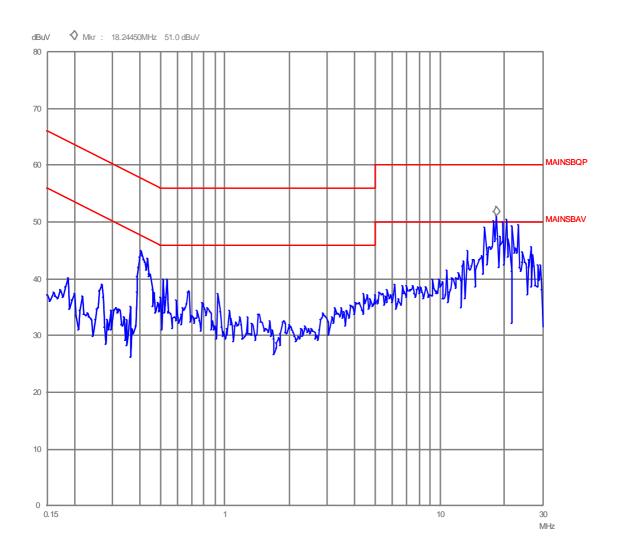

Phase L1, Off Hook



NEMKO COMLAB 12. Dec 06 15:29

Peak

Operator: Tlo


Comment: Thomson RF US sample 2

AC 115V 60Hz N to gnd on hook mode

EN55022B

Scan Settings (1 Range)

	Frequencies			Receive	er Settings	
Start	Stop	Step	IF BW	Detector	r M-Time Atten Preamp OpRo	je
150k	30M	4.5k	9k	PK	50ms AUTO LN OFF 60dB	

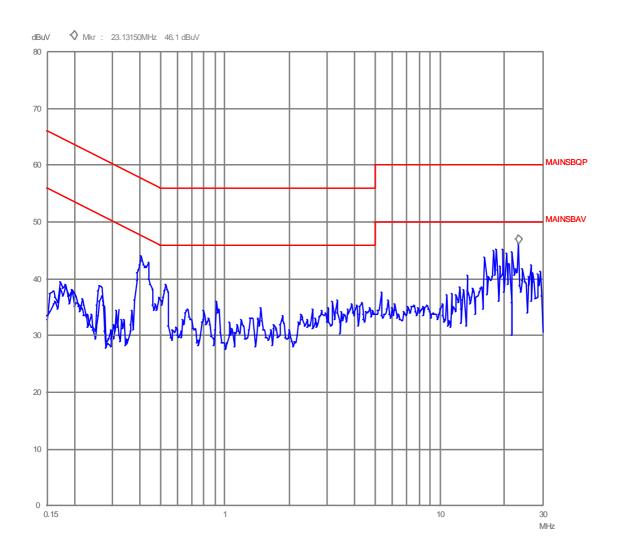

Phase N, On Hook



NEWKO COMLAB 12. Dec 06 15:13

Peak

Operator: Tlo


Comment: Thomson RF US sample 2

AC 115V 60Hz L1 to gnd on hook mode

EN55022B

Scan Settings (1 Range)

	Frequencies			Receiver	Settings
Start	Stop	Step	IF BW	Detector	M-Time Atten Preamp OpRge
150k	30M	4.5k	9k	PK !	50ms AUTO LN OFF 60dB

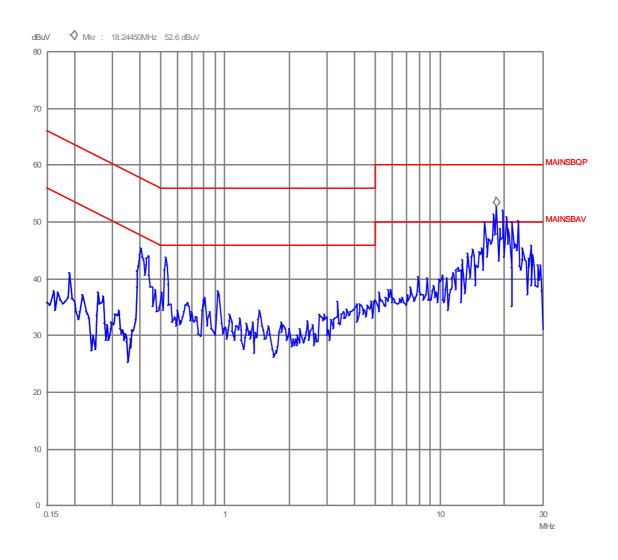

Phase L1, On Hook



TEST REPORT FCC subparts 15 B and D Project no.: 77619 FCC ID: G9H2-8310A

4.2 Coordination with fixed microwave

The affidavit from UTAM, Inc. is included in the documentation supplied by the applicant:						
⊠ Yes	□ No					

Requirement, FCC 15.307 (b):

Each application for certification of equipment operating under the provisions of this Subpart must be accompanied by an affidavit from UTAM, Inc. certifying that the applicant is a participating member of UTAM, Inc. In the event a grantee fails to fulfil the obligations attendant to participation in UTAM, Inc., the Commission may invoke administrative sanctions as necessary to preclude continued marketing and installation of devices covered by the grant of certification, including but not limited to revoking certification.

4.3 Digital Modulation Techniques

The tested equipment is based on DECT technology described in the ETSI standard EN 300175, the only difference is that the channel allocation is modified to operate in the 1920-1930 MHz band.

The EUT used Multi Carrier / Time Division Multiple Access / Time Division Duplex and Digital GFSK modulation.

For further details see the operational description provided by the applicant.

Requirement, FCC 15.319(b):

All transmissions must use only digital modulation techniques.

4.4 Labelling Requirements

See separate documents showing the label design and the placement of the label on the EUT.

Requirements FCC 15.19

The FCC Identifier shall be displayed on the label, and the device(s) shall bear the following statement in a conspicuous location on the device or in the user manual if the device is too small:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label itself shall be of a permanent type, not a paper label, and shall last the lifetime of the equipment.



4.5	Antenna Requirement		
Does the	EUT have detachable antenna?	☐ Yes	⊠ No
If detacha	ble, is the antenna connector non-standard?	☐ Yes	□ No
	d equipment has integral antennas only. The conducted tests were antenna connector.	performed	on a sample with a

Requirement: FCC 15.203, 15.204, 15.317.

4.6 Channel Frequencies

UPCS CHANNEL	FREQUENCY (MHz)
Upper Band Edge	1930.000
0 (Highest)	1928.448
1	1926.720
2	1924.992
3	1923.264
4 (Lowest)	1921.536
Lower Band Edge	1920.000

Requirement: FCC 15.303 (d), (g)

Within 1920 -1930 MHz band for isochronous devices.





Project no.: 77619 FCC ID: G9H2-8310A

4.7 Automatic Discontinuation of Transmission

The EUT transmits Control and Si	⊠ YES	□NO	
TYPE OF EUT :	☐ INITIATING DEVICE	⊠ RESPO	NDING DEVICE

The following tests simulate the reaction of the EUT in case of either absence of information to transmit or operational failure after a connection with the companion device is established.

Number	Test	EUT Reaction	Verdict
1	Power removed from the EUT	А	Pass
2	EUT Switch Off	NA	Pass
3	Hook-On by companion device	В	Pass
4	Hook-On by EUT	NA	Pass
5	Power Removed from Companion Device	В	Pass
6	Companion Device Switch Off	В	Pass

- A Connection breakdown, Cease of all transmissions
- B Connection breakdown, EUT transmits control and signalling information
- C Connection breakdown, Companion Device transmits control and signalling information
- NA Not Applicable (the EUT does not have an on/off switch and can not perform Hook-On)

Requirements, FCC 15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signalling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.



4.8 Peak Power Output

Test Method:

ANSI C63.17, clause 6.1.2.

Test Results: Complies

Measurement Data:

Maximum Conducted Output Power

Channel No.	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Maximum Radiated Output Power (dBm)	Maximum Antenna Gain (dBi)
4	1921.536	20.0	21.4	1.4
0	1928.448	19.8	20.3	0.4

The EIRP is calculated from measured field strength by the formula in DA00-705.

For this test it was also checked that input voltage variation of 85 and 115% of nominal value did not have any effect on the measured output power, neither radiated nor conducted.

Limit:

Conducted: 100 μ W x SQRT(B) = 114 mW = 20.6 dBm, where B is measured Emission Bandwidth in Hz The antenna gain is below 3 dBi, no reduction in transmit power is necessary.


Requirements, FCC 15.319(c)(f)

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz.

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.




Conducted Peak Output Power

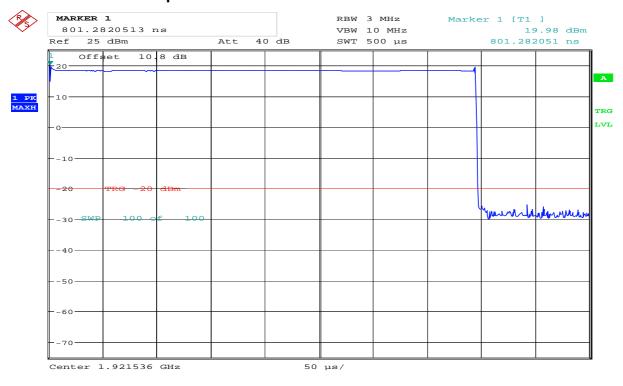

Date: 11.DEC.2006 14:11:08

Lower Channel

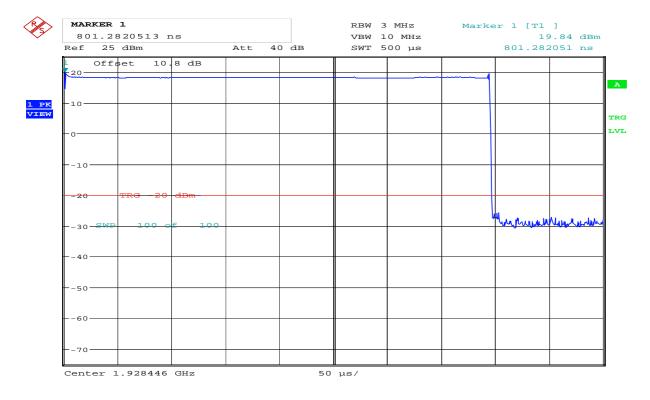


Date: 11.DEC.2006 14:00:38


Upper Channel



Radiated Peak Output Power

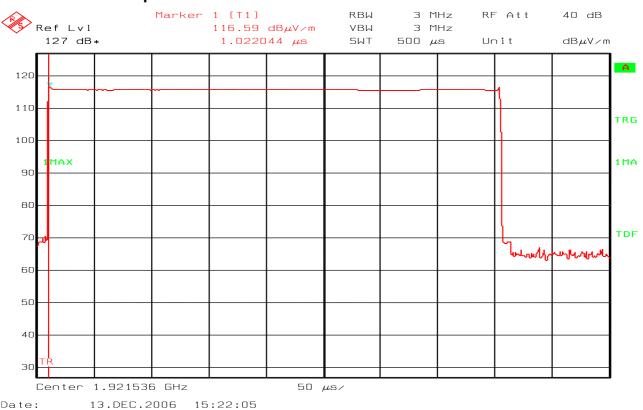

Lower Channel (Max: Ant 1, HP)

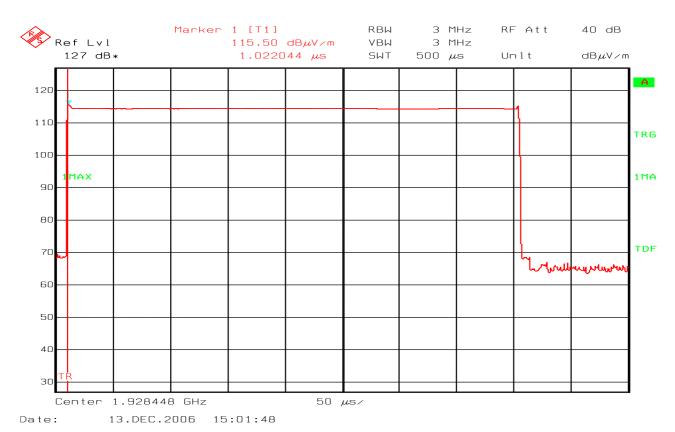

Upper Channel (Max: Ant 1, HP)



4.9 Emission Bandwidth B

Test Method:

ANSI C63.17 D3.5, clause 6.1.3.

Test Results: Complies

Measurement Data:

Channel No.	Frequency (MHz)	26 dB Bandwidth <i>B</i> (kHz)
4	1921.536	1314
0	1928.448	1298


Channel No.	Frequency (MHz)	6 dB Bandwidth (kHz)
4	1921.536	NA
0	1928.448	NA
Channel No.	Frequency (MHz)	12 dB Bandwidth (kHz)
4	1921.536	NA
0	1928.448	NA

Requirements, FCC 15.323(a)

The 26 dB Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz.


No requirements for 6 and 12 dB Bandwidth, these values are only used for testing Monitoring Bandwidth if the Simple Compliance test fails (ANSI C63.17 D3.5 clause 7.4).



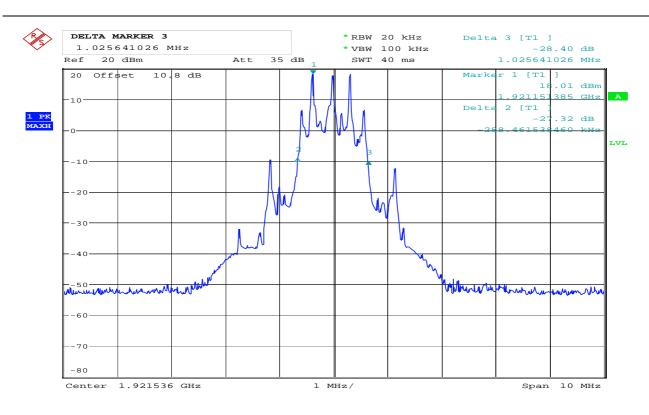

Date: 11.DEC.2006 14:15:34

Emission Bandwidth B, Lower Channel

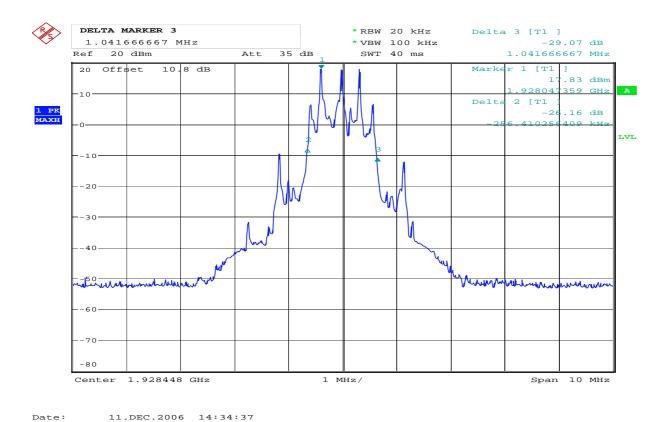

Emission Bandwidth B, Upper Channel



4.10 Power Spectral Density

Test Method:

ANSI C63.17, clause 6.1.5.

Test Results: Complies

Measurement Data:

Channel No.	Frequency (MHz)	Power Spectral Density (dBm)
4	1921.536	1.6
0	1928.448	2.4

Averaged over 1000 sweeps.


Requirements, FCC 15.319(d)

The Power Spectral Density shall be less than 3 mW (4.77 dBm) when averaged over minimum 100 sweeps.




Power Spectral Density

Lower Channel:

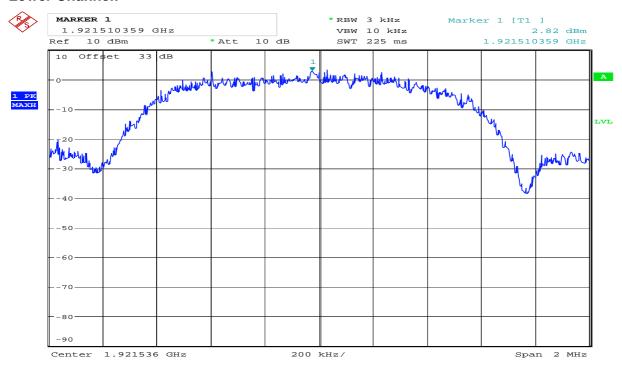

Date: 15.DEC.2006 15:19:16

Overview

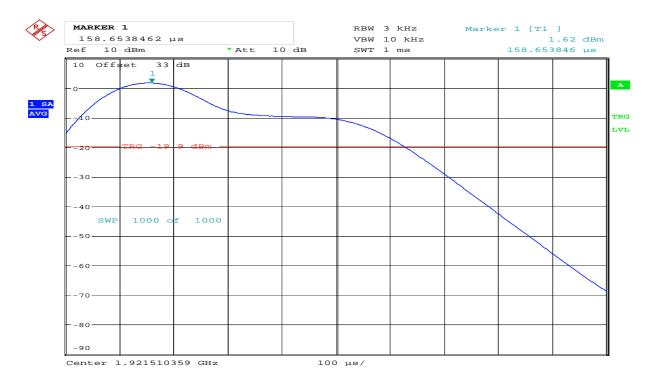


Date: 15.DEC.2006 15:21:23

Averaged, 1000 Sweeps




Power Spectral Density

Upper Channel:

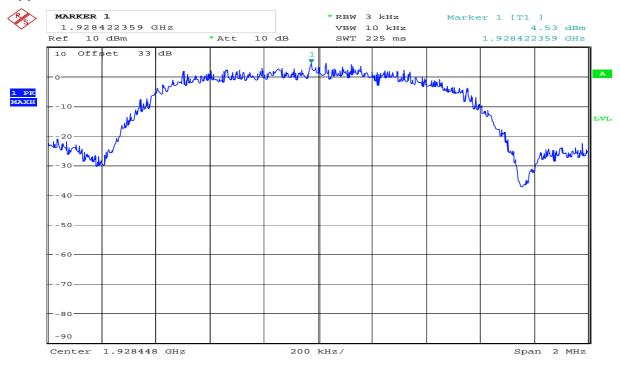

Date: 15.DEC.2006 15:12:53

Overview

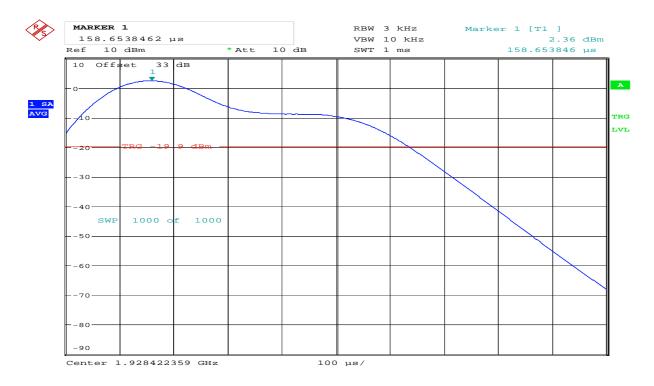

Date: 15.DEC.2006 15:14:32

Averaged, 1000 Sweeps



4.11 In-Band Unwanted Emissions, Conducted

Test Method:

ANSI C63.17, clause 6.1.6.1.

Test Results: Complies


Measurement Data:

See plots.

Requirements, FCC 15.323(d):

 $B < f \le 2B$: less than or equal to 30 dB below max. permitted peak power level $2B < f \le 3B$: less than or equal to 50 dB below max. permitted peak power level

 $3B < f \le UPCS$ Band Edge: less than or equal to 60 dB below max, permitted peak power level

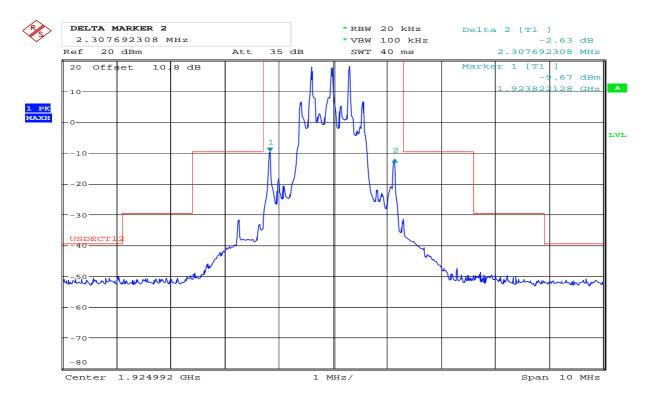


Date: 11.DEC.2006 14:56:49

Middle Channel




In-Band Unwanted Emissions, Conducted

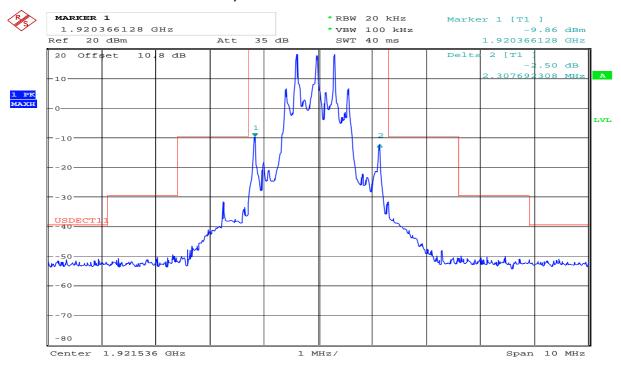

Date: 11.DEC.2006 14:59:31

Lower Channel

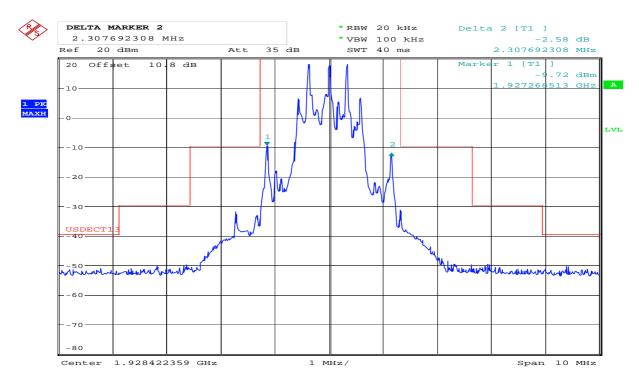

Date: 11.DEC.2006 14:46:33

Upper Channel



4.12 Out-of-band Emissions, Conducted

Test Method:

ANSI C63.17, clause 6.1.6.2.

Test Results: Complies

Measurement Data:


See plots.


Requirements, FCC 15.323(d):

 $f \le 1.25 \text{MHz}$ outside UPCS band : $\le -9.5 \text{dBm}$ 1.25MHz $\le f \le 2.5 \text{MHz}$ outside UPCS band : $\le -29.5 \text{dBm}$ $f \ge 2.5 \text{MHz}$ outside UPCS band : $\le -39.5 \text{dBm}$



Out-of-Band Emissions, Conducted

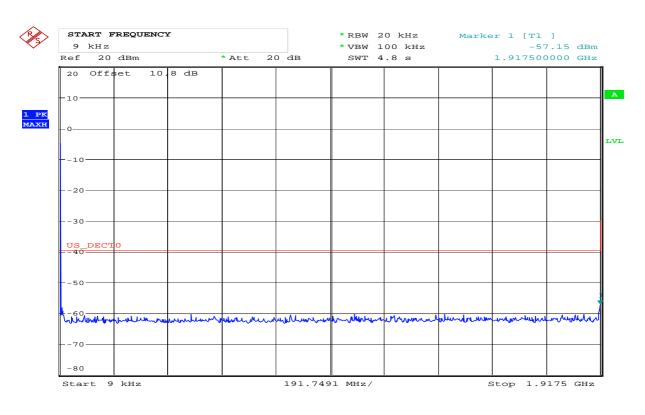

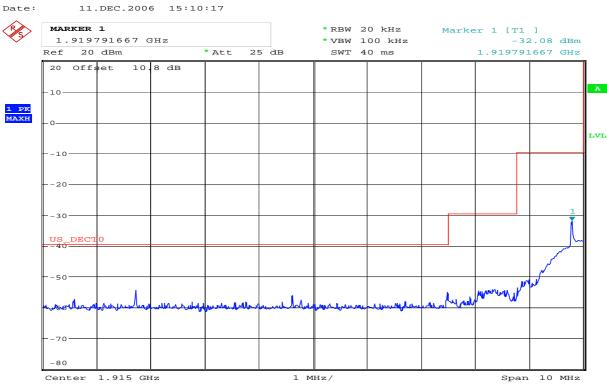



Lower Channel

Date: 11.DEC.2006 15:25:36



Out-of-Band Emissions, Conducted

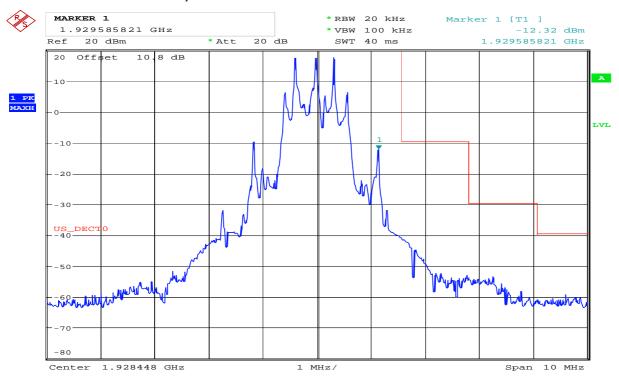

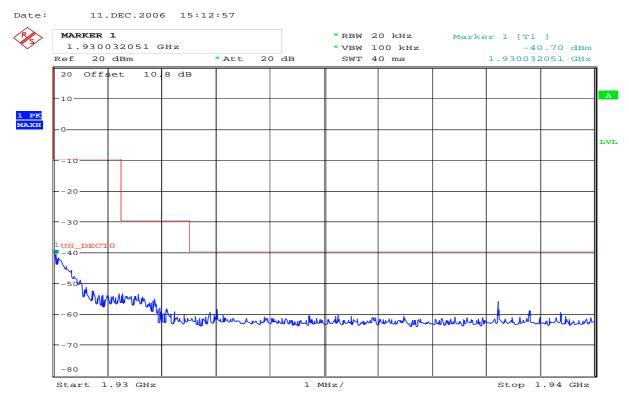



Date: 11.DEC.2006 15:14:18

Upper Channel



Out-of-Band Emissions, Conducted

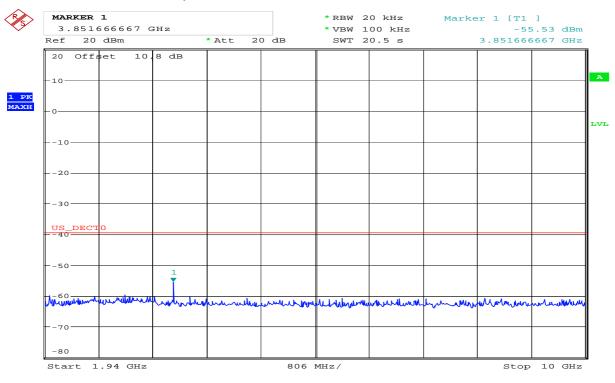

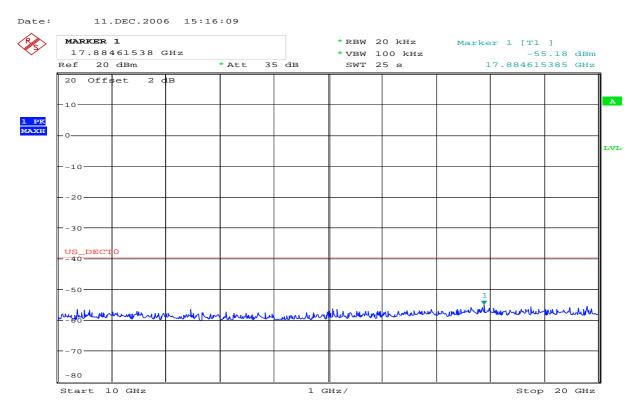

Date: 11.DEC.2006 15:18:59

Upper Channel



4.13 Carrier Frequency Stability

Test Method:

ANSI C63.17, clause 6.2.1.

Test Results: Complies
Measurement Data:

 $\label{thm:carrier frequency stability is measured directly with a Frequency Domain Analyzer in histogram mode.$

Frequency Deviation in ppm is calculated.

Frequency Stability over 1 hour of operation at Nominal Temperature

Voltage	Nominal Carrier Frequency (MHz)	Pk-Pk Difference (kHz)	Deviation (ppm)	Limit
V_{nom}	1924.992	27.3	7.1	±10 ppm

Deviation ppm = ((Pk-Pk difference / 2) / Mean) x 10⁶

Frequency Stability over Power Supply Voltage at Nominal Temperature

Voltage	Measured Carrier Frequency (MHz)	Difference (kHz)	Deviation (ppm)	Limit
V _{nom}	1924.946758	0	0	
85% of V _{nom}	1924.946737	0.0	0.0	±10 ppm
115% of V _{nom}	1924.946727	0.0	0.0	

Deviation ppm = $((Mean - Measured Frequency) / Mean) \times 10^6$

Frequency Stability over Temperature

Temperature	Measured Carrier Frequency (MHz)	Difference (kHz)	Deviation (ppm)	Limit
T = +20 ℃	1924.946758	0	0	
T = -20 ℃	1924.940205	-6.6	-3.4	±10 ppm
T = +50 ℃	1924.951648	+4.9	2.5	

Deviation ppm = $((Mean - Measured Frequency) / Mean) \times 10^6$



4.14 Frame Repetition Stability

Test Method:

ANSI C63.17, clause 6.2.2.

Test Results: Complies
Measurement Data:

The envelope of the RF signal from the EUT is detected with a Crystal Detector and the mean and standard deviation of the frame repetition frequency is then gated over 100 frames and measured with a Frequency Domain Analyzer. The frame repetition stability is 3 times the standard deviation.

Carrier Frequency	Mean	Standard Deviation	Frame Repetition
(MHz)	(Hz)	(Hz)	Stability (ppm)
1924.992	99.9996545	0.00002352	0.7056

Limit:

|--|

Ref. FCC 15.323(e), ANSI C63.17 clause 6.2.2

4.15 Frame Period and Jitter

Test Method:

ANSI C63.17, clause 6.2.3.

Test Results: Complies
Measurement Data:

Carrier Frequency (MHz)	Frame Period (ms)	Max Jitter (μs)	3xStandard Deviation of Jitter (μs)
1924.992	99.99961393	-0.012	-0.00787


Max Jitter = (1/ (Frame period + Pk-Pk/2)) - (1/Frame Period), when Pk-Pk and Frame Period are in Hz

Limit:


Frame Period	20 or 10 ms
Max Jitter	25 μs
3 times St.Dev of Jitter	12.5 µs

Ref. FCC 15.323(e), ANSI C63.17 clause 6.2.3



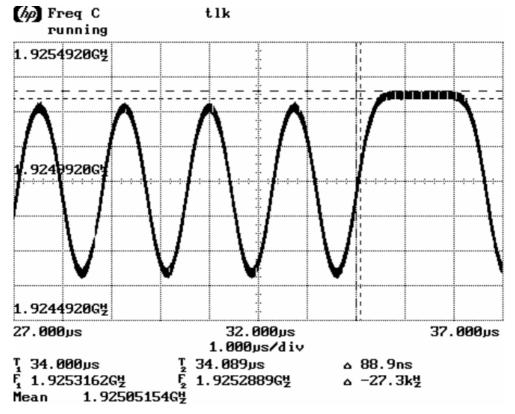


Long Term Carrier Frequency Stability

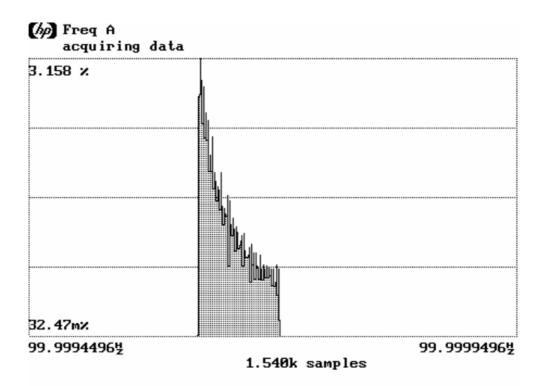

Mean 99.999653892½ 1/Mean 10.000ms Pk-Pk 84.6μ½ Std Dev 23.630μ½

Frame Repetition Stability, Gated over 100 Frames



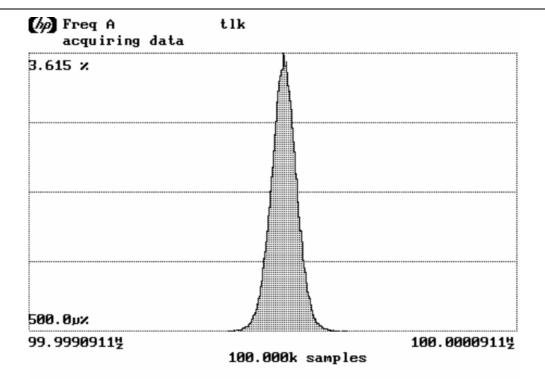

Mean 99.9996139255½ 1/Mean 10.000ms Pk-Pk 245.0μ½ Std Dev 26.2452μ½

Frame Period and Jitter



4.16 Monitoring Threshold, Least Interfered Channel

Monitoring Threshold Limits:

Lower Threshold:

$$T_L = 15 \log B - 184 + 30 - P_{EUT}$$
 (dBm)

Upper Threshold:

$$T_U = 15 \log B - 184 + 50 - P_{EUT}$$
 (dBm)

B is measured Emission Bandwidth in Hz

P_{EUT} is measured Transmitter Power in dBm

Calculated values:

Lower Threshold	-82.2 dBm
Upper Threshold	-62.2 dBm

The upper Threshold is applicable for systems which have defined a minimum of 40 duplex system access channels.

Measurement Procedure:

The Upper or Lower Threshold is found by the procedure defined in ANSI C63.17 clause 7.3.1 or 7.3.2.

Least Interfered Channel		
Lower Threshold	N/A	
Upper Threshold	-62.4	dBm

Least Interfered Channel (LIC) Procedure Test, FCC 15.323(b), (c)(2) and (c)(5)

ANSI C63.17 clause 7.3.3 ref.	Observation	Verdict
b) $f_1 T_L + 13 \text{ dB}$, $f_2 \text{ at } T_L + 6 \text{ dB}$	Transmission always on f_2	Pass
c) $f_1 T_L + 6 \text{ dB}$, $f_2 \text{ at } T_L + 13 \text{ dB}$	Transmission always on f_I	Pass
d) $f_1 T_L + 7 dB$, f_2 at T_L	Transmission always on f_2	Pass
e) $f_1 T_L$, f_2 at $T_L + 7 dB$	Transmission always on f_I	Pass

Selected Channel Confirmation, FCC 15.323(c)(1) and (5)

ANSI C63.17 clause 7.3.4	Observation	Verdict
b) Shall not transmit on f_I	EUT transmits on f_2	Pass
d) Shall not transmit on f_2	EUT transmits on f_I	Pass

Limits:

Lower Threshold + 6 dB margin	-76.2 dBm
Upper Threshold + 6 dB margin	-56.2 dBm



4.17 Threshold Monitoring Bandwidth

This test is only required if a dedicated monitoring receiver is used. However, if the test is not carried out the manufacturer shall declare and provide proper evidence that the monitoring is made through the radio receiver used for communication.

Measurement Procedure:

Simple Compliance Test, ANSI C63.17, clause 7.4.1

More Detailed Test, ANSI C63.17, clause 7.4.2

The test is passed if either the Simple Compliance Test or the More Detailed test is passed.

During this test the spectrum analyzer is observed visually to see if the EUT transmits or not.

Test Results:

Test performed	Observation	Verdict
Simple Compliance test, at ±30% of B	No transmissions	Pass
More Detailed Test, at -6 dB points	N/A	N/A
More Detailed Test, at -12 dB points	N/A	N/A

The more detailed test must be pass at both the -6 and -12 dB points if the Simple Compliance test fails.

Comment: The tested EUT uses the same receiver for monitoring and communication, this test is therefore not required. However the test has been performed nonetheless and the test is passed.

Limits, FCC 15.323(c)(7):

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.



4.18 Reaction Time and Monitoring Interval

Measurement Procedure

ANSI C63.17, clause 7.5

Test results:

By administrative commands and out-of-operating region interference, the EUT is restricted to operate on a single carrier frequency. Time-synchronized pulsed interference is than applied on the carrier at pulsed level T_U+U_M , as appropriate.

The pulses are synchronized with the EUT timeslots and applied centred within all timeslots.

Pulse Width, ref. to ANSI C63.17 clause 7.5	Observation	Verdict
c) > largest of 50 µs and 50*SQRT(1.25/ <i>B</i>)	No transmissions	Pass
d) > largest of 35 μs and 35*SQRT(1.25/ <i>B</i>), and with interference level raised 6 dB	No transmissions	Pass

Comment: Since B is larger than 1.25 MHz the test was performed with pulse lengths of 50 μ s and 35 μ s.


Limits, FCC 15.323(c)(1), (5) and (7)

The maximum reaction time must be less than 50xSQRT (1.25/emission bandwidth in MHz) microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds.

If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be 35xSQRT (1.25/emission bandwidth in MHz) microseconds but shall not be required to be less than 35 microseconds.




Reaction Time

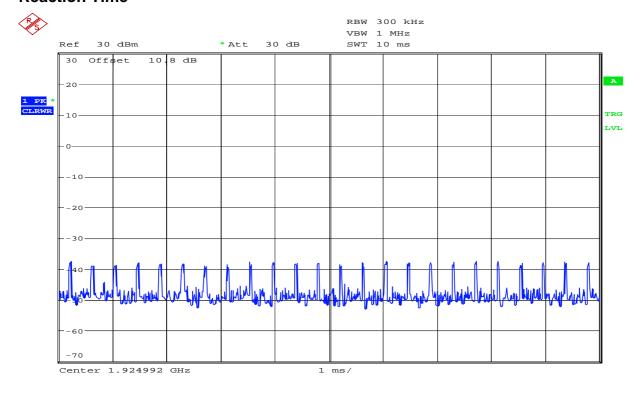

50 µs Pulses

Date: 13.DEC.2006 12:15:36

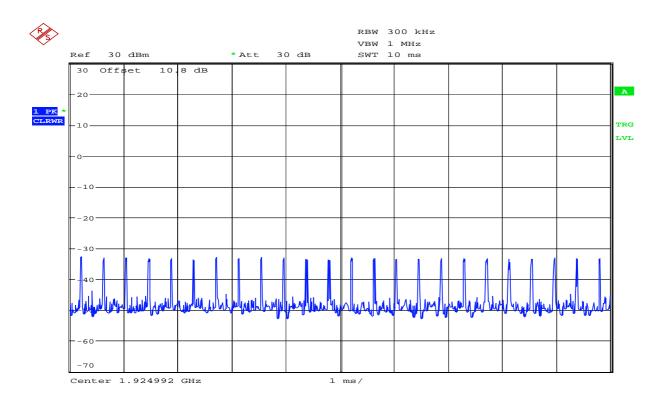

Date: 13.DEC.2006 12:14:17

35 µs Pulses



4.19 Time and Spectrum Window Access Procedure

This requirement is only for EUTs which transmit unacknowledged control and signalling information.

Measurement Procedure:

Timing for EUTs using control and signalling channel type transmissions: ANSI C63.17, clause 8.1

Test results:

Access Criteria, ref. to ANSI C63.17 clause 8.1.1	Observation	Verdict
b) Check that the EUT transmits on the interference free time-slot	EUT transmits on the interference free time-slot	Pass

If FCC 15.323(c)(6) option, If Random Waiting Interval is NOT implemented

Access Criteria, ref. to ANSI C63.17 clause 8.1.2	Observation	Verdict
b) Check that the EUT changes to an interference-free slot when interference is introduced on the time slot in use	EUT changes to the interference-free time-slot, and stays there	Pass

If FCC 15.323(c)(6) option, Only if Random Waiting Interval is implemented

Access Criteria, ref. to ANSI C63.17 clause 8.1.3	Observation	Verdict
b-d) Check that the EUT uses random waiting interval before continuing transmission on an interfered time slot	N/A	N/A

Comment: The tested EUT does not support the Random Waiting Interval option.

Limits:

FCC 15.323(c)(4):


Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signalling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.

FCC 15.323(c)(6):

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available




Access Criteria Check

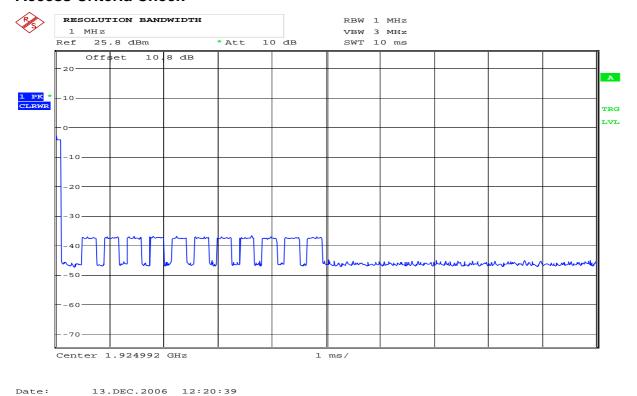


8.1.1a) EUT Transmits on Unblocked Slot



Access Criteria Check

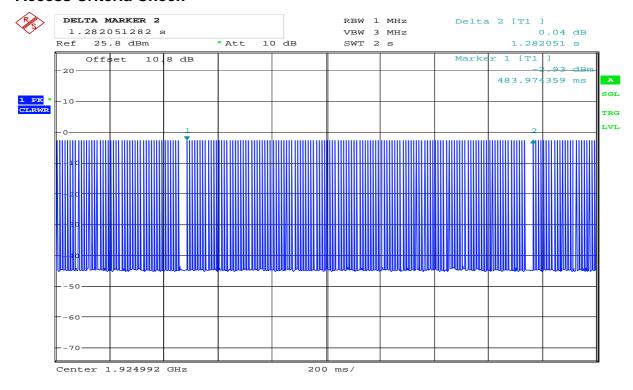

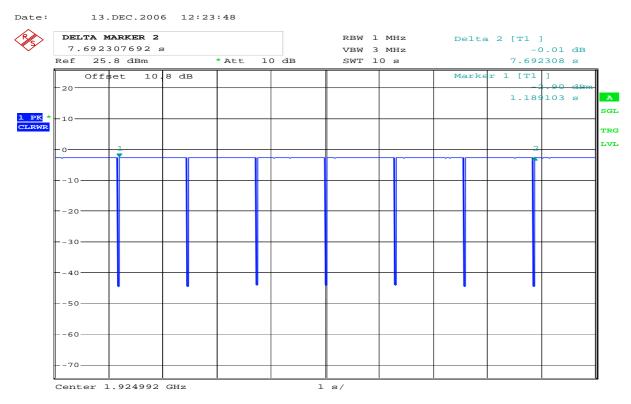

Date: 13.DEC.2006 12:26:14

8.1.1b) Access Criteria check Interval



4.20 Acknowledgements and Transmission Duration

Measurement Procedure:

Acknowledgements: ANSI C63.17, clause 8.2.1 Transmission Duration: ANSI C63.17, clause 8.2.2

During the test **Initial transmission without acknowledgements** the signal from the EUT to the companion device is blocked by circulators in addition to the tuneable attenuator.

The test **Transmission time after loss of acknowledgements** is performed by cutting-off the signal from the companion device by a RF switch and measuring the time until the EUT stops transmitting.

The **Transmission Duration** test is performed by monitoring the slot in use and measuring the time until the EUT changes to a different slot.

Test Results:

Acknowledgements

Test ref. to ANSI C63.17 clause 8.2.1	Observation	Verdict
a) Initial transmission without acknowledgements	Only for initiating device	N/A
c) Transmission time after loss of acknowledgements	5.0 seconds	Pass

Transmission Duration

Test ref. to ANSI C63.17 clause 8.2.2	Observation	Verdict
b) Transmission duration on same time and frequency window	Only for initiating device that controls which time slot is used	N/A

Comment: /

Limits, FCC 15.323(c)(3) and (4)

Occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease.

Periodic acknowledgements must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signalling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.



4.21 Dual Access Criteria Check

Measurement Procedure:

EUTs that does not implement the Upper Threshold: ANSI C63.17, clause 8.3.1

EUTs that implement the Upper Threshold: ANSI C63.17, clause 8.3.2

This test is required for equipment that uses the access criteria in FCC 15.323(c)(10).

Test Results:

EUTs that Implements the Upper Threshold:

Test ref. to ANSI C63.17 clause 8.3.2	Observation	Verdict	
b) EUT is restricted to a single carrier f_I for TDMA systems. The Test is Pass if EUT can transmit	N/A	N/A	
c) d) Transmission on interference-free receive time/spectrum window	N/A	N/A	
e) f) Transmission on interference-free transmit time/spectrum window	N/A	N/A	
g) Transmission not possible on any time/spectrum window	N/A	N/A	

Comment: This test is only applicable for EUT that can be initiating device.

Limits, FCC 15.323(c)(10)

An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

4.22 Alternative Monitoring Interval

Test procedure described in ANSI C63.17 clause 8.4.

This test is required if the EUT implements the provisions of FCC 15.323(c)(11).

Test result:

Not Tested. The tested EUT does not implement this provision. See manufacturers' declaration.



4.23 Duty Cycle Correction Factor Calculation

The tested EUT is a DECT base station that can transmit a maximum of four single timeslots and one control bearer per 10ms DECT system frame.


Frame length: 10ms

Slot length: 0.106ms and 0.396ms Calculation of DC Correction Factor:


 $-20 \log ((0.106 + 4x0.396) / 10) = -20 \log (1.690 / 10) = 15.4 dB$

Duty Cycle Correction Factor: 15.4 dB

Max allowed Duty Cycle Correction Factor is 20 dB

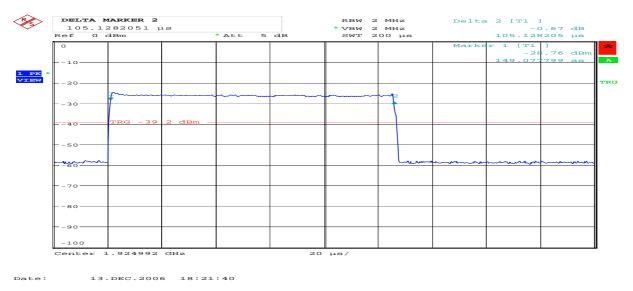

Burst length, Short

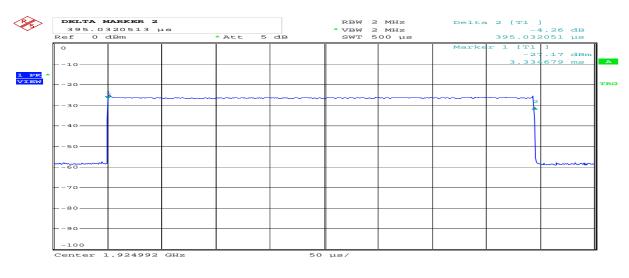

Date: 13.DEC.2006 18:26:23

Burst length, Full



4.24 Spurious Emissions (Radiated)

Measurement Procedure:

FCC 15.209

Test Results:

Radiated Emissions 10 kHz-30 MHz.

Measuring distance 10m, measured with Peak detector.

No component detected, see attached graph.

Limit is converted to 10m using 40 dB/decade according to 15.31 (f) (2).

Radiated Emissions 30 - 1000 MHz.

Detector: Quasi-Peak

Measuring distance 3m.

The EUT were rotated 360 degrees and the antenna height varied between 1m and 4m on all found frequencies.

Transmitter active, Skype Mode

Frequency	RF channel	Distance correction factor	Field strength, 3 m	Limit	Margin
MHz	00 / 04	dB dBμV/m		dBμV/m	dB
51.8	/	0	27.7	40	12.3
133.5	/	0	19.0	44	25.0
500	/	0	37.0	46	9.0
600	/	0	34.5	46	11.5
700	/	0	37.0	46	9.0
753.55	/	0	33.0	46	13.0
800	/	0	35.0	46	11.0
846.9	/	0	34.5	46	11.5

TEST REPORT FCC subparts 15 B and D Project no.: 77619 FCC ID: G9H2-8310A

Radiated Emissions 1 - 20 GHz

Detector: Peak

Measuring distance: 1.0 – 8.5 GHz: 3m

8.5 - 20.0 GHz: 1m

The EUT was rotated, the antenna height varied and emissions were checked on highest and lowest

channel.

Transmitter active

Frequenc y	RF channel	Distance correction factor	Field strength, 3 m	Duty cycle correction factor	Limit	Margi n
GHz	00 / 04	dB	dBμV/m	dB	dBμV/m	dB
All	00/04	0	< 44	15.4	54	>10

No Spurious Emissions except harmonics, were detected.



Nemko Comlab 24. Jan 07 14:19

PΚ

EUT: UPCS Base, DECT 6.0


Manuf: Thomson
Op Cond: 1m VP
Operator: FS

Operator: FS
Test Spec: FCC 15.209, 3m
Comment: Skype Call Active

Scan Settings (1 Range)

|------ Frequencies -------|------ Receiver Settings -------|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
30M 200M 50k 120k PK 50ms AUTO LN ON 60dB

Transducer No. Start Stop Name 20 30M 200M HK116

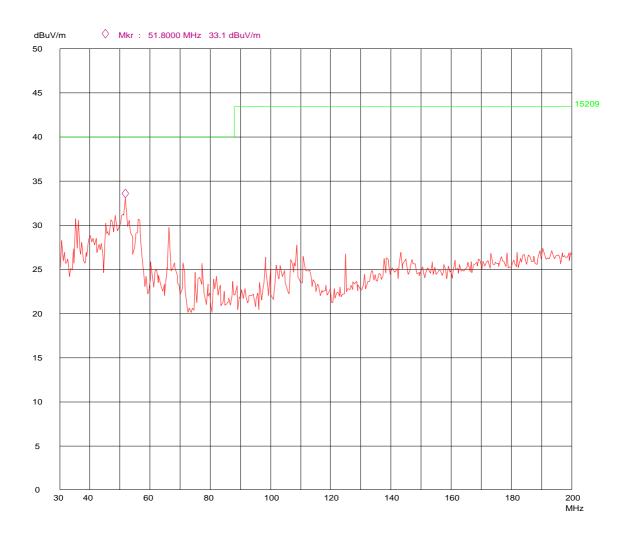

Spurious Emissions 30 – 200 MHz, Peak Detector, Vertical Polarization



Nemko Comlab 24. Jan 07 14:28

PΚ

EUT: UPCS Base, DECT 6.0


Manuf: Thomson
Op Cond: 2m HP
Operator: FS

Operator: FS
Test Spec: FCC 15.209, 3m
Comment: Skype Call Active

Scan Settings (1 Range)

|------ Frequencies -------|------ Receiver Settings -------|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
30M 200M 50k 120k PK 50ms AUTO LN ON 60dB

Transducer No. Start Stop Name 20 30M 200M HK116

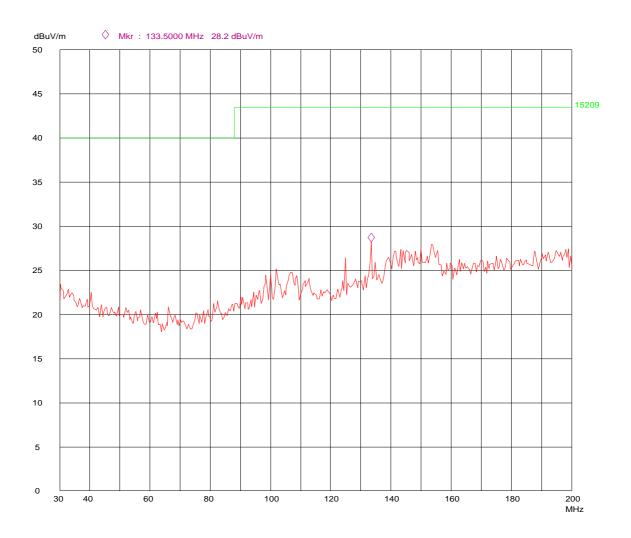

Spurious Emissions 30 – 200 MHz, Peak Detector, Horizontal Polarization



Nemko Comlab 24. Jan 07 14:53

PK

EUT: UPCS Base, DECT 6.0


Manuf: Thomson
Op Cond: 1m VP
Operator: FS

Test Spec: FCC 15.209, 3m
Comment: Skype Call Active

Scan Settings (1 Range)

|------ Frequencies -------|----- Receiver Settings ------|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
200M 1000M 50k 120k PK 50ms AUTO LN ON 60dB

Transducer No. Start Stop Name 21 200M 1000M HL223

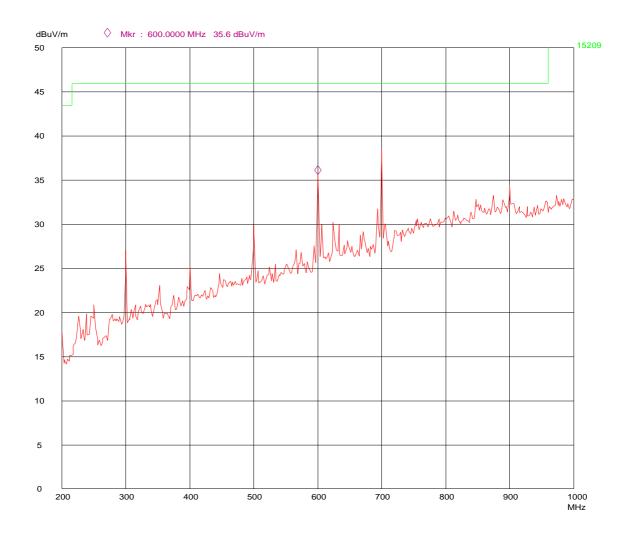

Spurious Emissions 200 - 1000 MHz, Peak Detector, Vertical Polarization



Nemko Comlab 24. Jan 07 15:19

PK

EUT: UPCS Base, DECT 6.0


Manuf: Thomson
Op Cond: 2m HP
Operator: FS

Operator: FS
Test Spec: FCC 15.209, 3m
Comment: Skype Call Active

Scan Settings (1 Range)

|------ Frequencies -------|----- Receiver Settings ------|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
200M 1000M 50k 120k PK 50ms AUTO LN ON 60dB

Transducer No. Start Stop Name 21 200M 1000M HL223

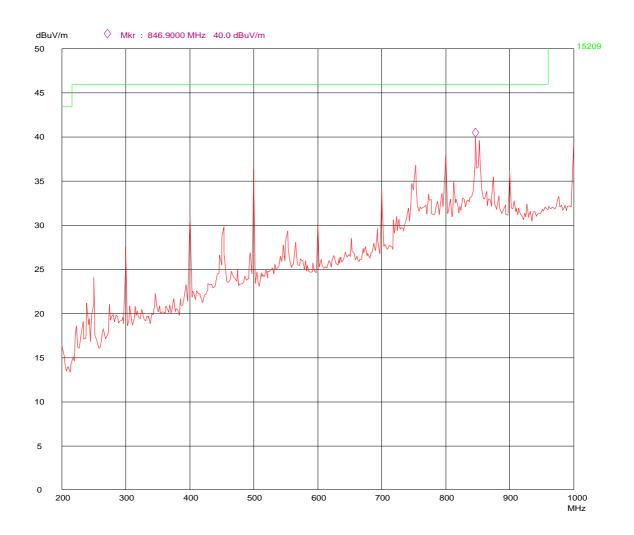

Spurious Emissions 200 - 1000 MHz, Peak Detector, Horizontal Polarization



NEMKO COMLAB

13. Dec 06 13:53

Peak

Operator: Egh Comment: RTX


US DECT FCC 15.209

Measuring distance 10 m

Scan Settings (4 Ranges)


	Frequenci	es		F	Receiver Settings
Start	Stop	Step	IF B\	N Dete	ector M-Time Atten Preamp OpRge
10k	90k	5k	9k	ΑV	20ms 0dBLN OFF 60dB
90k	110k	5k	9k	PK	20ms AUTO LN ON 60dB
110k	490k	5k	9k	AV	20ms AUTO LN OFF 60dB
490k	30M	5k	9k	PK	20ms AUTO LN OFF 60dB

Transducer No. Start Stop Name 13 10k 30M HFH2Z2

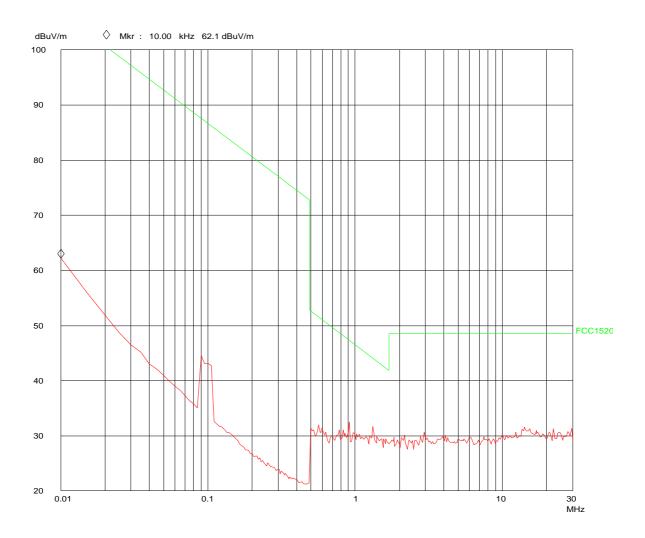


Spurious Emissions 0.010 - 30 MHz, Peak Detector



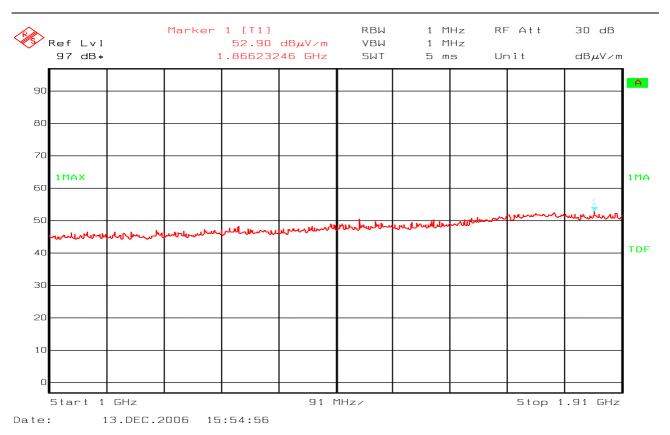


Spurious Emissions 1 - 1.9175 GHz

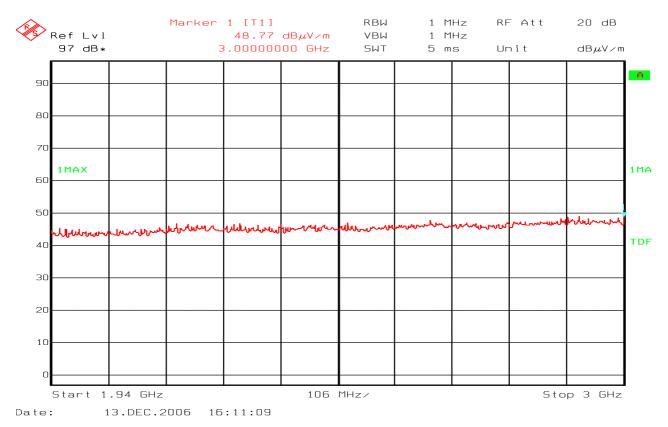


Spurious Emissions 1.9325 - 3 GHz



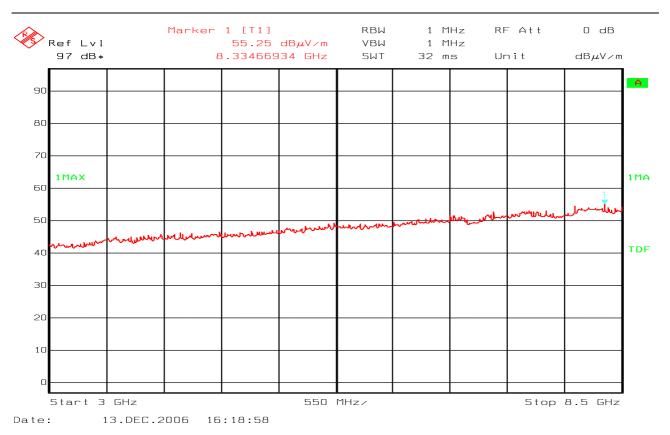


Spurious Emissions 3 - 8.5 GHz

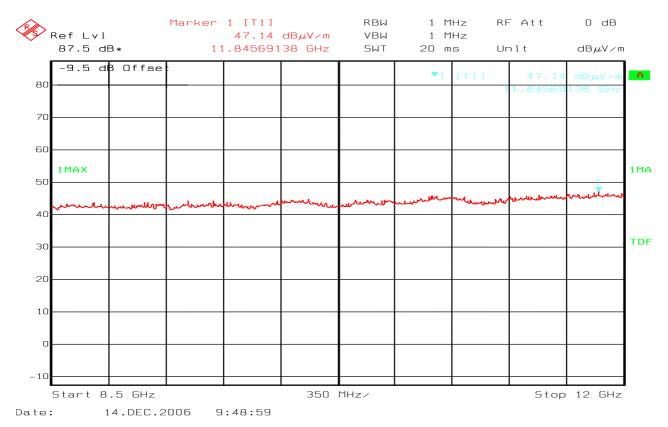


Spurious Emissions 8.5 - 12 GHz



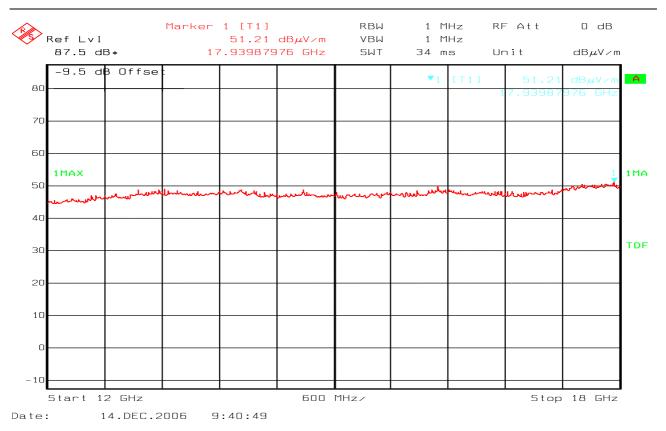

Spurious Emissions 12 - 18 GHz

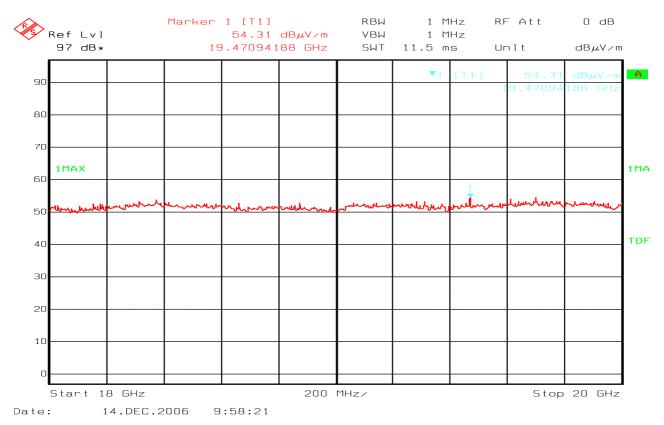

Spurious Emissions 18 - 20 GHz



4.25 Receiver Spurious Emissions

Measurement Procedure:

Industry Canada RSS-213 paragraph 6.8 and RSS-GEN paragraphs 4.8 and 6.

Test results:

The Receiver Spurious Emissions are covered by paragraph 4.24 Spurious Emissions Radiated. No separate Spurious Emissions which could be related to the receiver were detected during the radiated test.



5 Test Setups

5.1 Frequency Measurements




Test equipment included: 5

Test Set-up 1

This setup is used for measuring Carrier frequency stability at normal and extreme temperatures.

5.2 Timing Measurements




Test equipment included: 5, 7

Test Set-up 2

This setup is used for measuring Frame repetition stability, Frame period and Jitter.

5.3 Conducted Emission Test




Test equipment included: 1, 13, 29

Test Set-up 3

This setup is used for all conducted emission tests.



5.4 Radiated Emissions Test

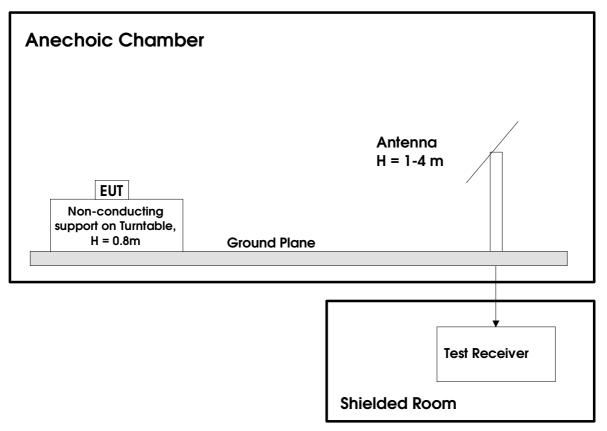


Test equipment: 1, 8, 9, 10, 11, 20, 21, 22, 23, 24, 25, 26

Test Set-Up 4

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10 m, for all other frequencies it is 3m or 1m. Emissions above 1 GHz were measured with a Spectrum Analyzer and Horn Antenna and with the preamplifier after the antenna. For measurements above 18 GHz the test receiver is moved inside the anechoic chamber and located next to the antenna to minimize the cable loss.

5.5 Power Line Conducted Emissions Test

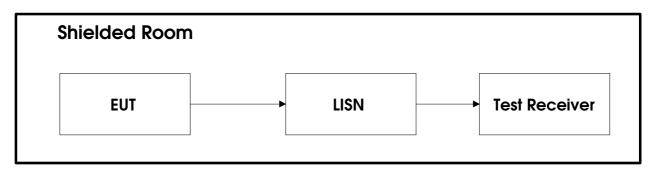


Test equipment: 12, 27, 28

Test Set-Up 5



5.6 Monitoring Tests

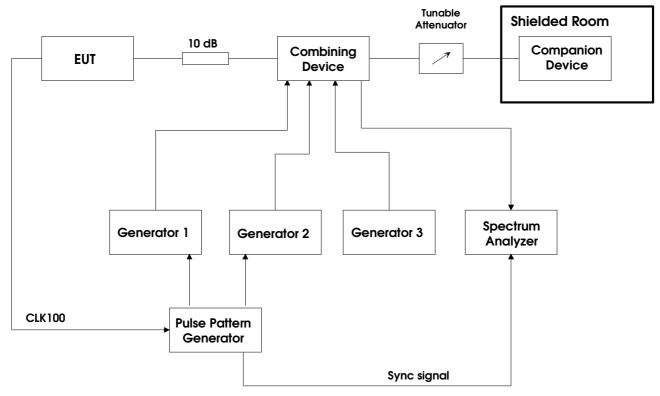

Test equipment: 1, 2, 3, 4, 6, 13, 14, 15, 16, 17, 18, 19, 29

Test Set-Up 6

This test setup is used for all Monitoring and Time and Spectrum Access Procedure tests. The path loss from the signal generators to the EUT is measured with a power meter before the testing is started.

The CLK100 is used to synchronize the Pulse-/ Pattern generator to the start of the DECT frame, this signal always comes from the base station. If the EUT is a DECT Portable Part (i.e. a handset) the CLK100 signal will come form the Companion Device.

The sync signal to the Spectrum Analyzer is the CLK100 signal that is regenerated in the Pulse-/ Pattern Generator, this is used to synchronize the Spectrum Analyzer to the DECT frame when in zero span. The Pulse-/ Pattern Generator is used for tests that require time synchronized pulses or blocking of specific time slots.



6 Test Equipment Used

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Testhouse.

No.	Instrument/ancillary	Type of instrument/ancillary	Manufacturer	Ref. no.
1	FSEK30	Spectrum Analyzer	Rohde & Schwarz	LR 1337
2	SME03	Signal generator	Rohde & Schwarz	LR 1238
3	SMP04	Signal generator	Rohde & Schwarz	LR 1336
4	SMHU52	Signal generator	Rohde & Schwarz	LR 1240
5	53310A	Modulation Domain Analyzer Hewlett Packard		LR 1483
6	81104A	Pulse-/ Pattern Generator	Agilent	LR 1502
7	8470B	Crystal Detector	Hewlett Packard	LR 1207
8	8449B	Preamplifier	Hewlett Packard	LR 1322
9	4HC3000/18000	High-pass filter	Trilithic	S.No.: 9849045
10	ESVS30	Measuring Receiver	Rohde & Schwarz	LR 1101
11	ESN	Measuring Receiver	Rohde & Schwarz	LR 1237
12	ESAI	Measuring Receiver	Rohde & Schwarz	LR 1090
13	6810.17B	Attenuator	Narda	LR1212
14	745-69	Step Attenuator	Narda	LR 1442
15	WE 1506A	Power Splitter	Weinchel	LR 244
16	WE 1506A	Power Splitter	Weinchel	LR 245
17	H-9	Hybrid	Anzac	LR 86
18	H-9	Hybrid	Anzac	LR 257
19	S212DS	RF Switch	Narda	LR 1244
20	3115	Horn Antenna	EMCO	LR 1226
21	PM7320-X	Horn Antenna	Sivers Lab	LR 102
22	DBF-520-20	Horn Antenna	Systron Donner	LR 100
23	638	Horn Antenna	Narda	LR 1480
24	HL223	Biconical Antenna	Rohde & Schwarz	LR 1261
25	HK116	Log-period Antenna	Rohde & Schwarz	LR 1260
26	HFH2-Z2	Loop Antenna	Rohde & Schwarz	LR 285
27	ESH3-Z5	Two Line V-Network	Rohde & Schwarz	LR 1076
28	80S	Signal Generator	Powertron	LT 502
29	FSU26	Spectrum Analyzer	Rohde & Schwarz	LR 1504