

**TABLE OF CONTENTS LIST**

**APPLICANT:** COLUMBIA TELECOMMUNICATIONS GROUP, INC.

**FCC ID:** GAFCT-D201

**TEST REPORT:**

PAGE 1.....SECURITY CODING INFORMATION  
PAGE 2-4.....TEST EQUIPMENT LIST  
PAGE 5.....TEST PROCEDURES  
PAGE 6.....POWER LINE CONDUCTED INTERFERENCE  
PAGE 7.....LINE 1 & LINE 2  
PAGE 8.....OCCUPIED BANDWIDTH AND PEAK POWER OUTPUT  
PAGE 9-10.....6 dB BANDWIDTH PLOTS - BASE  
PAGE 11-12.....6 dB BANDWIDTH PLOTS - HANDSET  
PAGE 13-14.....ANTENNA CONDUCTED EMISSIONS  
PAGE 15.....RADIATED SPURIOUS EMISSIONS HANDSET  
PAGE 16.....RADIATED SPURIOUS EMISSIONS BASE  
PAGE 17.....RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED  
BANDS  
PAGE 18-19.....BANDEDGE PLOTS  
PAGE 20.....SPECTRAL POWER DENSITY  
PAGE 21-22.....POWER SPECTRAL DENSITY PLOTS - BASE  
PAGE 23-24.....POWER SPECTRAL DENSITY PLOTS - HANDSET

**EXHIBITS:**

EXHIBIT 1.....FCC ID LABEL SAMPLE  
EXHIBIT 2.....LABEL LOCATION  
EXHIBIT 3.....BLOCK DIAGRAM  
EXHIBIT 4.....SCHEMATIC  
EXHIBIT 5.....EXTERNAL PHOTOGRAPHS  
EXHIBIT 6.....INTERNAL PHOTOGRAPHS  
EXHIBIT 7.....USERS MANUAL  
EXHIBIT 8.....CIRCUIT DESCRIPTION  
EXHIBIT 9.....TEST SETUP PHOTOGRAPH

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: TABLE OF CONTENTS

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCC ID: GAFCT-D201

15.214(d) THIS DEVICE COMPLIES WITH THE SECURITY CODE REQUIREMENTS  
OF 15.214(d)(1)(2) AND (3) BY MEANS OF THE FOLLOWING:

THIS DEVICE HAS 65536 POSSIBLE SECURITY CODES. ONE SECURITY CODE OUT OF 65536 IS PRE-PROGRAMMED WHEN MANUFACTURED AT THE FACTORY. THE CPU CONTROLS THE RF FREQUENCY CHANNEL. AND THE ASIC CONTROLS ADPCM CODEC AND AUDIO SIGNAL SWITCHING ALSO SET UP THE SPREADING CODE. BEFORE THE COMMUNICATION LINK IS ESTABLISHED, THE DEVICE SEARCHES FOR A VACANT RF CHANNEL AND THEN TRANSMITS RF SIGNAL ON THE VACANT CHANNEL.

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 1 OF 24

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
 FCCID : GAFCT-D201

**TEST EQUIPMENT LIST**

	<b>DEVICE</b>	<b>MFGR</b>	<b>MODEL</b>	<b>SERNO</b>	<b>CAL/CHAR DATE</b>	<b>DUE DATE or STATUS</b>
X	3-Meter OATS	TEI	N/A	N/A	Listed 12/22/99	12/22/02
	3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
	Receiver, Beige Tower Spectrum Analyzer (Tan)	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/03
	RF Preselector (Tan)	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
	Quasi-Peak Adapter (Tan)	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
X	Receiver, Blue Tower Spectrum Analyzer (Blue)	HP	8568B	2928A04729 2848A18049	CHAR 10/22/01	10/22/03
X	RF Preselector (Blue)	HP	85685A	2926A00983	CHAR 10/22/01	10/22/03
X	Quasi-Peak Adapter (Blue)	HP	85650A	2811A01279	CHAR 10/22/01	10/22/03
X	Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
	Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
	Biconnical Antenna	Eaton	94455-1	1057	CHAR 3/15/00	3/15/02
	BiconiLog Antenna	EMCO	3143	9409-1043		
X	Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
	Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
	Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CHAR 10/16/01	10/16/03
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 11/24/00	11/24/03
	Double-Ridged Horn Antenna	Electro-Metrics	RG A -180	2319	CAL 12/19/01	12/19/03
	Horn Antenna	Electro-Metrics	EM-6961	6246	CAL 3/21/01	3/21/03
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
 FCCID: GAFCT-D201  
 DATE: 4/9/2003  
 REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
 PAGE: 2 OF 24

	<b>DEVICE</b>	<b>MFGR</b>	<b>MODEL</b>	<b>SERNO</b>	<b>CAL/CHAR DATE</b>	<b>DUE DATE or STATUS</b>
	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
	Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/16/01	3/16/03
	Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	5/25/01
	Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CAL 12/12/01	12/12/03
	Oscilloscope	Tektronix	2230	300572	CHAR 2/1/01	2/1/03
	Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
	AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
	AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
	AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
X	Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
	Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/04
	Digital Multimeter	HP	E2377A	2927J05849	CHAR 1/8/02	1/8/04
	Multimeter	Fluke	FLUKE-77-3	79510405	CAL 9/26/01	9/26/03
	Peak Power Meter	HP	8900C	2131A00545	CHAR 1/26/01	1/26/03
	Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02	1/16/04
	Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/04
X	Temp/Humidity gauge	EXTech	44577F	E000901	CHAR 1/22/02	1/22/04
	Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/03
	Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 1/26/01	1/26/03
	Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	11/22/02
	Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 5/12/02	5/12/04
	Signal Generator	HP	8640B	2308A21464	CAL 11/15/01	11/15/03
	Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
 FCCID: GAFCT-D201  
 DATE: 4/9/2003  
 REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
 PAGE: 3 OF 24

	<b>DEVICE</b>	<b>MFGR</b>	<b>MODEL</b>	<b>SERNO</b>	<b>CAL/CHAR DATE</b>	<b>DUE DATE or STATUS</b>
	Near Field Probe	HP	HP11940A	2650A02748	CHAR 2/1/01	2/1/03
	BandReject Filter	Lorch Microwave	5BR4-2400/ 60-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	6BR6-2442/ 300-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	5BR4-10525/ 900-S	Z1	CHAR 3/2/01	3/2/03
	High Pas Filter	Microlab	HA-10N		CHAR 10/4/01	10/4/03
	Audio Oscillator	HP	653A	832-00260	CHAR 3/1/01	3/1/03
	Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/03
	Frequency Counter	HP	5385A	3242A07460	CHAR 12/11/01	12/11/03
	Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
	Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/03
	Egg Timer	Unk			CHAR 8/31/01	8/31/03
	Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
	Measuring Tape, 7.5M	Kraftixx	7.5M PROFI		2/1/02	2/1/04
	Coaxial Cable #51	Insulated Wire Inc.	NPS 2251-2880	Timco #51	CHAR 1/23/02	1/23/04
	Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
	Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
	Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
 FCCID: GAFCT-D201  
 DATE: 4/9/2003  
 REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
 PAGE: 4 OF 24

## TEST PROCEDURE

**GENERAL:** This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. Shielded interface cables were used in all cases except for cables connecting to the telephone line and the power cords. A test program was run which simulated a normal data transmission on a network.

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The ambient temperature of the UUT was 74°F with a humidity of 44%.

**BANDWIDTH 6.0dB:** The measurements were made with the spectrum analyzer's resolution bandwidth (RBW)=100 kHz and the video bandwidth (VBW) =300 kHz and the span set as shown on plot.

**POWER OUTPUT:** The RF power output was measured at the antenna feed point by removing the permanent antenna and connecting the UUT to a peak power meter, HP Model No. 8900C.

**ANTENNA CONDUCTED EMISSIONS:** The RBW=100 kHz, VBW > or = RBW and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental.

**RADIATION INTERFERENCE:** The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth (RBW) of the spectrum analyzer was 100 kHz up to 1GHz and 1.0MHz above 1 GHz with an appropriate sweep speed. The VBW above 1.0 GHz was = 1.0 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 74°F with a humidity of 44%.

**15.247(d) POWER SPECTRAL DENSITY:** The peak within the pass band was located with a RBW set to 30 kHz and a span of 5 MHz, slightly greater than the 6 dB bandwidth, then the emission was centered on the display and the span and RBW reduced. A 1.5MHz span, 3 kHz RBW, and a sweep time to sweep time set to 500 seconds. Since spectral line spacing could not be resolved, the noise power density method was used. The response was then plotted, a correction factor of measured using the noise power density and adding the correction of 35 dB and any attenuation used was added.

15.247(e): PROCESSING GAIN, This gain is supplied by the manufacturer of the UUT. (not required)

2.1033(b)(4)

**ANTENNA AND GROUND SYSTEM:** This unit uses a short, inductively loaded, antenna element for the base unit and the handset. The antenna is permanently attached to the unit and no provision is made for connection to an external antenna.

No ground connection is provided. The only ground in use is the ground plane on the printed circuit board.

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 5 OF 24

**APPLICANT:** COLUMBIA TELECOMMUNICATIONS GROUP, INC..

**FCC ID:** GAFCT-D201

**NAME OF TEST:** POWER LINE CONDUCTED INTERFERENCE

**RULES PART NO.:** 15.207

<b>MINIMUM REQUIREMENTS:</b>	FREQUENCY	LEVEL
	MHz	dBuV
	0.150-30	48 dBuV or 250 uV

**TEST PROCEDURE:** ANSI STANDARD C63.4-1992

THE HIGHEST EMISSION READ FOR LINE 1 WAS 21.851 uV @ 210 kHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 5.617 uV @ 210 kHz.

THE GRAPHS ON THE FOLLOWING PAGES REPRESENT THE EMISSIONS READ FOR POWER LINE CONDUCTED FOR THIS DEVICE.


**TEST RESULTS:** Both lines were observed with the UUT transmitting. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

**PERFORMED BY:** JOE SCOGLIO


**DATE:** 4/9/2003

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 6 OF 24

LINE 1

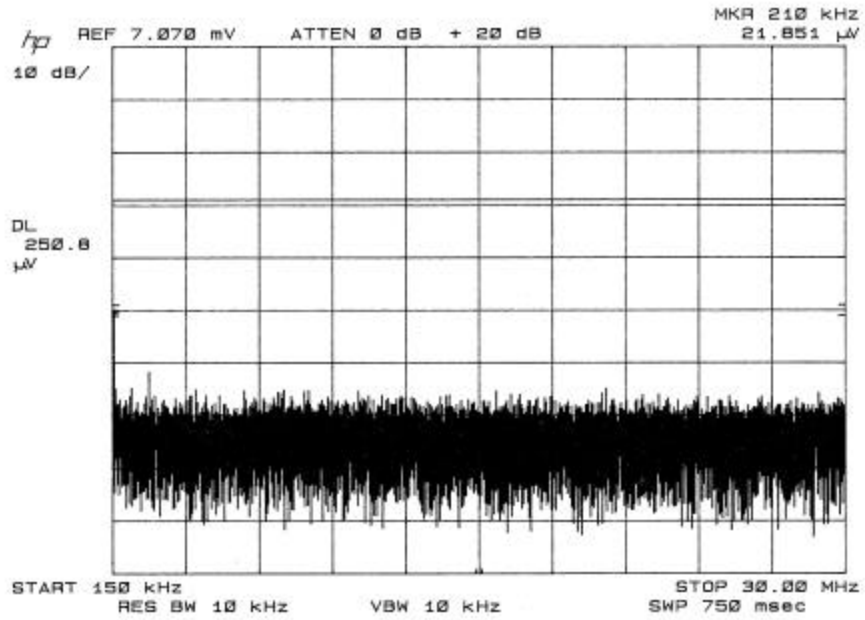

LINE 2

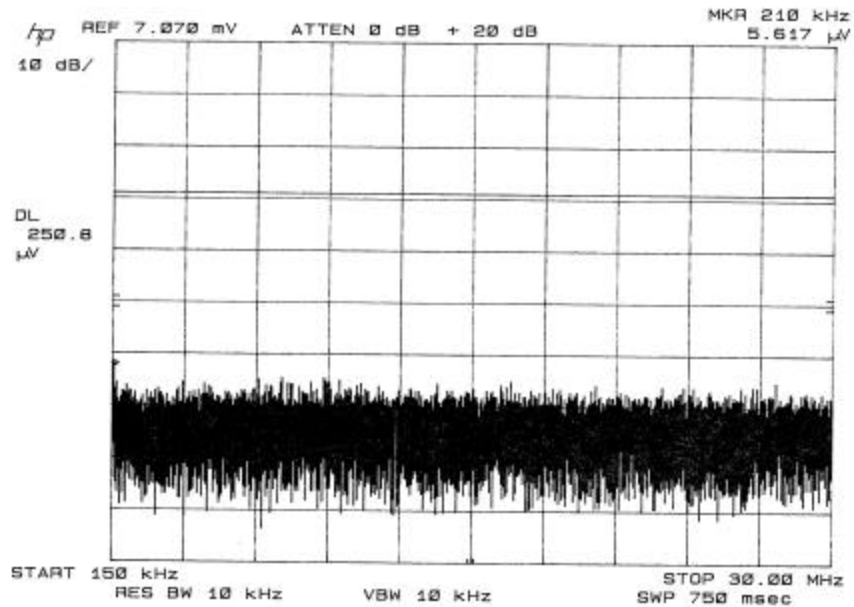

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 7 OF 24



**APPLICANT:** COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
**FCC ID:** GAFCT-D201  
**NAME OF TEST:** OCCUPIED BANDWIDTH  
**RULES PART NO.:** 15.247

15.247(a)(2)

6dB bandwidth shall be at least 500 kHz. As shown in the accompanying plots. The bandwidth was measured at three places in the band and the narrowest is reported below.

Base 6dB Bandwidth = 1.545 MHz

Handset 6 dB Bandwidth = 1.545 MHz

15.247(B) PEAK POWER OUTPUT

The maximum peak output power shall not exceed 1 watt (30 dBm). If directional transmitting antennas with a gain of more than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


Both the base and handset have a maximum power output of less than +30 dBm. Power was measured by disconnecting the antennas and measuring across a 50 ohm load as recommended by the manufacturer using a HP peak power meter Model 8900C. The antennas are non-directional and do not exceed 6 dBi gain. The power output was measured at three places in the band highest is reported below.

POWER OUTPUT - LIMIT +30 dBm


BASE PEAK POWER OUTPUT = +8.4 dBm or 6.9 mWatts  
HANDSET PEAK POWER OUTPUT = +8.5 dBm or 7.0 mWatts

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 8 OF 24


6.0 dB BANDWIDTH BASE - CHANNEL 1

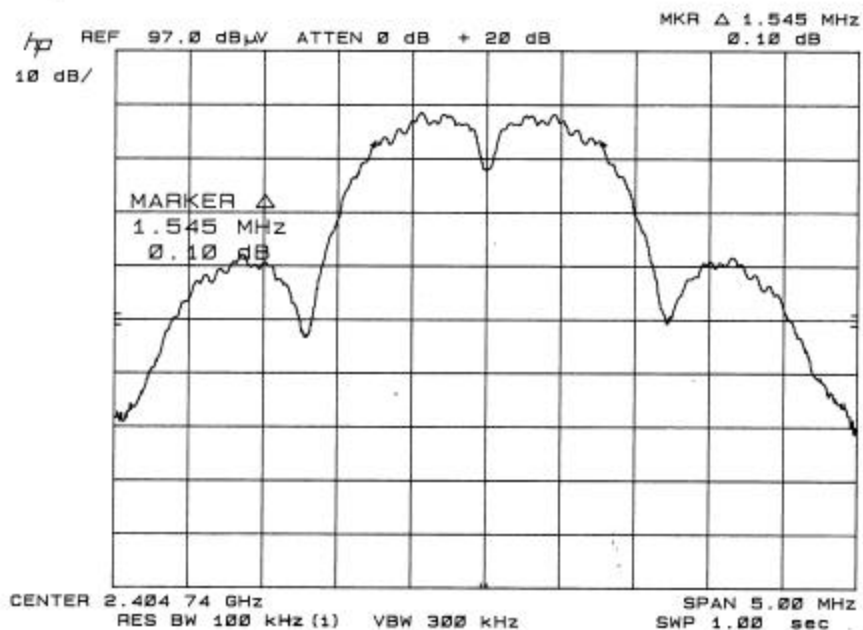

6.0 dB BANDWIDTH BASE - CHANNEL 21

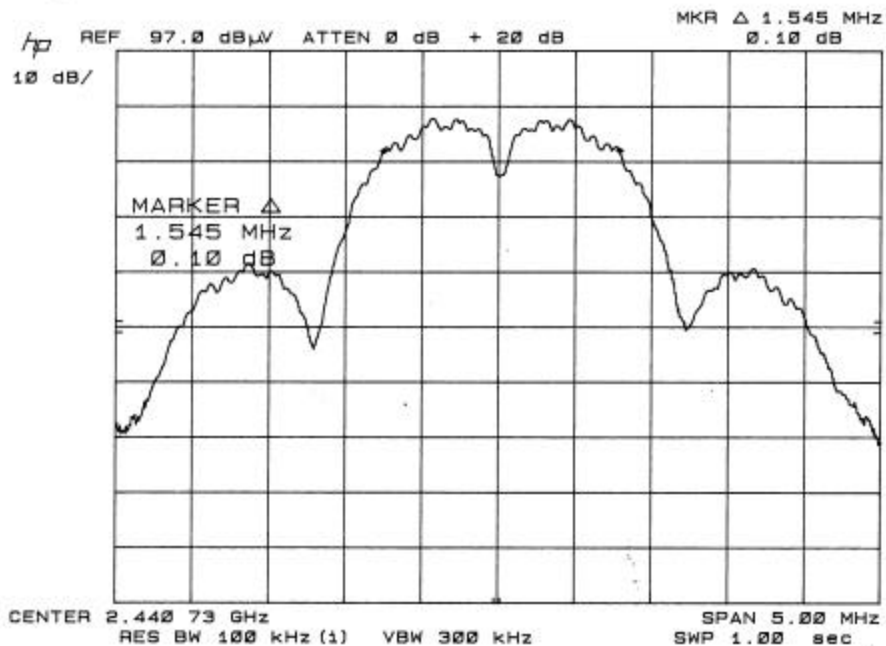


6 dB BANDWIDTH BASE - CHANNEL 42

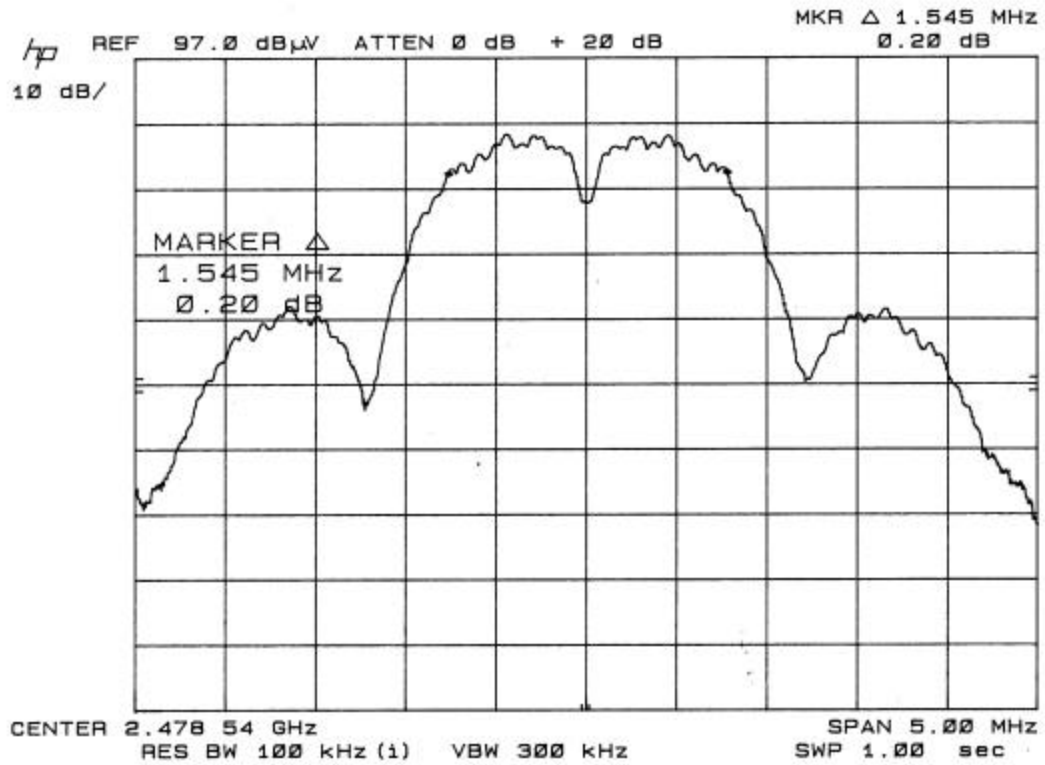


APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 10 OF 24


6.0 dB BANDWIDTH HANDSET - CHANNEL 1

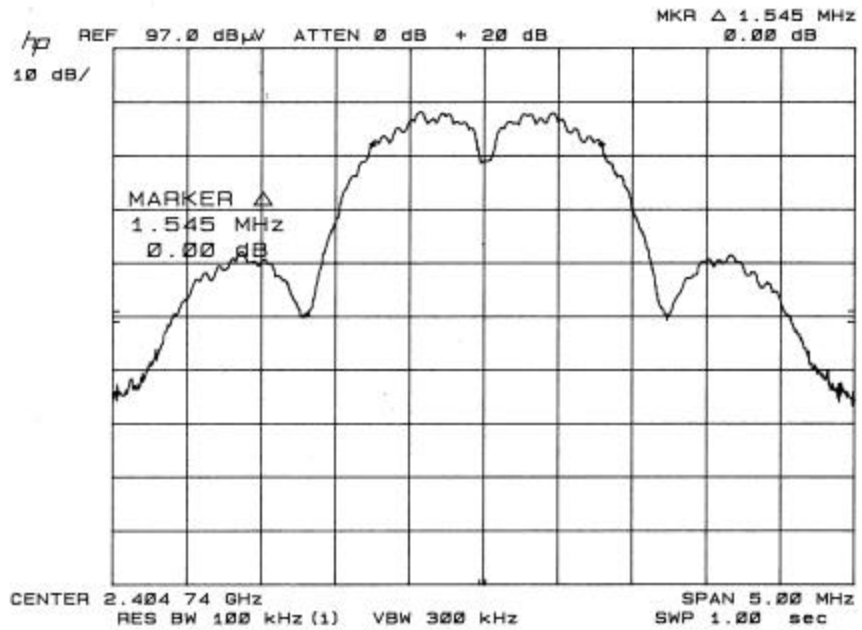

6.0 dB BANDWIDTH HANDSET - CHANNEL 21

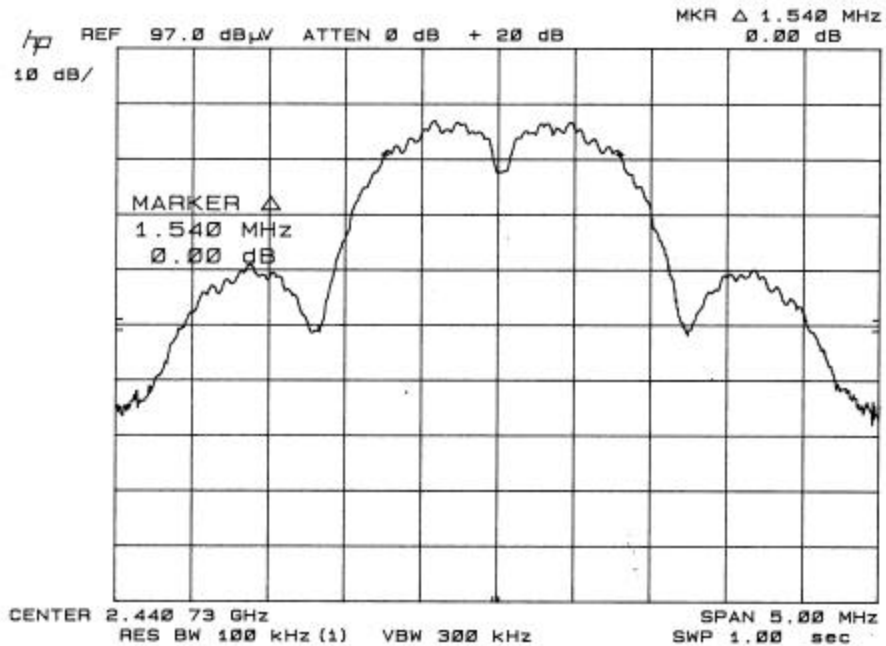

6.0 dB BANDWIDTH HANDSET - CHANNEL 42

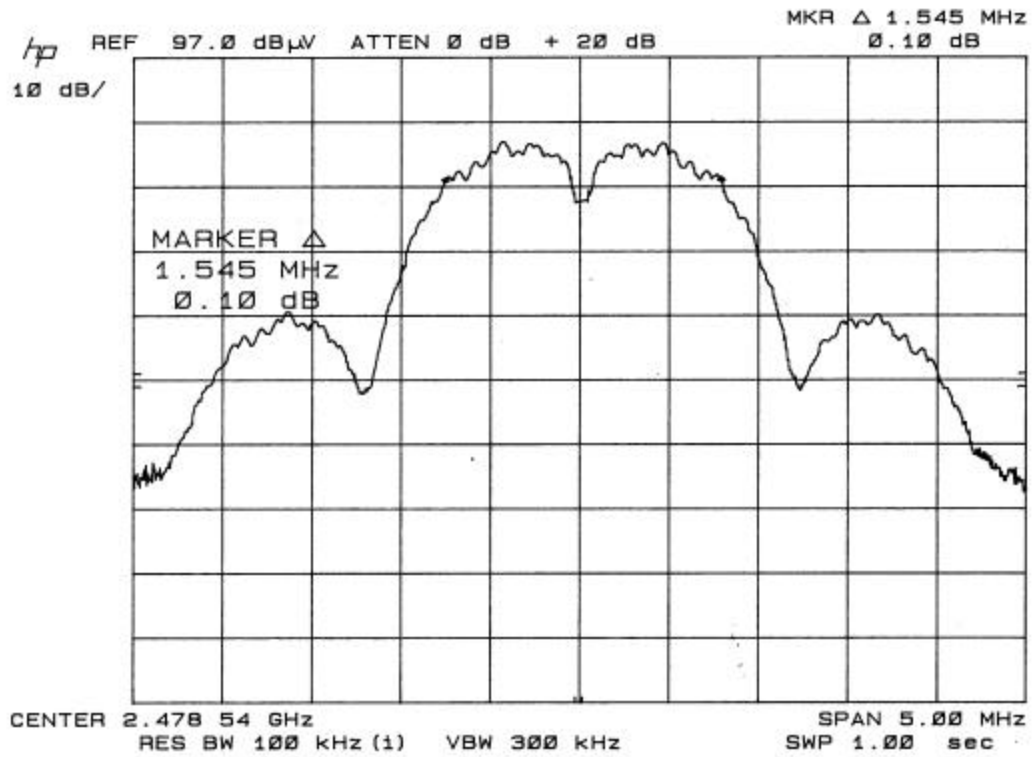

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 12 OF 24

**APPLICANT:** COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
**FCC ID:** GAFCT-D201  
**NAME OF TEST:** ANTENNA CONDUCTED SPURIOUS EMISSIONS - BASE  
**RULES PART NUMBER:** 15.247(c) Spurious Emissions must be 20 dBc.

<b>FREQUENCY MHz</b>	<b>dB BELOW CARRIER</b>
2404.8	0
4809.6	70.2
7214.4	82.4
9619.2	92.7
12024	66.2
2440.8	0
4881.6	69
7322.4	85.3
9763.2	92.5
2478.6	0
4957.2	67.7
7435.8	84.9
9914.4	91.8

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 13 OF 24

**APPLICANT:** COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
**FCC ID:** GAFCT-D201  
**NAME OF TEST:** ANTENNA CONDUCTED SPURIOUS EMISSIONS - HANDSET  
**RULES PART NO.:** 15.247(c) Spurious Emissions must be 20 dBc.

<b>FREQUENCY</b> <b>MHz</b>	<b>dB BELOW</b> <b>CARRIER</b>
2404.8	0
4809.6	69.5
7214.4	78.9
9619.2	95
2440.8	0
4881.6	65.1
7322.4	78.6
9763.2	91.1
2478.6	0
4957.2	64.3
7435.8	83.5
9914.4	91.8

The searches were made to the tenth harmonic.

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 14 OF 24

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..

FCC ID: GAFCT-D201

NAME OF TEST: RADIATED SPURIOUS EMISSIONS - HANDSET

RULES PART NO.: 15.247(c)

REQUIREMENTS:

FIELD STRENGTH of Fundamental: 902-928MHz 2.4-2.4835GHz 127.38dBuV/m @3m	FIELD STRENGTH of Harmonics  54 dBuV/m @3m	S15.209 30 - 88 MHz 40 dBuV/m @3M 88 -216 MHz 43.5 216 -960 MHz 46 ABOVE 960 MHz 54dBuV/m
--	---	---

Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54 dBuV/m). Spurious not in a restricted band must be 20 dBc.

TEST DATA:

TUNED FREQUENCY MHz	EMISSIONS FREQUENCY MHz	METER READING dBuV	ANT. POLARITY	COAX LOSS dB	CORRECTION FACTOR dB	FIELD STRENGTH dBuV/m	MARGIN dB
2404.9	2404.9	66.9	V	3.31	27.82	98.4	28.98
2404.9	2404.9	67.2	H	3.31	27.82	98.33	29.05
2404.9	4897.0	8.6	V	4.61	33.69	46.90	7.10
2404.9	4897.0	8.1	H	4.61	33.69	46.40	7.60
2440.8	2440.8	66.0	V	3.32	27.85	97.18	30.20
2440.8	2440.8	67.1	H	3.32	27.85	98.28	29.10
2440.8	4881.7	7.8	V	4.63	33.92	46.35	7.65
2440.8	4881.7	9.0	H	4.63	33.92	47.55	14.10
2478.6	2478.6	66.7	V	3.34	27.88	97.93	29.45
2478.6	2478.6	67.7	H	3.34	27.88	98.93	28.45
2478.6	4759.20	7.8	V	4.65	34.16	46.61	7.39
2478.6	4957.20	10.4	H	4.65	34.16	49.21	4.79

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..

FCCID: GAFCT-D201

DATE: 4/9/2003

REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC

PAGE: 15 OF 24



**APPLICANT:** COLUMBIA TELECOMMUNICATIONS GROUP, INC..

**FCC ID:** GAFCT-D201

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS - BASE

**REQUIREMENTS:**

FIELD STRENGTH of Fundamental: 902-928MHz 2.4-2.4835GHz 127.38dBuV/m @3m	FIELD STRENGTH of Harmonics  54 dBuV/m @3m	S15.209 30 - 88 MHz 40 dBuV/m @3M 88 -216 MHz 43.5 216 -960 MHz 46 ABOVE 960 MHz 54dBuV/m
--	---	---

Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54 dBuV/m). Spurious not in a restricted band must be 20 dBc.

TUNED FREQUENCY MHz	EMISSIONS FREQUENCY MHz	METER READING dBuV	ANT. POLARITY	COAX LOSS dB	CORRECTION FACTOR dB	FIELD STRENGTH dBuV/m	MARGIN dB
2404.9	2404.9	61.6	V	3.31	27.82	92.73	34.65
2404.9	2404.9	54.9	H	3.31	27.82	86.03	41.35
2404.9	4809.7	8.2	V	4.61	33.69	46.50	7.50
2404.9	4809.7	7.6	H	4.61	33.69	45.90	8.10
2440.8	2440.8	61.1	V	3.32	27.85	92.27	35.11
2440.8	2440.8	54.9	H	3.32	27.85	86.07	41.31
2440.8	2440.8	8.5	V	4.63	33.92	47.05	6.95
2440.8	2440.8	7.5	H	4.63	33.92	46.05	7.95
2478.6	2478.6	65.6	V	3.34	27.88	96.82	30.56
2478.6	2478.6	55.9	H	3.34	27.88	87.12	40.26
2478.6	4759.2	9.4	V	4.65	34.16	48.21	5.79
2478.6	4757.2	8.2	H	4.65	34.16	47.01	6.99

**SAMPLE CALCULATION:** FSdBuV/m = MR(dBuV) + ACFdB + COAX+ C.F.

**METHOD OF MEASUREMENT:** The procedure used was ANSI STANDARD C63.4-1992. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was scanned from 30 MHz to 25 GHz using a Hewlett Packard Model 8566B Spectrum Analyzer, Hewlett Packard Model 85685A Preselector, Hewlett Packard Model 85650A Quasi-Peak Adaptor, and an appropriate antenna. Low loss coax was used above 1 GHz. Measurements were made at Timco Engineering, Inc. 849 NW State Road 45Newberry, Fl.

**TEST RESULTS:** The unit DOES meet the FCC requirements.

**PERFORMED BY:** Joseph Scoglio

**DATE:** 4/9/2003

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..

FCCID: GAFCT-D201

DATE: 4/9/2003

REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC

PAGE: 16 OF 24

**APPLICANT:** COLUMBIA TELECOMMUNICATIONS GROUP, INC.

**FCC ID:** GAFCT-D201

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND

**REQUIREMENTS:** Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54 dBuV/m).

**TEST PROCEDURE:** An in band field strength measurement of the fundamental Emission using the RBW and detector function required by C63.4-2000 and FCC Rules. The procedure was repeated with an average detector and a plot made. The calculated field strength in the adjacent restricted band is presented below.

**Base:**

**Frequency: 2389.00 MHz**  
 +8.80 dBuV  
 +30.64 ACF  
 + 3.32 Coax Loss  
 + 0.00 Attn.  
 +42.76 dBuV


**Frequency: 2483.60 MHz**  
 +11.70 dBuV  
 +30.73 ACF  
 + 3.39 Coax Loss  
 + 6.00 Attn.  
 +51.82 dBuV

**Handset:**


**Frequency: 2382.00 MHz**  
 + 7.90 dBuV  
 +30.64 ACF  
 + 3.32 Coax Loss  
 + 6.00 Attn.  
 +47.86 dBuV

**Frequency: 2483.60 MHz**  
 +12.00 dBuV  
 +30.73 ACF  
 + 3.39 Coax Loss  
 + 6.00 Attn.  
 +52.12 dBuV

BANDEDGE PLOT BASE

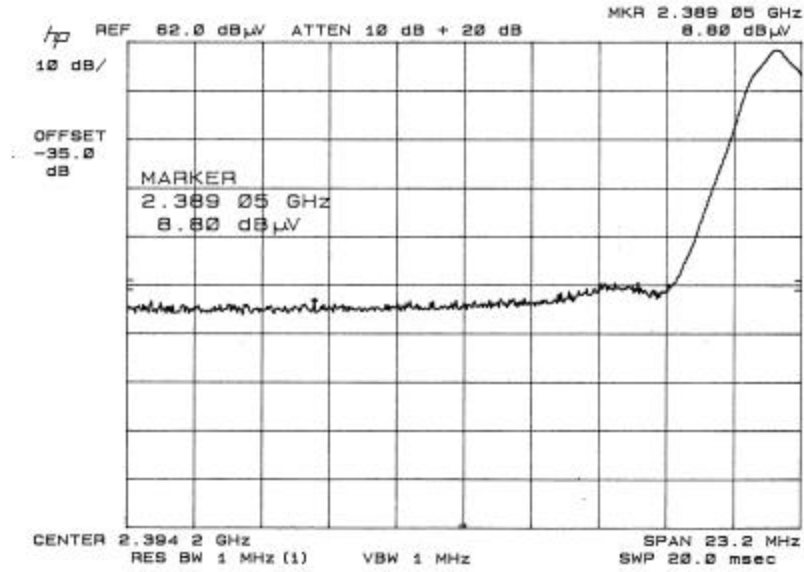


BANDEDGE PLOT BASE

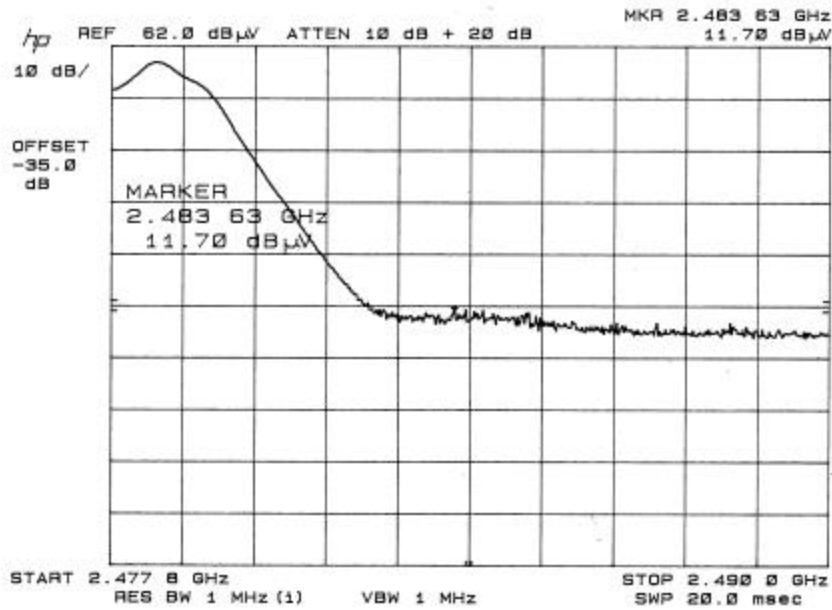


APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 18 OF 24

BANEDGE PLOT HANDSET

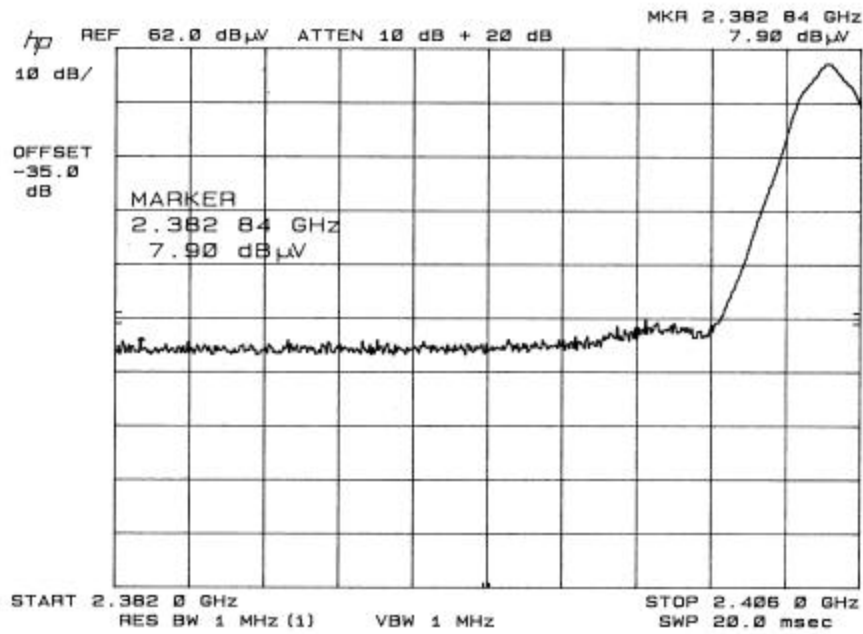

BANEDGE PLOT HANDSET

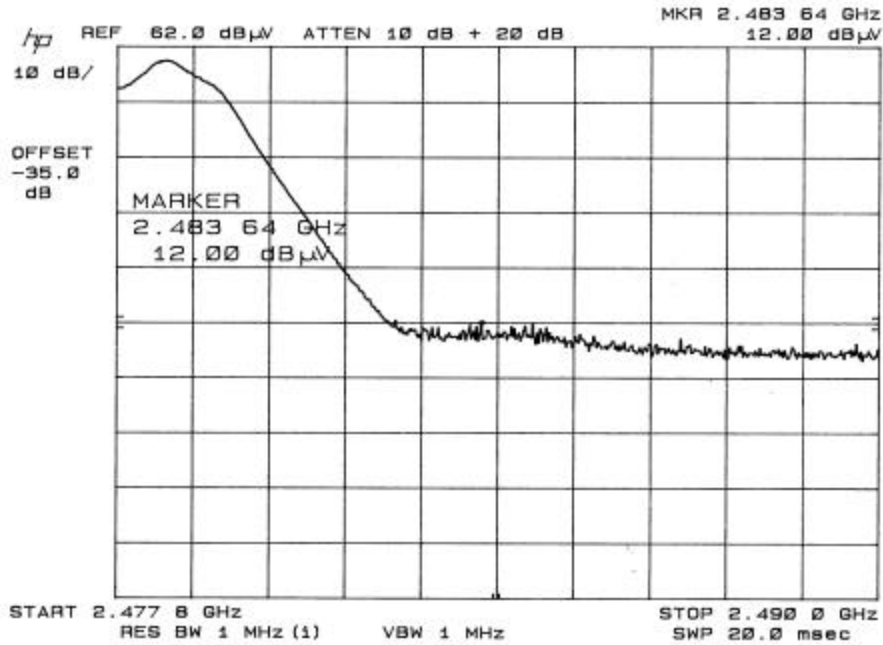

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: T:\C\COLUMBIA\560AUT3\EXTRA\560AUT3TESTREPORT.DOC  
PAGE: 19 OF 24

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC..

FCC ID: GAFCT-D201

NAME OF TEST: POWER SPECTRAL DENSITY

RULES PART NO.: 15.247(d)

REQUIREMENTS: The power spectral density averaged over any 1-second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

TEST DATA:

The spectrum line spacing could not be resolved so the noise power density was measured;

Measurement Method:

Starting from the settings that were used for the 6 dB bandwidth the peak signal was located and the span was reduced and the sweep time increased in a manner to maintain calibration and to keep the peak emission in the display, then the sweep time was increased to 500seconds at 1.5MHz span and a RBW changed to 3 kHz. The spectrum analyzer was put into the noise power mode and the plots made.


BASE:

CHANNEL 1	CHANNEL 21	CHANNEL 42
35.60 dBuV	34.90 dBuV	36.60 dBuV
20.00 dB ATTN	20.00 dB ATTN	20.00 dB ATTN
<u>35.00 dB CF</u>	<u>35.00 dB CF</u>	<u>35.00 dB CF</u>
+ 90.60 dBuV	+ 89.9 dBuV	+ 91.6 dBuV
<u>-107.00</u>	<u>-107.00</u>	<u>-107.00</u>
- 16.40 dBm	-17.10 dBm	-15.40 dBm


HANDSET:

CHANNEL 1	CHANNEL 21	CHANNEL 42
36.00 dBuV	34.40 dBuV	35.10 dBuV
20.00 dB ATTN	20.00 dB ATTN	20.00 dB ATTN
<u>35.00 dB CF</u>	<u>35.00 dB CF</u>	<u>35.00 dB CF</u>
+91.00 dBuV	+89.40 dBuV	+90.10 dBuV
<u>-107.00</u>	<u>-107.00</u>	<u>-107.00</u>
-16.00 dBm	-17.60 dBm	-16.90 dBm


POWER SPECTRAL DENSITY PLOT - BASE

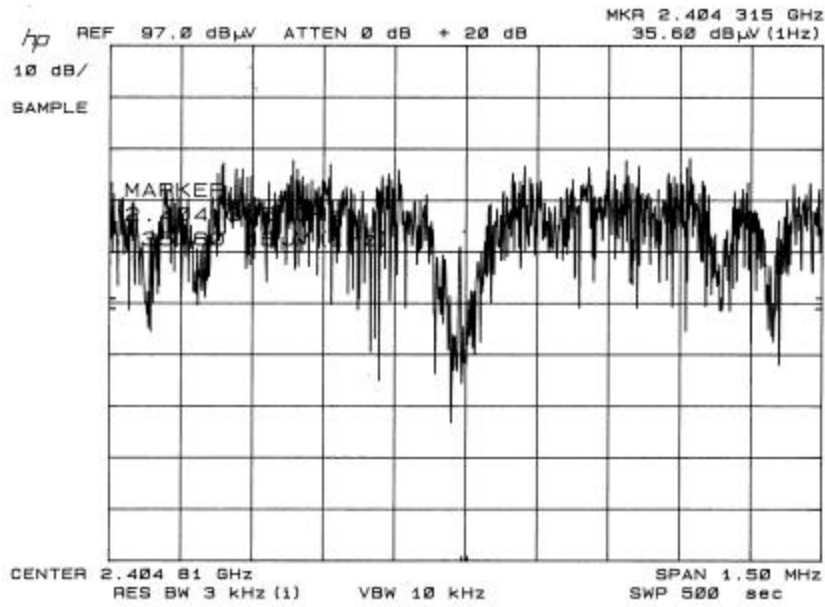

POWER SPECTRAL DENSITY PLOT - BASE

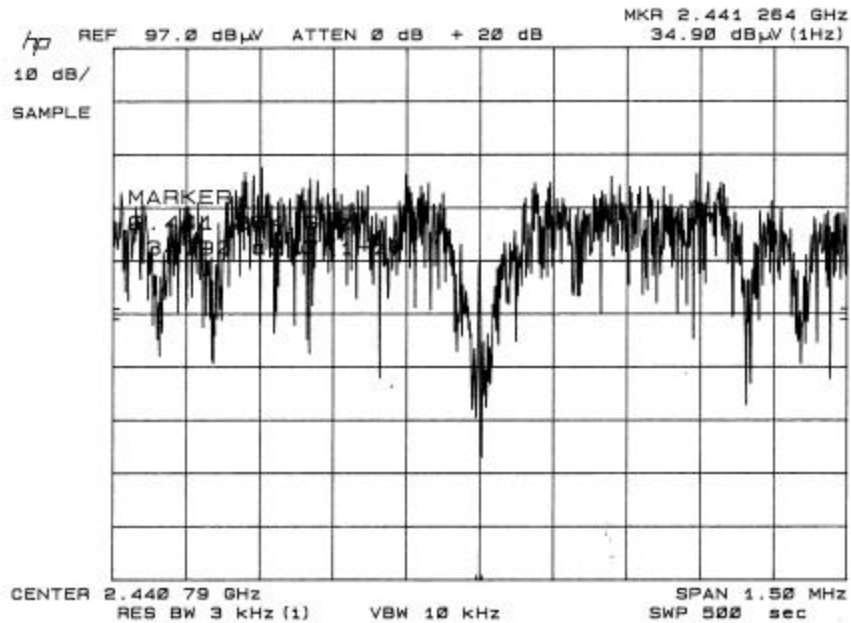


POWER SPECTRAL DENSITY PLOT - BASE

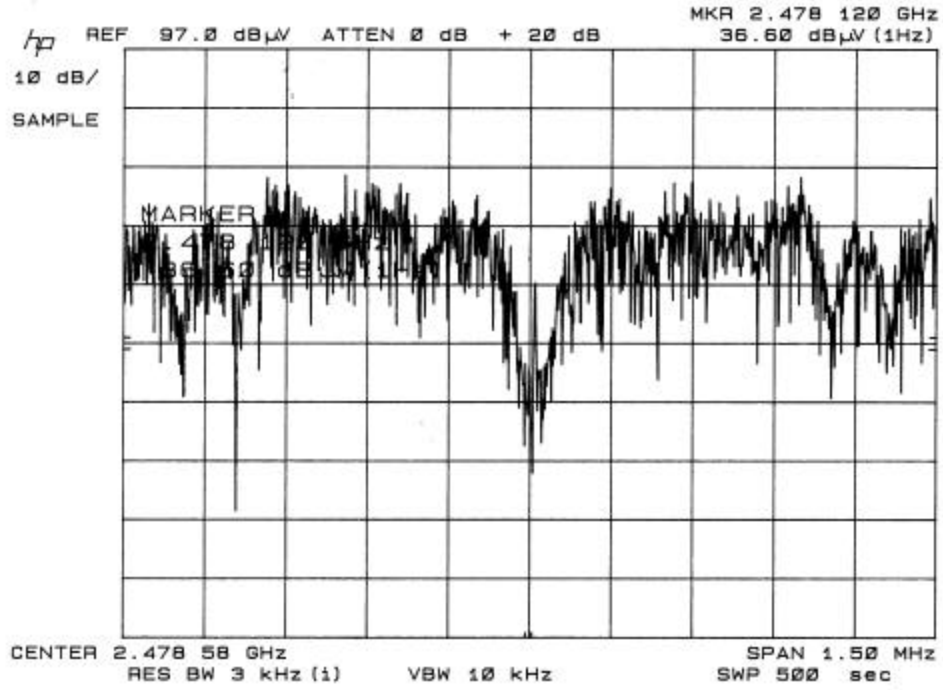


APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC.  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: C\COLUMBIA\560AUT3\560AUT3TestReport.doc  
PAGE: 22 of 24

POWER SPECTRAL DENSITY PLOT - HANDSET

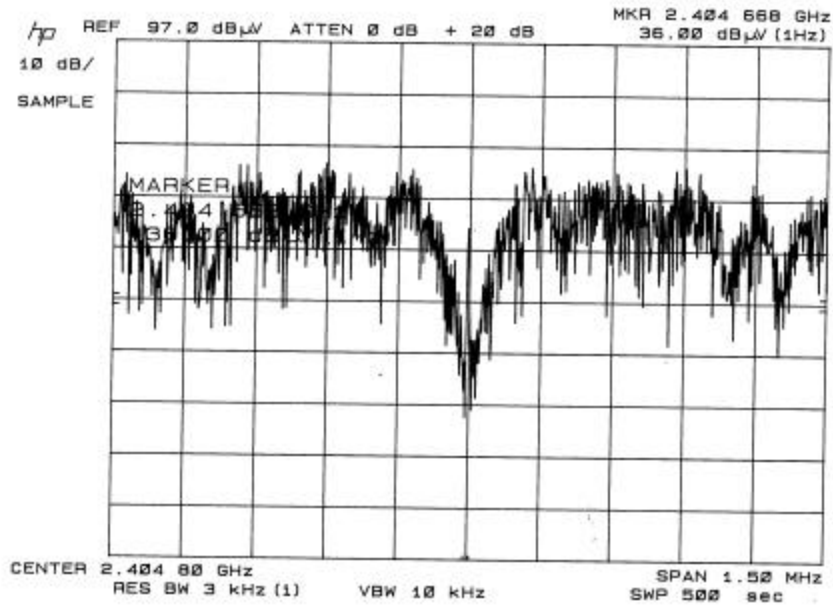


POWER SPECTRAL DENSITY PLOT - HANDSET

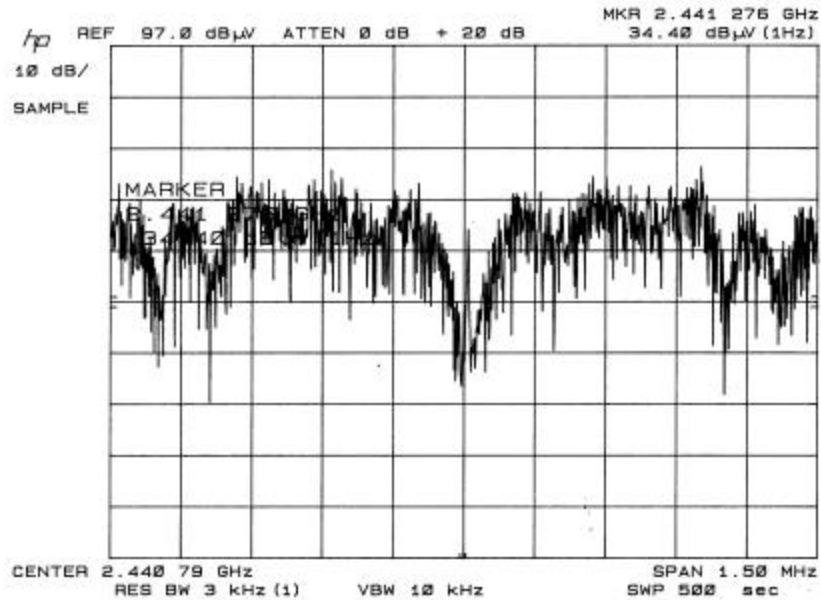

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC.  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: C\COLUMBIA\560AUT3\560AUT3TestReport.doc  
PAGE: 23 of 24



POWER SPECTRAL DENSITY PLOT - HANDSET

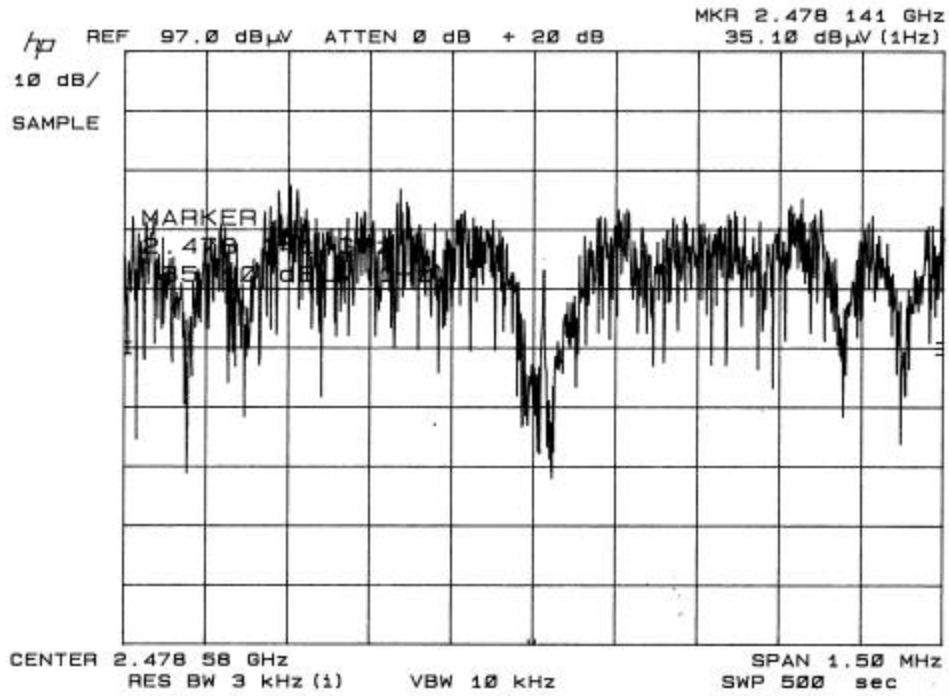

APPLICANT: COLUMBIA TELECOMMUNICATIONS GROUP, INC.  
FCCID: GAFCT-D201  
DATE: 4/9/2003  
REPORT #: C\COLUMBIA\560AUT3\560AUT3TestReport.doc  
PAGE: 24 of 24