

COLLAGE INVESTMENTS LLC

Mobile phone




Main Model: L2 SHOW
Serial Model: N/A

May 24, 2013
Report No.: 13050020-FCC-R1
(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

		
Deon Dai Compliance Engineer	Alex Liu Technical Manager	

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.

RF Test Report

To: FCC Part 22(H) & FCC Part 24(E): 2012

SIEMIC, INC.
Accessing global markets



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to [testing](#) and [certification](#), SIEMIC provides initial design reviews and [compliance management](#) through out a project. Our extensive experience with [China](#), [Asia Pacific](#), [North America](#), [European](#), and [international](#) compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the [global markets](#).

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom , Safety
Hong Kong	OFTA , NIST	RF/Wireless ,Telecom
Australia	NATA, NIST	EMC, RF, Telecom , Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety

Accreditations for Product Certifications

Country/Region	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC, (RCB 208)	RF , Telecom
Hong Kong	OFTA (US002)	RF , Telecom

This page has been left blank intentionally.

CONTENTS

1. EXECUTIVE SUMMARY & EUT INFORMATION.....5

2. TECHNICAL DETAILS.....6

3. MODIFICATION7

4. TEST SUMMARY8

5. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....9

ANNEX A. TEST INSTRUMENT & METHOD51

ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS54

ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....65

ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST68

ANNEX E. DECLARATION OF SIMILARITY69

1. EXECUTIVE SUMMARY & EUT INFORMATION

The purpose of this test programmed was to demonstrate compliance of the **COLLAGE INVESTMENTS LLC, Mobile phone and model: L2 SHOW** against the current Stipulated Standards. The Mobile phone has demonstrated compliance with the FCC Part 22(H) & FCC Part 24(E): 2012.

<u>EUT Information</u>

EUT

Description : Mobile phone

Main Model : L2 SHOW

Serial Model : N/A

Antenna Gain : UMTS-FDD Band V/GSM850: -1 dBi
 UMTS-FDD Band II/PCS1900: 2 dBi
 Bluetooth: 1 dBi
 WIFI: 1 dBi

Input Power : **Battery:**
 Model: BRAND
 Capacity: 1500mAh
 Nominal Voltage: 3.7V
Adapter:
 Model: A1502-500550
 Input: AC 100-240V 50/60Hz 0.15A
 Output: DC 5V 550mAh

Maximum Conducted AV Power to Antenna : GSM850: 31.48 dBm
 PCS1900: 29.09 dBm
 UMTS-FDD Band V : 22.58 dBm
 UMTS-FDD Band II : 22.37 dBm

Maximum Radiated ERP/EIRP : GSM850: 31.71 dBm / ERP
 PCS1900:29.87 dBm / EIRP
 UMTS-FDD Band V : 21.86dBm / ERP
 UMTS-FDD Band II : 22.82 dBm / EIRP

Classification Per Stipulated Test Standard : FCC Part 22(H) & FCC Part 24(E): 2012

2. TECHNICAL DETAILS

Purpose	Compliance testing of Mobile phone with stipulated standard
Applicant / Client	COLLAGE INVESTMENTS LLC 11437 NW 34 STREET, DORAL, FLORIDA 33178 U.S.A.
Manufacturer	NINGBO BIRD CO., LTD No.999 Dacheng East Road,Fenghua City,Zhejiang
Laboratory performing the tests	SIEMIC Nanjing (China) Laboratories NO.2-1,Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email:info@siemic.com
Test report reference number	13050020-FCC-R1
Date EUT received	May 09, 2013
Standard applied	FCC Part 22(H) & FCC Part 24(E): 2012
Dates of test	May 20 to May 21, 2013
No of Units	#1
Equipment Category	PCE
Trade Name	LIKUID
RF Operating Frequency (ies)	GSM850 TX : 824.2 ~ 848.8 MHz; RX : 869.2 ~ 893.8 MHz PCS1900 TX : 1850.2 ~ 1909.8 MHz; RX : 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX : 826.4 ~ 846.6 MHz; RX : 871.4 ~ 891.6 MHz UMTS-FDD Band II TX :1852.4 ~ 1907.6 MHz; RX : 1932.4 ~ 1987.6 MHz 802.11b/g/n(20M): 2412-2462 MHz 802.11n(40M): 2422-2452 MHz Bluetooth: 2402-2480 MHz
Number of Channels	299CH (PCS1900) and 124CH (GSM850) UMTS-FDD Band V : 102CH UMTS-FDD Band II : 277CH Bluetooth: 79CH 802.11b/g/n(20M): 11CH 802.11n(40M): 9CH
Modulation	GSM / GPRS: GMSK UMTS-FDD: QPSK 802.11b/g/n: DSSS/OFDM Bluetooth: GFSK
GPRS Multi-slot class	8/10/12
FCC ID	GAO-SHOW

3. MODIFICATION

NONE

4. TEST SUMMARY

**The product was tested in accordance with the following specifications.
 All testing has been performed according to below product classification:**

PCE

Test Results Summary

Test Standard	Description	Product Class	Pass / Fail
§ 1.1307, § 2.1093	RF Exposure (SAR)	See Above	Pass
§ 2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	See Above	Pass
§ 2.1047	Modulation Characteristics	See Above	N/A
§ 2.1049; § 22.905 § 22.917; § 24.238	99% & -26 dB Occupied Bandwidth	See Above	Pass
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	See Above	Pass
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	See Above	Pass
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	See Above	Pass
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	See Above	Pass

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different.

5. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 §1.1307, §2.1093- RF Exposure (SAR)

Test Result: Pass

The EUT is a portable device, thus requires SAR evaluation;
please refer to SIEMIC SAR Report: 13050020-FCC-H

5.2 §2.1046 ;§22.913 (a); §24.232 (c)- RF Output Power

1. **Conducted Measurement**
EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.
2. **Conducted Emissions Measurement Uncertainty**
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. **Environmental Conditions**

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test date : May 20, 2013
Tested By : Deon Dai

Procedures:

For Conducted Power:

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different test mode.

For ERP/EIRP:

1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10}(\text{power out in Watts})$

Test Result: Pass

Remark: Conducted Burst Average power for reporting purposes only

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				GSM1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	31.34	31.4	31.48	32±1	28.99	29.08	29.09	29±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	31.32	31.42	31.48	32±1	28.16	28.55	28.66	29±1
GPRS Multi-Slot Class 10 (2 uplink),GMSK	30.56	30.61	30.69	30±1	27.22	27.53	27.75	28±1
GPRS Multi-Slot Class 12 (4 uplink),GMSK	28.28	28.32	28.41	28±1	24.68	25.04	25.25	25±1
Remark : GPRS, CS1 coding scheme. Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link								

Note: Since GSM mode has higher power, so the test items below were not performed to GPRS mode.

UMTS Mode:

UMTS-FDD Band V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	4132	826.4	22.56	22+1/-1dBm
	4175	835	22.47	22+1/-1dBm
	4233	846.6	22.58	22+1/-1dBm
HSDPA Subtest1	4133	826.4	22.48	22+1/-1dBm
	4175	835	22.43	22+1/-1dBm
	4233	846.6	22.50	22+1/-1dBm
HSDPA Subtest2	4133	826.4	22.30	22+1/-1dBm
	4175	835	22.31	22+1/-1dBm
	4233	846.6	22.32	22+1/-1dBm
HSDPA Subtest3	4133	826.4	22.27	22+1/-1dBm
	4175	835	22.29	22+1/-1dBm
	4233	846.6	22.28	22+1/-1dBm
HSDPA Subtest4	4133	826.4	22.40	22+1/-1dBm
	4175	835	22.45	22+1/-1dBm
	4233	846.6	22.35	22+1/-1dBm
HSUPA Subtest1	4133	826.4	22.32	22+1/-1dBm
	4175	835	22.29	22+1/-1dBm
	4233	846.6	22.31	22+1/-1dBm
HSUPA Subtest2	4133	826.4	22.29	22+1/-1dBm
	4175	835	22.44	22+1/-1dBm
	4233	846.6	22.33	22+1/-1dBm
HSUPA Subtest3	4133	826.4	22.34	22+1/-1dBm
	4175	835	22.43	22+1/-1dBm
	4233	846.6	22.36	22+1/-1dBm
HSUPA Subtest4	4133	826.4	22.38	22+1/-1dBm
	4175	835	22.40	22+1/-1dBm
	4233	846.6	22.37	22+1/-1dBm
HSUPA Subtest5	4133	826.4	22.44	22+1/-1dBm
	4175	835	22.29	22+1/-1dBm
	4233	846.6	22.41	22+1/-1dBm

UMTS-FDD Band II

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	9262	1852.4	22.06	22+1/-1dBm
	9400	1880.0	22.37	22+1/-1dBm
	9538	1907.6	22.04	22+1/-1dBm
HSDPA Subtest1	9262	1852.4	22.07	22+1/-1dBm
	9400	1880.0	22.35	22+1/-1dBm
	9538	1907.6	22.15	22+1/-1dBm
HSDPA Subtest2	9262	1852.4	22.10	22+1/-1dBm
	9400	1880.0	22.30	22+1/-1dBm
	9538	1907.6	22.19	22+1/-1dBm
HSDPA Subtest3	9262	1852.4	22.11	22+1/-1dBm
	9400	1880.0	22.35	22+1/-1dBm
	9538	1907.6	22.10	22+1/-1dBm
HSDPA Subtest4	9262	1852.4	22.15	22+1/-1dBm
	9400	1880.0	22.33	22+1/-1dBm
	9538	1907.6	22.11	22+1/-1dBm
HSUPA Subtest1	9262	1852.4	22.20	22+1/-1dBm
	9400	1880.0	22.30	22+1/-1dBm
	9538	1907.6	22.23	22+1/-1dBm
HSUPA Subtest2	9262	1852.4	22.25	22+1/-1dBm
	9400	1880.0	22.40	22+1/-1dBm
	9538	1907.6	22.15	22+1/-1dBm
HSUPA Subtest3	9262	1852.4	22.41	22+1/-1dBm
	9400	1880.0	22.20	22+1/-1dBm
	9538	1907.6	22.11	22+1/-1dBm
HSUPA Subtest4	9262	1852.4	22.10	22+1/-1dBm
	9400	1880.0	22.25	22+1/-1dBm
	9538	1907.6	22.14	22+1/-1dBm
HSUPA Subtest5	9262	1852.4	22.22	22+1/-1dBm
	9400	1880.0	22.19	22+1/-1dBm
	9538	1907.6	22.14	22+1/-1dBm

ERP & EIRP (worst case)
ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.20	26.34	V	6.2	1.67	30.87	38.45
824.20	25.18	H	6.2	1.67	29.71	38.45
836.60	27.11	V	6.2	1.67	31.64	38.45
836.60	26.91	H	6.2	1.67	31.44	38.45
848.80	27.08	V	6.3	1.67	31.71	38.45
848.80	25.93	H	6.3	1.67	30.56	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.20	23.14	V	8.6	2.66	29.08	33
1850.20	22.52	H	8.6	2.66	28.46	33
1880.00	23.53	V	8.6	2.34	29.79	33
1880.00	22.66	H	8.6	2.34	28.92	33
1909.80	23.44	V	8.6	2.17	29.87	33
1909.80	22.63	H	8.6	2.17	29.06	33

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.40	17.62	V	6.2	1.67	22.15	38.45
826.40	15.65	H	6.2	1.67	20.18	38.45
835.00	17.33	V	6.2	1.67	21.86	38.45
835.00	16.08	H	6.2	1.67	20.61	38.45
846.60	17.38	V	6.3	1.67	22.01	38.45
846.60	16.25	H	6.3	1.67	20.88	38.45

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.40	16.59	V	8.6	2.66	22.53	33
1852.40	15.35	H	8.6	2.66	21.29	33
1880.00	16.38	V	8.6	2.34	22.64	33
1880.00	15.31	H	8.6	2.34	21.57	33
1907.60	16.39	V	8.6	2.17	22.82	33
1907.60	15.26	H	8.6	2.17	21.69	33

Note: Factors= Antenna Gain Correction-Cable Loss

5.3 §2.1047 - Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

5.4 §2.1049, §22.917, §22.905 & §24.238 - Occupied Bandwidth

1. Conducted Measurement
 EUT was set for low, mid, high channel with modulated mode and highest RF output power.
 The spectrum analyser was connected to the antenna terminal.
2. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
3. Conducted Emissions Measurement Uncertainty
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ±1.5dB.
4. Test date : May 20, 2013
 Tested By : Deon Dai

Procedures:

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.

Test Results: Pass

Cellular Band (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	241.7	318
190	836.6	243.3	337
251	848.8	245.0	322

PCS Band (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	243.0	320
661	1880.0	245.0	320
810	1909.8	243.3	317

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.150	4.690
4175	835.0	4.160	4.710
4233	846.6	4.160	4.700

UMTS-FDD Band II (Part 24E)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.170	4.710
9400	1880.0	4.180	4.720
9538	1907.6	4.180	4.720

Please refer to the following plots.


Cellular Band (Part 22H)

99% Occupied Bandwidth


Low Channel

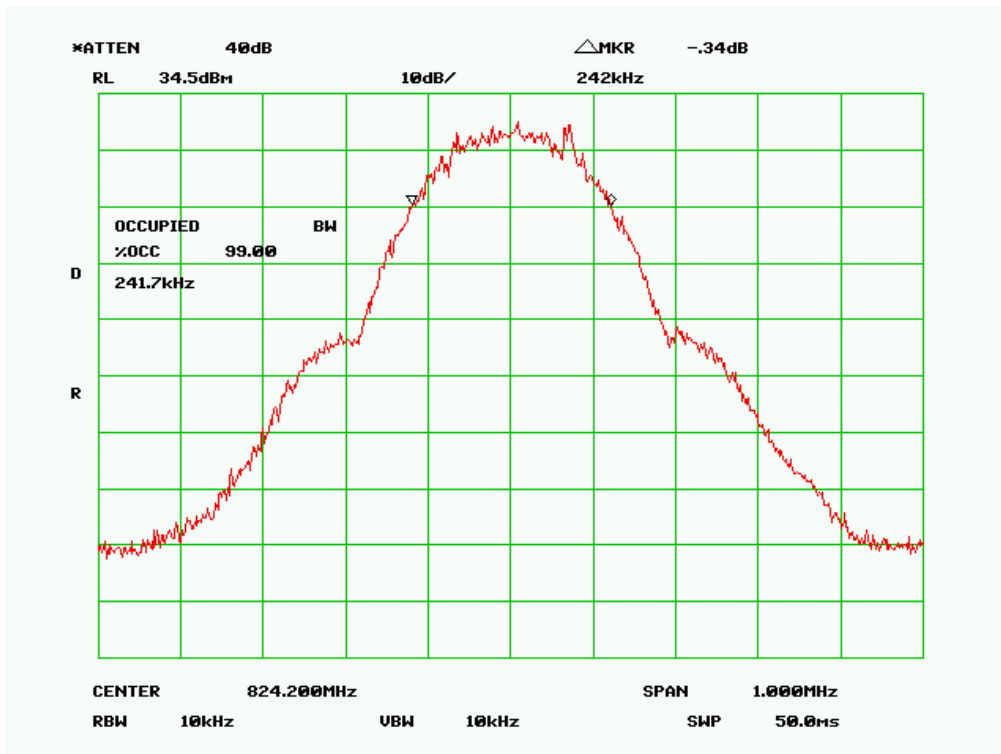


Middle Channel

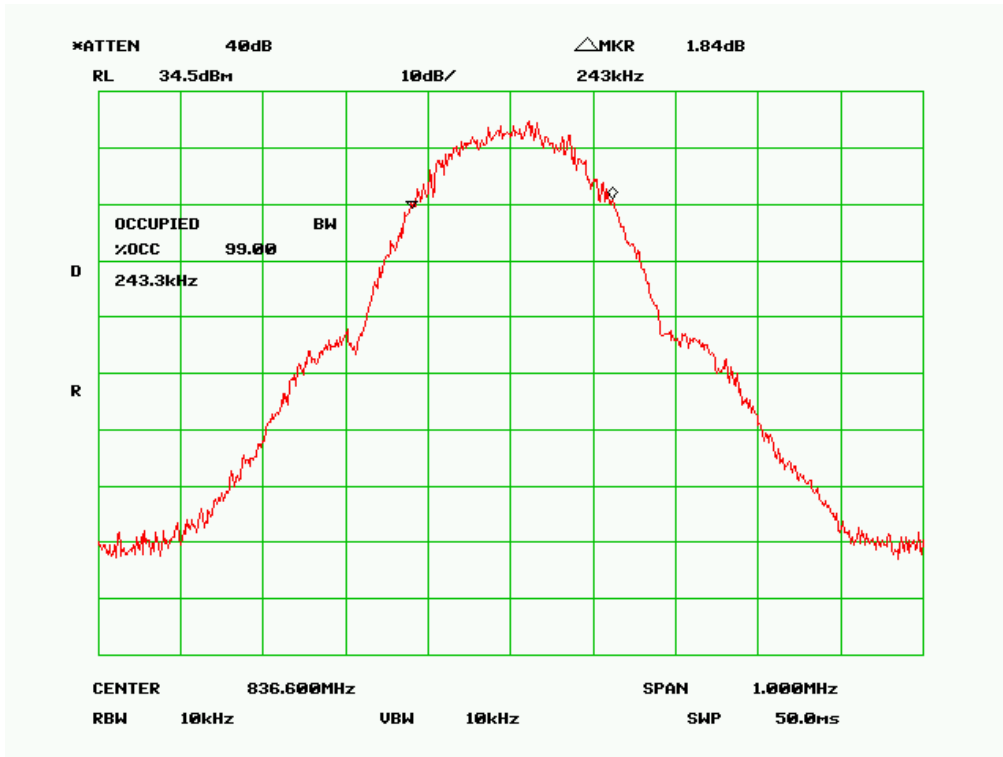


High Channel

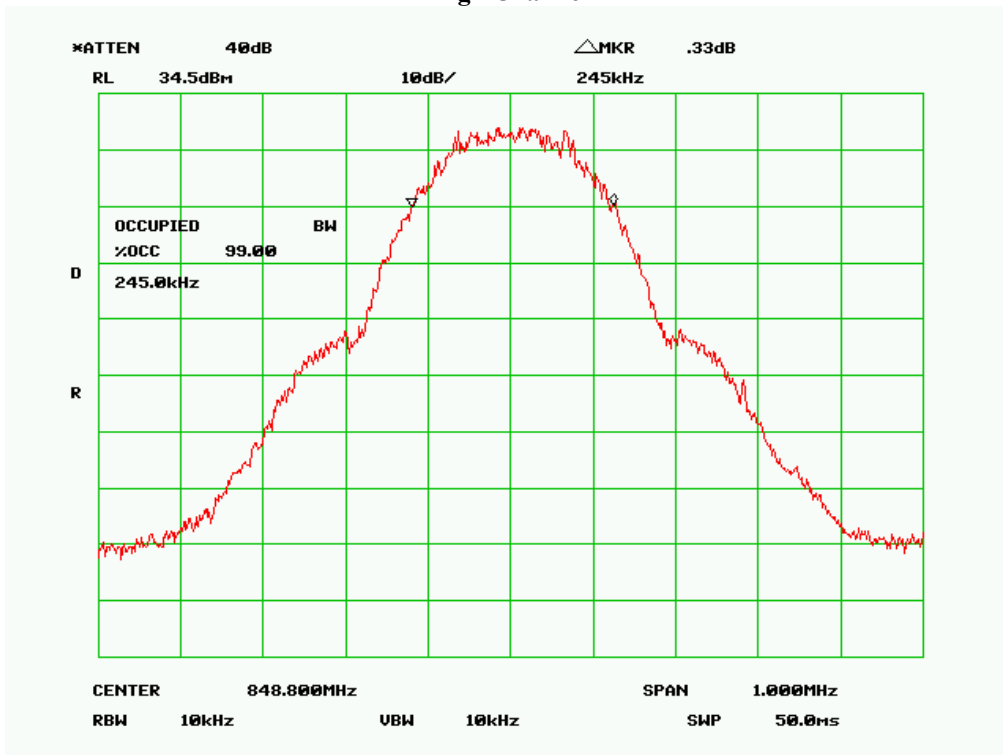


26 dB Bandwidth Low Channel

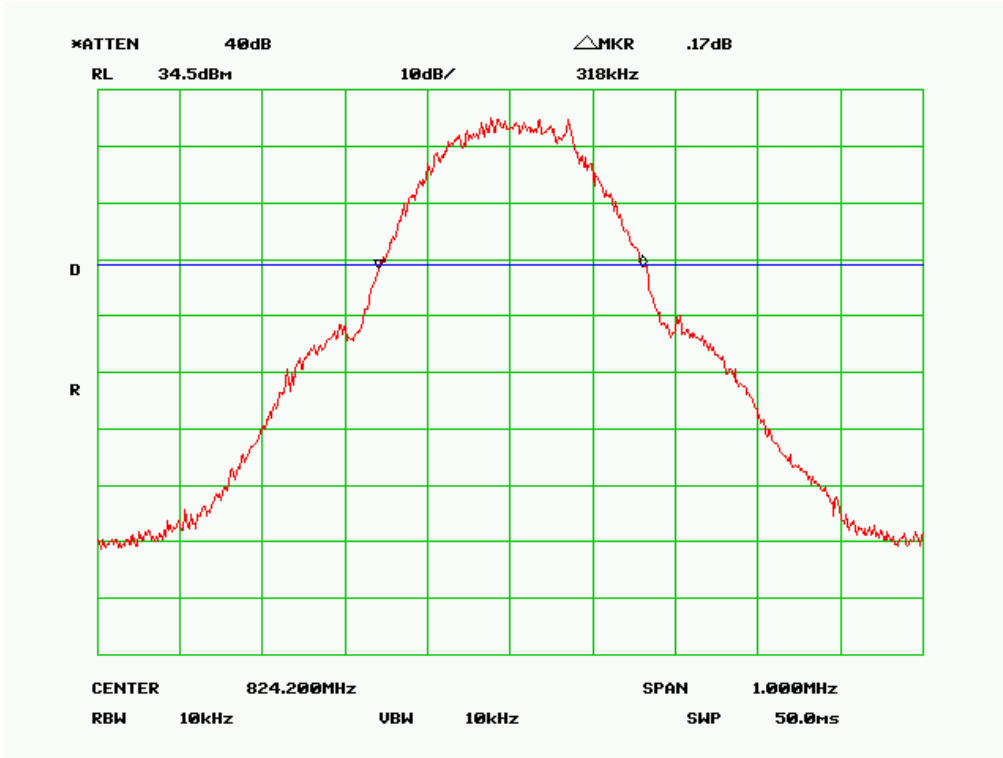

Middle Channel

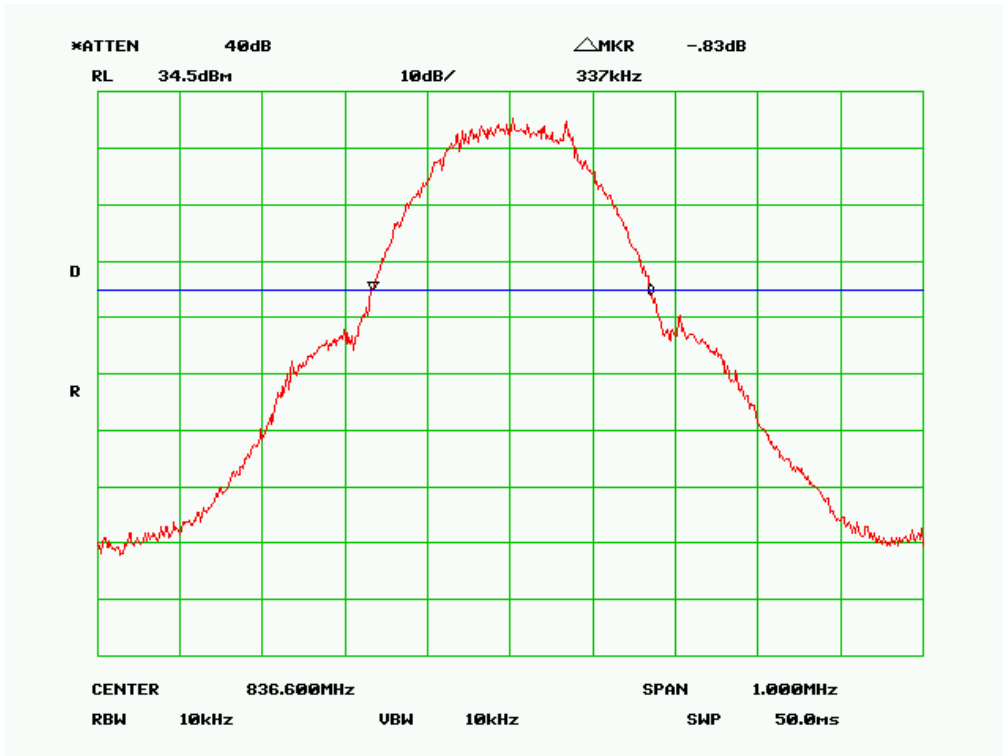


High Channel

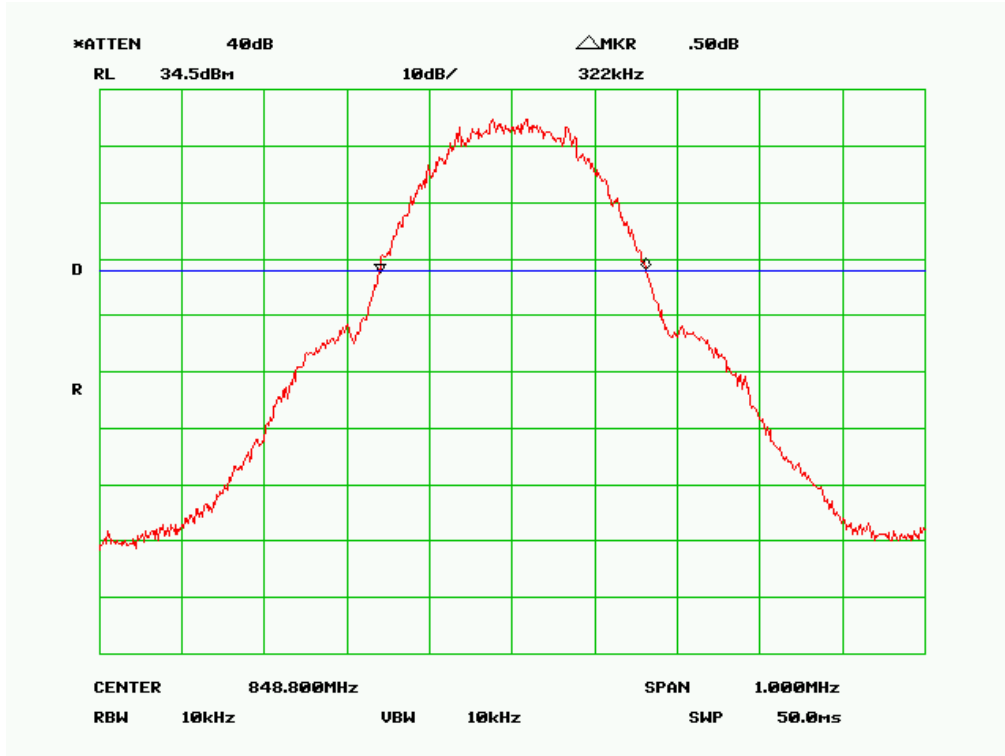


PCS Band (Part 24E)


99% Occupied Bandwidth Low Channel

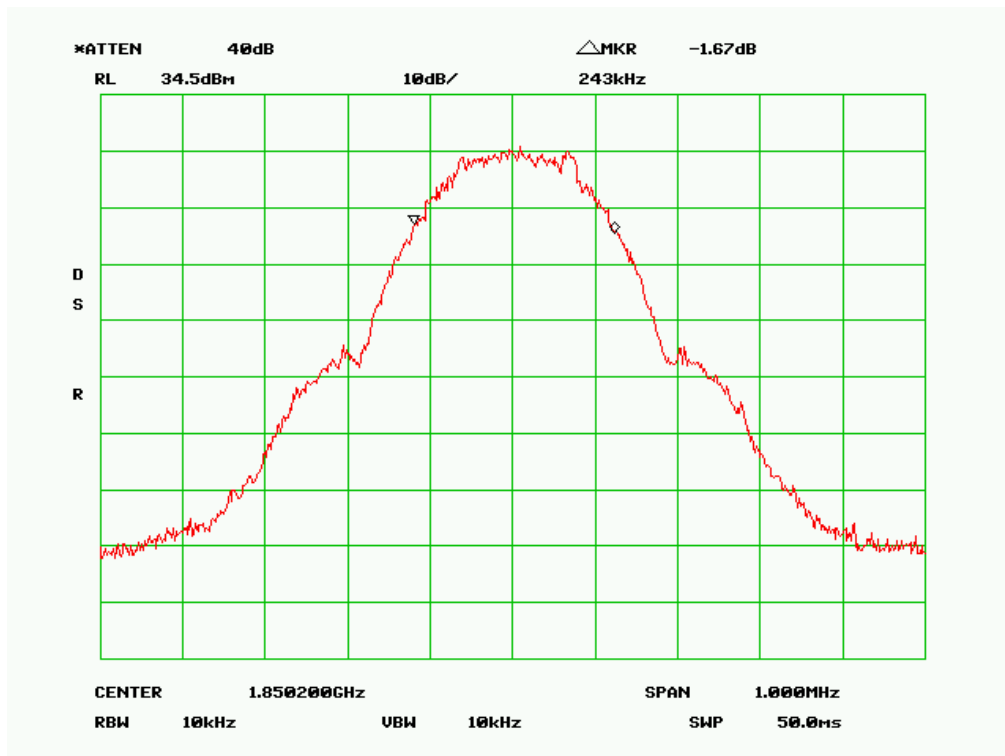


Middle Channel

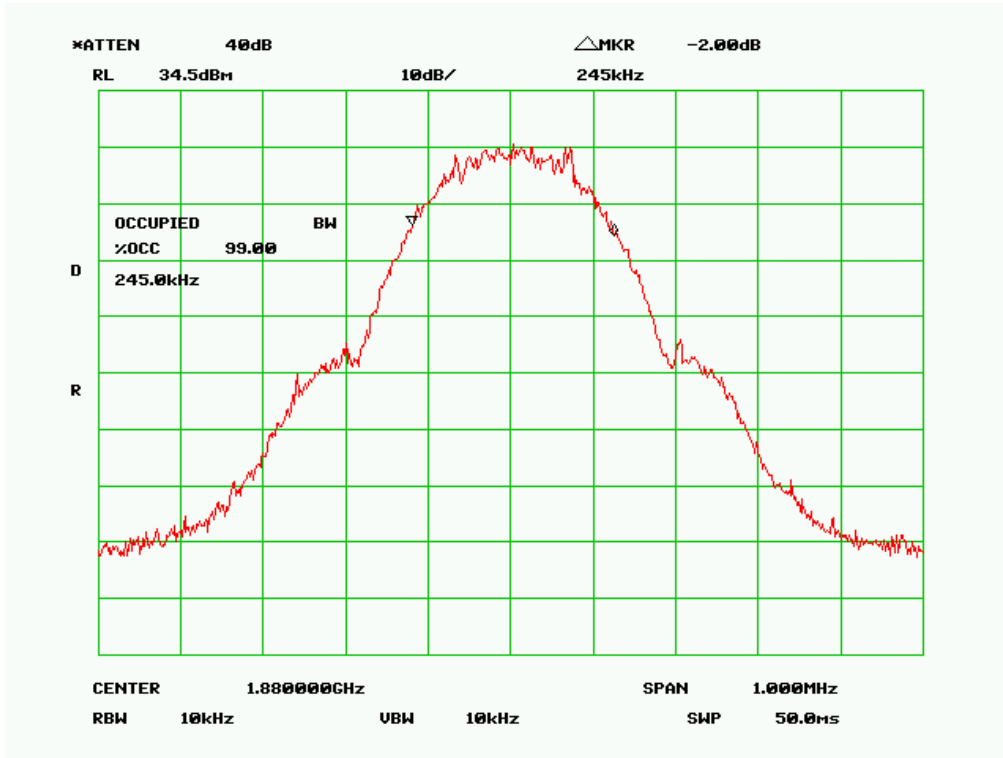


High Channel

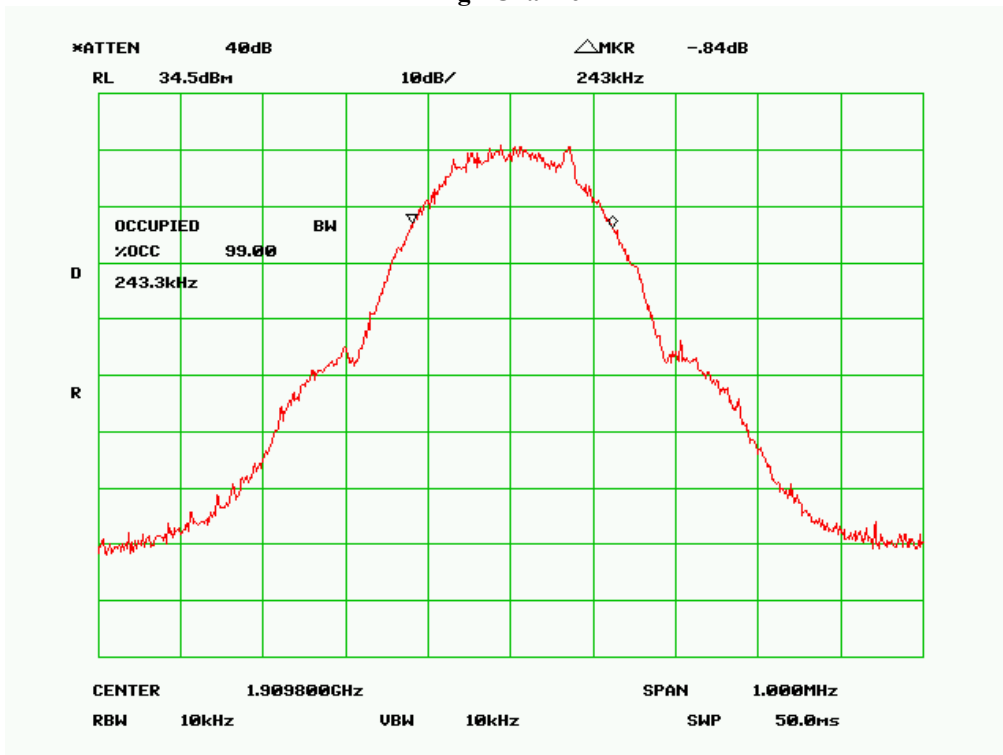


26 dB Bandwidth Low Channel

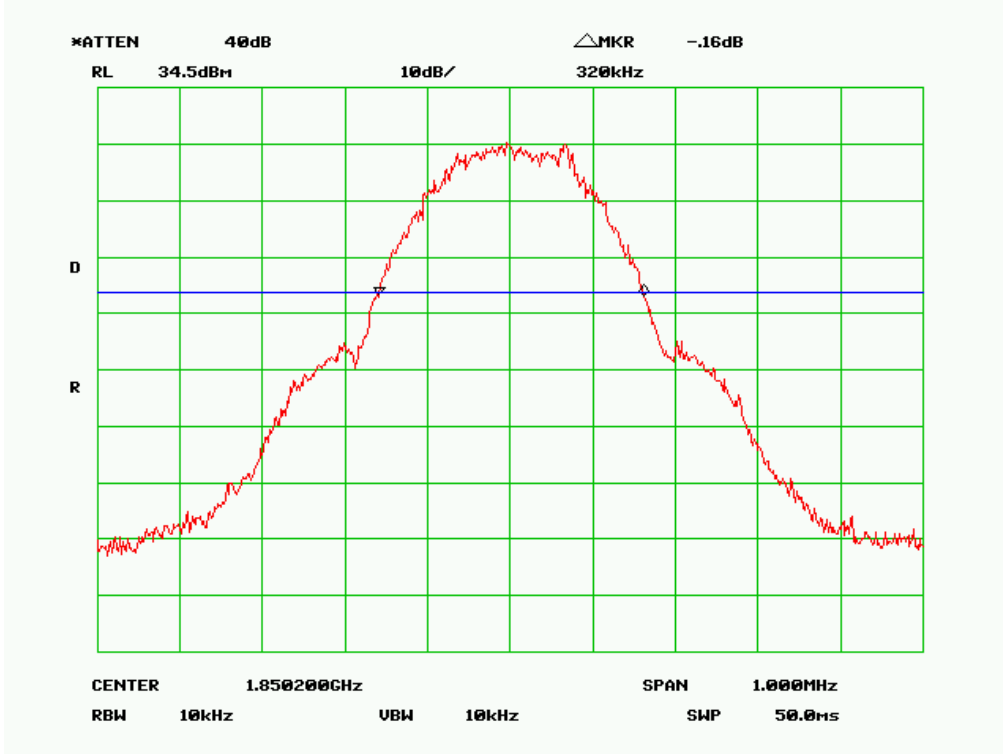

Middle Channel

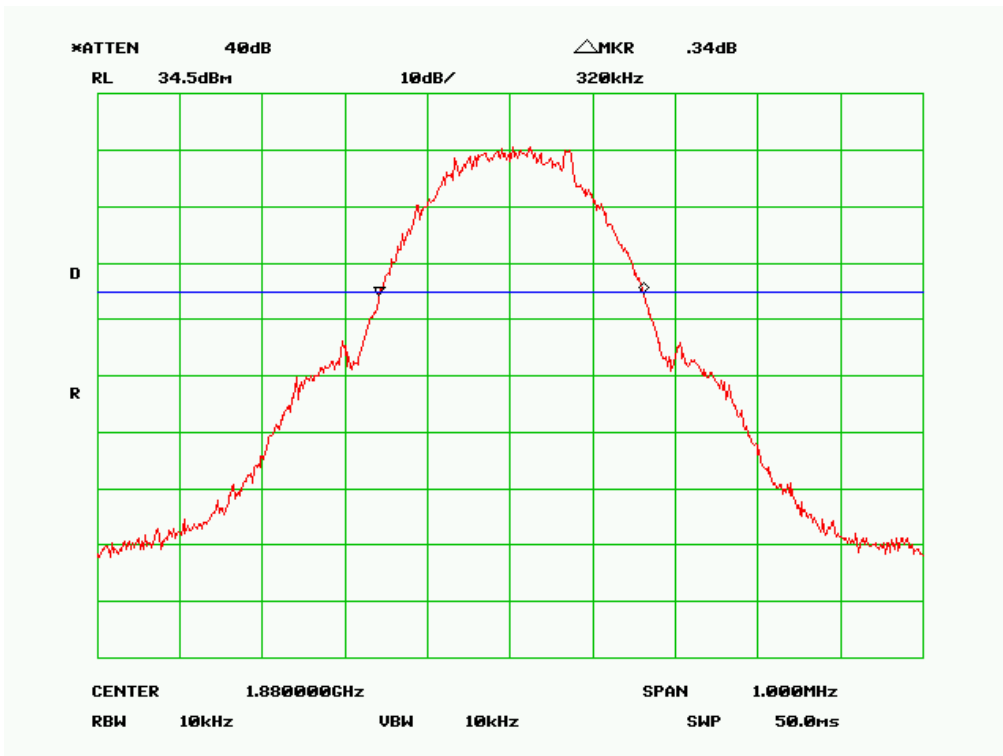


High Channel

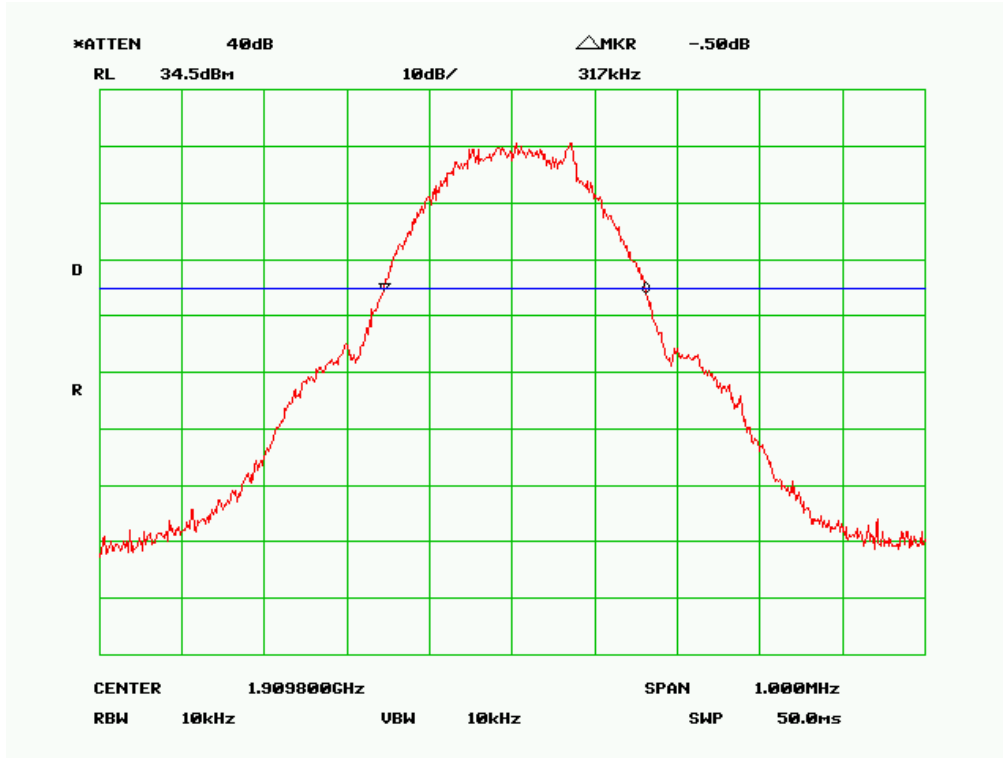


UMTS-FDD Band V (Part 22H)


99% Occupied Bandwidth Low Channel

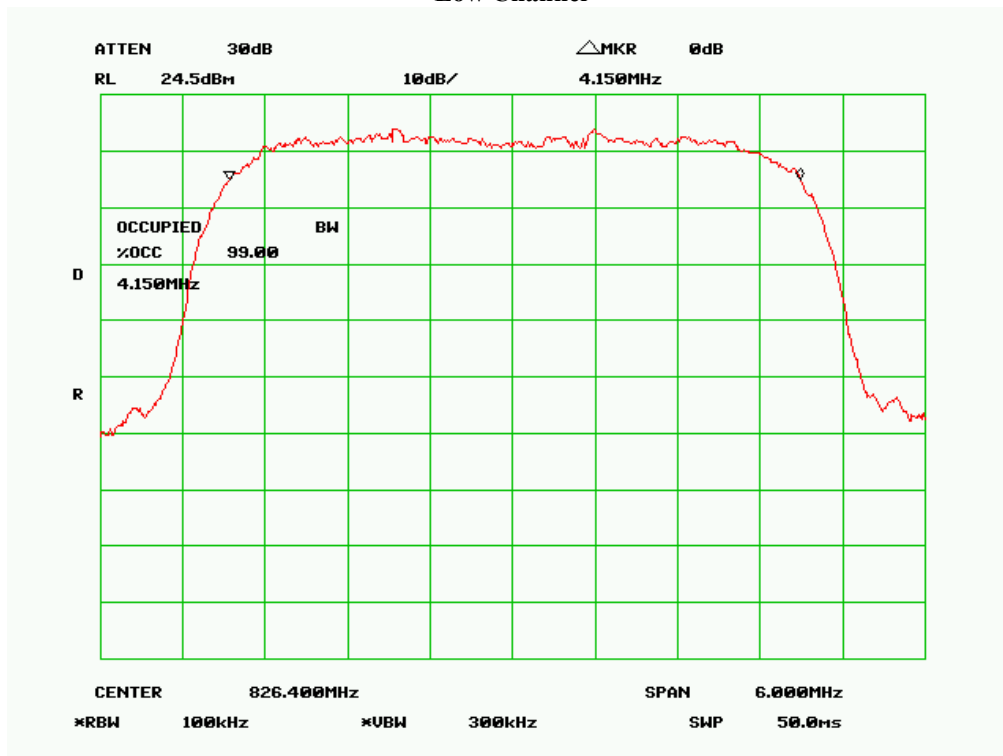


Middle Channel

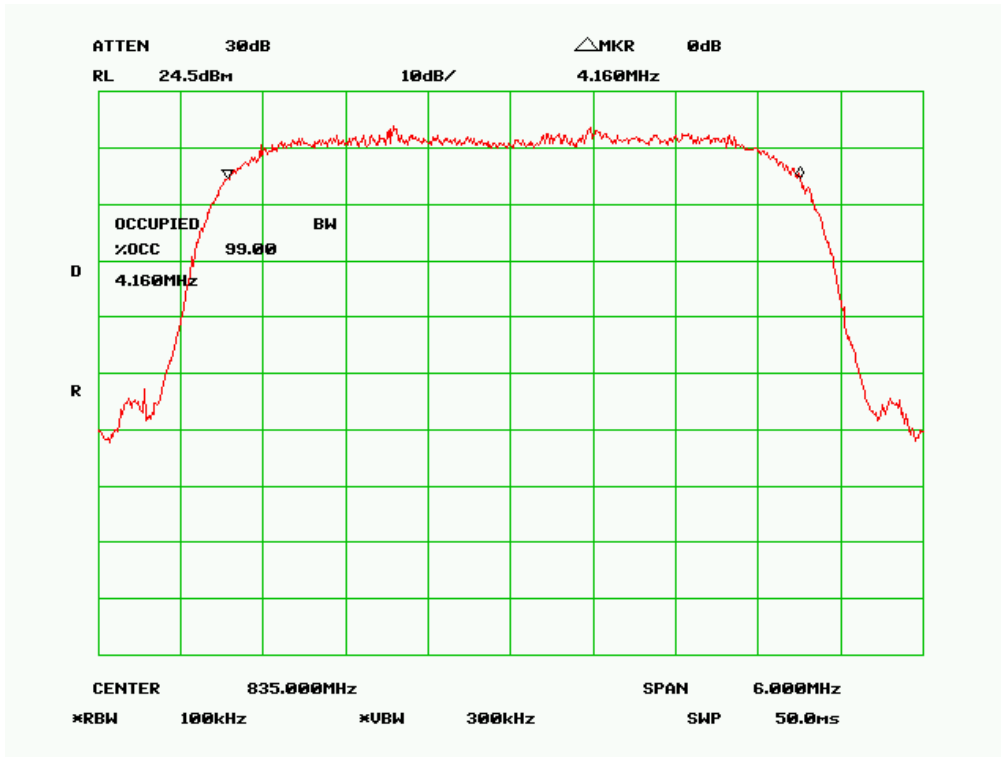


High Channel

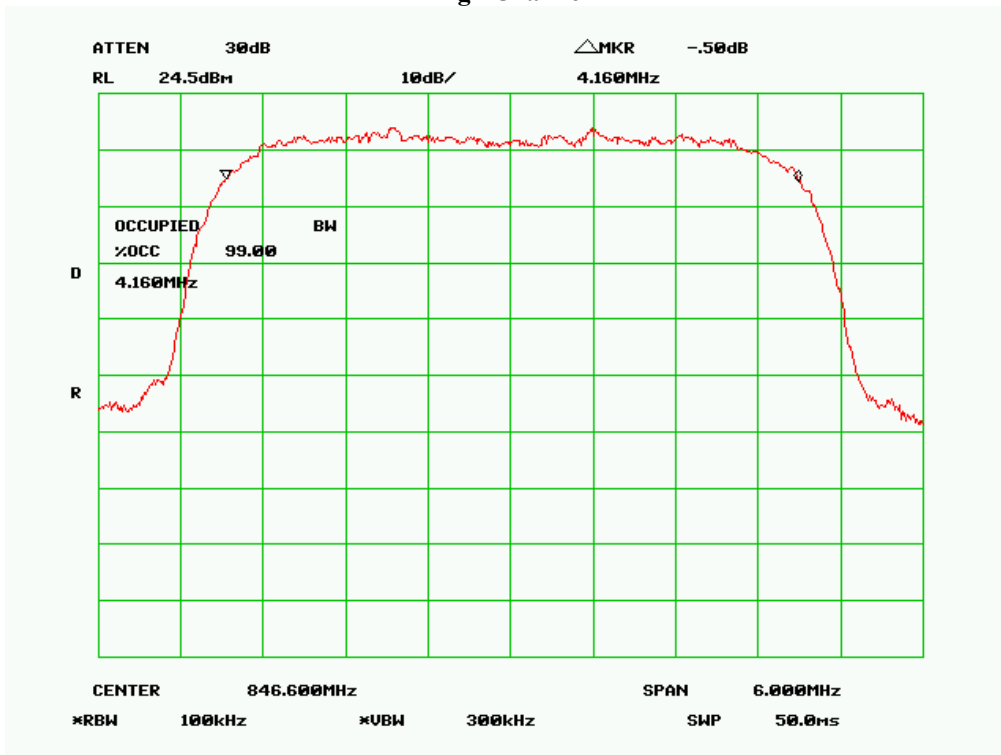


26 dB Bandwidth Low Channel

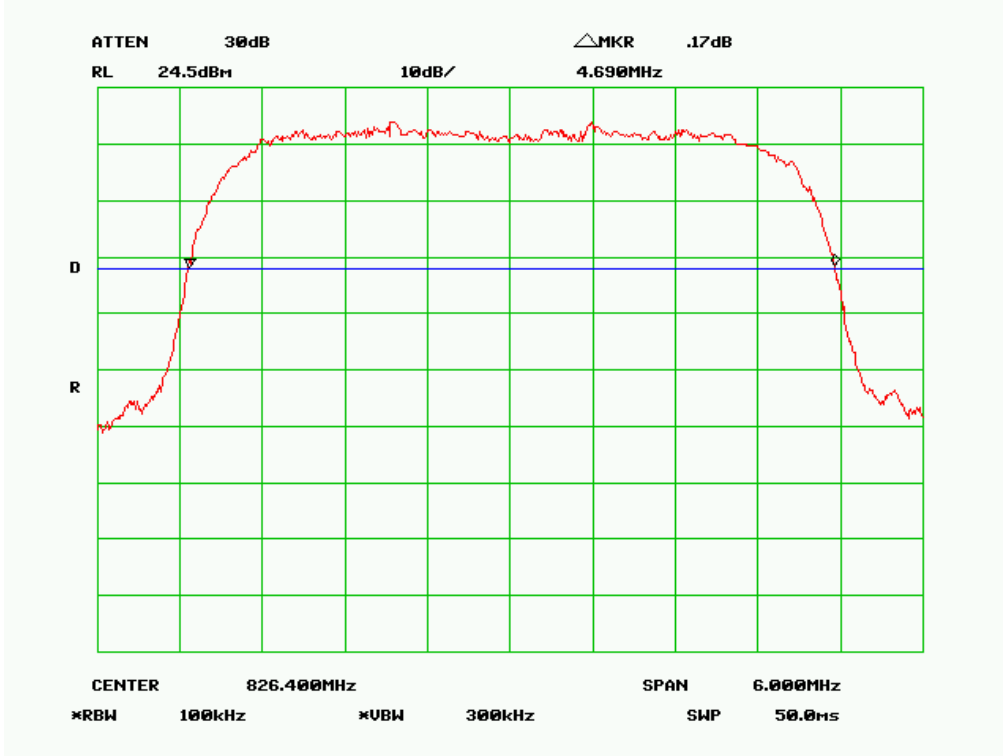

Middle Channel

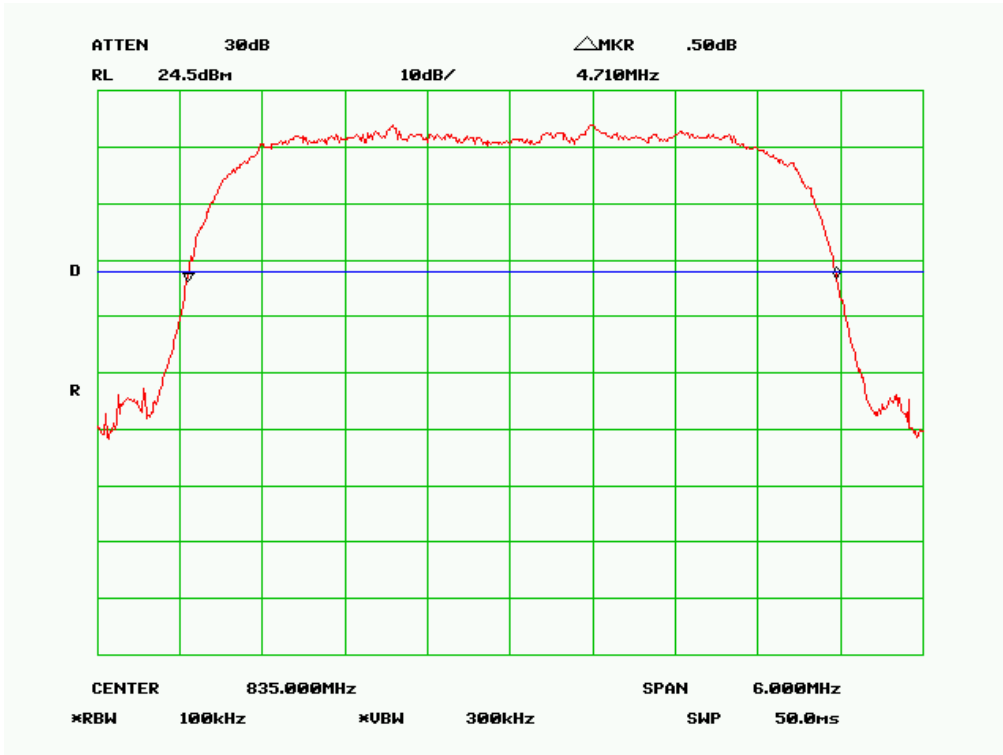


High Channel

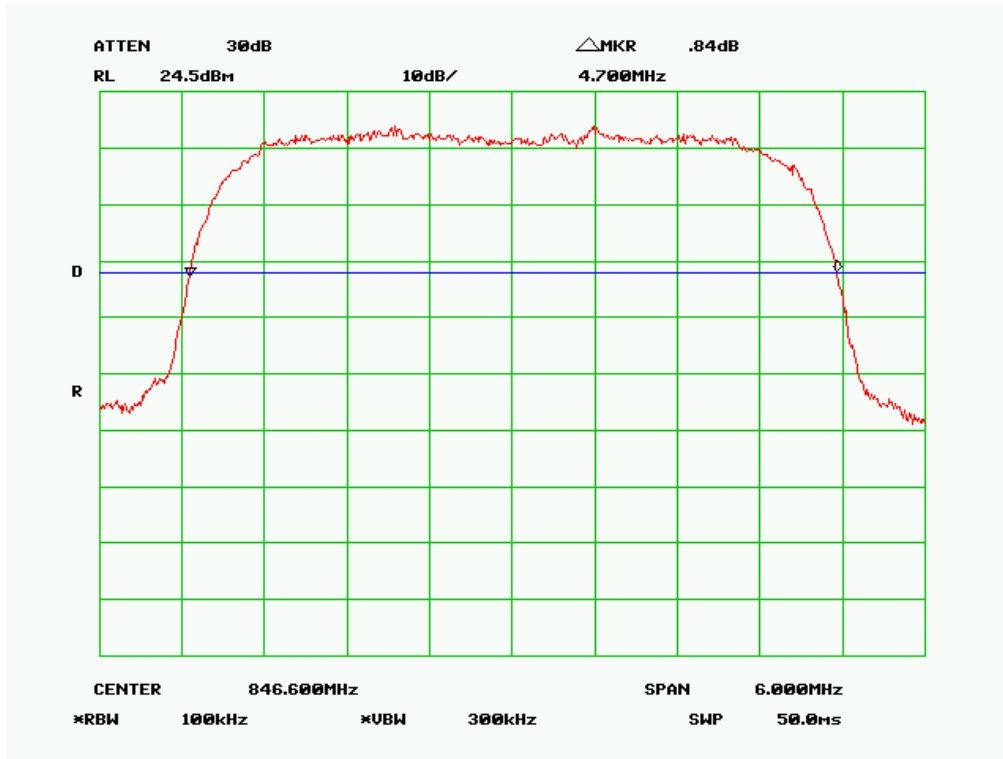


UMTS-FDD Band II (Part 24E)


99% Occupied Bandwidth Low Channel

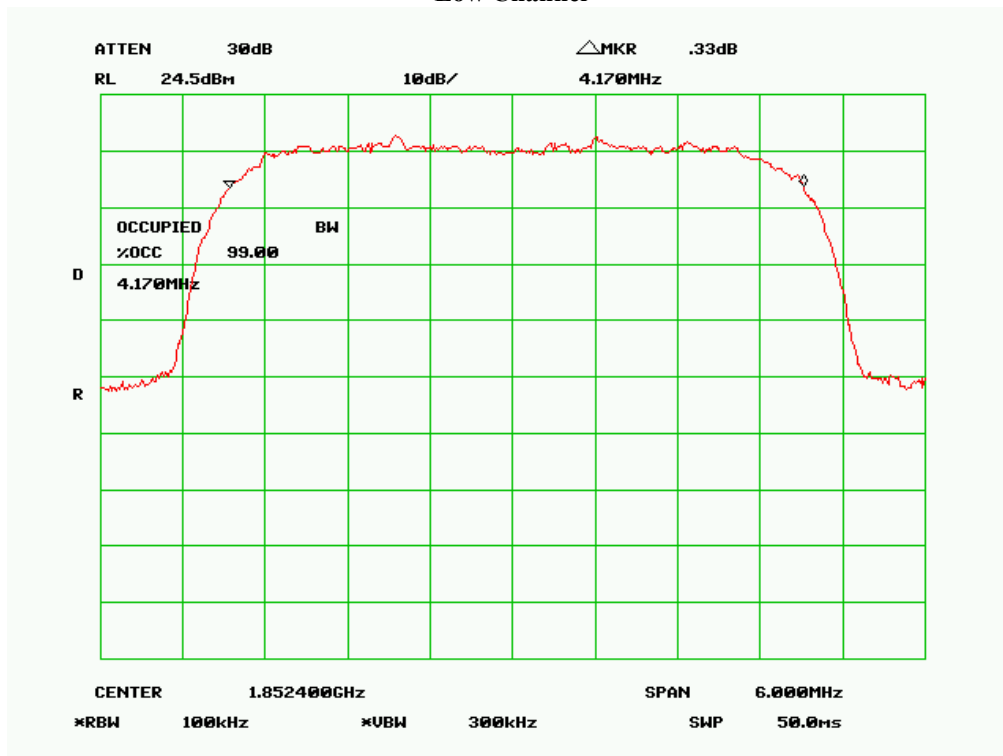


Middle Channel

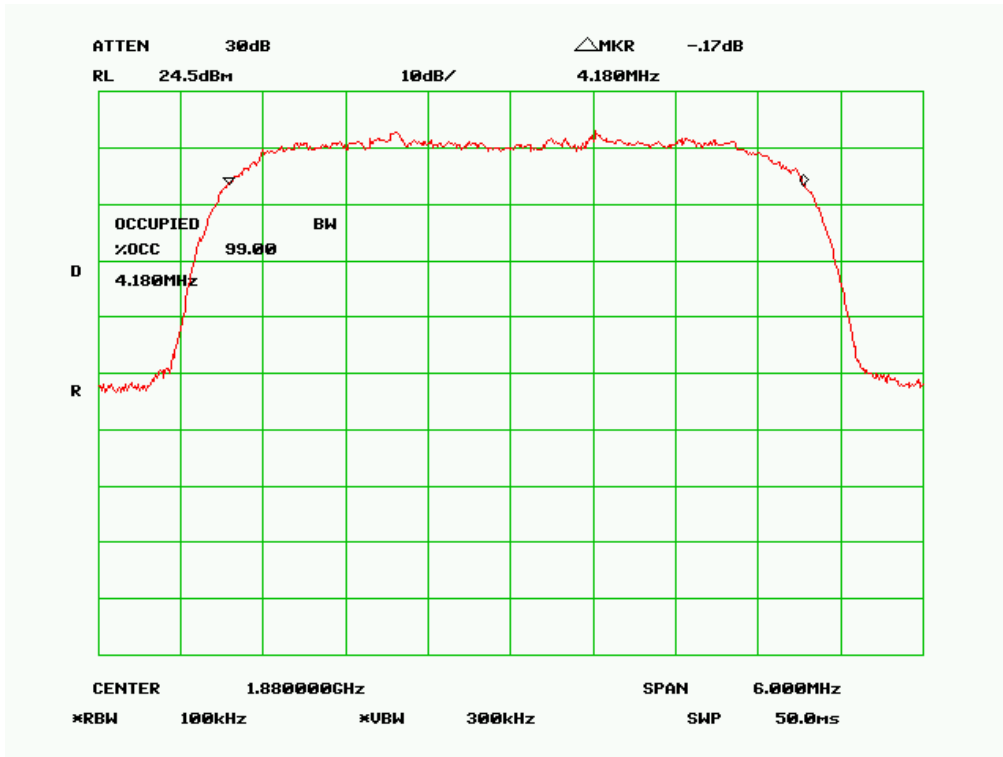


High Channel

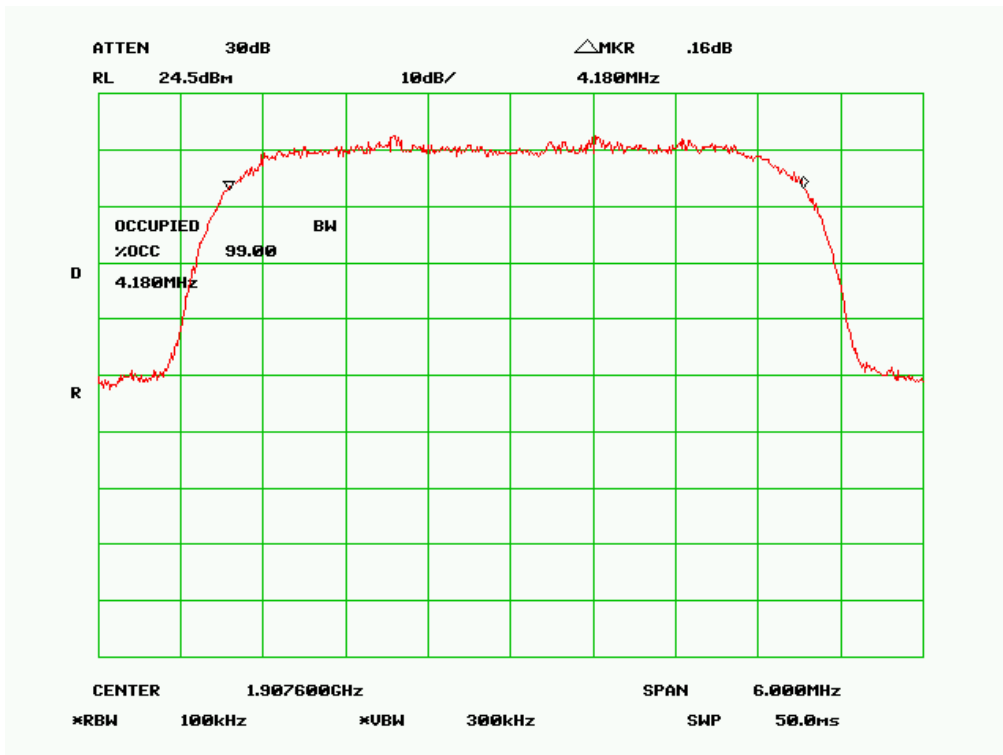


26 dB Bandwidth Low Channel

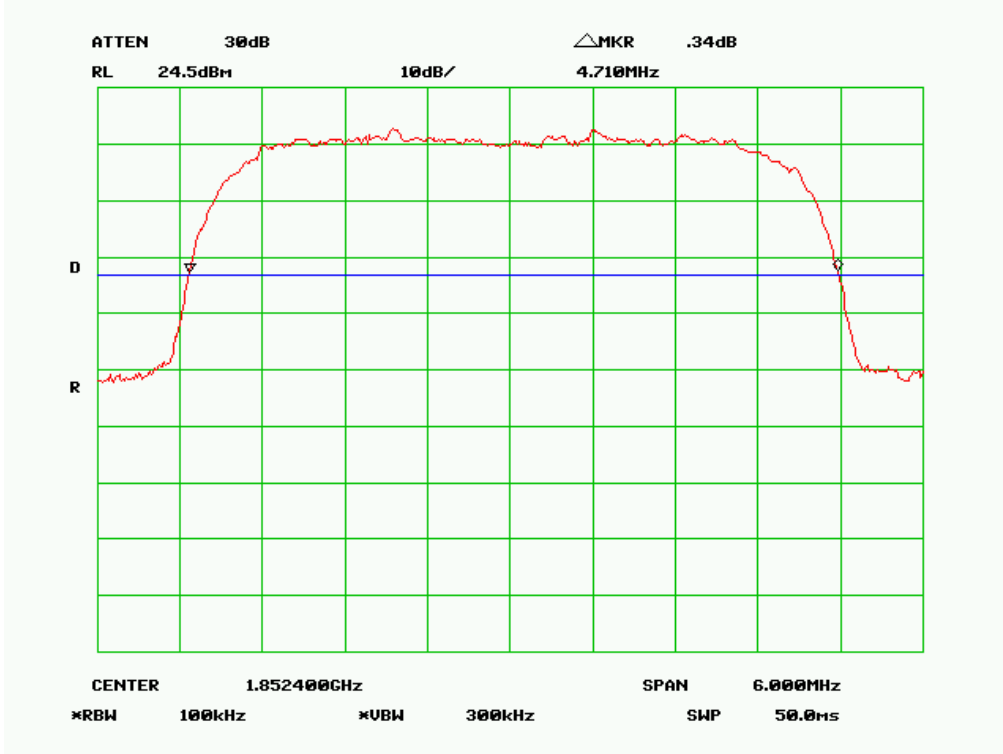

Middle Channel

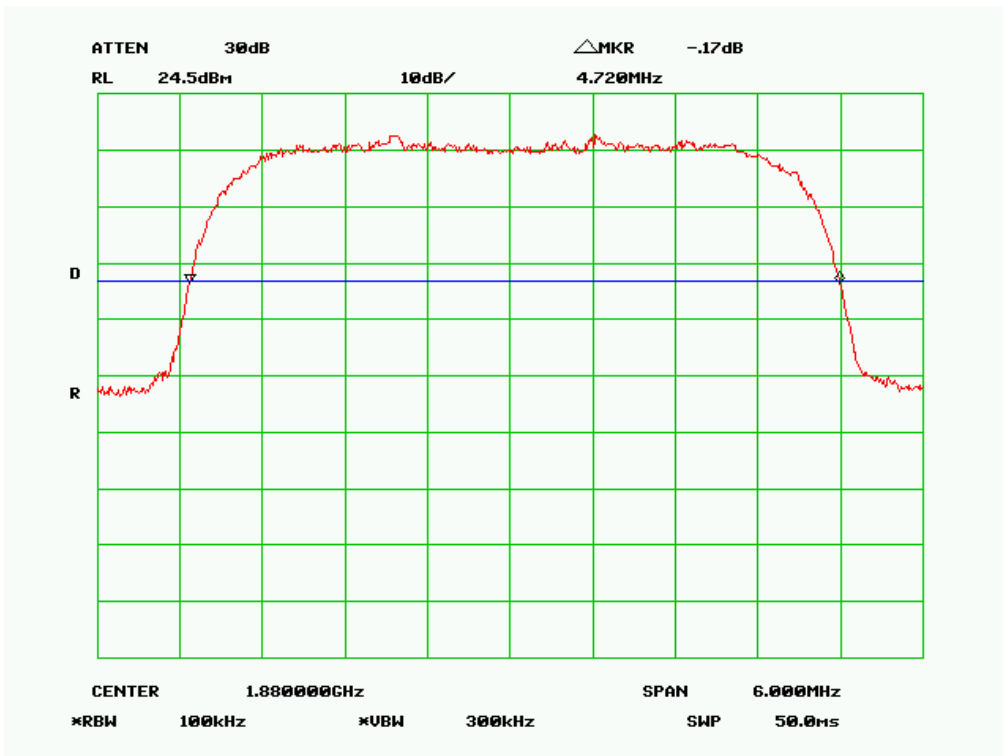

High Channel

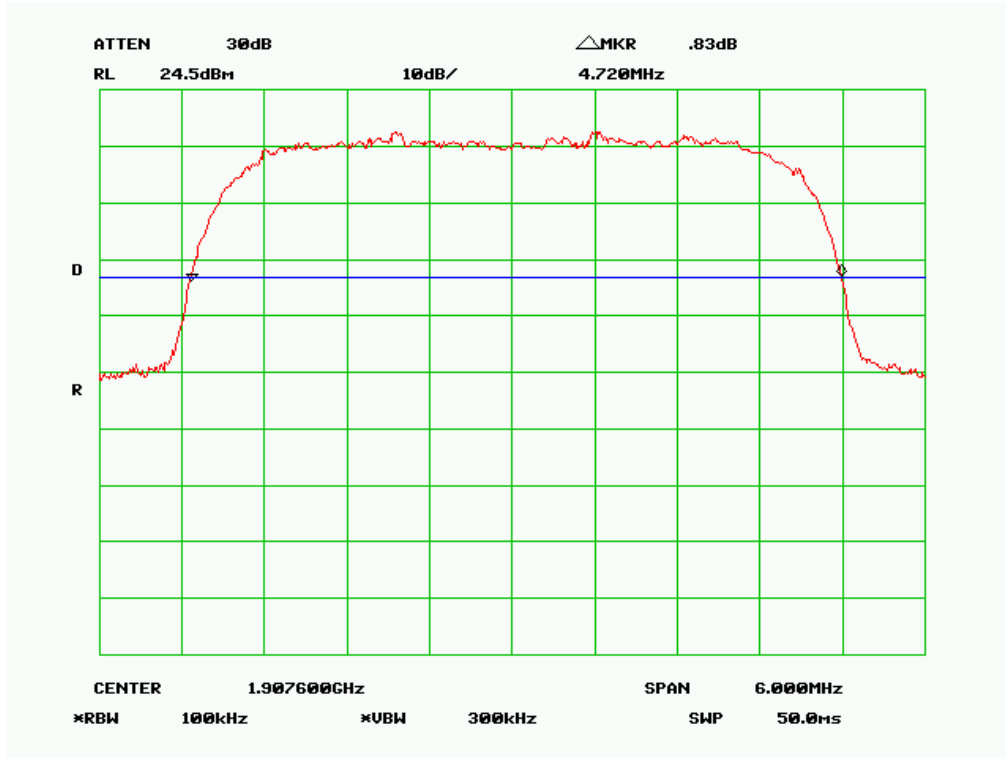

5.5 §2.1051, §22.917(a) & §24.238(a) - Spurious Emissions at Antenna Terminals

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.
3. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test date : May 20, 2013
Tested By : Deon Dai

Standard Requirement:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Procedures:

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.


Test Result: Pass

Refer to the attached plots.


Cellular Band (Part 22H)

30MHz-10G – GSM850


Low Channel

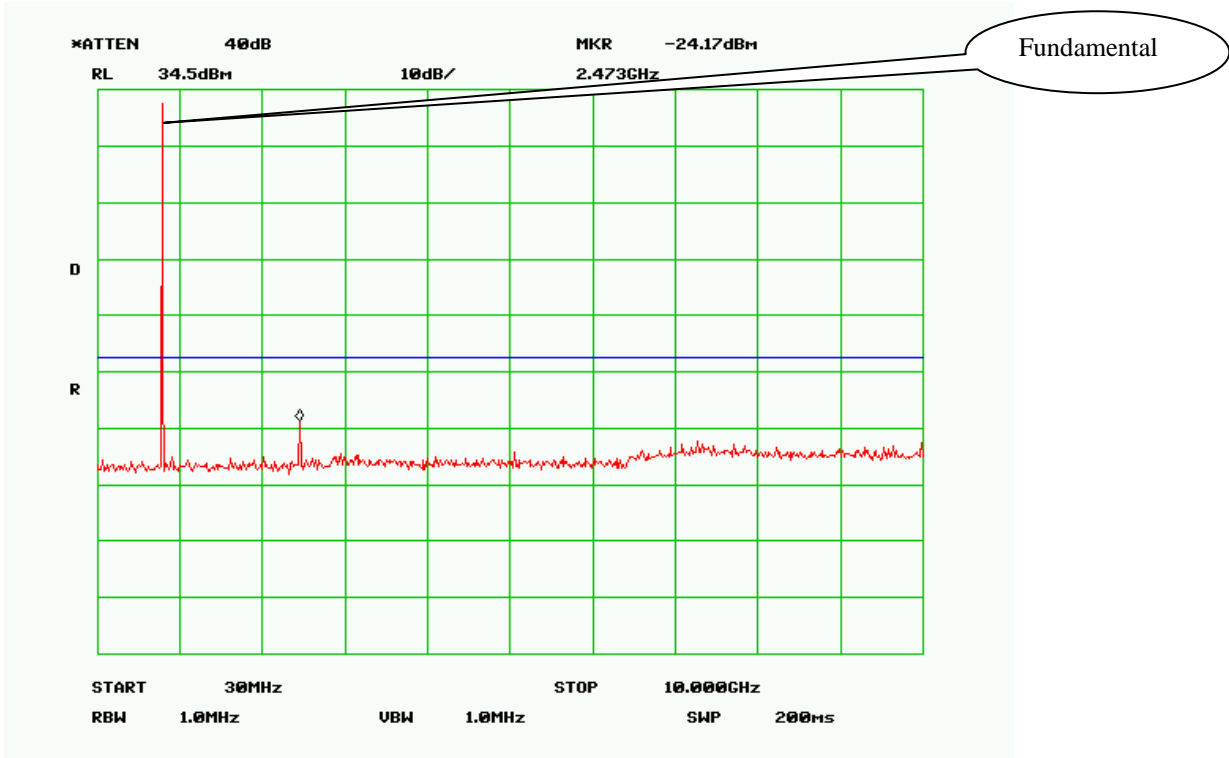

Middle Channel

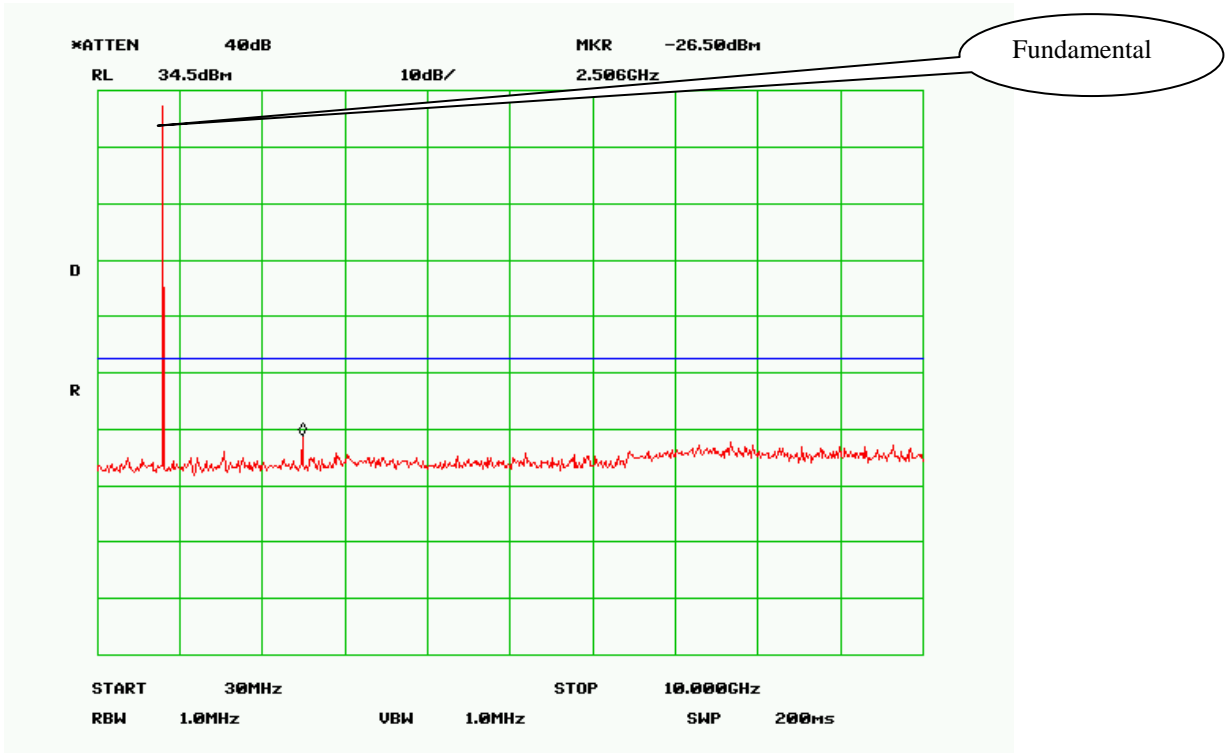


High Channel

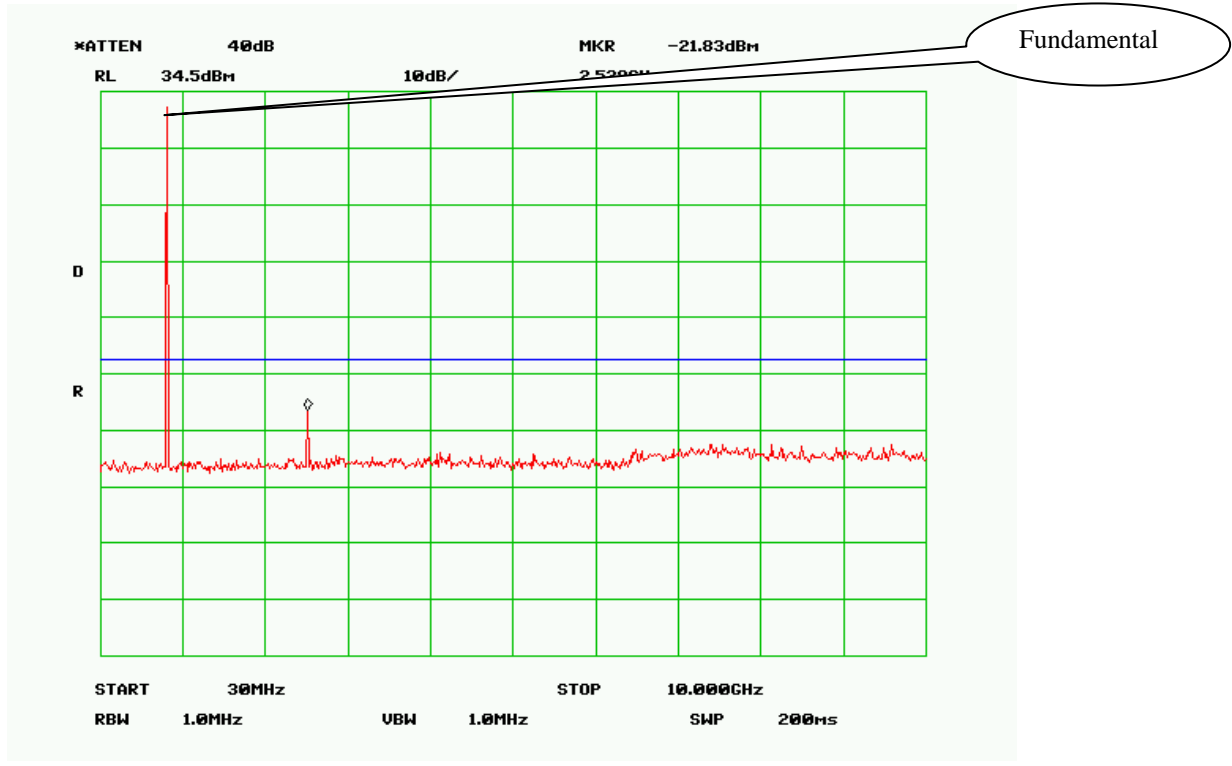


PCS Band (Part24E)

30MHz-20G – PCS1900

Low Channel

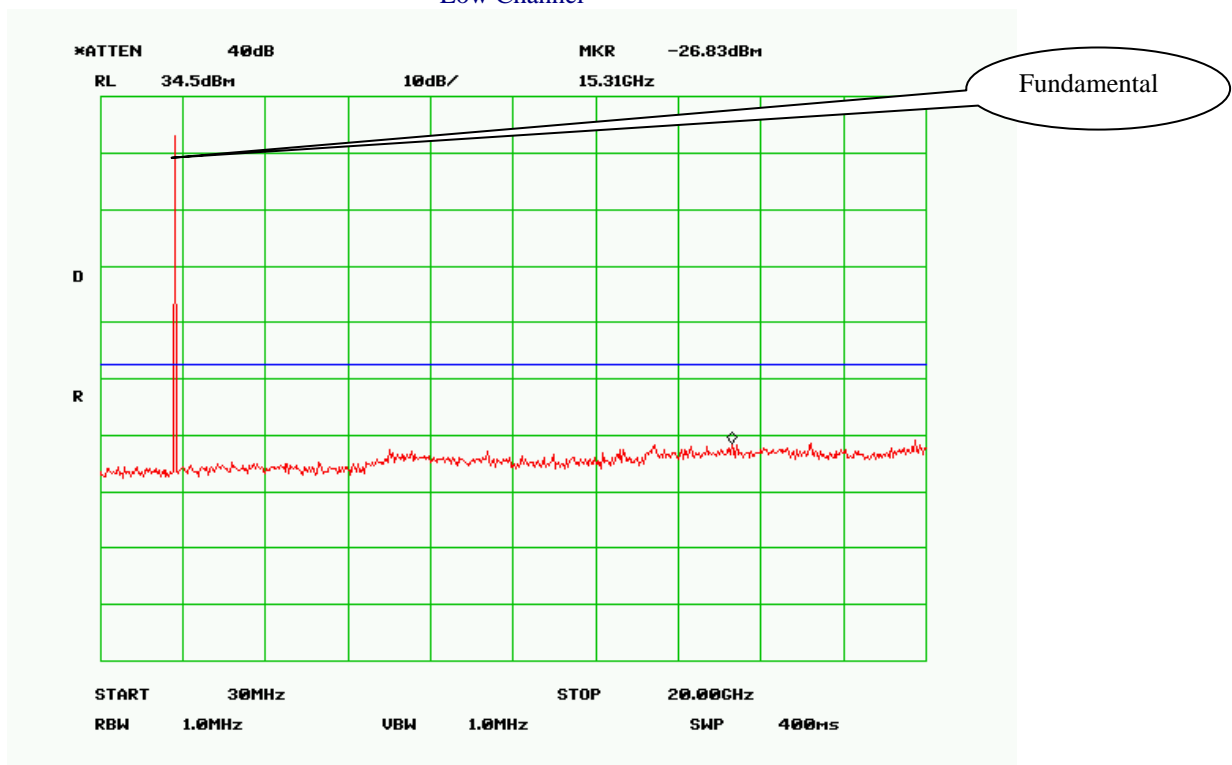


Middle Channel

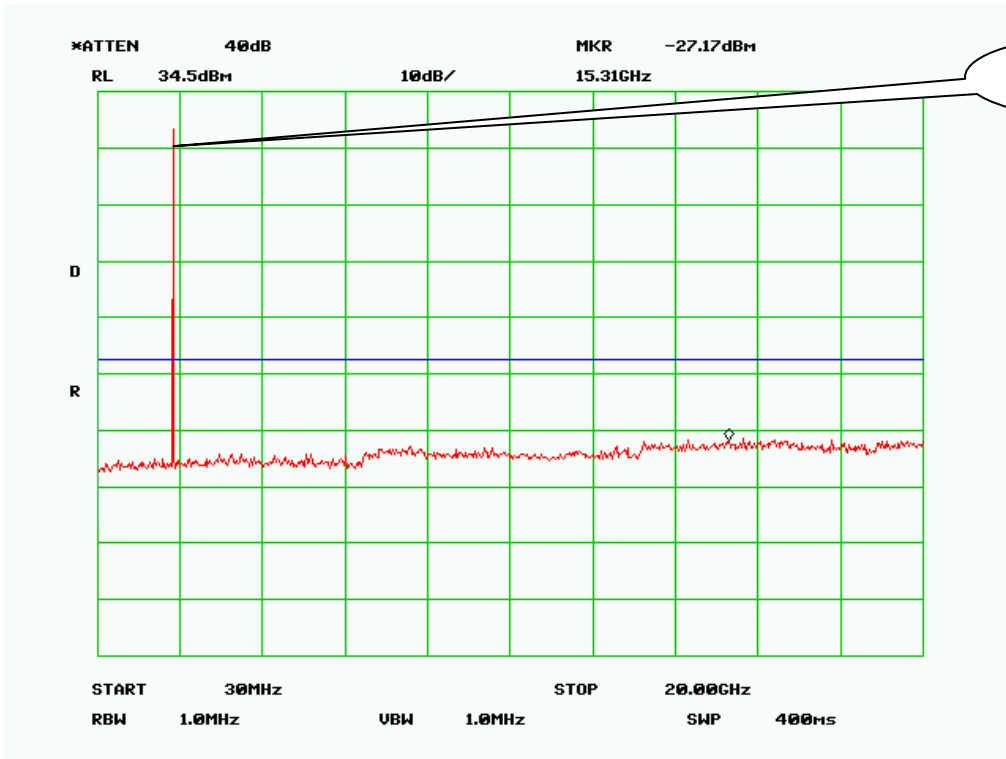

Fundamental

High Channel

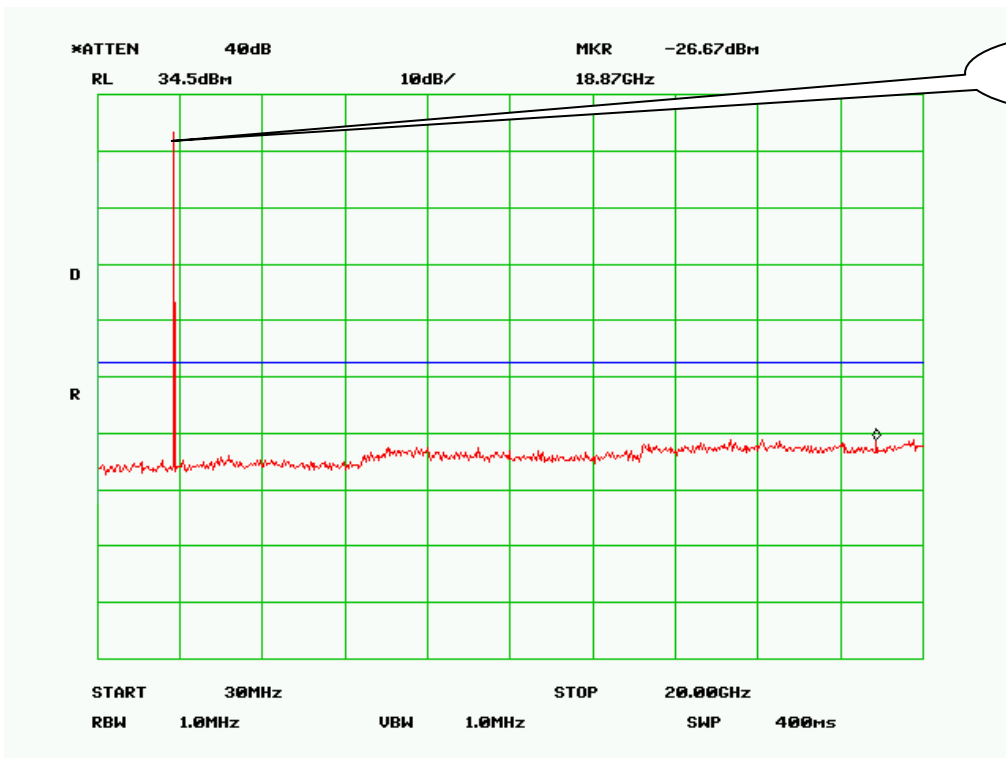


Fundamental


UMTS-FDD Band V (Part 22H)

30MHz-10G – WCDMA 850


Low Channel

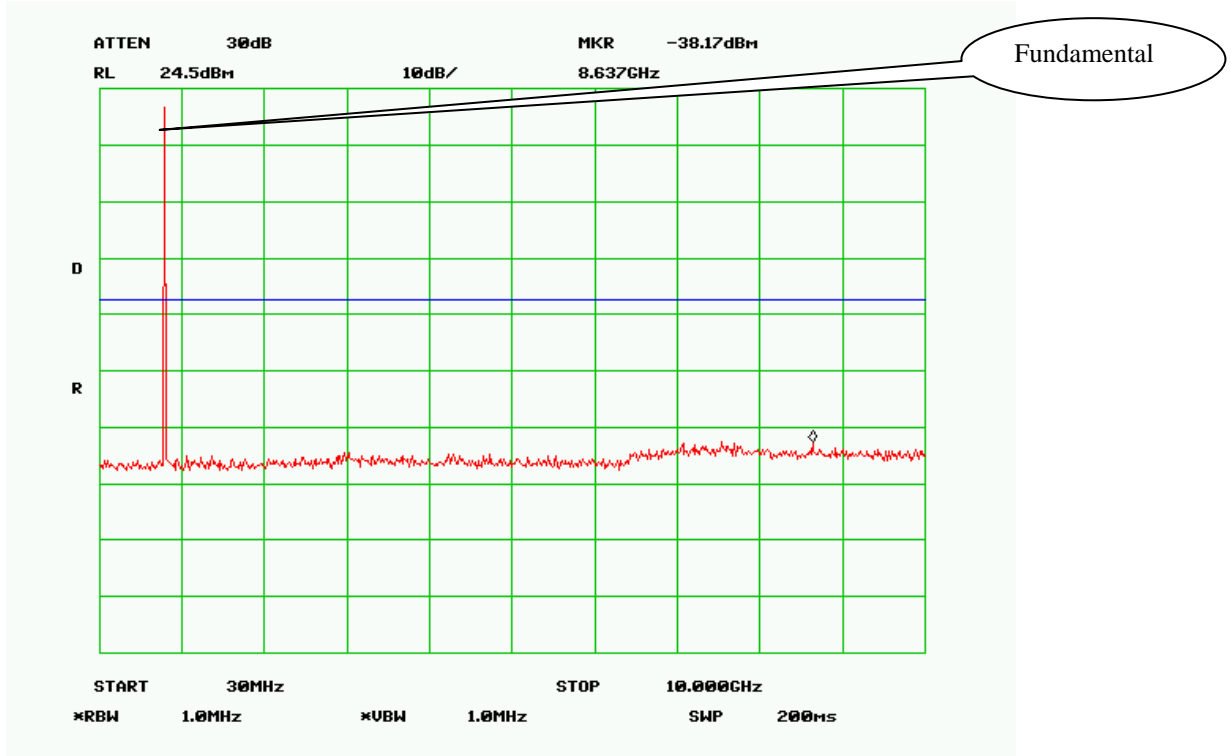

Middle Channel

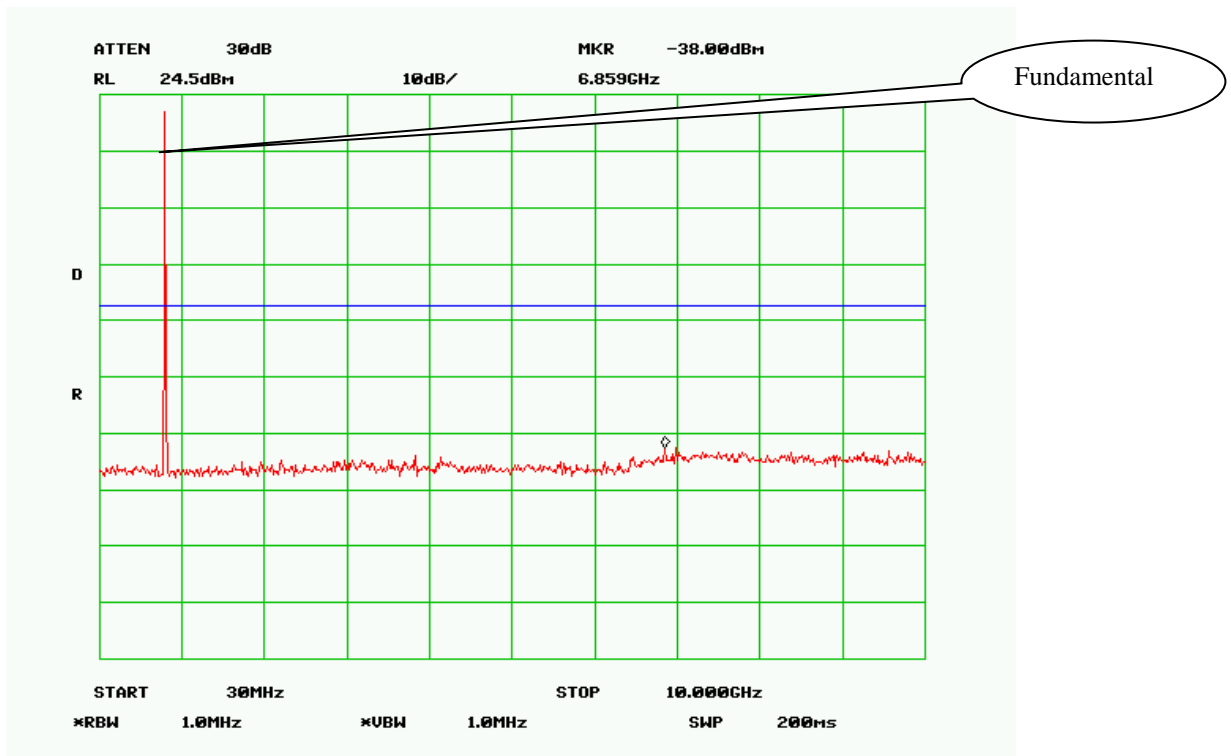


High Channel

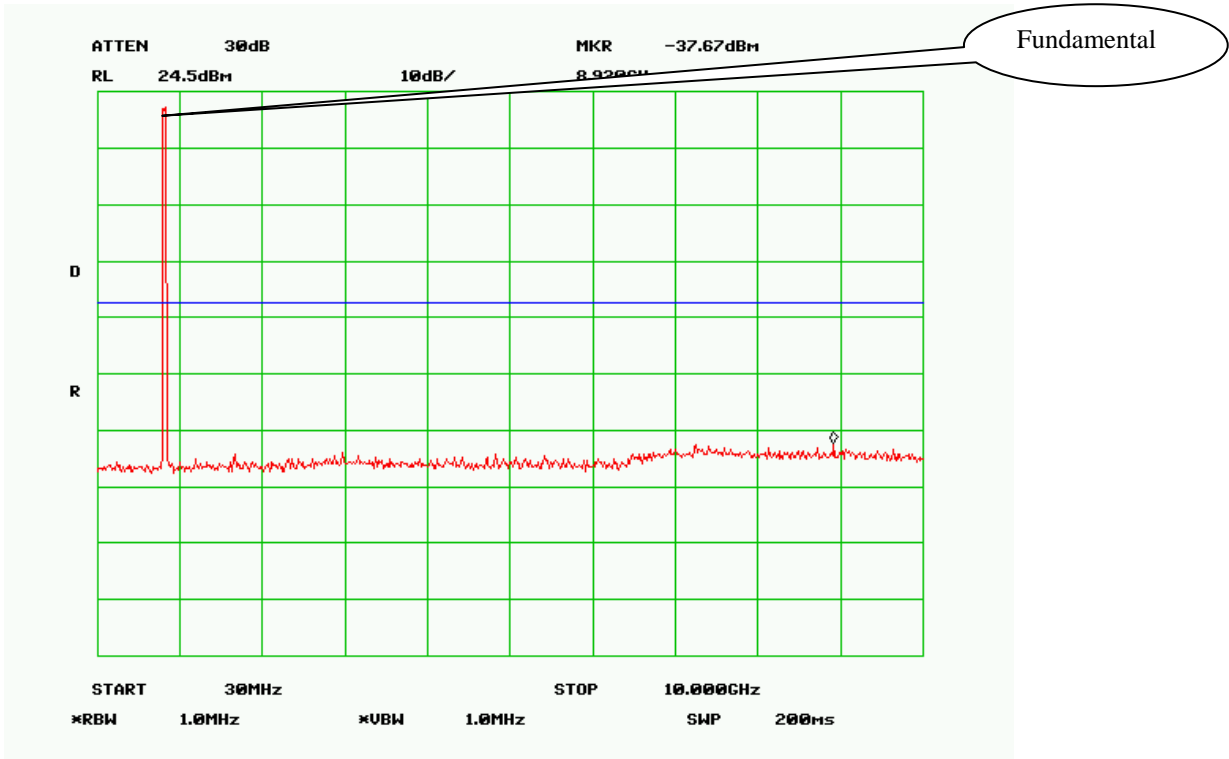


UMTS-FDD Band II (Part24E)

30MHz-25G – WCDMA1900


Low Channel

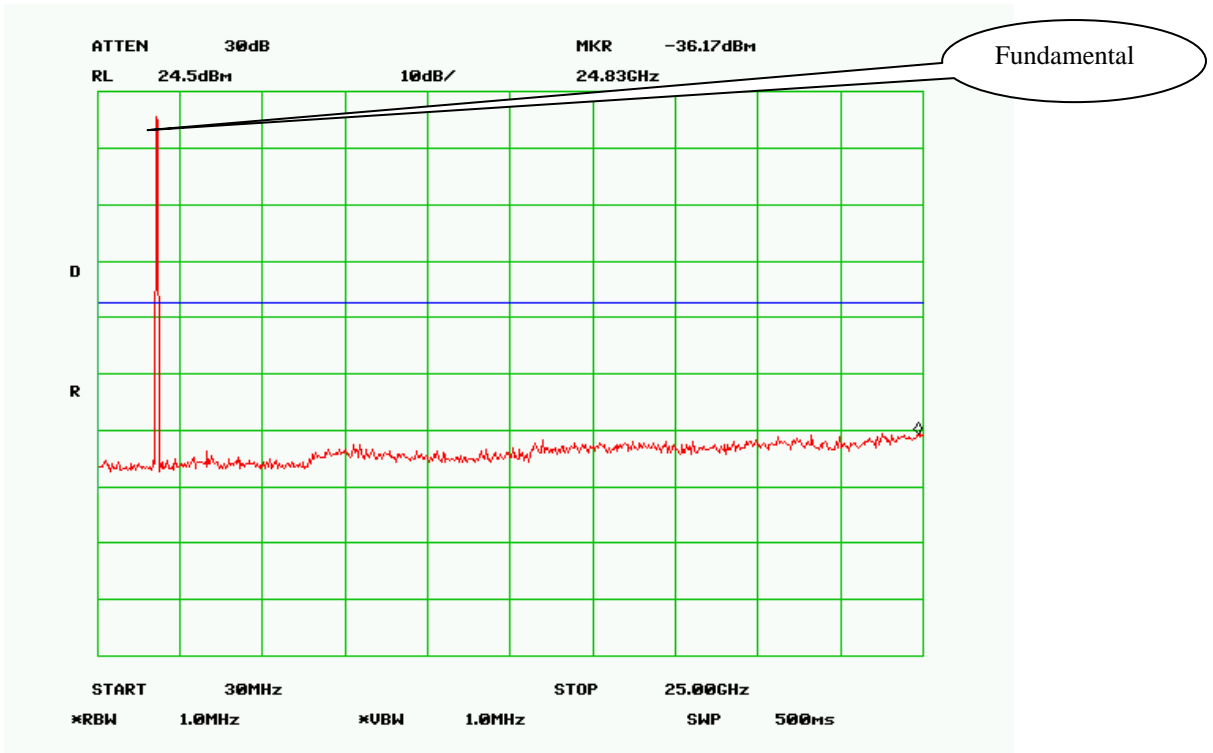

Middle Channel

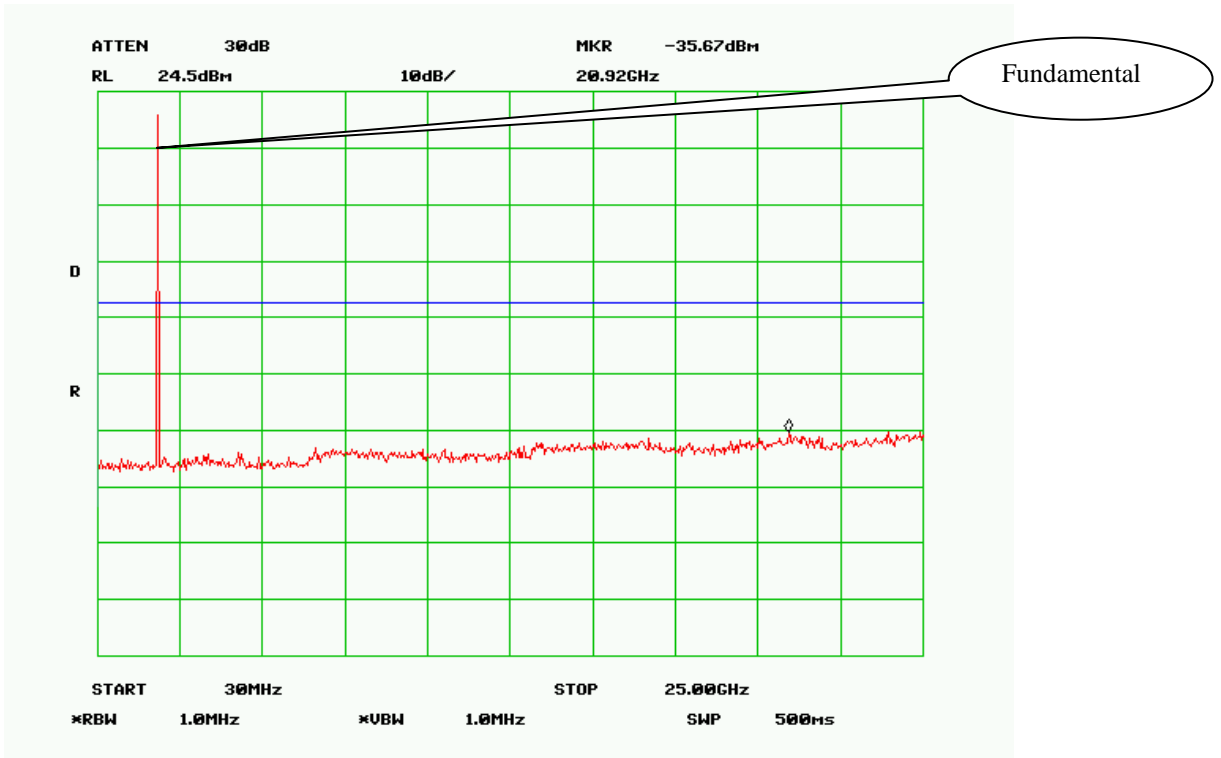

High Channel

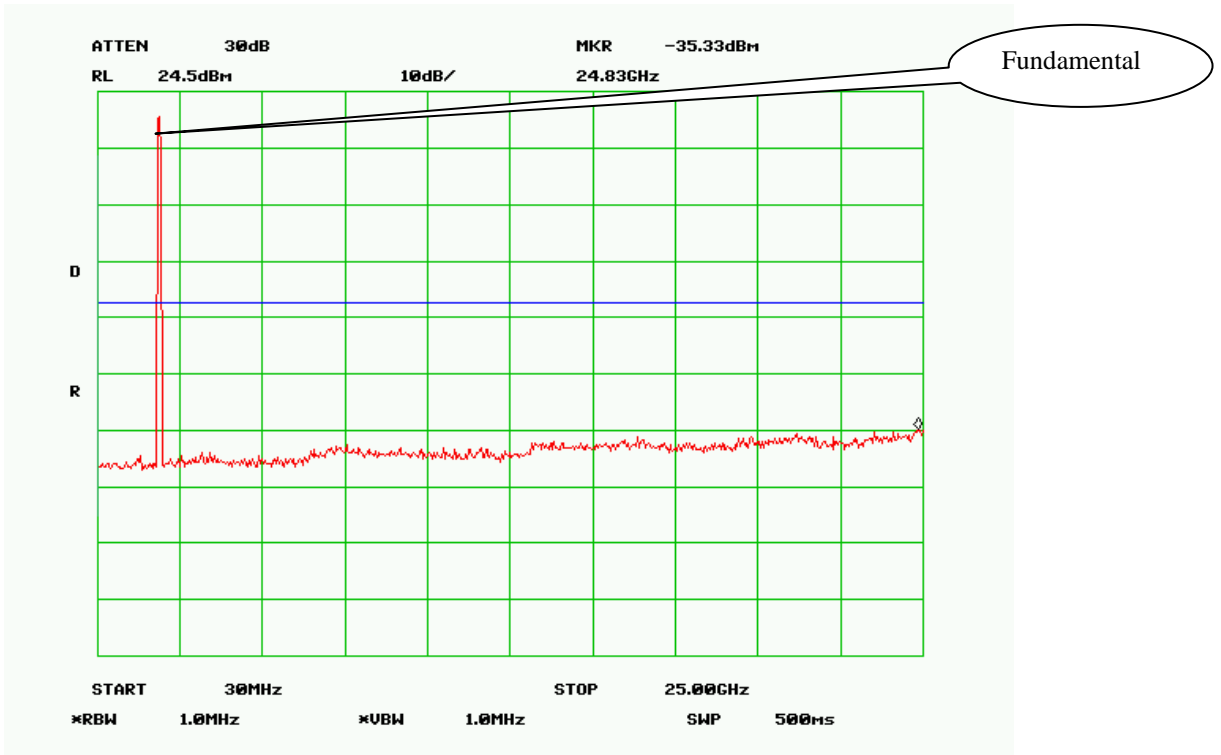

5.6 §2.1053, §22.917 & §24.238 - Spurious Radiated Emissions

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 1GHz – 40GH is $\pm 6.0\text{dB}$ (for EUTs < 0.5m X 0.5m X 0.5m).
4. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
5. Test date : May 20, 2013
Tested By : Deon Dai

Standard Requirement:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

Procedures:

Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 10Hz video bandwidth. The EUT was tested at low, mid and high with the highest output power. An emission was scan up to 10th harmonic of the operating frequency.

Sample Calculation:

EUT Field Strength = Raw Amplitude (dB μ V/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)

Test Result: Pass

Cellular Band (Part 22H)

Low channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-33.39	233	100	V	6.6	2.2	0	-28.99	-13	-15.99
1648.4	-39.45	145	200	H	6.6	2.2	0	-35.05	-13	-22.05
288.5	-43.25	322	110	V	5.3	1.17	0	-39.12	-13	-26.12
482.05	-49.63	99	199	H	5.9	1.34	0	-45.07	-13	-32.07

Middle channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-31.08	233	118	V	6.3	2.2	0	-26.98	-13	-13.98
1673.2	-35.48	360	200	H	6.3	2.2	0	-31.38	-13	-18.38
216.35	-46.91	132	100	V	5.7	1	0	-42.21	-13	-29.21
288.5	-47.92	121	210	H	5.3	1.17	0	-43.79	-13	-30.79

High channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-35.21	132	101	V	6.3	2.3	0	-31.21	-13	-18.21
1697.6	-37.44	311	201	H	6.3	2.3	0	-33.44	-13	-20.44
33.25	-49.33	208	110	V	-17.1	0.5	0	-66.93	-13	-53.93
216.36	-48.36	298	109	H	5.7	1	0	-43.66	-13	-30.66

PCS Band (Part 24E)

Low channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-36.32	11	120	V	5.6	3.1	0	-33.82	-13	-20.82
3700.4	-37.85	209	210	H	5.6	3.1	0	-35.35	-13	-22.35
85.32	-49.35	322	102	V	0.4	0.67	0	-49.62	-13	-36.62
98.33	-51.25	359	211	H	-0.1	0.67	0	-52.02	-13	-39.02

Middle channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-34.25	149	108	V	5.4	3.2	0	-32.05	-13	-19.05
3760	-36.82	360	129	H	5.4	3.2	0	-34.62	-13	-21.62
38.65	-47.14	222	110	V	-12.2	0.5	0	-59.84	-13	-46.84
99.24	-53.21	299	200	H	-0.1	0.67	0	-53.98	-13	-40.98

High channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-38.11	321	110	V	5.4	3.3	0	-36.01	-13	-23.01
3819.6	-41.35	256	210	H	5.4	3.3	0	-39.25	-13	-26.25
42.00	-46.38	199	132	V	-12.2	0.5	0	-59.08	-13	-46.08
98.36	-49.22	144	218	H	-0.1	0.67	0	-49.99	-13	-36.99

UMTS-FDD Band V (Part 22H)

Low channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1652.8	-30.65	0	110	V	6.6	2.2	0	-26.25	-13	-13.25
1652.8	-35.21	155	200	H	6.6	2.2	0	-30.81	-13	-17.81
216.35	-45.32	149	111	V	5.7	1	0	-40.62	-13	-27.62
488.04	-47.95	233	201	H	5.9	1.34	0	-43.39	-13	-30.39

Middle channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1670	-29.33	146	121	V	6.3	2.2	0	-25.23	-13	-12.23
1670	-31.25	188	199	H	6.3	2.2	0	-27.15	-13	-14.15
33.44	-43.32	285	118	V	-17.2	0.5	0	-61.02	-13	-48.02
216.39	-49.32	213	202	H	5.7	1	0	-44.62	-13	-31.62

High channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1693.2	-32.25	91	110	V	6.3	2.3	0	-28.25	-13	-15.25
1693.2	-34.39	329	220	H	6.3	2.3	0	-30.39	-13	-17.39
88.65	-47.11	149	108	V	1.4	0.67	0	-46.38	-13	-33.38
488.32	-49.32	231	180	H	5.9	1.34	0	-44.76	-13	-31.76

UMTS-FDD Band II (Part 24E)

Low channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3704.8	-31.22	56	130	V	5.6	3.1	0	-28.72	-13	-15.72
3704.8	-33.48	119	200	H	5.6	3.1	0	-30.98	-13	-17.98
83.65	-51.25	199	100	V	0.4	0.67	0	-51.52	-13	-38.52
99.11	-55.22	266	201	H	-0.1	0.67	0	-55.99	-13	-42.99

Middle channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-28.65	322	121	V	5.4	3.2	0	-26.45	-13	-13.45
3760	-30.25	55	211	H	5.4	3.2	0	-28.05	-13	-15.05
35.65	-48.63	145	105	V	-12.2	0.5	0	-61.33	-13	-48.33
98.14	-51.22	211	180	H	-0.1	0.67	0	-51.99	-13	-38.99

High channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3815.2	-33.39	360	100	V	5.4	3.3	0	-31.29	-13	-18.29
3815.2	-36.14	144	200	H	5.4	3.3	0	-34.04	-13	-21.04
39.65	-49.65	211	110	V	-12.2	0.5	0	-62.35	-13	-49.35
98.36	-52.38	0	200	H	-0.1	0.67	0	-53.15	-13	-40.15

5.7 §22.917(a) & §24.238(a) - Band Edge

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions
Temperature 23°C
Relative Humidity 50%
Atmospheric Pressure 1019mbar
4. Test date : May 20 to May 21, 2013
Tested By : Deon Dai

Standard Requirement:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Procedures:

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.

Test Result: Pass

Refer to the attached plots.

Cellular Band (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9825	-13.58	-13
849.0200	-13.24	-13

PCS Band (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9950	-15.77	-13
1910.0025	-16.13	-13


UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
824.000	-26.71	-13
849.100	-27.29	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1850.000	-27.92	-13
1910.000	-24.91	-13


Cellular Band, Low Channel

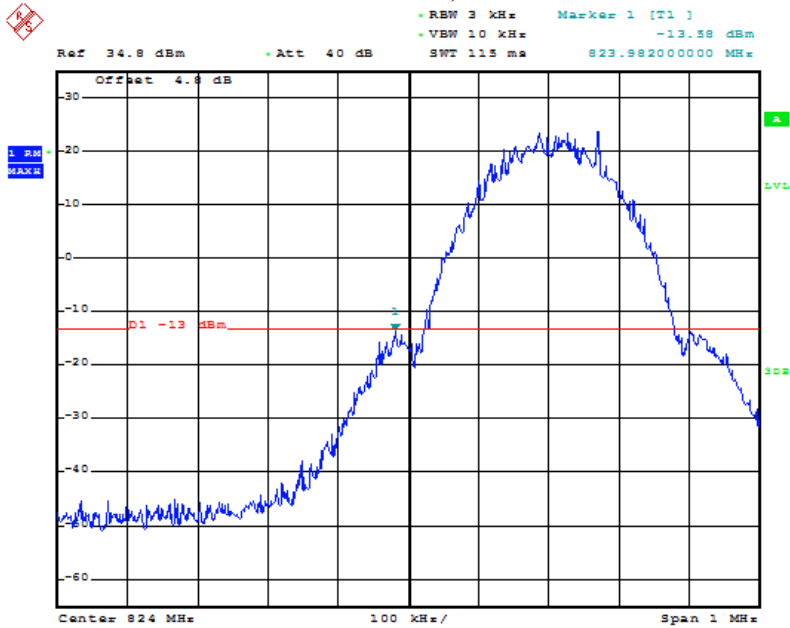

Date: 20.MAY.2013 17:28:39

Note: Offset=Cable loss (4.0) + 10log (3.17/3)=4.0+0.24=4.24 dB


Cellular Band, High Channel

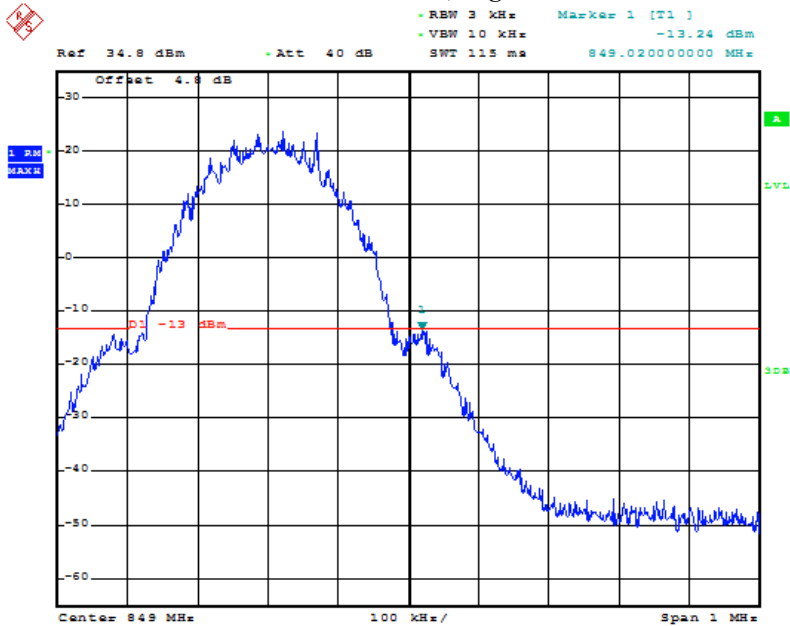

Date: 20.MAY.2013 17:30:07

Note: Offset=Cable loss (4.0) + 10log (3.16/3)=4.0+0.23=4.23 dB


PCS Band, Low Channel

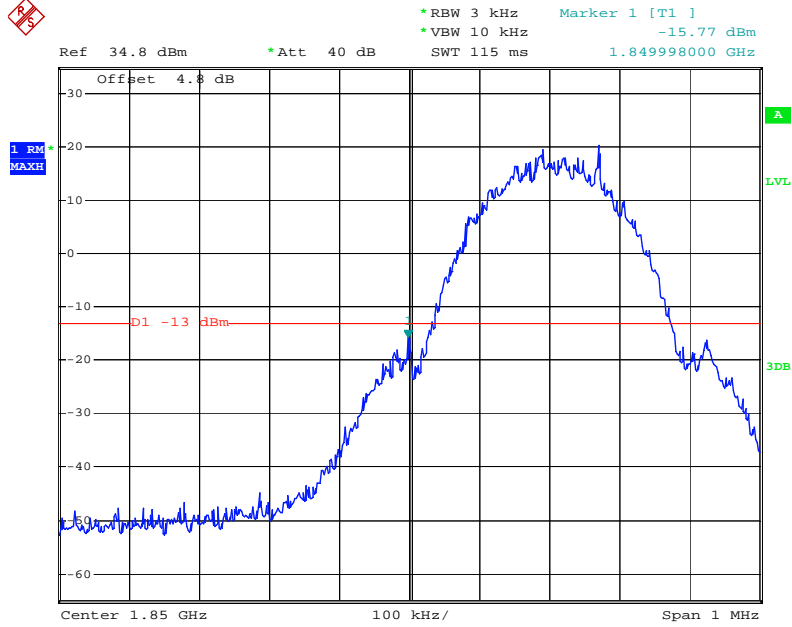

Date: 20.MAY.2013 17:31:58

Note: Offset=Cable loss (4.5) + 10log (3.22/3)=4.5+0.31=4.81 dB


PCS Band, High Channel

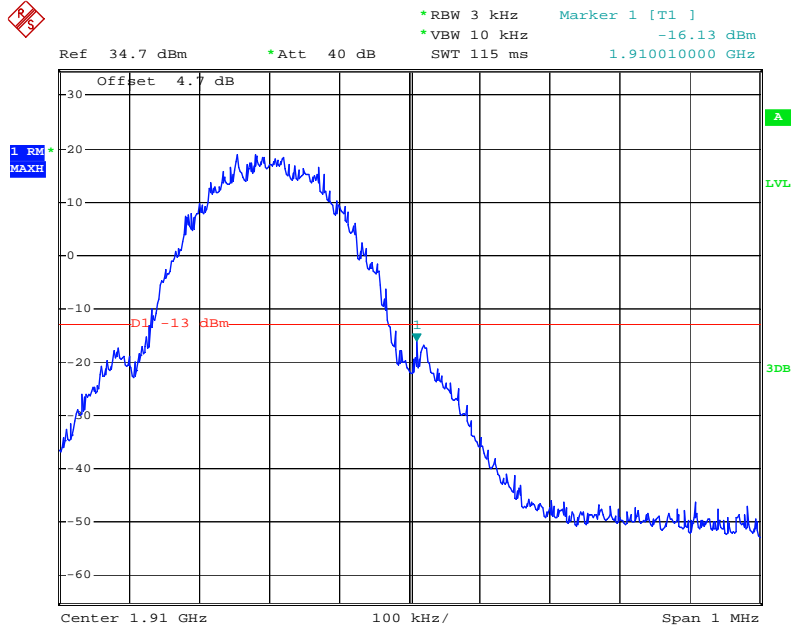

Date: 20.MAY.2013 17:33:30


Note: Offset=Cable loss (4.5) + 10log (3.24/3)=4.5+0.33=4.83 dB

UMTS-FDD Band V, Low Channel

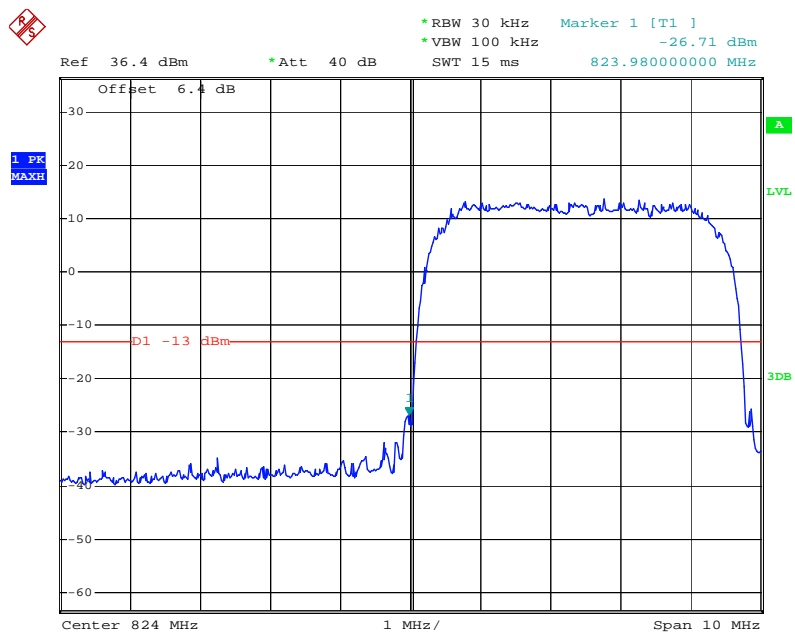


Date: 21.MAY.2013 09:18:02

UMTS-FDD Band V, High Channel

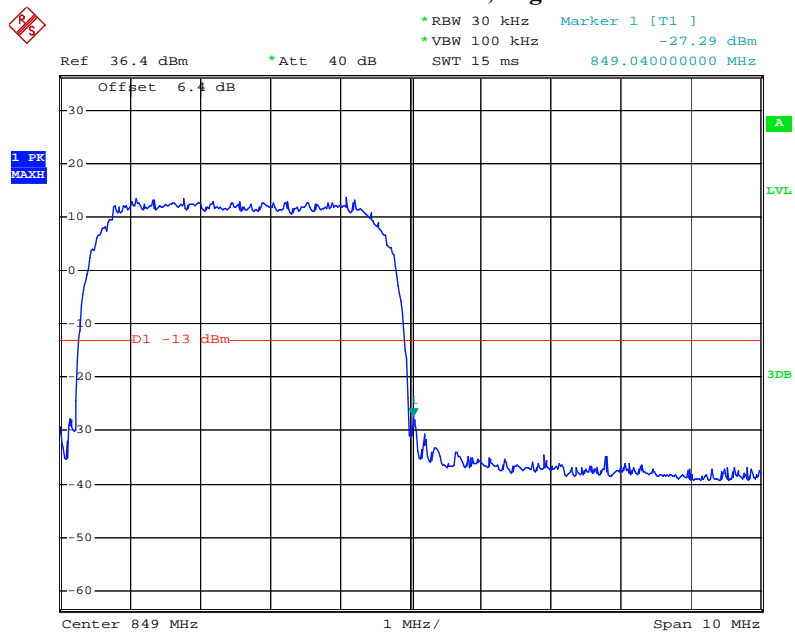


Date: 21.MAY.2013 09:19:11

UMTS-FDD Band II, Low Channel

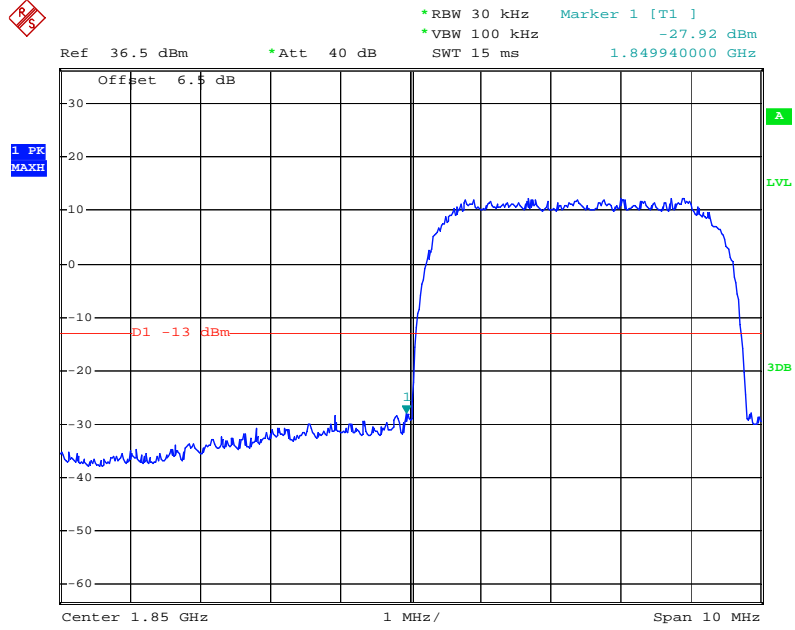

Date: 21.MAY.2013 09:21:59

UMTS-FDD Band II, High Channel

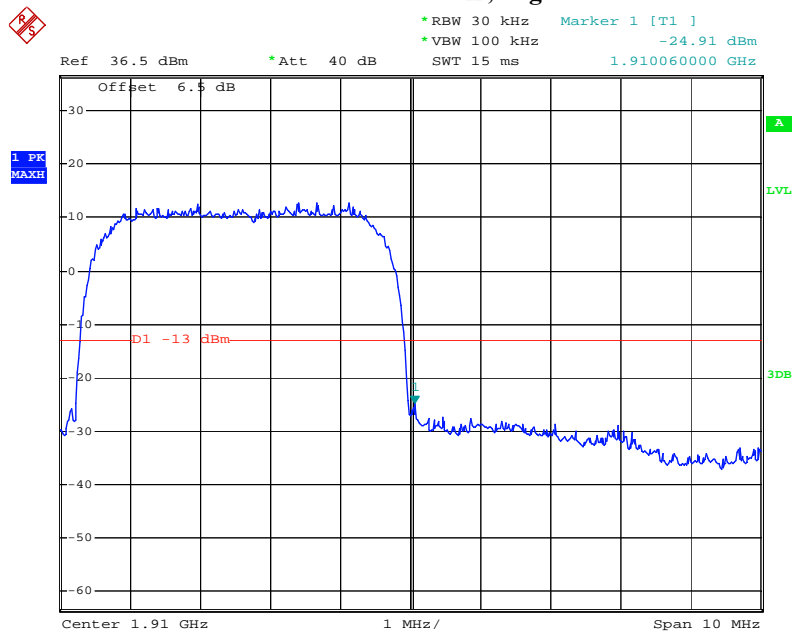

Date: 21.MAY.2013 09:20:57

5.8 §2.1055, §22.355 & §24.235 - Frequency Stability

- | | | | |
|----|--------------------------|----------------------|----------|
| 1. | Environmental Conditions | Temperature | 23°C |
| | | Relative Humidity | 50% |
| | | Atmospheric Pressure | 1019mbar |
| 2. | Test date : May 20, 2013 | | |
| | Tested By : Deon Dai | | |

Standard Requirement:

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.

Procedures:

A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.

Limit: The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

Test Results: Pass

Frequency Stability versus Temperature: The Frequency tolerance of the carrier signal shall be maintained within 2.5ppm of the operating frequency over a temperature variation of -10°C to +55°C at normal supply voltage.

Cellular Band (Part 22H)

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	15	0.0179	2.5
0		18	0.0215	2.5
10		21	0.0251	2.5
20		23	0.0275	2.5
30		24	0.0287	2.5
40		20	0.0239	2.5
50		30	0.0359	2.5
55		33	0.0394	2.5
25	4.2	21	0.0251	2.5
	3.5	23	0.0275	2.5

PCS Band (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	16	0.0085	2.5
0		25	0.0133	2.5
10		30	0.0160	2.5
20		22	0.0117	2.5
30		35	0.0186	2.5
40		32	0.0170	2.5
50		19	0.0101	2.5
55		15	0.0080	2.5
25	4.2	22	0.0117	2.5
	3.5	26	0.0138	2.5

UMTS-FDD Band V (Part 22H)

Middle Channel, $f_0 = 835$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	8	0.0096	2.5
0		12	0.0144	2.5
10		11	0.0132	2.5
20		10	0.0120	2.5
30		13	0.0156	2.5
40		22	0.0263	2.5
50		17	0.0204	2.5
55		18	0.0216	2.5
25	4.2	19	0.0228	2.5
	3.5	16	0.0192	2.5

UMTS-FDD Band II (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	6	0.0032	2.5
0		-2	-0.0011	2.5
10		8	0.0043	2.5
20		-5	-0.0027	2.5
30		10	0.0053	2.5
40		9	0.0048	2.5
50		6	0.0032	2.5
55		11	0.0059	2.5
25	4.2	8	0.0043	2.5
	3.5	-3	-0.0016	2.5

Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Model	Serial #	Calibration Date	Calibration Due Date
RF conducted test				
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	CFG038	10/25/2012	10/24/2013
Power Splitter	1#	1#	02/02/2013	02/01/2014
Universal Radio Communication Tester	CMU200	121393	02/22/2013	02/21/2014
Temperature/Humidity Chamber	1007H	N/A	01/08/2013	01/07/2014
DC Power Supply	PS-305D	010943059	02/22/2013	02/21/2014
Radiated Emissions				
Hp Spectrum Analyzer	8563E	3821A09023	01/10/2013	01/09/2014
R&S EMI Receiver	ESPI3	101216	10/27/2012	10/26/2013
Antenna (30MHz~6GHz)	JB6	A121411	03/27/2013	03/26/2014
ETS-Lindgren Antenna(1 ~18GHz)	3115	N/A	10/29/2012	10/28/2013
A- INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	06/25/2012	06/24/2013
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2013	04/22/2014
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/30/2012	05/29/2013
Hp Agilent Pre-Amplifier	8447F	1937A01160	11/03/2012	11/02/2013
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	AMF-7D-00101800-30-10P	1451710	11/03/2012	11/02/2013
Universal Radio Communication Tester	CMU200	104031	10/27/2012	10/26/2013
Chamber	3m	N/A	04/13/2013	04/12/2014

Annex A. ii. RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 1GHz (for FCC tests, until the 10th harmonic for operating frequencies ≥ 108 MHz), was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m or 10m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS) or EMC 3m chamber.

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

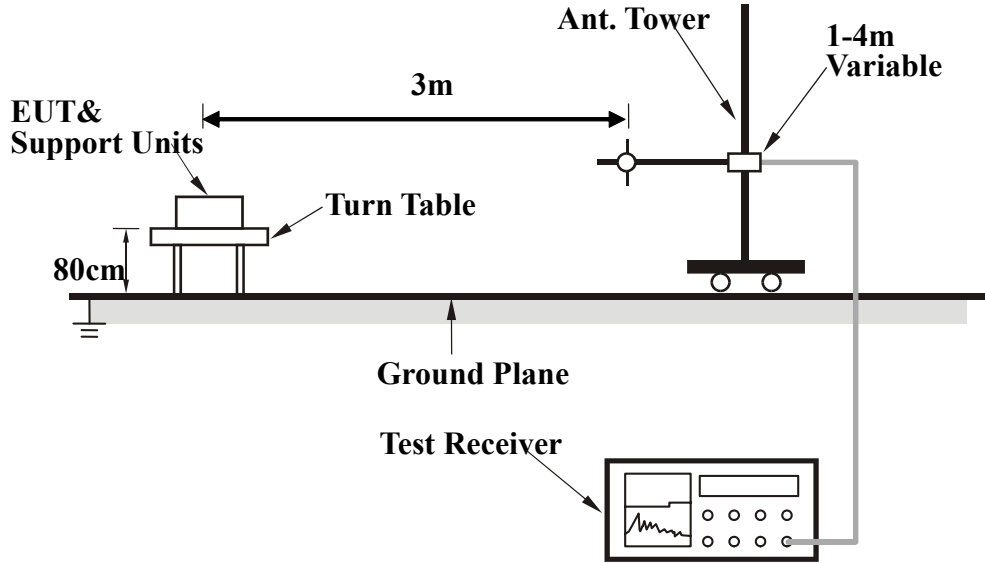

Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site or EMC 10m chamber. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Description of Radiated Emission Program

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the scan on four different antenna heights, 2 antenna polarity, and 360 degrees table rotation. For example, the program was set to run 30 MHz to 1 GHz scan; the program will first start from a meter antenna height and divide the 30 MHz to 1 GHz into 10 separate parts of maximum hold sweeps. Each parts of maximum hold sweep, the program will collect the data from 0 degree to 360 degrees table rotation. After the program complete the 1m scan, the antenna continues to rise to 2m and continue the scan. The step will repeated for all specified antenna height and polarity. This program will perform the Quasi Peak measurement after the signal maximization process and pre-scan routine. The final measurement will be base on the pre-scan data reduction result.

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor or}$$

$$\text{Set RBW} = 1\text{MHz, VBW} = 10\text{Hz.}$$

Note:

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.

Annex B. EUT AND TEST SETUP PHOTOGRAPHS

Annex B.i. Photograph 1: EUT External Photo



Whole Package - Top View



EUT - Front View



EUT - Rear View



EUT - Top View



EUT - Bottom View



EUT - Left View




EUT - Right View

Annex B.ii. Photograph 2: EUT Internal Photo



Cover Off - Top View 2

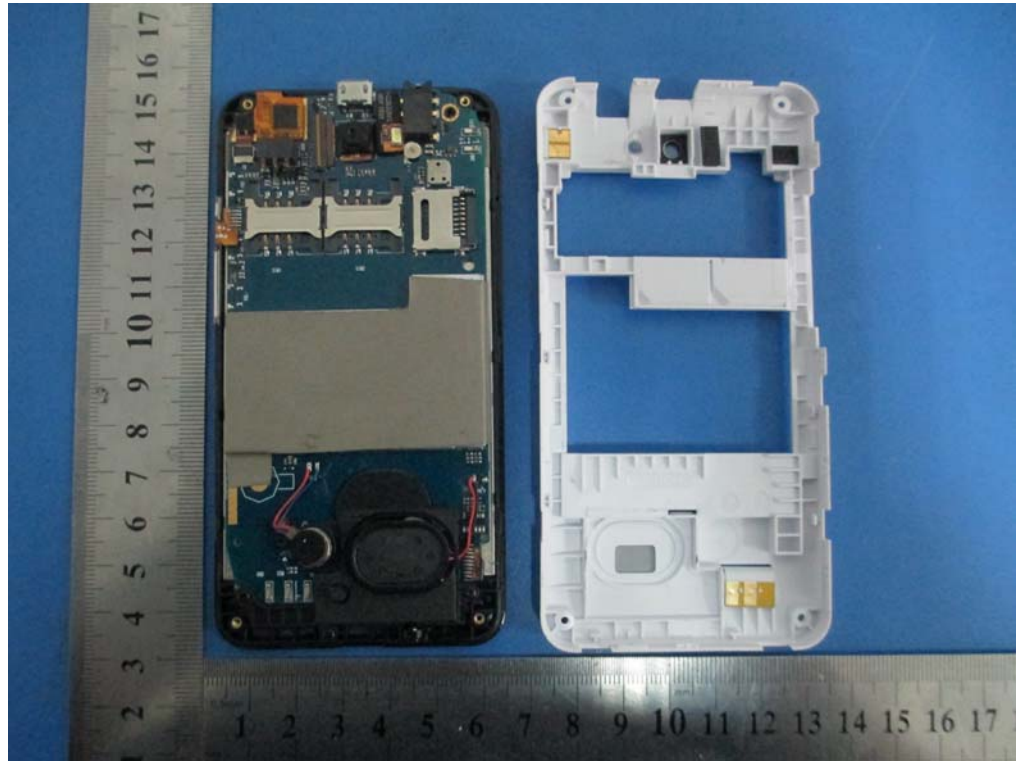

Cover Off - Top View 2




Battery - Top View




Battery - Bottom View




LCD - Top View

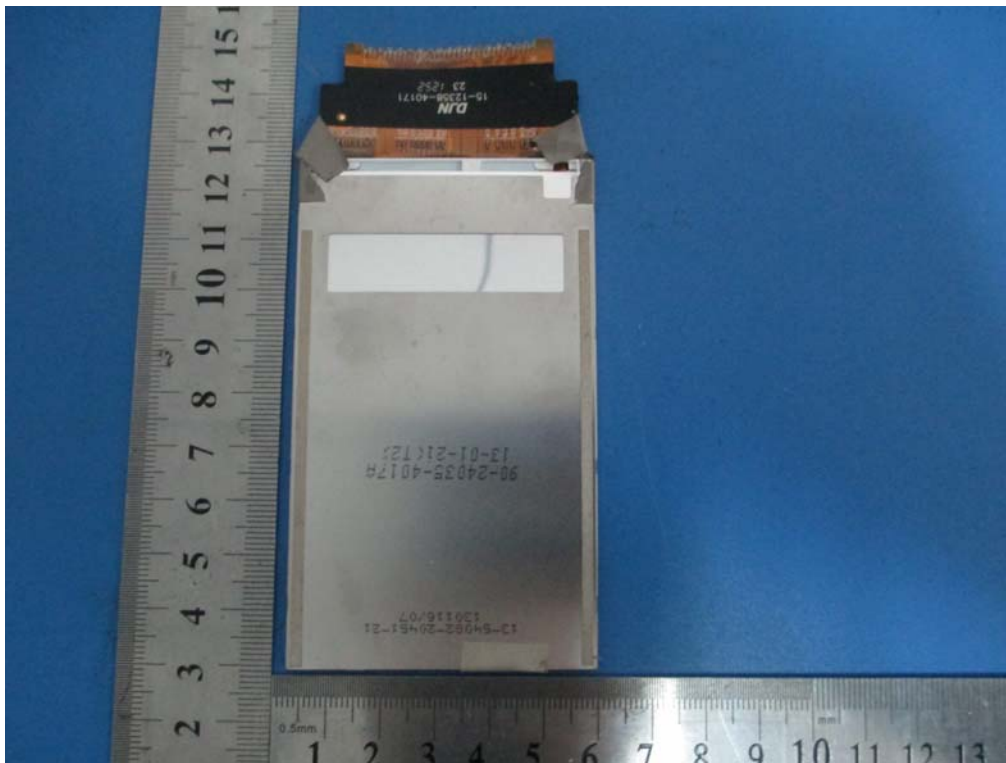


LCD - Bottom View

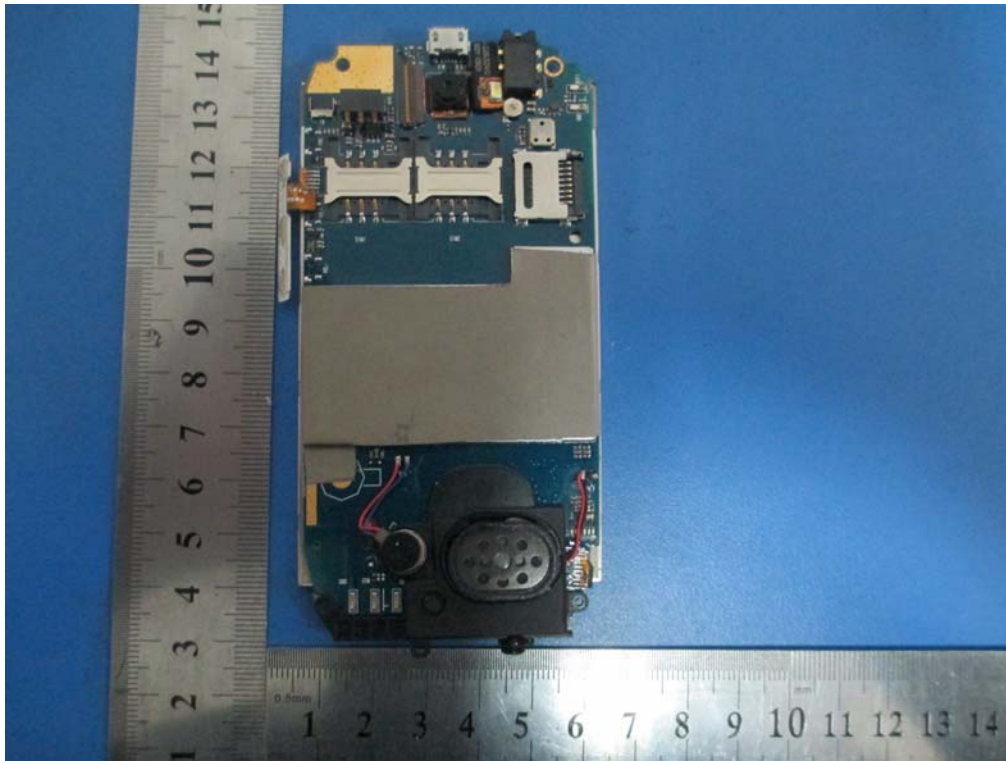


Uncover - Top View

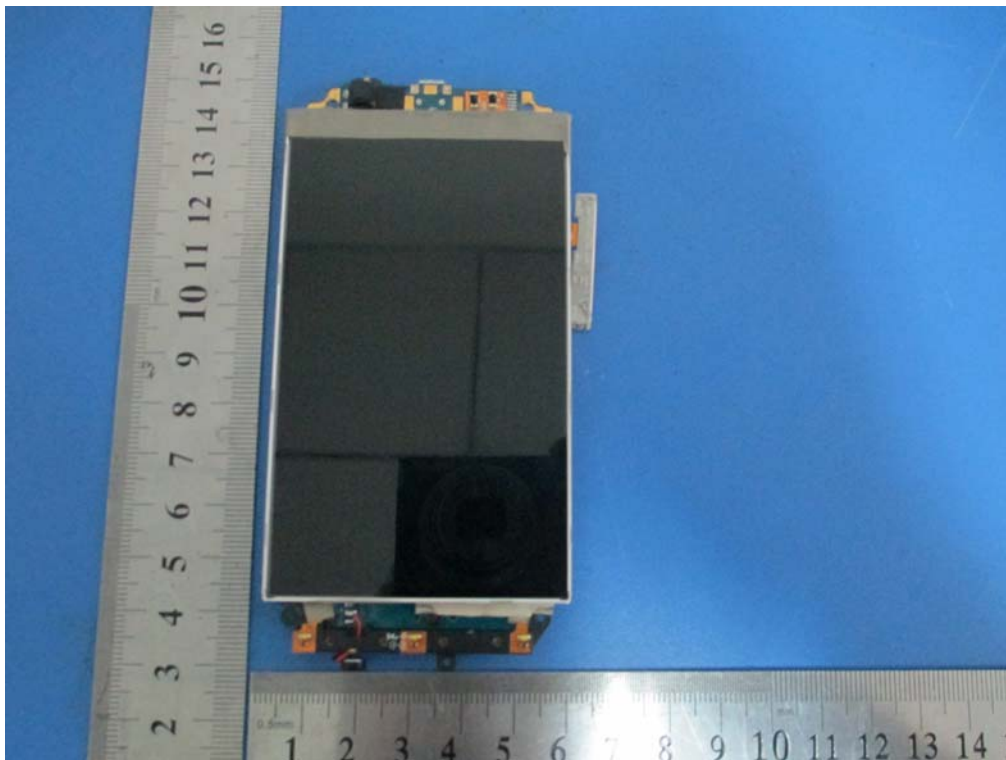


Uncover without LCD - Top View

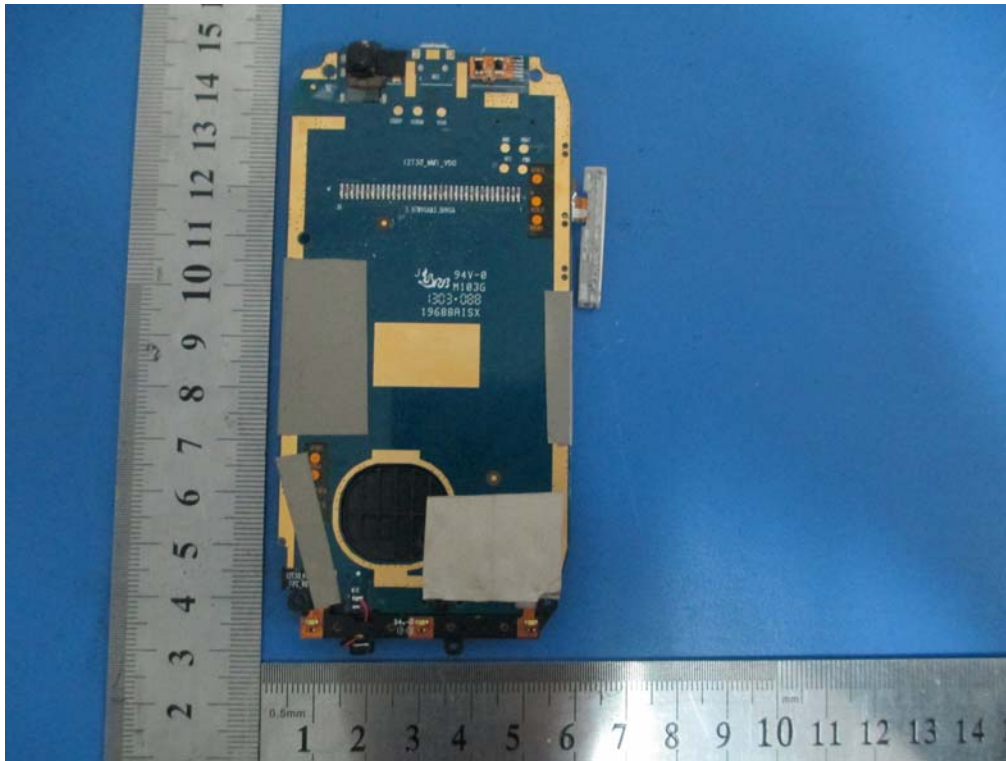

Uncover Without LCD - Top View

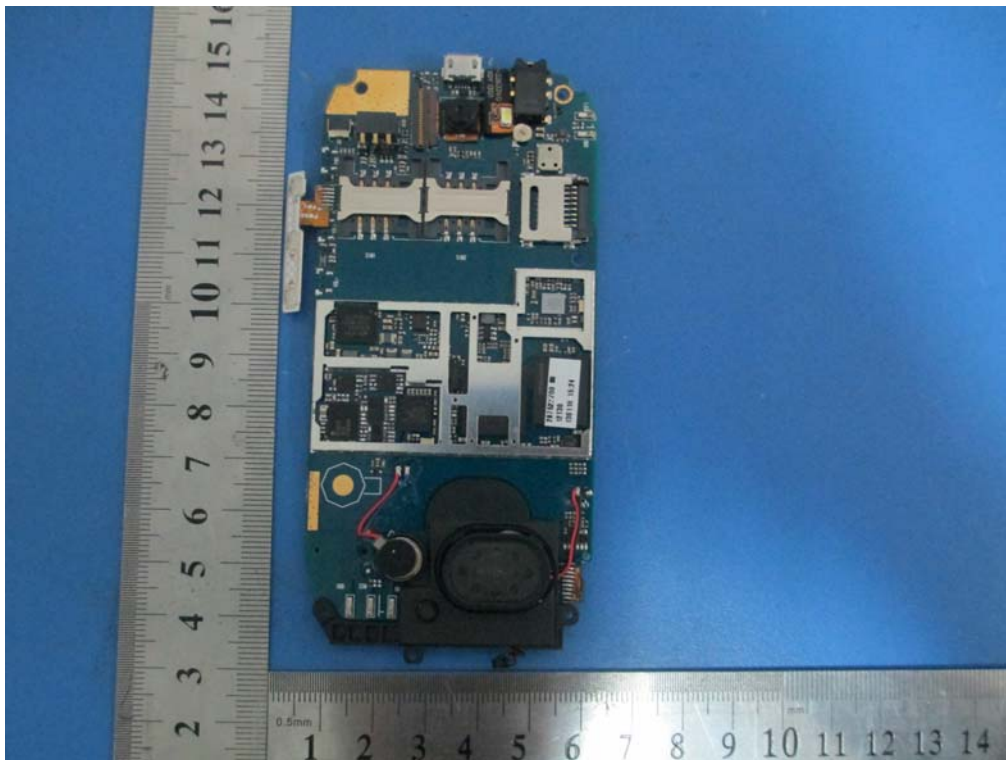


Uncover Without Shielding - Top View

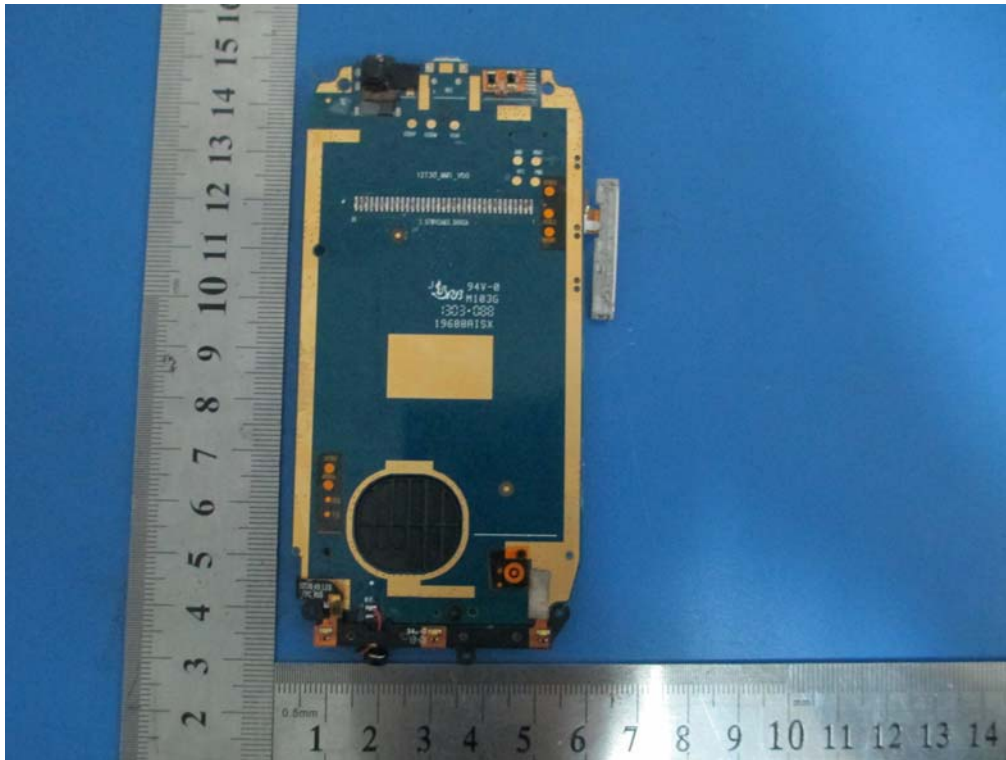

Uncover Without Shielding - Bottom View


Bluetooth
/WIFI
Antenna

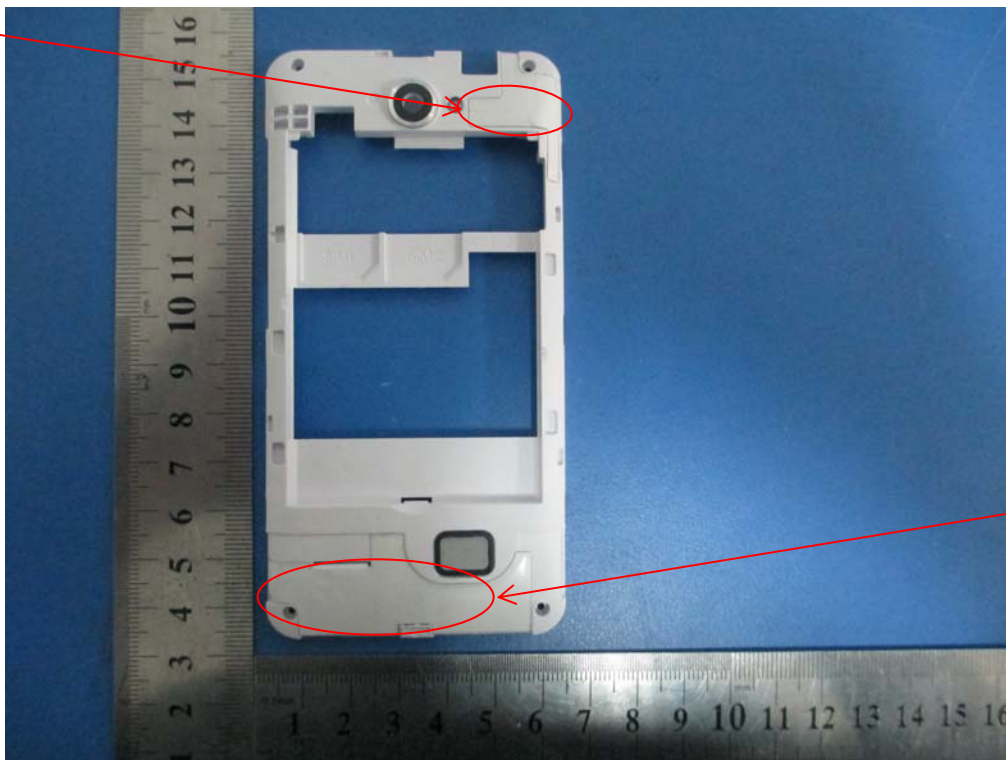


GSM/WCD
MA Antenna

Antenna – Top View

Annex B.iii. Photograph 3: Test Setup Photo

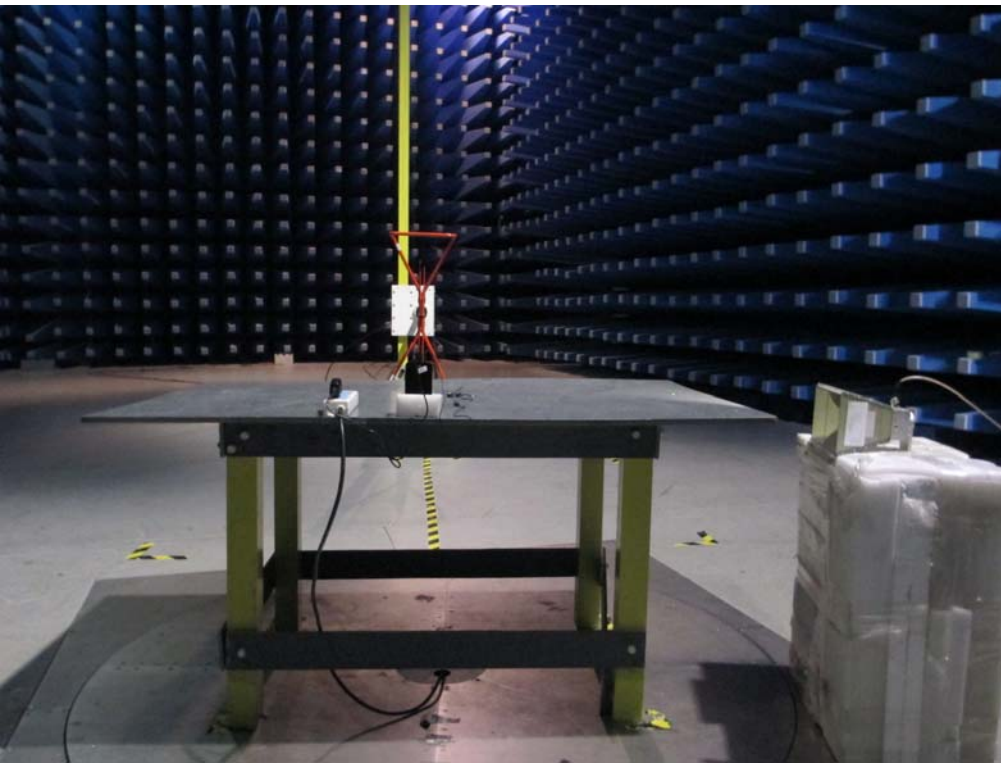

Radiated Spurious Emissions Test Setup Below 1GHz - Front View

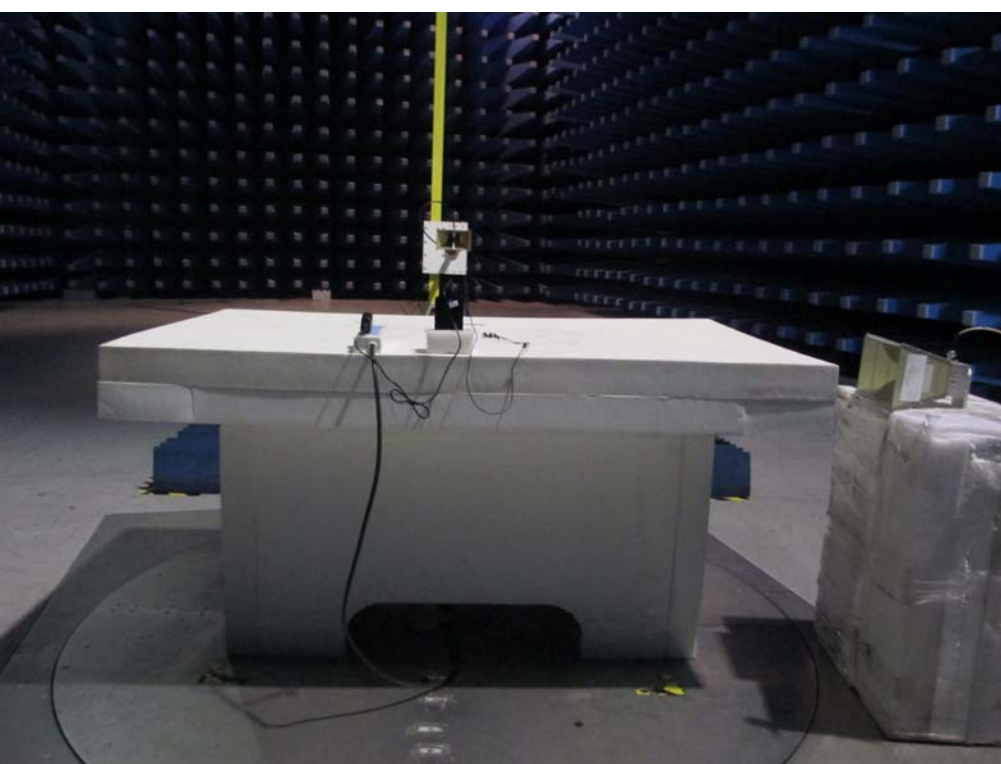

Radiated Spurious Emissions Test Setup Above 1GHz -Front View

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


EUT TEST CONDITIONS

Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description (Including Brand Name)	Model	Calibration Date	Calibration Due Date
A-INFOMW	Horn Antenna	JTXLB-10180	06/25/2012	06/24/2013
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	10/27/2012	10/26/2013

Block Configuration Diagram for Radiated Emissions

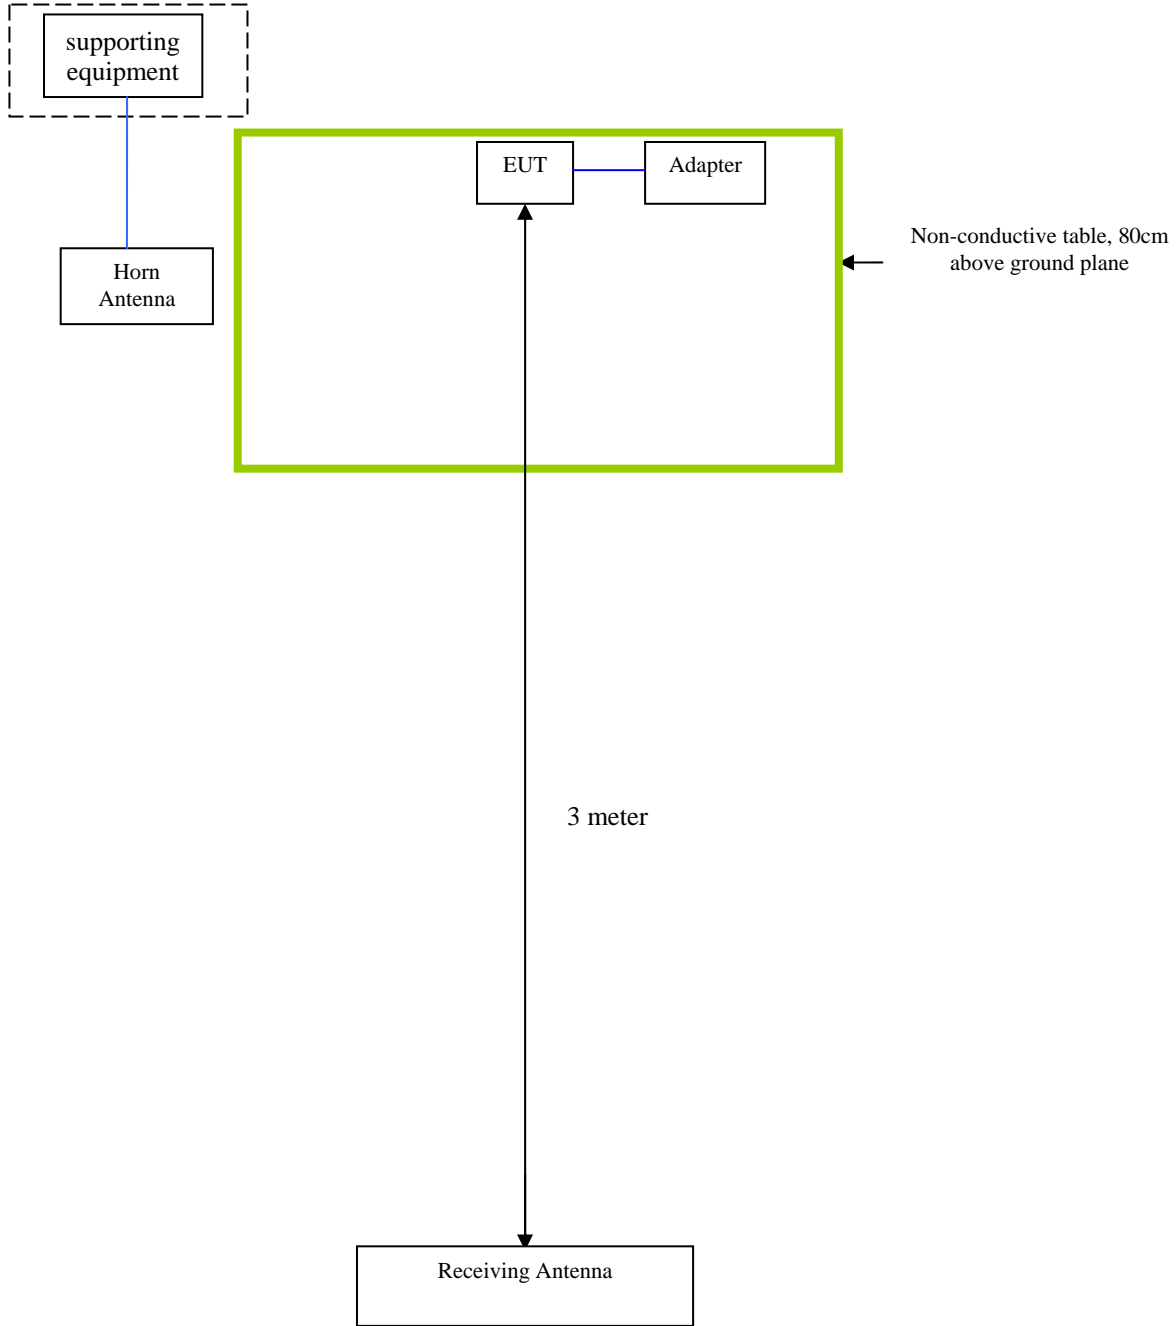

Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions Testing	The EUT was communicating with base station and set to work at maximum output power.
Others Testing	The EUT was communicating with base station and set to work at maximum output power.

Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST

Please see attachment

Annex E. DECLARATION OF SIMILARITY

NONE