

FCC Test Report

FCC ID : GCDAYC-T65
Applicant : Rosslare Enterprises Ltd
Address : Flat 12,9/F., Wing Fat Ind. Bldg.,12 Wang Tai Road , Kowloon Bay,
Kowloon, Hong Kong
Manufacturer : Rosslare Electronics(Shenzhen) Co., Ltd.
Address : Block 2, No.A-1 Baiwangxin Industrial Park, Xili Town, Shenzhen,
China
Equipment Under Test (EUT) :
Product Name : Convertible Reader and Controller
Model No. : AYC-T65B, AYC-T65N
Rules : FCC CFR47 Part 15 Section 15.209:2010
Date of Test : January 3 ~26, 2013
Date of Issue : January 27, 2013

Test Result	: PASS
✧ The sample detailed above has been tested to the requirements of standard ANSI C63.4:2003. The test results have been reviewed against the rules above and found to meet their essential requirements.	

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

12B, West Tower, Aidi Building, No.5003, Binhe Road, Futian District,
Shenzhen, Guangdong, China

Testing location:1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,
Shenzhen 518105, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Test Method	Result
Radiated Emissions (125kHz ~ 1GHz)	Part 15.209	ANSI C63.4: 2003	PASS
Conducted Emissions (150kHz ~ 30MHz)	Part 15.207	ANSI C63.4:2003	N/A

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS.....	3
4 GENERAL INFORMATION	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.....	4
4.3 DESCRIPTION OF SUPPORT UNITS	4
4.4 RULES APPLICABLE FOR TESTING	4
4.5 TEST FACILITY	4
4.6 TEST LOCATION	4
5 EQUIPMENT USED DURING TEST	5
6 CONDUCTED EMISSIONS.....	6
6.1 E.U.T. OPERATION	6
6.2 EUT SETUP	7
6.3 CONDUCTED EMISSION TEST RESULT.....	7
7 RADIATED EMISSIONS	8
7.1 MEASUREMENT UNCERTAINTY	9
7.2 EUT SETUP	9
7.3 SPECTRUM ANALYZER SETUP	10
7.4 TEST PROCEDURE.....	10
7.5 RADIATED EMISSIONS TEST RESULT	11
7.6 SUMMARY OF TEST RESULTS	11
7.7 PHOTOGRAPH – RADIATION EMISSION TEST SETUP.....	14
8 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	15
8.1 EUT – APPEARANCE VIEW.....	15
8.2 EUT – OPEN VIEW	17
8.3 EUT – PCB VIEW.....	17
9 FCC LABEL.....	19

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

4 General Information

4.1 General Description of E.U.T.

Product Name	: Convertible Reader and Controller
Model No.	: AYC-T65B, AYC-T65N
Model Difference	: The model is different in case color.
Operation Frequency	: 125kHz
Oscillator	:Crystal 20MHz

4.2 Details of E.U.T.

Technical Data: : DC 5V ~ 16V (Typical:12V)

4.3 Description of Support Units

The EUT is a Convertible Reader and Controller. It can function as a reader or as a controller. While connected to a controller and functioning as a reader, it transmits a 125kHz signal. In this report, the EUT was connected to the AC525 controller as a reader, and the power supplied is DC 12.0V.

4.4 Rules Applicable for Testing

The customer requested FCC tests for a Convertible Reader and Controller. The rules used was Section 15.209:2010.

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**
Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A, Jul 12, 2012.
- **FCC – Registration No.: 880581**
Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.6 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Uncertainty
EMC Analyzer	Agilent/ E7405A	MY45114943	W2008001	9k-26.5GHz	Aug. 2, 2012	Aug. 1, 2013	±1dB
Trilog Broadband Antenne	SCHWARZB ECK MESS- ELEKTROM / VULB9163	336	W2008002	30-3000 MHz	Aug. 2, 2012	Aug. 1, 2013	±1dB
Broad-band Horn Antenna	SCHWARZB ECK MESS- ELEKTROM / BBHA 9120D(1201)	667	W2008003	1-18GHz	Aug. 2, 2012	Aug. 1, 2013	f < 10 GHz : ±1dB 10GHz < f < 18 GHz : ±1.5dB
Broadband Preamplifier	SCHWARZB ECK MESS- ELEKTROM / BBV 9718	9718-148	W2008004	0.5-18GHz	Aug. 2, 2012	Aug. 1, 2013	±1.2dB
10m Coaxial Cable with N-male Connectors	SCHWARZB ECK MESS- ELEKTROM / AK 9515 H	-	-	-	Aug. 2, 2012	Aug. 1, 2013	-
10m 50 Ohm Coaxial Cable	SCHWARZB ECK MESS- ELEKTROM / AK 9513	-	-	-	Aug. 2, 2012	Aug. 1, 2013	-
Positioning Controller	C&C LAB/ CC-C-IF	-	-	-	Aug. 2, 2012	Aug. 1, 2013	-
Color Monitor	SUNSPO/ SP-14C	-	-	-	Aug. 2, 2012	Aug. 1, 2013	-
Test Receiver	ROHDE&SC HWARZ/ ESPI	101155	W2005001	9k-3GHz	Aug. 2, 2012	Aug. 1, 2013	±1dB
Two-Line V-Network	ROHDE&SC HWARZ/ ENV216	100115	W2005002	50Ω/50μH	Aug. 2, 2012	Aug. 1, 2013	±10%
RF Generator	TESEQ GmbH/ NSG4070	25781	W2008008	Fraq-range : 9K-1GHz RF voltage : - 60 dBm- +10dBm	Aug. 2, 2012	Aug. 1, 2013	Power_freq distinguish0. 1Hz RFelectricity distinguish 0.1B
Active Loop Antenna	Beijing Dazhi / ZN30900A	-	-	9kHz- 30MHz	Aug. 2, 2012	Aug. 1, 2013	±1dB

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

6 Conducted Emissions

Test Requirement:	FCC CFR47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	N/A
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar


EUT Operation:

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Section 15.207 limits.

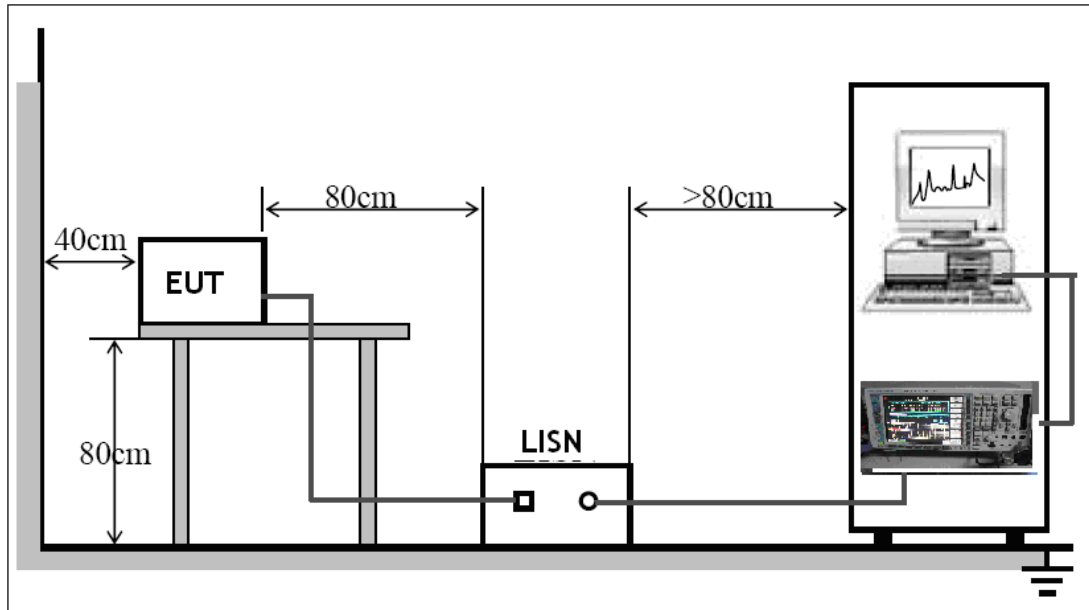

The EUT was placed on the test table in shielding room

6.3 Conducted Emission Test Result

This test is not applicable since the EUT is powered by DC 12V.

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209
 Test Method: ANSI C63.4:2003
 Test Result: PASS
 Frequency Range: 125kHz to 1GHz
 Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Note:

- a) The tighter limit applies at the band edges.
 For example: F.S limit at 88MHz is 100uV/m
- b) If measurement is made at 3m distance, then F.S Limit at 3m distance is adjusted by using the formula of $L_{d1} = L_{d2} * (d2/d1)^2$.
 For example:
 F.S Limit at 30m(d2) distance is 30uV/m(L_{d2}), then F.S Limit at 3m(d1) distance is
 $L_{d1} = 30\text{uV/m} * (30/3)^2 = 100 * 30\text{uV/m} = 69.54 \text{ dBuV/m}$

EUT Operation :

Operating Environment:

Temperature: 25.5 °C
 Humidity: 51 % RH
 Atmospheric Pressure: 1012 mbar

EUT Operation:

The EUT was tested in continuously transmit mode.

7.1 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek EMC Lab is $\pm 5.03\text{dB}$.


7.2 EUT Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003.

a) Radiated Emission Test Setup, Frequency Below 30MHz

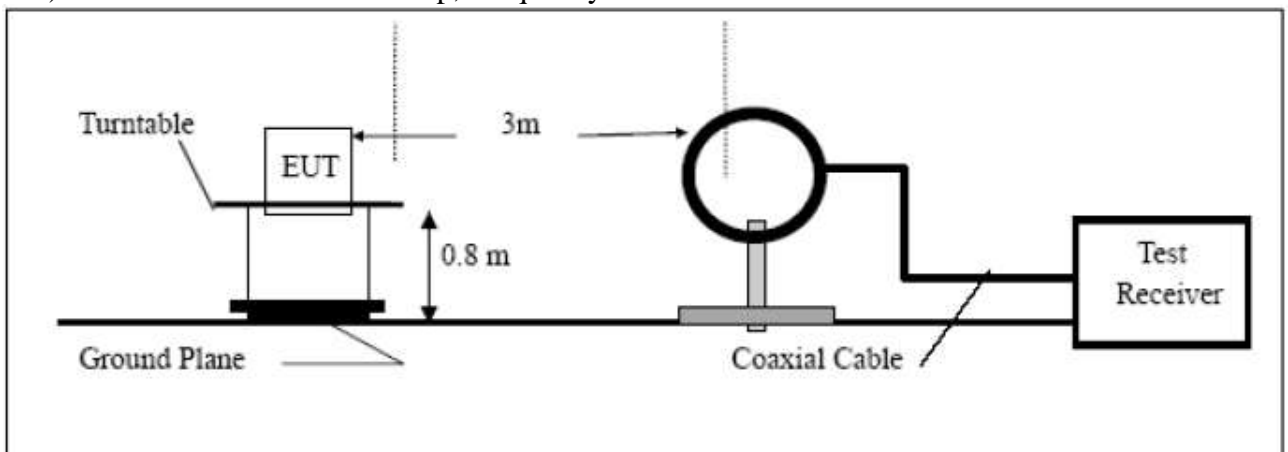

b) Radiated Emission Test Setup, Frequency range 30MHz ~ 1000MHz

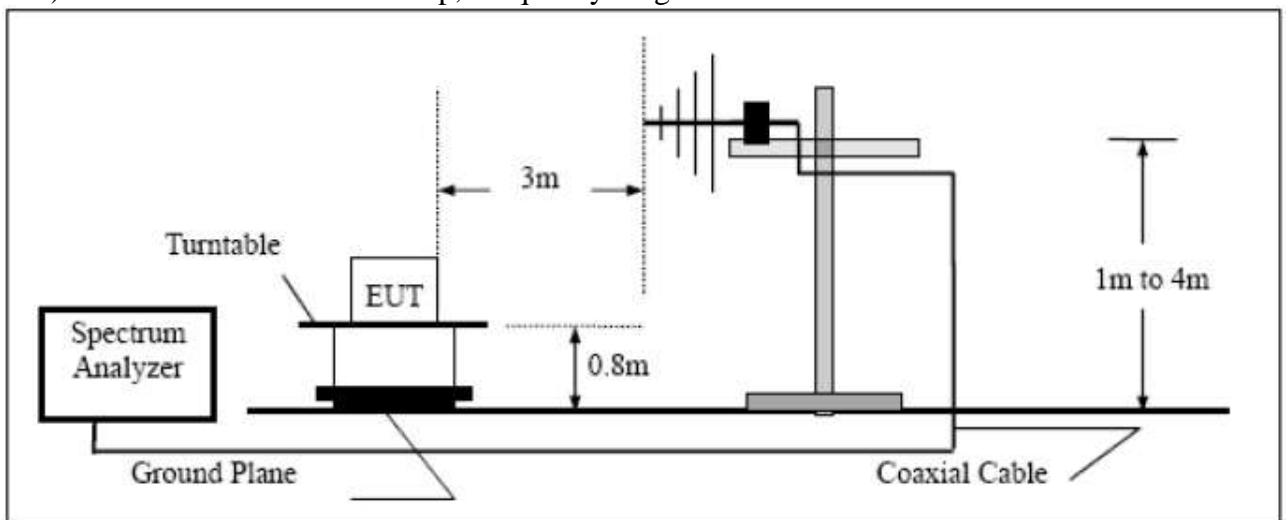

The results shown in this test report refer only to the sample(s) tested, This Test report cannot be reproduced, except in full, without prior written permission of the Company.

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 125kHz to 1000MHz.

Below 30MHz

Start Frequency 125 kHz
 Stop Frequency 30MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 KHz
 Video Bandwidth..... 10KHz
 Resolution Bandwidth 10KHz

From 30MHz to 1000MHz

Start Frequency 30MHz
 Stop Frequency 1000MHz
 Sweep Speed Auto
 IF Bandwidth..... 120 KHz
 Video Bandwidth..... 100KHz
 Quasi-Peak Adapter Bandwidth 120 KHz
 Quasi-Peak Adapter Mode Normal
 Resolution Bandwidth 120kHz

7.4 Test Procedure

a) Test Procedure (below 30MHz)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Repeat above procedures until the measurements for all frequencies are complete.

b) Test Procedure (above 30MHz)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y,Z axis positioning. And all the modes was tested in the report. Only the worst case is shown in the report.

7.5 Radiated Emissions Test Result

Formula of conversion factors:the field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV/m) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the presselector was accounted for in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

7.6 Summary of Test Results


According to the data in this section, the EUT complied with the FCC Part15 C standards.

Test Data below 30MHz

Frequency (kHz)	Detector	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Distance (m)
125	AV	74.54	105.67	-31.13	3
No suspicious signal found in other frequency.					

Test Data above 30MHz


Antenna Polarization: Vertical

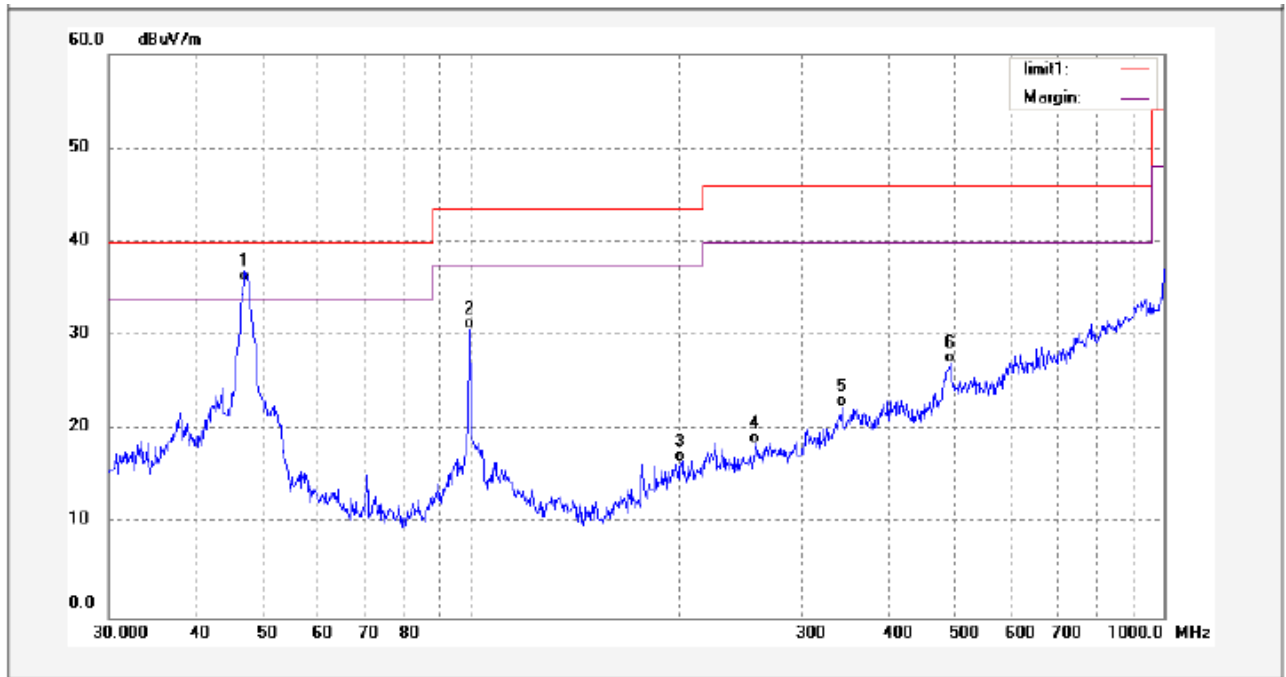

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	47.2026	21.12	14.60	35.72	40.00	-4.28	QP	
2	99.4177	16.84	13.89	30.73	43.50	-12.77	QP	
3	200.7473	1.22	15.32	16.54	43.50	-26.96	QP	
4	257.6266	2.39	16.15	18.54	46.00	-27.46	QP	
5	343.6506	2.29	20.19	22.48	46.00	-23.52	QP	
6	491.7700	1.72	25.29	27.01	46.00	-18.99	QP	

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Antenna Polarization: Horizontal

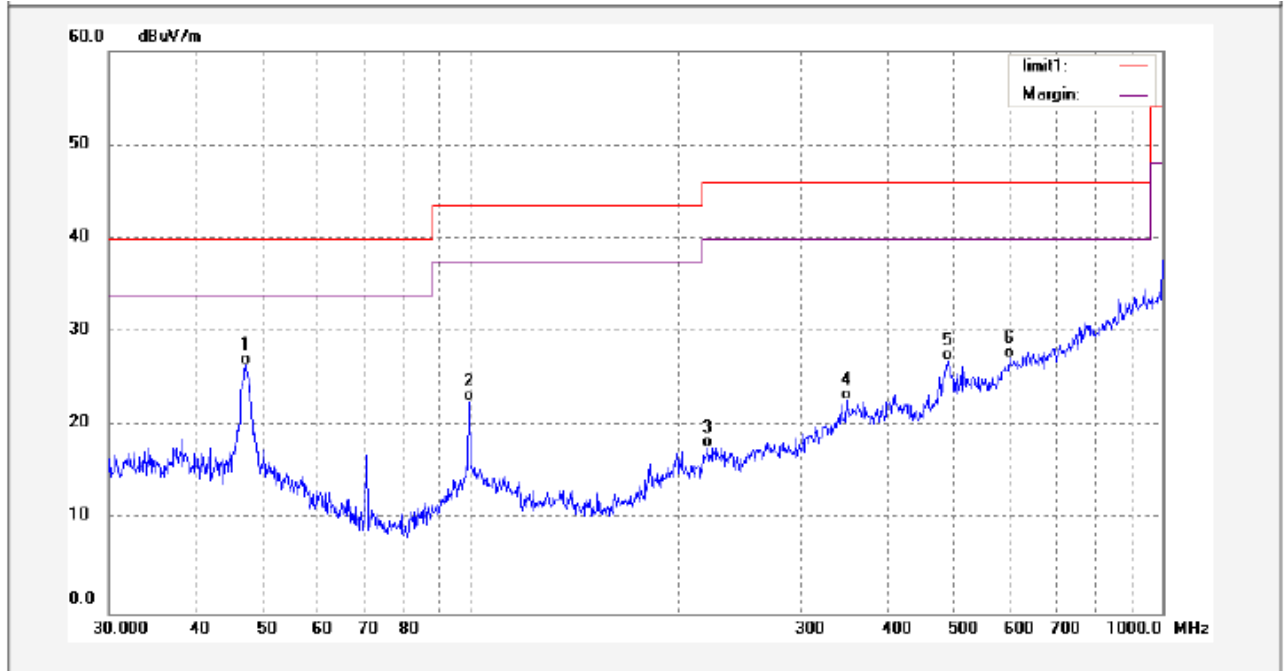


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	47.3688	11.87	14.61	26.48	40.00	-13.52	QP	
2	99.4177	8.62	13.89	22.51	43.50	-20.99	QP	
3	220.7241	1.46	16.17	17.63	46.00	-28.37	QP	
4	349.7412	2.53	20.13	22.66	46.00	-23.34	QP	
5	490.0451	1.15	25.75	26.90	46.00	-19.10	QP	
6	600.8140	1.55	25.71	27.26	46.00	-18.74	QP	


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

7.7 Photograph – Radiation Emission Test Setup

Below 30MHz

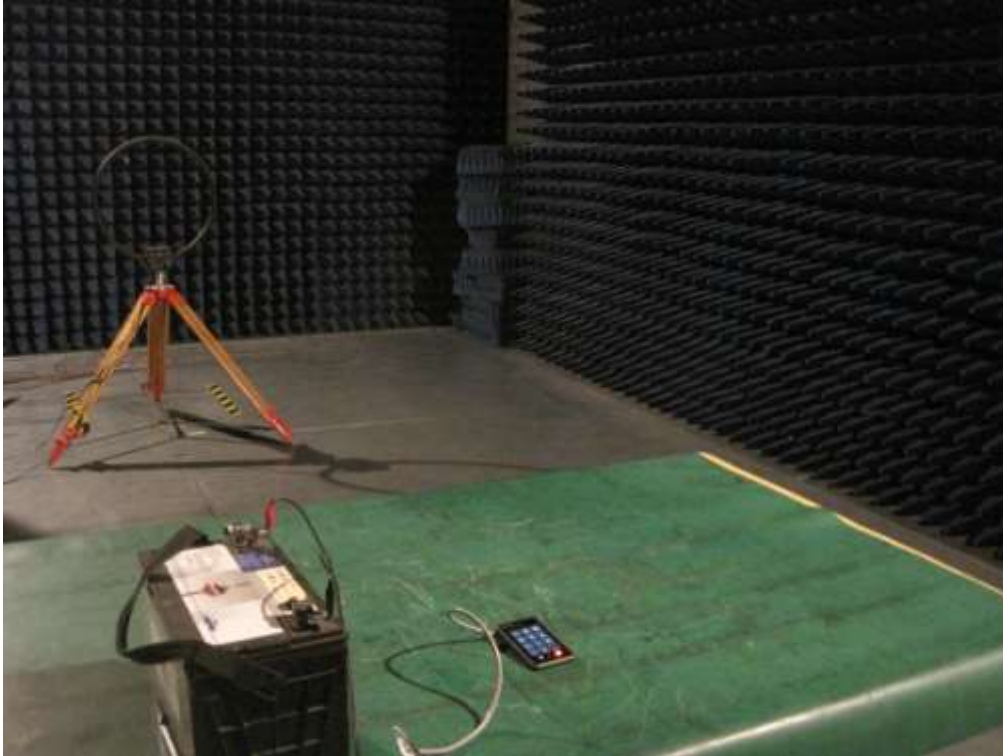

Above 30MHz

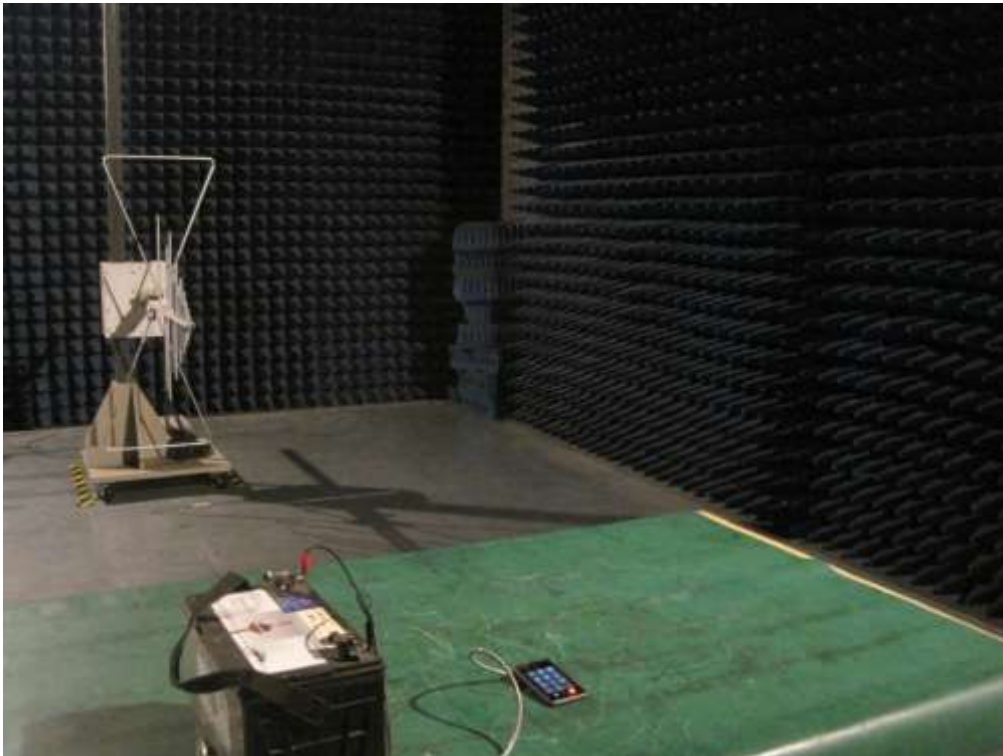

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

8 Photographs - Constructional Details

8.1 EUT – Appearance View

AYC-T65N



The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

AYC-T65B



The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.


WALTEK SERVICES


Reference No.: WT12128673-S-S-F

8.2 EUT – Open View



8.3 EUT – PCB View

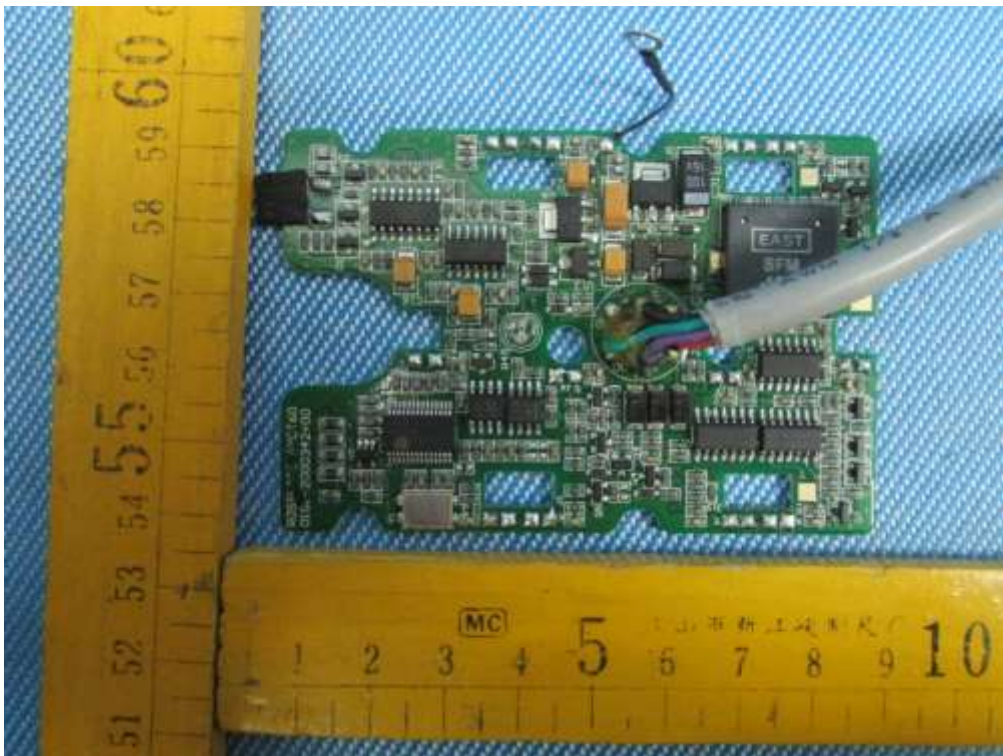

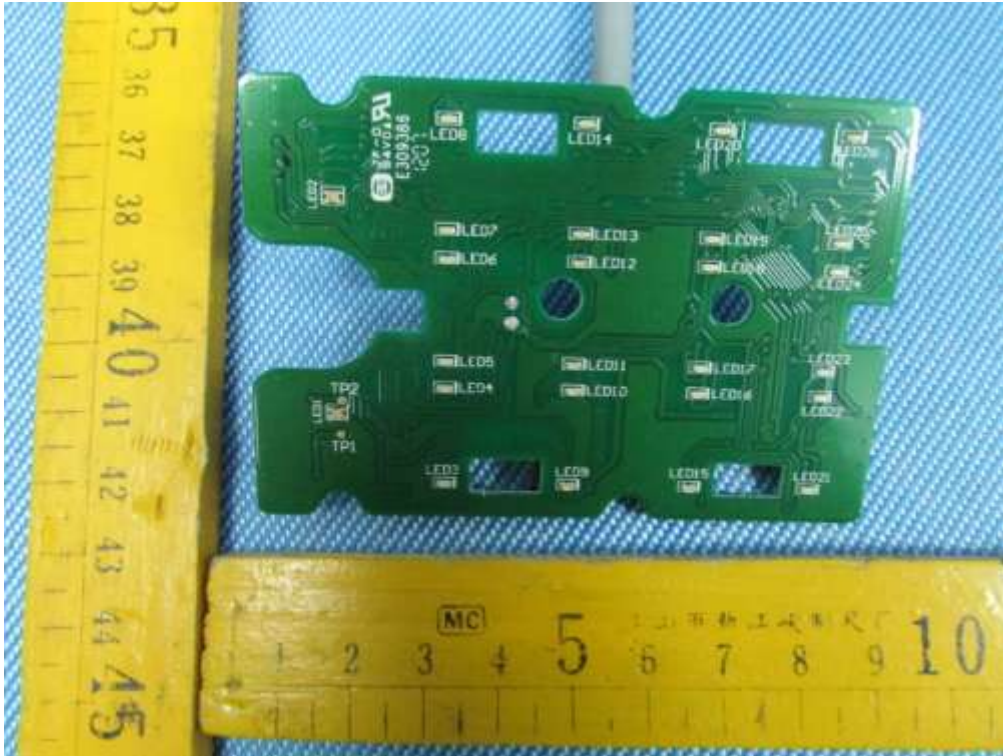

9 FCC Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Label Location

