

REV	Δ	Description	Sheet Effected	Date	Drawn	Checked
A				09/02/2009	M. Reuben	S.Cohen
B		Replaced 15.109 with 15.209	12, 21-25	28/07/2009	M. Reuben	S.Cohen

EMC Laboratory

PYR-3011G

FCCID: GCD-PYR-3011G
Manufactured by
ROSSLARE Enterprises LTD.

Test Report

According to FCC Part 15 Requirements

February 2009




	Function/Title	Name	Signature	Date
Prepared by	Technical Writer	M. Reuben		28/07/2009
Checked by	Test Engineer	I. Arbitman		28/07/2009
Approved by	EMC Lab. Manager	S.Cohen		

Table of Contents

Para	Page
1 INTRODUCTION	4
2 TEST SUMMARY AND SIGNATURES.	5
3 E.U.T INFORMATION	6
4 BANDWIDTH OF THE EMISSION PART 15.231—TEST RESULTS	7
5 FIELD STRENGTH OF FUNDAMENTAL PART 15.231-TEST RESULTS.....	8
6 RADIATED EMISSION PART 15.231 & 15.205-TEST RESULTS	10
7 RADIATED EMISSION PART 15.209-TEST RESULTS.....	13
8 PLOTS	15
9 CORRECTION FACTORS.....	30
10 ABBREVIATIONS AND ACRONYMS	32
11 PHOTOGRAPHS	33

List of Figures

Figure	Page
Figure 1: Test Configuration	6
Figure 2: Radiated Emission Set up	12
Figure 3: Radiated Emission test 10 KHz – 30 MHz	12
Figure 4: Radiated Emission test 30 MHz – 1 GHz	12
Figure 5: Radiated Emission test above 1 GHz.....	12
Plot 1	15
Test Results Plot No 2	16
Test Results Plot No 3	17
Test Results Plot No 4	18
Test Results Plot No 5	19
Test Results Plot No 6	20
Test Results Plot No 7	21
Test Results Plot No 8	22
Test Results Plot No 9	23
Test Results Plot No 10	24
Test Results Plot No 11	25
Test Results Plot No 12	26
Test Results Plot No 13	27
Transmission time	27

Test Results Plot No 14	27
Repetitive transmission time	27
Test Results Plot No 15	28
Test Results Plot No 16	28
Test Results Plot No 17	29
Test Results Plot No 18	29
20log13.44/100=-17.43	29

List of Tables

Table	Page
Table 4.b: Limits for Bandwidth	7
Table 4.c: Test Instrumentation and Equipment.....	7
Table 4.d: Bandwidth Test Result	7
Table 5.b: Limits for Fundamental	8
Table 5.c: Test Instrumentation and Equipment.....	8
Table 5.d: Average Factor	8
Table 5.d.1: Peak Result of Fundamental.....	8
Table 5.d.2: Average Result of Fundamental	8
Table 6.b: Limits for 15.231(b)	10
Table 6.c: Test Instrumentation and Equipment.....	10
Table 6.d: Preliminary Test Results for intentional Emissions in TX Mode 15.231.....	10
Table 6.e: Six Highest Peak Emission Test Results	11
Table 6.e1: Six Highest Average Emission Test Results	11
Table 7.c: Limits for 15.209 Class B equipment.....	13
Table 7.d: Test Instrumentation and Equipment	13
Table 7.e: Preliminary Test Results for Unintentional Emissions in RX Mode 15.209.....	14
Table 7.f: Six Highest RX Mode 15.209	14

1 INTRODUCTION

a. Scope

This document describes the measurement procedures and tests for FCC part 15 of the PYR-3011G Manufactured by ROSSLARE ENTERPRISES Ltd.

b. Description of equipment Under Test.

Equipment Under Test:	PYR-3011G
FCCID	GCD-PYR-3011G
Manufacturer:	ROSSLARE ENTERPRISES Ltd.
Serial Numbers:	0825-433A0
Mode of Operation:	TX MODE
Receiver operating frequency:	433.92 MHZ
Year of Manufacture:	2008

c. Applicant Information:

Applicant:	ROSSLARE ENTERPRISES Ltd.
Applicant Address	Suite 912 Wing Fat Industrial Building, 12 Wang Tai Road, Kowloon Bay, Hong- Kong
Telephone:	+972-3-9386838
FAX:	+972-3-9386830
The testing was observed by:	ALAN GREEN
Following applicant's personnel:	ALAN GREEN

d. Test Performance:




Date of reception for testing:	15/01/2009
Dates of testing	15/01/2009 – 25/01.2009
Test Laboratory Location	Elbit Systems Land and C ⁴ I Tadiran Ltd., EMC LAB, Hashoftim 26 Holon 58102 ISRAEL Tel: 972-3-5574476 Fax: 972-3-5575320
Applicable EMC Specification:	
Code of Federal Regulations	47, FCC Docket 89-103,Part 15: Radio Frequency Devices, Sections 15.209, 15.231 & 15.205

2 TEST SUMMARY AND SIGNATURES.

Elbit Systems Land and C⁴I Tadiran Ltd., EMC Laboratory has completed testing of E.U.T in accordance with the requirements of the FCC Part 15 Regulations for Class B equipment.

The E.U.T was found to comply with the requirements of the FCC Part 15 Regulations given below

Test	Test Description	Section	PASS/FAIL
1	Bandwidth of the emission	15.231	PASS
2	Field strength of fundamental	15.231	PASS
3	Radiation emission	15.209	PASS
4	Radiation emission	15.231 & 15.205	PASS

	Function/Title	Name	Signature	Date
Test performed by	Test Engineer	I. Arbitman		25/01/2009
Test Report prepared by	Technical Writer	M. Reuben		25/01/2009
Test Report Approved by	EMC Lab. Manager	S Cohen		03/02/2009

3 E.U.T INFORMATION

a. E.U.T description

- (1) Station for Rosslare's SecuraCare Wireless Intrusion system. The PYR-3011G includes a transceiver that works on 433.92 or 868.35 MHz, depending on the device model. The device receives supervisory signals from the SecuraCare wireless devices during an intrusion event, or a supervisory period (between 20-60 min, depending on model). The PYR-3011G sends and receives ACK signals to the SA-80 Wireless siren during normal operation. The range of the devices from the PYR-3011G is a maximum of 300 meters, in line of sight. The PYR-3011G also acts as a telephone, with full features and recognition of standard dial tone. In an event of an emergency, the PYR-3011G will dial out to system programmed numbers, with a recorded message. The PYR-3011G also allows the user to dial into the phone via PSTN and configure the system, or listen-in (half-duplex)

b. E.U.T Test Configuration

E.U.T. test configuration is shown in figure bellow

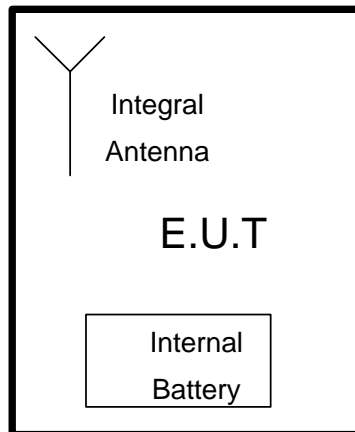


Figure 1: Test Configuration

c. E.U.T Mode of Operation description

- (1) 433.92MHz TX Mode operated by battery

d. Changes made to EUT

- (1) C10 = 3.9pF in parallel to 10pF was added to EUT.

4 BANDWIDTH OF THE EMISSION PART 15.231—TEST RESULTS

E.U.T: PYR-3011G
 S/N: 0825-433A0
 Test Method: ANSI 63.4
 Date: 22/01/2009
 Relative Humidity: 29%
 Ambient Temperature: 21c
 Air Pressure: 1053hpa
 Test Setup: Figure 1

Testing Engineer: I. Arbitman 

Date 22/01/2009

a. Test Results Summary & Conclusions

The E.U.T was found in compliance with Bandwidth of Radiated Emission fundamental frequency requirement

b. Limits of bandwidth

The test unit shall meet the limits of Table 4.b

Table 4.b: Limits for Bandwidth

Frequency (MHz)	Bandwidth Max Limits (%)	Bandwidth Max Limits (KHz)
433.92	0.25	1085

c. Test Instrumentation and Equipment

Table 4.c: Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	20.05.09
Broadband Antenna	BTA-L	FRANKONIA	15.05.09

d. Test Results

Table 4.d: Bandwidth Test Result

Frequency (MHz)	Bandwidth (KHz)	Bandwidth Max Limit(KHz)	Test Results Plot No	PASS/FAIL
433.9175	65.0	1085	1	PASS

e. Procedure

The Bandwidth is determined at the point 20db down from the modulated carrier, while the spectrum analyzer was set to “max hold” and R.B.W – 10 KHz.

5 FIELD STRENGTH OF FUNDAMENTAL PART 15.231-TEST RESULTS

E.U.T PYR-3011G
 S/N: 0825-433A0
 Test Method: ANSI 63.4
 Date: 21/01/2009
 Relative Humidity: 29%
 Ambient Temperature: 20c
 Air Pressure: 1053hpa
 Test Setup: Figure 1

Testing Engineer: I. Arbitman  Date 21/01/2009

a. Test Results Summary & Conclusions

The E.U.T was found in compliance with fundamental frequency requirement

b. Limits of Field Strength for fundamental according 15.231

The test unit shall meet the limits of Table 5.b.

Table 5.b: Limits for Fundamental

Frequency (MHz)	Average Max Limits (dBμV/m)	Peak Max Limits (dBμV/m)
433.916	81	101

c. Test Instrumentation and Equipment

Table 5.c: Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	20.05.09
Broadband Antenna	BTA-L	FRANKONIA	15.05.09

d. Test Results

Table 5.d: Average Factor

TX Period(min)	Duty Cycle(min)	Average Factor(db)	Test Results Plot No
13.44ms	$13.44/100=0.13$	$20\log 0.134=-17.43$	13-18

Table 5.d.1: Peak Result of Fundamental

Frequency (MHz)	Peak Result (dBμV/m)	peak Limits (dBμV/m)	Margin (dB)	Test Results Plot No	Pass/Fail
433.919	91.8	100	8.2	2	PASS

Table 5.d.2: Average Result of Fundamental

Peak Result (dBμV/m)	Average Factor	Calculation Results	Average Limits (dBμV/m)	Margin (dB)	Pass/Fail
91.8	-17.43	74.37	81	6.63	PASS

e. Test Procedure

The EUT was placed on the top of rotating table 0.8 meters above the ground and the table was rotated 360°, the height of antenna is varied from one to 4 meters (vertical and horizontal polarization) to determine the max field strength of fundamental

6 RADIATED EMISSION PART 15.231 & 15.205-TEST RESULTS

E.U.T PYR-3011G
 S/N: 0825-433A0
 Test Method: ANSI 63.4
 Date: 22/01/2009
 Relative Humidity: 29%
 Ambient Temperature: 21c
 Air Pressure: 1053hpa
 Test Setup: Figure 1 to 4

Testing Engineer: I. Arbitman 

Date 22/01/2009

a. Test Results Summary & Conclusions

The E.U.T was found to be in compliance with 15.231

b. Limits of Radiated Interference Field Strength according 15.231

The test unit shall meet the limits of Table 6.b.

Table 6.b: Limits for 15.231(b)

Frequency range(MHz)	Average Limits (dBμV/m)	peak Limits (dBμV/m)
0.009 – 3500	61	81

c. Test Instrumentation and Equipment

Table 6.c: Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	20/05/2009
Loop Antenna	HFH2-Z2	R&S	14/05/2009
Double Ridge Guide Antenna(1-18GHz)	DRG-118/A	ARA	09/12/2009
Broadband Antenna	BTA-L	FRANKONIA	15/05/2009
Low Noise Amplifier (0-1GHz)	AM-1300-N	MITEQ	09/04/2009
Low Noise Amplifier (1-4GHz)	AMM 003N	Avantek	11/06/2009
Low Noise Amplifier (2-18GHz)	PE 2-38	Planar	14/09/2009

d. Preliminary Test Results

Table 6.d: Preliminary Test Results for intentional Emissions in TX Mode 15.231

Antenna Polarization	Freq. Range MHz	Res. BW (kHz)	Test Results Plot No	PASS/FAIL
Both Hor.& Ver	0.009 – 0.15	0.2	3	PASS
	0.15 - 30	9	4	PASS
	30 - 1,000	100	5	PASS
	1,000 – 2,900	1000	6	PASS
	2,900 – 5,000	1000	7	PASS

e. Final Results

Table 6.e: Six Highest Peak Emission Test Results

Mode of Operation	Frequency (MHz)	Peak Reading (dBμV/m)	Limit dBμV/m	Margin (dB)	Pass/Fail
TX	433.921	45.6	81	-35.4	PASS
	867.841	44.7	81	-36.3	PASS

Table 6.e1: Six Highest Average Emission Test Results

Mode Of Operation	Frequency (MHz)	Calculated (dBμV/m)(*)	Limit dBμV/m	Margin (dB)	Pass/Fail
TX	867.841	27.27	61	-33.73	PASS

f. * Calculated=Peak – Average Factor

g. Test Procedure

(1) Preliminary Test Procedure

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a chamber shielded
- b) The E.U.T was set 3 meters away from the receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The Antenna height varied from one meter above the ground over its full-allowed range of travel and the table was rotated 360°to determine the maximum value of the field strength
- d) The antenna was set both horizontal and vertical polarization.

(2) **Final Test Procedure**

- a) The EUT was tested at open area for each suspected emission
- b) The test procedure was performed according paragraph (1) and figure 11

h. Final Test Setup

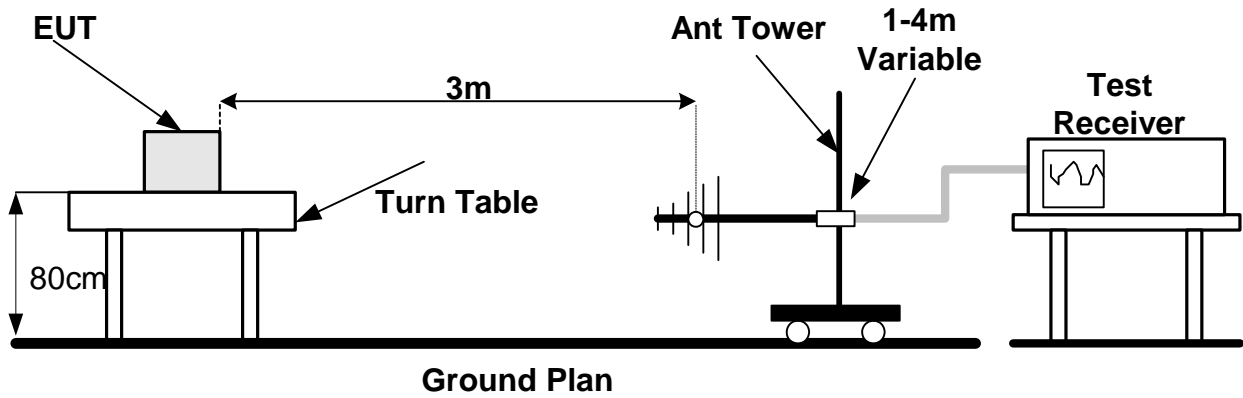


Figure 2: Radiated Emission Set up

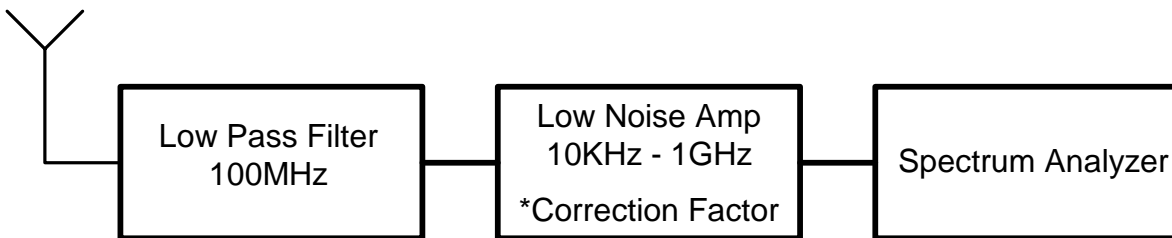


Figure 3: Radiated Emission test 10 KHz – 30 MHz

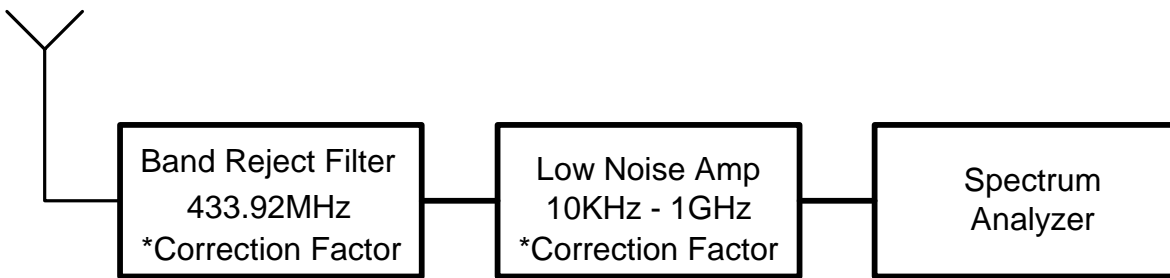


Figure 4: Radiated Emission test 30 MHz – 1 GHz

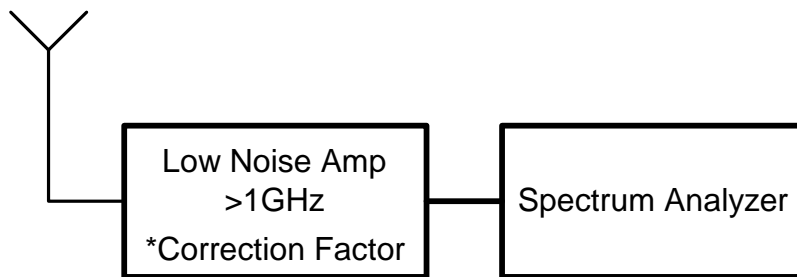


Figure 5: Radiated Emission test above 1 GHz

7 RADIATED EMISSION PART 15.209-TEST RESULTS

a. Preliminary Radiated emission Test Result According Part 15.209

E.U.T PYR-3011G
 S/N: 0825-433A0
 Test Method: ANSI 63.4
 Date: 23.07.2009
 Relative Humidity: 29%
 Ambient Temperature: 21c
 Air Pressure: 1053hpa
 Test Setup: Figure 1

Testing Engineer: I. Arbitman  Date 23/07/2009

b. Test Results Summary & Conclusions

The E.U.T was found in compliance with 15.209

c. Limits of Radiated Interference Field Strength according 15.209

The test unit shall meet the limits of Table 7.c for Class B equipment.

Table 7.c: Limits for 15.209 Class B equipment

Frequency Range (MHz)	Field strength (microvolts/meter)	Measurement distances (meters)
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	2400/F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

d. Test Instrumentation and Equipment

Table 7.d: Test Instrumentation and Equipment

Item	Model	Manufacturer	Next Date Calibration
Spectrum Analyzer	8593E	HP	24/06/2010
Loop Antenna	HFH2-Z2	R&S	26/04/2011
Double Ridge Guide Antenna(1-18GHz)	DRG-118/A	ARA	09/12/2009
Broadband Antenna	BTA-L	FRANKONIA	28/07/2010
Low Noise Amplifier (0-1GHz)	AM-1300-N	MITEQ	06/01/2010
Low Noise Amplifier (1-4GHz)	AMM 003N	Avantek	12/06/2010
Low Noise Amplifier (2-18GHz)	PE 2-38	Planar	14/09/2009

e. Preliminary Results

Table 7.e: Preliminary Test Results for Unintentional Emissions in RX Mode 15.209

Configuration	Antenna Polarization	Frequency Range MHz	Res. BW (kHz)	Test Results Plot No	PASS/FAIL
TX	Vertical	0.09-0.15	0.2	8	PASS
		0.15-30	9	9	PASS
	Both	30-1000	120	10	PASS
		1000-2900	1000	11	PASS
		2900-5000		12	PASS

f. Final Test Results

Table 7.f: Six Highest RX Mode 15.209


Nr	Frequency (MHz)	PK Value (dB μ V/m)	QP Value (dB μ V/m)	QP Limit (dB μ V/m)	Result	Angle (degrees)	Height (m)	H/V
1	867.841	44.7	44.1	46	Pass	180	1	H

g. Test Procedure

See paragraph 7.f

8 PLOTS

a. BANDWIDTH OF THE EMISSION part 15.231

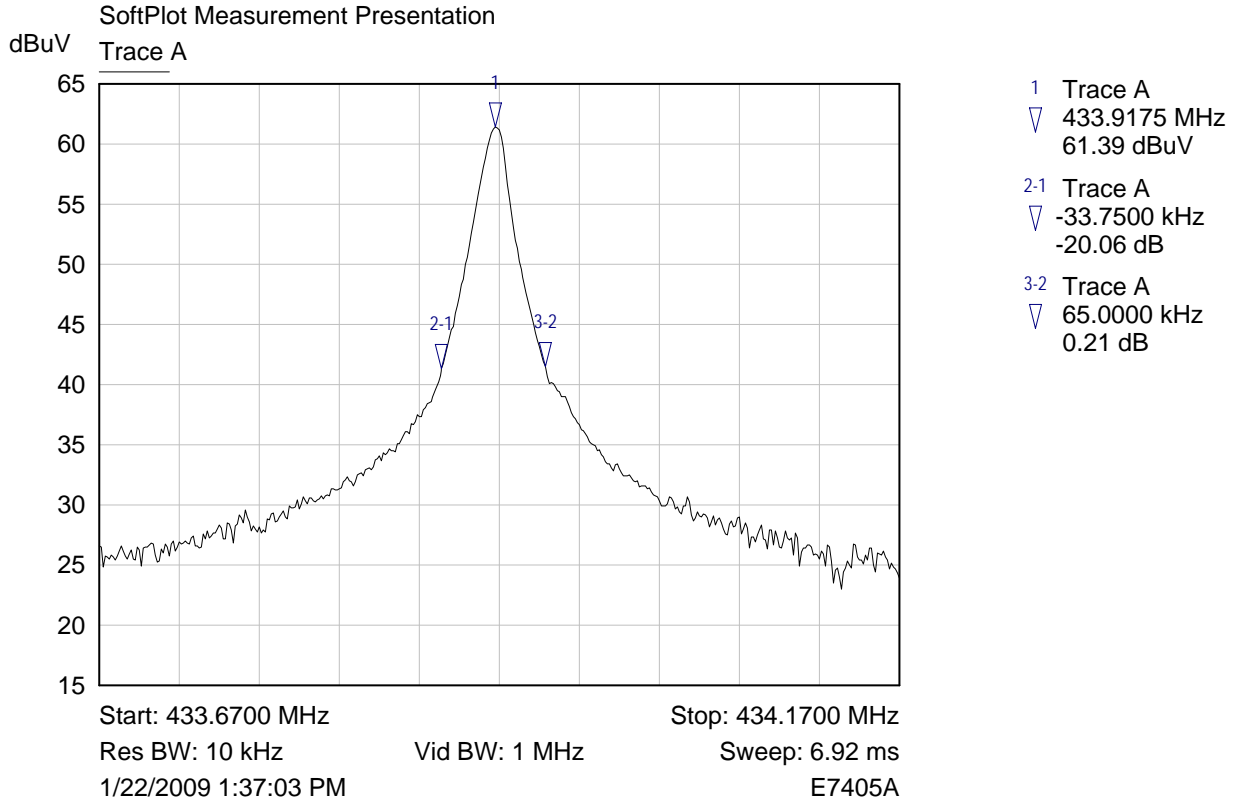

Plot 1

b. Field strength of fundamental part 15.231


Test Results Plot No 2

FCC Fundamental 433.92 MHz

Test & EUT General Information		Receiver Setting	
EUT Name:	PYR-3011	Spect Analyzer	Hewlett Packard 7405 AC coupling
S/N:	009C4E	Ref. Level:	100 dB μ V
Date of Test:	15/01/2009	RBW:	100 kHz
Test Engineer:	Ilya Arbitman	VBW:	1000 kHz
Antenna:	Frankonia BTA red -L_A 3m	Sweep Time:	Auto: 10 ms
Polarization:	Horizontal and Vertical	Pre Amplifier	No Description Available

TEST REMARKS: Thursday, January 15, 2009 11:07:27 AM

FIELD STRENGTH OF FUNDAMENTAL

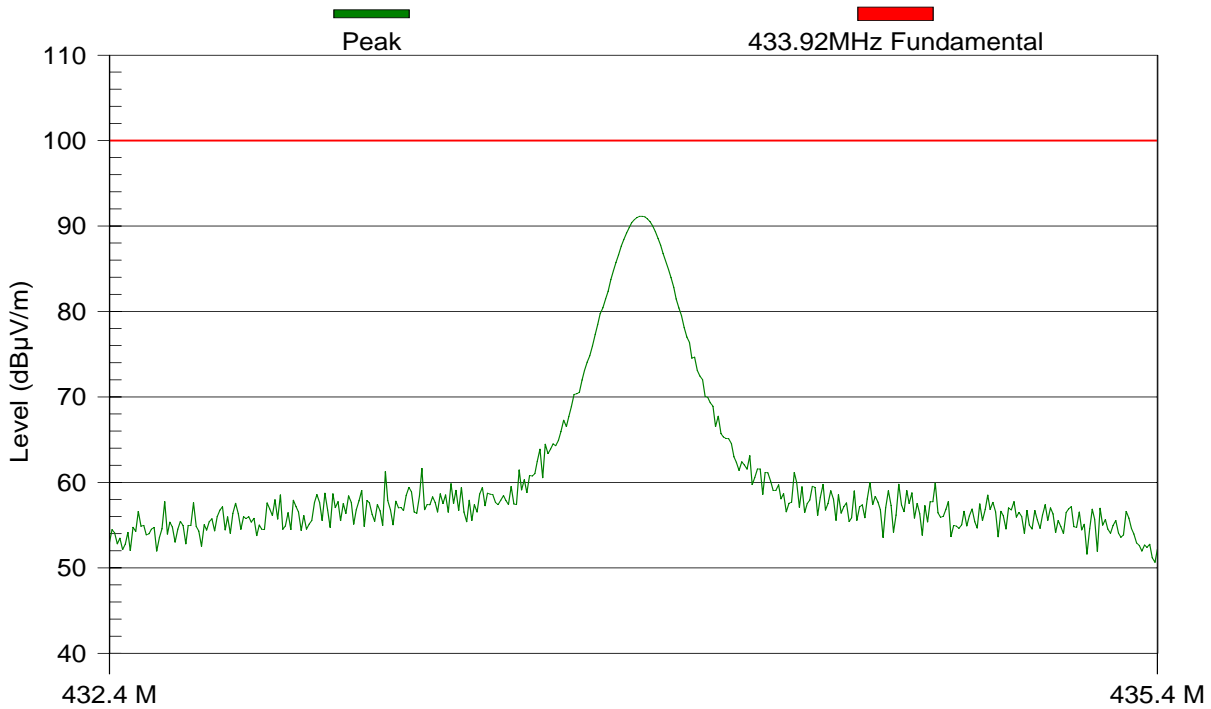

Frequency (Hz)	
Frequency (MHz)	Pk (dB μ V/m)
433.919	91.8


c. Radiated emission part 15.231 & 15.205

Test Results Plot No 3

RE FCC Class B: 9-150 KHz

Test & EUT General Information		Receiver Setting	
EUT Name:	PYR-3011	Spect Analyzer	Hewlett Packard 7405A DC Coupling
S/N:	00 9C4E	Ref. Level:	110 dB μ V
Date of Test:	22/01/2009	RBW:	200 Hz
Test Engineer:	Ilya Arbitman	VBW:	300 Hz
Antenna:	LOOP ANT.HFH 2 Z2	Sweep Time:	Auto: 12.69 s
Polarization:	Vertical	Pre Amplifier	LNA MITEQ 0.01-1GHz No-1

TEST REMARKS: Thursday, January 22, 2009 10:39:06 AM
RADIATED EMISSION PART 15.231 & 15.205

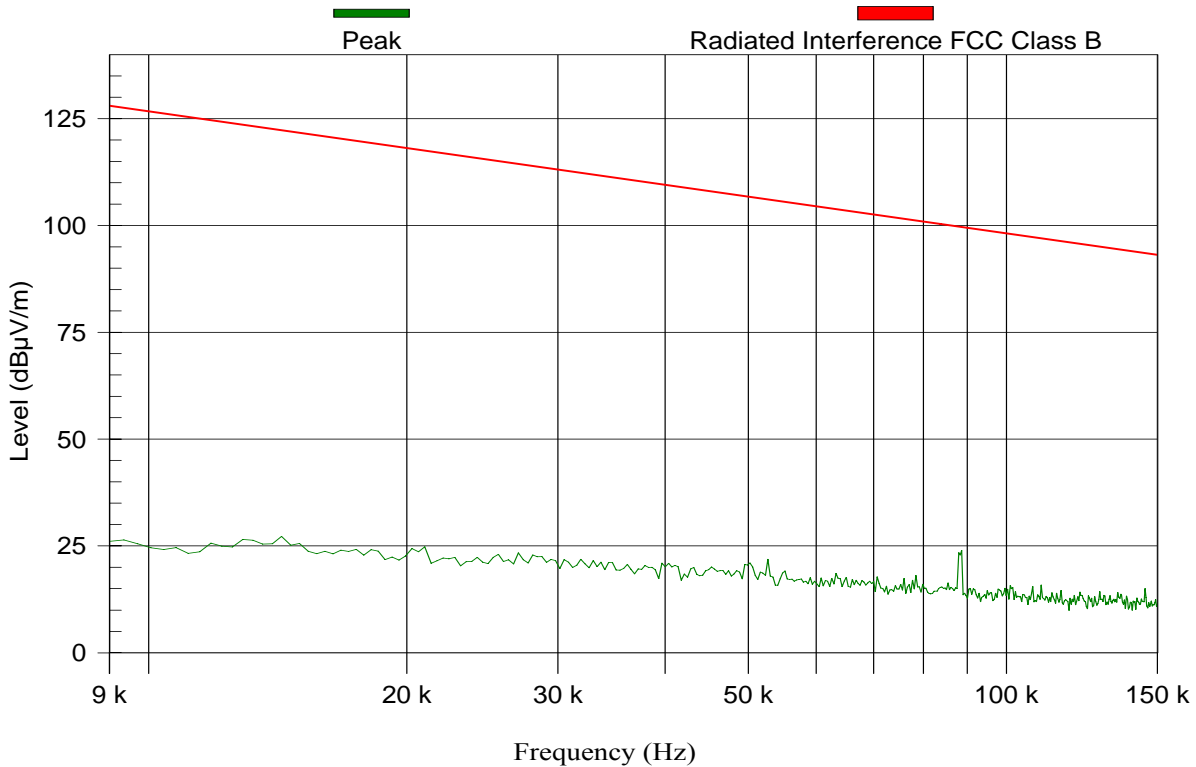

MAXIMUM RESULT DEVIATION:

Detect all peaks above 6 dB below the limit line with a maximum of 6 peaks.

None


Test Results Plot No 4

RE FCC Class B: 0.150-30 MHz

Test & EUT General Information		Receiver Setting	
EUT Name:	PYR-3011	Spect Analyzer	Hewlett Packard 7405A DC Coupling
S/N:	00 9C4E	Ref. Level:	100 dB μ V
Date of Test:	22/01/2009	RBW:	9 kHz
Test Engineer:	Ilya Arbitman	VBW:	30 kHz
Antenna:	LOOP ANT.HFH 2 Z2	Sweep Time:	Auto: 840.04 ms
Polarization:	Horizontal and Vertical	Pre Amplifier	LNA MITEQ 0.01-1GHz No-1

TEST REMARKS: Thursday, January 22, 2009 10:44:21 AM

RADIATED EMISSION PART 15.231 & 15.205

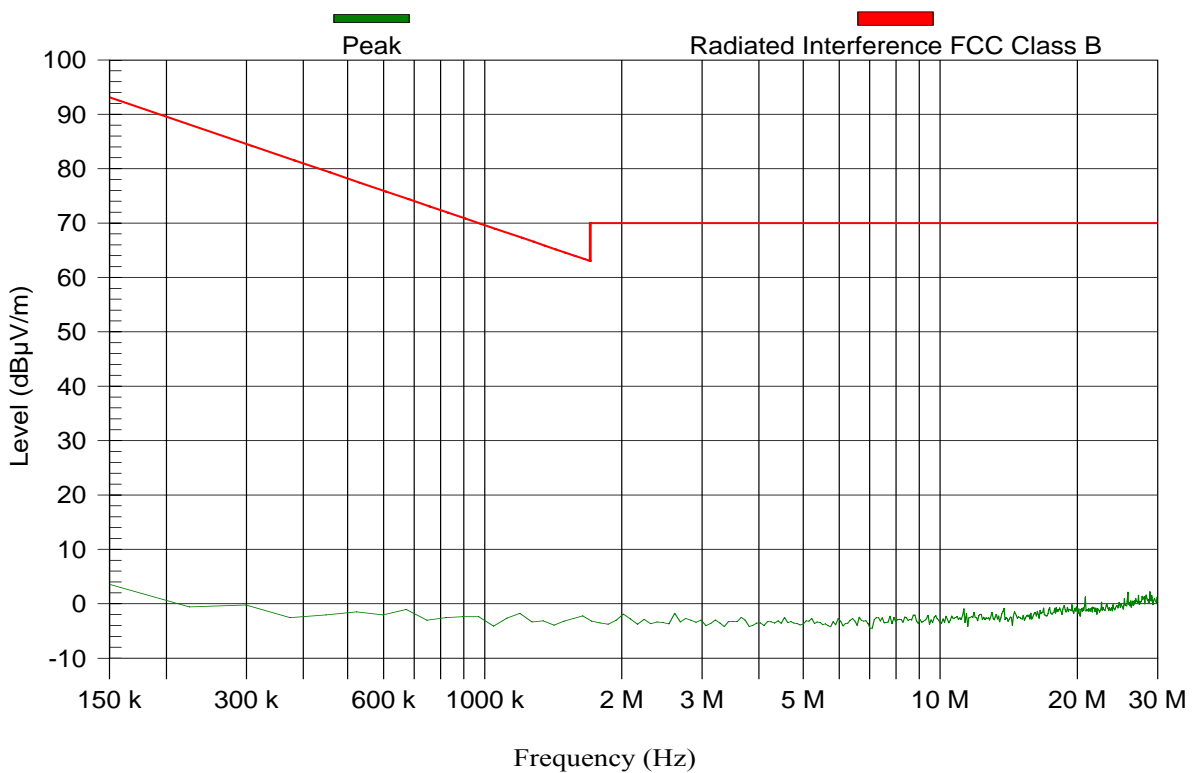

MAXIMUM RESULT DEVIATION:

Detect all peaks above 6 dB below the limit line with a maximum of 6 peaks.

None


Test Results Plot No 5

FCC 30-1000MHz TX

Test & EUT General Information		Receiver Setting	
EUT Name:	PYR-3011	Spect Analyzer	Hewlett Packard 7405 AC coupling
S/N:	009C4E	Ref. Level:	90 dB μ V
Date of Test:	21/01/2009	RBW:	100 kHz
Test Engineer:	Ilya Arbitman	VBW:	1000 kHz
Antenna:	Frankonia BTA red -L_A 3m	Sweep Time:	Auto: 97.32 ms
Polarization:	Horizontal and Vertical	Pre Amplifier	LNA MITEQ 0.01-1GHz No-1

TEST REMARKS: Wednesday, January 21, 2009 12:14:39 PM

RADIATED EMISSION PART 15.231 & 15.205

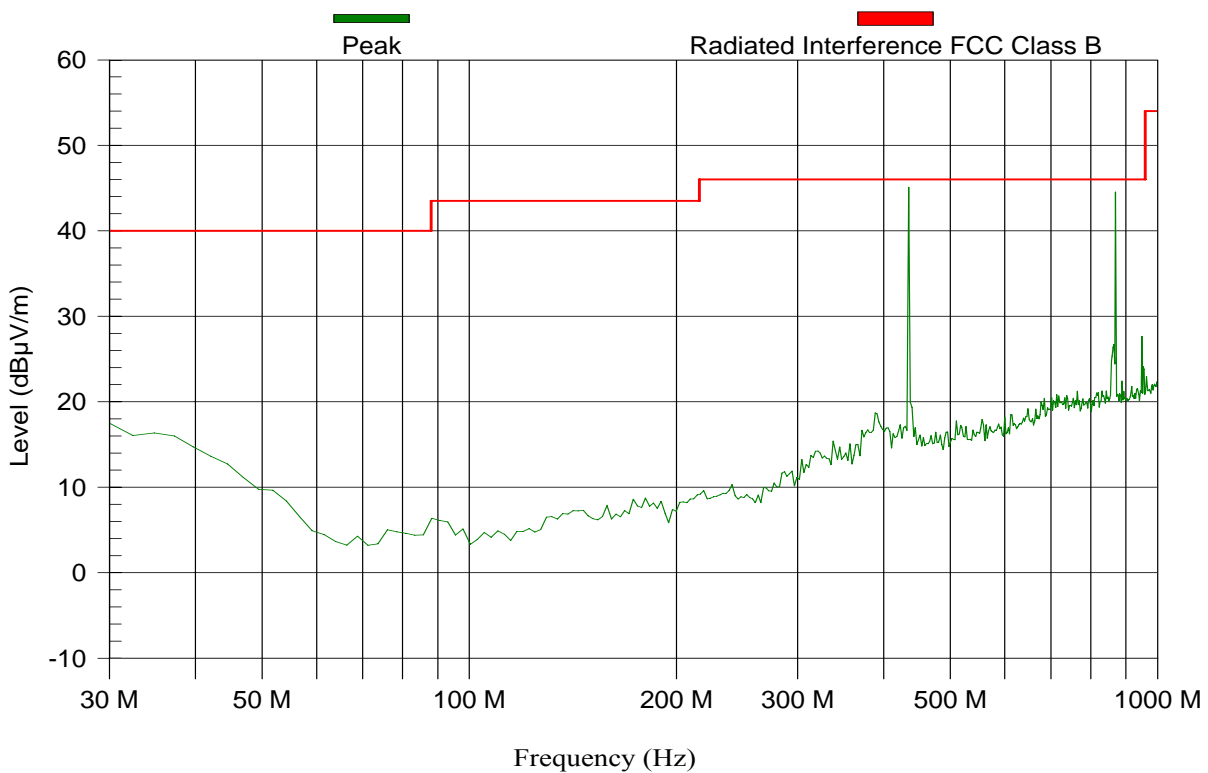

MAXIMUM RESULT DEVIATION:

Detect all peaks above 6 dB below the limit line with a maximum of 6 peaks.

Nr	Frequency (MHz)	PK Value (dB μ V/m)	QP Value (dB μ V/m)	PK Limit (dB μ V/m)	Result	Angle (degrees)	Height (m)	H/V
1	433.921	45.6	45.4	46	Pass	0	1.1	H
2	867.841	44.7	44.1	46	Pass	180	1	H


Test Results Plot No 7

FCC: 2.9-5 GHz

Test & EUT General Information		Receiver Setting	
EUT Name:	PYR-3011	Spect Analyzer	Hewlett Packard 7405 AC coupling
S/N:	009C4E	Ref. Level:	90 dB μ V
Date of Test:	21/01/2009	RBW:	1000 kHz
Test Engineer:	Ilya Arbitman	VBW:	1000 kHz
Antenna:	ARA DRG-118A 1-18GHz SER 1317	Sweep Time:	Auto: 10 ms
Polarization:	Horizontal and Vertical	Pre Amplifier	PLANAR 2-18 GHz 40dB

TEST REMARKS: Wednesday, January 21, 2009 4:38:55 PM

RADIATED EMISSION PART 15.231 & 15.205

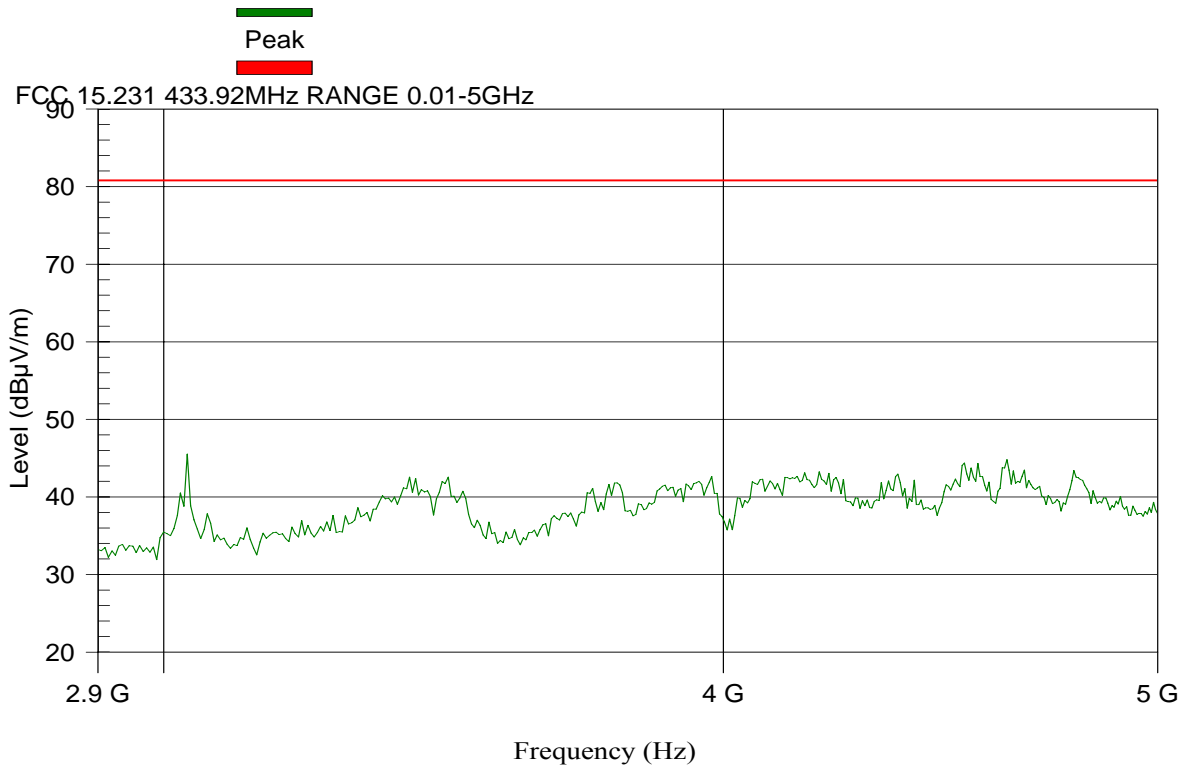

MAXIMUM RESULT DEVIATION:

Detect all peaks above 6 dB below the limit line with a maximum of 6 peaks.

None

d. Radiated emission part 15.209


Test Results Plot No 8

RE FCC Class B 9-150 KHz

Test & EUT General Information		Receiver Setting	
EUT Name:	PYR-3011	Spect Analyzer	Hewlett Packard 7405A DC Coupling
S/N:	00 9C4E	Ref. Level:	110 dB μ V
Date of Test:		RBW:	200 Hz
Test Engineer:	Ilya Arbitman	VBW:	300 Hz
Antenna:	R&S 9K-30M LOOP ANTENNA	Sweep Time:	Auto: 12.69 s
Polarization:	Vertical	Pre Amplifier	LNA MITEQ 0.01-1GHz No-1

TEST REMARKS: Wednesday, July 22, 2009 6:41:22 PM

FCC PART 15.209

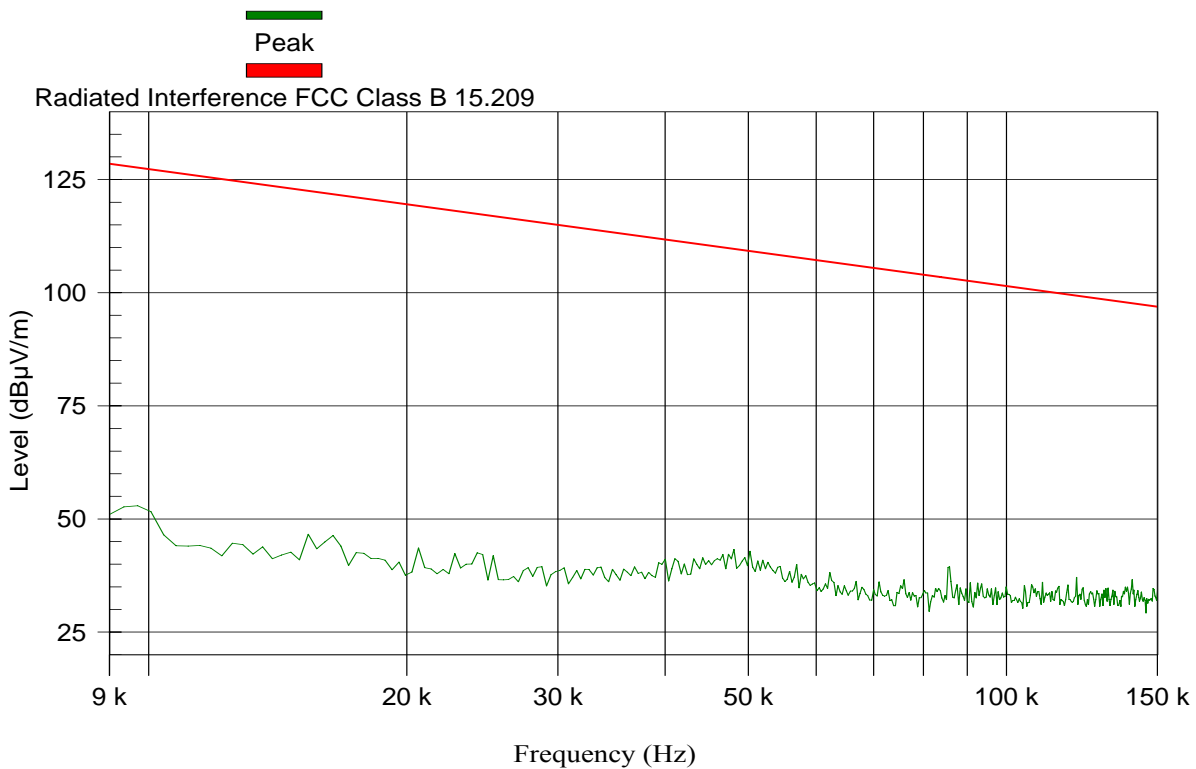

MAXIMUM RESULT DEVIATION:

Detect all peaks above 6 dB below the limit line with a maximum of 6 peaks.


None

Test Results Plot No 9

RE FCC Class B 0.150-30 MHz

Test & EUT General Information		Receiver Setting	
EUT Name:	PYR-3011	Spect Analyzer	Hewlett Packard 7405A DC Coupling
S/N:	00 9C4E	Ref. Level:	100 dB μ V
Date of Test:		RBW:	9 kHz
Test Engineer:	Ilya Arbitman	VBW:	30 kHz
Antenna:	R&S 9K-30M LOOP ANTENNA	Sweep Time:	Auto: 816.12 ms
Polarization:	Vertical	Pre Amplifier	LNA MITEQ 0.01-1GHz No-1

TEST REMARKS: Wednesday, July 22, 2009 6:41:32 PM
FCC PART 15.209

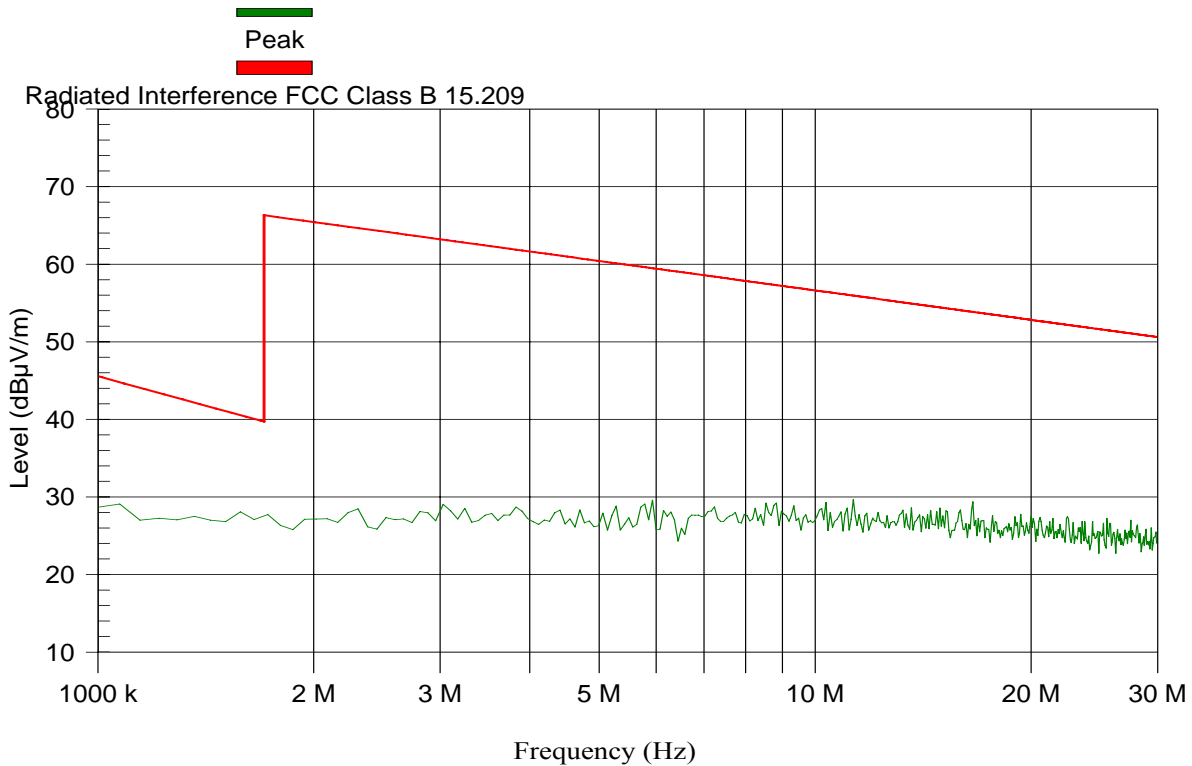

MAXIMUM RESULT DEVIATION:

Detect all peaks above 6 dB below the limit line with a maximum of 6 peaks.

None.


Test Results Plot No 10

RE FCC: 30-1000 MHz Spurious Emission

Test & EUT General Information		Receiver Setting	
EUT Name:	PYR-3011	Spect Analyzer	Hewlett Packard 7405 AC coupling
S/N:	00 9C4E	Ref. Level:	70 dB μ V
Date of Test:		RBW:	120 kHz
Test Engineer:	Ilya Arbitman	VBW:	1000 kHz
Antenna:	Frankonia BTA red -L_A 3m	Sweep Time:	Auto: 151.88 ms
Polarization:	Horizontal and Vertical	Pre Amplifier	LNA MITEQ 0.01-1GHz No-3

TEST REMARKS: Wednesday, July 22, 2009 3:18:35 PM

FCC PART 15.209

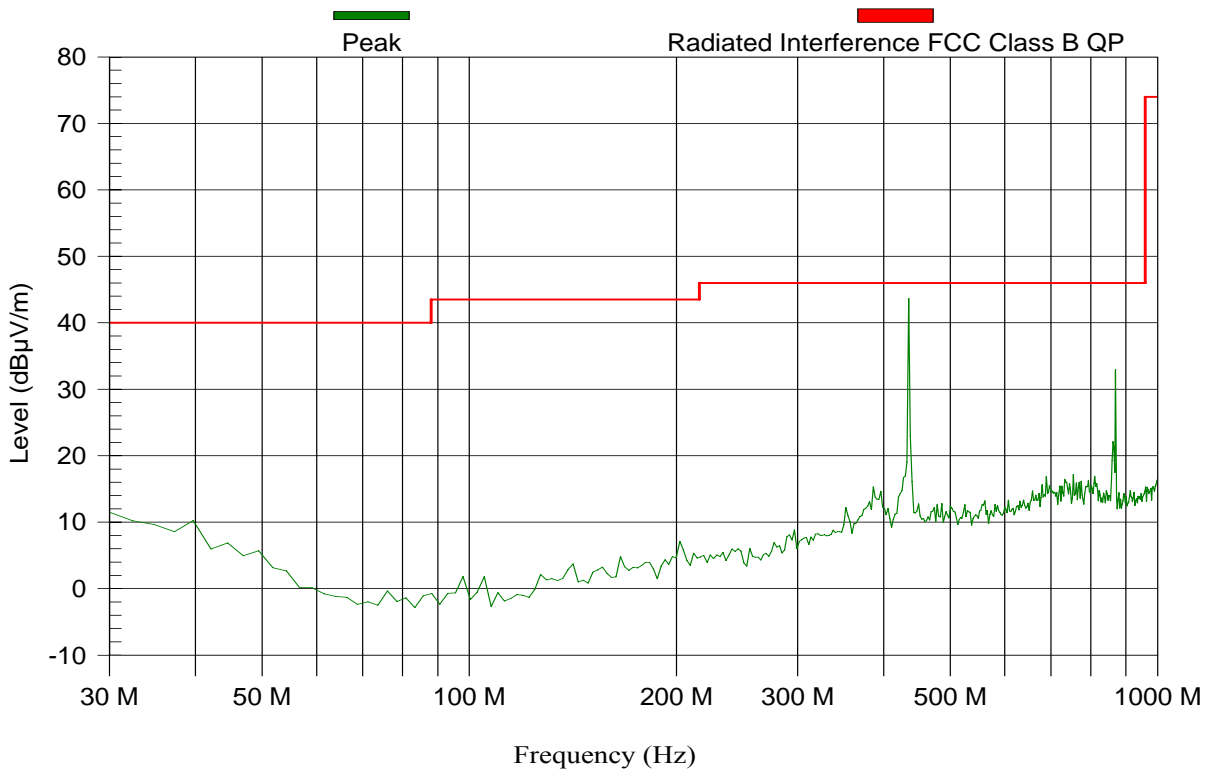

MAXIMUM RESULT DEVIATION:

Detect all peaks above 6 dB below the limit line with a maximum of 6 peaks.

Nr	Frequenc y (MHz)	PK Value (dB μ V/m)	QP Value (dB μ V/m)	PK Limit (dB μ V/m)	QP Limit (dB μ V/m)	Result	Angle (degree s)	Height (m)	H/V
1	433.922	43.8	43.6	46	46	Pass	355	1.8	V
2	867.842	33.5	32.7	46	46	Pass	355	1.8	V


Test Results Plot No 11

FCC 1-2.9GHz

Test & EUT General Information		Receiver Setting	
EUT Name:	PYR-3011	Spect Analyzer	Hewlett Packard 7405 AC coupling
S/N:	00 9C4E	Ref. Level:	90 dB μ V
Date of Test:		RBW:	1000 kHz
Test Engineer:	Ilya Arbitman	VBW:	3 MHz
Antenna:	ARA DRG-118A 1-18GHz SER 1317	Sweep Time:	Auto: 10 ms
Polarization:	Horizontal and Vertical	Pre Amplifier	pre amp 1GHz-4GHz

TEST REMARKS: Thursday, July 23, 2009 8:06:29 AM

FCC PART 15.209

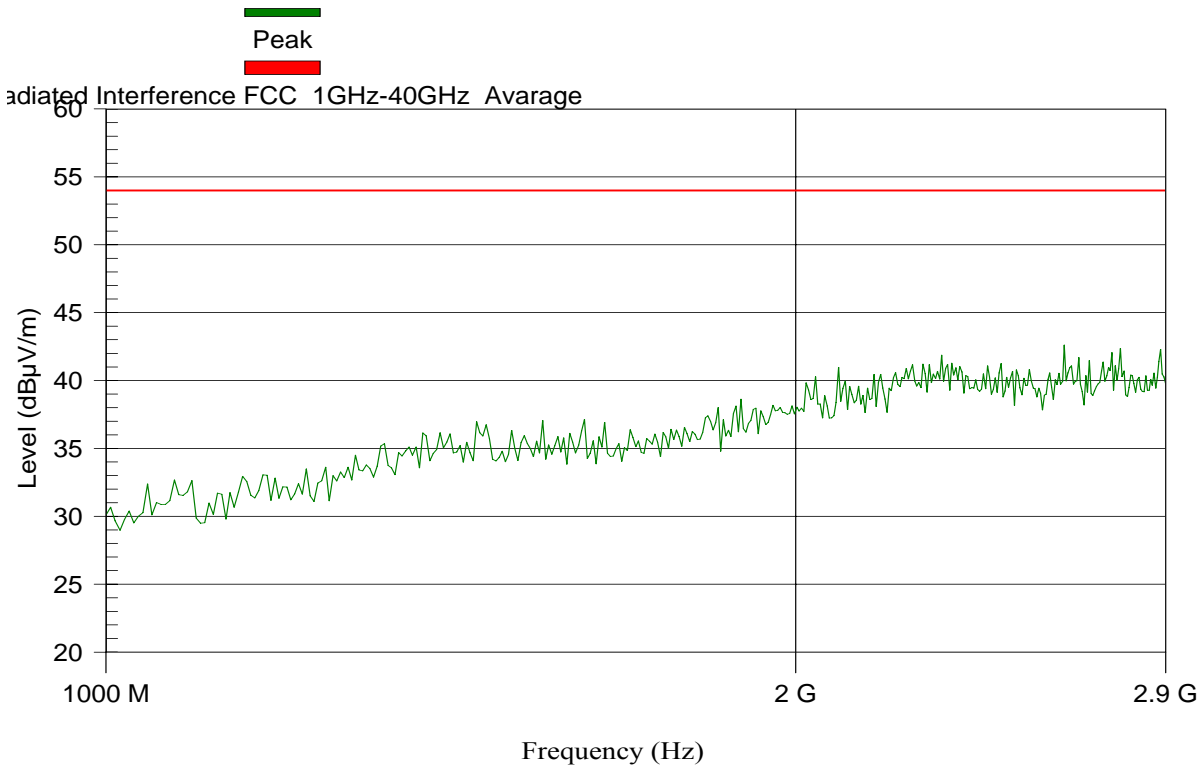

MAXIMUM RESULT DEVIATION:

Detect all peaks above 6 dB below the limit line with a maximum of 6 peaks.


None

Test Results Plot No 12

FCC 2.9-5GHz

Test & EUT General Information		Receiver Setting	
EUT Name:	PYR-3011	Spect Analyzer	Hewlett Packard 7405 AC coupling
S/N:	00 9C4E	Ref. Level:	90 dB μ V
Date of Test:		RBW:	1000 kHz
Test Engineer:	Ilya Arbitman	VBW:	1000 kHz
Antenna:	ARA DRG-118A 1-18GHz SER 1317	Sweep Time:	Auto: 10 ms
Polarization:	Horizontal and Vertical	Pre Amplifier	PLANAR 2-18 GHz 40dB

TEST REMARKS: Thursday, July 23, 2009 9:14:06 AM
FCC PART 15.209

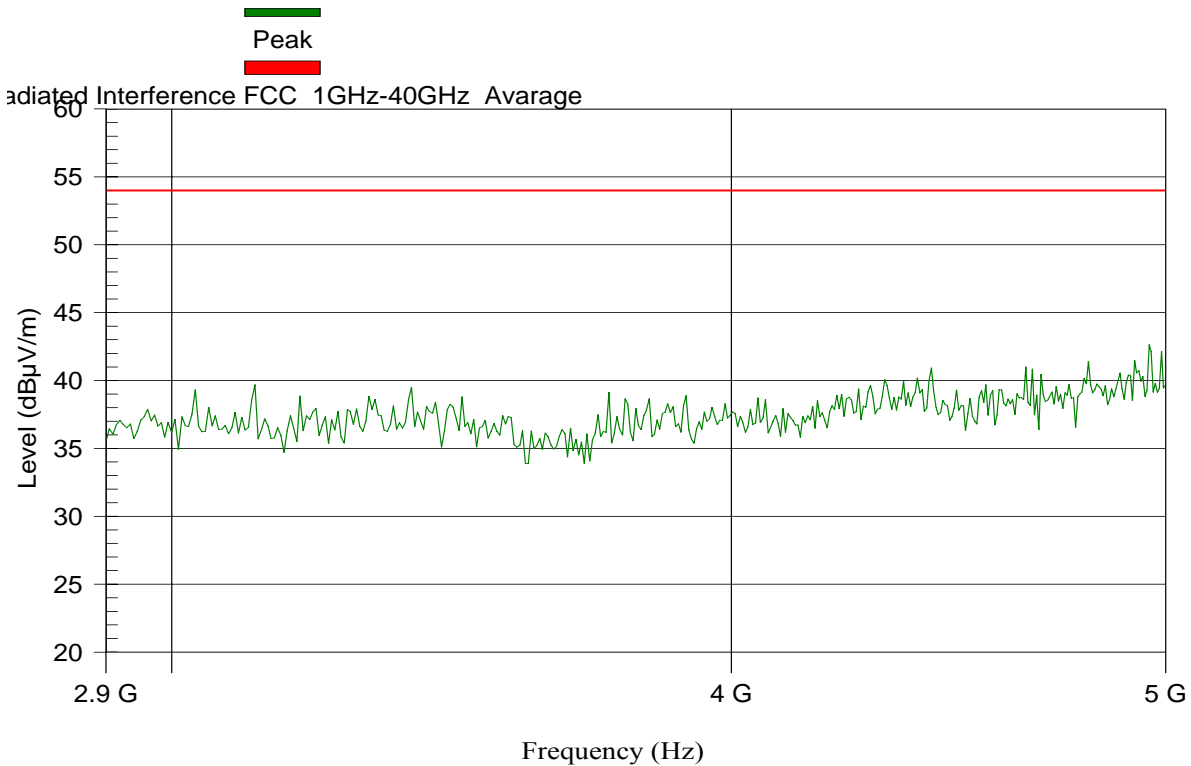


MAXIMUM RESULT DEVIATION:

Detect all peaks above 6 dB below the limit line with a maximum of 6 peaks.

None


Test Results Plot No 13

Transmission time

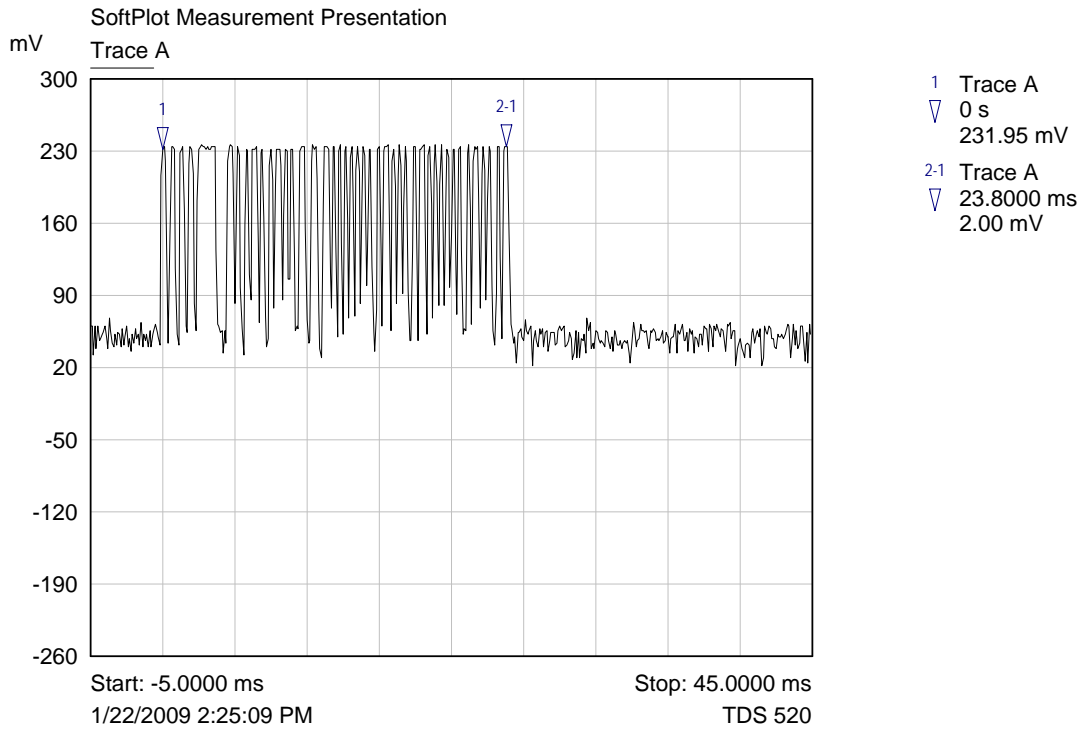


Test Results Plot No 14


Repetitive transmission time

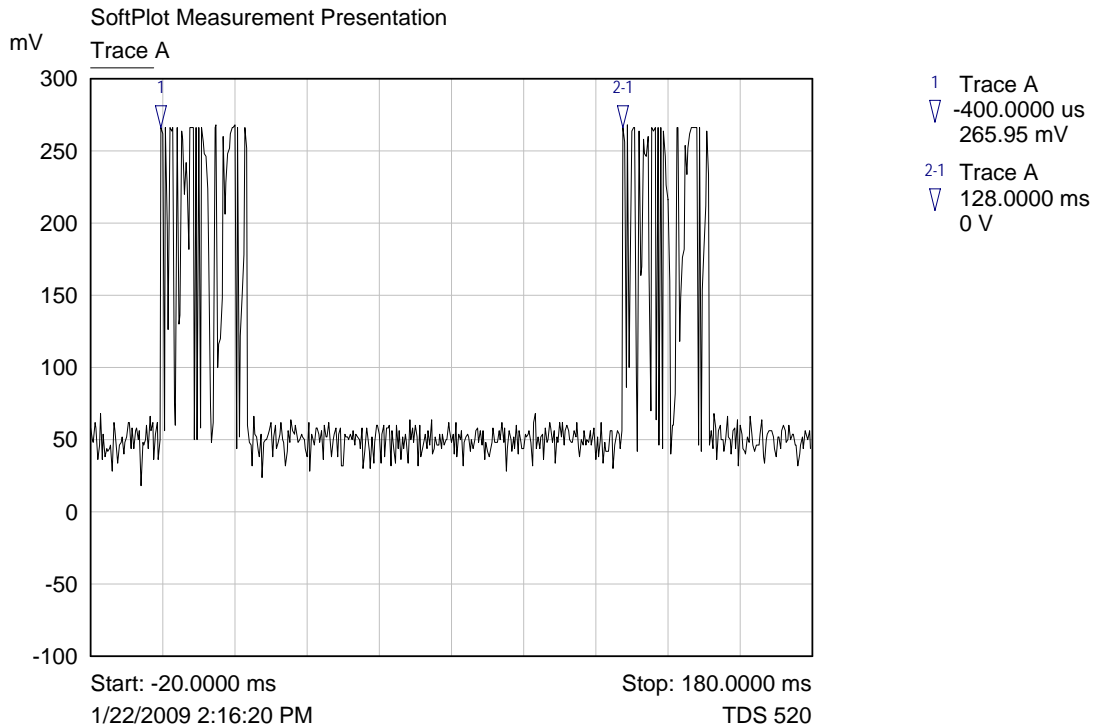


Test Results Plot No 15

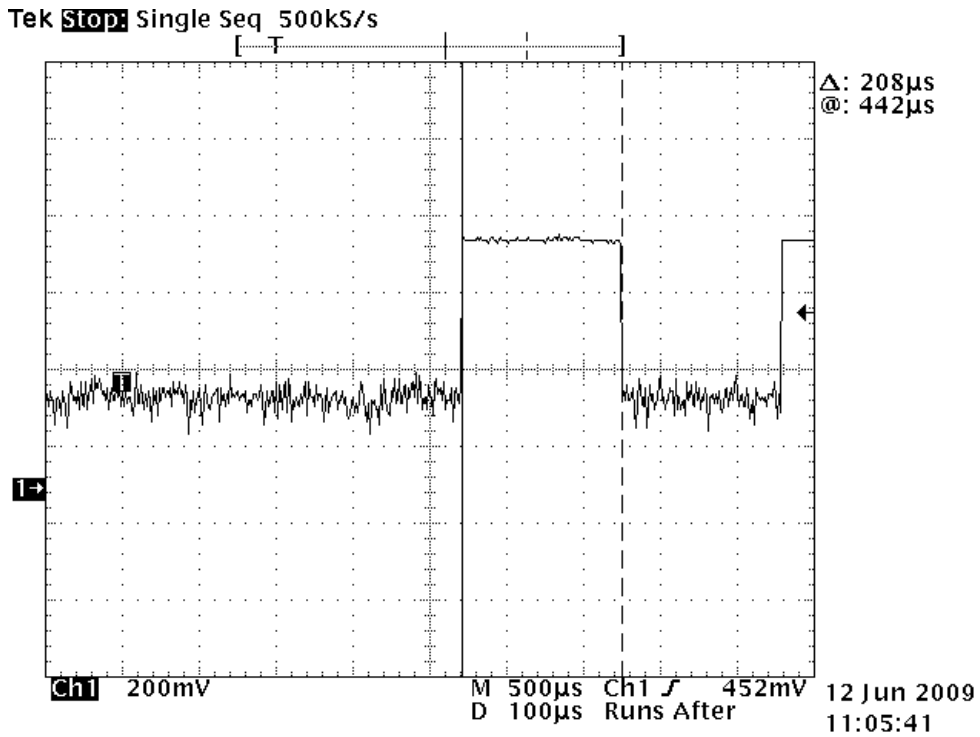


Test Results Plot No 16

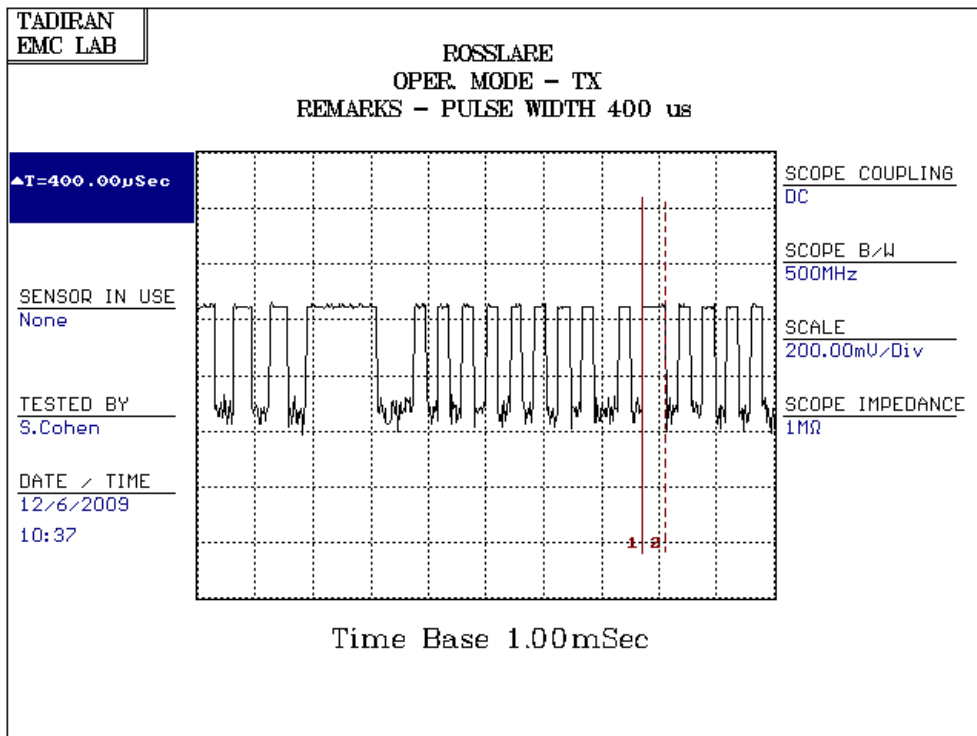

Test Results Plot No 17

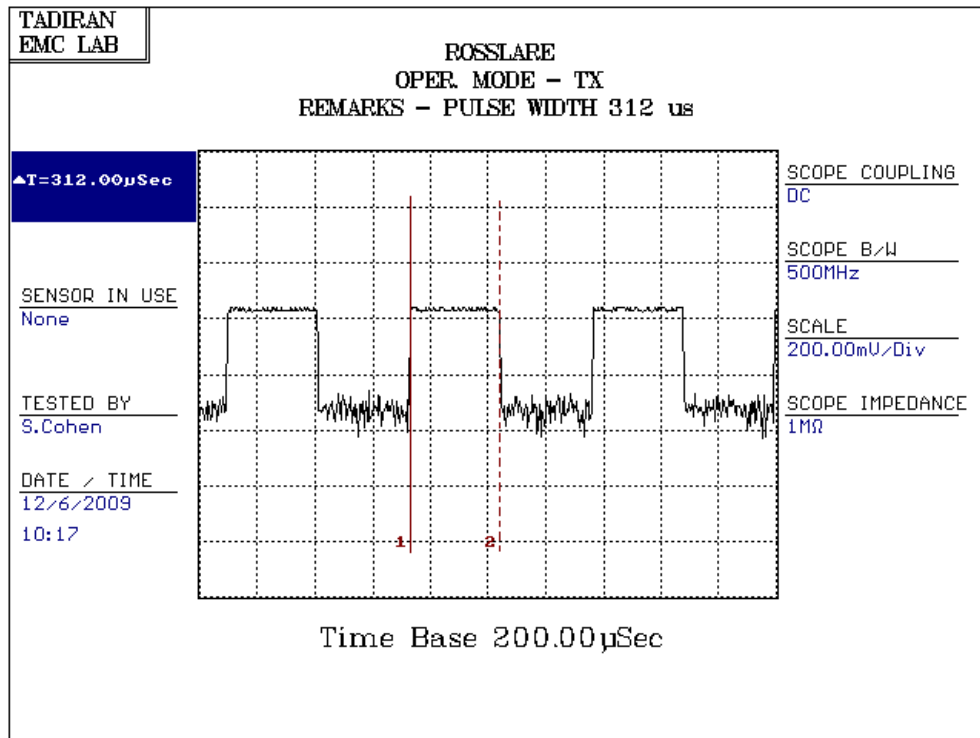

Test Results Plot No 18

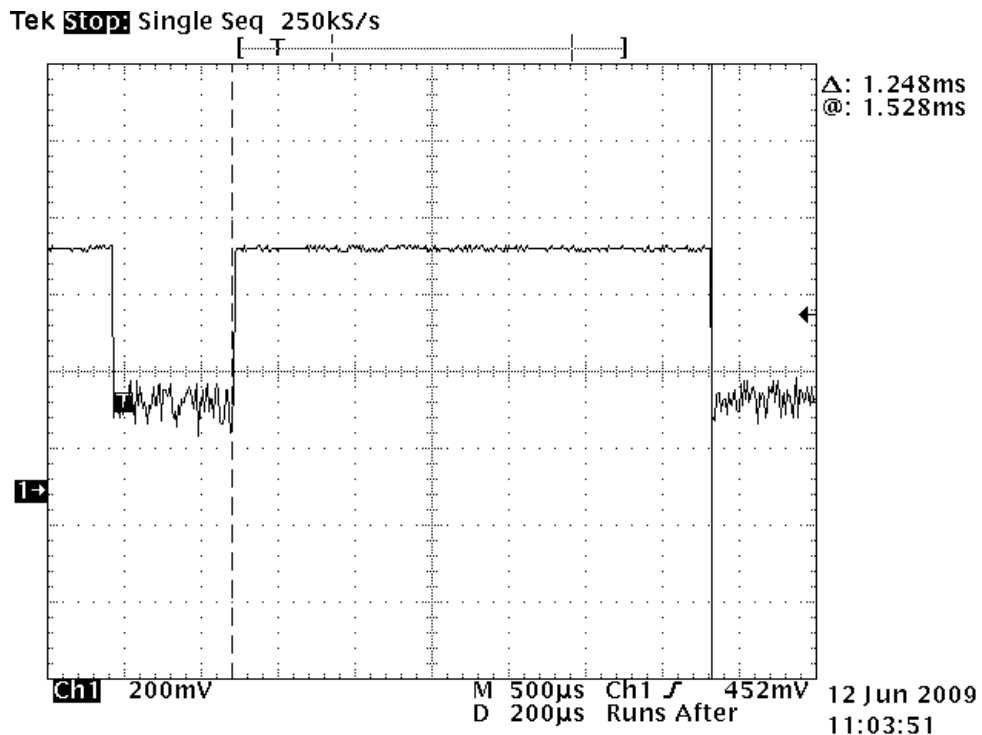

$$TX/ON=4 \times 312\mu s + 1248\mu s + 43 \times 208\mu s + 5 \times 400\mu s = 13.44\text{msec}$$

$$\text{Average Factor} = 20 \log (TXON/100)$$

$$20 \log 13.44/100 = -17.43$$

9 CORRECTION FACTORS

DOUBLE RIDGE HORN Model 3105 S/N:00-50C2-1C-C468 2052 Antenna Factor

Frequency (MHz)	Antenna Factor (db/m)
1000	24.4
2000	26.2
3000	30
4000	32.6
5000	33.8
6000	34.9
7000	36.2
8000	36.9
9000	37.8
10000	38.4
11000	39.1
12000	40.1
13000	42
14000	40.6
15000	39.3
16000	40.3

Antenna Factor for broadband antenna model BTA-L S/N:00-50C2-1C-C468 980045L

Frequency (KHz)	Ant. Factor (db/m)	Frequency (KHz)	Ant. Factor (db/m)
30	19.05	300	14.35
32	19.13	310	14.28
34	18.74	320	14.43
36	18.03	330	14.13
38	16.61	340	14.48
40	15.44	350	14.89
45	13.66	360	15.12
50	11.52	370	15.70
55	10.04	380	15.78
60	7.68	390	16.22
65	6.11	400	16.45
70	5.47	425	16.99
75	5.98	450	17.59
80	6.86	475	17.28
85	7.20	500	17.69
90	7.47	525	18.91
95	7.23	550	19.06
100	7.20	575	18.20
105	7.30	600	18.87
110	7.37	625	18.81
115	7.02	650	19.64
120	6.82	675	19.92
125	7.05	700	20.66
130	7.83	725	21.08
135	9.61	750	21.53
140	7.93	775	22.39
145	8.03	800	22.66
150	8.29	825	22.87
160	8.72	850	22.65
170	9.18	875	23.12
180	9.05	900	23.70
190	9.80	925	23.40
200	10.61	950	23.43
210	10.34	975	23.30
220	11.21	1000	24.02
230	11.69		
240	11.62		
250	11.85		
260	12.45		
270	13.16		
280	13.48		
290	13.74		

10 ABBREVIATIONS AND ACRONYMS

The following abbreviations and acronyms are applicable in this document

BW	Bandwidth
R.BW	Resolution Bandwidth
V.BW	Video Bandwidth
db	Decibel
EMI	Electromagnetic interference
E.U.T	Equipment under test
LISN	Line impedance stabilization network
S/N	Serial number
QP	Quasi peak
PK	Peak

11 PHOTOGRAPHS



