

Certificate of Test

February 2008

Cherry GmbH

Product Type : Wireless Keyboard

Model Number : G260

Test Report Number : 0710084R-01

Date of Test : November 01, 2007- December 01, 2007

This Product was tested to the following standards at the laboratory of Global EMC Standard Tech. Corp., and found Compliance.

Standards:

FCC Part 15 Subpart C Paragraph 15.249

ANSI C63.4: 2003

[http : //www.gestek.com.tw](http://www.gestek.com.tw)



Sharon Chang, President

GesTek EMC Lab

N0. 3, Pau-Tou-Tsuo Valley, Chia-Pau Tsuen,
Lin Kou Hsiang, Taipei County, Taiwan, R.O.C.
TEL:886-2-2603-5321
FAX:886-2-2603-5325

Date: February 12, 2008





**Test Report
Application for
Certification
On Behalf Of**

Cherry GmbH

**EUT:
Wireless Keyboard**

**Model Number:
G260**

**FCC ID:
GDDG260**

**Prepared for:
Cherry GmbH
Cherrystrasse D91275 Auerbach/Opf. Germany**

**Report By :Global EMC Standard Tech. Corp.
No.3 Pau-Tou-Tsuo Valley, Chia-Pau
Tsuen, Lin Kou Hsiang, Taipei County,
Taiwan, R.O.C.
Tel : 886-2-2603-5321
Fax : 886-2-2603-5325**

1. Test results given in this report only relate to the specimen(s) tested, measured.
2. This report is the property of GesTek, and shall not be reproduced, other than in full, without the written consent of GesTek.
3. The report must not be used by the client to claim product certification, approval, or endorsement by any agency of the federal government.
4. All data in this report are traceable to national standard or international standard.

TABLE OF CONTENTS

DESCRIPTION	PAGE
1. CERTIFICATION.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCTION DESCRIPTION.....	4
2.2 OPERATIONAL DESCRIPTION	5
2.3 TEST MODES & EUT COMPONENTS DESCRIPTION	5
2.4 SUMMARY OF TEST PROCEDURE AND TEST RESULTS.....	5
2.5 CONFIGURATION OF THE TESTED SYSTEM	6
2.6 TEST FACILITY.....	8
2.7 TEST SETUP	9
2.8 EUT OPERATING CONDITIONS.....	10
3. CONDUCTION EMISSION DATA.....	11
3.1 TEST EQUIPMENTS.....	11
3.2 BLOCK DIAGRAM OF TEST SETUP	11
3.3 CONDUCTED EMISSION LIMIT	12
3.4 OPERATING CONDITION OF EUT	12
3.5 EUT CONFIGURATION ON MEASUREMENT	12
3.6 CONDUCTED EMISSION DATA	12
3.7 CONDUCTED EMISSIONS MEASUREMENT RESULTS	13
4. RADIATION EMISSION DATA	15
4.1 TEST EQUIPMENT	15
4.2 OPEN TEST SITE SETUP DIAGRAM	15
4.3 RADIATED EMISSION LIMIT.....	16
4.4 EUT CONFIGURATION	17
4.5 OPERATING CONDITION OF EUT	17
4.6 RADIATED EMISSION DATA	17
4.7 RADIATED EMISSIONS MEASUREMENT RESULTS	18
5. BAND EDGE	31
5.1 TEST EQUIPMENT	31
5.2 BLOCK DIAGRAM OF TEST SETUP	31
5.3 BAND EDGE LIMIT	32
5.4 EUT CONFIGURATION	32
5.5 OPERATING CONDITION OF EUT	32
5.6 TEST RELULT.....	33
6. DUTY CYCLE.....	38
6.1 TEST EQUIPMENT	38
6.2 BLOCK DIAGRAM OF TEST SETUP	38
6.3 TEST RESULT	38
7. PHOTOGRAPHS FOR TEST.....	40
7.1 TEST PHOTOGRAPHS FOR CONDUCTION.....	40
7.2 TEST PHOTOGRAPHS FOR RADIATION	41
8. PHOTOGRAPHS FOR PRODUCT	44
9. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	53

1. CERTIFICATION

Applicant : Cherry GmbH

EUT Description : Wireless Keyboard
 Model Number : G260
 Serial Number : N/A
 Brand Name : CHERRY
 FCC ID : GDDG260
 Tested Power Supply : 1.5V By Battery
 Manufacturer : Sunrex Technology Corp
 Manufacturer Address : No. 188-1, Chung Cheng Rd., Ta Ya Shiang, Taichung Hsien, Taiwan, R.O.C.

MEASUREMENT PROCEDURES USED:

- CFR 47, Part 15** Radio Frequency Device Subpart C Intentional Radiators :2005
- ANSI C63.4** Methods of Measurements of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the range of 9kHz To 40GHz. 2003

THE MEASUREMENT SHOWN IN THE ATTACHMENT WAS MADE IN ACCORDANCE WITH THE PROCEDURES INDICATED, AND THE MAXIMUM ENERGY EMITTED BY THE EQUIPMENT WAS FOUND TO BE WITHIN THE ABOVE LIMITS APPLICABLE.



NVLAP LAB CODE 200085-0

Date of est : **November 01, 2007 – December 01, 2007**

In order to ensure the quality and accuracy of this document, the contents have been thoroughly reviewed by the following qualified personnel from GesTek Lab.

Documented By :

Rini Chen

Rini Chen / adm. Dept. Supervisor

Tested By :

John Wu

John Wu / eng. Dept. Engineer

Approved By :

Tonny Lin

Tonny Lin / General Manager

This test data shown below is traceable to National or international standard such as NIST/USA, etc. The laboratory's NVLAP accreditation in no way constitutes or implies product certification, approval, or endorsement by NVLAP or the United States government.

2. GENERAL INFORMATION

2.1 PRODUCTION DESCRIPTION

Product Name	: Wireless Keyboard
Model Number	: G260
Serial Number	: N/A
Brand Name	: CHERRY
FCC ID	: GDDG260
Modulation Type	: GFSK
Antenna Type	: Printed on PCB
Antenna Gain	: 0 dBi
Frequencg Range	: 2404MHz~2467MHz
Channel Number	: 16 Channel
Working Voltage	: 1.5V By Battery

Frequency of Each Channel:

Channel	Frequency (MHz)	Frequency (MHz)
0	2404	2452
1	2405	2453
2	2406	2454
3	2407	2455
4	2408	2456
5	2409	2457
6	2410	2458
7	2411	2459
8	2412	2460
9	2413	2461
10	2414	2462
11	2415	2463
12	2416	2464
13	2417	2465
14	2418	2466
15	2419	2467

Note:

1. This device is a Wireless Keyboard included wireless transmission of keyboard and receiver. The test report is for transmitter.
2. This device is 16 channel and perform the test, then record on this report.
3. The antenna of EUT is printer on PCB and conform to FCC 15.203.
4. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249.
5. The device of receiver to accordance with Part 15 regulations and under Declaration of Conformity and record of measurement in test report that the report number is 0710084F-01.

2.2 OPERATIONAL DESCRIPTION

This device is a Wireless Keyboard included wireless transmitter of keyboard and receiver.

This device is 16 channel with two frequency hopping carrier per each channel. The channel control are set by manufacturer and only one channel is used for end users.

End users can not change channel by themselves.

The device is operated in 2.404 to 2.467GHz with GFSK modulation.

The Receiver is USB interface and it is capable to receive signal from transmitter to control PC or notebook.

Another information please refer to users manual.

2.3 TEST MODES & EUT COMPONENTS DESCRIPTION

EUT: Wireless Keyboard, M/N: G260		
The EUT tested with PC System. (DELL, M/N: Latitude D600 PPO5L)		
Test Mode	Mode 1	Mode 2
	Transmitter	Charge Mode

2.4 SUMMARY OF TEST PROCEDURE AND TEST RESULTS

Test Item	Applied Standard Section	Test Result
Conduction Emission	15.109,ANSI C63.4 Section 7	Pass (refer to section 3.7)
Radistion Emission	15.209, ANSI C63.4 Section 8	Pass (refer to section 4.7)
Peak Power Output	15.249(a), ANSI C63.4 Section 13 & Annex I	Pass (refer to section 4.7)
Band Edge	15.249(d) , ANSI C63.4 Section 13 & Annex I	Pass (refer to section 5.6)

2.5 CONFIGURATION OF THE TESTED SYSTEM

The FCC IDs/Types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Mode 2		
Device	No.	Configuration
21" COLOR Monitor	M01-060	Manufacturer : COMPAQ Model Number : PE1143-41 Serial Number : N/A BSMI ID : R31708 FCC ID : N/A Data Cable : Shielded, detachable, 1.5m, VGA Cable Power Cord : 3Pin, Shielded, Detachable, 1.5m
Headset & Earphone	E01-167	Manufacturer : Good Vision Model Number : LY-MIC02 Serial Number : N/A Data Cable : Non-Shielded, Undetachable, 1.8 m Power Cord : N/A
PS2 Keyboard	K01-107	Manufacturer : acer Model Number : T200-P BSMI ID : R41097 FCC ID : N/A Data Cable : Shielded, Undetachable, 1.8 m
PS2 Mouse	M02-411	Manufacturer : detroit Model Number : CanMouse CM-309 Serial Number : N/A BSMI ID : R63159 FCC ID : N/A Data Cable : Shielded, Undetachable, 1.5m
Printer	P01-015	Manufacturer : Hewlett Packard Model Number : 2225C Serial Number : 2512S40942 BSMI ID : 3892A957 FCC ID : BS46XU2225C Data Cable : Shielded, Detachable, 1.2m, Parallel Cable Power Cord : Non-Shielded, Detachable, 1.8m

Mode 2		
Device	No.	Configuration
PC System	HP PC 09	Model Number : A1210TW BSMI ID : R33001 C.P.U : AMD Sempron 3200+ DDR : Samsung DDR-400 256M *1 H.D.D. : Manufacturer :Hitachi M/N:HDT722516DLA380 BSMI ID:D33373 DVD-ROM : Manufacturer :Lite-on M/N:SOHC-4836C BSMI ID:D43008 Mother Board : HP, M/N:MS-7184 BSMI ID:D33088 S.P.S : HIPRP, M/N:SS-330HB Input:100-127V/200-240V 47~63 Hz Output:+5V/25A,-12V/0.8A,+12V/19A,+3.3V/18A +5V _{SB} /2A BSMI ID:R32098


2.6 TEST FACILITY

Ambient conditions in the laboratory:


ITEMS	Requirement
TEMPERATURE (°C)	10-40
HUMIDITY (%RH)	10-90
BAROMETRIC PRESSURE (mbar)	860-1060
FCC SITE DESCRIPTION	Aug. 10, 1995 /Aug. 25, 1998 File on FCC Engineering Laboratory Federal Communication Commission 7435 Oakland Mills Road Columbia, MD 21046 Reference 31040/SIT1300F2
NVLAP LAB. CODE	200085-0 United States Department of commerce National Institute of Standards and Technology National Voluntary Laboratory Accreditation Program Accreditation on NVLAP effective through Sep. 30, 2008 For CISPR 22, FCC Method and AS/NZS CISPR 22 Measurement.
Taiwan Accreditation Foundation (TAF)	Recognized by the Council of Taiwan Accreditation Foundation and confirmed to meet the requirements of ISO/IEC 17025. Registration No.: 1082 Registration on TAF effective through Sep. 19, 2009

2.7 TEST SETUP

Mode 1

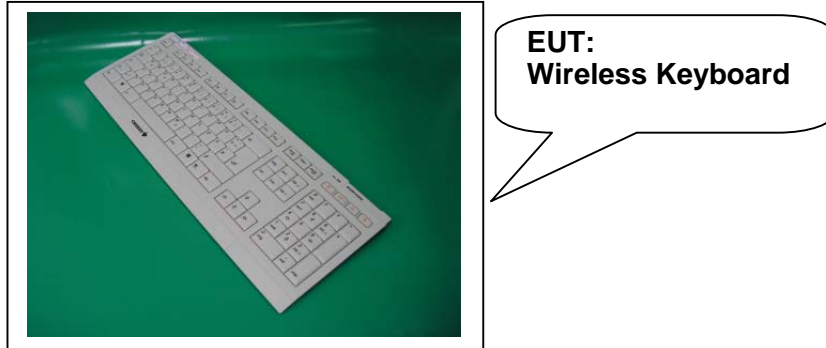

Mode 2

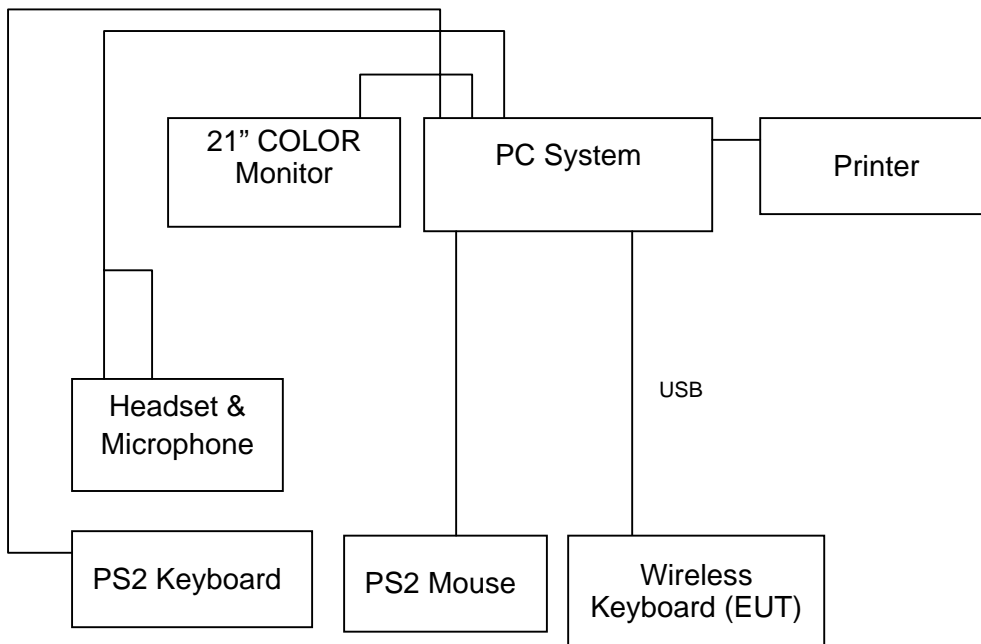

2.8 EUT OPERATING CONDITIONS

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

1. Setup the EUT and simulators as shown on 2.7.
2. Turn on the power of all equipments.
3. The transmitter will transmit the signal continue.
4. Confirm the receiver is receive signal continue.
5. Repeat the above steps.


3. CONDUCTION EMISSION DATA

3.1 TEST EQUIPMENTS

The following test equipment are used during the conducted power line tests:

Item	Instrument	Manufacturer	Model	Serial No.	Next Cal.
1	Test Receiver	R & S	ESCS30	825022/003	2008.05.25
2	LISN	ROLF HEINE	NNB-2/16Z	99042	2007.12.21
3	LISN	ROLF HEINE	NNB-2/16Z	98091	2008.07.22
4	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	357.8810.52	2008.08.01
5	RF CABLE	GesTek	N/A	GTK-E-A152-01	2007.12.14
6	50 Ohm Terminator	GesTek	N/A	GTK-E-A124-01	N/A
7	Shielded Room	GesTek	N/A	B5	N/A

3.2 BLOCK DIAGRAM OF TEST SETUP

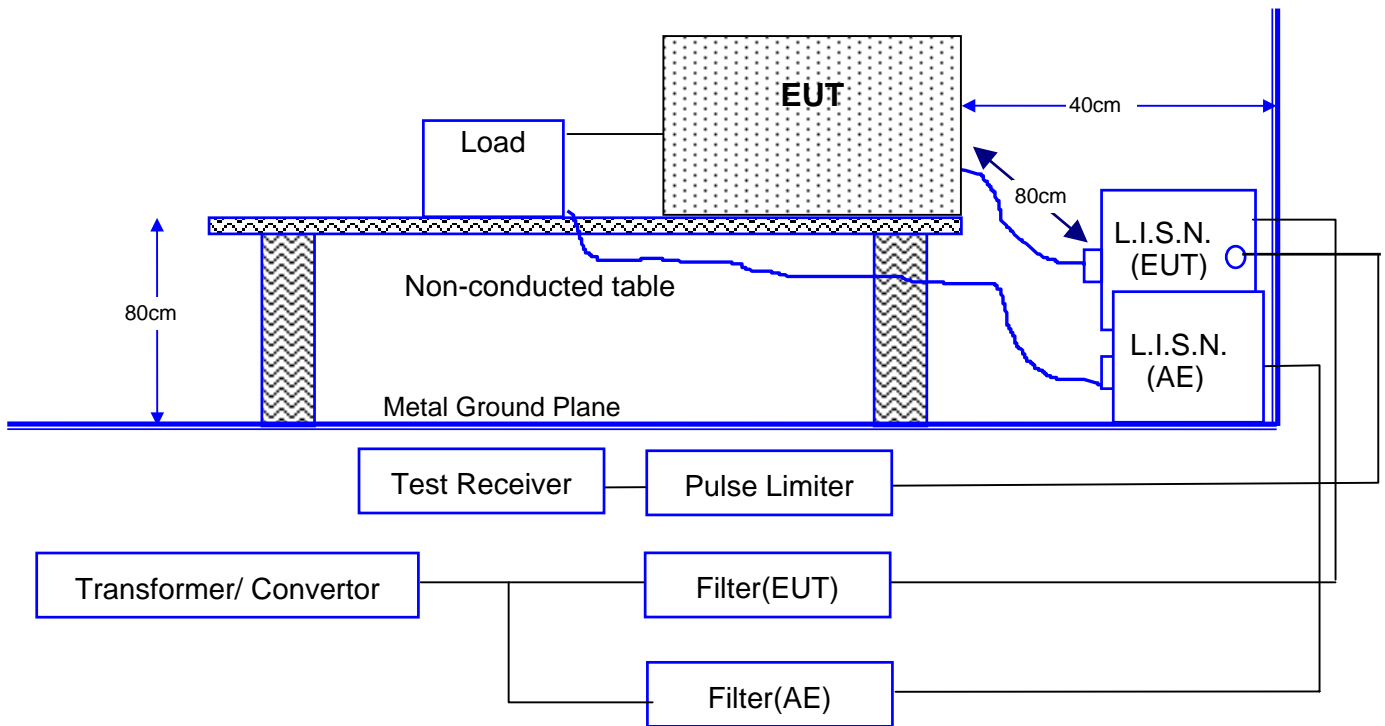

Note: This is a representative setup diagram for Table-top EUT.
 For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

3.3 CONDUCTED EMISSION LIMIT

☒FCC 15.207

Frequency	Conducted Limits dB(μ V)			
	Class A		Class B	
MHz	QUASI-PEAK	AVERAGE	QUASI-PEAK	AVERAGE
0.15 to 0.50	79	66	66 to 56	56 to 46
0.50 to 5.0	73	60	56	46
5.0 to 30	60	60	60	50

Remarks : In the Above Table, the tighter limit applies at the band edges.

3.4 OPERATING CONDITION OF EUT

Same as section 2.8.

3.5 EUT CONFIGURATION ON MEASUREMENT

The equipment, which is listed 3.1, is installed on Conducted Power Line Test to meet the Commission requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 3.2, was placed on a non-conductive table whose total height equal to 80cm. Powered from one L.I.S.N. which signal output to receiver, and the other peripherals was powered from another L.I.S.N. which signal output was terminated by 50 Ω .

3.6 CONDUCTED EMISSION DATA

The measurement range of conducted emission from [0.15 MHz to 30 MHz](#) was investigated. All readings are quasi-peak and average values with a resolution Bandwidth of 9 KHz. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range for all the test modes. Then the worst modes were reported the following data pages

3.7 CONDUCTED EMISSIONS MEASUREMENT RESULTS

Date of Test	November 17, 2007	Temperature	26
EUT	Wireless Keyboard	Humidity	60 %
Test Mode	Mode 2		


Line

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V	Limit dB μ V	Over Limit dB	Detector
1	0.1806	25.91	9.59	35.50	64.46	-28.96	QP
2	0.1806	25.37	9.59	34.96	54.46	-19.50	AVG
3	0.2391	23.04	9.60	32.64	62.13	-29.49	QP
4	0.2391	21.27	9.60	30.87	52.13	-21.26	AVG
5	0.4003	26.13	9.63	35.76	57.85	-22.09	QP
6	0.4003	24.07	9.63	33.70	47.85	-14.15	AVG
7	0.5100	26.81	9.65	36.46	56.00	-19.54	QP
8	0.5100	23.48	9.65	33.13	46.00	-12.87	AVG
9	0.8073	23.83	9.66	33.49	56.00	-22.51	QP
10	0.8073	23.29	9.66	32.95	46.00	-13.05	AVG
11	0.9092	23.76	9.66	33.42	56.00	-22.58	QP
12	0.9092	22.59	9.66	32.25	46.00	-13.75	AVG

Remarks :

1. All readings are Quasi-peak and Average values.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = L.I.S.N. insertion loss + cable loss
5. " " means that this data is the worse case measurement level.

Line

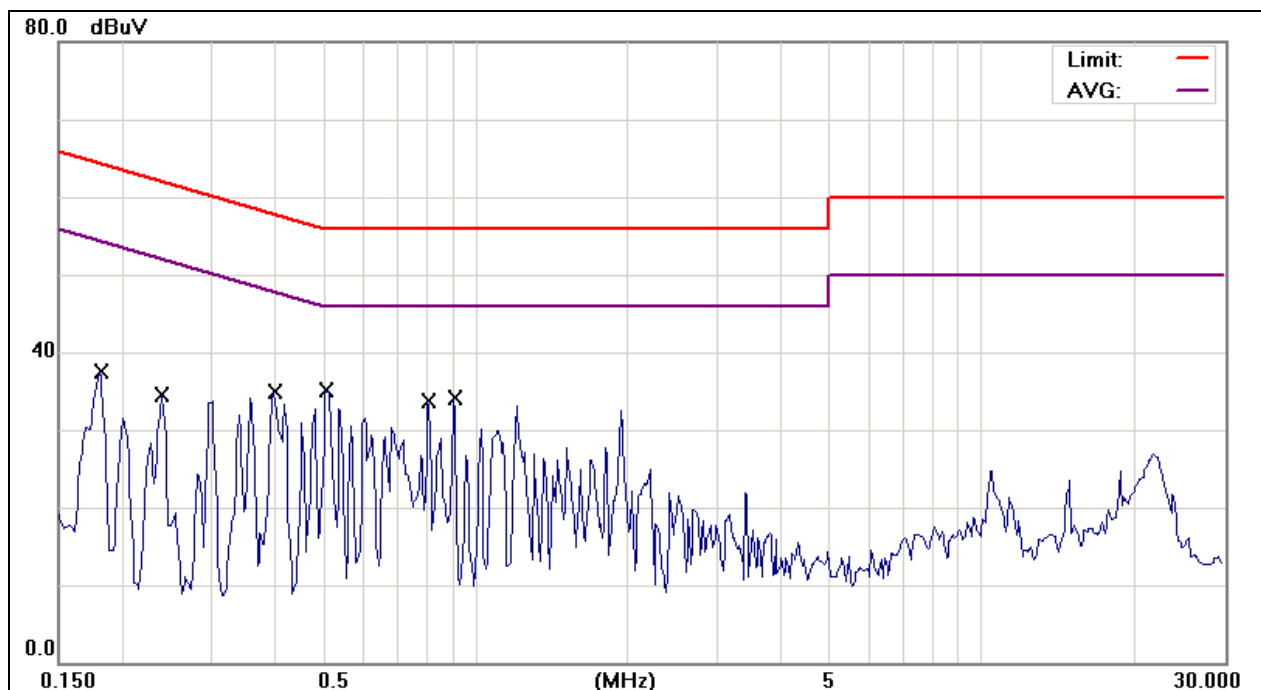

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "AVG" refers to the limit of Average.

Date of Test	November 17, 2007	Temperature	26
EUT	Wireless Keyboard	Humidity	60 %
Test Mode	Mode 2		


Neutral

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV	Limit dBμV	Over Limit dB	Detector
1	0.1808	24.90	9.59	34.49	64.45	-29.96	QP
2	0.1808	24.27	9.59	33.86	54.45	-20.59	AVG
3	0.2006	24.48	9.59	34.07	63.59	-29.52	QP
4	0.2006	24.10	9.59	33.69	53.59	-19.90	AVG
5	0.3002	24.39	9.61	34.00	60.24	-26.24	QP
6	0.3002	21.66	9.61	31.27	50.24	-18.97	AVG
7	0.3993	24.46	9.63	34.09	57.87	-23.78	QP
8	0.3993	23.93	9.63	33.56	47.87	-14.31	AVG
9	0.5128	26.51	9.65	36.16	56.00	-19.84	QP
10	0.5128	23.93	9.65	33.58	46.00	-12.42	AVG
11	0.6019	22.87	9.65	32.52	56.00	-23.48	QP
12	0.6019	20.75	9.65	30.40	46.00	-15.60	AVG

Remarks :

1. All readings are Quasi-peak and Average values.
2. Measurement = Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = L.I.S.N. insertion loss + cable loss
5. " " means that this data is the worse case measurement level.

Neutral

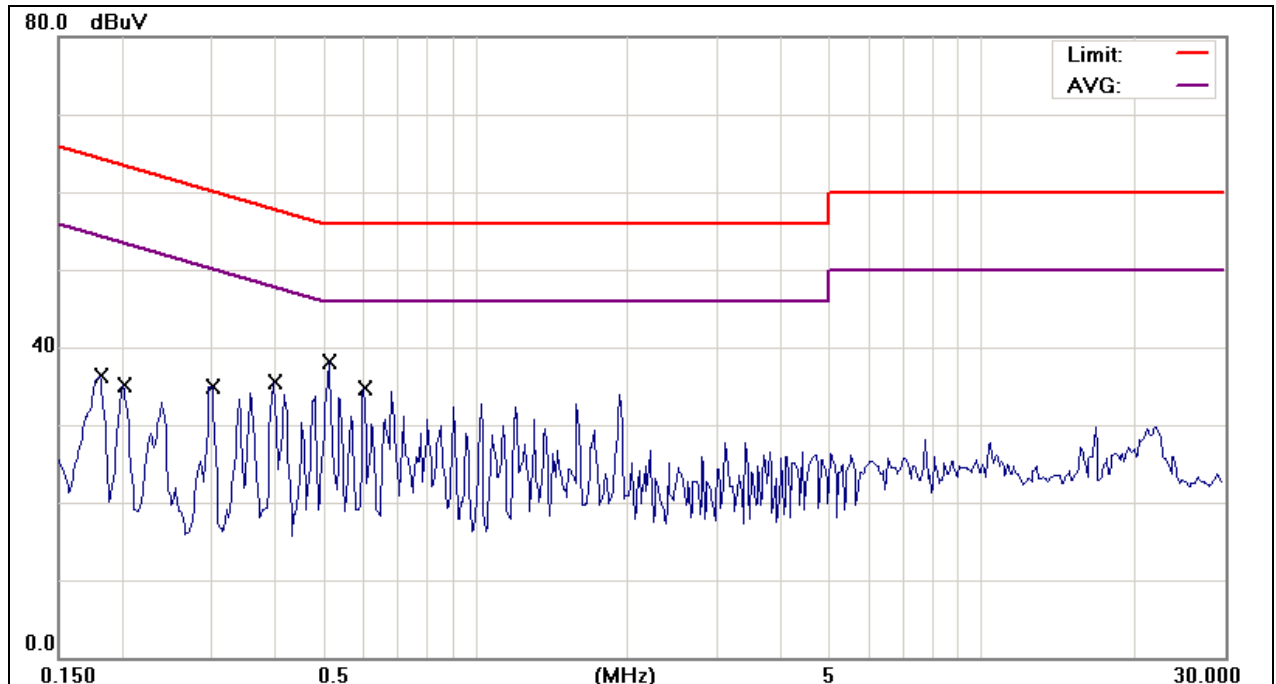

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "AVG" refers to the limit of Average.

4. RADIATION EMISSION DATA

4.1 TEST EQUIPMENT


The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Model	Serial No.	Next Cal.
1	Test Receiver	R & S	ESCS30	825022/003	2008.05.25
2	Spectrum Analyzer	ADVANTEST	R3172	101202152	2008.08.27
3	Power Meter	Rohde & Schwarz	NRVS	100666	2008.04.03
4	Peak Power Sensor	Rohde & Schwarz	NRV-Z32	836019-058	2008.04.03
5	Pre-Amplifier	EMV-Technik	PA303	N/A	2008.04.18
6	Pre-Amplifier	HP	8447D	2944A08273	2008.10.08
7	BILOG ANTENNA	SCHAFFNER	CBL6112B	2580	2008.11.22
8	HORN ANTENNA	SCHWARZBECK	BBHA 9120	D243	2007.12.24
9	CABLE	GTK	N/A	GTK-E-A152-01	2007.12.14
10	Open Site	GesTek	N/A	B2	2008.11.04
11	Test Program Software	GesTek	N/A	GTK-E-S001-01	N/A

4.2 OPEN TEST SITE SETUP DIAGRAM

Note: This is a representative setup diagram for Table-top EUT.

For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

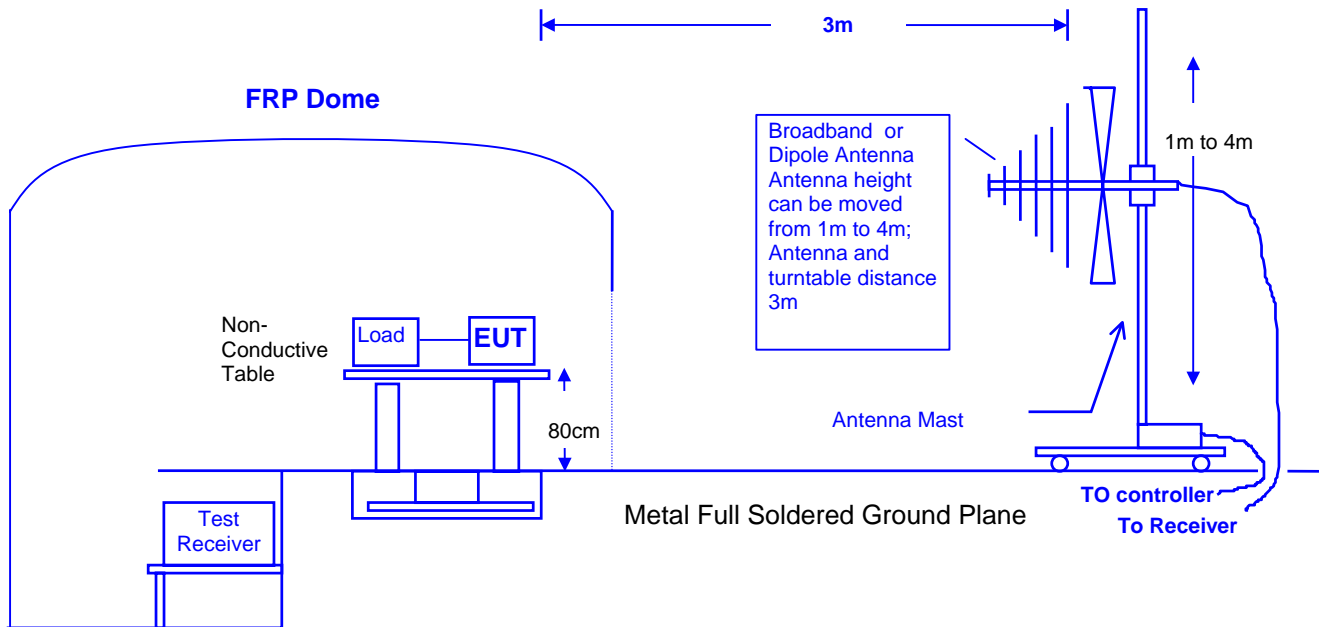

4.3 RADIATED EMISSION LIMIT

General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

Frequency	Distance	Field Strength	
MHz	Meter	$\mu\text{V/M}$	$\text{dB}\mu\text{V/M}$
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0

Remarks :

1. RF Voltage ($\text{dB}\mu\text{V/m}$) = $20 \log$ RF Voltage ($\mu\text{V/m}$)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Fundamental and Harmonics Emission Limits

Frequency	Distance	Field Strength of Fundamental		Field Strength of Harmonics	
		$\mu\text{V/M}$	$\text{dB}\mu\text{V/M}$	$\mu\text{V/M}$	$\text{dB}\mu\text{V/M}$
902-928	3	50	94	500	54
2400-2483.5	3	50	94	500	54
5725-5875	3	50	94	500	54

Remarks :

1. RF Voltage ($\text{dB}\mu\text{V/m}$) = $20 \log$ RF Voltage ($\mu\text{V/m}$)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4 EUT CONFIGURATION

The equipment which is listed 2.6 are installed on Radiated Emission Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 3.2, was placed on a non-conductive table whose total height equaled 80 cm. This table can be rotated 360 degree. The measurement antenna was mounted to a non-conductive mast capable of moving the antenna vertically. Antenna height was varied from 1 meter to 4 meters and the system under test was rotated from 0 degree through 360 degrees relative to the antenna position and polarization (Horizontal and Vertical). Also the I/O cable position was investigated to find the maximum emission condition.

4.5 OPERATING CONDITION OF EUT

Same as section 2.7.

4.6 RADIATED EMISSION DATA

The measurement range of radiated emission, which is from [30 MHz to 10 Harminics](#), was investigated. All readings below 1GHz are quasi-peak values with a resolution bandwidth of 120 KHz. Above 1GHz are peak and avg. values with a resolution bandwidth of 1MHz. The initial step in collecting radiated emission data is a spectrum analyzer peak scans of the measurement range for all the test modes and then use test receiver for final measurement. Then the worst modes were reported the following data pages.

4.7 RADIATED EMISSIONS MEASUREMENT RESULTS

4.7.1 HARMONIC RADIATED EMISSIONS


Date of Test	November 07, 2007	Temperature	26 deg/C
EUT	Wireless Keyboard	Humidity	60 %RH
Working Cond.	Mode 1	Display Pattern	H Pattern
Antenna distance	3m at Horizontal	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	229.0579	40.79	-11.55	29.24	46.00	-16.76	QP
2	243.0049	38.97	-10.51	28.46	46.00	-17.54	QP
3	463.0081	37.79	-4.85	32.94	46.00	-13.06	QP
4	578.0059	34.17	-2.69	31.48	46.00	-14.52	QP
5	809.1238	30.38	1.02	31.40	46.00	-14.60	QP
6	925.4923	24.70	2.96	27.66	46.00	-18.34	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “ ” means that this data is the worse case measurement level.
6. The emission level of other frequencies are very lower than the limit.

80.0 dBμV/m

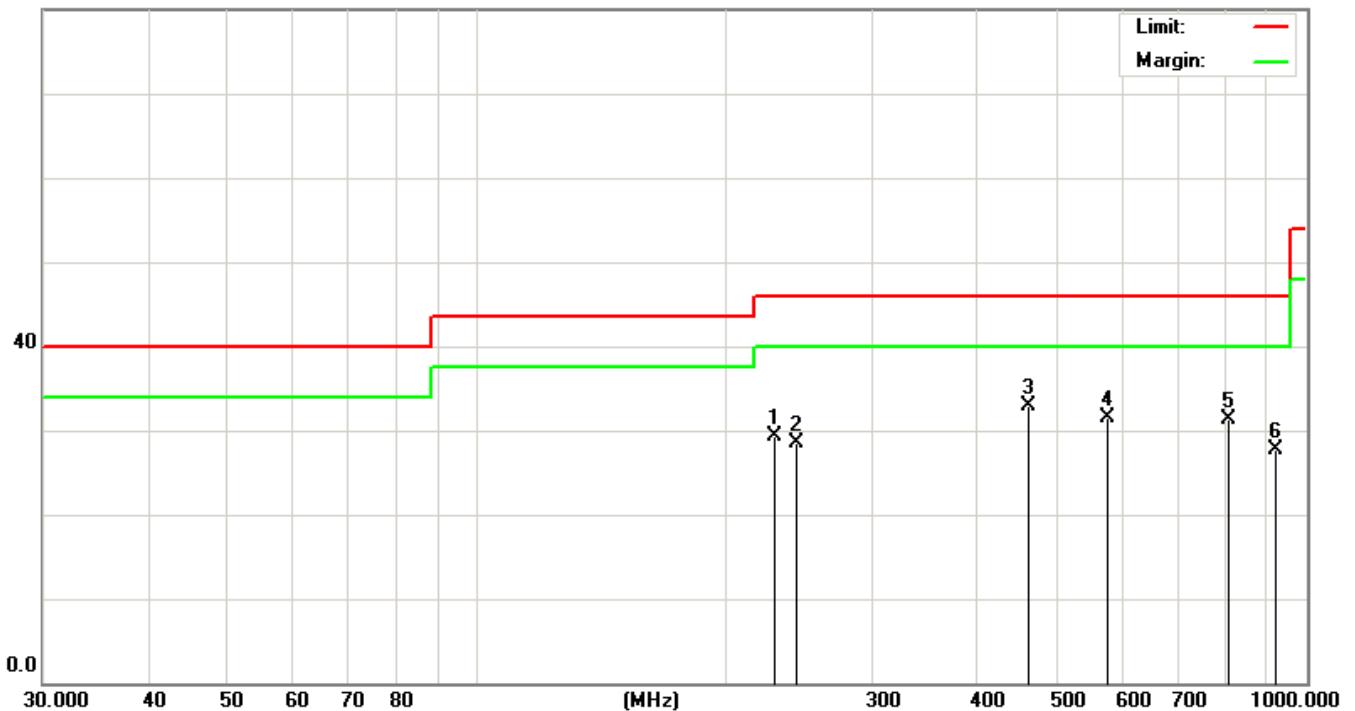

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "Margin" refers to the data under 6dB.


Date of Test	November 07, 2007	Temperature	26 deg/C
EUT	Wireless Keyboard	Humidity	60 %RH
Working Cond.	Mode 1	Display Pattern	H Pattern
Antenna distance	3m at Vertical	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	228.9803	42.20	-11.55	30.65	46.00	-15.35	QP
2	242.9953	42.70	-10.51	32.19	46.00	-13.81	QP
3	462.4800	40.80	-4.86	35.94	46.00	-10.06	QP
4	577.9990	38.90	-2.69	36.21	46.00	-9.79	QP
5	808.7990	33.90	1.02	34.92	46.00	-11.08	QP
6	924.3590	25.90	2.94	28.84	46.00	-17.16	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “ ” means that this data is the worse case measurement level.
6. The emission level of other frequencies are very lower than the limit.

80.0 dBμV/m

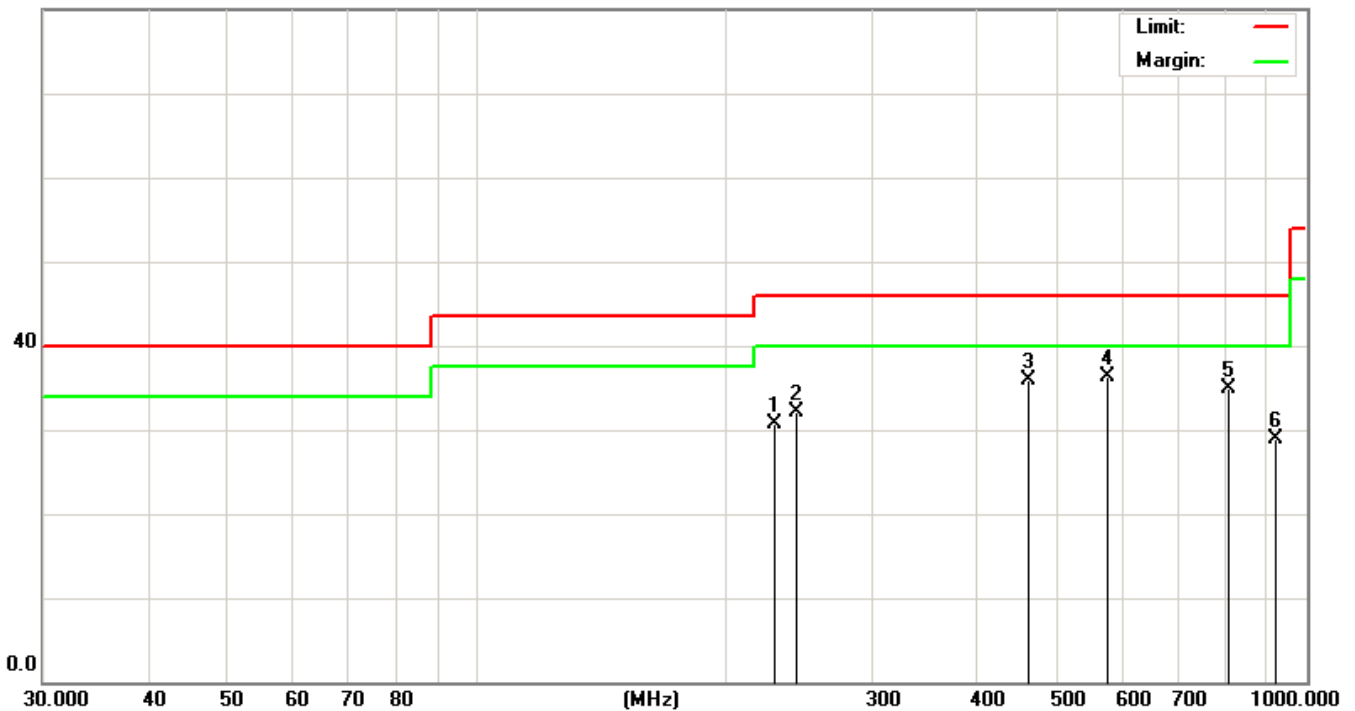

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "Margin" refers to the data under 6dB.


Date of Test	December 01, 2007	Temperature	26 deg/C
EUT	Wireless Keyboard	Humidity	60 %RH
Working Cond.	Mode 2	Display Pattern	H Pattern
Antenna distance	3m at Horizontal	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBµV	Factor dB	Measurement dBµV/m	Limit dBµV/m	Over Limit dB	Detector
1	83.6680	45.30	-17.96	27.34	40.00	-12.66	QP
2	151.2500	44.70	-13.88	30.82	43.50	-12.68	QP
3	304.0250	42.47	-8.68	33.79	46.00	-12.21	QP
4	505.3000	41.34	-4.03	37.31	46.00	-8.69	QP
5	682.3250	41.16	-0.75	40.41	46.00	-5.59	QP
6	924.8250	31.80	3.62	35.42	46.00	-10.58	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “ ” means that this data is the worse case measurement level.
6. The emission level of other frequencies are very lower than the limit.

80.0 dBµV/m

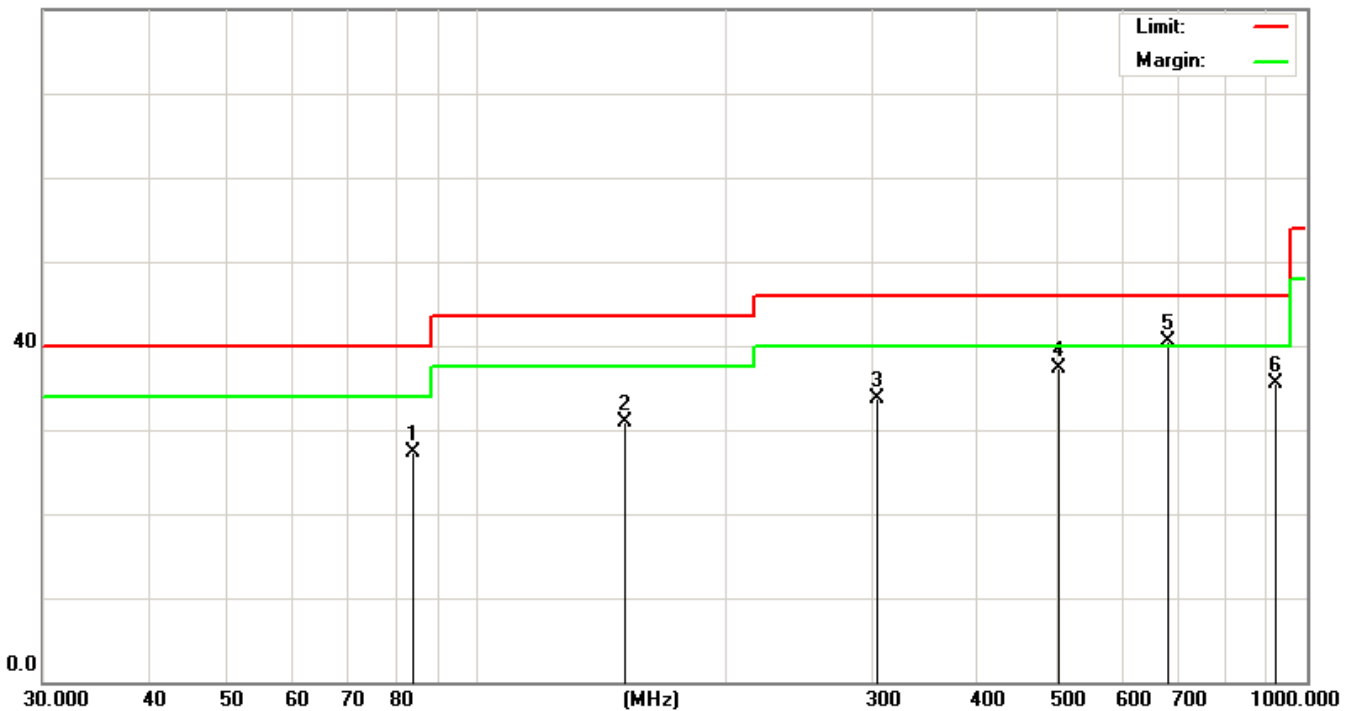

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "Margin" refers to the data under 6dB.


Date of Test	December 01, 2007	Temperature	26 deg/C
EUT	Wireless Keyboard	Humidity	60 %RH
Working Cond.	Mode 2	Display Pattern	H Pattern
Antenna distance	3m at Vertical	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	34.8500	40.96	-11.98	28.98	40.00	-11.02	QP
2	88.2000	40.65	-17.20	23.45	43.50	-20.05	QP
3	294.3250	46.58	-8.96	37.62	46.00	-8.38	QP
4	393.7500	44.27	-6.24	38.03	46.00	-7.97	QP
5	480.2110	44.25	-4.52	39.73	46.00	-6.27	QP
6	672.6250	40.72	-0.90	39.82	46.00	-6.18	QP
7	837.5250	37.52	1.89	39.41	46.00	-6.59	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “ ” means that this data is the worse case measurement level.
6. The emission level of other frequencies are very lower than the limit.

80.0 dBμV/m

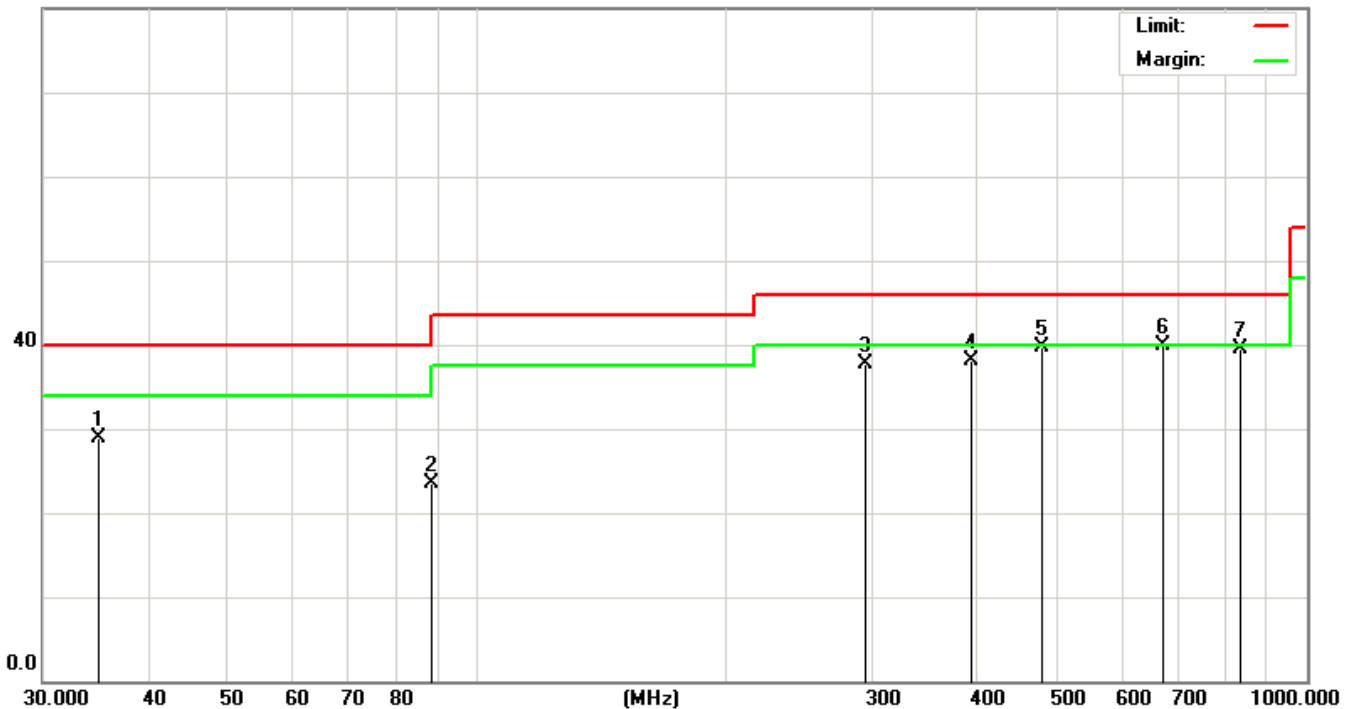

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "Margin" refers to the data under 6dB.

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 0	Display Pattern	H Pattern
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4807.3000	59.46	1.47	60.93	74.00	-13.07
2	4903.8000	57.37	1.40	58.77	74.00	-15.23
3	7211.5000	46.68	9.10	55.78	74.00	-18.22
4	7355.3000	47.45	9.12	56.57	74.00	-17.43
5	9616.0000	43.03	6.58	49.61	74.00	-24.39
6	9808.0000	43.67	6.27	49.94	74.00	-24.06
7	12020.0000	38.28	14.81	53.09	74.00	-20.91
8	12260.0000	42.80	10.25	53.05	74.00	-20.95
9	14424.0000	42.67	9.13	51.80	74.00	-22.20
10	14712.0000	43.25	9.28	52.53	74.00	-21.47

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4807.3	60.93	-20	40.93	54.00	-13.07
2	4903.8	58.77	-20	38.77	54.00	-15.23
3	7211.5	55.78	-20	35.78	54.00	-18.22
4	7355.3	56.57	-20	36.57	54.00	-17.43

Remark

- All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
- Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
- AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
- Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
- Factor = antenna factor + cable loss – amplifier gain.
- Over Limit (Margin Value)=Measurement level-Limit value.
- The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
- The Duty Cycle is refer to section 5.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
- The emission level of other frequencies are very lower than the limit.

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 0	Display Pattern	H Pattern
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4807.5000	58.08	1.48	59.56	74.00	-14.44
2	4903.3000	57.19	2.22	59.41	74.00	-14.59
3	7211.3000	45.57	8.72	54.29	74.00	-19.71
4	7355.5000	46.26	8.51	54.77	74.00	-19.23
5	9616.0000	43.32	10.15	53.47	74.00	-20.53
6	9807.0000	44.10	9.79	53.89	74.00	-20.11
7	12020.0000	36.26	17.27	53.53	74.00	-20.47
8	12260.0000	40.87	12.72	53.59	74.00	-20.41
9	14424.0000	42.19	7.71	49.90	74.00	-24.10
10	14712.0000	42.46	7.51	49.97	74.00	-24.03

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4807.5	59.56	-20	39.56	54.00	-14.44
2	4903.3	59.41	-20	39.41	54.00	-14.59
3	7211.3	54.29	-20	34.29	54.00	-19.71
4	7355.5	54.77	-20	34.77	54.00	-19.23

Remark

- All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
- Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
- AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
- Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
- Factor = antenna factor + cable loss – amplifier gain.
- Over Limit (Margin Value)=Measurement level-Limit value.
- The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
- The Duty Cycle is refer to section 5.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
- The emission level of other frequencies are very lower than the limit.

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 7	Display Pattern	H Pattern
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4821.3000	57.91	1.46	59.37	74.00	-14.63
2	4918.0000	57.90	1.39	59.29	74.00	-14.71
3	7232.0000	45.95	9.34	55.29	74.00	-18.71
4	7376.8000	46.25	9.04	55.29	74.00	-18.71
5	9644.0000	42.46	6.69	49.15	74.00	-24.85
6	9836.0000	43.36	5.86	49.22	74.00	-24.78
7	12055.0000	39.61	14.16	53.77	74.00	-20.23
8	12295.0000	42.10	9.50	51.60	74.00	-22.40
9	14466.0000	42.79	8.81	51.60	74.00	-22.40
10	14754.0000	43.18	9.32	52.50	74.00	-21.50

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4821.3	59.37	-20	39.37	54.00	-14.63
2	4918.0	59.29	-20	39.29	54.00	-14.71
3	7232.0	55.29	-20	35.29	54.00	-18.71
4	7376.8	55.29	-20	35.29	54.00	-18.71

Remark

- All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
- Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
- AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
- Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
- Factor = antenna factor + cable loss – amplifier gain.
- Over Limit (Margin Value)=Measurement level-Limit value.
- The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
- The Duty Cycle is refer to section 5.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
- The emission level of other frequencies are very lower than the limit.

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 7	Display Pattern	H Pattern
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4822.3000	57.57	1.60	59.17	74.00	-14.83
2	4918.0000	55.93	2.34	58.27	74.00	-15.73
3	7232.0000	45.27	8.71	53.98	74.00	-20.02
4	7376.8000	45.14	8.47	53.61	74.00	-20.39
5	9644.0000	43.30	10.07	53.37	74.00	-20.63
6	9836.0000	42.81	9.78	52.59	74.00	-21.41
7	12055.0000	37.15	16.61	53.76	74.00	-20.24
8	12295.0000	41.84	12.02	53.86	74.00	-20.14
9	14466.0000	42.50	7.24	49.74	74.00	-24.26
10	14754.0000	42.78	7.55	50.33	74.00	-23.67

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4823.3	59.17	-20	39.17	54.00	-14.83
2	4918.0	58.27	-20	38.27	54.00	-15.73

Remark

- All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
- Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
- AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
- Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
- Factor = antenna factor + cable loss – amplifier gain.
- Over Limit (Margin Value)=Measurement level-Limit value.
- The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
- The Duty Cycle is refer to section 5.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
- The emission level of other frequencies are very lower than the limit.

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 15	Display Pattern	H Pattern
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4837.5000	58.96	1.45	60.41	74.00	-13.59
2	4933.5000	57.13	1.37	58.50	74.00	-15.50
3	7256.3000	45.84	9.43	55.27	74.00	-18.73
4	7400.3000	46.69	8.95	55.64	74.00	-18.36
5	9676.0000	43.24	6.81	50.05	74.00	-23.95
6	9868.0000	44.00	5.39	49.39	74.00	-24.61
7	12095.0000	40.40	13.41	53.81	74.00	-20.19
8	12335.0000	40.93	8.62	49.55	74.00	-24.45
9	14514.0000	42.34	8.65	50.99	74.00	-23.01
10	14802.0000	42.08	8.91	50.99	74.00	-23.01

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4837.5	60.41	-20	40.41	54.00	-13.59
2	4933.5	58.50	-20	38.50	54.00	-15.50
3	7256.3	55.27	-20	35.27	54.00	-18.73
4	7400.3	55.64	-20	35.64	54.00	-18.36

Remark

- All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
- Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
- AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
- Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
- Factor = antenna factor + cable loss – amplifier gain.
- Over Limit (Margin Value)=Measurement level-Limit value.
- The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
- The Duty Cycle is refer to section 5.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
- The emission level of other frequencies are very lower than the limit.

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 15	Display Pattern	H Pattern
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4838.0000	56.77	1.72	58.49	74.00	-15.51
2	4934.3000	56.39	2.45	58.84	74.00	-15.16
3	7257.0000	45.12	8.67	53.79	74.00	-20.21
4	7400.0000	45.12	8.43	53.55	74.00	-20.45
5	9676.0000	43.67	9.97	53.64	74.00	-20.36
6	9868.3000	44.10	9.78	53.88	74.00	-20.12
7	12095.0000	37.85	15.87	53.72	74.00	-20.28
8	12335.0000	41.02	11.22	52.24	74.00	-21.76
9	14514.0000	42.21	6.96	49.17	74.00	-24.83
10	14802.0000	43.26	7.22	50.48	74.00	-23.52

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4838.0	58.49	-20	38.49	54.00	-15.51
2	4934.3	58.84	-20	38.84	54.00	-15.16

Remark

- All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
- Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
- AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
- Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
- Factor = antenna factor + cable loss – amplifier gain.
- Over Limit (Margin Value)=Measurement level-Limit value.
- The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
- The Duty Cycle is refer to section 5.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
- The emission level of other frequencies are very lower than the limit.

4.7.2 FUNDAMENTAL RADIATED EMISSIONS

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 0		
Antenna distance	3m at Horizontal		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2404.4000	65.80	31.49	97.29	114.00	-16.71
2	2451.7000	66.29	31.38	97.67	114.00	-16.33

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	2404.4	97.29	-20	77.29	94	-16.71
2	2451.7	97.67	-20	77.67	94	-16.33

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 0		
Antenna distance	3m at Vertical		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2403.6000	51.70	24.57	76.27	114.00	-37.73
2	2451.6000	51.95	23.79	75.74	114.00	-38.26

Remark

- All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
- Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
- AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
- Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
- Factor = antenna factor + cable loss – amplifier gain.
- Over Limit (Margin Value)=Measurement level-Limit value.
- The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
- The Duty Cycle is refer to section 5.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 7		
Antenna distance	3m at Horizontal		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2411.4000	67.37	31.47	98.84	114.00	-15.16
2	2458.7000	66.83	31.36	98.19	114.00	-15.81

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	2411.4	98.84	-20	78.84	94	-15.16
2	2458.7	98.19	-20	78.19	94	-15.81

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 7		
Antenna distance	3m at Vertical		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2410.7000	53.23	24.46	77.69	114.00	-36.31
2	2458.9000	53.21	23.68	76.89	114.00	-37.11

Remark

- All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
- Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
- AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
- Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
- Factor = antenna factor + cable loss – amplifier gain.
- Over Limit (Margin Value)=Measurement level-Limit value.
- The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
- The Duty Cycle is refer to section 5.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 15		
Antenna distance	3m at Horizontal		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2418.7000	66.96	31.46	98.42	114.00	-15.58
2	2467.2000	66.58	31.35	97.93	114.00	-16.07

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	2418.7	98.42	-20	78.42	94	-15.58
2	2467.2	97.93	-20	77.93	94	-16.07

Date of Test	November 01, 2007	Temperature	24.4 deg/C
EUT	Wireless Keyboard	Humidity	61 %RH
Working Cond.	Mode 1-Channel 15		
Antenna distance	3m at Vertical		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2418.8000	50.65	24.33	74.98	114.00	-39.02
2	2466.8000	51.97	23.55	75.52	114.00	-38.48

Remark

- All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
- Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
- AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
- Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
- Factor = antenna factor + cable loss – amplifier gain.
- Over Limit (Margin Value)=Measurement level-Limit value.
- The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
- The Duty Cycle is refer to section 5.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.


5. BAND EDGE

5.1 TEST EQUIPMENT

Item	Instrument	Manufacturer	Model	Serial No.	Next Cal.
1	Test Receiver	R & S	ESCS30	825022/003	2008.05.25
2	Spectrum Analyzer	ADVANTEST	R3172	101202152	2008.08.27
3	Power Meter	Rohde & Schwarz	NRVS	100666	2008.04.03
4	Peak Power Sensor	Rohde & Schwarz	NRV-Z32	836019-058	2008.04.03
5	Pre-Amplifier	EMV-Technik	PA303	N/A	2008.04.18
6	Pre-Amplifier	HP	8447D	2944A08273	2008.10.08
7	BILOG ANTENNA	SCHAFFNER	CBL6112B	2580	2008.11.22
8	HORN ANTENNA	SCHWARZBECK	BBHA 9120	D243	2007.12.24
9	CABLE	GTK	N/A	GTK-E-A152-01	2007.12.14
10	Open Site	GesTek	N/A	B2	2008.11.04
11	Test Program Software	GesTek	N/A	GTK-E-S001-01	N/A

5.2 BLOCK DIAGRAM OF TEST SETUP

◎ RF Radiated Measurement: ◎

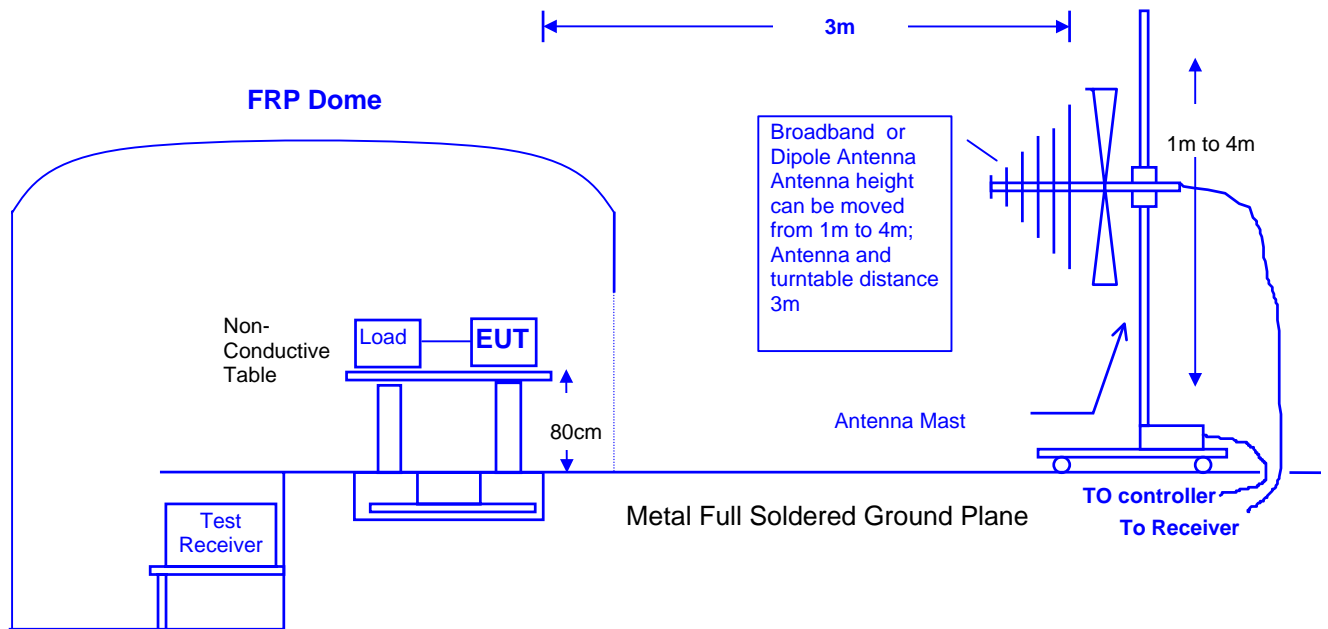

5.3 BAND EDGE LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209 (a) (see Section 15.205(c)).

5.4 EUT CONFIGURATION

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2000 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120KHz, above 1GHz are 1MHz.

5.5 OPERATING CONDITION OF EUT

Same as section 2.7.

5.6 TEST RESULT

Date of Test	November 03, 2007	Temperature	24.3 deg/C
EUT	Wireless Keyboard	Humidity	56 %RH
Working Cond.	Mode 1-Channel 0		
Antenna distance	3m at Horizontal	Test Band	Lower

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2404.4	65.80	31.49	97.29

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Emission Level= Reading + Correction Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The band edge emission plot on next page are Peak and Average. The plot for peak is appear (29.97)dB delta between carry power and maximum emission in restrict band 2317.4 MHz.

The above tables are list of fundamental emission test result.

Therefore, peak field strength of 2317.4 MHz is 97.29 dBuV/m – 29.97dB = 67.32dBuV/m which is under 74dBuV/m.

Average filed strength = Peak filed strength x Duty Cycle

(20logAVG = 20logPeak + 20logDuty Cycle)

20logDuty Cycle = (-20)dB

Average field strength of (2317.4)MHz is

(67.32) dBuV/m + (-20)dB = (47.32)dBuV/m which is under 54dBuV/m.

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

Date of Test	November 03, 2007	Temperature	24.3 deg/C
EUT	Wireless Keyboard	Humidity	56 %RH
Working Cond.	Mode 1-Channel 0		
Antenna distance	3m at Vertical	Test Band	Lower

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2403.6	51.70	24.57	76.27

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz.
3. Emission Level= Reading + Correction Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The band edge emission plot on next page are Peak and Average. The polt for peak is appear (29.97)dB delta between carry power and maximum emission in restrict band 2317.4 MHz.

The above tables are list of fundamental emission test result.

Therefore, peak field strength of 2317.4 MHz is 76.27 dBuV/m – 29.97dB = 46.30dBuV/m which is under 74dBuV/m.

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

Date of Test	November 03, 2007	Temperature	24.3 deg/C
EUT	Wireless Keyboard	Humidity	56 %RH
Working Cond.	Mode 1-Channel 15		
Antenna distance	3m at Horizontal	Test Band	Higher

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2467.2	66.58	31.35	97.93

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz.
3. Emission Level= Reading + Correction Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The band edge emission plot on next page are Peak and Average. The polt for peak is appear (33.71)dB delta between carry power and maximum emission in restrict band 2499.0 MHz.

The above tables are list of fundamental emission test result.

Therefore, peak field strength of 2499.0 MHz is 97.63 dBuV/m – 33.71 dB = 64.22 dBuV/m which is under 74dBuV/m.

Average filed strength = Peak filed strength x Duty Cycle

(20logAVG = 20logPeak + 20logDuty Cycle)

20logDuty Cycle = (-20)dB

Average field strength of (2499.0)MHz is

(64.22) dBuV/m + (-20)dB = (44.22)dBuV/m which is under 54dBuV/m.

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

Date of Test	November 03, 2007	Temperature	24.3 deg/C
EUT	Wireless Keyboard	Humidity	56 %RH
Working Cond.	Mode 1-Channel 15		
Antenna distance	3m at Vertical	Test Band	Higher

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2466.8	51.97	23.55	75.52

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz.
3. Emission Level= Reading + Correction Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The band edge emission plot on next page are Peak and Average. The polt for peak is appear (33.71)dB delta between carry power and maximum emission in restrict band 2499.0 MHz.


The above tables are list of fundamental emission test result.

Therefore, peak field strength of 2499.0 MHz is 75.52 dBuV/m – 33.71dB = 41.81dBuV/m which is under 74dBuV/m.


Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

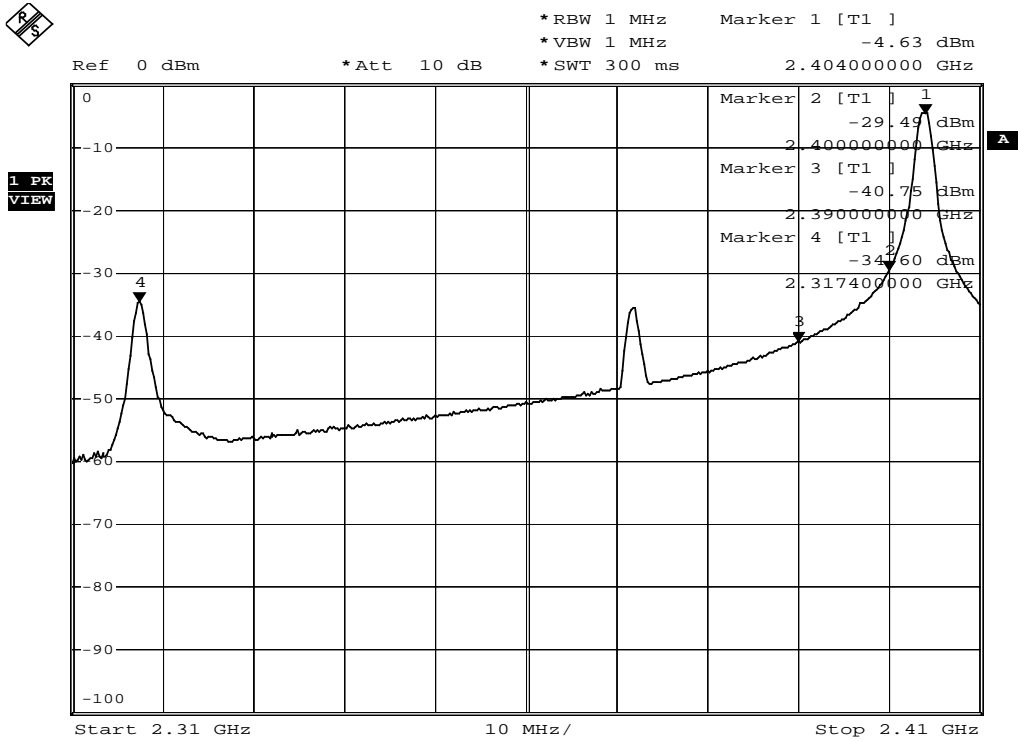

Date: 3.NOV.2007 16:38:22

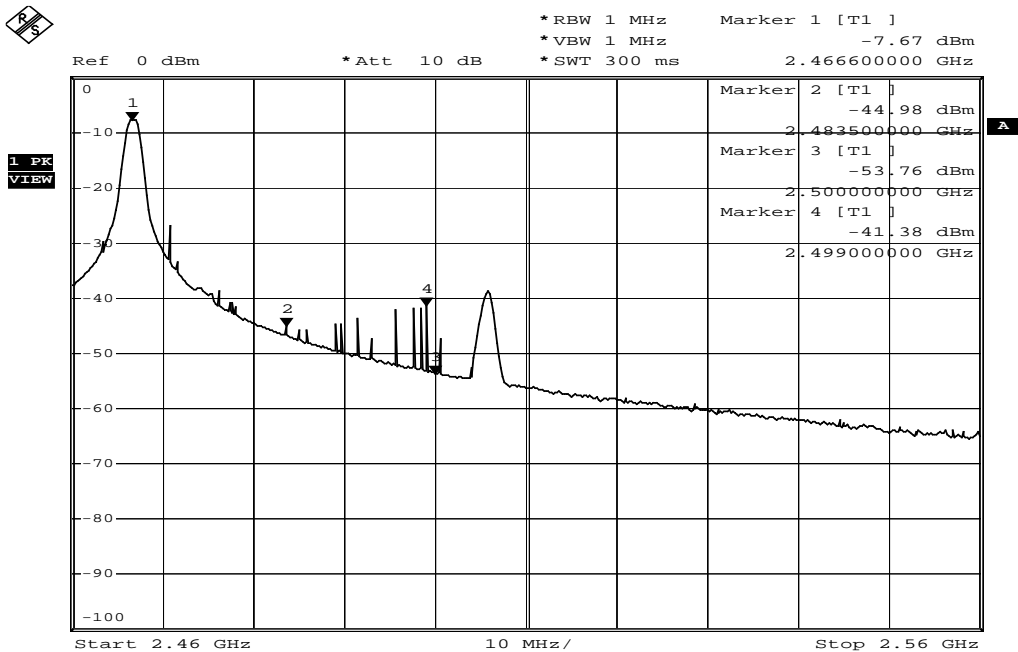

Date: 3.NOV.2007 17:10:19


6. DUTY CYCLE

6.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Model	Serial No.	Next Cal.
1	Spectrum Analyzer	Rohde & Schwarz	FSP40	100061	2008.04.08
2	Spectrum Analyzer	HP	E4407B	US39240339	2008.08.06

6.2 BLOCK DIAGRAM OF TEST SETUP

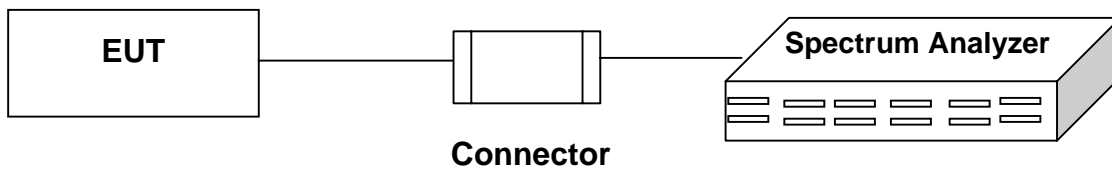

6.3 TEST RESULT

Date of Test	November 03, 2007	Temperature	24.3 deg/C
EUT	Wireless Keyboard	Humidity	56 %RH
Working Cond.	Mode 1-Channel 0		

Duty Cycle = Time on of 100msec / 100 msec

Frequency 2404 MHz

Time on of one slot length = 840 (μs) = 0.84 (msec)


Time on of 100ms = 0.84 × 11 = 9.24 (msec)

Duty Cycle = 9.24 / 100msec = 0.0924


20 log 0.0924 = -20.68 dB

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

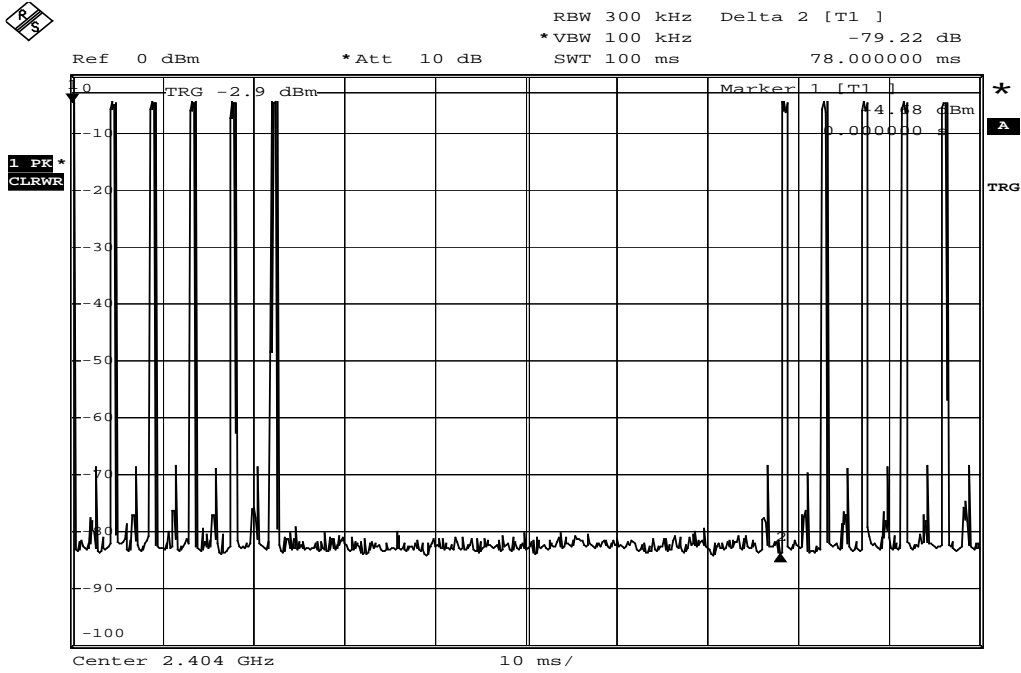

Date: 3.NOV.2007 16:17:58

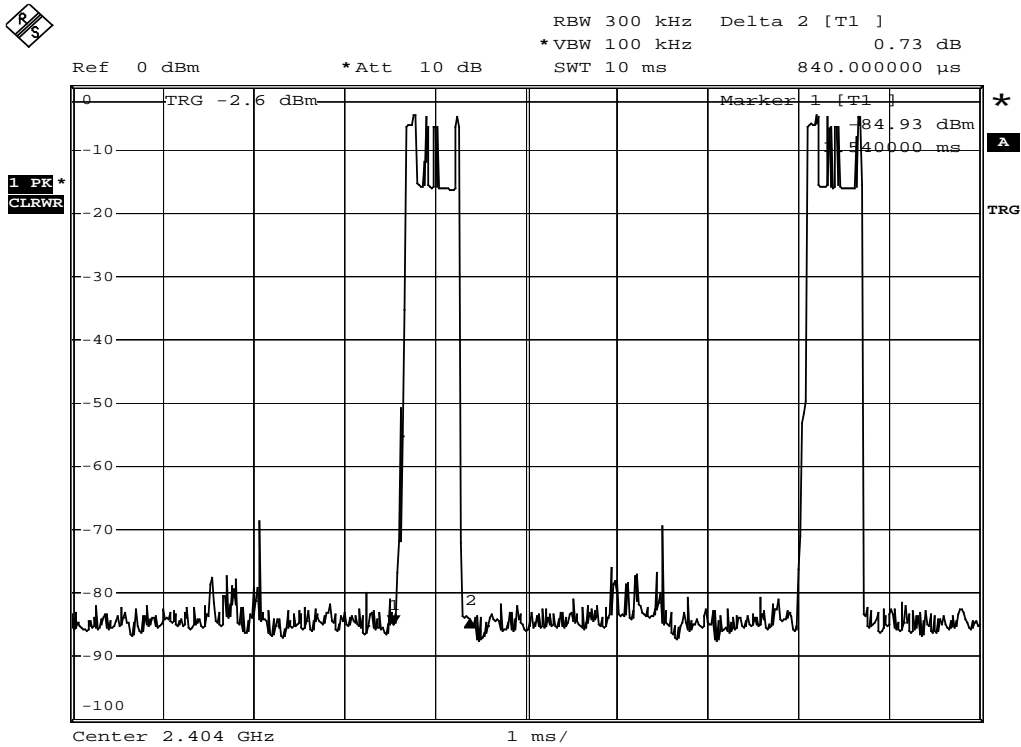

Date: 3.NOV.2007 16:20:18

7. PHOTOGRAPHS FOR TEST

7.1 TEST PHOTOGRAPHS FOR CONDUCTION

Mode 2




7.2 TEST PHOTOGRAPHS FOR RADIATION


(Mode 1) 30-1000MHz



(Mode 2) 30-1000MHz

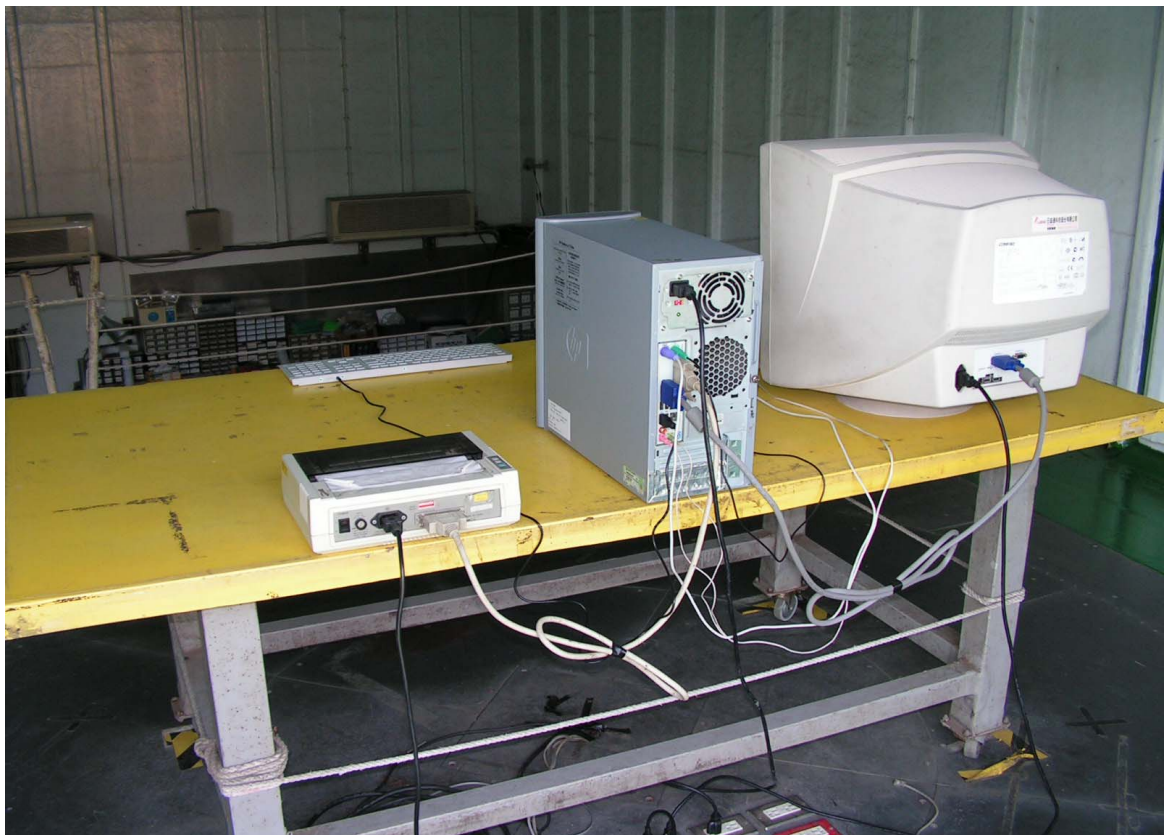

(Mode 1) Above 1GHz

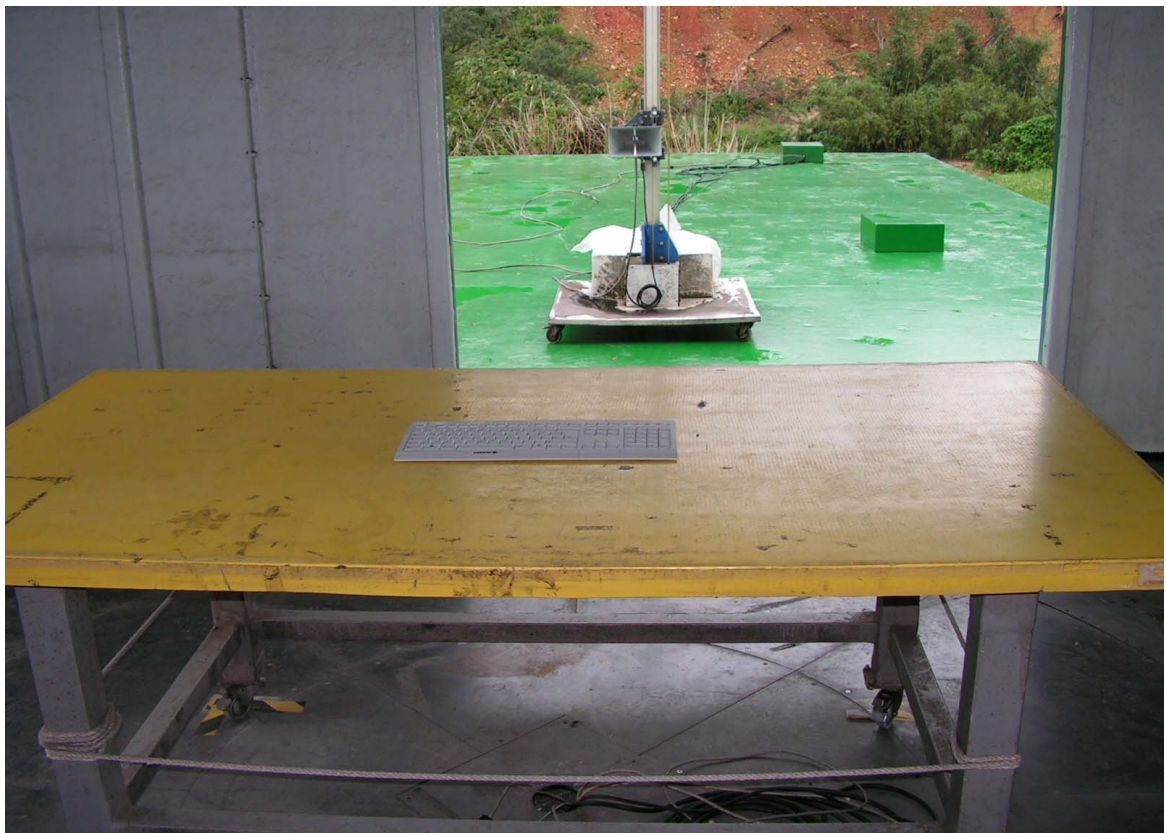

8. PHOTOGRAPHS FOR PRODUCT

1. Front View Of Wireless Keyboard (EUT)
2. Back View Of Wireless Keyboard (EUT)




- 3. Power Switch and USB Cable Plug in
- 4. Label Here of TX





- 5.
- 6.





- 7.
- 8.

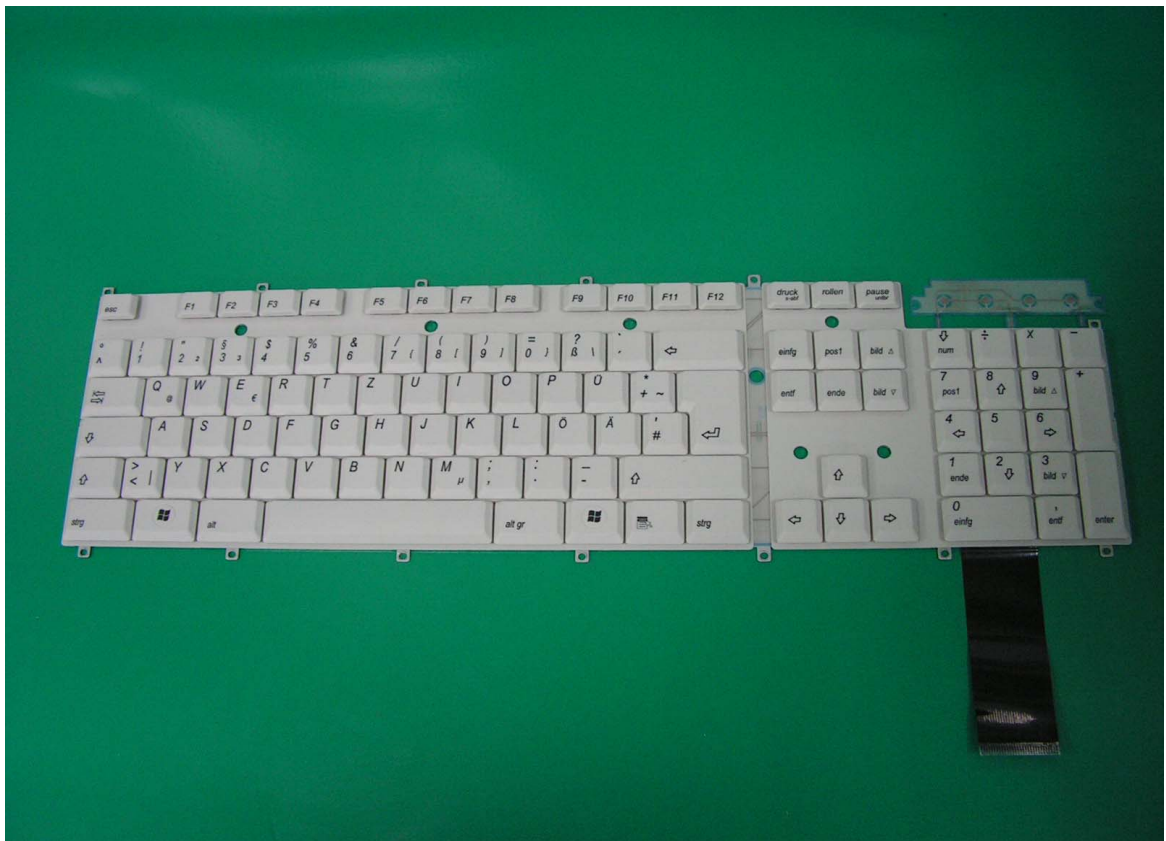

9.
10.

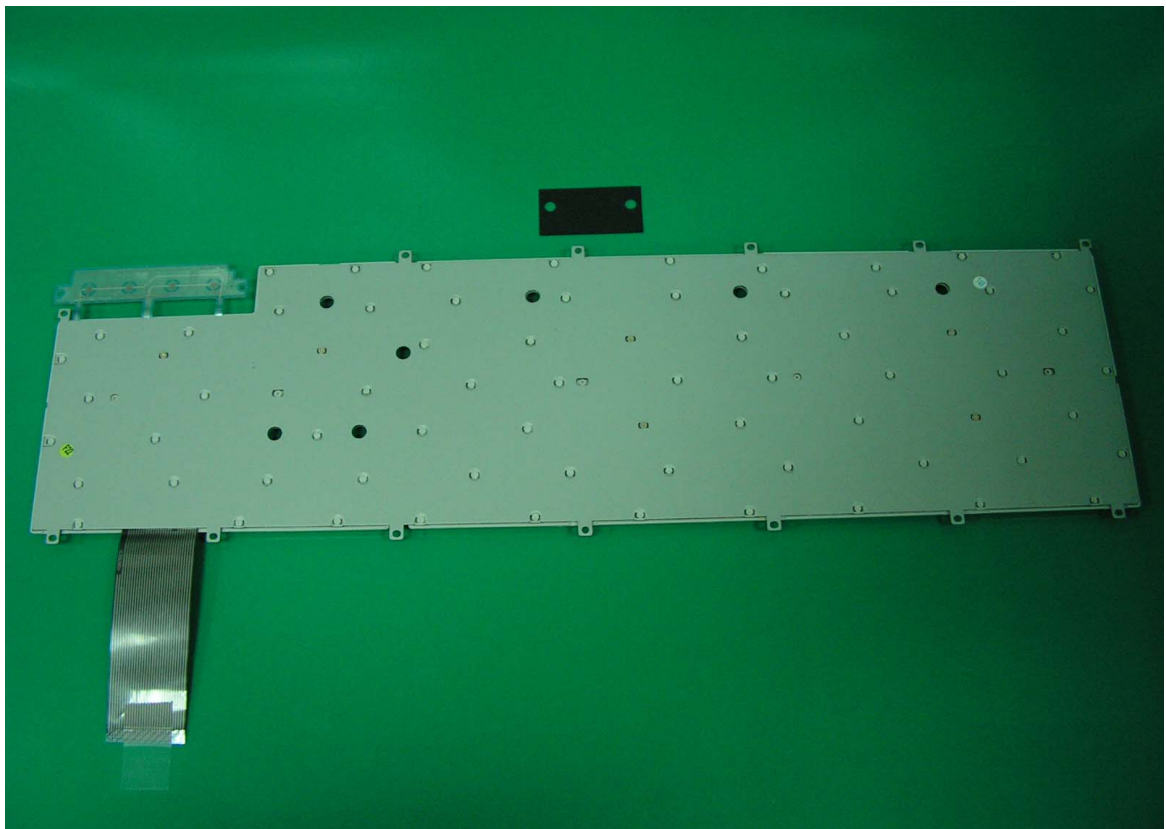
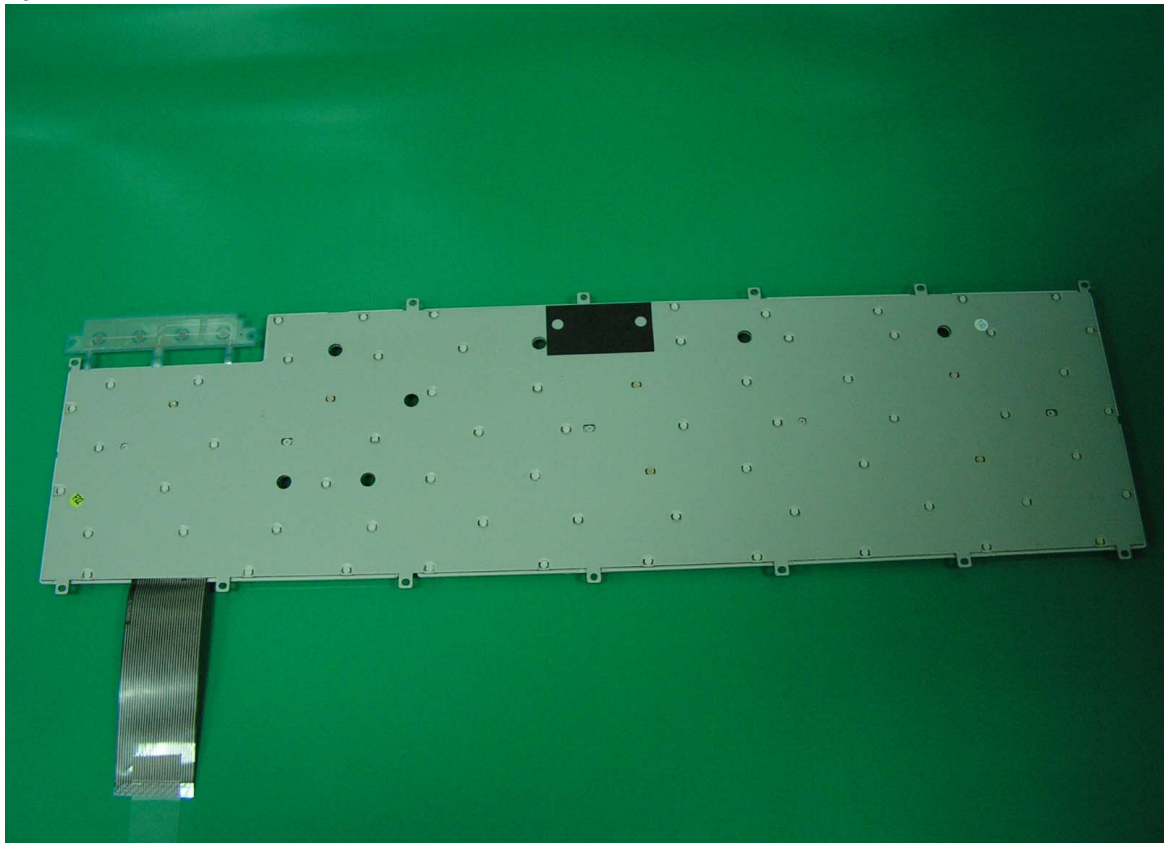


- 11.
- 12.

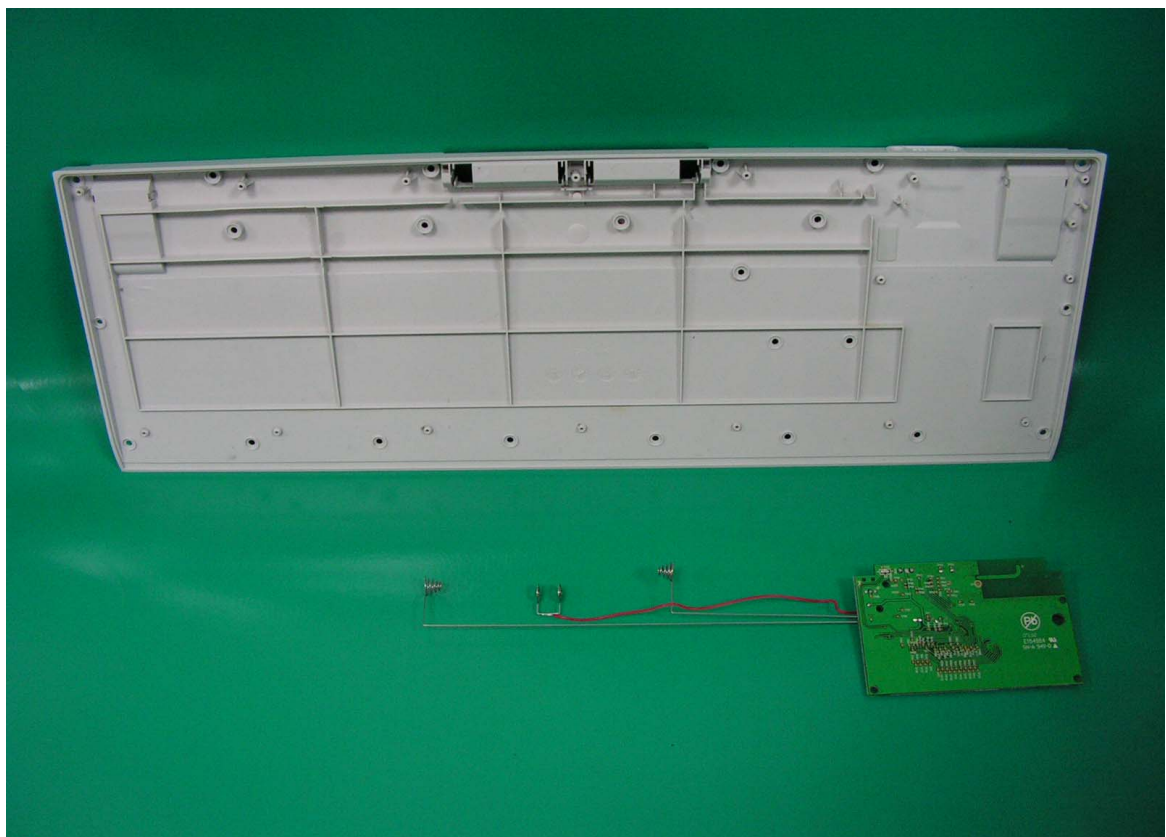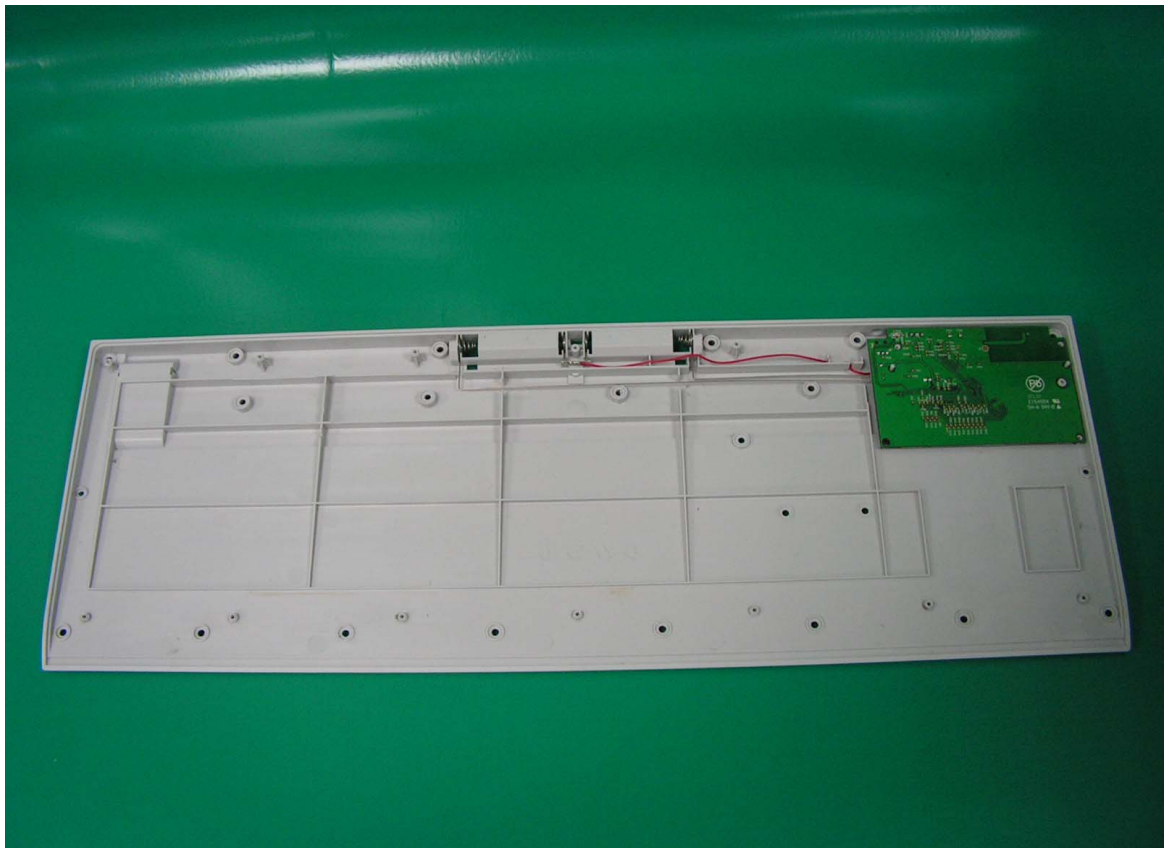


13.

14. TX Main Board+

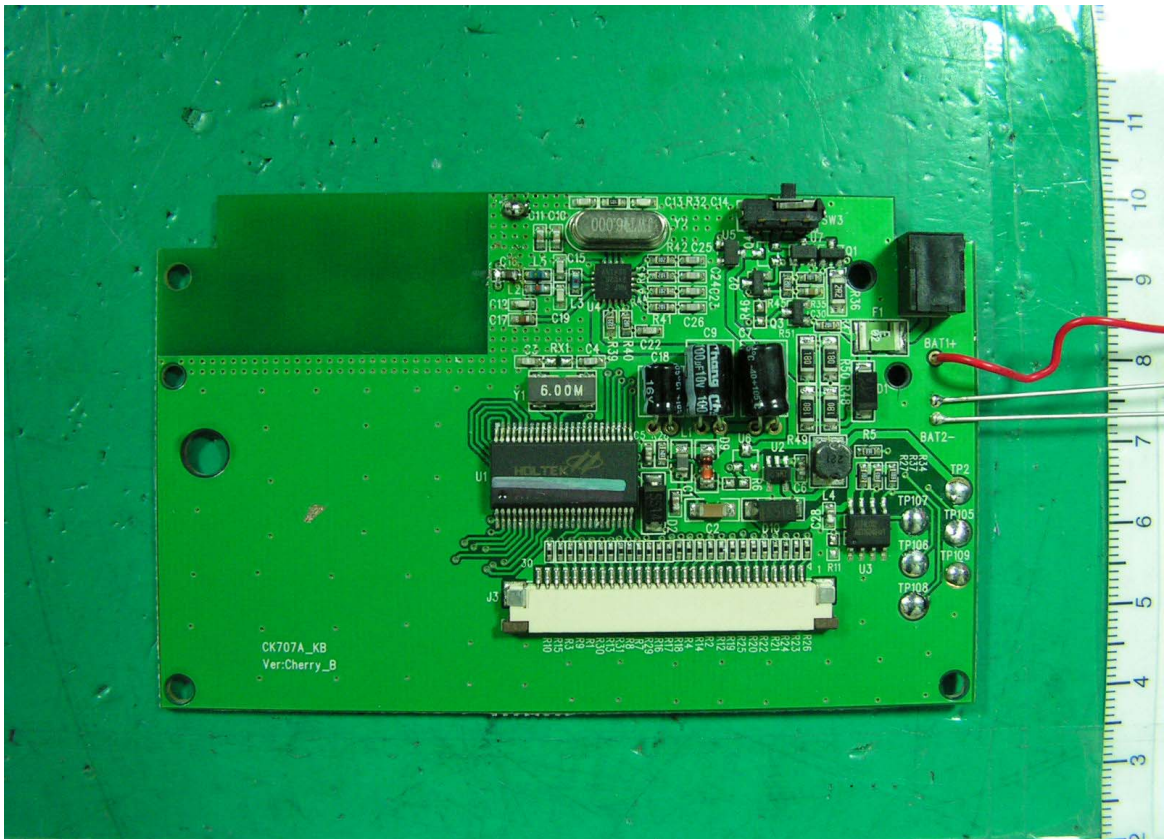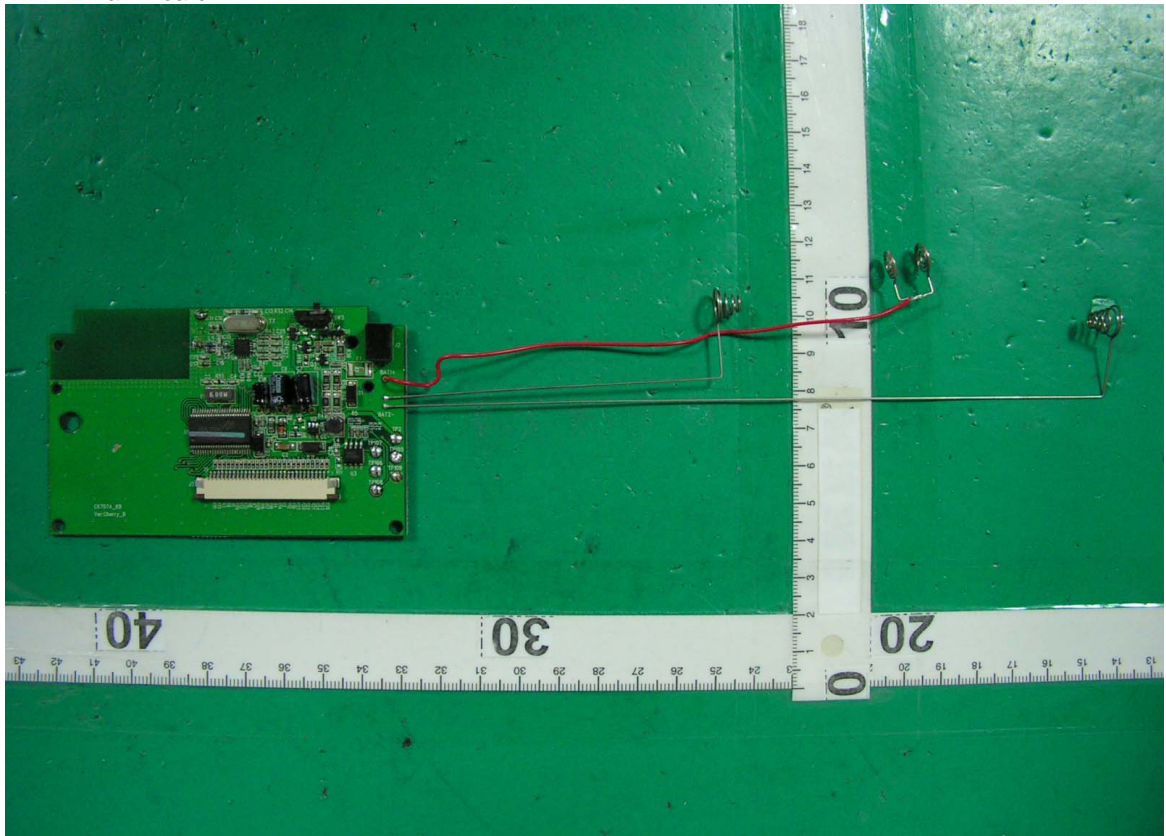

- 15. TX Main Board-
- 16. Wireless Keyboard ESD Solution

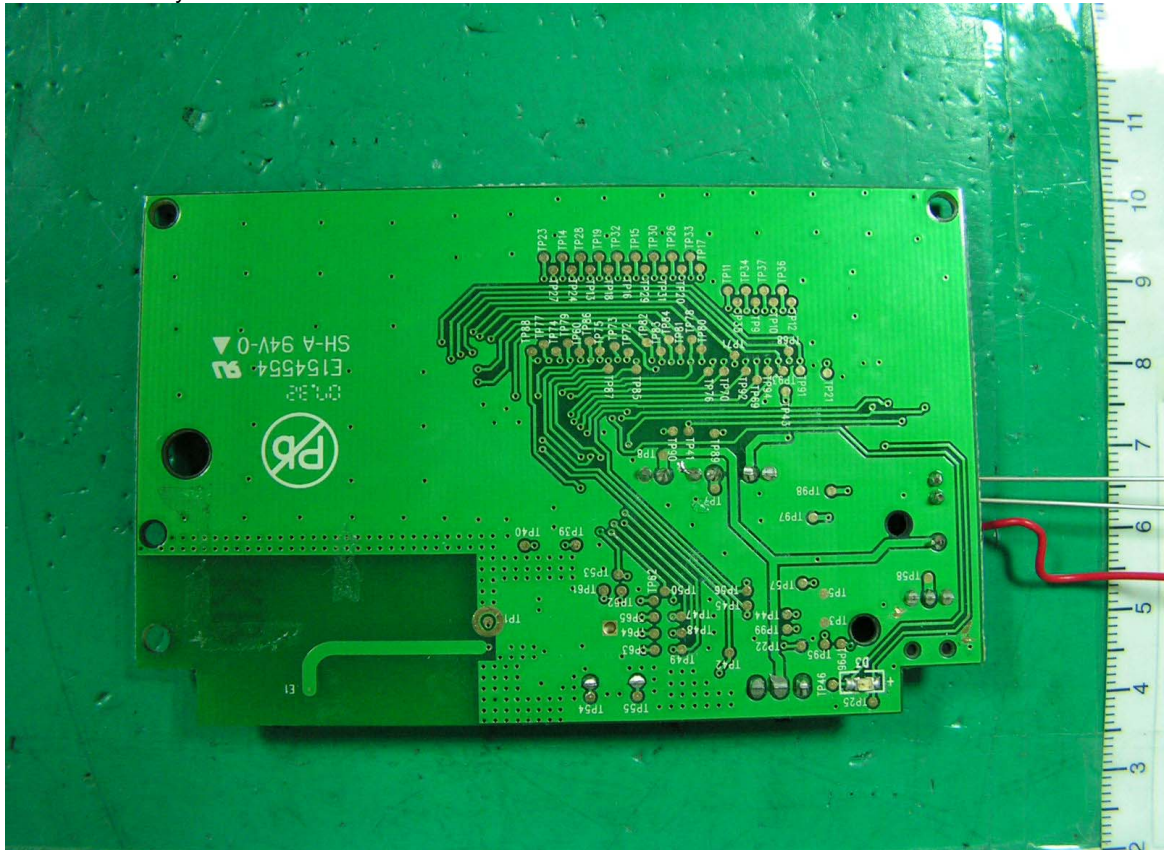

17. USB Cable



9. EMI REDUCTION METHOD DURING COMPLIANCE TESTING

No modification was made during testing.

Appendix A

Circuit (Block) Diagram

(Shall be added by Applicant)

Appendix B

User Manual

(Shall be added by Applicant)