


Test Report

RF Test Report



Industry
Canada

Industrie
Canada

268.188

Cherry GmbH

Keyboard with RFID Reader
RS6600-C3R / GT9998

Customer:

Cherry GmbH
Cherrystraße
91275 Auerbach
Germany
Tel.: +49 9643 18-0
Fax: +49 9643 18-1778



The test result refers exclusively
to the model tested.

This report must not be copied without
the written authorization by the lab.
Revision: 1.00



Registration number: DAT-P-224/95-02

EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: company@emv-testhaus.com

Accreditation:



Registration number: DAT-P-224/95-02
Valid until 08.06.2011

CAB (EMC) registration number: BNetzA-CAB-02/21-02/1
Valid until 27.11.2008

FCC facility registration number: 221458
Valid until 18.07.2008

Industry Canada registration number: 3472A-1
Valid until 17.07.2010

Place of Inspection:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Strasse 35
94315 Straubing
Germany

The technical accuracy is guaranteed through the quality management of the
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 2 of 67

Table of contents

1	Test regulations	4
2	Equipment under Test (EUT)	7
3	Spectrum Mask	10
4	Conducted emission test.....	16
5	Measurement of radiated emission	24
6	Occupied Bandwidth (99%).....	38
7	Occupied Bandwidth (20dB)	42
8	Occupied Bandwidth (99%).....	47
9	Carrier frequency stability	51
10	Designation of Emissions.....	57
11	Exposure of Humans to RF Fields	58
12	Summary.....	61

1 Test regulations

CFR 47 Part 2: 10-2007	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
CFR 47 Part 15: 09-2007	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
ANSI C63.4: December 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-Gen Issue 2 June 2007	Radio Standards Specification RSS-Gen Issue 2 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada
RSS-102: Issue 2 November 2005	
RSS-210: Issue 7 June 2007	Radio Standards Specification RSS-210 Issue 7 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 4 of 67

2 Summary of test results separated by FCC and Industry Canada

FCC CFR 47 Part 2 and Part 15

Section	Test	Page	Result
2.1046(a)	Conducted output power	----	Not applicable
2.202(a)	Occupied bandwidth	38	Recorded
15.215(c)	Occupied bandwidth	42	Passed
2.201, 2.202	Class of emission	57	Calculated
15.35(c)	Pulse train measurement	----	Not applicable
15.205(a) 15.205(d)(7)	Restricted bands of operation	----	Passed
15.207	Conducted emission at AC power line 0,150MHz to 30MHz	16	Passed
15.225(a)-(d)	Spectrum mask	10	Passed
15.205(b) 15.215(b) 15.225(a)(d)	Radiated emission 0,009MHz to 30MHz	24	Passed
15.205(b) 15.225(d)	Radiated emission 30MHz to 1000MHz	31	Passed
15.225(e)	Carrier frequency stability	51	Passed



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 5 of 67

Industry Canada RSS Gen Issue 2

Section	Test	Page	Result
4.8	Transmitter output power	----	Not applicable
4.6.1	Occupied bandwidth	47	Recorded
3.2(h)	Emission designator	57	Calculated
4.5	Pulsed operation	----	Not applicable
7.2.2	Transmitter AC conducted emission	16	Passed
5.5	Exposure of humans to RF fields	58	Exempted form SAR and RF evaluation

Industry Canada RSS 210 Issue 7

Section	Test	Page	Result
2.2(a)	Restricted bands and unwanted emission frequencies	----	Passed
A2.6	Spectrum mask	10	Passed
2.2(b)(c), 2.6, A2.6	Unwanted emission 0,009MHz to 30MHz	24	Passed
2.2(b)(c), 2.6, A2.6	Unwanted emission 30MHz to 1000MHz	31	Passed
A2.6	Carrier frequency stability	51	Passed



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 6 of 67

3 Equipment under Test (EUT)

Device name: RS6600-C3R

Manufacturer: Cherry GmbH

Serial number: DL11/#07

FCC ID: GDDRS6600-C3R

Canada IC:

Application freq. band: 13.110MHz – 14.010MHz

Frequency range: 13.549MHz – 13,573MHz

Operating frequency: 13.56MHz

Class of emission: 10K0A1D

Type of modulation: ASK

Channel spacing: N/A

Number of RF-channels: 1

Pulse train: none

Pulse width: none

Antenna type: Integrated PCB antenna
 detachable not detachable

Power supply: USB powered
nominal: 5.0 V
minimum: 4.50 V
maximum: 5.50 V

Temperature range: -20 °C to +55 °C

Interfaces: N/A



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998


268.188

Page 7 of 67

3.1 Photo documentation



Picture 3-1: Equipment under test

	EMV TESTHAUS GmbH Gustav-Hertz-Straße 35 94315 Straubing Germany Revision: 1.00	Cherry GmbH RS6600-C3R / GT 9998	
		268.188	Page 8 of 67

3.2 Short description of the EUT

The EUT is a USB keyboard with integrated RFID reader. The operating frequency is 13.56MHz

3.3 Operation Mode

The EUT was tested in the following operation modes:

- Reading Infineon A tags continuously with test program from Cherry

3.4 Configuration

The following peripheral devices and interface cables were connected during the tests:

Device	Model:	S/N
Keyboard (EUT)	RS66000-C3R with 1,8m USB cable with ferrite core at USB connector side	Engineering Sample
Tag	Infinion A	Engineering sample
Test Monitor	Belinea 10 17 05 with 1,8m cable attached. Ferrite 10cm away from VGA connector. Power cord 1.8m from Longwell	AA1117230420AC10400802
Test PC	Monitor Test PC 3 with 1,8m power cord form Longwell	302822800136
Mouse	Microsoft Basic Optical 1.0A 950010 with cable 1.5m, ferrite on USB plug side	X8008998



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 9 of 67

4 Spectrum Mask

according to CFR 47 Part 15, section 15.225 (a)-(d),
RSS-210 Issue 7, section 2.6 and section A2.6

4.1 Test location

- Scan with peak detector in 3 m CDC
- CISPR measurement with quasi peak detector on 10m open area test site.
- Measurement with peak detector on 3m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	100089
Open area test site	EMV TESTHAUS GmbH	200017

4.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	100072
<input checked="" type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	100132
<input checked="" type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	100005
<input type="checkbox"/>	VULB 9163 (CDC)	Schwarzbeck	100077
<input type="checkbox"/>	VULB 9160 (FF)	Schwarzbeck	100064



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 10 of 67

4.3 Limits

Frequency [MHz]	Field strength Fs [µV/m]	Field strength [dBµV/m]	Measurement distance d [m]
1.705 – 13.110	30	29.5	30
13.110 -13.410	106	40.5	30
13.410 – 13.553	334	50.5	30
13.553 – 13.567	15848	84.0	30
13.567 – 13.710	334	50.5	30
13.710 – 14.010	106	40.5	30
14.010 – 30.000	30	29.5	30

To calculate the limit for 3m measurement distance the following calculation was used.

$$L_{dm} = L_d + (-40 \frac{dB}{dec} * (\log(dm) - \log(d)) - 20) L_{dm} = \text{Limit at the new distance}$$

L_d = Limit according ANSI 63.4
 dm = Distance according to ANSI 63.4
 d = New distance for limit

$$L_{dm} = 29,5 \frac{dB\mu V}{m} + (-40 \frac{dB}{dec} * (\log(3m) - \log(30m)) - 20) = 49,5dB$$

$$L_{dm} = 40,5 \frac{dB\mu V}{m} + (-40 \frac{dB}{dec} * (\log(3m) - \log(30m)) - 20) = 60,5dB$$

$$L_{dm} = 50,5 \frac{dB\mu V}{m} + (-40 \frac{dB}{dec} * (\log(3m) - \log(30m)) - 20) = 70,5dB$$

$$L_{dm} = 84 \frac{dB\mu V}{m} + (-40 \frac{dB}{dec} * (\log(3m) - \log(30m)) - 20) = 104dB$$



4.4 Test method to demonstrate compliance

A spectrum analyzer was used and set to a center frequency equal to transmitter frequency. The resolution bandwidth was adjusted to 1 kHz and the video bandwidth at least 3 times higher than the resolution bandwidth. Span was set to 1MHz to cover the whole spectrum mask. The detector was set to maxpeak with hold function.

The spectrum analyzer was connected to a loop antenna with vertical polarization at a measurement distance of 3m on an open area test site. This loop antenna has a correction factor of 20dB. Due to better visibility in the printing the actual spectrum mask limit was reduced by this 20dB. Therefore the picture 3-1: shows the correct distance to the limit, to get the correct field strength 20dB has to be added to the marker value T1.

The EUT was placed on a turntable and rotate 360° to find maximum value. To find the maximum in horizontal polarization the EUT was rotated by 90°.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00


Cherry GmbH


RS6600-C3R / GT 9998

268.188

Page 12 of 67

4.5 Test setup

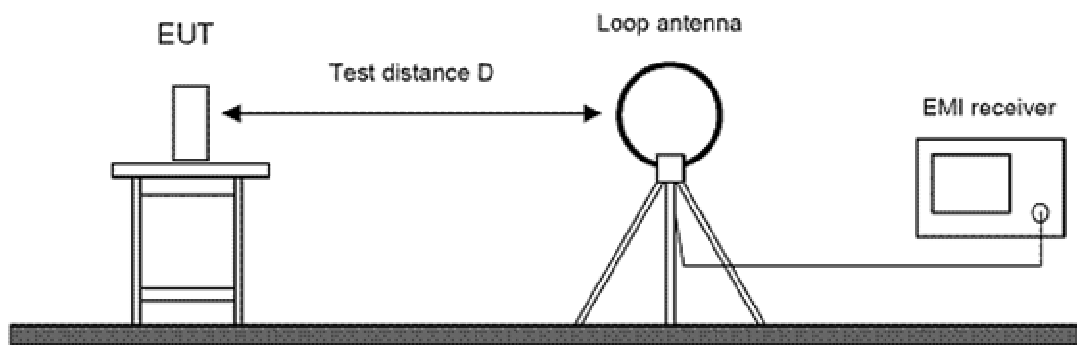

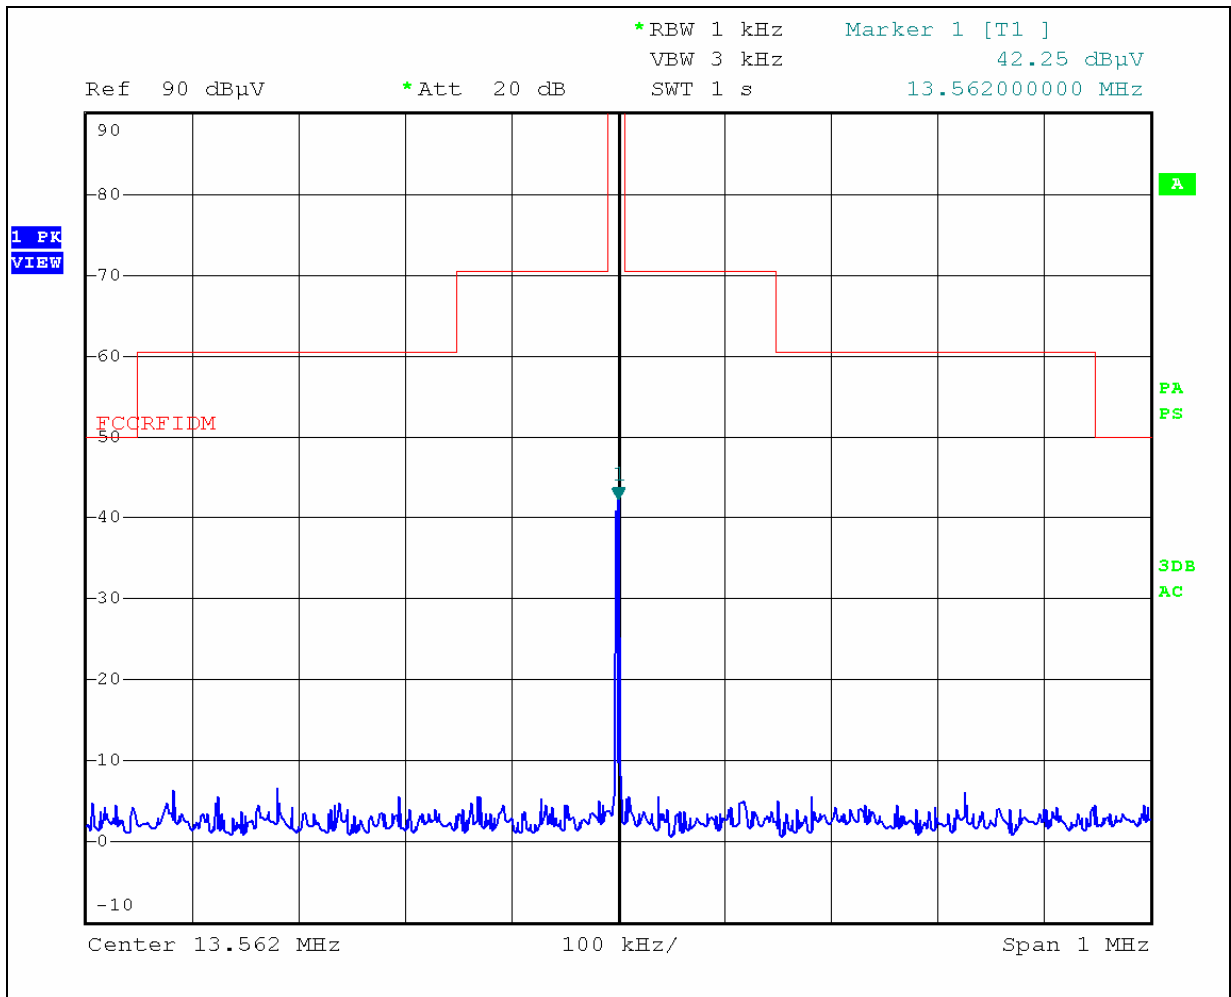

Picture 4-1:Result of spectrum mask measurement

The actual field strength of the carrier is:

$$F_S = T1 + 20dB = 42,25dB\mu V/m + 20dB = 62,25dB\mu V/m$$



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 14 of 67

4.6 Test result

The requirements according to the above mentioned regulations are:

Kept

Minimum limit margin:

61,75 dB at 13,56 MHz

Not kept

Maximum limit exceeding:

Expanded uncertainty (0,009 to 30MHz):

$E_{(y)} = (y \pm 4,25) \text{ dB}\mu\text{A/m}; k=2.00$

y = Indicated value

Comments:



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 15 of 67

5 Conducted emission test

according to CFR 47 Part 15, section 15.207
RSS-Gen Issue 2, section 7.2.2

5.1 Test Location

Description	Manufacturer	Inventory No.
Shielded chamber	Siemens - Matsushita	200016

5.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESH 3	Rohde & Schwarz	100002
<input type="checkbox"/>	ESCS 30	Rohde & Schwarz	100072
<input type="checkbox"/>	ESCI	Rohde & Schwarz	100132
<input checked="" type="checkbox"/>	ESH3 Z2	Rohde & Schwarz	200051
<input checked="" type="checkbox"/>	ESH 2-Z5	Rohde & Schwarz	100040



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 16 of 67

5.3 Limits

Frequency [MHz]	Quasi-peak [dB μ V]	Avarage [dB μ V]
0.15 – 0.5	66 - 56	56 – 46
0.5 – 5.0	56	46
5 – 30	60	50

5.4 Test method to demonstrate compliance

The tests of conducted emission were carried out in a shielded room using a line impedance stabilization network (LISN) 50 μ H/50ohms and a EMI test receiver. The EMI test receiver was connected to the LISN and set to a measurement bandwidth of 9kHz in the frequency range form 0.15MHz to 30MHz. The EUT was placed on a wooden table and connected to the LISN. To accelerate the measurement the detector of the EMI test receiver was set to peak and the whole frequency range form 0.15MHz to 30MHz were scanned. After that all peaks values with fewer margins than 10dB to quasi-peak limit or exceeding the limit were marked and re-measured with quasi-peak detector. If after that all values are under the average limit no addition measurement is necessary. In case there are still values between quasi-peak and average limit than these values were re-measured again with an average detector.

These measurements were done on all current carrying conductors.

According to ANSI C63.4, section 13.1.3.1 testing of intentional radiators with detachable antennas shall be done with a dummy load otherwise the tests should be done with connected antenna and if adjustable fully extended.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00


Cherry GmbH

RS6600-C3R / GT 9998


268.188

Page 17 of 67

5.5 Test setup

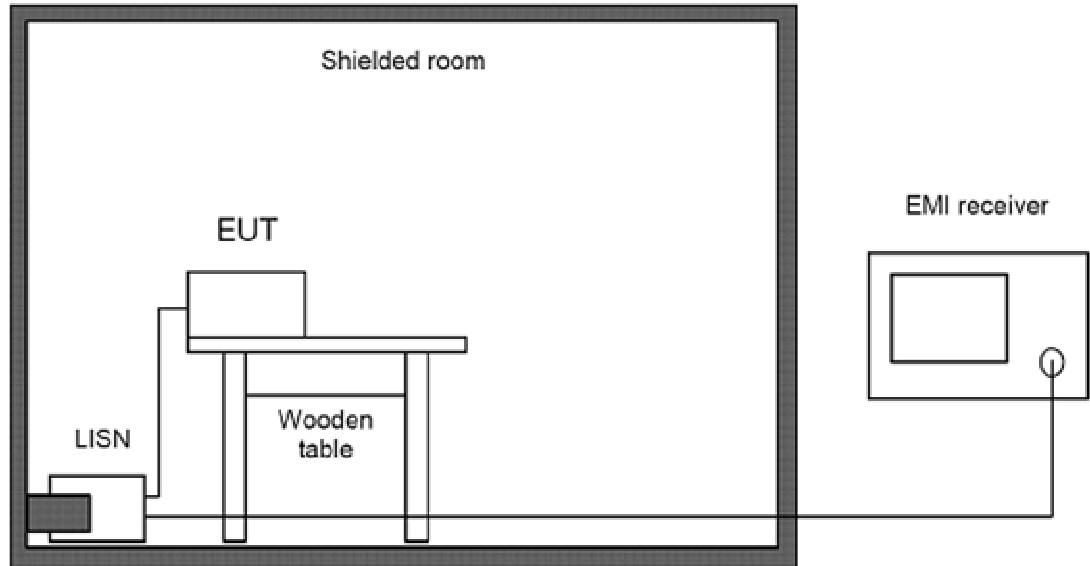

Interference Voltage Test

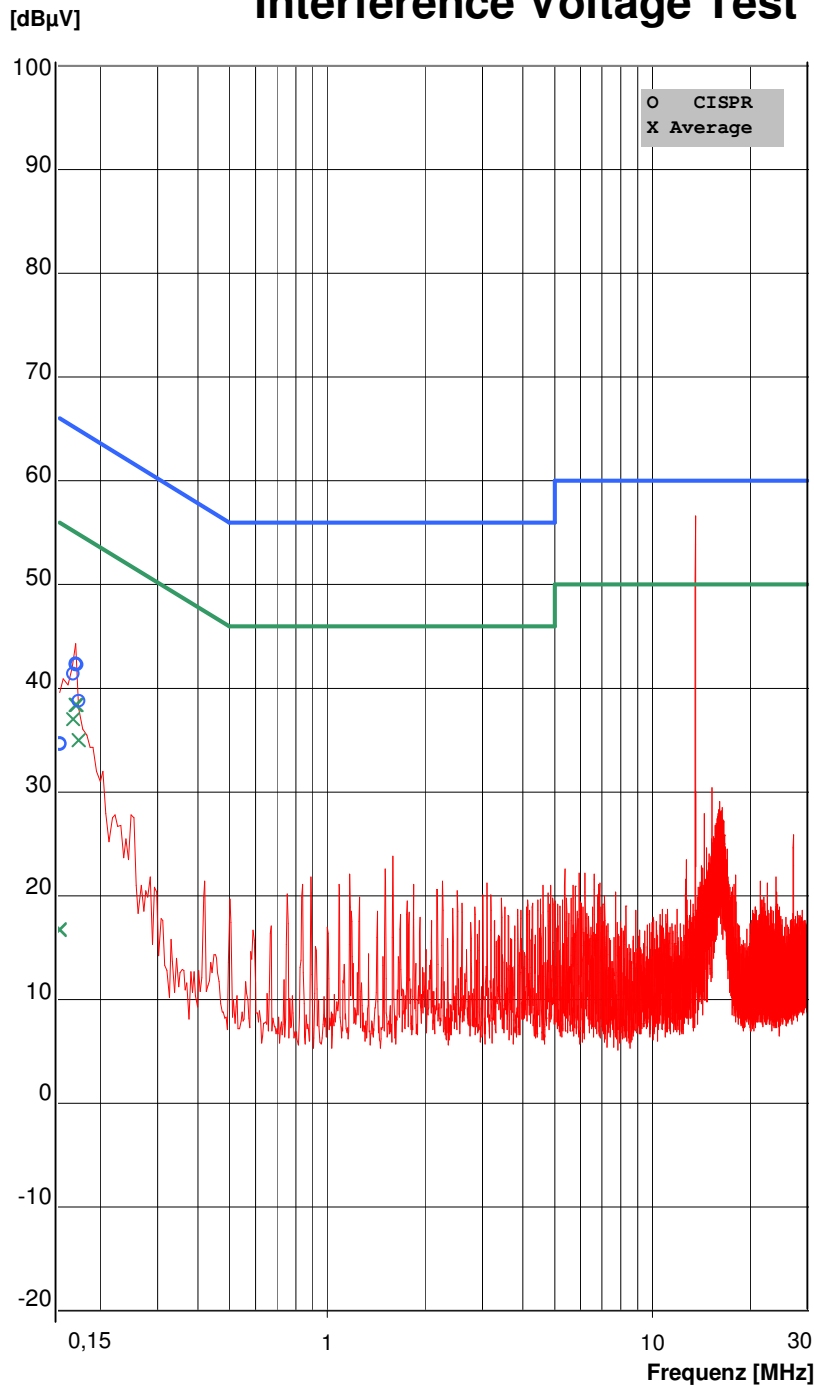

REGULATIONS:

FCC 15.207
PEAK / CISPR / AV

TEST EQUIPMENT:

R&S ESH3 (10 0 002)
R&S ESH2-Z5 (10 0 040)
R&S Pulse Limiter (20 0 051)

ORDER NO.:

268.188

EUT:

Cherry GmbH
RF ID chip card keyboard
RS6600-C3R
DL11/#07

OPERATION MODE:

EUT is continuous transmitting at
13,56 MHz
Infineon A card

Mains 110 V AC / 60Hz
Phase

TEST FACILITY:

EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing

DATE / TIME:

29.04.2008

TEST ENGINEER:

Penning Axel

188 ss L1 01.E10

Diagram 5-1: Conducted emission on phase



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 19 of 67

Interference Voltage Test

Freq. [MHz]	U_CISPR [dBµV]	Limit [dBµV]	delta_U [dB]	U_AV [dBµV]	Limit [dBµV]	delta_U [dB]	Corr. [dB]	Remark
0,17	42,4	65,1	22,7	38,4	55,1	16,7	0,0	
0,17	42,3	65,0	22,7	38,4	55,0	16,6	0,0	
0,17	42,3	65,1	22,8	38,4	55,1	16,7	0,0	
0,17	41,4	65,2	23,8	37,0	55,2	18,2	0,0	
0,17	38,8	64,9	26,1	35,0	54,9	19,9	0,0	
0,15	34,7	66,0	31,3	16,8	56,0	39,2	0,0	
0,15	34,6	66,0	31,4	16,7	56,0	39,3	0,0	
13,56		60,0			50,0		0,0	

188 ss L1 01.E10

Diagram 5-2: Conducted emission on phase



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00


Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 20 of 67

Interference Voltage Test

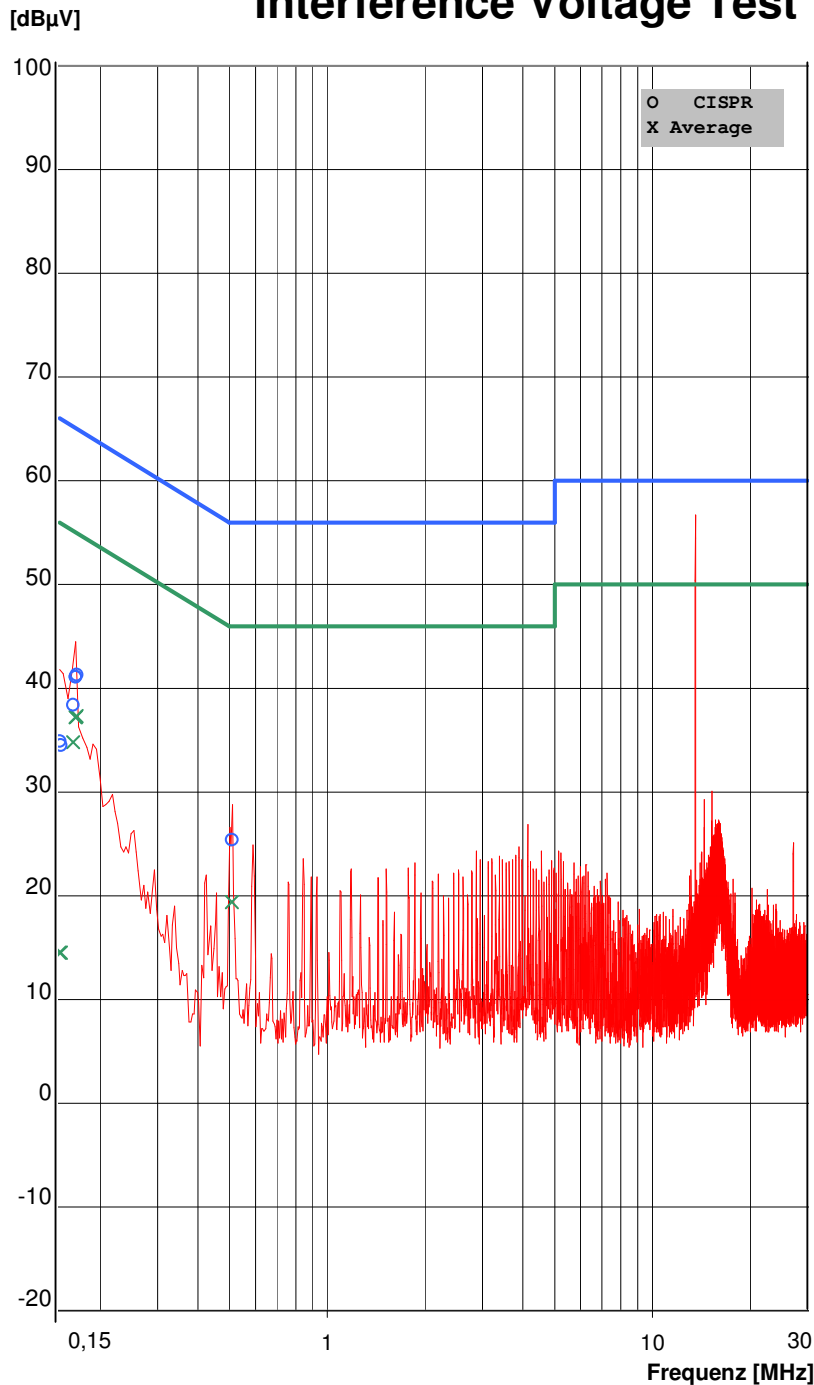

REGULATIONS:

FCC 15.207
PEAK / CISPR / AV

TEST EQUIPMENT:

R&S ESH3 (10 0 002)
R&S ESH2-Z5 (10 0 040)
R&S Pulse Limiter (20 0 051)

ORDER NO.:

268.188

EUT:

Cherry GmbH
RF ID chip card keyboard
RS6600-C3R
DL11/#07

OPERATION MODE:

EUT is continuous transmitting at
13,56 MHz
Infineon A card

Mains 110 V AC / 60Hz
Neutral

TEST FACILITY:

EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing

DATE / TIME:

29.04.2008

TEST ENGINEER:

Penning Axel

188 ss N 01.E10

Diagram 5-3: conducted emission on neutral



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 21 of 67

Interference Voltage Test

Freq. [MHz]	U_CISPR [dBµV]	Limit [dBµV]	delta_U [dB]	U_AV [dBµV]	Limit [dBµV]	delta_U [dB]	Corr. [dB]	Remark
0,17	41,3	65,0	23,7	37,3	55,0	17,7	0,0	
0,17	41,1	65,1	24,0	37,2	55,1	17,9	0,0	
0,17	41,1	65,1	24,0	37,2	55,1	17,9	0,0	
0,17	38,4	65,2	26,8	34,8	55,2	20,4	0,0	
0,51	25,4	56,0	30,6	19,4	46,0	26,6	0,0	
0,15	34,9	66,0	31,1	14,5	56,0	41,5	0,0	
0,15	34,5	65,9	31,4	14,5	55,9	41,4	0,0	
13,56		60,0			50,0		0,0	

188 ss N 01.E10

Diagram 5-4: Conducted emission on neutral



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 22 of 67

5.6 Test result

The requirements according to the above mentioned regulations are:

Kept

Minimum limit margin:

17,7 dB at 0,17 MHz

Not kept

Maximum limit exceeding:

Expanded Uncertainty (9kHz to 150kHz):

$$U_{(y)} = (y \pm 4.024) \text{ dB}\mu\text{V}; k=2.00$$

y = Indicated value

Expanded Uncertainty (150kHz to 30MHz):

$$U_{(y)} = (y \pm 3.604) \text{ dB}\mu\text{V}; k=2.00$$

y = Indicated value

Comments: The 13,56MHz disturbance belongs to the carrier frequency, which is exempted for this test. Due to fixed internal antenna a test with 50ohm dummy was not possible.

All peripheral devices were additionally decoupled by means of a line stabilization network.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 23 of 67

6 Measurement of radiated emission

according to CFR 47 Part 15, section 15.205(d7), 15.209
RSS-210 Issue 7, section 2.6

Radiated emission measurement from 9kHz to 30MHz:

6.1 Location of measurement

- Scan with peak detector in 3 m CDC
- Final CISPR measurement with quasi peak detector on 3m open site area.

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	100089
Open site area	EMV TESTHAUS GmbH	200017

6.2 Measurement equipment

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	100072
<input checked="" type="checkbox"/>	ESCI (CDC and FF)	Rohde & Schwarz	100132
<input type="checkbox"/>	ESVP (FF)	Rohde & Schwarz	100001
<input type="checkbox"/>	VULB 9163 (CDC)	Schwarzbeck	100077
<input type="checkbox"/>	VULB 9160 (FF)	Schwarzbeck	100064
<input checked="" type="checkbox"/>	Feedline OATS	Huber & Suhner	200024
<input checked="" type="checkbox"/>	HFH2-Z2 (CDC and FF)	Rohde & Schwarz	100005



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 24 of 67

6.3 Limits

Frequency [MHz]	Field strength Fs [$\mu\text{V/m}$]	Field strength [dB $\mu\text{V/m}$]	Measurement distance d [m]
0.009 – 0.490	266.7 – 4.9	48.5 – 13.8	300
0.490 – 1.705	49.0 – 14.1	33.8 – 23.0	30
1.705 - 30	30	29.5	30

To calculate the limit for 3m measurement distance the following calculation was used.

$$L_{dm} = L_d + (-40 \frac{dB}{dec} * (\log(dm) - \log(d)))$$

L_{dm} = Limit at the new distance
 L_d = Limit according ANSI 63.4
 dm = Distance according to ANSI 63.4
 d = New distance for limit

$$L_{dm} = 48.5 \frac{dB\mu V}{m} + (-40 \frac{dB}{dec} * (\log(3m) - \log(300m))) = 128,5dB \quad \text{for 0.009MHz}$$

$$L_{dm} = 13.8 \frac{dB\mu V}{m} + (-40 \frac{dB}{dec} * (\log(3m) - \log(300m))) = 93.8dB \quad \text{for 0.490MHz (high)}$$

$$L_{dm} = 33.8 \frac{dB\mu V}{m} + (-40 \frac{dB}{dec} * (\log(3m) - \log(30m))) = 73.8dB \quad \text{for 0.490MHz (low)}$$

$$L_{dm} = 23 \frac{dB\mu V}{m} + (-40 \frac{dB}{dec} * (\log(3m) - \log(30m))) = 63dB \quad \text{for 1.705MHz (high)}$$

$$L_{dm} = 29.5 \frac{dB\mu V}{m} + (-40 \frac{dB}{dec} * (\log(3m) - \log(30m))) = 69.5dB \quad \text{for 1.705MHz (low)}$$



6.4 Test method to demonstrate compliance


An EMI test receiver was used and connected to the loop antenna. The EUT was placed on a wooden table in a distance of 3m inside a compact diagnostic chamber.. The loop antenna was placed in vertical polarization at an angle of 0° and the EMI receiver performed a scan from 0.009MHz to 30MHz with the detector set to peak and the measurement bandwidth to 200Hz. At .150kHz the measurement bandwidth was changed to 9kHz.


This procedure was repeated at 6 different positions of the EUT by rotating turn table. All peak values over the limit or with less distance to limit then 6dB were marked and re-measured with a quasi-peak detector with the following method on a 3m open area test site.

The turn table was turned 360° to find the position of maximum field strength. After reaching this position the loop antenna was rotated 360° to find the maxima. The measured value was recorded. This measurement was done for all marked frequencies with respect to the appropriate bandwidth for the frequency ranges.

To check the horizontal polarization the EUT was rotated by 90° instead of the loop antenna and the procedure was repeated. Both results are combined inside on graphic.

6.5 Test setup

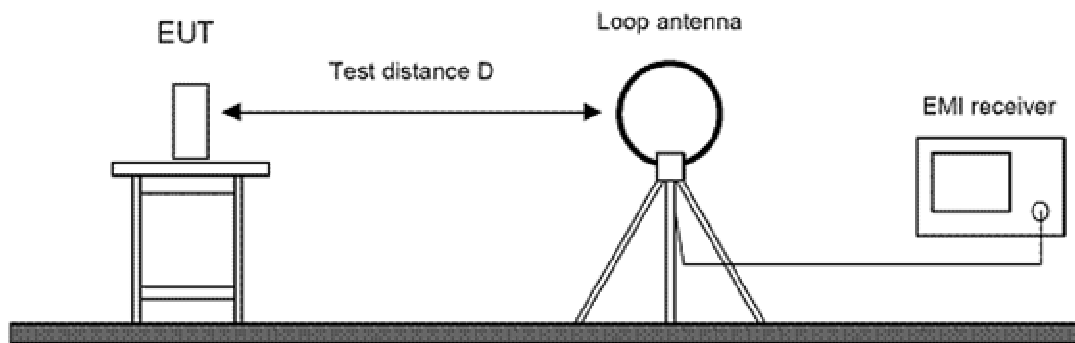

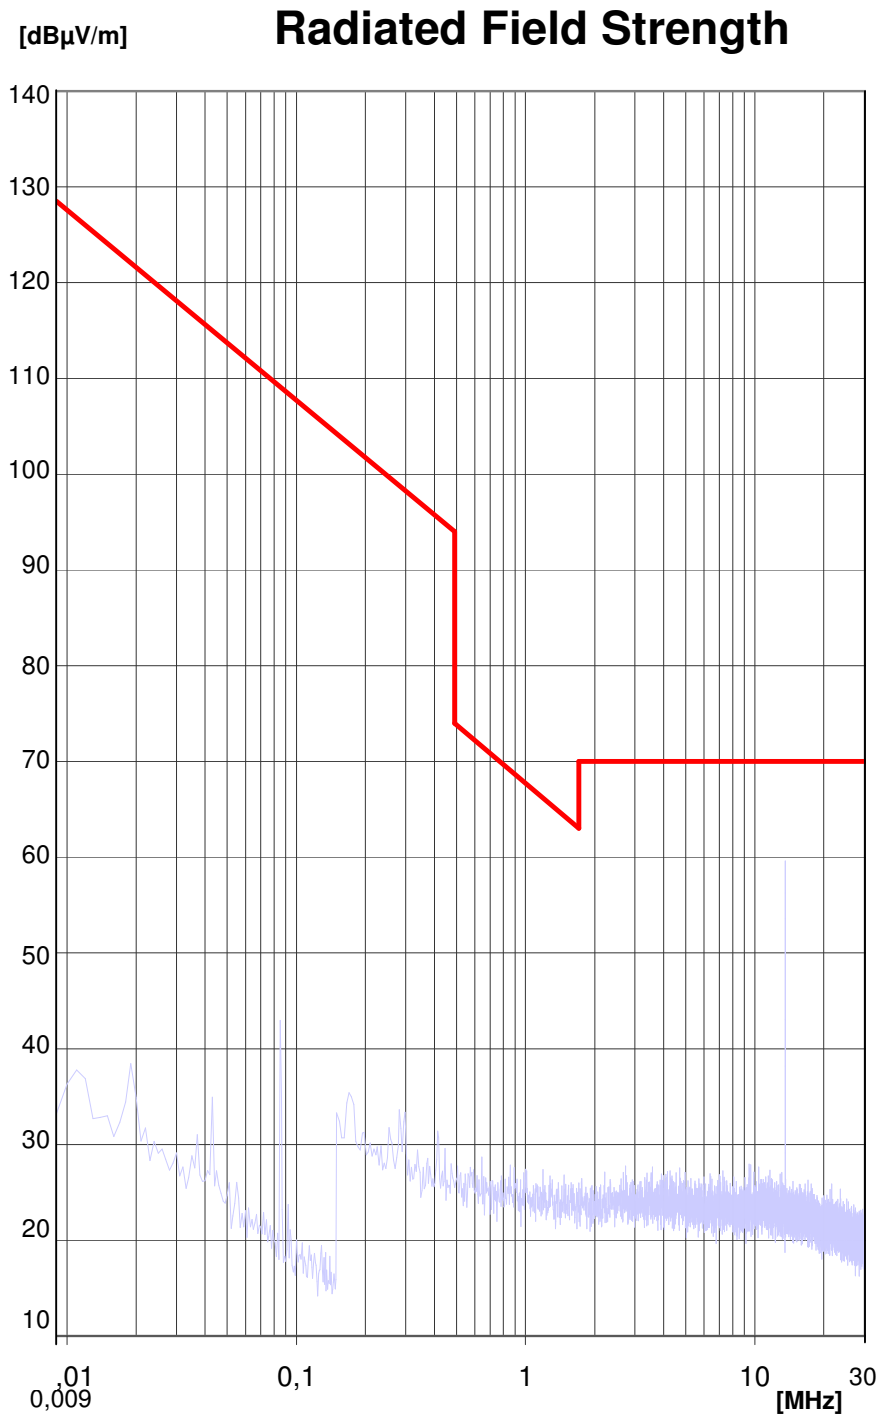

REGULATIONS:
 FCC 15.209
 PEAK / CISPR

TEST EQUIPMENT:
 R&S ESCI (10 0 132)
 R&S HFH2-Z2 (10 0 005)

ORDER NO.:
 268.188

EUT:
 Cherry GmbH
 Keyboard
 RS6600-C3R / G83-6675 LUA
 With RFID Reader

OPERATION MODE:
 Continuous transmission
 with modulation
 13,56MHz
 Infineon Card A


TEST FACILITY:
 EMV TESTHAUS GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing

DATE / TIME:
 02.05.2008
 21 °C 63 %H

TEST ENGINEER:
 Penning Axel

188 cdc FCC-RSS 9kHz-30MHz

Picture: 6-1 Radiated field strength 0,009 MHz – 30 MHz (pre scan)

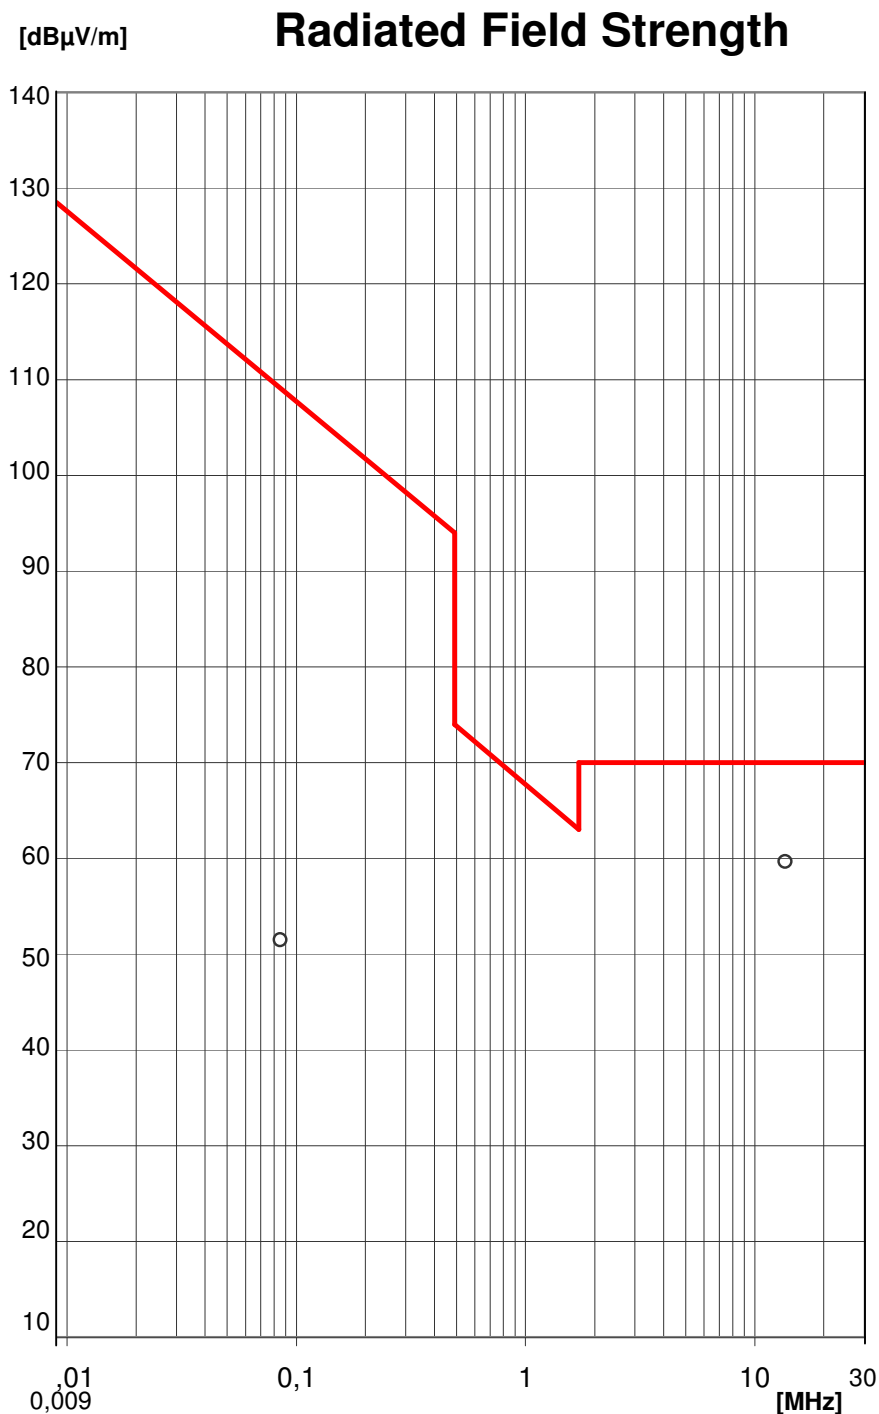

REGULATIONS:
 FCC 15.209
 PEAK / CISPR

TEST EQUIPMENT:
 R&S ESCI (10 0 132)
 R&S HFH2-Z2(10 0 005)
 Suhner (20 0 024)

ORDER NO.:
 268.188

EUT:
 Cherry GmbH
 Keyboard
 RS6600-C3R / G83-6675 LUA
 With RFID Reader

OPERATION MODE:
 Continuous transmission
 with modulation
 13,56MHz
 Infineon Card A

TEST FACILITY:
 EMV TESTHAUS GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing

DATE / TIME:
 02.05.2008
 21 °C 63 %H

TEST ENGINEER:
 Penning Axel

188 cdc FCC-RSS 9kHz-30MHz

Picture: 6-2 Radiated field strength 0,009 MHz – 30 MHz (final)

Radiated Field Strength

Freq. [MHz]	I_Rec [dBm]	Limit [dBm]	Corr. [dB]	I_Ant. [dBm]	delta_I [dB]	Turn- table	Antenna	Pol.	Remark
0,09	51,5	109,1	51,5	0,0	57,6	0°	100 cm	H	188 cdc FCC-RSS 9kHz-30MHz
13,56	59,7	70,0	51,5	8,2	10,3	105°	100 cm	H	

Table: 6-1 Radiated field strength 0,009 MHz – 30 MHz (final)

6.6 Test result

The requirements according to the above mentioned regulations are:

Kept

Minimum limit margin:

10,3 dB at 13,56 MHz

Not kept

Maximum limit exceeding:

Expanded Uncertainty (9kHz to 150kHz):

$$U_{(y)} = (y \pm 4.024) \text{ dB}\mu\text{V}; k=2.00$$

y = Indicated value

Expanded Uncertainty (150kHz to 30MHz):

$$U_{(y)} = (y \pm 3.604) \text{ dB}\mu\text{V}; k=2.00$$

y = Indicated value



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 30 of 67

6.7 Radiated emission measurement from 30kHz to 1000MHz

6.8 Location of measurement

- Scan with peak detector in 3 m CDC witch is correlated to the 10m open site area.
- Final CISPR measurement with quasi peak detector on 10m open site area.

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	100089
Open site area	EMV TESTHAUS GmbH	200017

6.9 Measurement equipment

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	100072
<input checked="" type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	100132
<input checked="" type="checkbox"/>	ESVP (FF)	Rohde & Schwarz	100001
<input checked="" type="checkbox"/>	VULB 9163 (CDC)	Schwarzbeck	100077
<input checked="" type="checkbox"/>	VULB 9160 (FF)	Schwarzbeck	100064
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	100005
<input checked="" type="checkbox"/>	Feedline OATS	Huber & Suhner	200024



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 31 of 67

6.10 Limits

Frequency [MHz]	Field strength Fs [$\mu\text{V/m}$]	Field strength [dB $\mu\text{V/m}$]	Measurement distance d [m]
30 – 88	100	40	3
88 – 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

To calculate the limit for 10m measurement distance the following calculation was used.

$$L_{dm} = L_d + (-20 \frac{dB}{dec} * (\log(dm) - \log(d)))$$

L_{dm} = Limit at the new distance
 L_d = Limit according ANSI 63.4
 d = Distance according to ANSI 63.4
 dm = New distance for limit

$$L_{dm} = 40 \frac{dB\mu V}{m} + (-20 \frac{dB}{dec} * (\log(10m) - \log(3m))) = 30dB \quad \text{for 30MHz to 88MHz}$$

$$L_{dm} = 43,5 \frac{dB\mu V}{m} + (-20 \frac{dB}{dec} * (\log(10m) - \log(3m))) = 33.5dB \quad \text{for 88MHz to 216MHz}$$

$$L_{dm} = 46 \frac{dB\mu V}{m} + (-20 \frac{dB}{dec} * (\log(10m) - \log(3m))) = 36dB \quad \text{for 216MHz to 960MHz}$$

$$L_{dm} = 54 \frac{dB\mu V}{m} + (-20 \frac{dB}{dec} * (\log(10m) - \log(3m))) = 44dB \quad \text{above 960MHz}$$



6.11 Test method to demonstrate compliance


An EMI test receiver was used and connected to a broadband antenna. The EUT was placed on a wooden table in a distance of 3m inside a compact diagnostic chamber. This chamber is a fully anechoic chamber and correlated to our 10m open site. Therefore the 10m limit was applicable for the pre-scan inside this chamber. The broadband antenna was placed in vertical polarization and the EMI receiver performed a scan from 30MHz to 1000MHz with the detector set to peak and the measurement bandwidth to 120kHz.

This procedure was repeated at 6 different positions of the EUT by rotating turn table. After that die polarization switched to horizontal and repeated this procedure. After all 12 scans the results of the two polarizations were combined.

All peak values over or with less distance to limit then 6dB were marked and re-measured with a quasi-peak detector with the following method on a 10m open area test site.


The turn table was turned 360° to find the position of maximum field strength. After reaching this position the antenna was moved form 1m to 4m height to find the maximum value. This value was recorded.

6.12 Test setup

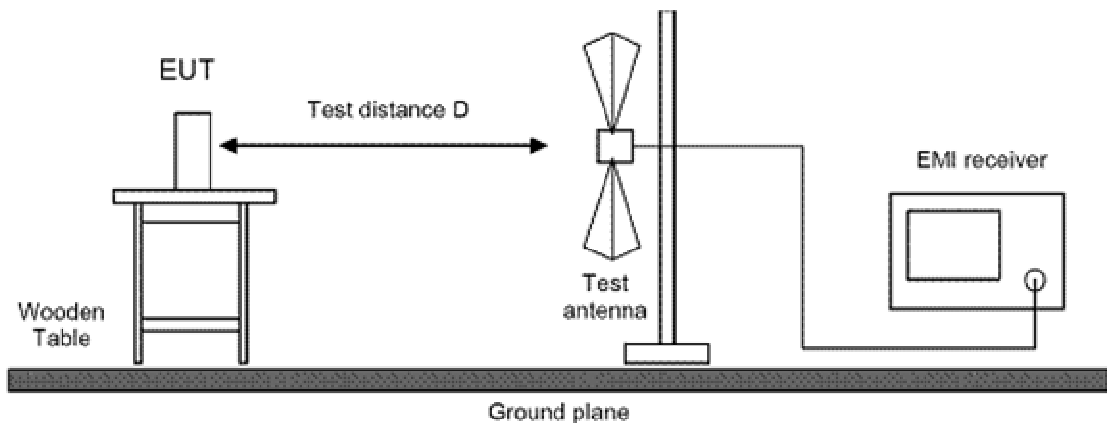

[dB μ V/m]

Interference Radiation Test

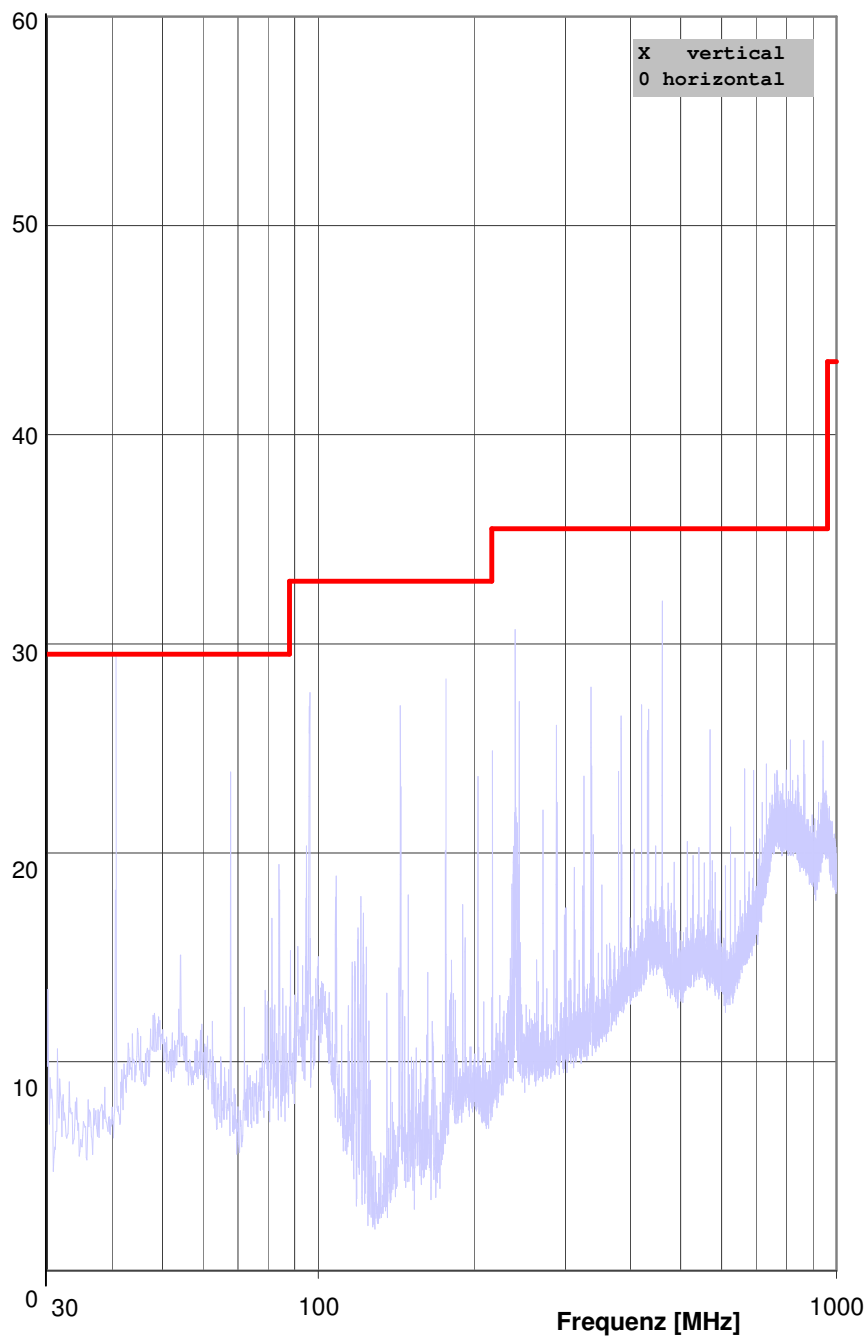

REGULATIONS:

FCC 15.209
PEAK / CISPR

TEST EQUIPMENT:

R&S ESCI (10 0 132)
VULB 9163 (10 0 077)

ORDER NO.:

268.188

EUT:

Cherry GmbH
Keyboard with RF ID reader
RS6600-C3R
DL11/#07

OPERATION MODE:

EUT is continuous transmitting
at 13,56 MHz
Infineon A card

TEST FACILITY:

EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing

DATE / TIME:

24.04.2008

TEST ENGINEER:

Penning Axel

188 edc FCC-RSS

Picture: 6-3 Radiated emission 30 MHz – 1000MHz (pre scan)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00


Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 34 of 67

Interference Radiation Test

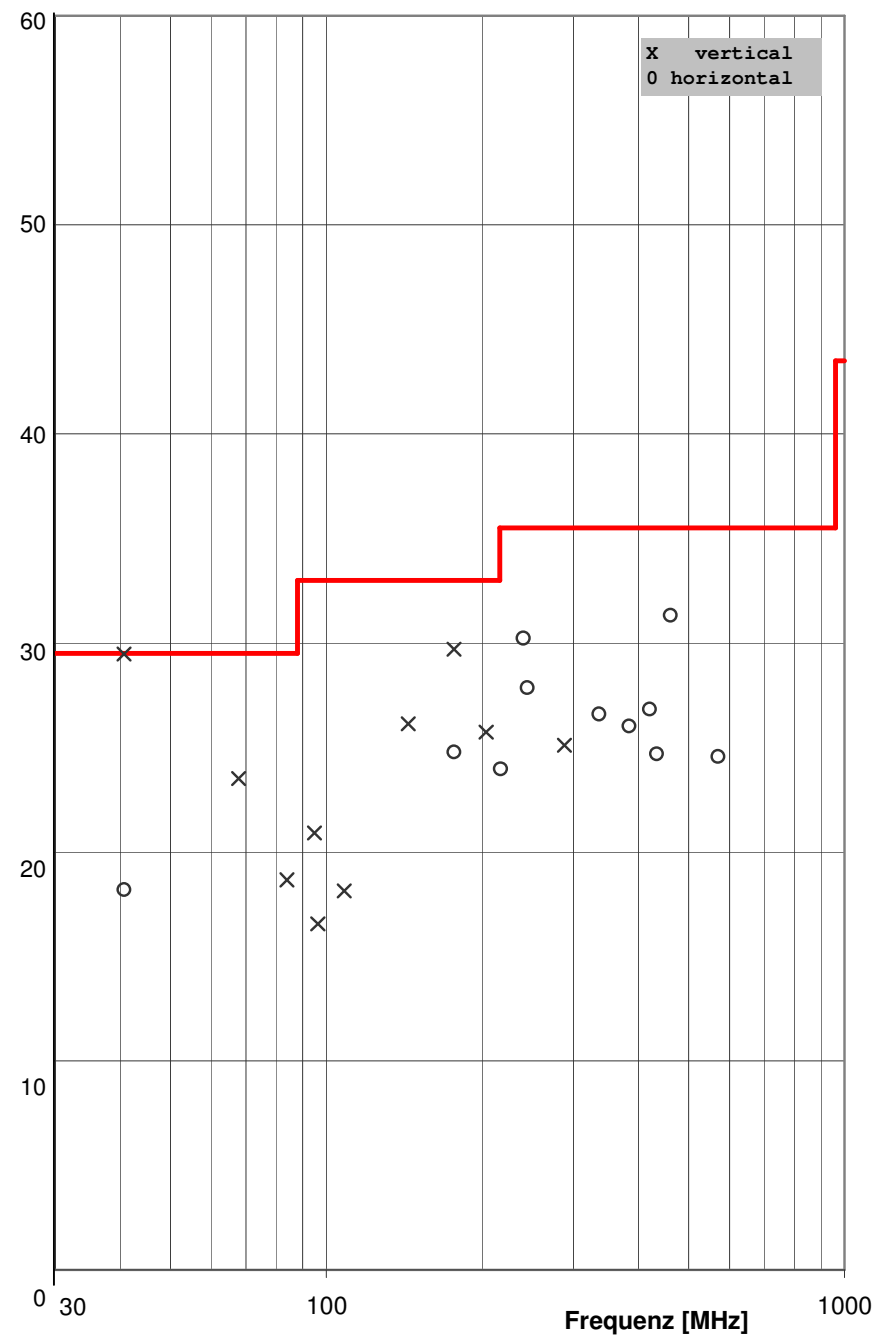

REGULATIONS:
 FCC 15.209
 PEAK / CISPR

TEST EQUIPMENT:
 R&S ESVP (10 0 001)
 VULB 9160 (10 0 064)
 Suhner (20 0 024)

ORDER NO.:
 268.188

EUT:
 Cherry GmbH
 Keyboard with RF ID reader
 RS6600-C3R
 DL11/#07

OPERATION MODE:
 EUT is continuous transmitting
 at 13,56 MHz
 Infineon A card

TEST FACILITY:
 EMV TESTHAUS GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing

DATE / TIME:
 24.04.2008

TEST ENGINEER:
 Penning Axel

188 cdc FCC-RSS

Picture: 6-4 Radiated emission 30 MHz – 1000MHz (final)

Interference Radiation Test

Freq. [MHz]	U_Rec [dBµV/m]	Limit [dBµV/m]	Corr. [dB]	U_Ant. [dBµV]	delta_U [dB]	Turn- table	Antenna	Pol.	Remark
40,70	18,2	29,5	2,1	16,1	11,3	154°	100 cm	H	
40,70	29,5	29,5	8,3	21,1	0,0	113°	100 cm	V	
67,80	23,5	29,5	6,9	16,6	6,0	254°	100 cm	V	
84,00	18,7	29,5	7,1	11,6	10,8	115°	100 cm	V	
94,90	20,9	33,0	7,3	13,6	12,1	249°	100 cm	V	
96,30	16,6	33,0	7,6	8,9	16,4	50°	100 cm	V	
108,30	18,1	33,0	7,5	10,6	14,9	190°	100 cm	V	
144,00	26,1	33,0	3,1	23,0	6,9	124°	100 cm	V	
176,30	24,8	33,0	4,5	20,3	8,2	170°	100 cm	H	
176,30	29,7	33,0	6,3	23,4	3,3	265°	100 cm	V	
203,40	25,7	33,0	8,6	17,1	7,3	95°	100 cm	V	
217,00	24,0	35,5	8,8	15,2	11,5	12°	100 cm	H	
240,00	30,2	35,5	10,4	19,8	5,3	255°	100 cm	H	
244,10	27,8	35,5	10,5	17,4	7,7	175°	100 cm	H	
288,00	25,1	35,5	10,1	15,0	10,4	9°	100 cm	V	
335,90	26,6	35,5	11,3	15,3	8,9	81°	100 cm	H	
384,00	26,0	35,5	13,2	12,8	9,5	83°	100 cm	H	
420,40	26,8	35,5	14,5	12,3	8,7	231°	100 cm	H	
434,00	24,7	35,5	15,0	9,7	10,8	236°	100 cm	H	
461,10	31,3	35,5	15,0	16,3	4,2	54°	100 cm	H	
569,60	24,6	35,5	12,8	11,7	10,9	245°	100 cm	H	

188 cdc FCC-RSS

Table: 6-2 Radiated emission 30 MHz – 1000MHz (final)



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 36 of 67

6.13 Test result

The requirements according to the above mentioned regulations are:

Kept

Minimum limit margin:

0,3 dB at 40.70 MHz

Not kept

Maximum limit exceeding:

Expanded uncertainty (30MHz to 300MHz):

$$E_{(y)} = (y \pm 4.994) \text{ dB}\mu\text{V/m}; k=2.00$$

y = Indicated value

Expanded uncertainty (300MHz to 1000MHz):

$$E_{(y)} = (y \pm 5.276) \text{ dB}\mu\text{V/m}; k=2.00$$

y = Indicated value

Comments:



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 37 of 67

7 Occupied Bandwidth (99%)

according to CFR 47 Part 2 section 2.202

7.1 Test location

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	100089

7.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	100072
<input checked="" type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	100132
<input checked="" type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	100005
<input type="checkbox"/>	VULB 9163 (CDC)	Schwarzbeck	100077
<input type="checkbox"/>	VULB 9160 (FF)	Schwarzbeck	100064

7.3 Test method to demonstrate compliance

The EUT has no detachable antenna therefore the radiated method was used

The occupied bandwidth is measured as the 99% bandwidth. For this measurement the occupied bandwidth function of the spectrum analyzer was used.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 38 of 67


The resolution bandwidth of the spectrum analyzer shall be set to a greater value than 5% of the allowed bandwidth.


Because no resolution bandwidth was given the following guideline from ANSI C63.4 annex H6 was consulted.

Fundamental frequency	Minimum resolution bandwidth
0.009MHz to 30MHz	1kHz
30MHz to 1000MHz	10kHz
1000MHz to 40000MHz	100kHz

The video bandwidth was adjusted at least 3 times wider than the resolution bandwidth

7.4 Test setup

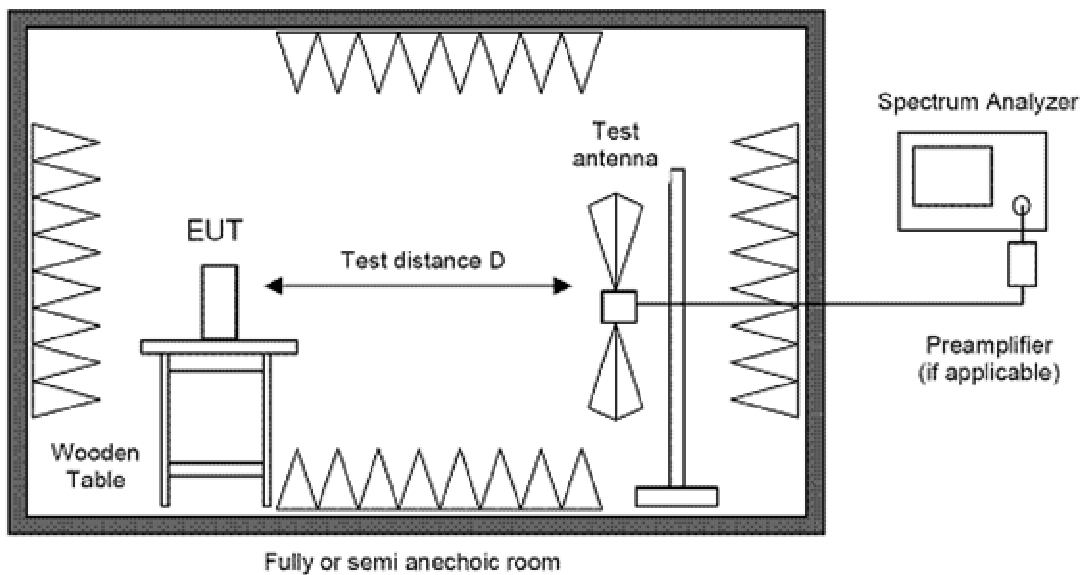

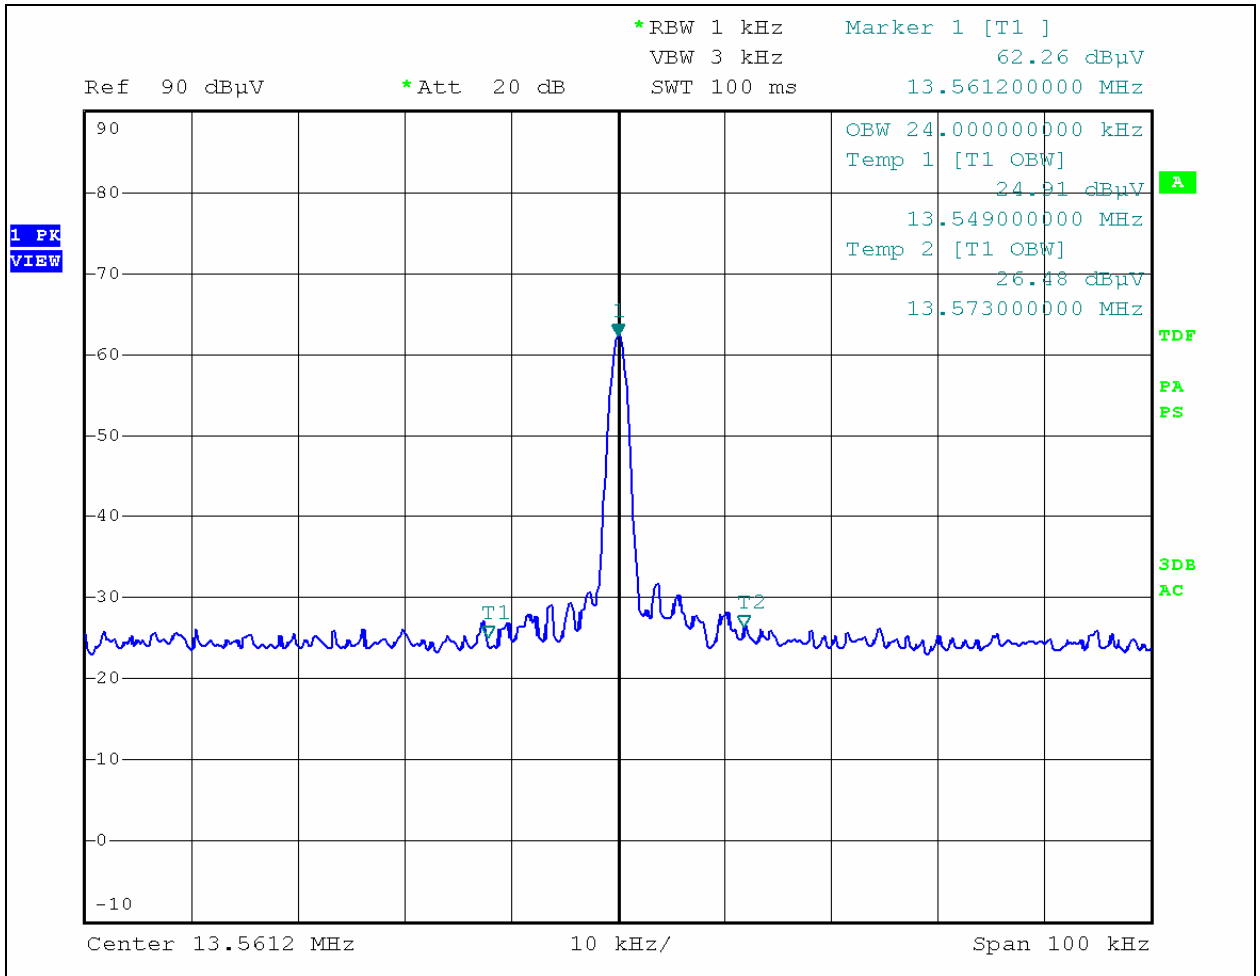

Picture 7-1: Occupied bandwidth 99%

Frequency lower value: 13,549MHz Limit: 13,110MHz
 Frequency upper value: 13,573MHz Limit: 14,010MHz

Occupied Bandwidth: 24kHz



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 40 of 67

7.5 Test results

The requirements according to the above mentioned regulations are:

Kept

Not kept



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 41 of 67

8 Occupied Bandwidth (20dB)

according to FCC Part 15, section 15.215(c)

8.1 Test location

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	100089

8.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	100072
<input checked="" type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	100132
<input checked="" type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	100005
<input type="checkbox"/>	VULB 9163 (CDC)	Schwarzbeck	100077
<input type="checkbox"/>	VULB 9160 (FF)	Schwarzbeck	100064

8.3 Test method to demonstrate compliance

The EUT has no detachable antenna therefore the radiated method was used

The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.

For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature

and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation


The resolution bandwidth of the spectrum analyzer shall be set to a greater value than 5% of the allowed bandwidth.


Because no resolution bandwidth was given the following guideline from ANSI C63.4 annex H6 was consulted.

Fundamental frequency	Minimum resolution bandwidth
0.009MHz to 30MHz	1kHz
30MHz to 1000MHz	10kHz
1000MHz to 40000MHz	100kHz

The video bandwidth was adjusted at least 3 times wider than the resolution bandwidth

8.4 Test setup

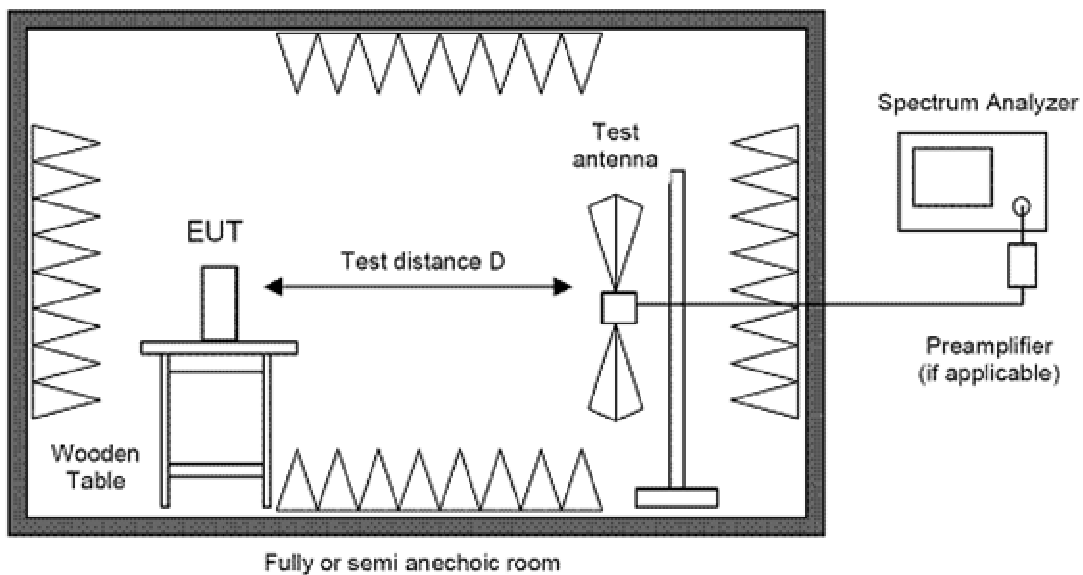

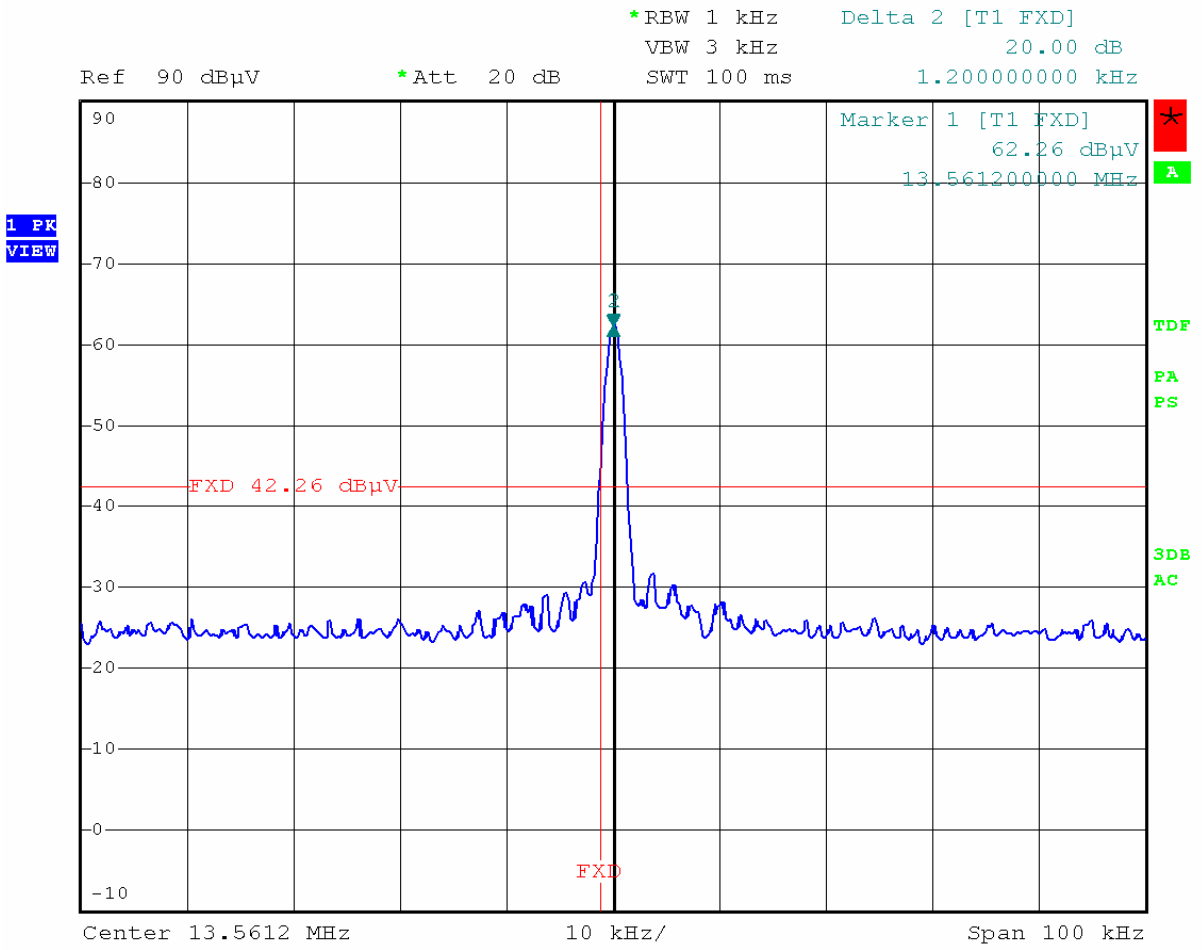

Picture 8-1: Occupied bandwidth lower value




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 44 of 67

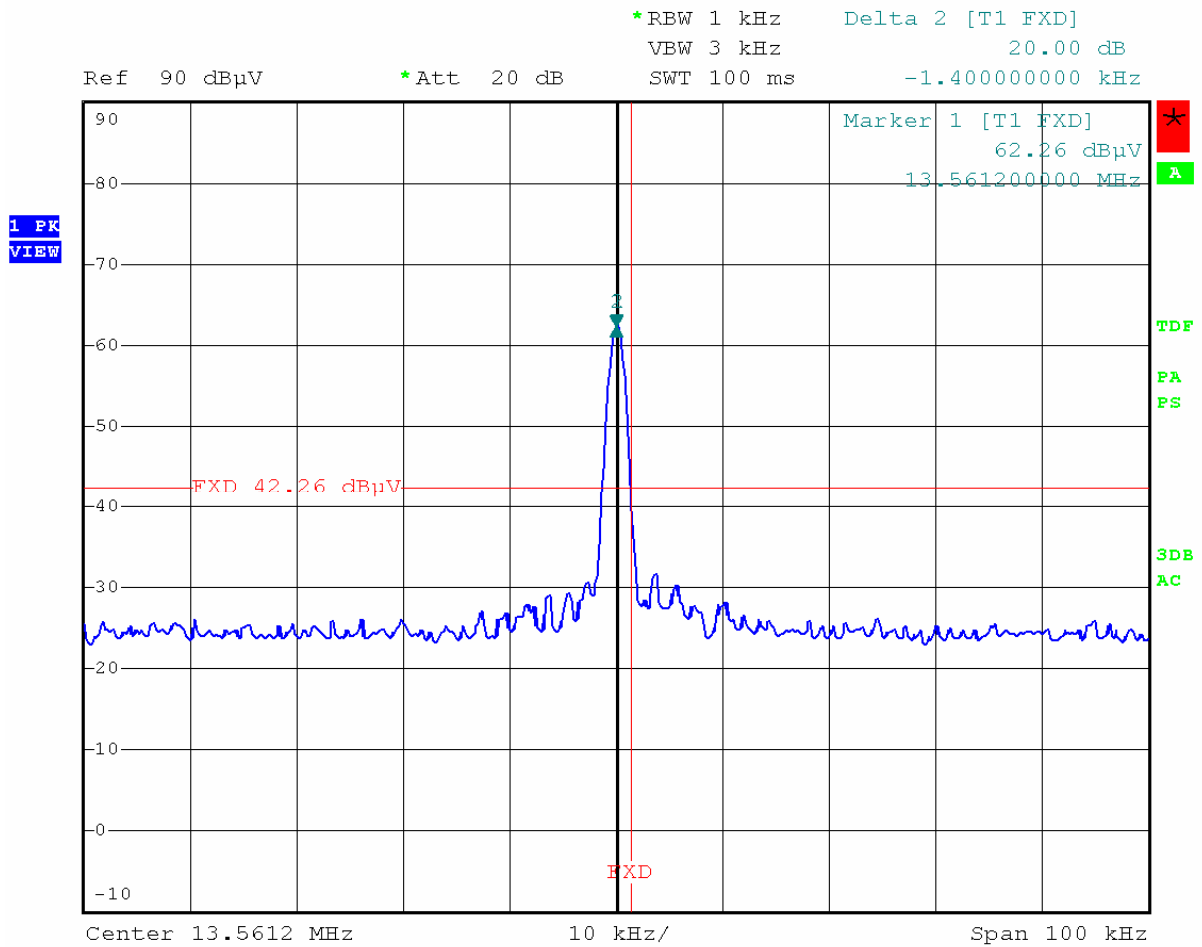

Picture 8-2: Occupied bandwidth upper value

Frequency lower value:	13,5600MHz	Limit: 13,110MHz
Frequency upper value:	13,5626MHz	Limit: 14,010MHz
Occupied Bandwidth:	2,6kHz	



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 45 of 67

8.5 Test results

The requirements according to the above mentioned regulations are:

Kept

Not kept



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 46 of 67

9 Occupied Bandwidth (99%)

according to RSS Gen Issue 2, section 4.6.1

9.1 Test location

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	100089

9.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	100072
<input checked="" type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	100132
<input checked="" type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	100005
<input type="checkbox"/>	VULB 9163 (CDC)	Schwarzbeck	100077
<input type="checkbox"/>	VULB 9160 (FF)	Schwarzbeck	100064

9.3 Test method to demonstrate compliance

The EUT has no detachable antenna therefore the radiated method was used

If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00


Cherry GmbH


RS6600-C3R / GT 9998

268.188

Page 47 of 67

9.4 Test setup

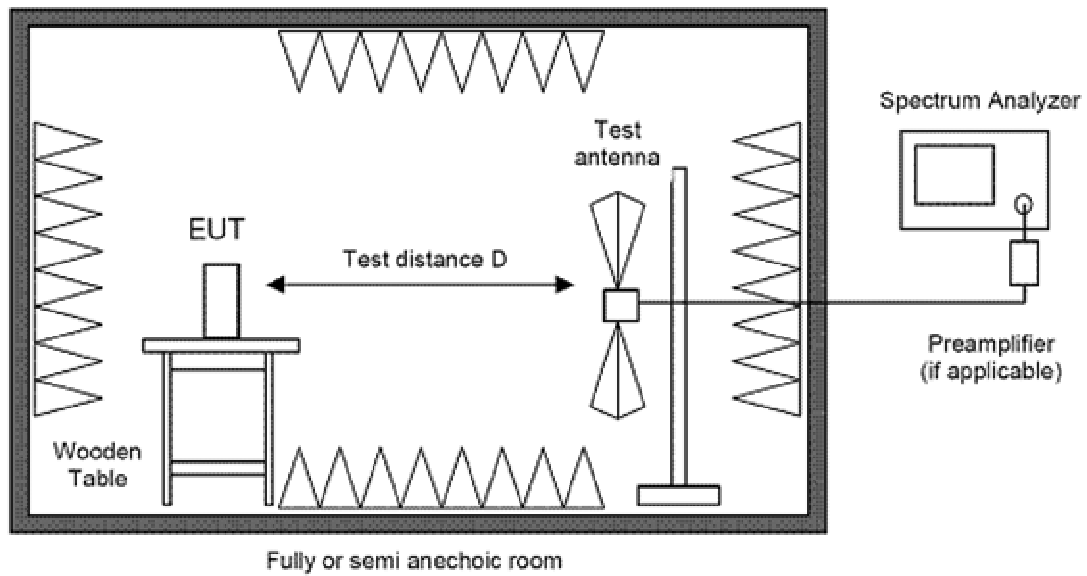

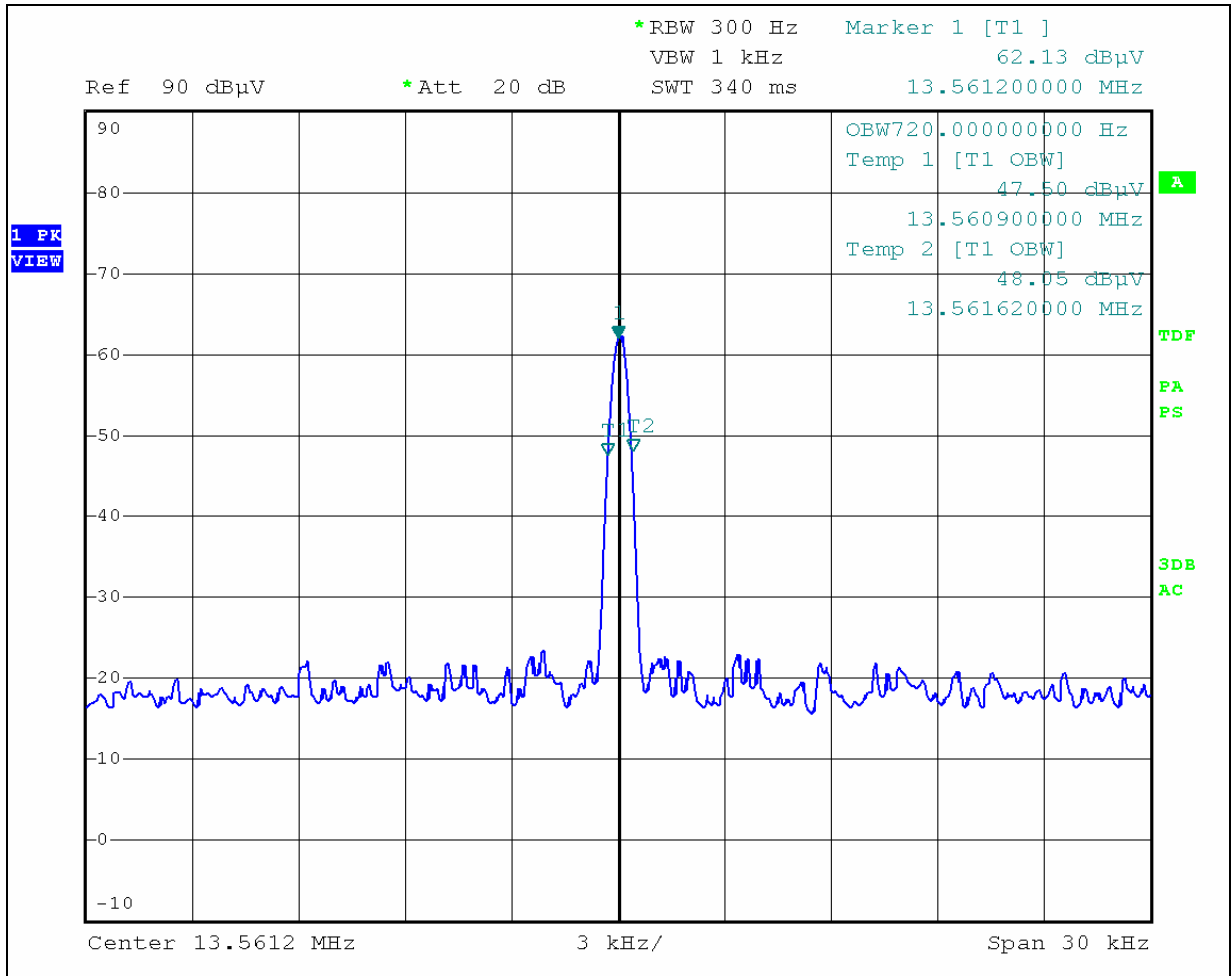

Picture 9-1: Occupied bandwidth 99%

Frequency lower value: 13,56090MHz Limit: 13,110MHz
 Frequency upper value: 13,56162MHz Limit: 14,010MHz

 Occupied Bandwidth: 720Hz



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 49 of 67

9.5 Test results

The requirements according to the above mentioned regulations are:

Kept

Not kept



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 50 of 67

10 Carrier frequency stability

according to CFR 47 Part 15, section 15.225(e)
RSS-Gen Issue 2, section 7.2.4 and 4.7(b)

10.1 Test location

Description	Manufacturer	Inventory No.
Climatic Chamber VC4100	Vötsch	110023

10.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCI	Rohde & Schwarz	100132
<input checked="" type="checkbox"/>	Test Probe RFR400-1	Langer	200086
<input checked="" type="checkbox"/>	Power Supply	Statron	300193
<input checked="" type="checkbox"/>	Multimeter	Metra Hit 29S	100080
<input type="checkbox"/>	USLP 9142	USLP 9142	100044

10.3 Test method to demonstrate compliance

The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C.

If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 51 of 67


For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage
- the battery nominal voltage
- 85% of the battery nominal voltage
- the battery operating end point voltage which shall be specified by the equipment manufacturer

The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance

10.4 Test setup

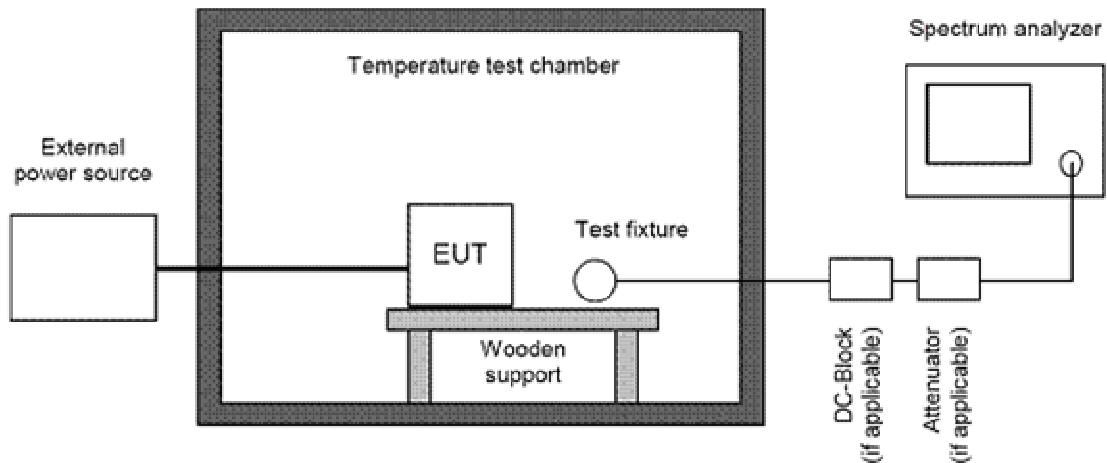

10.5 Carrier vs. temperature

Supply Voltage 5V		Nominal frequency 13.561320 MHz	
Temperature	Carrier frequency	Δ Frequency	Deviation
°C	MHz	Hz	ppm
-20	13,56136	+40	+2,9
-10	13,56135	+30	+2,2
0	13,56133	+10	+0,7
+10	13,56133	+10	+0,7
+20	13,56132	0	0
+30	13,56130	-20	-1,5
+40	13,56126	-60	-4,4
+50	13,56124	-80	-5,8
Limit \pm 100ppm			



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 53 of 67

10.6 Test result

The requirements according to the above mentioned regulations are:

Kept

Not kept



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 54 of 67

10.7 Carrier vs. input voltage

Temperature 20 °C		Nominal frequency 13.561320 MHz	
Voltage	Carrier frequency	Δ Frequency	Deviation
V	MHz	Hz	ppm
4,25	13,56133	+10	+0,7
5V	13,56132	0	0
5,75	13,56133	+10	+0,7
Limit \pm 100ppm			



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 55 of 67

10.8 Test result

The requirements according to the above mentioned regulations are:

Kept

Not kept



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 56 of 67

11 Designation of Emissions

according to CFR 47 Part 2, Sections 2.201 and 2.202
RSS-Gen Issue 2, Sections 3.2(h) and 8

11.1 Designation

Type of Modulation:	Amplitude Modulation
Necessary Bandwidth: Modulation Rate: Overall numerical Factor:	$B_n = 2 \cdot B \cdot K$ $B = 5kHz$ $K = 1$ $B_n = 2 \cdot 5kHz \cdot 1 = 10kHz$
Designation of Emissions according ITU-R:	10K0A1D

Remarks:



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 57 of 67

12 Exposure of Humans to RF Fields

according to RSS-Gen Issue 2, section 5.5 and
RSS-102 Issue 2, section 2.5

12.1 Antenna type and power calculation

- Antenna detachable

$$EIRP = G \cdot CP$$

G: numerical antenna gain
CP: conducted output power [W]

- Antenna not detachable

$$EIRP = \frac{(F_s \cdot D)^2}{30}$$

Fs: field strength [V/m]
D: distance between antennas [m]

$$EIRP = \frac{(1.30 \cdot 3)^2}{30} = 507 nW$$

12.2 Distance between user and transmitting device*

- Distance >20cm
 Distance <20cm

*declared by applicant



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 58 of 67

12.3 Exemption from SAR evaluation

SAR evaluation is required if separation distance between user and devices is less than, or equal to 20cm, except the device operates:

- from 3 kHz up to 1 GHz inclusively and its source based time-averaged output power is ≤ 200 mW for general public use and ≤ 1000 mW for controlled use.
- above 1 GHz up to 2.2 GHz inclusively and its source-based time-averaged output power is ≤ 100 mW for general public use and ≤ 500 mW for controlled use.
- above 2.2 GHz up to 3 GHz inclusively and its source-based time-averaged output power is ≤ 20 mW for general public use and ≤ 100 mW for controlled use.
- above 3 GHz up to 6 GHz inclusively and its source-based time-averaged Output power is ≤ 10 mW for general public use and ≤ 50 mW for controlled use.

See output power calculation 12.1

12.4 Exemption from RF exposure evaluation

RF exposure evaluation is required if separation distance between user and devices is greater than 20cm, except the device operates:

- below 1,5GHz and its e.i.r.p is equal to, or less than 2.5W.
- above 1,5GHz and the e.i.r.p of the device is equal to or less than 5W.

See output power calculation 12.1



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 59 of 67

13 Equipment Calibration Status

Inventory Number	Model Number	Manufacturer	Last calibration	Next calibration	Cycle of calibration
100132	ESCI	Rohde & Schwarz	June 07	June 09	2 Years
100005	HFH2-Z2	Rohde & Schwarz	July 07	July 09	2 Years
100002	ESH 3	Rohde & Schwarz	Oct. 07	Oct. 08	1 Year
200051	ESH3 Z2	Rohde & Schwarz	Oct. 07	Oct. 08	1 Year
100040	ESH 2-Z5	Rohde & Schwarz	Oct. 07	Oct. 09	2 Years
100041	ESH 2-Z5	Rohde & Schwarz	Aug. 06	Aug. 08	2 Years
100072	ESCS 30	Rohde & Schwarz	July 07	July 08	1 Year
100001	ESVP	Rohde & Schwarz	Sep. 07	Sep. 08	1 Year
100077	VULB 9163	Schwarzbeck	April 08	April 10	2 Years
100064	VULB 9160	Schwarzbeck	March 07	March 09	2 Years
110023	VC4100	Vötsch	January 07	January 09	2 Years
100080	Multimeter	Metra Hit 29S	Mai 08	Mai 09	1 Year



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 60 of 67

14 Summary

The EMC Regulations according to the marked specifications are


KEPT

The EUT does fulfill the general approval requirements mentioned.

NOT KEPT

The EUT does not fulfill the general approval requirements mentioned.

Place, Date: Straubing, July 20, 2007



Christian Kiermeier
EMI / EMC Test Engineer



Dipl. Ing. (FH) Axel Penning
TM / EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 61 of 67

15 Annex A

15.1 Pictures taken during testing



Picture 15-1: Loop antenna on open site 3m for spectrum mask and radiated emission test



Picture 15-2: EUT test setup open site for spectrum mask and radiated emission test



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 63 of 67



Picture 15-3: Conducted emission test setup



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 64 of 67



Picture 15-4: Occupied bandwidth test setup




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00


Cherry GmbH
RS6600-C3R / GT 9998

268.188

Page 65 of 67

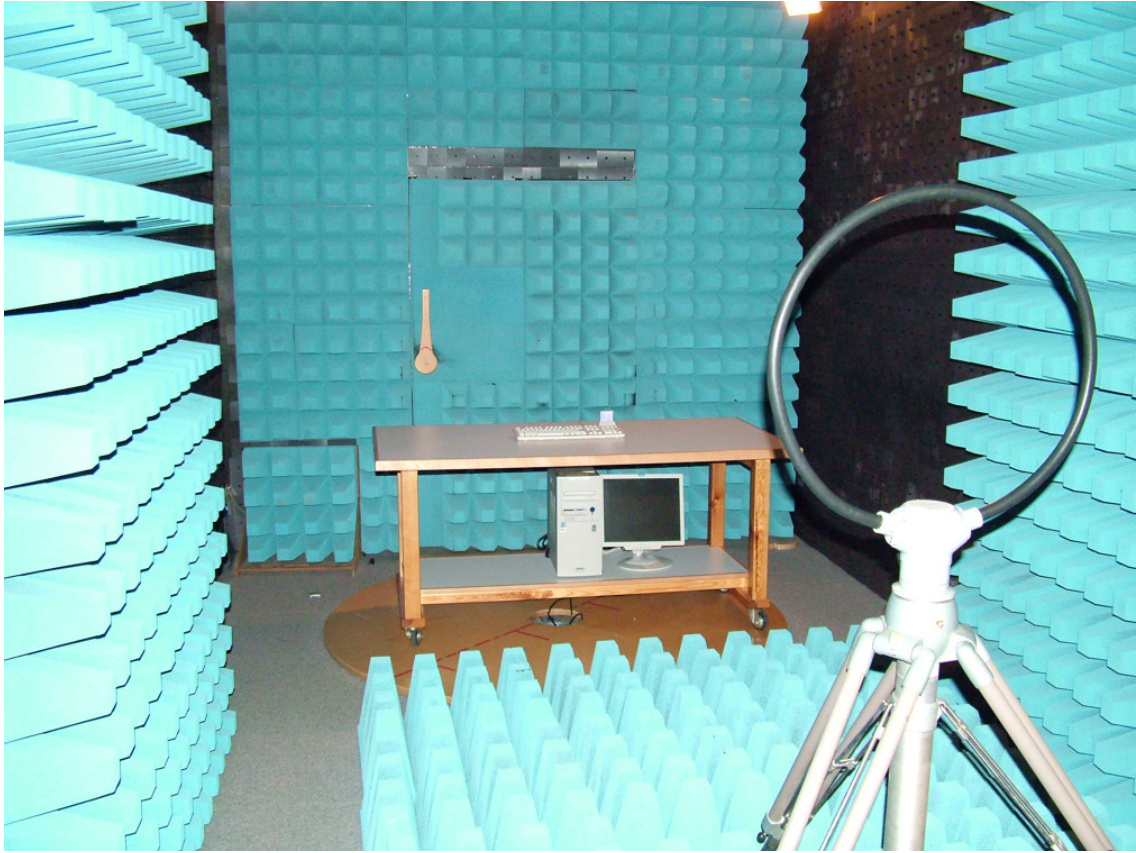

Picture 15-5: Occupied bandwidth setup

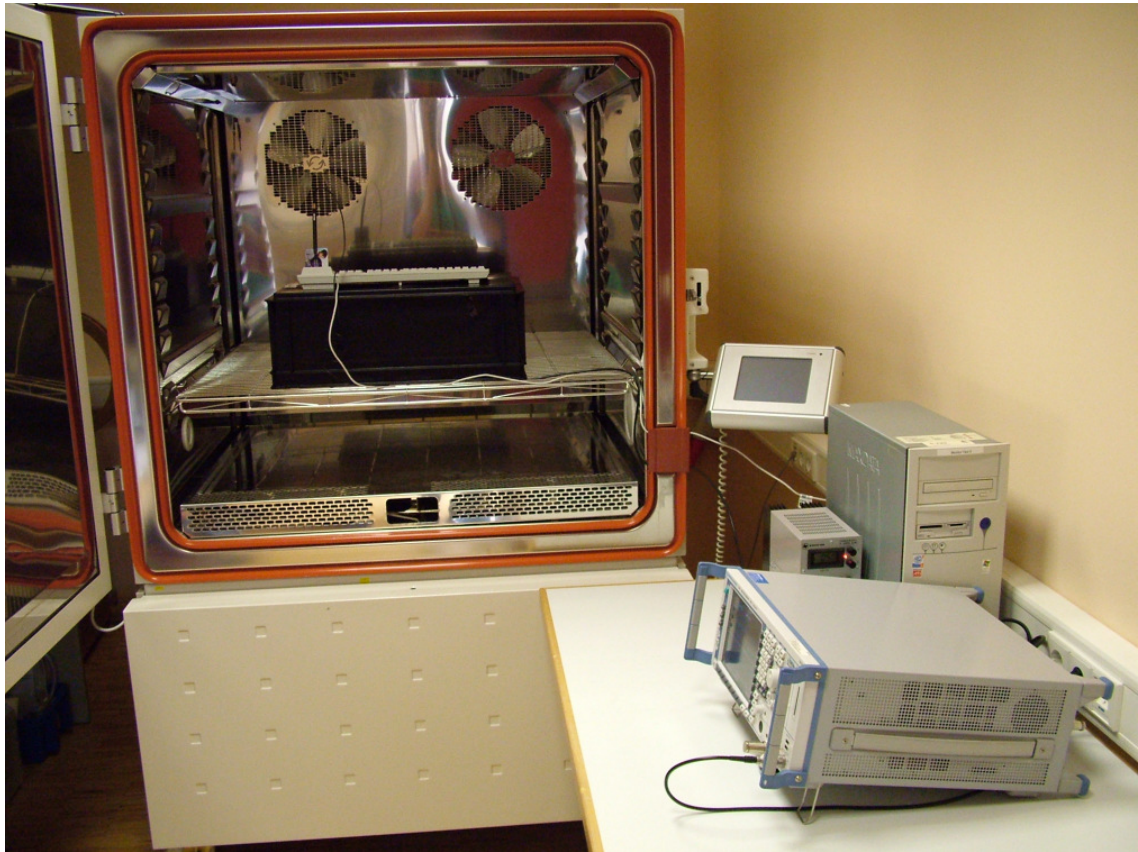

Picture 15-6: Carrier frequency stability test setup



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.00

Cherry GmbH

RS6600-C3R / GT 9998

268.188

Page 67 of 67