



Measurement of RF Emissions from a GALAXY II Gateway Transceiver

For	Badger Meter 4545 W Brown Deer Road Milwaukee, WI 53223
P.O. Number	276832
Date Tested	September 22, 2014 through September 26, 2014
Test Personnel	Mark Longinotti
Test Specification	FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.247 for Frequency Hopping Spread Spectrum Intentional Radiators Operating within the band 902-928MHz Industry Canada RSS-GEN Industry Canada RSS-210

Test Report By: **MARK E. LONGINOTTI**
Mark Longinotti
EMC Engineer

Requested By: Andy Davis
Badger Meter

Approved By: **Raymond J. Klouda**
Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

Elite Electronic Engineering Inc.

1516 CENTRE CIRCLE
DOWNERS GROVE, IL 60515

TEL: 630 - 495 - 9770
FAX: 630 - 495 - 9785

www.elltetest.com

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1.	Introduction.....	5
1.1.	Scope of Tests.....	5
1.2.	Purpose	5
1.3.	Deviations, Additions and Exclusions.....	5
1.4.	EMC Laboratory Identification	5
1.5.	Laboratory Conditions.....	5
2.	Applicable Documents.....	5
3.	EUT Setup and Operation	6
3.1.	General Description	6
3.1.1.	Power Input.....	6
3.1.2.	Peripheral Equipment	6
3.1.3.	Signal Input/Output Leads	6
3.1.4.	Grounding	7
3.2.	Software.....	7
3.3.	Operational Mode	7
3.4.	EUT Modifications.....	7
4.	Test Facility and Test Instrumentation	7
4.1.	Shielded Enclosure.....	7
4.2.	Test Instrumentation.....	7
4.3.	Calibration Traceability	8
4.4.	Measurement Uncertainty	8
5.	Test Procedures	8
5.1.	Powerline Conducted Emissions	8
5.1.1.	Requirements.....	8
5.1.2.	Procedures.....	8
5.1.3.	Results	9
5.2.	20dB Bandwidth.....	9
5.2.1.	Requirement.....	9
5.2.2.	Procedures.....	10
5.2.3.	Results	10
5.3.	Carrier Frequency Separation	10
5.3.1.	Requirements.....	10
5.3.2.	Procedures.....	10
5.3.3.	Results	10
5.4.	Number of Hopping Frequencies.....	10
5.4.1.	Requirements.....	10
5.4.2.	Procedures.....	10
5.4.3.	Results	11
5.5.	Time of Occupancy.....	11
5.5.1.	Requirements.....	11
5.5.2.	Procedures.....	11
5.5.3.	Results	11

**THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.**

TABLE OF CONTENTS		
PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
5.6.	Peak Conducted Output Power	11
5.6.1.	Requirements.....	11
5.6.2.	Procedures.....	11
5.6.3.	Results	11
5.7.	Effective Isotropic Radiated Power (EIRP).....	11
5.7.1.	Requirements.....	11
5.7.2.	Procedures.....	12
5.7.3.	Results	12
5.8.	Duty Cycle Factor Measurements	12
5.8.1.	Requirements.....	12
5.8.2.	Procedures.....	12
5.8.3.	Results	13
5.9.	Antenna Conducted Spurious Emissions	13
5.9.1.	Requirements.....	13
5.9.2.	Procedures.....	13
5.9.3.	Results	13
5.10.	Radiated Spurious Emissions Measurements.....	13
5.10.1.	Requirements.....	13
5.10.2.	Procedures.....	13
5.10.3.	Results	14
5.11.	Band Edge Compliance	15
5.11.1.	Requirement.....	15
5.11.2.	Procedures.....	15
5.10.2.1	Low Band Edge	15
5.10.2.2	High Band Edge.....	15
5.11.3.	Results	16
6.	Other Test Conditions	16
6.1.	Test Personnel and Witnesses.....	16
6.2.	Disposition of the EUT	16
7.	Conclusions	16
8.	Certification.....	16
9.	Equipment List.....	17

REVISION HISTORY

Revision	Date	Description
—	06 OCT 2014	Initial release

Measurement of RF Emissions from a Transceiver, Model No. GALAXY II Gateway

1. INTRODUCTION

1.1. Scope of Tests

This report represents the results of the series of radio interference measurements performed on a Badger Meter Transceiver, Model No. GALAXY II Gateway, Serial No. 291400029, (hereinafter referred to as the Equipment Under Test (EUT)).

The EUT is a frequency hopping spread spectrum transceiver. The EUT was designed to transmit and receive in the 902-928 MHz band using one of two removable, Laird Technologies Base Phantom 450MHz, Model No. OEM2326-110 antennas. The EUT was also designed to receive in the 450 – 470MHz MHz band using one of two removable, Laird Technologies Base Phantom 450MHz, Model No. OEM2326-110 antennas. The EUT was manufactured and submitted for testing by Badger Meter located in Milwaukee, WI.

During normal operation, the EUT can only transmit using one of the Laird Technologies Base Phantom 450MHz, Model No. OEM2326-110 antennas. When the EUT is transmitting, all receive functions are disabled. When the EUT is in the receive mode, all transmit functions are disabled. The EUT can receive in the 902-928MHz band using one of the Laird Technologies Base Phantom 450MHz, Model No. OEM2326-110 antennas while simultaneously receiving in the 450-470MHz band using the other Laird Technologies Base Phantom 450MHz, Model No. OEM2326-110 antennas.

This test report does not include test results on the receiver portion of the EUT. See Elite Electronic Engineering, Inc., Engineering Test Report No. 1403396-02 for receiver test results.

1.2. Purpose

The test series was performed to determine if the EUT meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Intentional Radiators. The test series was also performed to determine if the EUT meets the conducted RF emission requirements of the Industry Canada Radio Standards Specification, RSS-Gen, Section 7.2.4 and the radiated RF emission requirements of the Industry Canada Radio Standards Specification, RSS-210, Annex 8 for transmitters. Testing was performed in accordance with ANSI C63.4-2009.

1.3. Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series.

1.4. EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by The American Association for Laboratory Accreditation (A2LA). A2LA Certificate Number: 1786.01.

1.5. Laboratory Conditions

The temperature at the time of the test was 21°C and the relative humidity was 35%.

2. APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 2013

- ANSI C63.4-2009, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- FCC Public Notice, DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems", Released March 30, 2000
- Industry Canada Radio Standards Specification, RSS-Gen, "General Requirements and Information for the Certification of Radiocommunication Equipment", Issue 3, December 2010
- Industry Canada Radio Standards Specification, RSS-210, "Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment", Issue 8, December 2010

3. EUT SETUP AND OPERATION

3.1. General Description

The EUT is a Badger Meter, Transceiver, Model No. GALAXY II Gateway. A block diagram of the EUT setup is shown as Figure 1.

3.1.1.Power Input

The EUT obtained 24VDC in one of the following ways:

The EUT obtained 24VDC power through two leads from the output of an Emerson AC Power Adapter, M/N: DP4024N3M, S/N: H825LM00H002L. The Emerson AC Power Adapter received 115V 60Hz power through a 3 wire, unshielded, 2.4 meter long power cord. For power line conducted emissions tests, each primary lead was connected through a line impedance stabilization network (LISN) which was located on the ground plane. The network complies with the requirements of Paragraph 4.1.2 of ANSI C63.4-2009.

The EUT obtained 24VDC power through 2 leads of a 2.95 meters long Cat 5e cable from the output of a PowerDsine 8001 Power over Ethernet (PoE) Adapter, M/N: PD-8001/AC, S/N: N07206060002198 A00. The PowerDsine 8001 received 115V 60Hz power through a 3 wire, 1.8 meter long power cord. For power line conducted emissions tests, each primary lead was connected through a line impedance stabilization network (LISN) which was located on the ground plane. The network complies with the requirements of Paragraph 4.1.2 of ANSI C63.4-2009.

3.1.2.Peripheral Equipment

The following peripheral equipment was submitted with the EUT:

Item	Description
Laptop computer	Dell Latitude D600 used to program the EUT via a serial cable. The laptop computer was disconnected from the EUT after programming was complete.

3.1.3.Signal Input/Output Leads

The following interconnect cables were submitted with the EUT:

Item	Description
Coaxial Cable	Times Microwave Systems Coaxial Cable used to connect ANT1 port on the circuit board of the EUT to the Laird Technologies Base Phantom 450MHz, Model No. OEM2326-110 antenna. (30 cm length inside the enclosure. 60cm length outside the enclosure.)
Coaxial Cable	Times Microwave Systems Coaxial Cable used to connect ANT2 port on the circuit board of the EUT to the Laird Technologies Base Phantom 450MHz, Model No. OEM2326-110

	antenna. (30 cm length inside the enclosure. 60cm length outside the enclosure.)
Shielded 6 wire cable	3 meters of shielded 6 wire cable used to provide 24VDC input power to the EUT (when powered with the Emerson Power Supply) and to connect the EUT to the serial port of the laptop computer.
CAT 5e Cable	2.85meters long CAT 5e Cable used to provide 24VDC input power to the EUT when operating in the Power over Ethernet (PoE) mode. The cable was removed when not in the PoE mode.

3.1.4. Grounding

The EUT was not grounded during the tests.

3.2. Software

For all tests the EUT had the following firmware loaded onto it:

- Main Processor firmware version is v3.1.6
- RF Processor firmware version is v3.0.11

The laptop used to the following software to program the EUT:

- HyperTerminal v5.1

3.3. Operational Mode

For all tests, the EUT was placed on an 80cm high non-conductive stand. The EUT was energized. The EUT was programmed to operate in one of the following modes:

Powered with 24VDC from Emerson Power Supply:

- Transmit at 904.9MHz (Ch. 1)
- Transmit at 914.5MHHZ (Ch. 25)
- Transmit at 924.5MHHZ (Ch. 50)
- Frequency Hopping Enabled

Powered with 24VDC from Power over Ethernet (PoE):

- Transmit at 904.9MHz (Ch. 1)
- Transmit at 914.5MHHZ (Ch. 25)
- Transmit at 924.5MHHZ (Ch. 50)
- Frequency Hopping Enabled

3.4. EUT Modifications

No modifications were required for compliance.

4. TEST FACILITY AND TEST INSTRUMENTATION

4.1. Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2009 for site attenuation.

4.2. Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1.

Conducted and radiated emission measurements were performed with a spectrum analyzer. This receiver allows measurements with the bandwidths and detector functions specified by the FCC. The receiver bandwidth was 9kHz for the 150kHz to 30MHz conducted emissions data, 120kHz for the 30MHz to 1000MHz radiated emissions data and 1MHz for the radiated emissions data above 1000MHz.

4.3. Calibration Traceability

Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

4.4. Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty for these tests is presented below:

Conducted Emissions Measurements		
Combined Standard Uncertainty	1.07	-1.07
Expanded Uncertainty (95% confidence)	2.1	-2.1

Radiated Emissions Measurements		
Combined Standard Uncertainty	2.26	-2.18
Expanded Uncertainty (95% confidence)	4.5	-4.4

5. TEST PROCEDURES

5.1. Powerline Conducted Emissions

5.1.1. Requirements

Per the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Per 15.207(a) and Industry Canada RSS-Gen section 7.2.4, all radio frequency voltages on the power lines of a transmitter shall be below the values shown below when using a quasi-peak or average detector:

Frequency MHz	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 – 0.5	66 decreasing with logarithm of frequency to 56	56 decreasing with logarithm of frequency to 46
0.5 - 5	56	46
5 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: If the levels measured using the QP detector meet both the QP and the Average limits, the EUT is considered to have met both requirements and measurements do not need to be performed using the Average detector.

5.1.2. Procedures

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.

- a) The EUT was operated in the Transmit at 914.5MHz mode.

- b) Measurements were first made on the 120V, 60Hz high line of the Emerson AC Power Adapter, M/N: DP4024N3M.
- c) The frequency range from 150 kHz to 30 MHz was broken up into smaller frequency sub-bands.
- d) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- e) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- f) Steps (d) and (e) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits.
- g) Steps (c) through (f) were repeated on the 120V, 60Hz high line of the Emerson AC Power Adapter, M/N: DP4024N3M.
- h) Steps (b) through (g) were repeated on the 120V, 60Hz input power leads of the PowerDsine 8001 Power over Ethernet (PoE) Adapter, M/N: PD-8001/AC, S/N: N07206060002198 A00.

5.1.3.Results

The plots of the peak, quasi-peak, and average conducted voltage levels acquired from each input power line with the EUT operated in the Transmit at 914.5MHz mode and powered with an Emerson AC Power Adapter are shown on pages 25 and 27. The tabular quasi-peak and average results from each input power line with the EUT operated in the Transmit at 914.5MHz mode and powered with an Emerson AC Power Adapter are shown on pages 24 and 26. All power line conducted emissions measured from the EUT were within the specification limits. The emissions level closest to the limit (worst case) occurred at 635kHz. The emissions level at this frequency was 2.2dB within the limit. Photographs of the test configuration which yielded the highest or worst case, conducted emission levels are shown on Figure 2.

The plots of the peak, quasi-peak, and average conducted voltage levels acquired from each input power line with the EUT operated in the Transmit at 914.5MHz, Power over Ethernet (PoE) mode are shown on pages 29 and 31. The tabular quasi-peak and average results from each input power line with the EUT operated in the Transmit at 914.5MHz, Power over Ethernet (PoE) mode are shown on pages 28 and 30. All power line conducted emissions measured from the EUT were within the specification limits. The emissions level closest to the limit (worst case) occurred at 437kHz. The emissions level at this frequency was 7.8dB within the limit. Photographs of the test configuration which yielded the highest or worst case, conducted emission levels are shown on Figure 2.

5.2. 20dB Bandwidth

5.2.1.Requirement

Per 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928MHz band, the 20dB bandwidth shall be measured for determination of the carrier frequency separation limits and must not exceed 500 kHz. If the 20dB bandwidth of the hopping channel is less than 250kHz, the system shall use at least 50 hopping channels. If the 20dB bandwidth of the hopping channel is 250kHz or greater (but not greater than 500kHz), the system shall use at least 25 hopping channels.

5.2.2.Procedures

The antenna output port of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to $\geq 1\%$ of the 20 dB BW. The span was set to approximately 2 to 3 times the 20 dB bandwidth.

The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.

5.2.3.Results

The plots on pages 32 through 37 show that the maximum 20 dB bandwidth was 316.63kHz. The 99% bandwidth was measured to be 304.6kHz. Therefore, since the 20dB bandwidth of the hopping channel is 250kHz or greater, but not greater than 500kHz, the system shall use at least 25 hopping channels.

5.3. Carrier Frequency Separation

5.3.1.Requirements

Per section 15.247 (a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

5.3.2.Procedures

The antenna output port of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to $\geq 1\%$ of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the peaks of at least two adjacent channels. When the trace had stabilized after multiple scans, the marker-delta function was used to determine the separation between the peaks of the adjacent channels. The analyzer's display was plotted using a 'screen dump' utility

5.3.3.Results

Pages 38 and 39 show the carrier frequency separation data. As can be seen from these plots, the carrier frequency separation is 400.55kHz, which is greater than the 20dB bandwidth (316.63kHz).

5.4. Number of Hopping Frequencies

5.4.1.Requirements

Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928MHz band, the 20dB bandwidth shall be measured for determination of the carrier frequency separation limits and must not exceed 500 kHz. If the 20dB bandwidth of the hopping channel is less than 250kHz, the system shall use at least 50 hopping channels. If the 20dB bandwidth of the hopping channel is 250kHz or greater (but not greater than 500kHz), the system shall use at least 25 hopping channels.

5.4.2.Procedures

The antenna output port of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to $\geq 1\%$ of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the entire frequency band of operation.

The EUT's signal was allowed to stabilize after multiple scans. The number of hopping frequencies was counted. The analyzer's display was plotted using a 'screen dump' utility.

5.4.3.Results

Pages 40 and 41 show the number of hopping frequencies. As can be seen from these plots, the number of hopping frequencies is 50 which is greater than 25 which is the minimum number of required hopping frequencies for systems with a 20dB bandwidth greater than 250kHz.

5.5. Time of Occupancy

5.5.1.Requirements

Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928MHz band, if the 20dB bandwidth of the hopping channel is 250kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

5.5.2.Procedures

The antenna output port of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to 1MHz. The peak detector and 'Max-Hold' function were engaged. With the span set to 0Hz, the sweep time was adjusted to capture a single event in order to measure the dwell time per hop. The analyzer's display was plotted using a 'screen dump' utility. Then, the sweep time was expanded to 10 seconds to capture the number of hops in the appropriate sweep time. A single sweep was made. The analyzer's display was plotted using a 'screen dump' utility.

The dwell time in the specified time period was then calculated from dwell time per hop multiplied by the number of hops in the specified time period.

5.5.3.Results

Pages 42 through 45 show the plots for the time of occupancy. As can be seen from the plots, the time of occupancy can be determined by (dwell time/hop) multiplied by (# of hops). This calculated value is equal to 0.078 seconds which is less than the 0.4 seconds maximum allowed.

5.6. Peak Conducted Output Power

5.6.1.Requirements

Per section 15.247(b)(2), for frequency hopping systems operating in the 902-928MHz band and employing at least 50 hopping channels, the maximum peak output conducted power shall not be greater than 1W (30dBm).

5.6.2.Procedures

The output of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The 'Max-Hold' function was engaged. The maximum meter reading was recorded. The peak power output was calculated for the low, middle and high hopping frequencies.

5.6.3.Results

The results are presented on pages 46 and 47. The maximum peak conducted output power from the transmitter was 584.8mW (27.67dBm) which is below the 1 Watt limit.

5.7. Effective Isotropic Radiated Power (EIRP)

5.7.1.Requirements

Per section 15.247(b)(2), for frequency hopping systems operating in the 902-928MHz band and employing at

least 50 hopping channels, the maximum peak output conducted power shall not be greater than 1W (30dBm). Per section 15.247(b)(4), this limit is based on the use of antennas with directional gains that do not exceed 6dBi. Since the limit allows for a 6dBi antenna gain, the maximum EIRP can be increased by 6dB to 4 Watt (36dBm).

5.7.2.Procedures

The EUT was placed on the non-conductive stand and set to transmit. A bilog antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle and high hopping frequencies.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a dipole antenna was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss (and antenna gain for all measurements above 1GHz), as required. The peak power output was calculated for low, middle, and high hopping frequencies

5.7.3.Results

The results are presented on pages 48 through 53. The maximum EIRP measured from the transmitter was 13.4dBm or 21.9mW which is below the 4 Watt limit.

5.8. Duty Cycle Factor Measurements

5.8.1.Requirements

The duty cycle factor is used to convert peak detected readings to average readings. Per 15.35(c), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

5.8.2.Procedures

- a. The antenna output port of the EUT was connected to the spectrum analyzer through 50dB of attenuation.
- b. The center frequency of the spectrum analyzer was set to the transmit frequency of the EUT.
- c. The frequency span of the spectrum analyzer was set to 0Hz so that the time domain trace of the transmitted pulse of the EUT was displayed on the spectrum analyzer.
- d. The sweep time of the spectrum analyzer was adjusted so that the beginning and end of a single pulse could be seen on the display of the spectrum analyzer.
- e. The single sweep function of the spectrum analyzer was used multiple times to determine the maximum pulse width of the EUT.
- f. The maximum pulse width display of the spectrum analyzer was recorded and then plotted using a 'screen dump' utility.
- g. The sweep time of the spectrum analyzer was then adjusted to 100msec.
- h. The single sweep function of the spectrum analyzer was used multiple times to determine the maximum number of transmitted pulses that occurred in a 100msec time period.
- i. The maximum number of pulses transmitted in a 100msec time period was recorded and then plotted using a 'screen dump' utility.
- j. The duty cycle correction was calculated using the following equation:

$$\text{Duty Cycle Correction Factor (dB)} = \text{D.C. (dB)}$$

$$\text{D.C. (dB)} = 20 \times \log [((\text{pulse width (msec)}) \times (\text{\#pulses in a 100msecperiod})) / 100\text{msec}]$$

5.8.3.Results

Duty cycle plots are shown on pages 54 through 57. The EUT transmits a 39.18msec pulse 1 time in a 100msec period. This results in a duty cycle correction factor of -8.14dB.

5.9. Antenna Conducted Spurious Emissions

5.9.1.Requirements

Per section 15.247(c), the spurious emissions in any 100 kHz BW outside the frequency band must be at least 20dB below the highest 100 kHz BW level measured within the band.

5.9.2.Procedures

The antenna output port of the EUT was connected to the spectrum analyzer through 50dB of attenuation. The frequency hopping function was disabled. The resolution bandwidth (RBW) was set to 100kHz. The peak detector and 'Max-Hold' function were engaged. The emissions in the frequency range from 30MHz to 10GHz were observed and plotted separately with the EUT transmitting at low, middle and high hopping frequencies.

5.9.3.Results

The results of the antenna conducted emissions levels were plotted. These plots are presented on pages 58 through 63. These plots show that the spurious emissions were at least 20 dB below the level of the fundamental in any 100kHz bandwidth.

5.10. Radiated Spurious Emissions Measurements

5.10.1. Requirements

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Paragraph 15.209(a) has the following radiated emission limits:

Frequency MHz	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

5.10.2. Procedures

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2009 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For

the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 10.0GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 10.0GHz.

- 1) For all emissions in the restricted bands, the following procedure was used:
 - a) The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3 meter distance from the EUT. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
 - c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
 - d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
 - e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).
 - f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken. If the dwell time per channel of the hopping signal is less than 100msec, then the reading obtained with the 10 Hz video bandwidth may be further adjusted by a "duty cycle correction factor", derived from $20 \cdot \log(\text{dwell time}/100\text{msec})$. These readings must be no greater than the limits specified in 15.209(a).

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external pre-amplifier is used, the total is reduced by its gain (-PA). If a duty cycle correction factor (DC) is required, it is added to the total.

Formula 1: $FS \text{ (dBuV/m)} = MTR \text{ (dBuV)} + AF \text{ (dB/m)} + CF \text{ (dB)} + (-PA \text{ (dB)}) + DC \text{ (dB)}$

To convert the Field Strength dBuV/m term to uV/m, the dBuV/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in uV/m terms.

Formula 2: $FS \text{ (uV/m)} = \text{AntiLog} [(FS \text{ (dBuV/m)})/20]$

5.10.3. Results

Preliminary radiated emissions plots with the EUT transmitting at low, mid, and high channels and powered with the Emerson power supply are shown on pages 64 through 75. Final radiated emissions data are

presented on data pages 76 through 82. As can be seen from the data, all emissions measured from the EUT were within the specification limits. The emissions level closest to the limit (worst case) occurred at 8320.5MHz. The emissions level at this frequency was 5.8dB within the limit. Photographs of the test configuration which yielded the highest, or worst case, radiated emission levels are shown on Figures 3 and 4.

Preliminary radiated emissions plots with the EUT transmitting at low, mid, and high channels and powered using Power over Ethernet (PoE) are shown on pages 83 through 94. Final radiated emissions data are presented on data pages 95 through 101. As can be seen from the data, all emissions measured from the EUT were within the specification limits. The emissions level closest to the limit (worst case) occurred at 8320.5MHz. The emissions level at this frequency was 6.2dB within the limit. Photographs of the test configuration which yielded the highest, or worst case, radiated emission levels are shown on Figures 4 and 5.

5.11. Band Edge Compliance

5.11.1. Requirement

Per section 15.247(d), the emissions at the band-edges must be at least 20dB below the highest level measured within the band but attenuation below the general limits listed in 15.209(a) is not required.

5.11.2. Procedures

5.10.2.1 Low Band Edge

- 1) The output of the EUT was connected to the spectrum analyzer through 50dB of attenuation.
- 2) The EUT was set to transmit continuously at the channel closest to the low band-edge (hopping function disabled).
- 3) To determine the band edge compliance, the following spectrum analyzer settings were used:
 - a. Center frequency = low band-edge frequency.
 - b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
 - c. Resolution bandwidth (RBW) \geq 1% of the span.
 - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
 - e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.)
 - f. The analyzer's display was plotted using a 'screen dump' utility.
- 4) Step 3) was repeated with the frequency hopping function enabled.

5.10.2.2 High Band Edge

- 1) The output of the EUT was connected to the spectrum analyzer through 50dB of attenuation.
- 2) The EUT was set to transmit continuously at the channel closest to the high band-edge (hopping function disabled).
- 3) To determine the band edge compliance, the following spectrum analyzer settings were used:
 - a. Center frequency = high band-edge frequency.
 - b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
 - c. Resolution bandwidth (RBW) \geq 1% of the span.
 - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.

- e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the right of the center frequency (band-edge) must be below the display line.)
- f. The analyzer's display was plotted using a 'screen dump' utility.

4) Step 3) was repeated with the frequency hopping function enabled.

5.11.3. Results

Pages 102 through 109 show the conducted band-edge compliance results. As can be seen from these plots, the emissions at the low end band edge and the high end band edge are within the 20 dB down limits.

6. OTHER TEST CONDITIONS

6.1. Test Personnel and Witnesses

All tests were performed by qualified personnel from Elite Electronic Engineering Incorporated. The test series was partially witnessed by Badger Meter personnel.

6.2. Disposition of the EUT

The EUT and all associated equipment were returned to Badger Meter upon completion of the tests.

7. CONCLUSIONS

It was determined that the Badger Meter Transceiver, Model No. GALAXY II Gateway, Serial No. 291400029, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Intentional Radiators Operating within the 902-928 MHz band, when tested per ANSI C63.4-2009.

It was also determined that the Badger Meter Transceiver, Model No. GALAXY II Gateway, Serial No. 291400029, did fully meet the conducted and radiated RF emission requirements of the Industry Canada Radio Standards Specification, RSS-Gen Section 7.2.4 and RSS-210 Annex 8, for transmitters, when tested per ANSI C63.4-2009.

8. CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test date as operated by Badger Meter personnel. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

9. EQUIPMENT LIST

Table 9-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW11	PREAMPLIFIER	PMI	PE2-35-120-5R0-10-12-SFF	PL11685/1241	1GHZ-20GHZ	3/11/2014	3/11/2015
CDW8	DESKTOP COMPUTER	ELITE ELECTRONIC ENG	PENTIUM 4	009	3.8GHZ	N/A	
CDX8	COMPUTER	ELITE	WORKSTATION			N/A	
GSD3	SIGNAL GENERATOR	ROHDE & SCHWARZ	SMB100A	104454	9KHZ-6GHZ	9/10/2014	9/10/2015
NDQ1	TUNED DIPOLE ANTENNA	EMCO	3121C-DB4	313	400-1000MHZ	4/17/2014	4/17/2015
NTA3	BILOG ANTENNA	TESEQ	6112D	28040	25-1000MHz	2/19/2014	2/19/2015
NWQ1	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS-LINDGREN	3117	66655	1GHZ-18GHZ	3/11/2014	3/11/2015
PLF1	CISPR16 50UH LISN	ELITE	CISPR16/70A	001	.15-30MHz	6/5/2014	6/5/2015
PLF3	CISPR16 50UH LISN	ELITE	CISPR16/70A	003	.15-30MHz	6/5/2014	6/5/2015
RBA0	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB26	100145	20HZ-26.5GHZ	3/7/2014	3/7/2015
RBA1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB26	100146	20HZ-26.5GHZ	3/5/2014	3/5/2015
T1EH	10DB 25W ATTENUATOR	WEINSCHTEL	46-10-34	CD6795	DC-18GHZ	6/9/2014	6/9/2015
T2D8	20DB, 25W ATTENUATOR	WEINSCHTEL	46-20-43	AY9247	DC-18GHZ	11/7/2013	11/7/2014
T2S4	20DB 25W ATTENUATOR	WEINSCHTEL	46-20-24	BV1393	DC-18GHZ	11/7/2013	11/7/2014
XPQ3	HIGH PASS FILTER	K&L MICROWAVE	4IH30-1804/T10000-0	4	1.8GHZ-10GHZ	11/25/2013	11/25/2014

I/O: Initial Only

N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

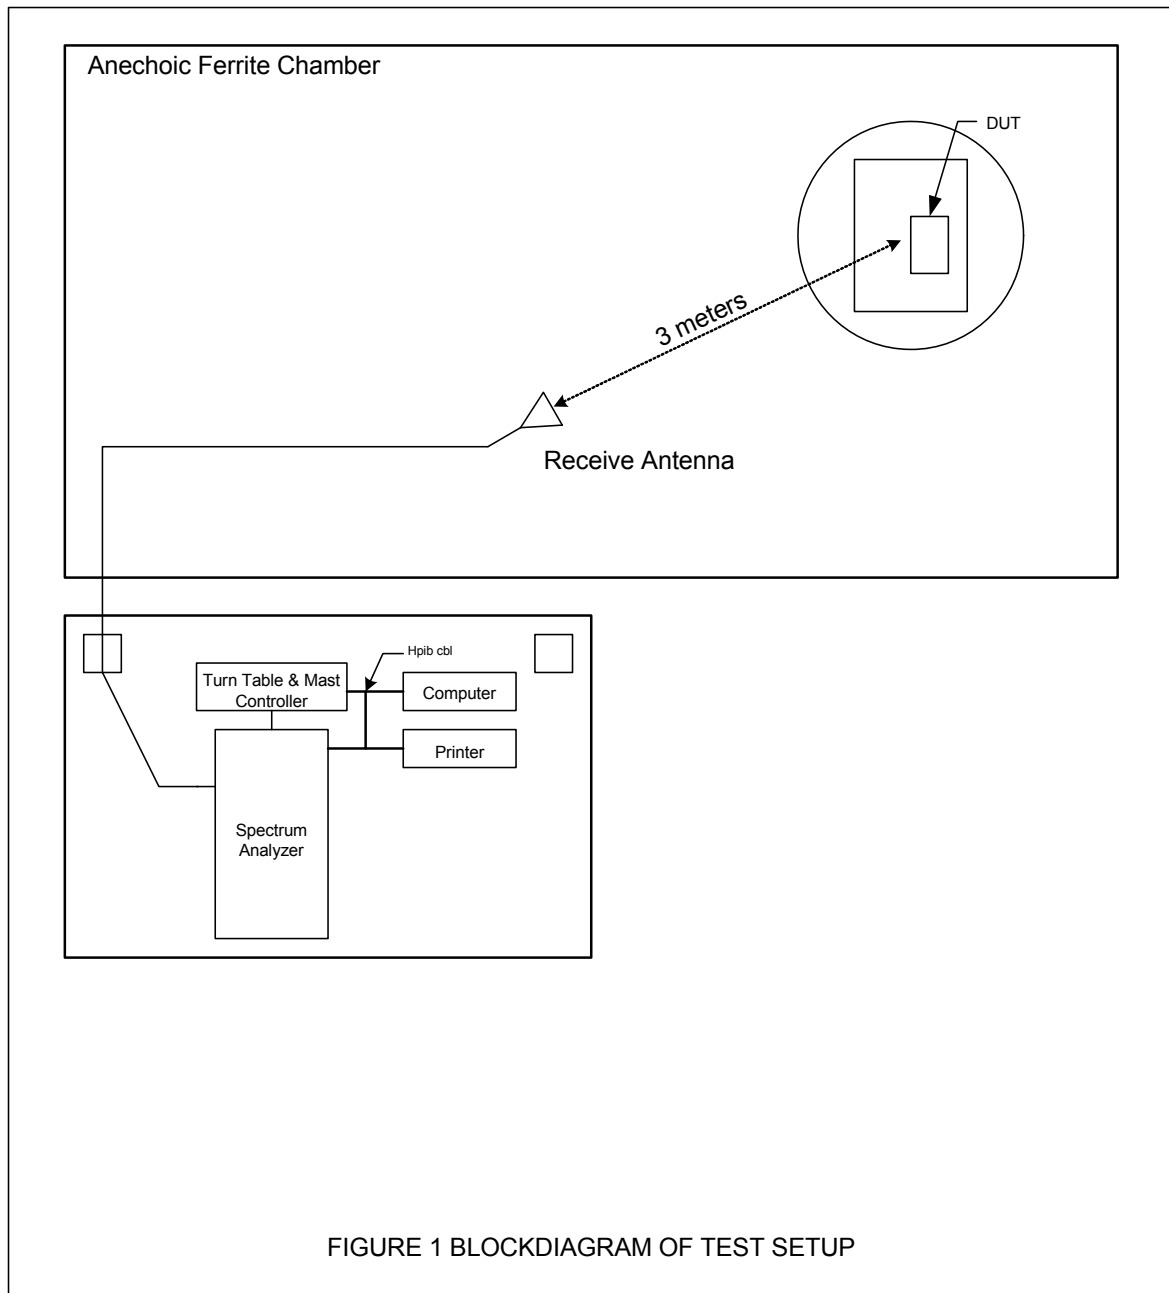


Figure 2



Test Setup for Conducted Emissions – Emerson Power Supply



Test Setup for Conducted Emissions – Power over Ethernet (PoE)

Figure 3




Test Setup for Radiated Emissions (Emerson Power Supply), 30MHz to 1GHz –
Horizontal Polarization



Test Setup for Radiated Emissions (Emerson Power Supply), 30MHz to 1GHz –
Vertical Polarization

Figure 4

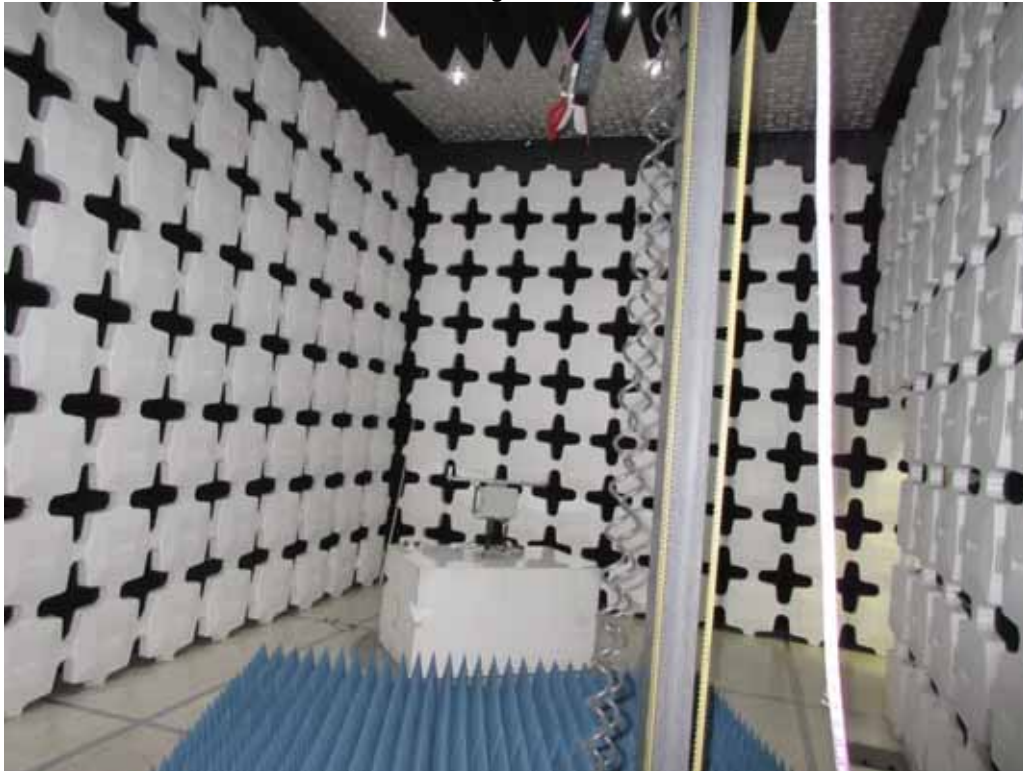


Test Setup for Radiated Emissions (Emerson Power Supply), 1GHz to 10GHz –
Horizontal Polarization




Test Setup for Radiated Emissions (Emerson Power Supply), 1GHz to 10GHz –
Vertical Polarization

Figure 5

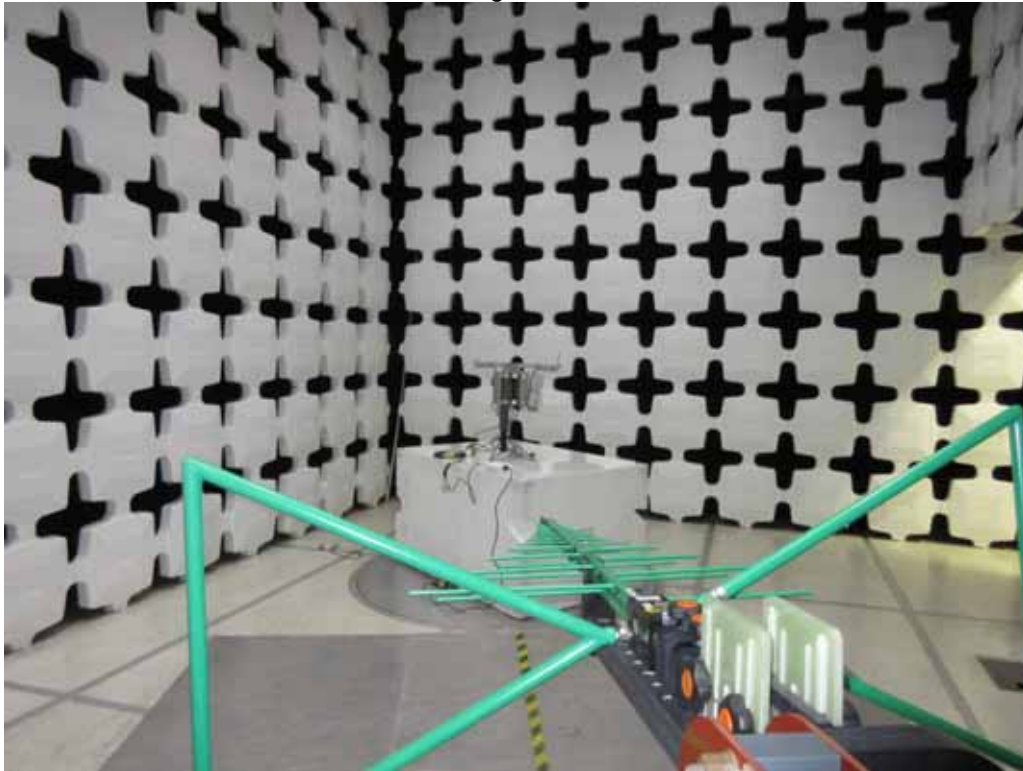

Test Setup for Radiated Emissions (Power over Ethernet), 30MHz to 1GHz –
Horizontal Polarization

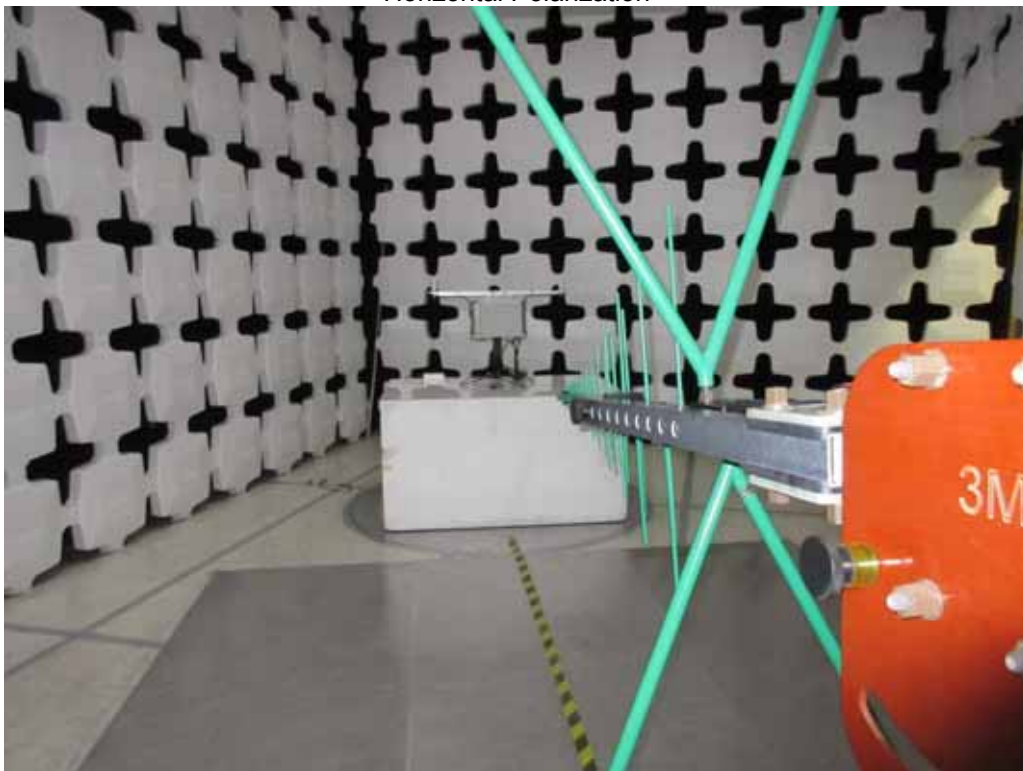

Test Setup for Radiated Emissions (Power over Ethernet), 30MHz to 1GHz – Vertical
Polarization

Figure 6



Test Setup for Radiated Emissions (Power over Ethernet), 1GHz to 10GHz –
Horizontal Polarization



Test Setup for Radiated Emissions (Power over Ethernet), 1GHz to 10GHz – Vertical
Polarization

FCC Part 15 Subpart B Conducted Emissions Test

Significant Emissions Data

VB** 02/09/2011

Manufacturer : BADGER METER
 Model : GALAXY II GATEWAY
 DUT Revision :
 Serial Number : 291400029
 DUT Mode : TRANSMIT AT 914.5MHz
 Line Tested : 115V, 60Hz HIGH OF EMERSON AC POWER ADAPTER
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes :
 Test Engineer : M. Longinotti
 Limit : Class B
 Test Date : Sep 22, 2014 11:09:24 AM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit


Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.173	48.5	64.8		41.5	54.8	
0.288	35.8	60.6		28.7	50.6	
0.577	37.4	56.0		36.3	46.0	
0.635	44.1	56.0		43.5	46.0	
0.979	31.2	56.0		28.4	46.0	
1.844	31.1	56.0		25.7	46.0	
2.426	30.1	56.0		24.0	46.0	
4.958	36.6	56.0		23.5	46.0	
8.884	35.7	60.0		27.6	50.0	
10.071	41.1	60.0		36.5	50.0	
19.783	36.5	60.0		22.4	50.0	



FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VB** 02/09/2011

Manufacturer : BADGER METER
Model : GALAXY II GATEWAY
DUT Revision :
Serial Number : 291400029
DUT Mode : TRANSMIT AT 914.5MHz
Line Tested : 115V, 60Hz HIGH OF EMERSON AC POWER ADAPTER
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -10
Notes :
Test Engineer : M. Longinotti
Limit : Class B
Test Date : Sep 22, 2014 11:09:24 AM

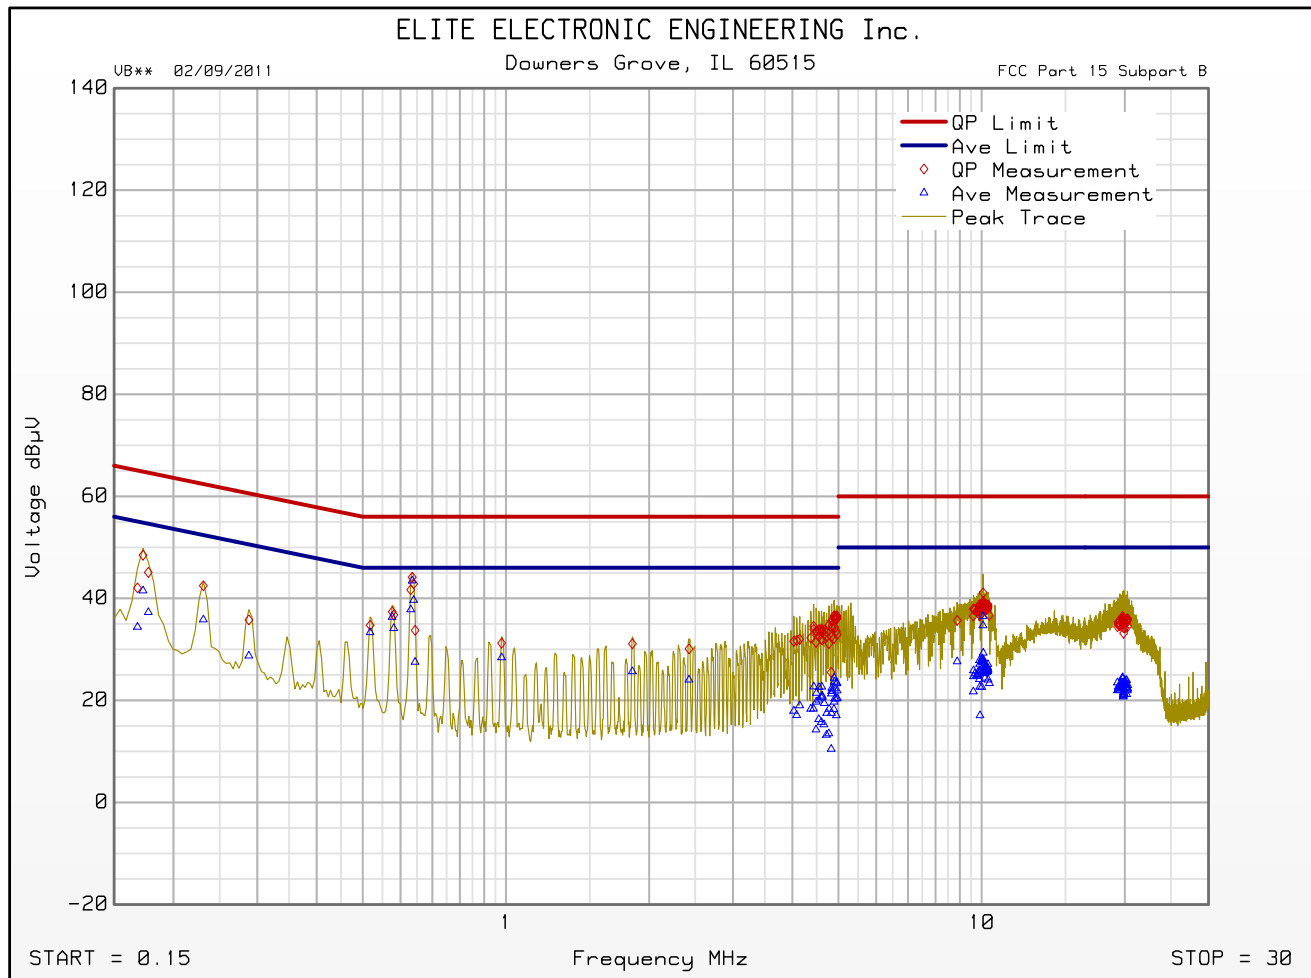

Emissions Meet QP Limit
Emissions Meet Ave Limit



FCC Part 15 Subpart B Conducted Emissions Test

Significant Emissions Data

VB** 02/09/2011

Manufacturer : BADGER METER
Model : GALAXY II GATEWAY
DUT Revision :
Serial Number : 291400029
DUT Mode : TRANSMIT AT 914.5MHz
Line Tested : 115V, 60Hz RETURN OF EMERSON AC POWER ADAPTER
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -10
Notes :
Test Engineer : M. Longinotti
Limit : Class B
Test Date : Sep 22, 2014 11:02:02 AM
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit


Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.173	49.3	64.8		42.3	54.8	
0.288	36.1	60.6		27.5	50.6	
0.577	37.6	56.0		36.7	46.0	
0.635	44.7	56.0		43.8	46.0	
0.979	31.4	56.0		29.1	46.0	
1.840	32.6	56.0		26.2	46.0	
2.421	31.7	56.0		25.9	46.0	
4.895	38.1	56.0		24.8	46.0	
5.302	38.6	60.0		25.9	50.0	
10.071	40.5	60.0		35.7	50.0	
20.197	37.6	60.0		24.4	50.0	



FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VB** 02/09/2011

Manufacturer : BADGER METER
Model : GALAXY II GATEWAY
DUT Revision :
Serial Number : 291400029
DUT Mode : TRANSMIT AT 914.5MHz
Line Tested : 115V, 60Hz RETURN OF EMERSON AC POWER ADAPTER
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -10
Notes :
Test Engineer : M. Longinotti
Limit : Class B
Test Date : Sep 22, 2014 11:02:02 AM

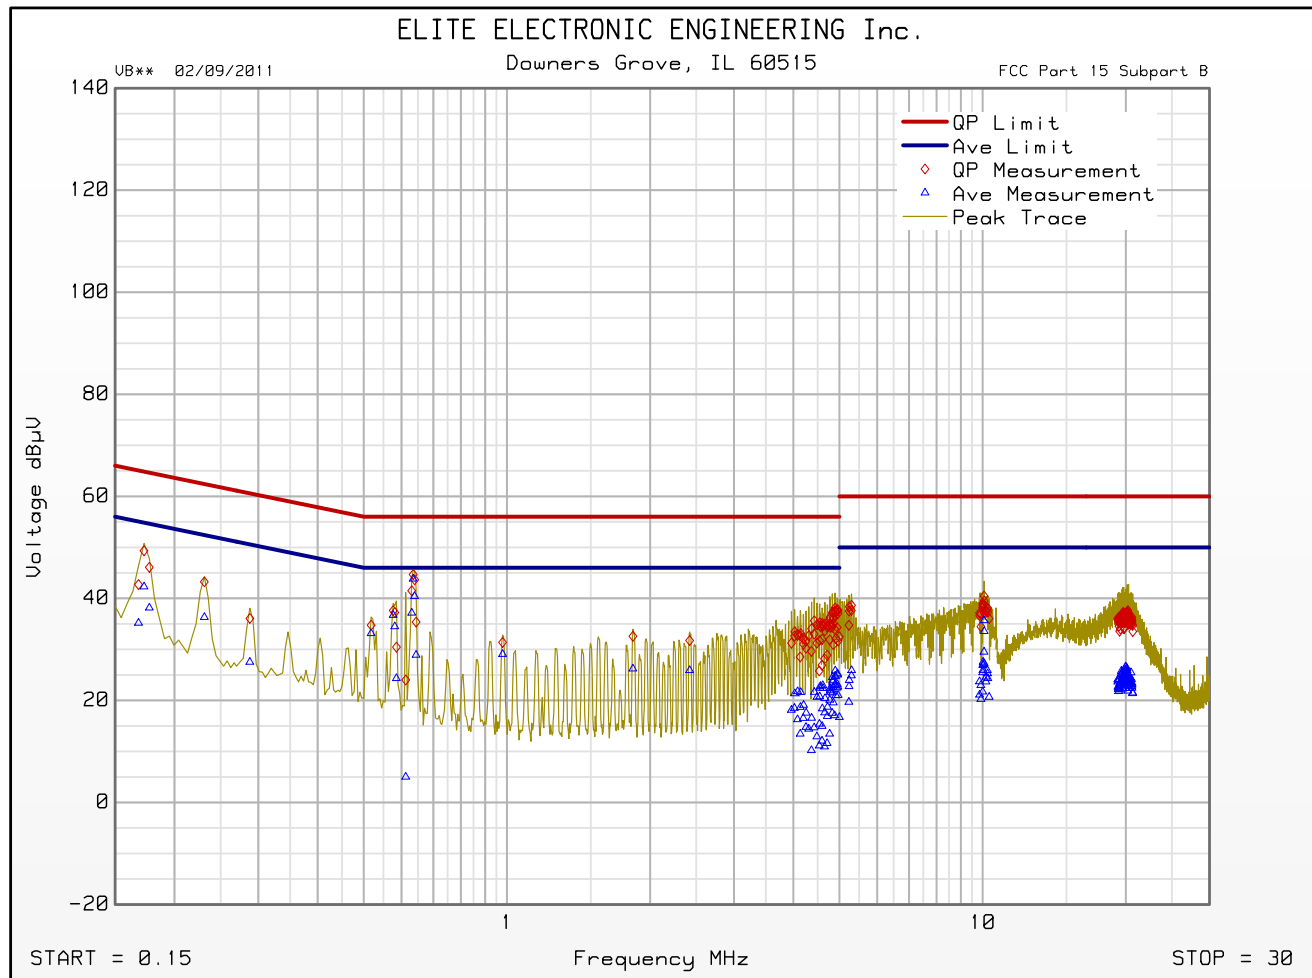

Emissions Meet QP Limit
Emissions Meet Ave Limit

FCC Part 15 Subpart B Conducted Emissions Test

Significant Emissions Data

VB** 02/09/2011

Manufacturer : BADGER METER
 Model : GALAXY II GATEWAY
 DUT Revision :
 Serial Number :
 DUT Mode : TRANSMIT AT 914.5MHz
 Line Tested : 115V, 60Hz HIGH OF POWER DSINE 8001 (PoE)
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes :
 Test Engineer : M. Longinotti
 Limit : Class B
 Test Date : Sep 22, 2014 09:14:04 AM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit


Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.186	48.4	64.2		40.0	54.2	
0.437	41.0	57.1		39.3	47.1	
0.563	37.2	56.0		35.9	46.0	
0.813	28.9	56.0		27.4	46.0	
1.561	26.0	56.0		24.7	46.0	
2.871	27.2	56.0		25.5	46.0	
4.931	27.2	56.0		24.2	46.0	
8.924	33.5	60.0		29.3	50.0	
10.670	41.2	60.0		36.2	50.0	
16.601	32.2	60.0		27.9	50.0	



FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VB** 02/09/2011

Manufacturer : BADGER METER
Model : GALAXY II GATEWAY
DUT Revision :
Serial Number :
DUT Mode : TRANSMIT AT 914.5MHz
Line Tested : 115V, 60Hz HIGH OF POWER DSINE 8001 (PoE)
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -10
Notes :
Test Engineer : M. Longinotti
Limit : Class B
Test Date : Sep 22, 2014 09:14:04 AM

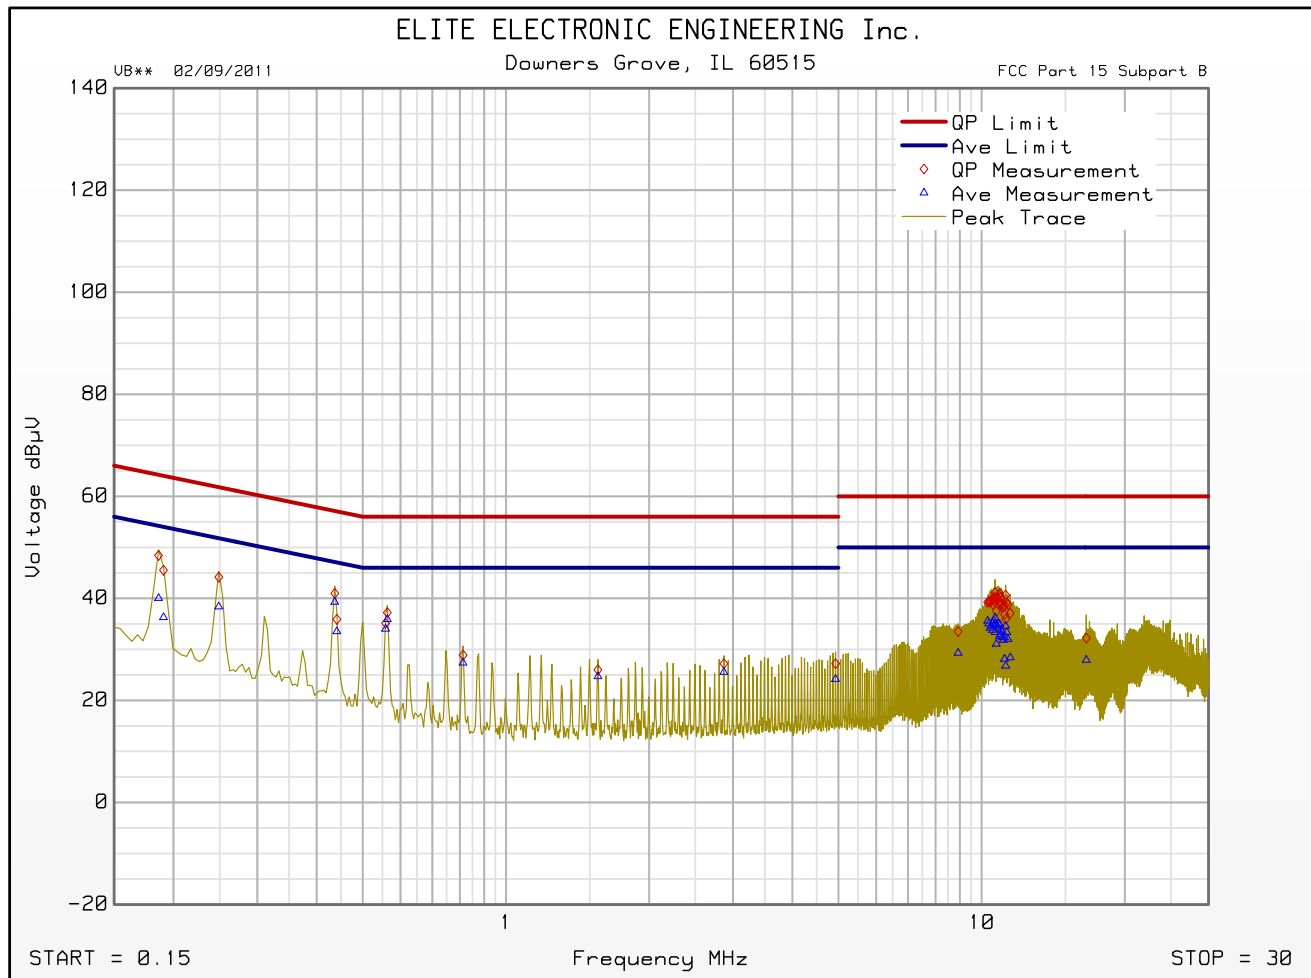

Emissions Meet QP Limit
Emissions Meet Ave Limit

FCC Part 15 Subpart B Conducted Emissions Test

Significant Emissions Data

VB** 02/09/2011

Manufacturer : BADGER METER
 Model : GALAXY II GATEWAY
 DUT Revision :
 Serial Number : 291400029
 DUT Mode : TRANSMIT AT 914.5MHz
 Line Tested : 115V, 60Hz RETURN OF POWER DSINE 8001 (PoE)
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes :
 Test Engineer : M. Longinotti
 Limit : Class B
 Test Date : Sep 22, 2014 09:22:37 AM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit


Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.186	45.2	64.2		36.6	54.2	
0.437	36.7	57.1		36.2	47.1	
0.563	34.5	56.0		34.3	46.0	
1.186	30.9	56.0		30.0	46.0	
1.498	31.1	56.0		30.3	46.0	
2.808	31.3	56.0		30.6	46.0	
4.868	33.2	56.0		30.8	46.0	
7.925	34.8	60.0		31.3	50.0	
10.485	39.3	60.0		34.9	50.0	
22.406	35.3	60.0		29.4	50.0	



FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VB** 02/09/2011


Manufacturer : BADGER METER
Model : GALAXY II GATEWAY
DUT Revision :
Serial Number : 291400029
DUT Mode : TRANSMIT AT 914.5MHz
Line Tested : 115V, 60Hz RETURN OF POWER DSINE 8001 (PoE)
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -10
Notes :
Test Engineer : M. Longinotti
Limit : Class B
Test Date : Sep 22, 2014 09:22:37 AM

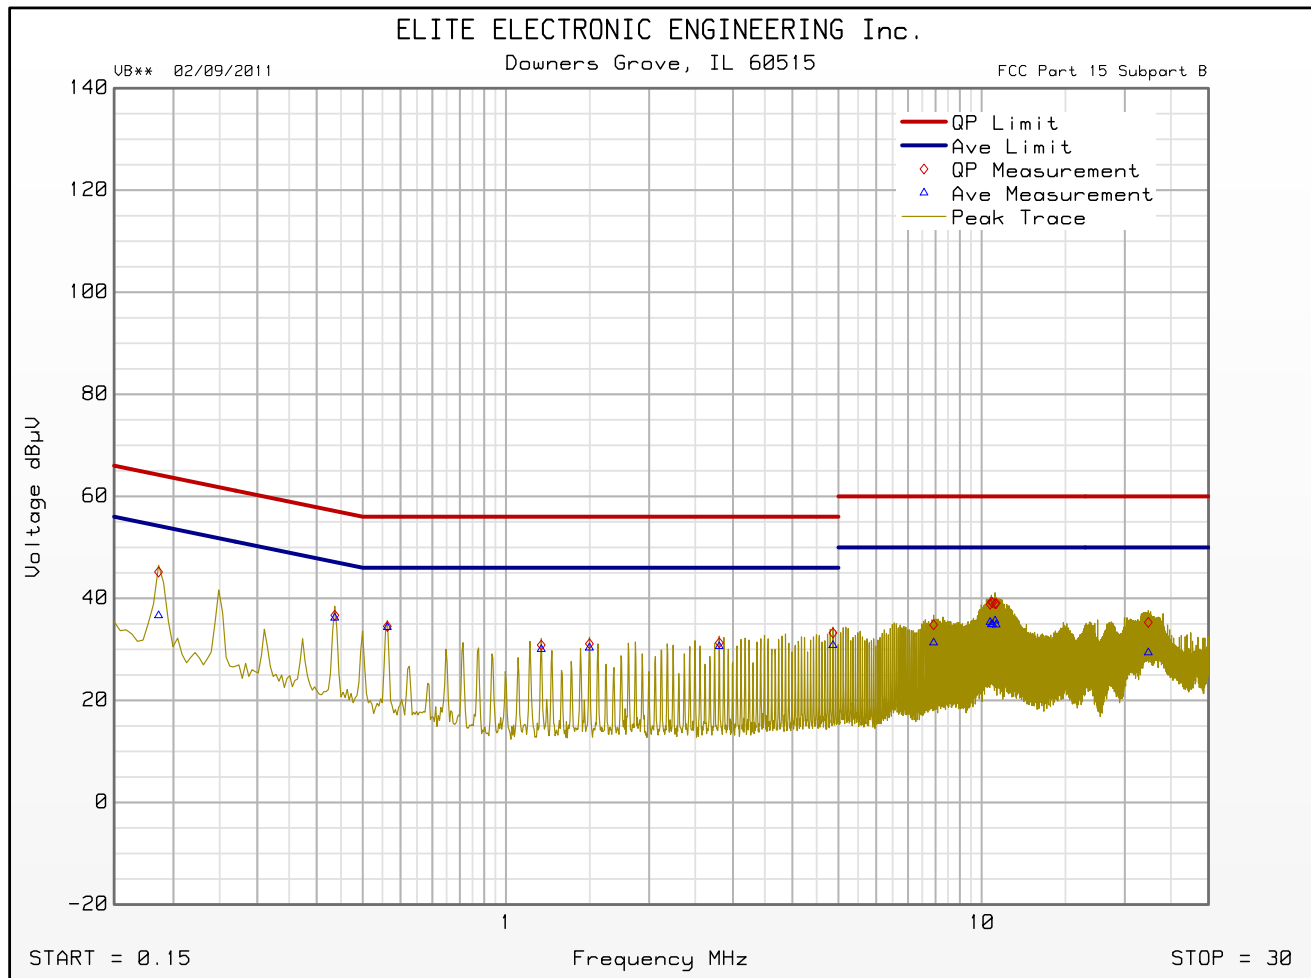

Emissions Meet QP Limit
Emissions Meet Ave Limit



Marker 1 [T1 ndB] RBW 30 kHz RF Att 0 dB
Ref Lvl ndB 20.00 dB VBW 30 kHz
30 dBm BW 306.61322645 kHz SWT 5 ms Unit dBm

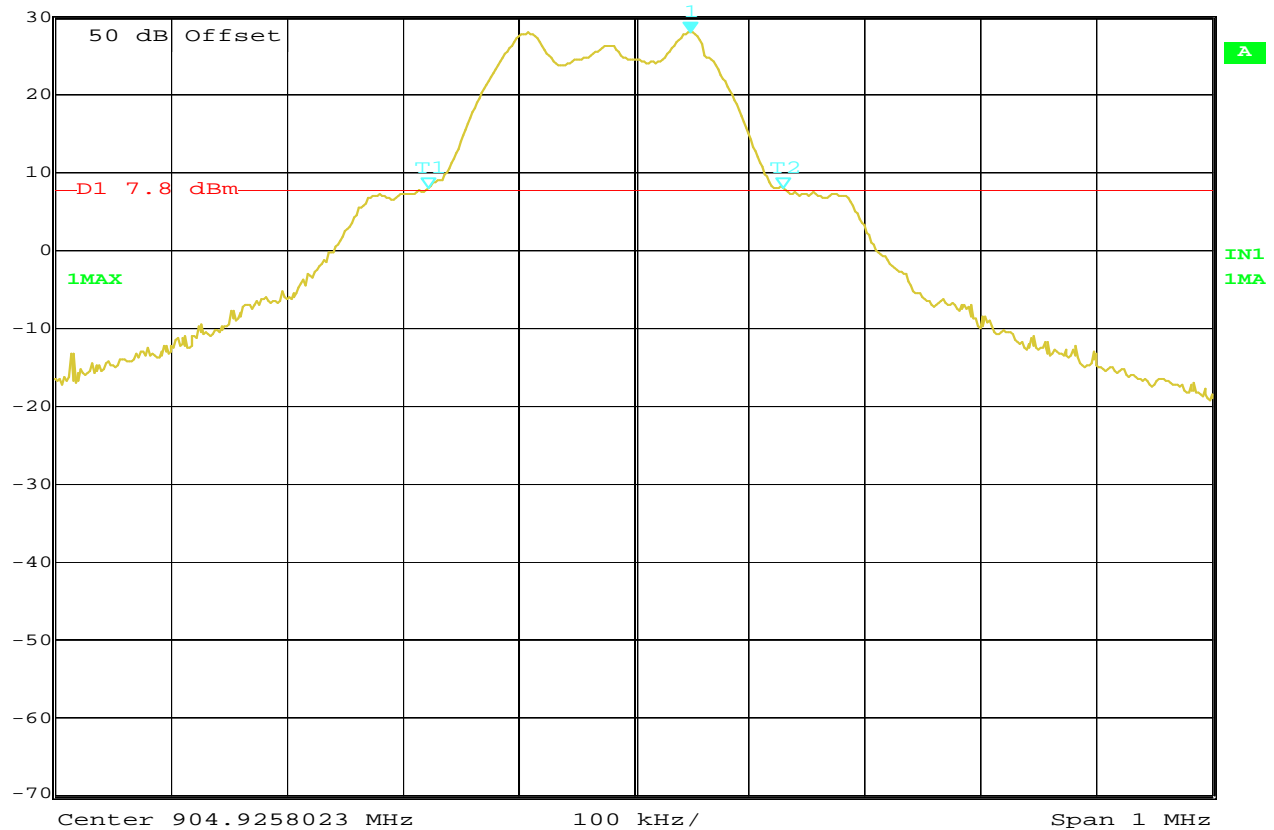


Date: 22.SEP.2014 14:52:33

20dB Bandwidth

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Tx @ 904.9MHz (Ch. 1), Emerson Power Supply
TEST PARAMETERS : 20dB Bandwidth
NOTES : 20dB Bandwidth = 306.61kHz
EQUIPMENT USED : RBA1, T2D8, T2S4, T1EH




Marker 1 [T2 ndB] RBW 30 kHz RF Att 0 dB
Ref Lvl ndB 20.00 dB VBW 30 kHz
30 dBm BW 294.58917836 kHz SWT 5 ms Unit dBm

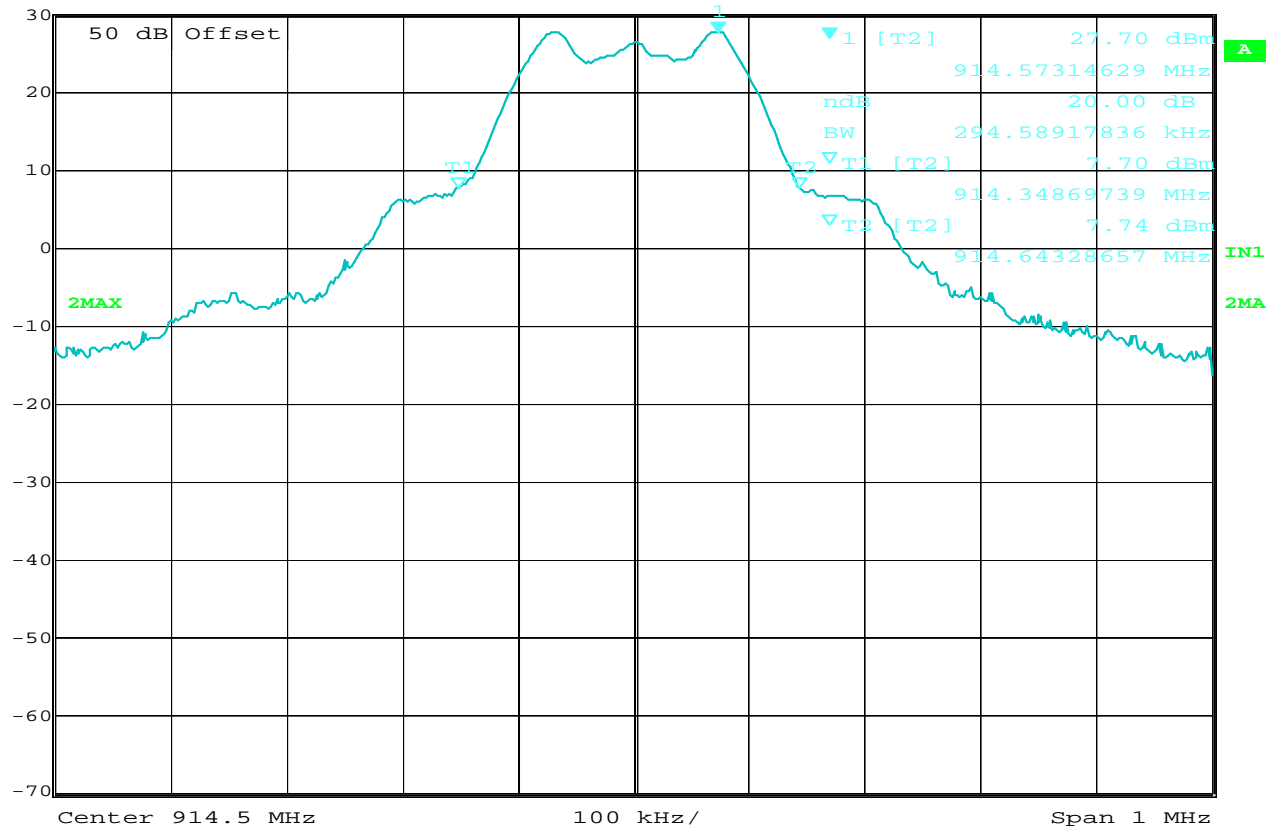

Date: 22.SEP.2014 15:18:30

20dB Bandwidth

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Tx @ 914.5MHz (Ch. 25), Emerson Power Supply
TEST PARAMETERS : 20dB Bandwidth
NOTES : 20dB Bandwidth = 294.59kHz
EQUIPMENT USED : RBA1, T2D8, T2S4, T1EH

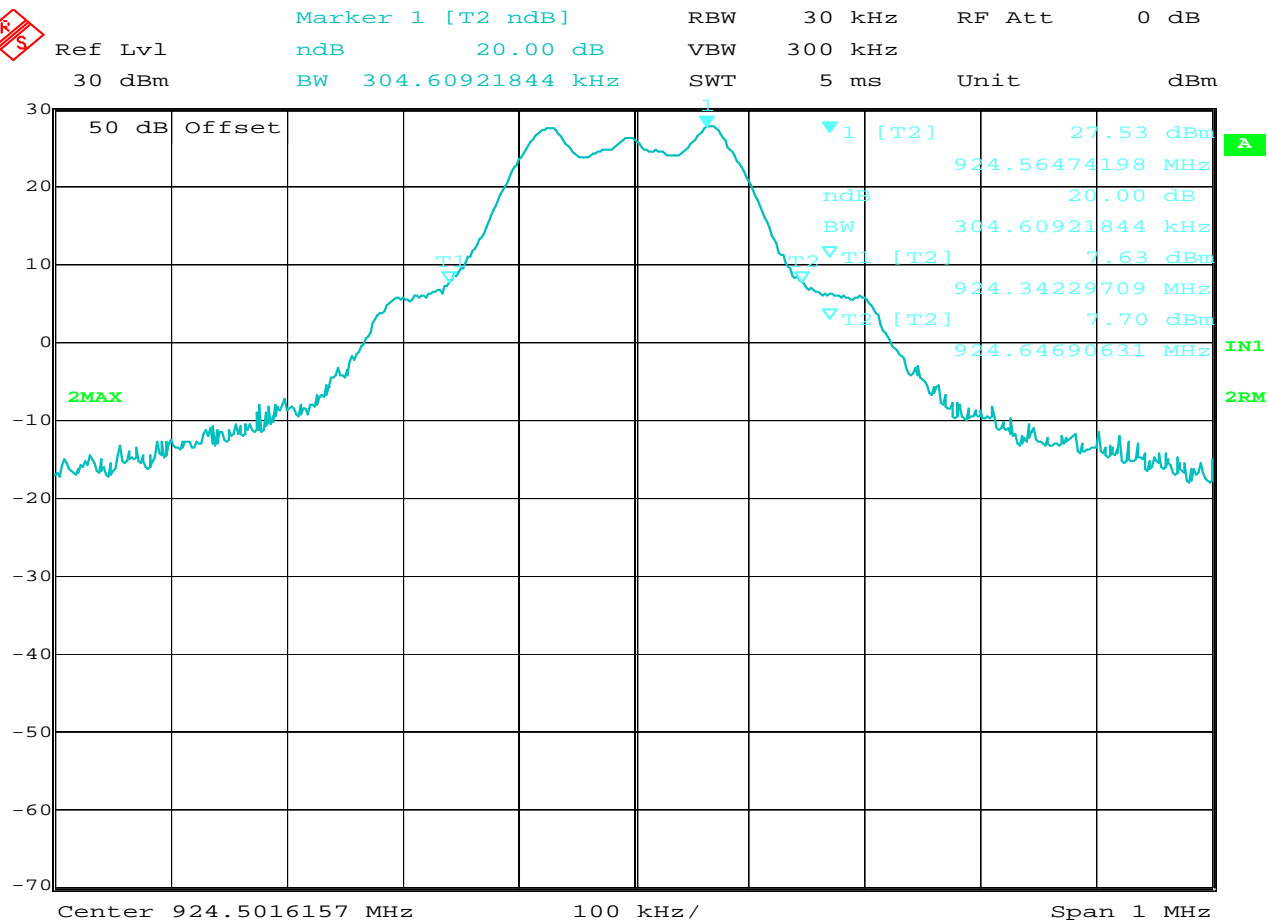


Date: 22.SEP.2014 16:04:48

20dB Bandwidth

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Tx @ 924.5MHz (Ch. 50), Emerson Power Supply
TEST PARAMETERS : 20dB Bandwidth
NOTES : 20dB Bandwidth = 304.61kHz
EQUIPMENT USED : RBA1, T2D8, T2S4, T1EH



Marker 1 [T2 ndB] RBW 30 kHz RF Att 0 dB
Ref Lvl ndB 20.00 dB VBW 300 kHz
30 dBm BW 314.62925852 kHz SWT 5 ms Unit dBm

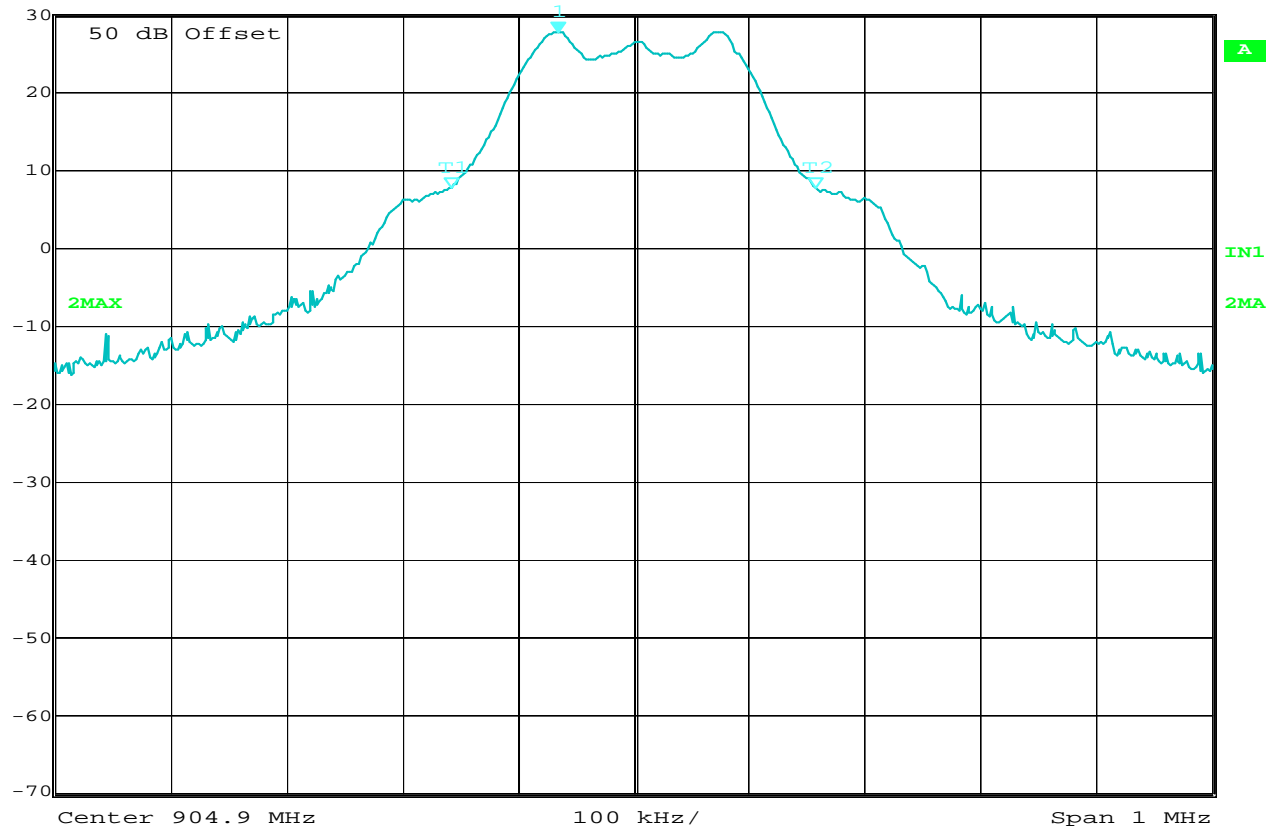


Date: 22.SEP.2014 16:54:57

20dB Bandwidth

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Tx @ 904.9MHz (Ch. 1), PoE
TEST PARAMETERS : 20dB Bandwidth
NOTES : 20dB Bandwidth = 314.63kHz
EQUIPMENT USED : RBA1, T2D8, T2S4, T1EH




Marker 1 [T2 ndB] RBW 30 kHz RF Att 0 dB
Ref Lvl ndB 20.00 dB VBW 300 kHz
30 dBm BW 316.63326653 kHz SWT 5 ms Unit dBm

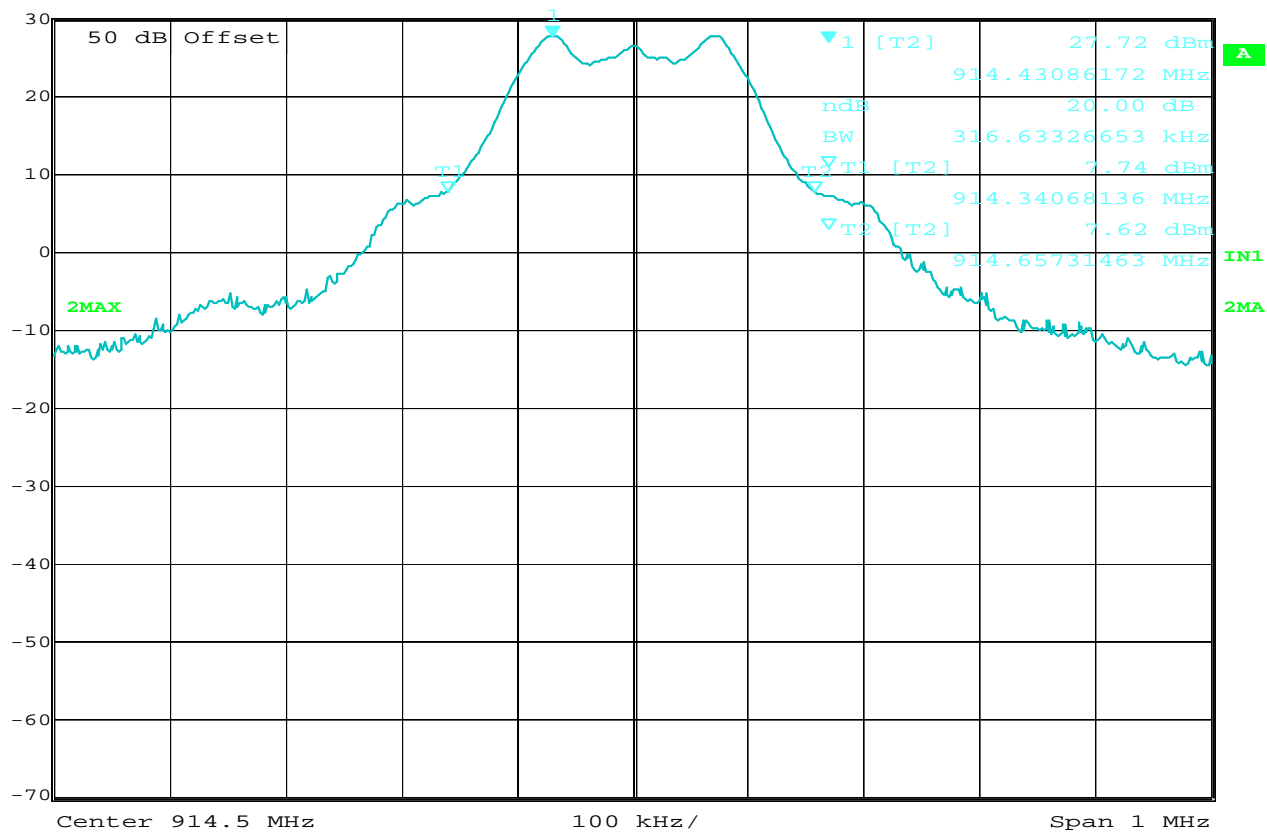

Date: 22.SEP.2014 17:03:56

20dB Bandwidth


MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Tx @ 914.5MHz (Ch. 25), PoE
TEST PARAMETERS : 20dB Bandwidth
NOTES : 20dB Bandwidth = 316.63kHz
EQUIPMENT USED : RBA1, T2D8, T2S4, T1EH

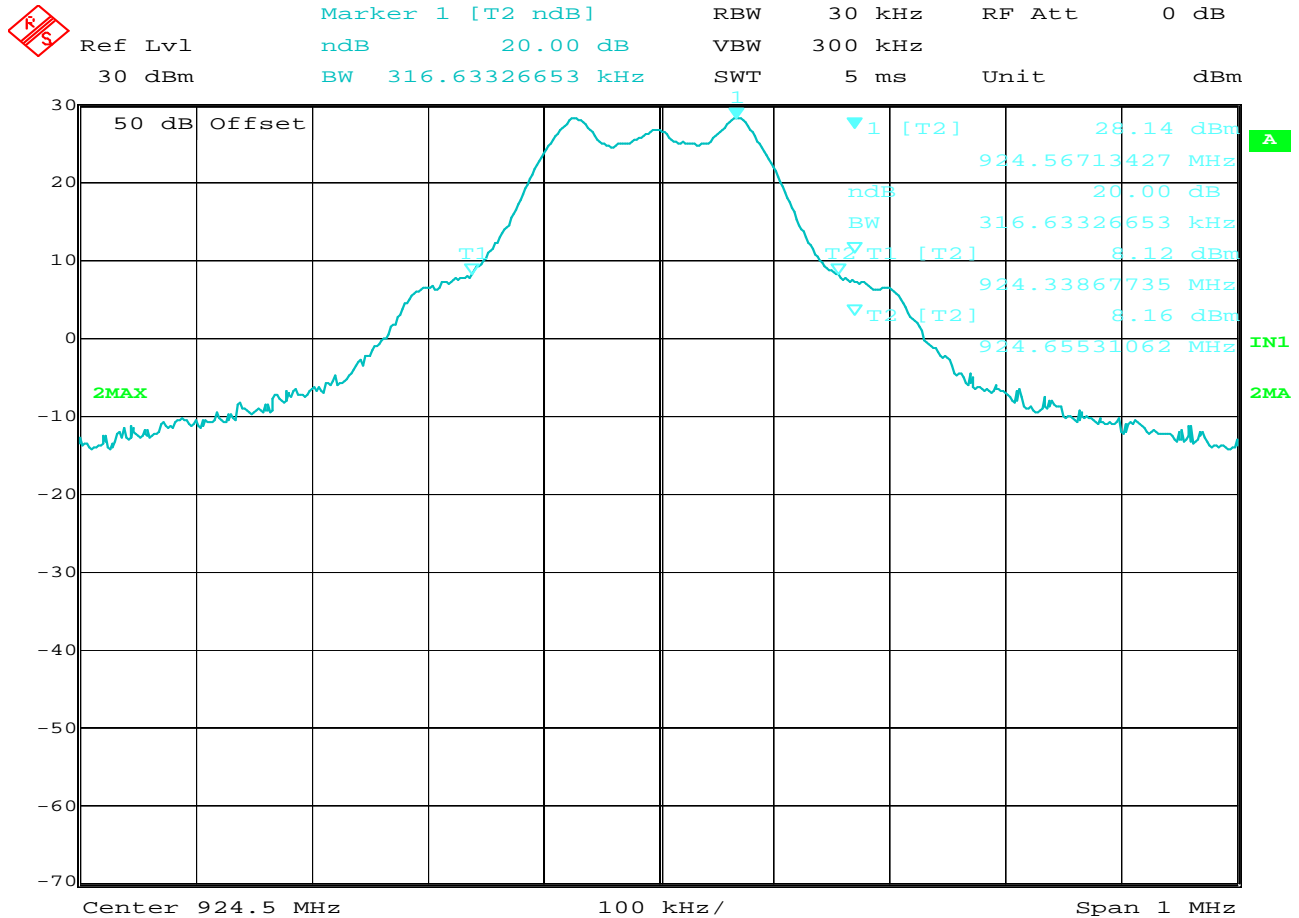

Date: 22.SEP.2014 17:09:19

20dB Bandwidth

```
MANUFACTURER      : Badger Meter
MODEL NUMBER      : Galaxy II Gateway
SERIAL NUMBER     : 291400029
TEST MODE         : Tx @ 924.5MHz (Ch. 50), PoE
TEST PARAMETERS   : 20dB Bandwidth
NOTES             : 20dB Bandwidth = 316.63kHz
EQUIPMENT USED    : RBA1, T2D8, T2S4, T1EH
```

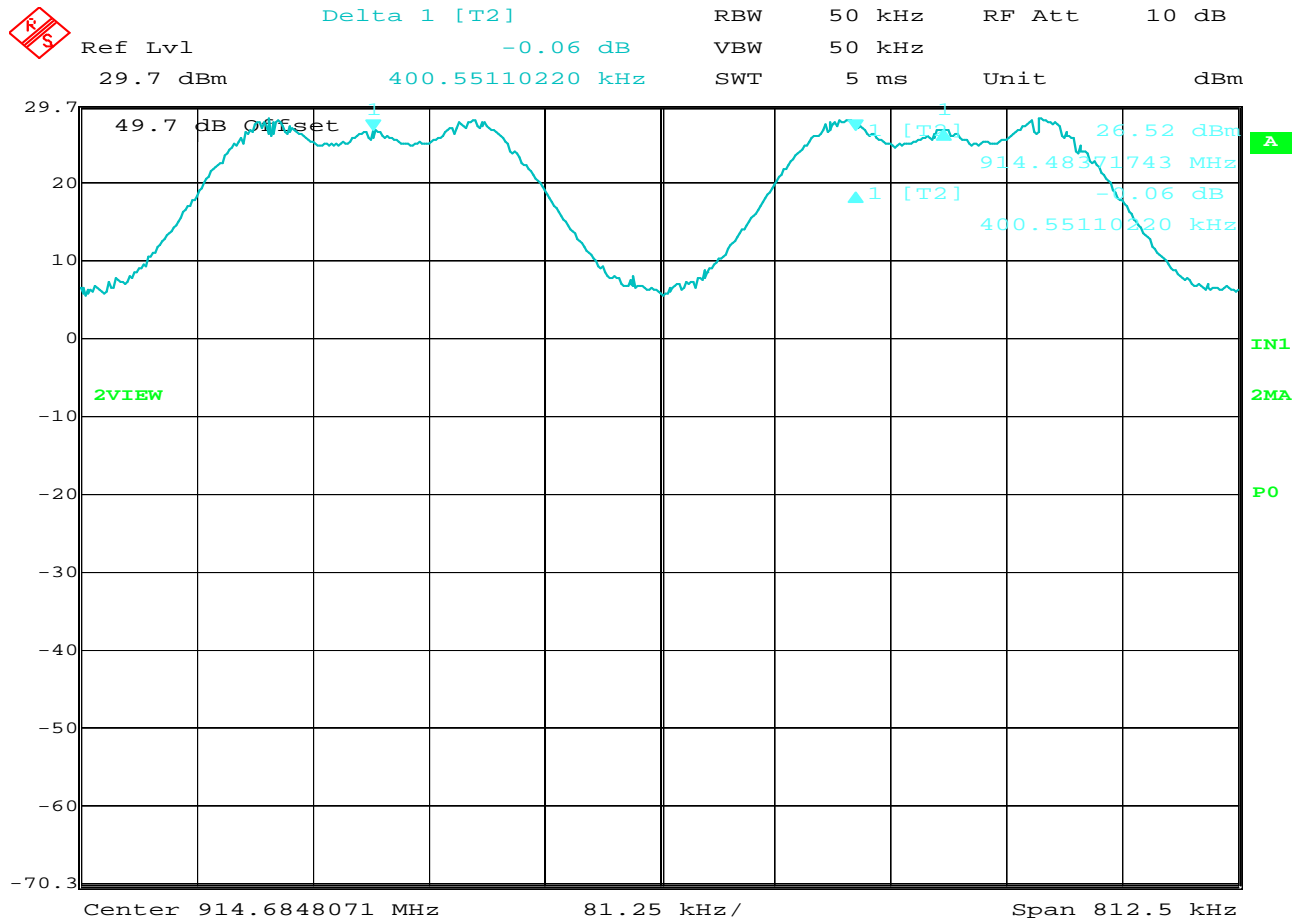


Date: 23.SEP.2014 10:33:47

Carrier Frequency Separation

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, Emerson Power Supply
TEST PARAMETERS : Carrier Frequency Separation
NOTES : Carrier Frequency Separation = 400.55kHz
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Delta 1 [T2] RBW 30 kHz RF Att 10 dB
Ref Lvl 0.44 dB VBW 30 kHz
29.7 dBm 400.55110220 kHz SWT 5 ms Unit dBm

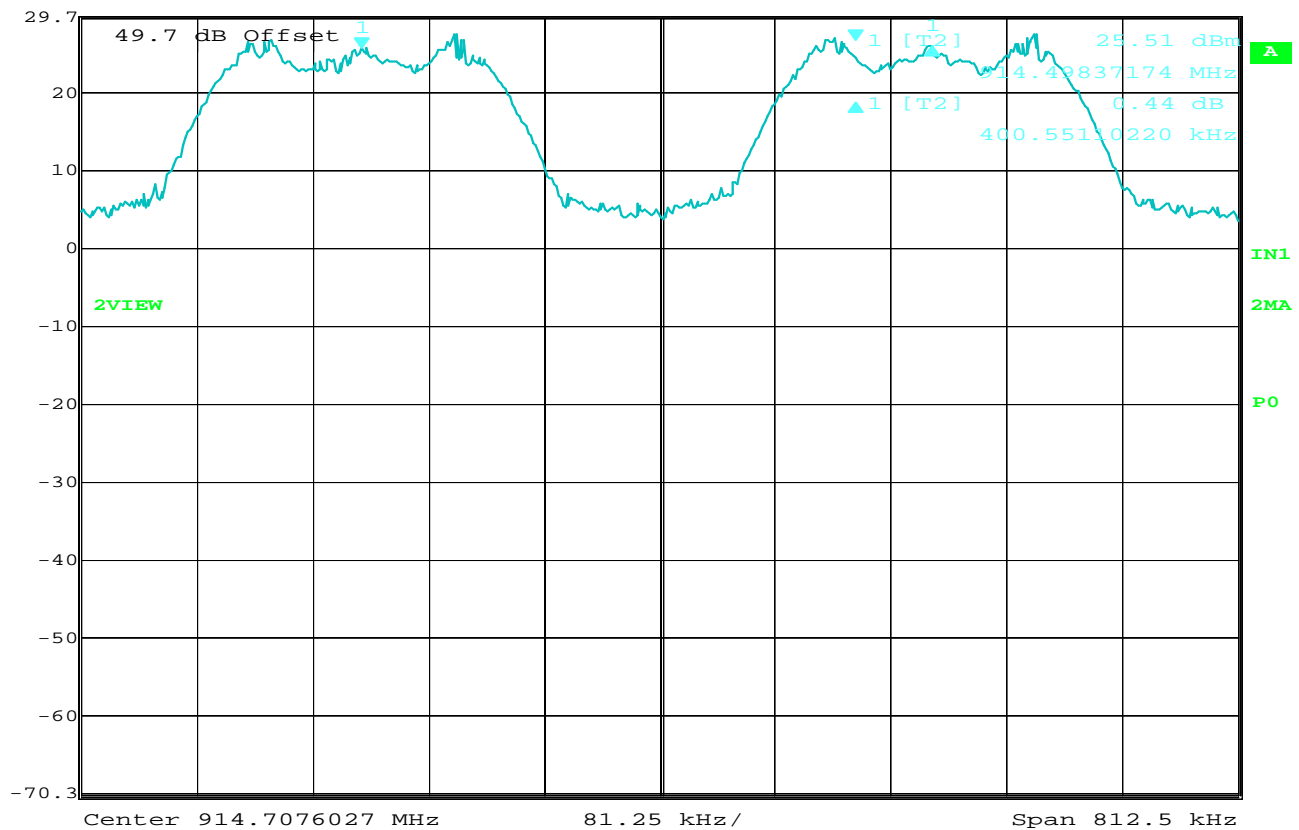

Date: 23.SEP.2014 11:01:50

Carrier Frequency Separation

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, PoE
TEST PARAMETERS : Carrier Frequency Separation
NOTES : Carrier Frequency Separation = 400.55kHz
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Marker 1 [T2]


RBW 100 kHz RF Att 10 dB

Ref Lvl 27.85 dBm

VBW 100 kHz

29.7 dBm 924.45691383 MHz

SWT 6.5 ms Unit dBm

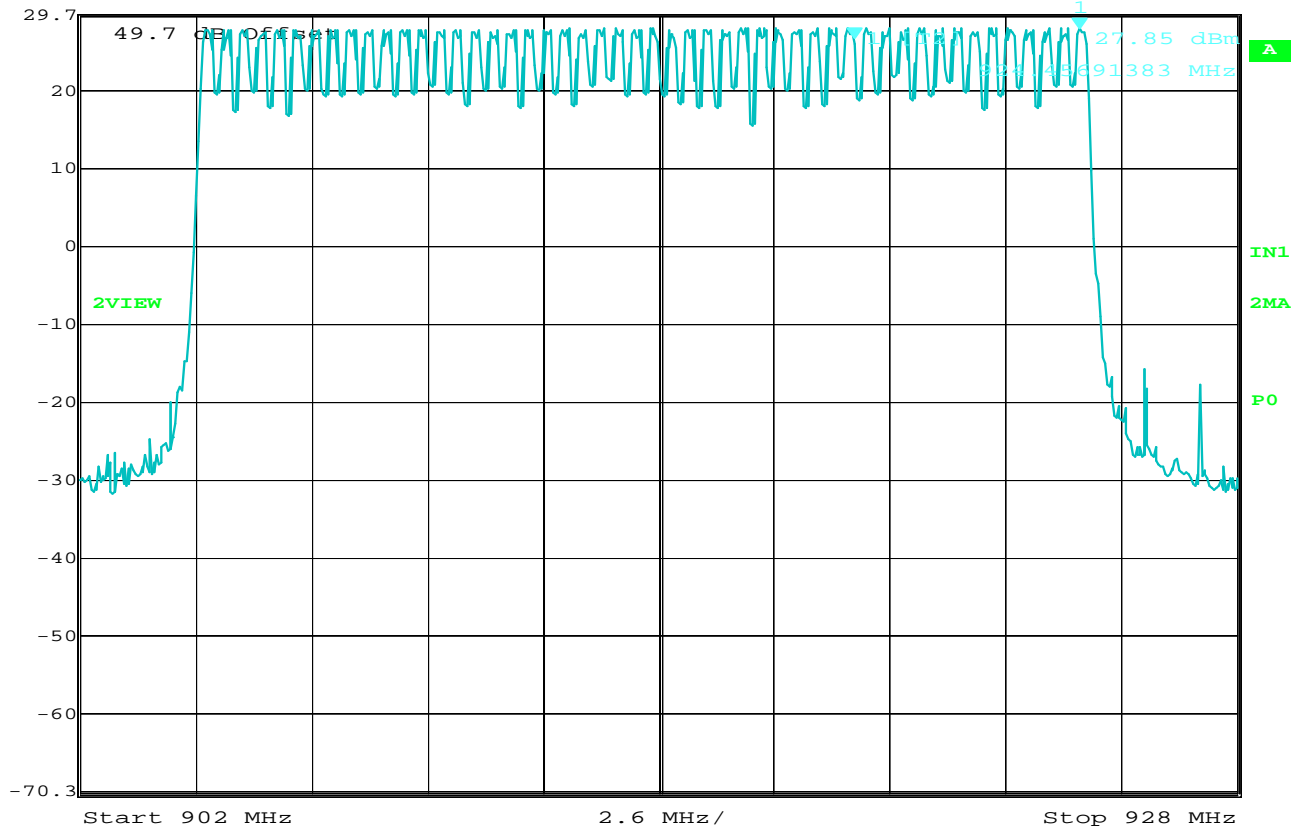

Date: 23.SEP.2014 10:29:47

Number of Hopping Channels

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, Emerson Power Supply
TEST PARAMETERS : Number of Hopping Channels
NOTES : Number of Hopping Channels = 50
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Marker 1 [T2]


RBW 100 kHz RF Att 10 dB

Ref Lvl 27.73 dBm

VBW 100 kHz

29.7 dBm 924.45691383 MHz

SWT 6.5 ms Unit dBm

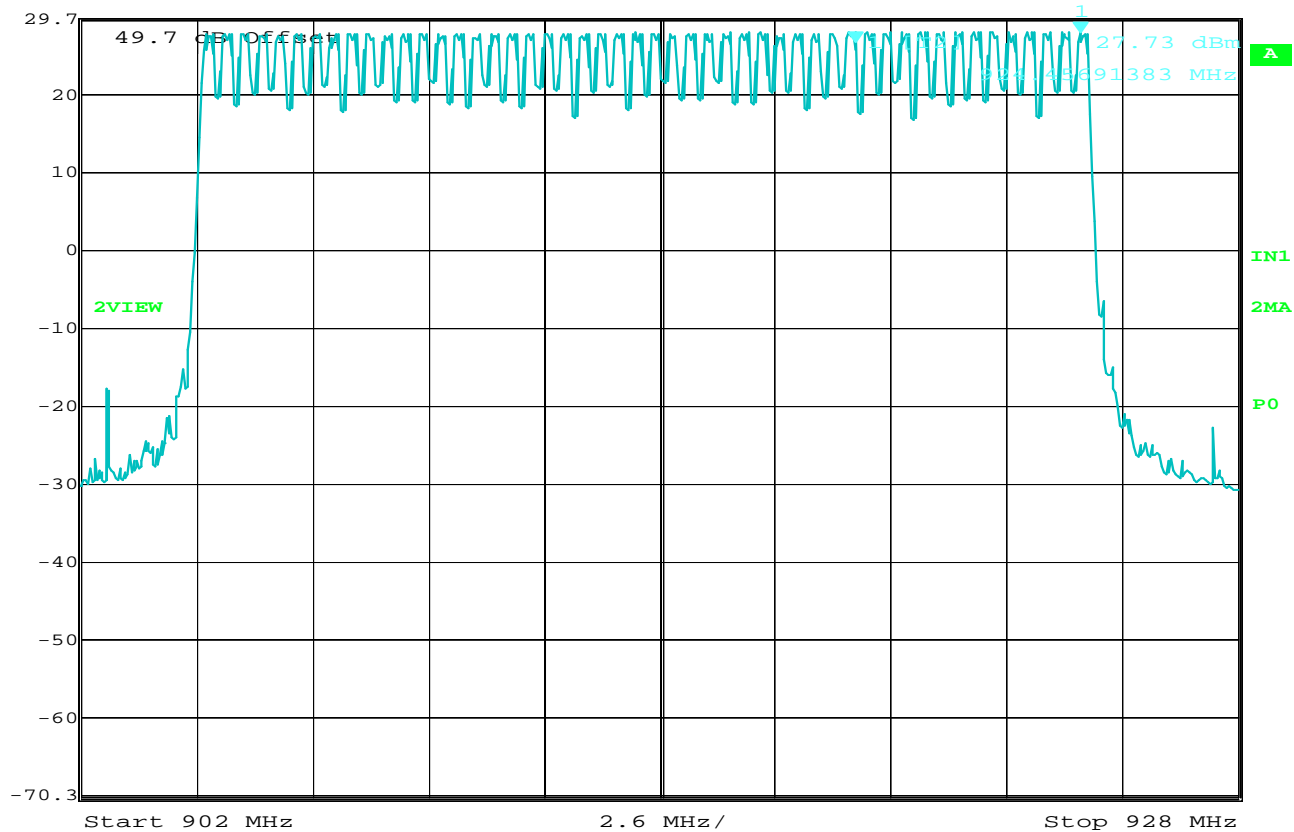

Date: 23.SEP.2014 10:58:08

Number of Hopping Channels

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, PoE
TEST PARAMETERS : Number of Hopping Channels
NOTES : Number of Hopping Channels = 50
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Delta 1 [T2]

RBW 100 kHz RF Att 10 dB

Ref Lvl -64.04 dB

VBW 100 kHz


29.7 dBm

39.178357 ms

SWT 50 ms

Unit

dBm

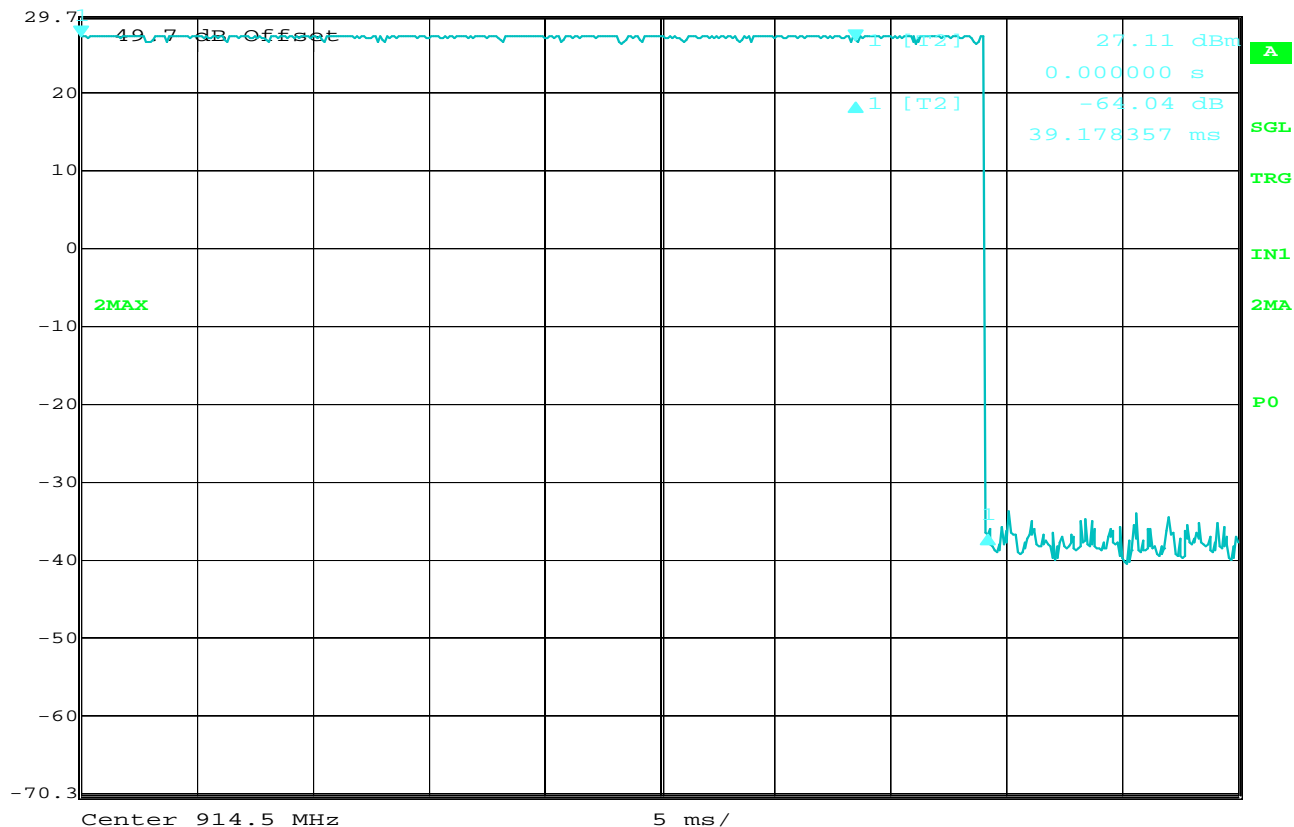

Date: 23.SEP.2014 10:39:28

Time of Occupancy

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, Emerson Power Supply
TEST PARAMETERS : Dwell Time Per Hop
NOTES : Dwell Time Per Hop = 39.18msec
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Delta 1 [T2]

RBW 100 kHz RF Att 10 dB

Ref Lvl -0.02 dB


VBW 100 kHz

29.7 dBm

10.016032 s

SWT 10.5 s

Unit dBm

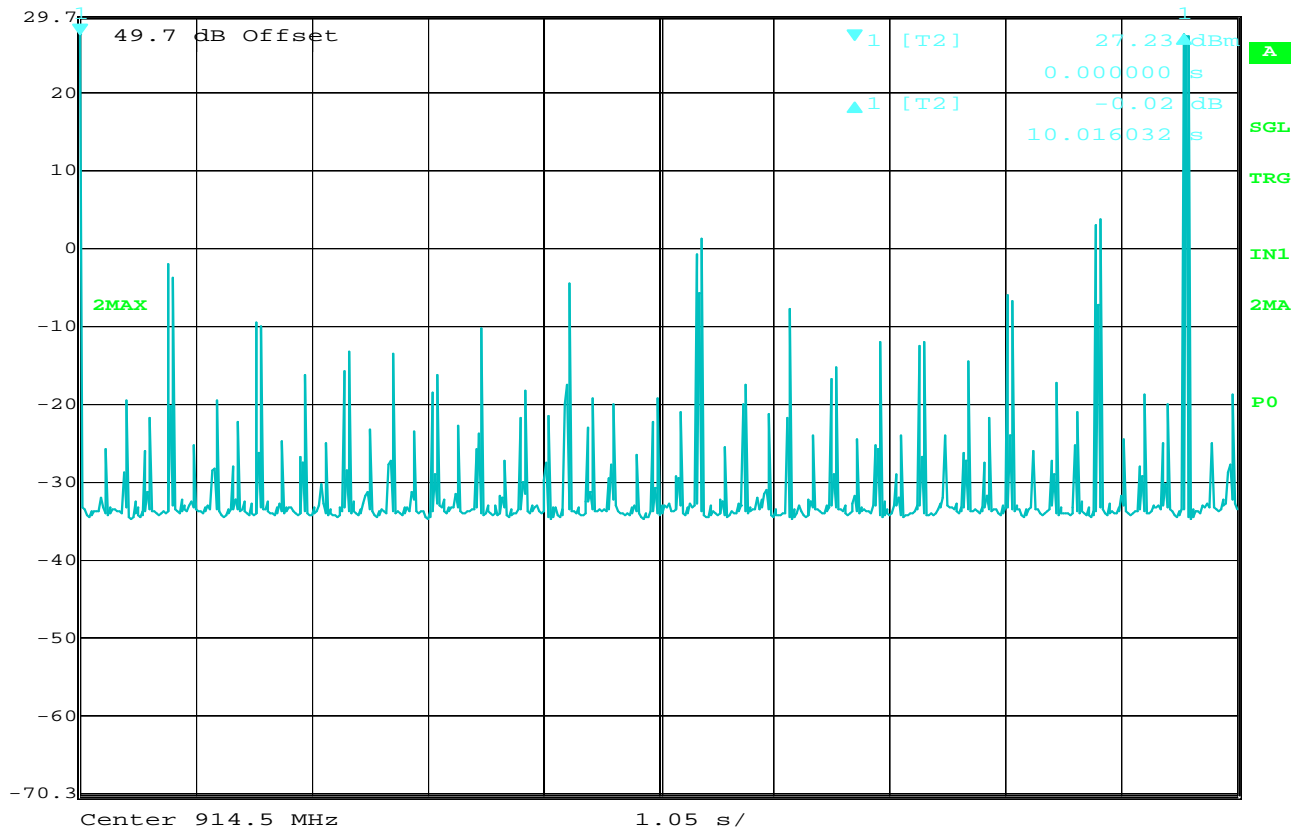

Date: 23.SEP.2014 10:52:03

Time of Occupancy

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, Emerson Power Supply
TEST PARAMETERS : Time of Occupancy
NOTES : Time of Occupancy=(Dwell Time per Hop)x(Number of Hops in a 10 sec period)
: Time of Occupancy = (39.18msec) x 2
: Time of Occupancy = 78.36msec
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Delta 1 [T2]

RBW 50 kHz RF Att 10 dB


Ref Lvl -65.40 dB

VBW 50 kHz

29.7 dBm

39.178357 ms

SWT 50 ms Unit dBm

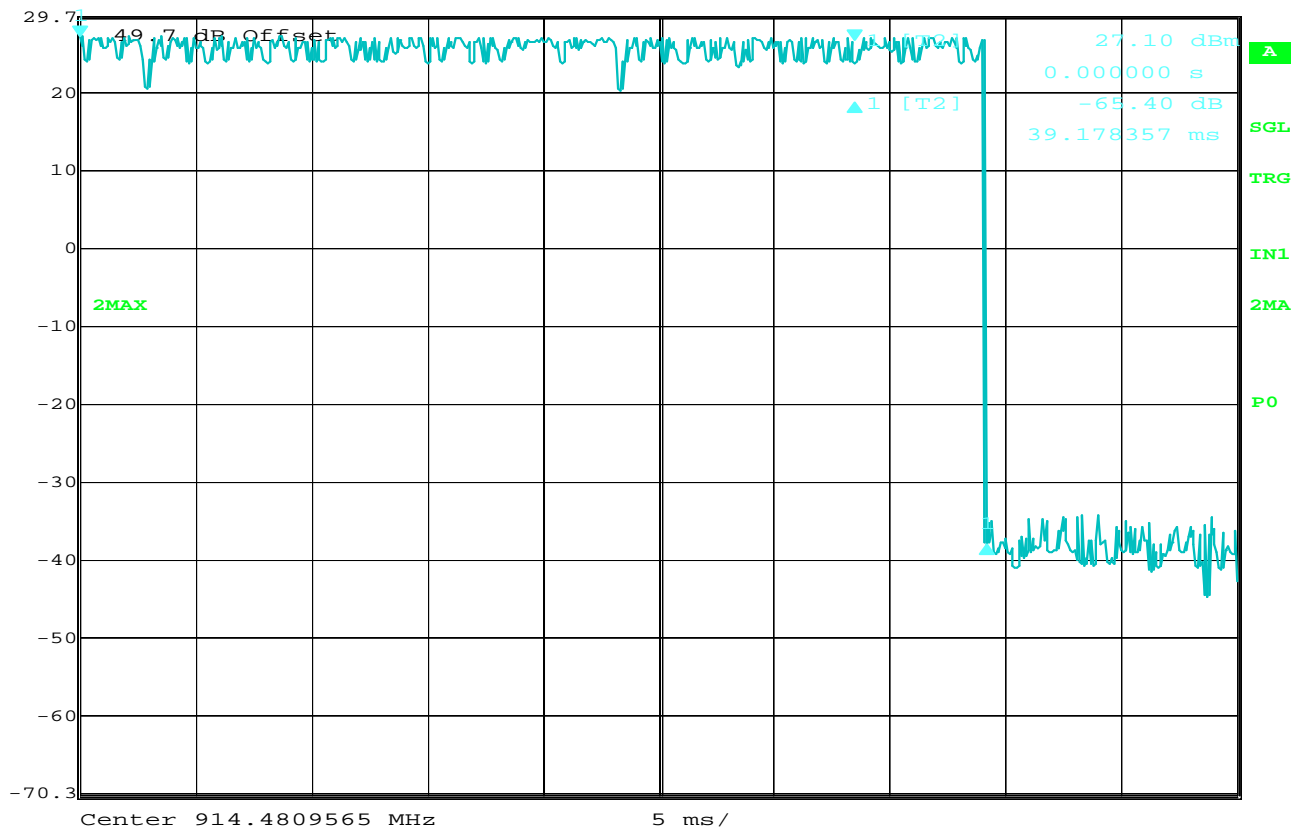

Date: 23.SEP.2014 11:09:39

Time of Occupancy

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, PoE
TEST PARAMETERS : Dwell Time Per Hop
NOTES : Dwell Time Per Hop = 39.18msec
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Delta 1 [T2]

RBW 50 kHz RF Att 10 dB


Ref Lvl -0.04 dB

VBW 50 kHz

29.7 dBm

10.016032 s

SWT 10.5 s Unit dBm

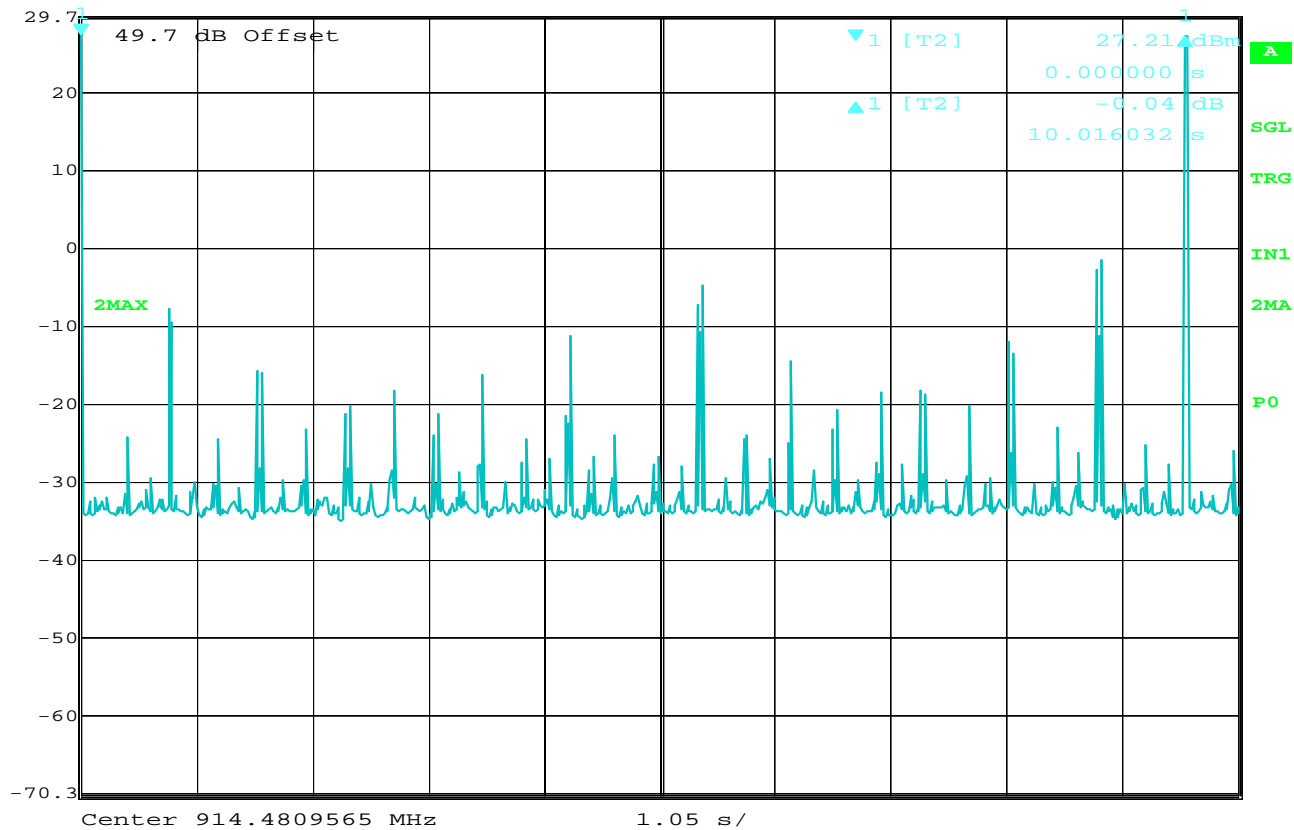

Date: 23.SEP.2014 11:17:25

Time of Occupancy

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, PoE
TEST PARAMETERS : Time of Occupancy
NOTES : Time of Occupancy=(Dwell Time per Hop)x(Number of Hops in a 10 sec period)
: Time of Occupancy = (39.18msec) x 2
: Time of Occupancy = 78.36msec
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : See Below
SPECIFICATION : Peak Output Power (Antenna Conducted)
DATE : September 23, 2014
TEST EQUIPMENT : RBA0, T2D8, T2S4, T1EH
NOTES : Output Power = 141, Antenna Port 1, Emerson Power Supply

Transmit Channel	Transmit Frequency MHz	Measured Output Power dBm	Limit dBm
1	904.9	27.67	30.0
25	914.5	27.61	30.0
50	924.5	27.61	30.0



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : See Below
SPECIFICATION : Peak Output Power (Antenna Conducted)
DATE : September 23, 2014
TEST EQUIPMENT : RBA0, T2D8, T2S4, T1EH
NOTES : Output Power = 141, Antenna Port 1, Power Over Ethernet

Transmit Channel	Transmit Frequency MHz	Measured Output Power dBm	Limit dBm
1	904.9	27.49	30.0
25	914.5	27.51	30.0
50	924.5	27.56	30.0



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 904.9MHz
SPECIFICATION : Effective Isotropic Radiated Power (EIRP)
DATE : September 23, 2014
TEST EQUIPMENT : RBA0, NTA3, NDQ1, GSD3
NOTES : Output Power = 141, Emerson Power Supply

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
904.90	H	75.4	0.8	2.2	2.5	0.5	36.0	-35.5
904.90	V	83.5	10.2	2.2	2.5	9.9	36.0	-26.1



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 914.5MHz
SPECIFICATION : Effective Isotropic Radiated Power (EIRP)
DATE : September 23, 2014
TEST EQUIPMENT : RBA0, NTA3, NDQ1, GSD3
NOTES : Output Power = 141, Emerson Power Supply

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
914.50	H	79.2	4.4	2.2	2.5	4.1	36.0	-31.9
914.50	V	83.6	10.8	2.2	2.5	10.5	36.0	-25.5



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 924.5MHz
SPECIFICATION : Effective Isotropic Radiated Power (EIRP)
DATE : September 23, 2014
TEST EQUIPMENT : RBA0, NTA3, NDQ1, GSD3
NOTES : Output Power = 141, Emerson Power Supply

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
924.50	H	81.6	6.8	2.2	2.5	6.5	36.0	-29.5
924.50	V	85.8	13.7	2.2	2.5	13.4	36.0	-22.6



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 904.9MHz
SPECIFICATION : Effective Isotropic Radiated Power (EIRP)
DATE : September 23, 2014
TEST EQUIPMENT : RBA0, NTA3, NDQ1, GSD3
NOTES : Output Power = 141, PoE

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
904.90	H	77.7	3.2	2.2	2.5	2.9	36.0	-33.1
904.90	V	84.3	10.9	2.2	2.5	10.6	36.0	-25.4




MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 914.5MHz
SPECIFICATION : Effective Isotropic Radiated Power (EIRP)
DATE : September 23, 2014
TEST EQUIPMENT : RBA0, NTA3, NDQ1, GSD3
NOTES : Output Power = 141, PoE

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
914.50	H	78.8	3.9	2.2	2.5	3.6	36.0	-32.4
914.50	V	84.8	11.9	2.2	2.5	11.6	36.0	-24.4



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 924.5MHz
SPECIFICATION : Effective Isotropic Radiated Power (EIRP)
DATE : September 23, 2014
TEST EQUIPMENT : RBA0, NTA3, NDQ1, GSD3
NOTES : Output Power = 141, PoE


Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
924.50	H	81.0	6.1	2.2	2.5	5.8	36.0	-30.2
924.50	V	85.6	13.5	2.2	2.5	13.2	36.0	-22.8

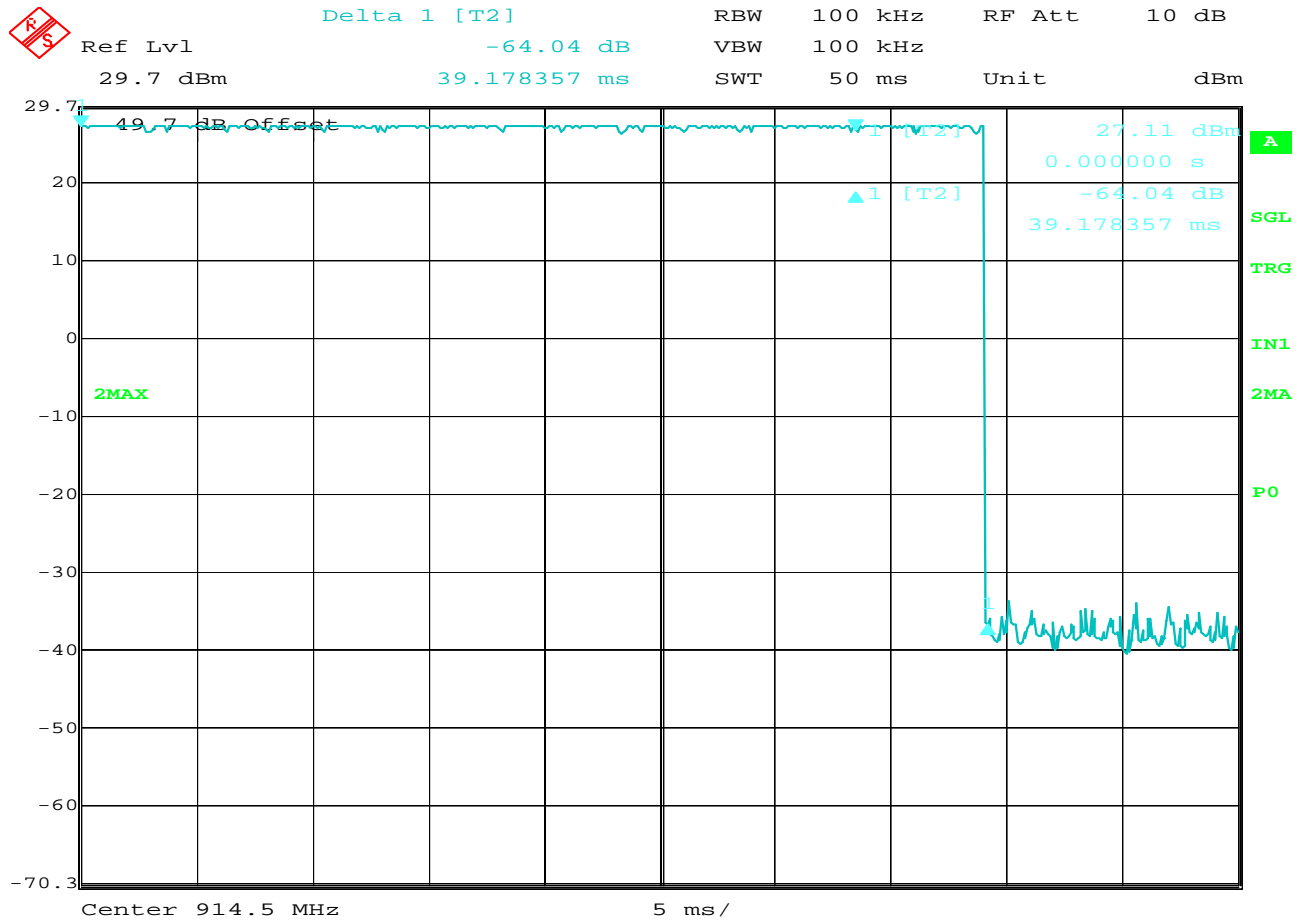

Date: 23.SEP.2014 10:39:28

Duty Cycle Correction Factor

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, Emerson Power Supply
TEST PARAMETERS : Dwell Time Per Hop
NOTES : Dwell Time Per Hop = 39.18msec
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH

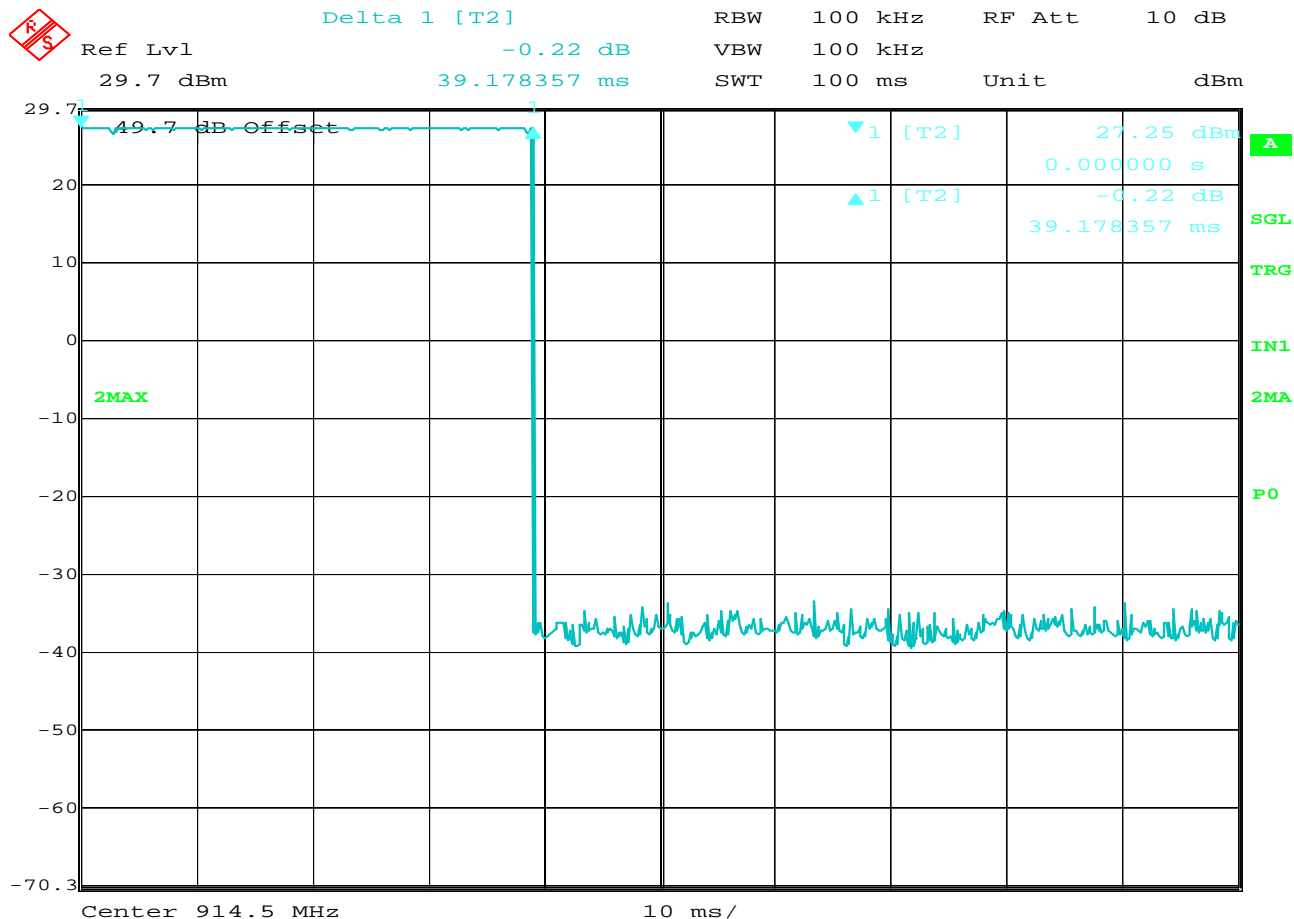

Date: 23.SEP.2014 10:43:12

Duty Cycle Correction Factor

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, Emerson Power Supply
TEST PARAMETERS : Duty Cycle Correction Factor
NOTES : Duty Cycle Correction Factor = $20 \times \log(((\text{Dwell Time per Hop}) \times (\text{number of hops in a 100msec period}))/100\text{msec})$
: Duty Cycle Correction Factor = $20 \times \log(((39.18\text{msec}) \times (1))/100\text{msec})$
: Duty Cycle Correction Factor = $20 \times \log(0.3918) = -8.14\text{dB}$
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Delta 1 [T2]

RBW 50 kHz RF Att 10 dB

Ref Lvl -65.40 dB

VBW 50 kHz


29.7 dBm

39.178357 ms

SWT 50 ms

Unit


dBm

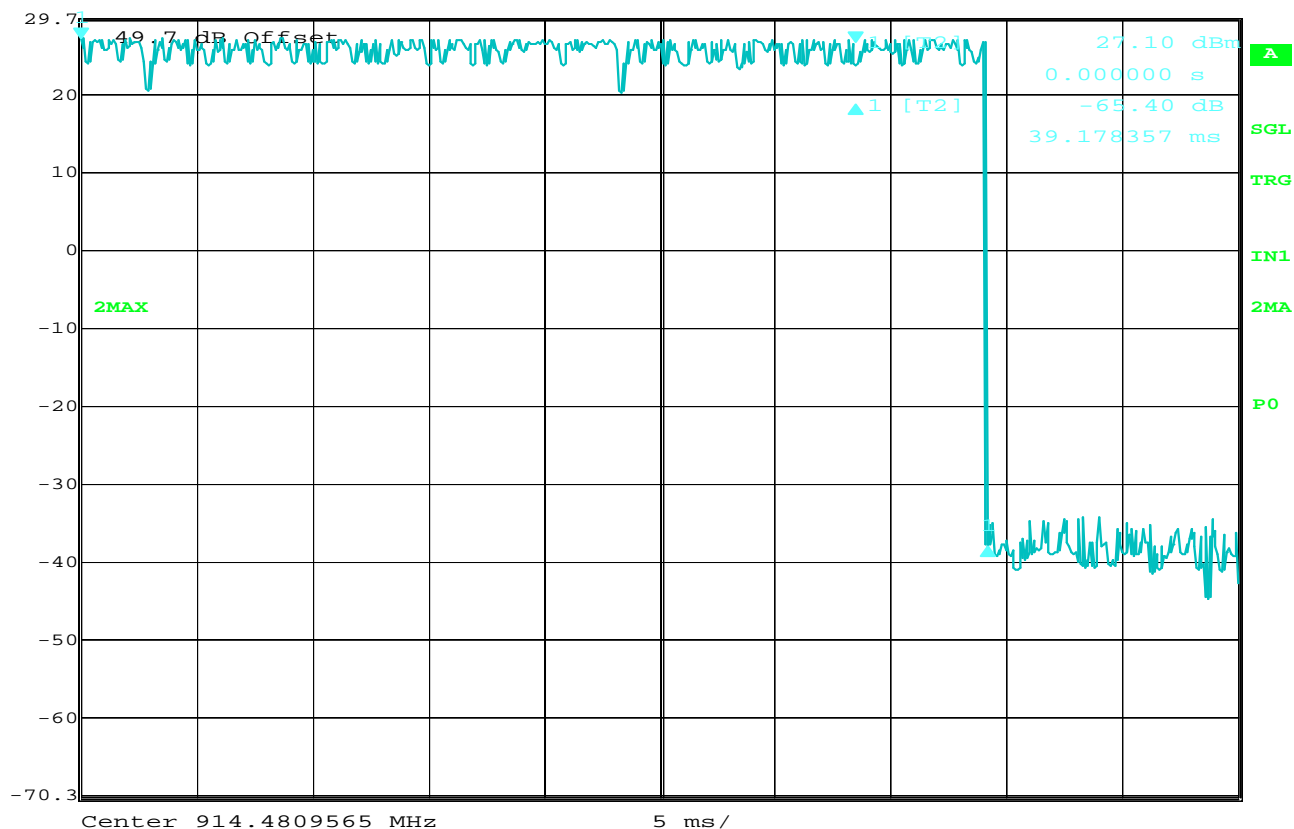

Date: 23.SEP.2014 11:09:39

Duty Cycle Correction Factor

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, PoE
TEST PARAMETERS : Dwell Time Per Hop
NOTES : Dwell Time Per Hop = 39.18msec
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH

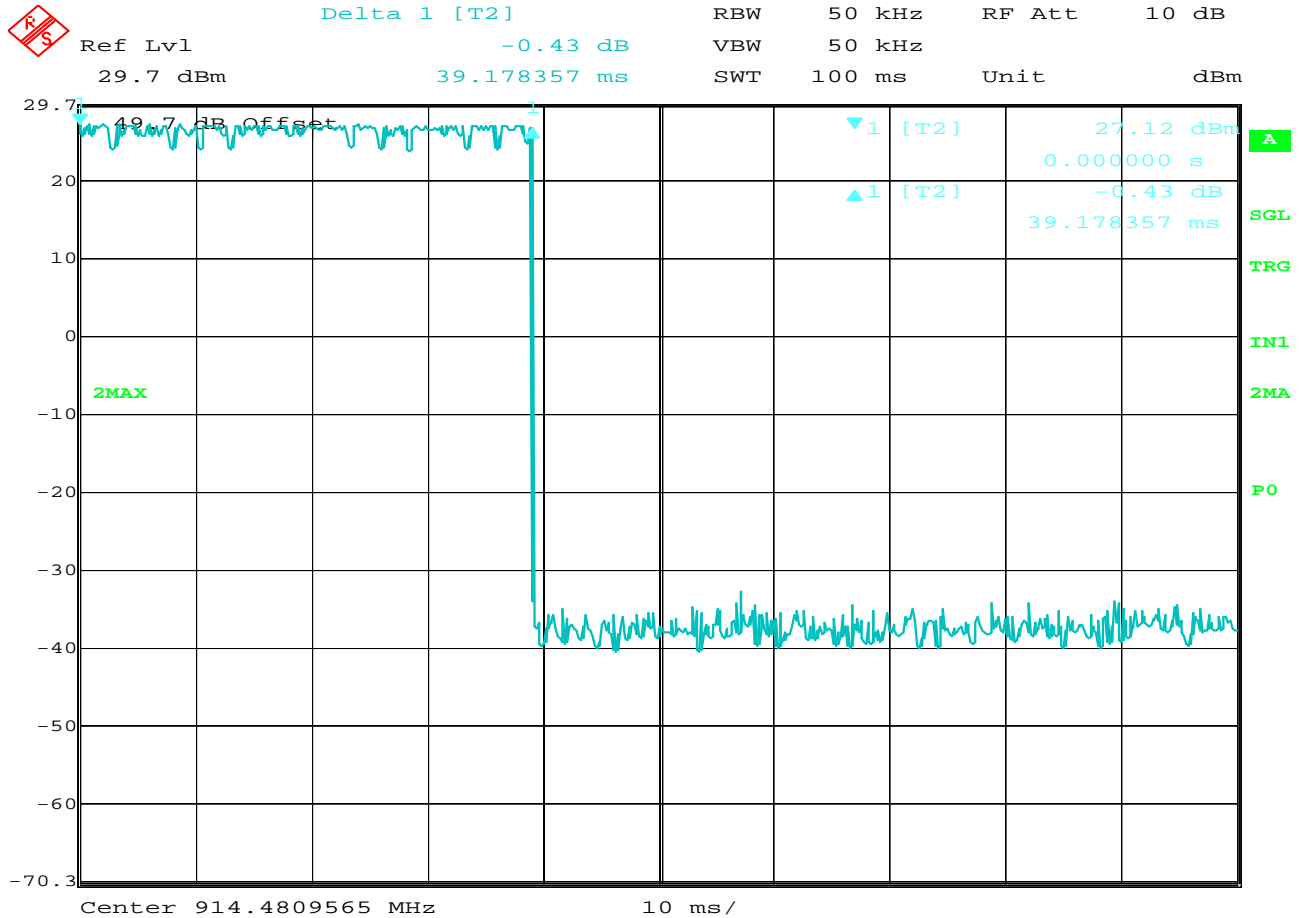

Date: 23.SEP.2014 11:12:04

Duty Cycle Correction Factor

MANUFACTURER : Badger Meter

MODEL NUMBER : Galaxy II Gateway

SERIAL NUMBER : 291400029

TEST MODE : Hopping Enabled, PoE

TEST PARAMETERS : Duty Cycle Correction Factor

NOTES : Duty Cycle Correction Factor = $20 \times \log(((\text{Dwell Time per Hop}) \times (\text{number of hops in a 100msec period}))/100\text{msec})$

: Duty Cycle Correction Factor = $20 \times \log (((39.18\text{msec}) \times (1))/100\text{msec})$

: Duty Cycle Correction Factor = $20 \times \log (0.3918) = -8.14\text{dB}$


EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH

ELITE ELECTRONIC ENGINEERING Inc.

Downers Grove, Ill. 60515

UNIV RCU EMI RUN 4

UKA1 04/24/13

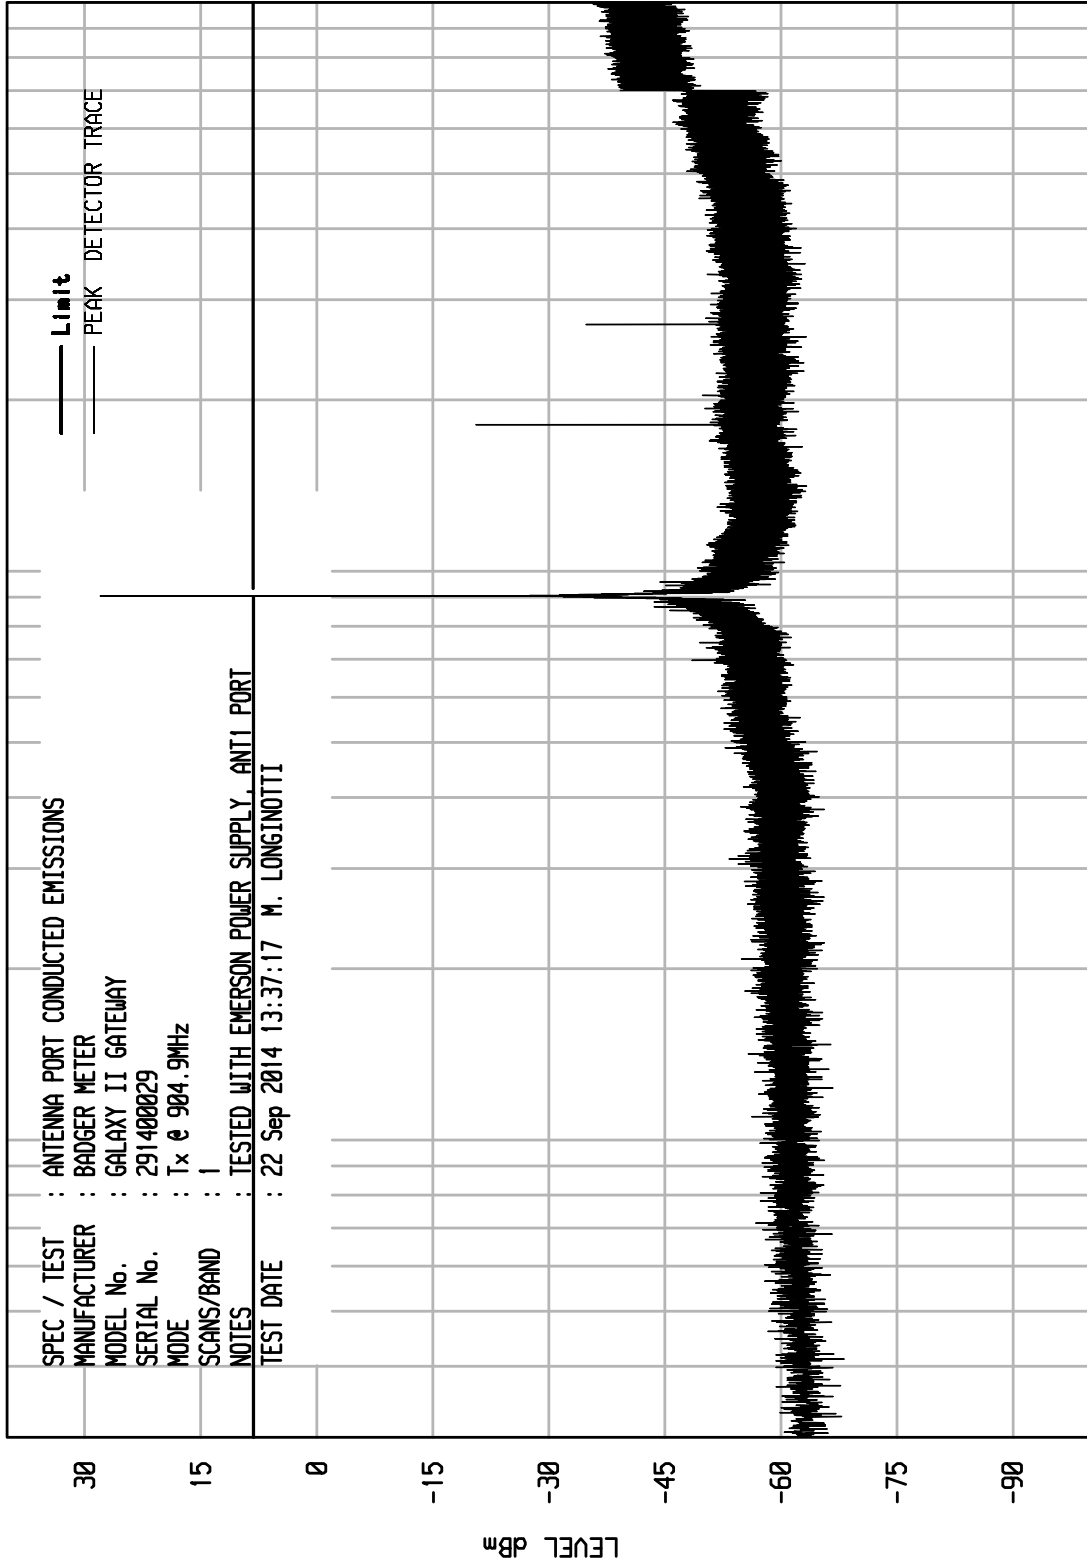

STOP = 10000

FREQUENCY MHz


START = 30

ELITE ELECTRONIC ENGINEERING Inc.

Downers Grove, Ill. 60515

UNIV RCU EMI RUN 5

UKA1 04/24/13

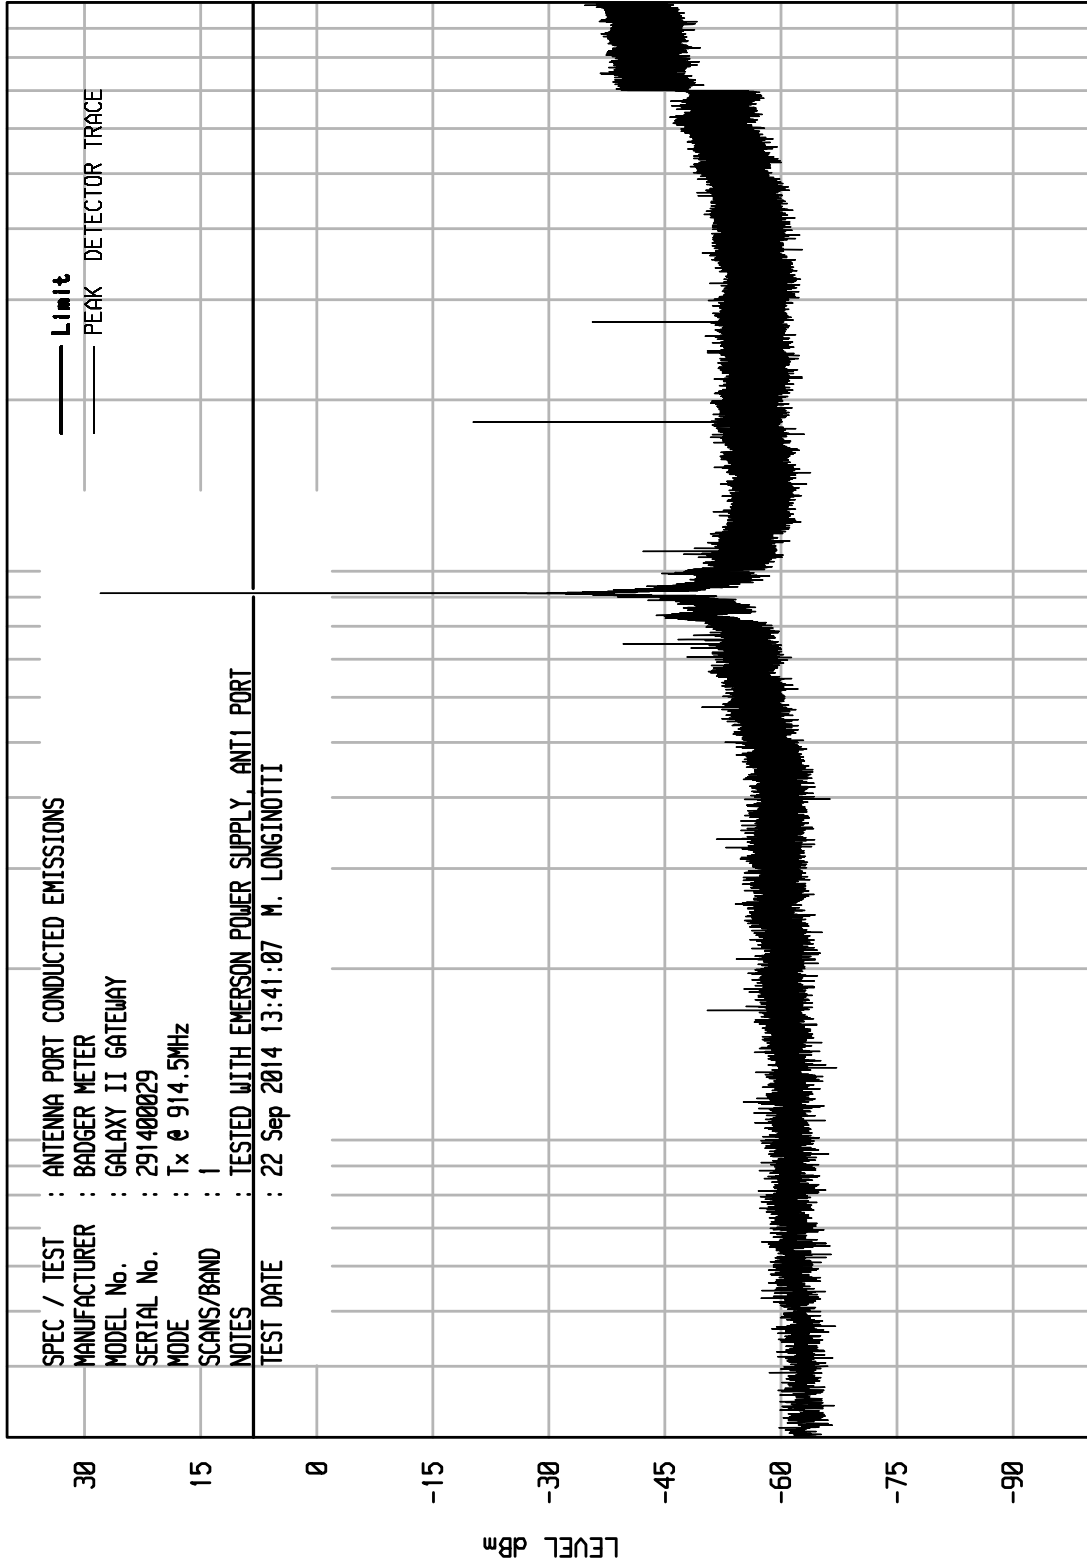

STOP = 10000

1000

100


START = 30

ELITE ELECTRONIC ENGINEERING Inc.

Downers Grove, Ill. 60515

UNIV RCU EMI RUN 3

UKA1 04/24/13

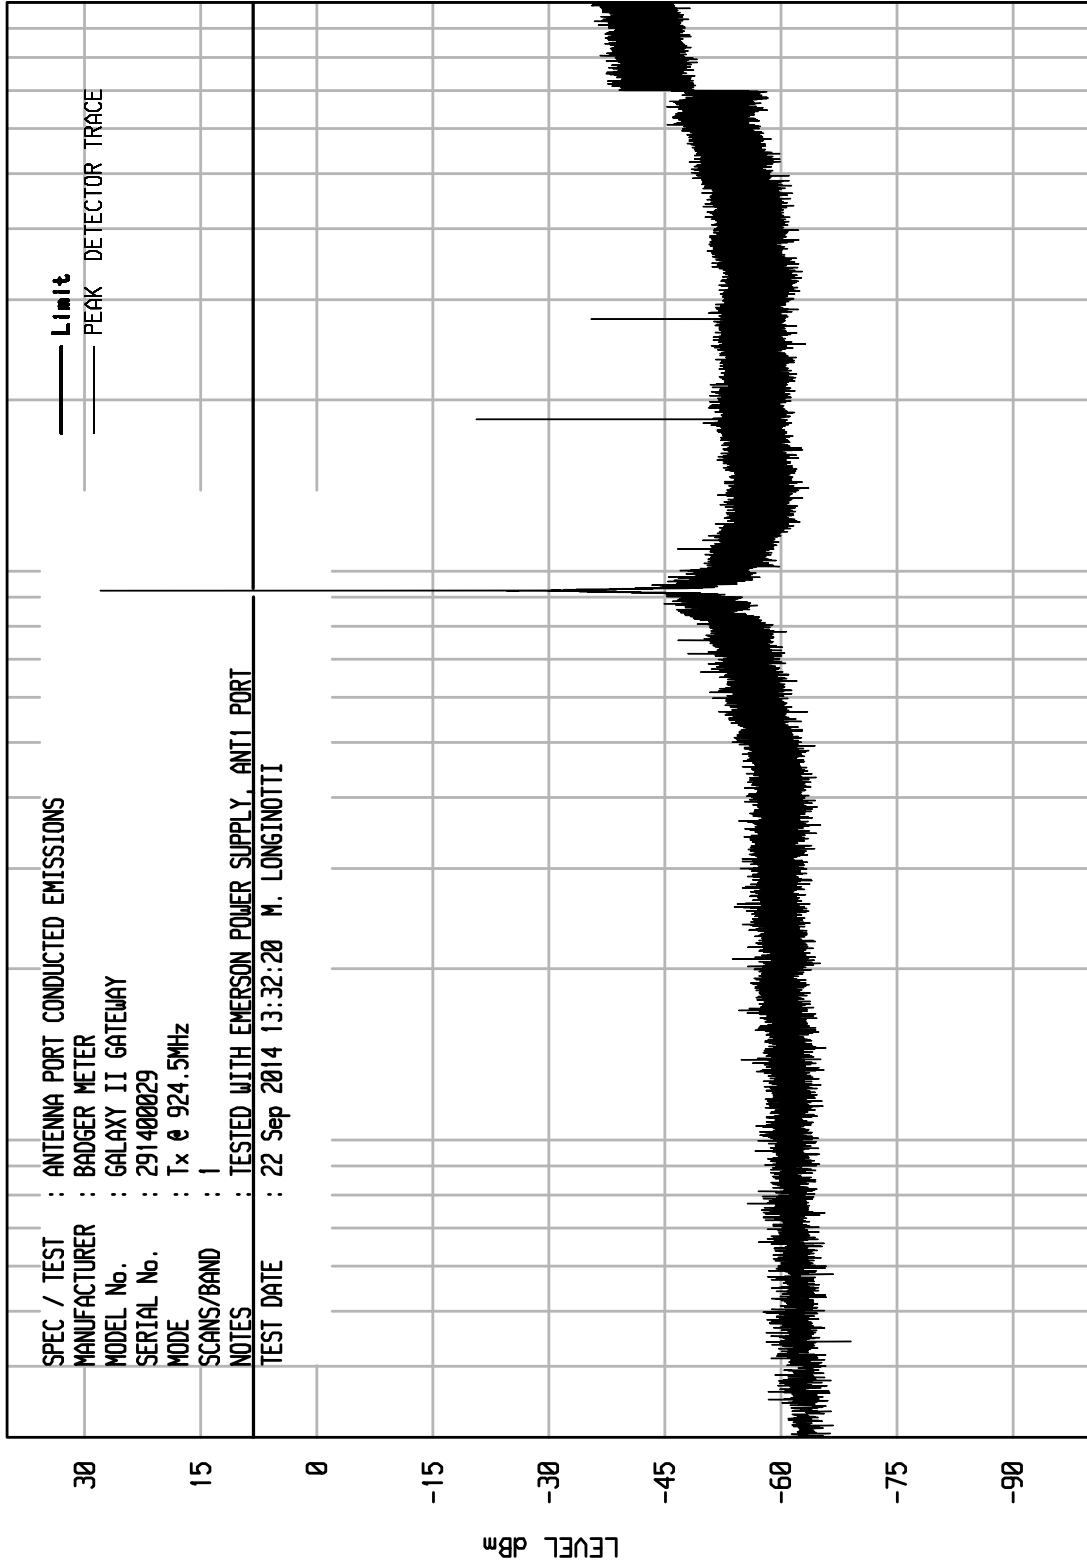

STOP = 10000

1000

100


START = 30

ELITE ELECTRONIC ENGINEERING Inc.

Downers Grove, Ill. 60515

UKA1 04/24/13

UNIV RCU EMI RUN 8

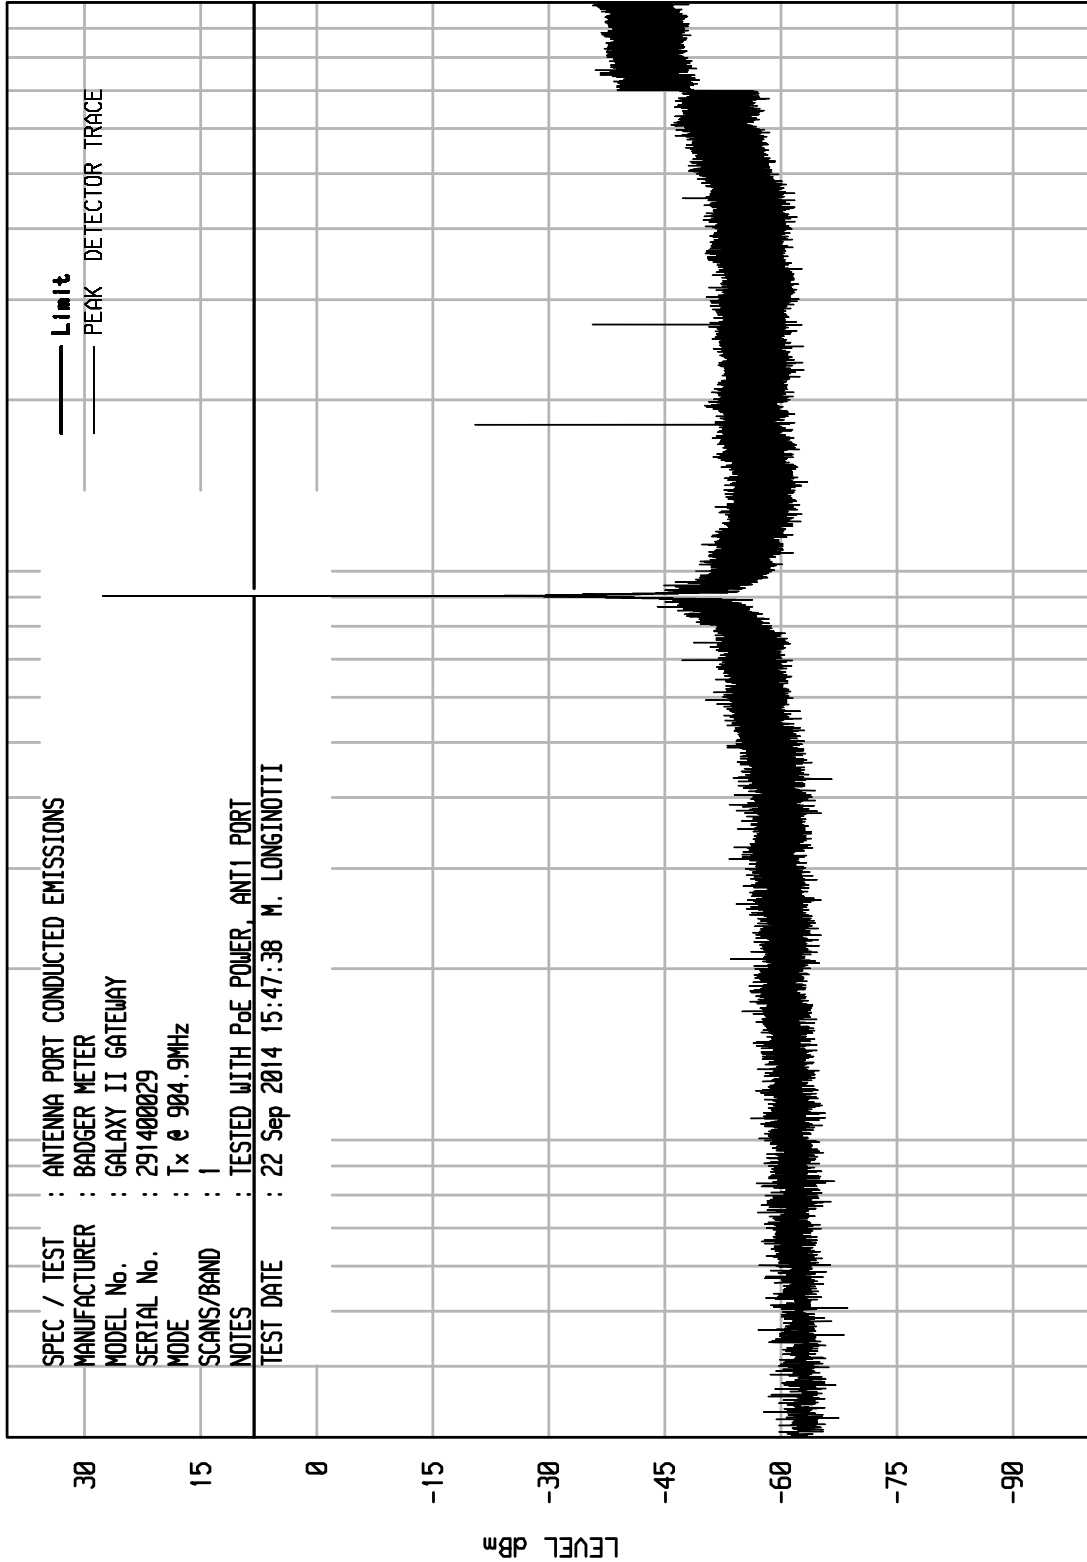

START = 30

100 1000

FREQUENCY MHz


STOP = 10000

ELITE ELECTRONIC ENGINEERING Inc.

Downers Grove, Ill. 60515

UNIV RCU EMI RUN 7

UKA1 04/24/13

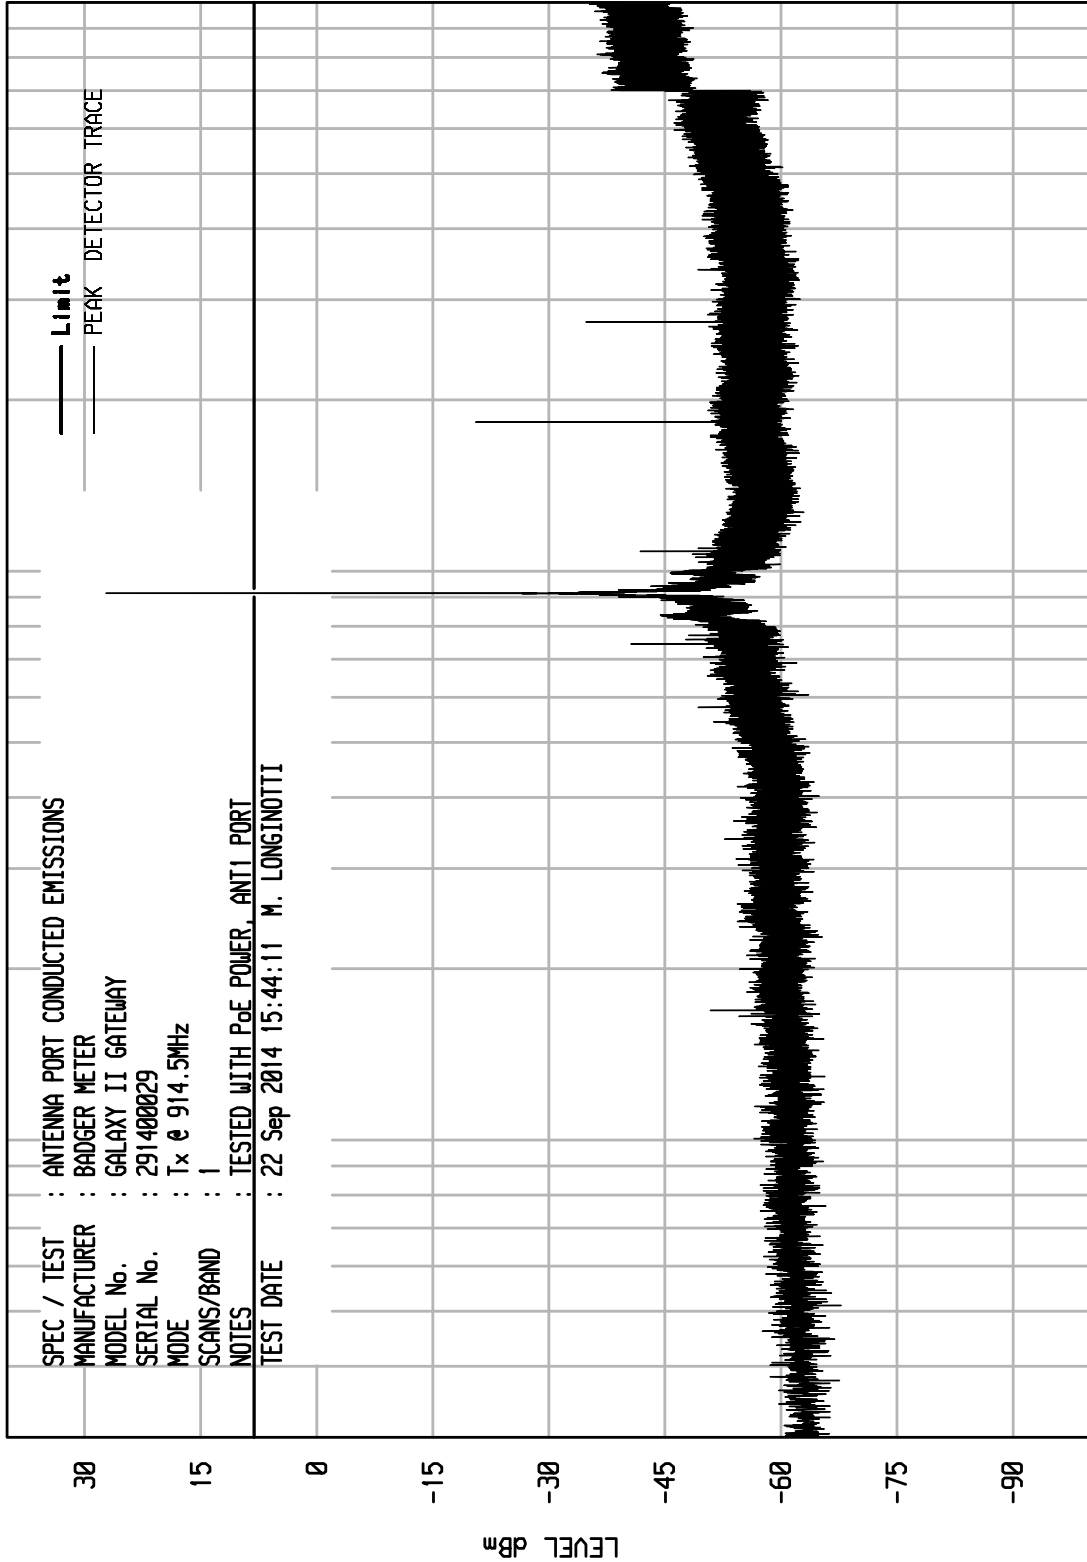

STOP = 10000

1000

100


START = 30

ELITE ELECTRONIC ENGINEERING Inc.

Downers Grove, Ill. 60515

UKA1 04/24/13

UNIV RCU EMI RUN 6

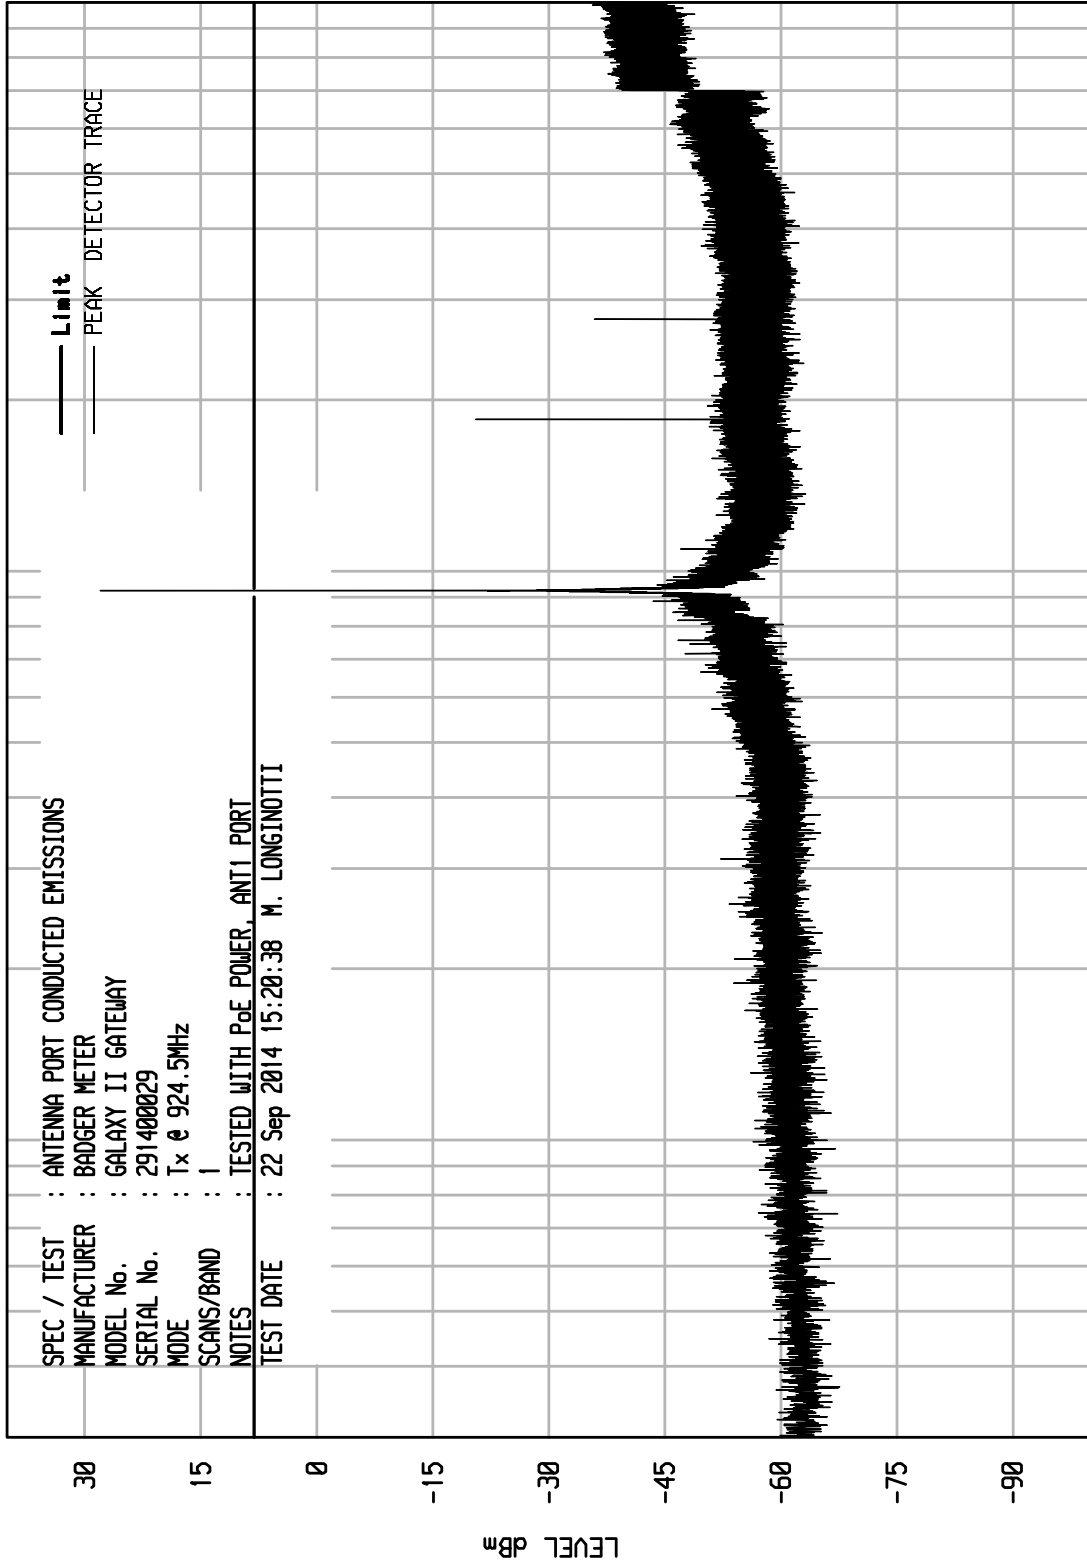

STOP = 10000

1000

100


START = 30

ELITE ELECTRONIC ENGINEERING Inc.

Downers Grove, Ill. 60515

UKA1 04/24/13

UNIT0 RCU ENI RUN 1

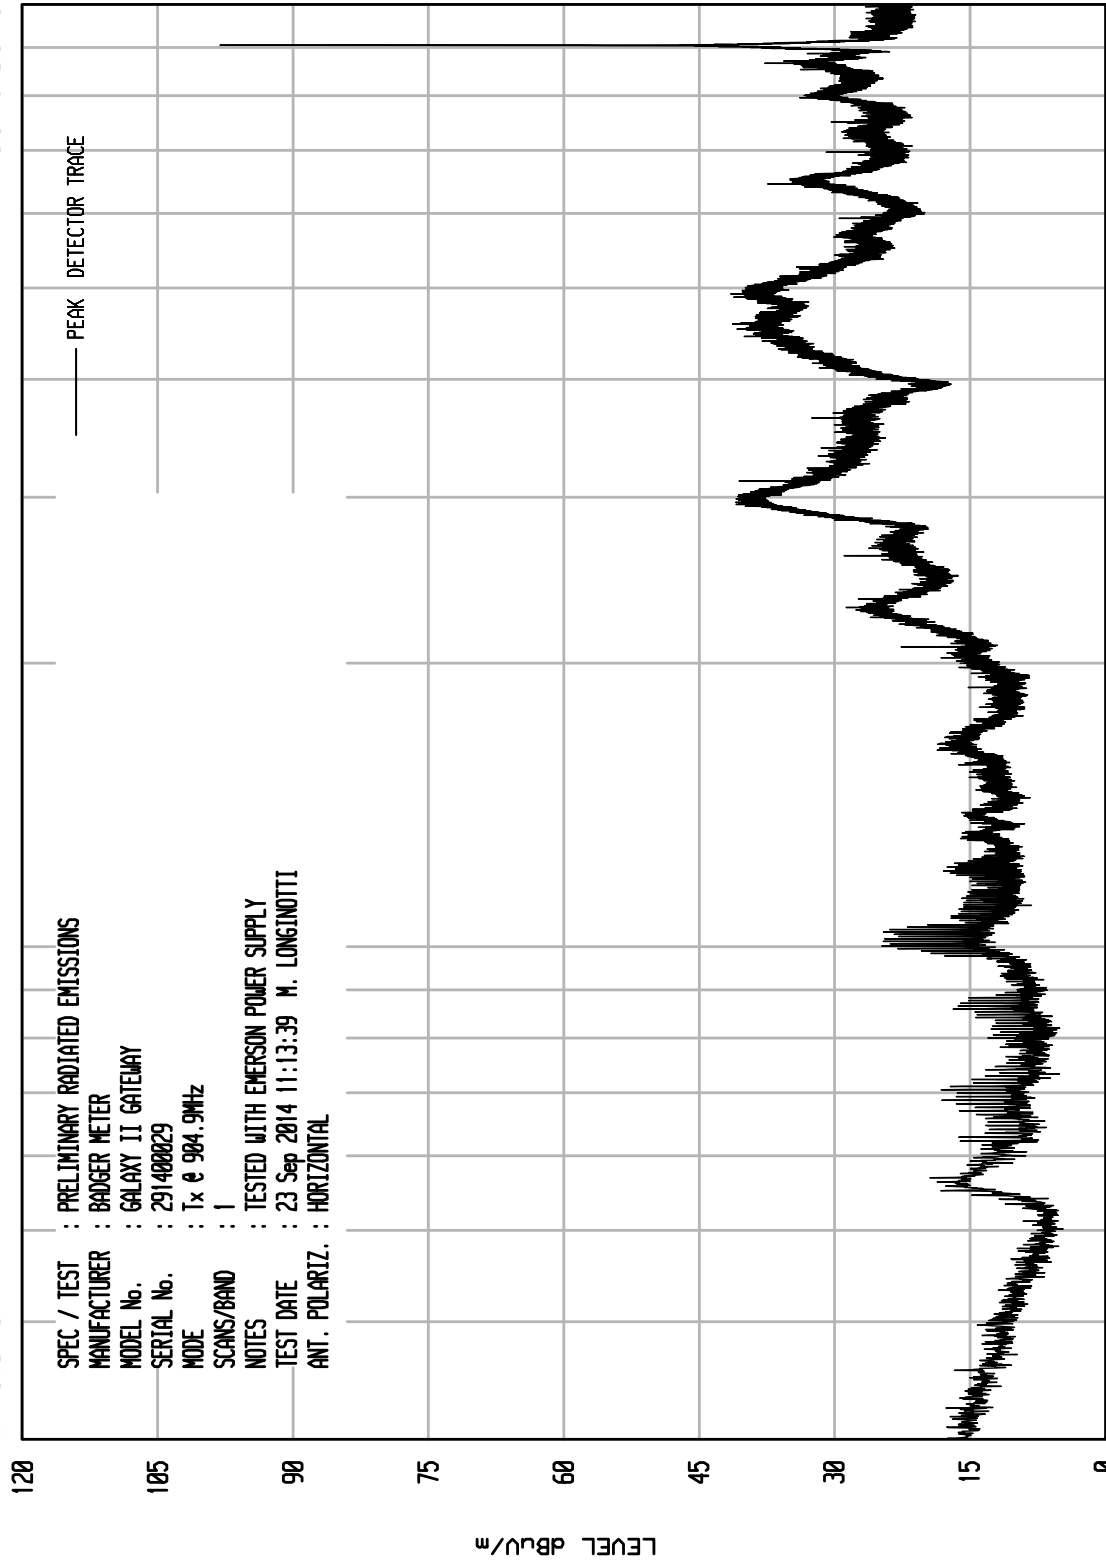

START = 30


FREQUENCY MHz

STOP = 1000

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIT: RCU ENI RUN 2


UKA1 04/24/13

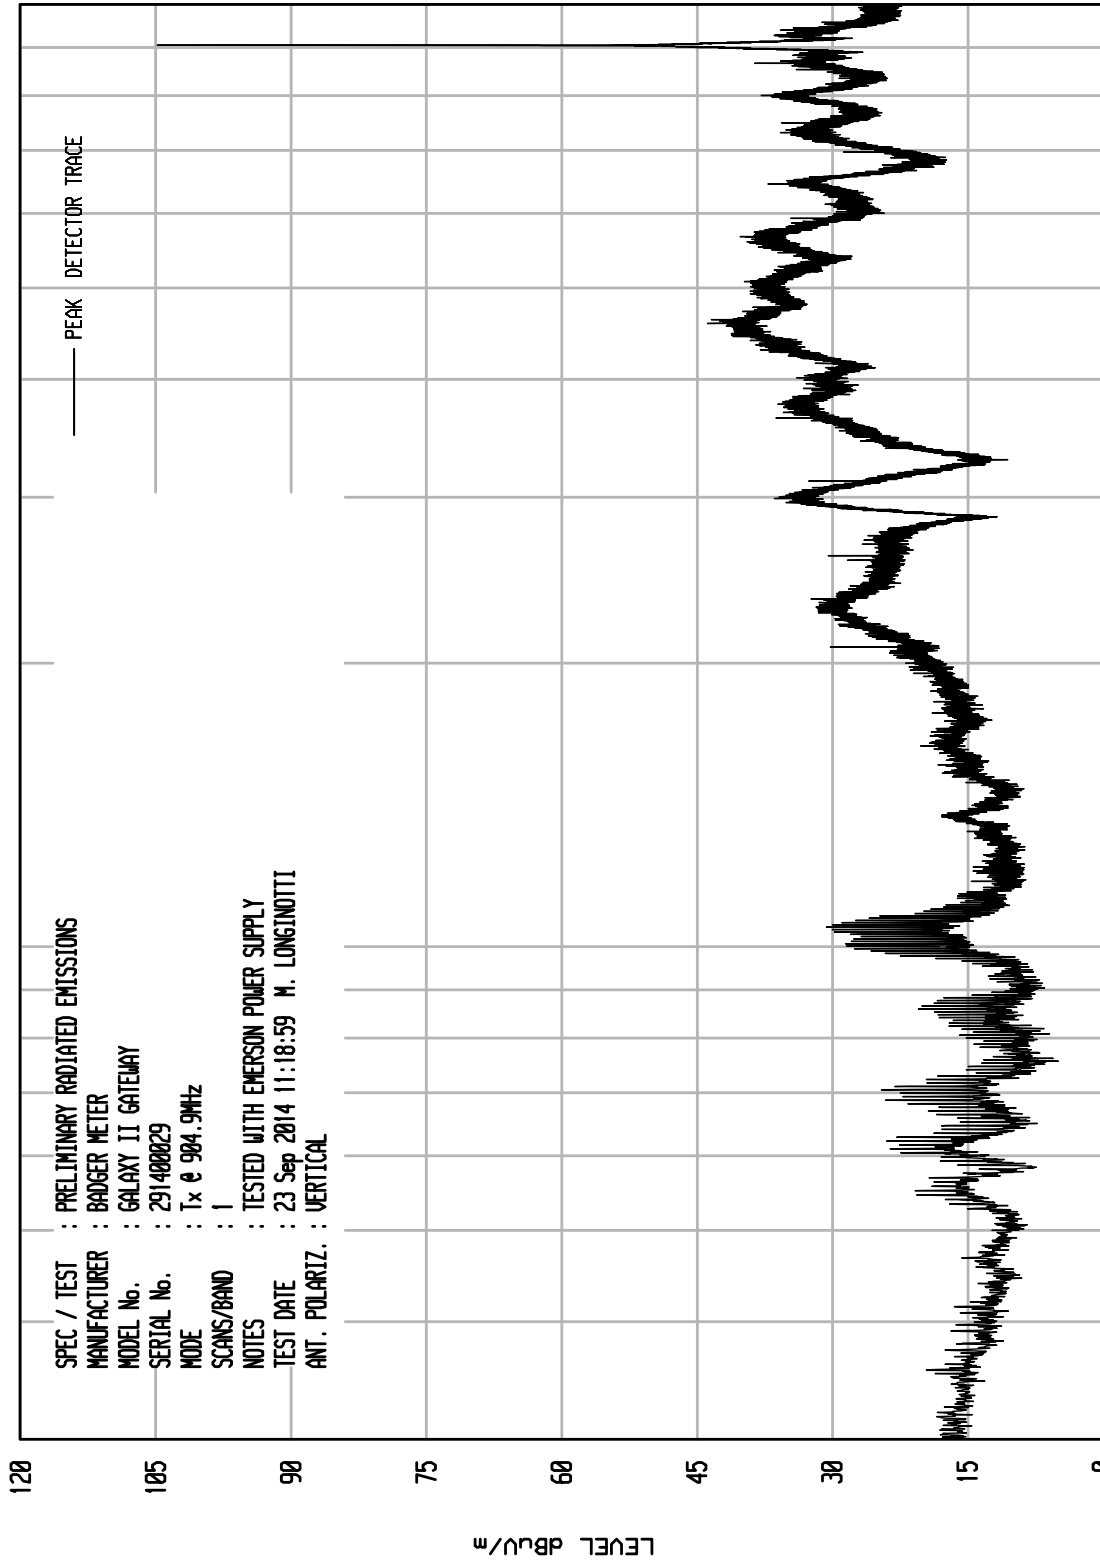

STOP = 1000

FREQUENCY MHz


START = 30

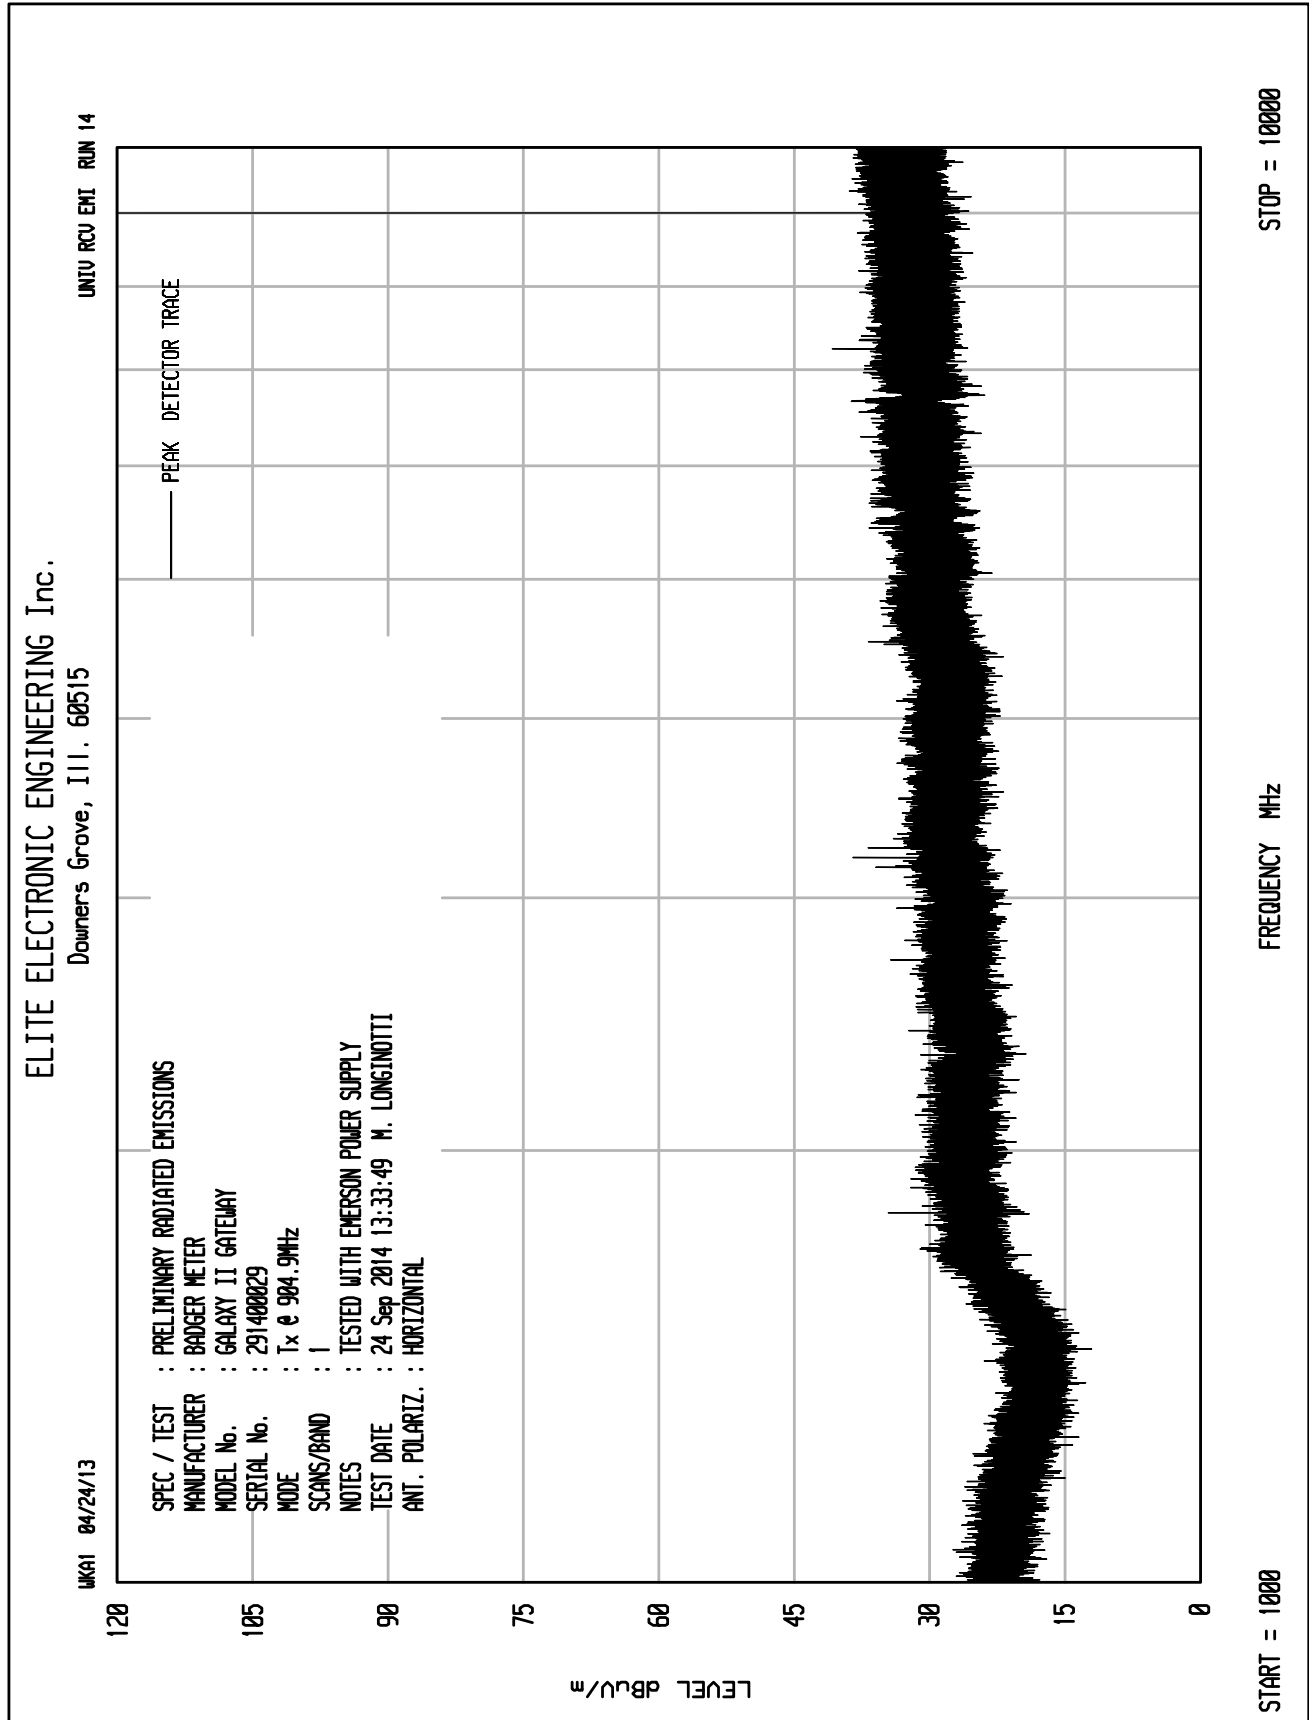

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13

UNITU RCU ENI RUN 15

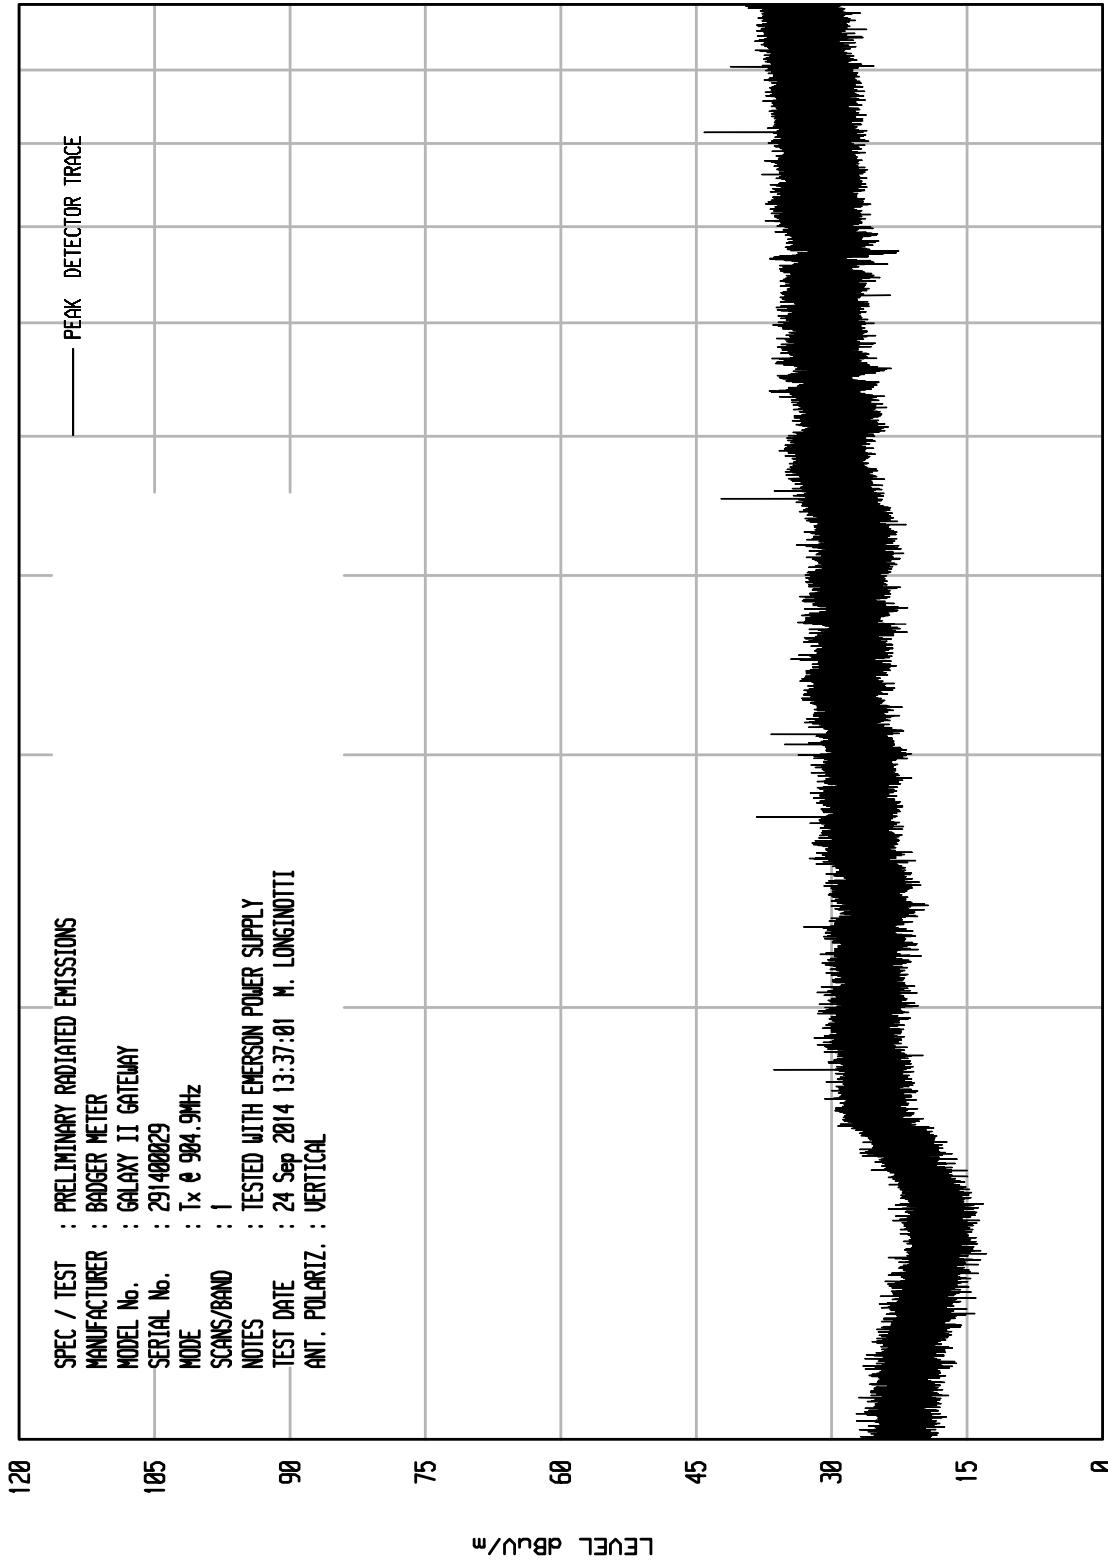

STOP = 10000


FREQUENCY MHz

START = 1000

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIT: RCU ENI RUN 4

UKA1 04/24/13

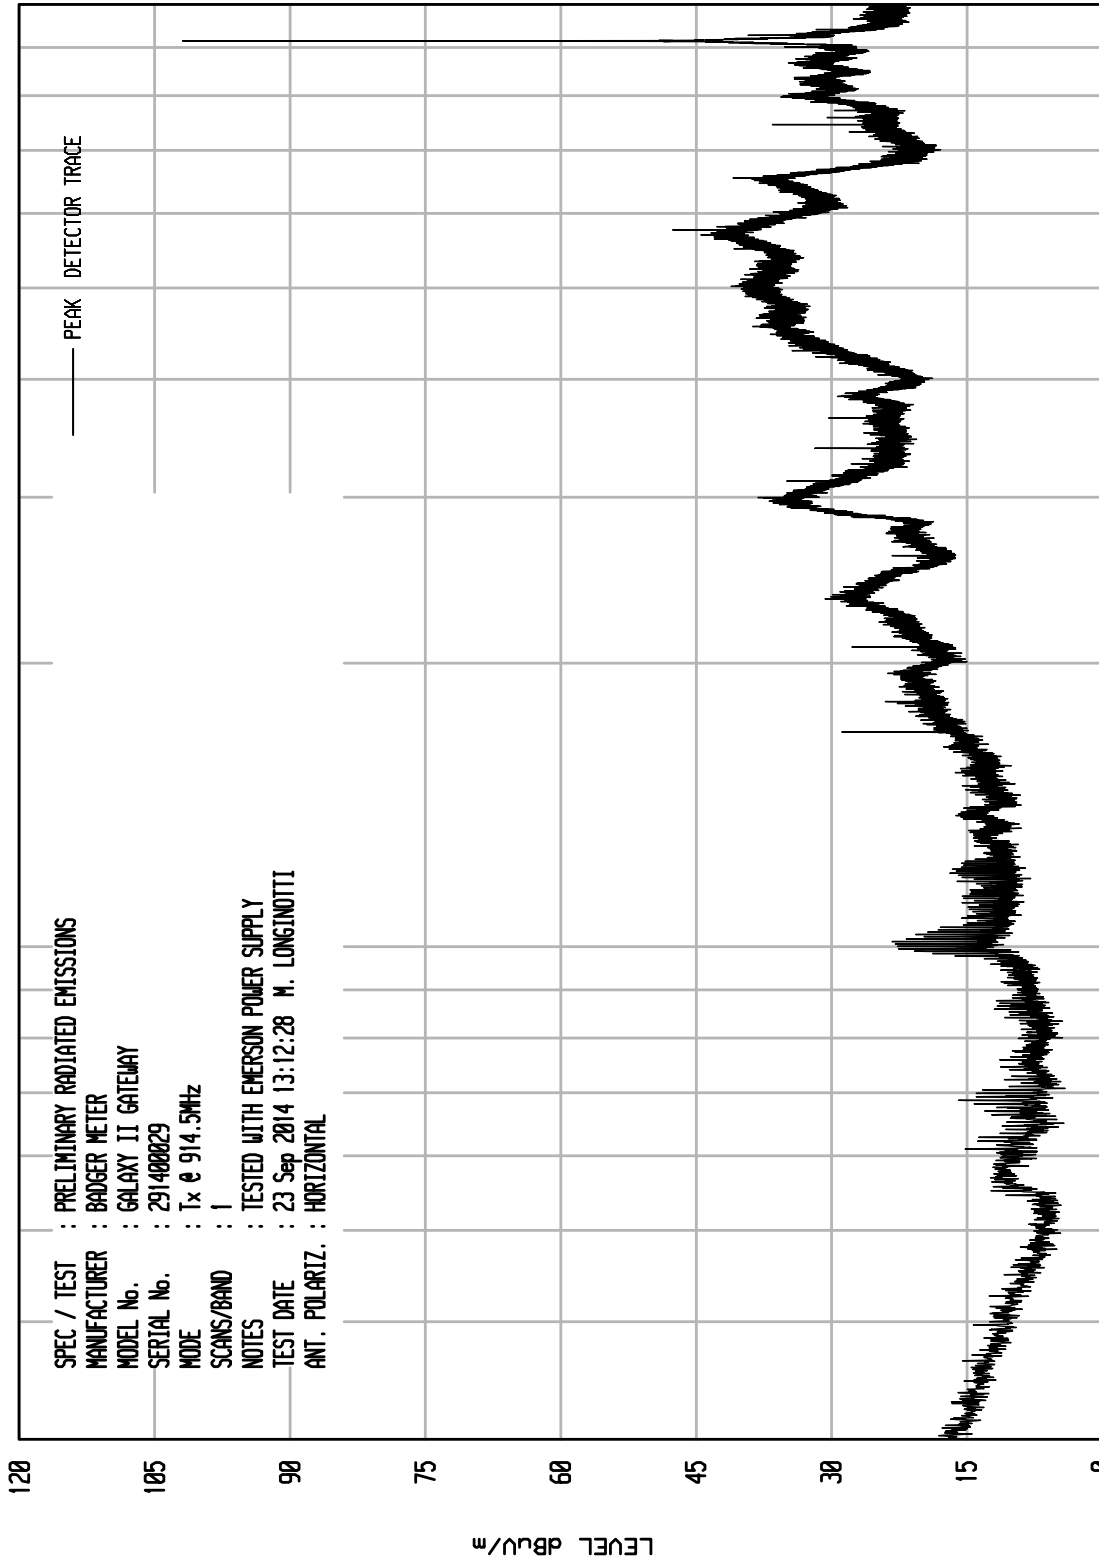


SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : BADGER METER
MODEL No. : GALAXY II GATEWAY
SERIAL No. : 291400029
MODE : Tx @ 914.5MHz
SCANS/BAND : 1
NOTES : TESTED WITH EMERSON POWER SUPPLY
TEST DATE : 23 Sep 2014 13:12:28 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIT: RCU ENI RUN 3

UKA1 04/24/13

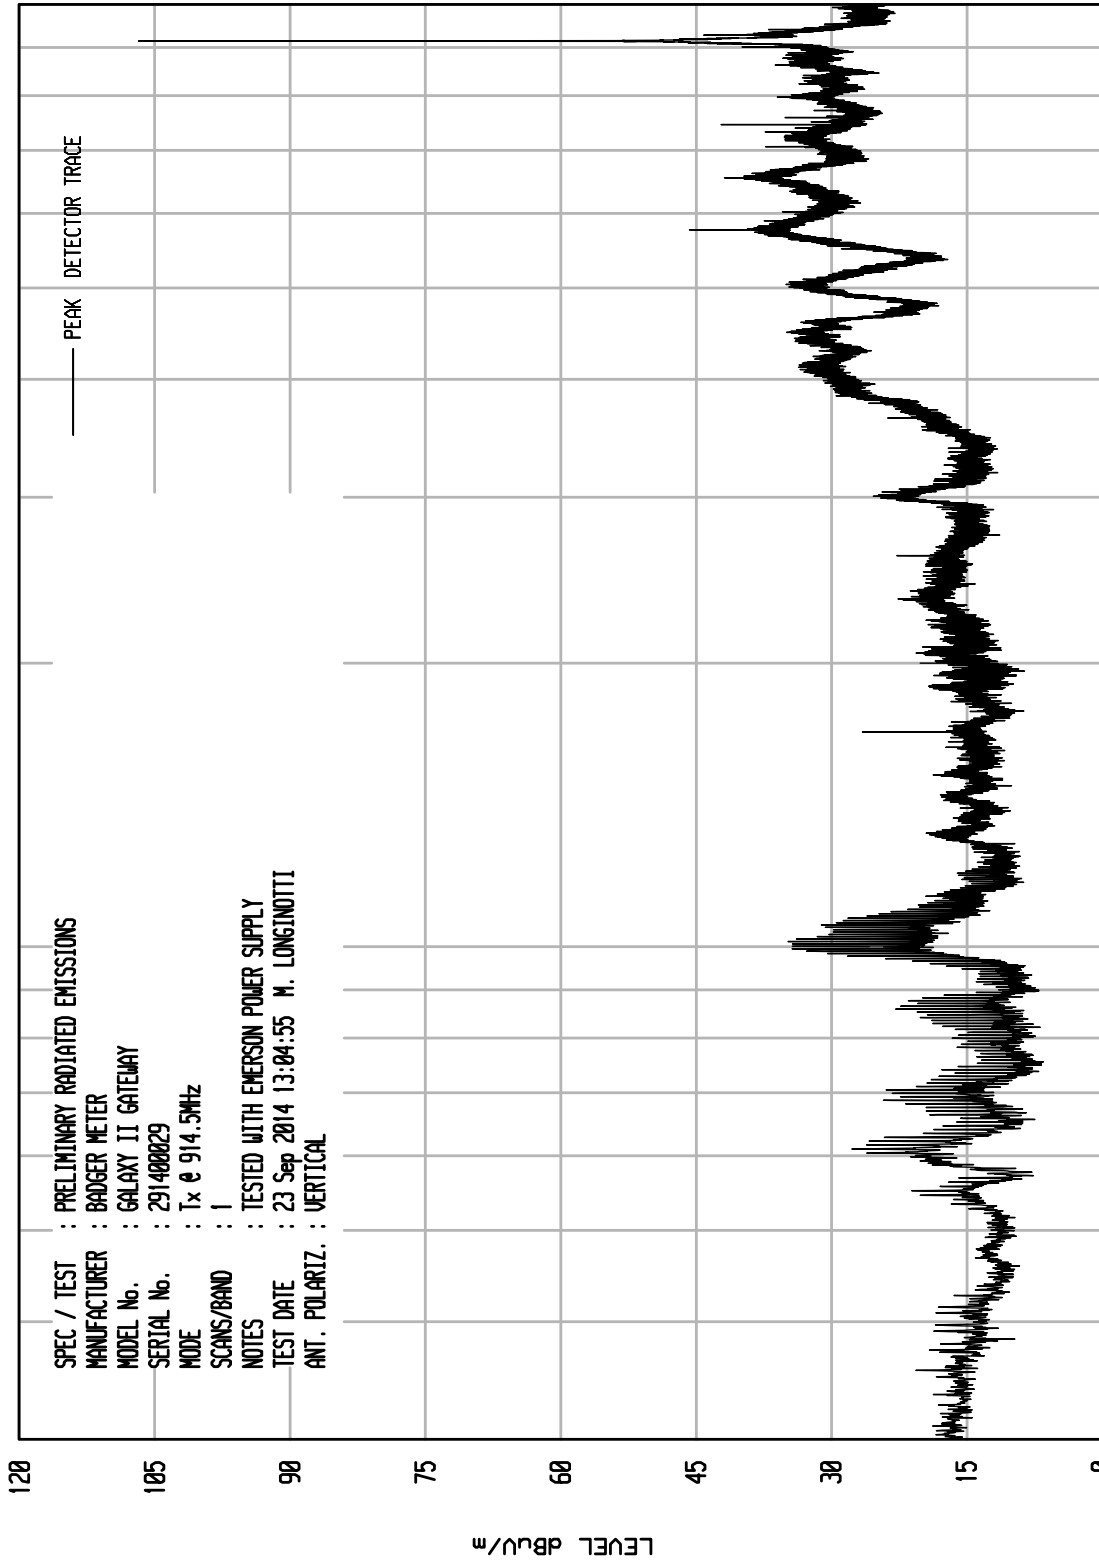


SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : BADGER METER
MODEL No. : GALAXY II GATEWAY
SERIAL No. : 291400029
MODE : Tx @ 914.5MHz
SCANS/BAND : 1
NOTES : TESTED WITH EMERSON POWER SUPPLY
TEST DATE : 23 Sep 2014 13:04:55 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13


UNITU RCU ENI RUN 17

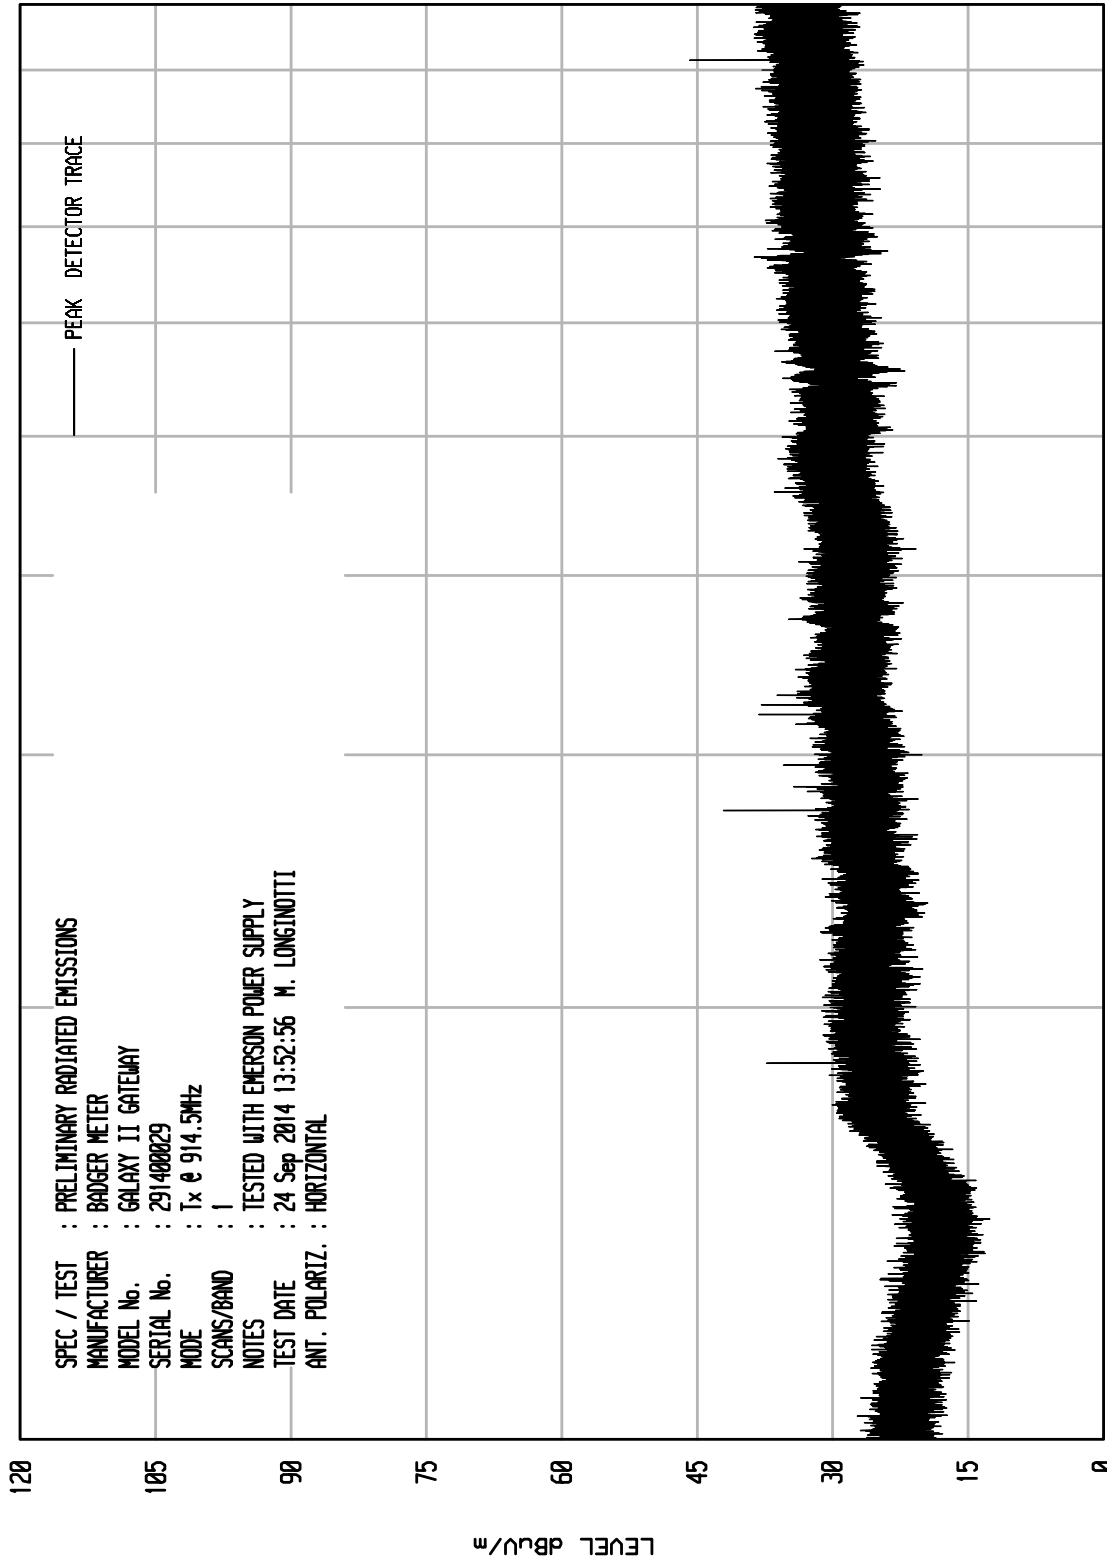

START = 1000

FREQUENCY MHz


STOP = 10000

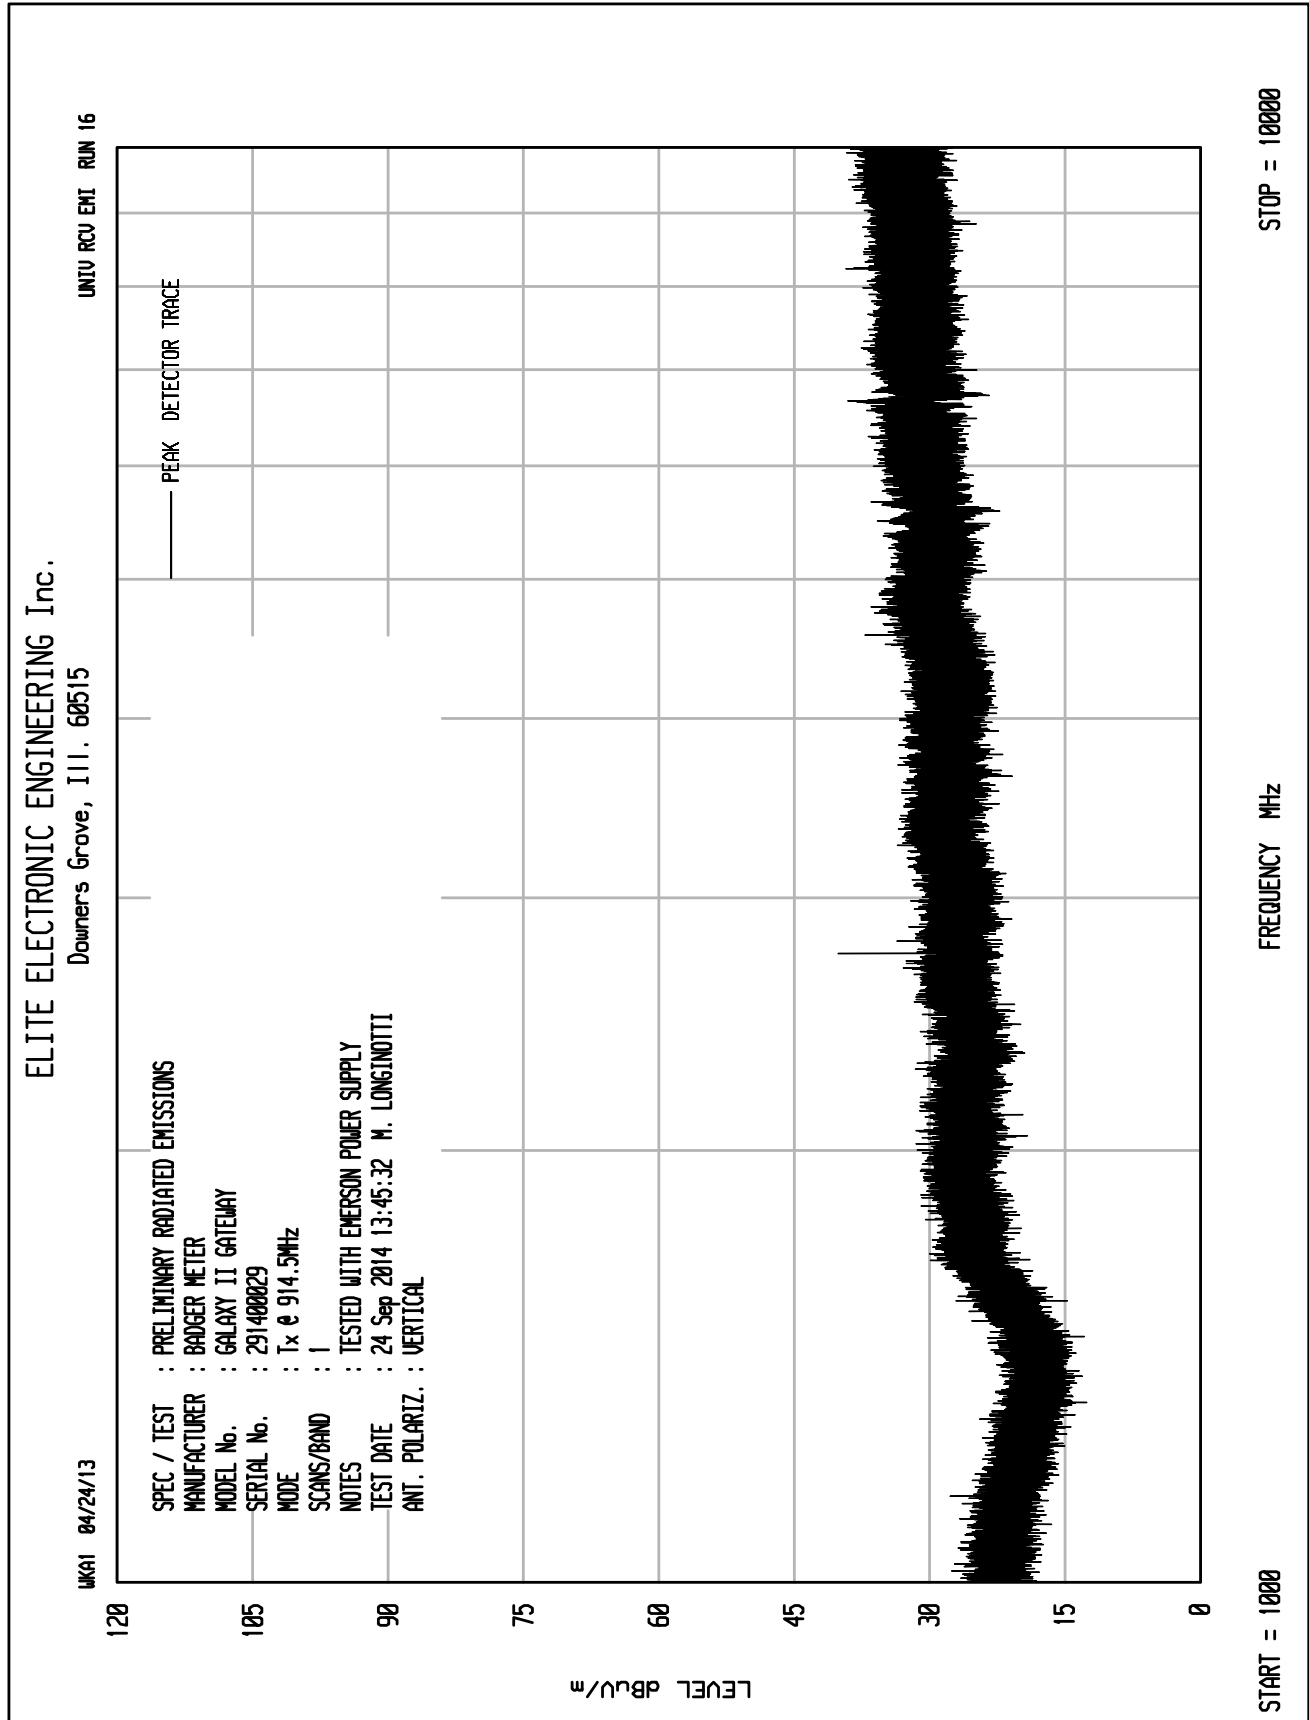

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13

UNIT0 RCU ENI RUN 5

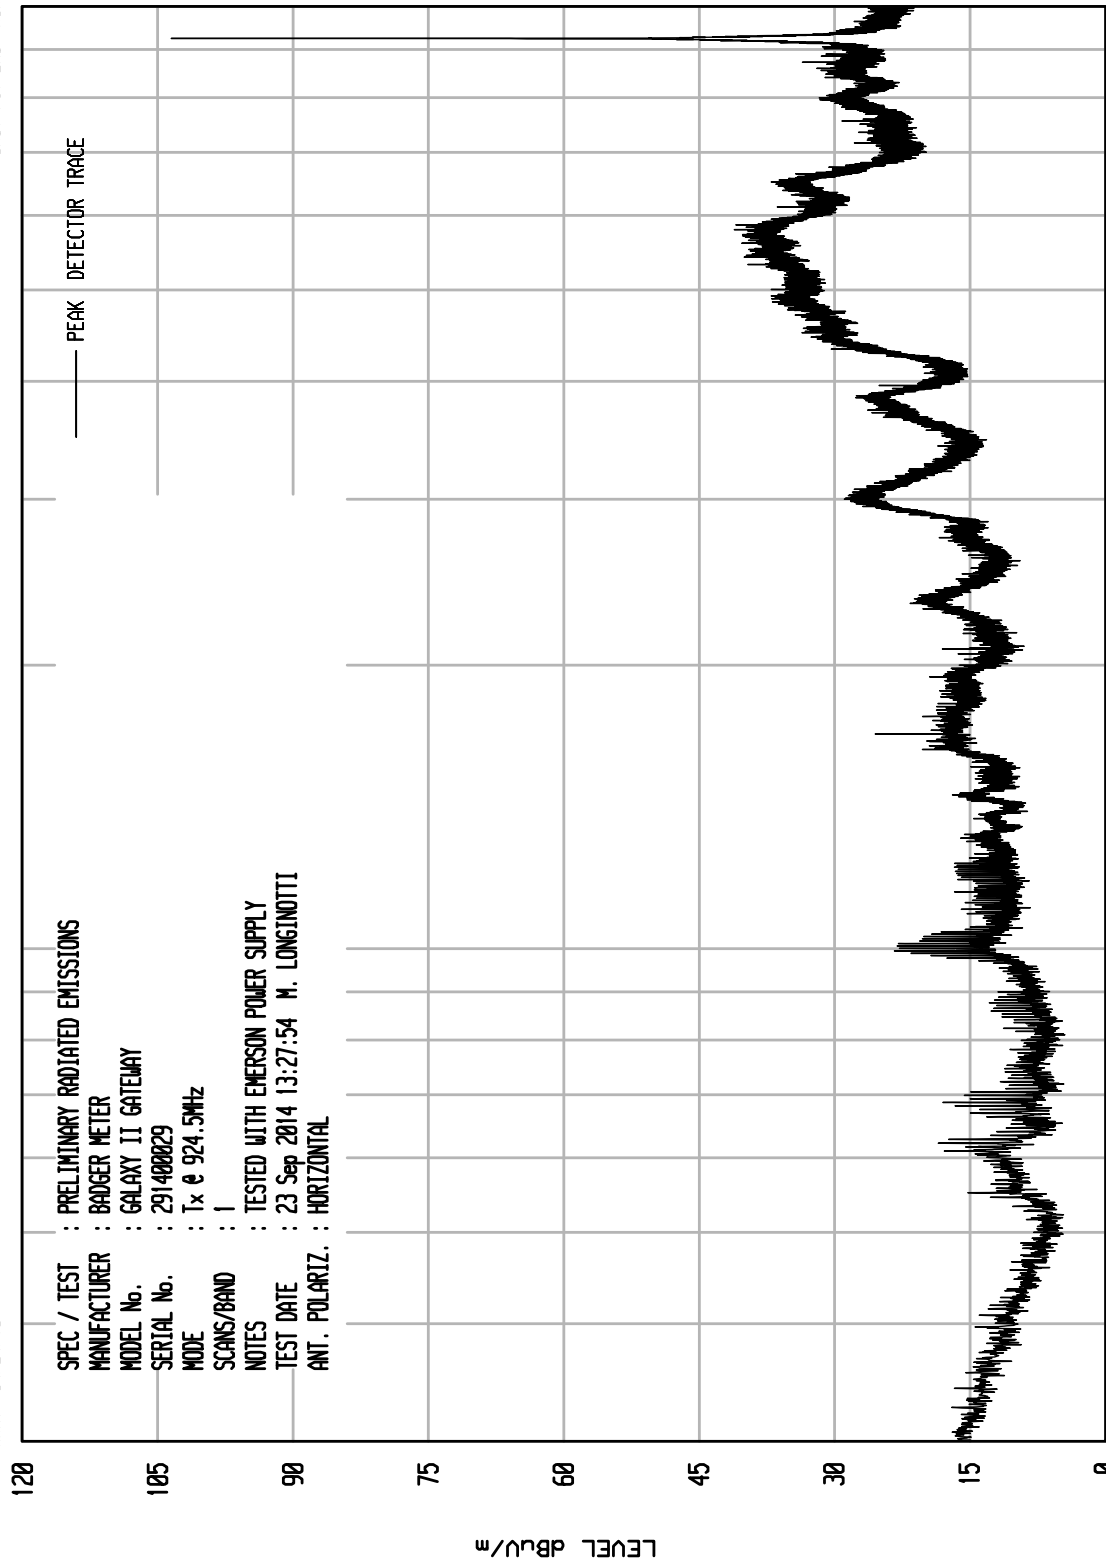

START = 30


FREQUENCY MHz

STOP = 1000

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIT: RCU ENI RUN 6

UKA1 04/24/13

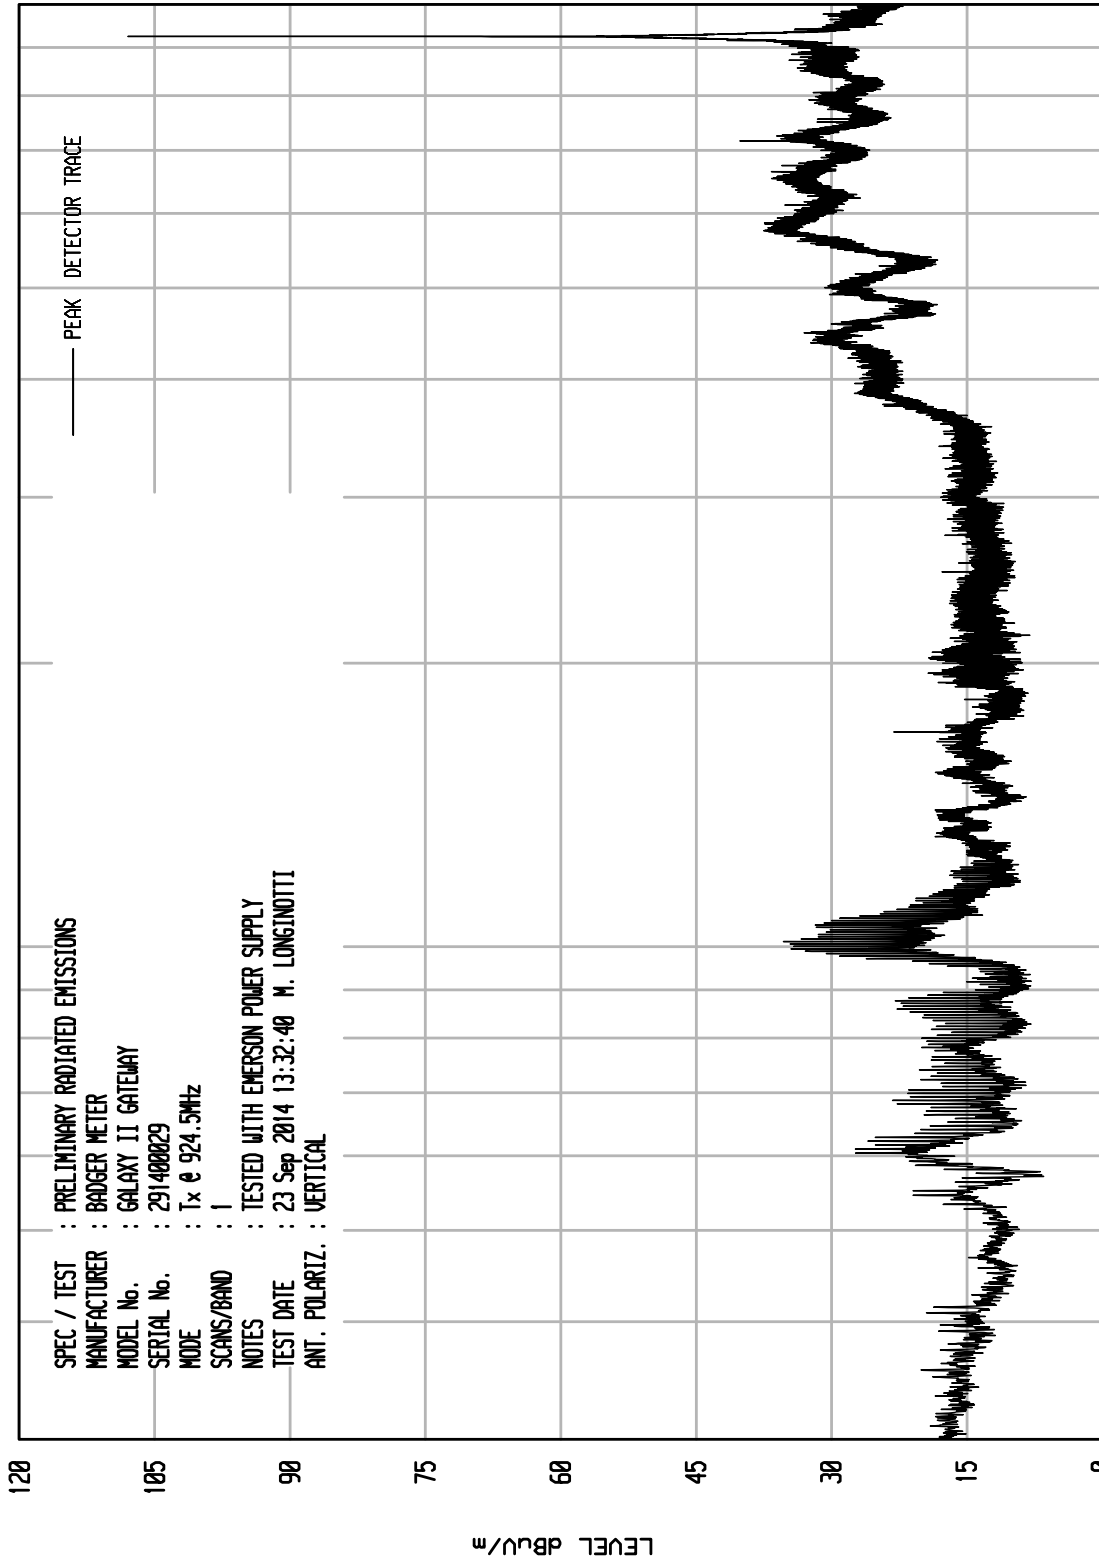

STOP = 1000


FREQUENCY MHz

START = 30

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13

UNITU RCU ENI RUN 18

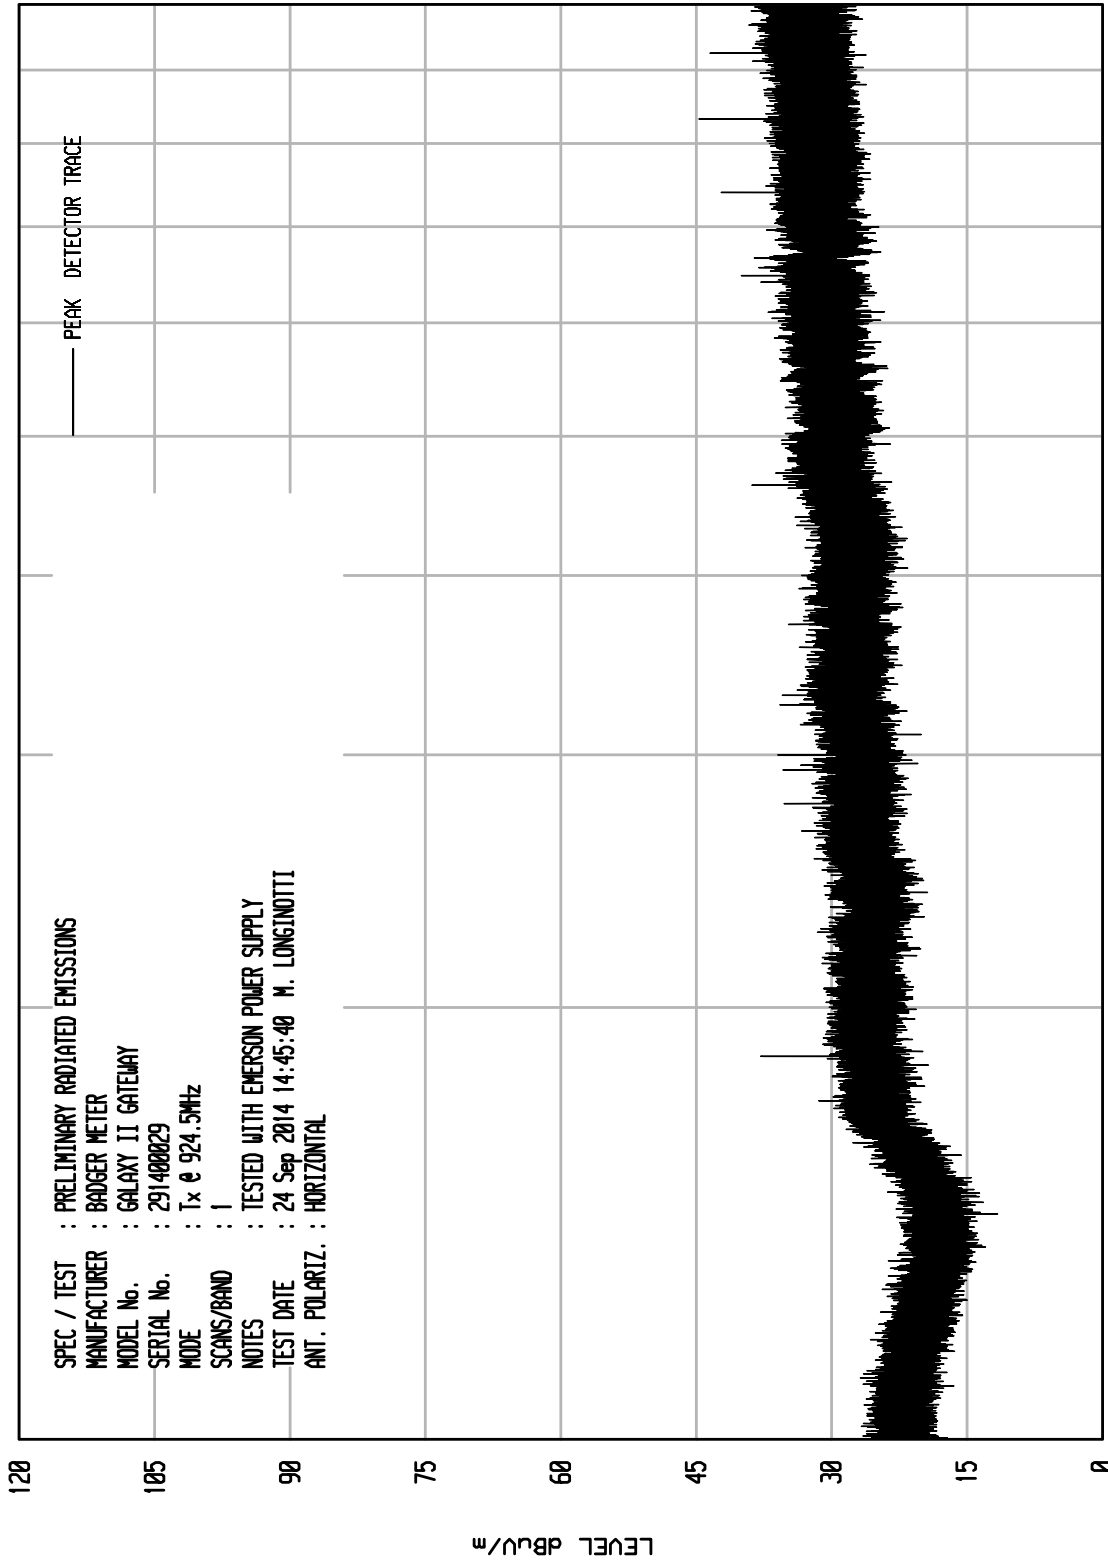

START = 1000


FREQUENCY MHz

STOP = 10000

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13

UNITU RCU ENI RUN 19

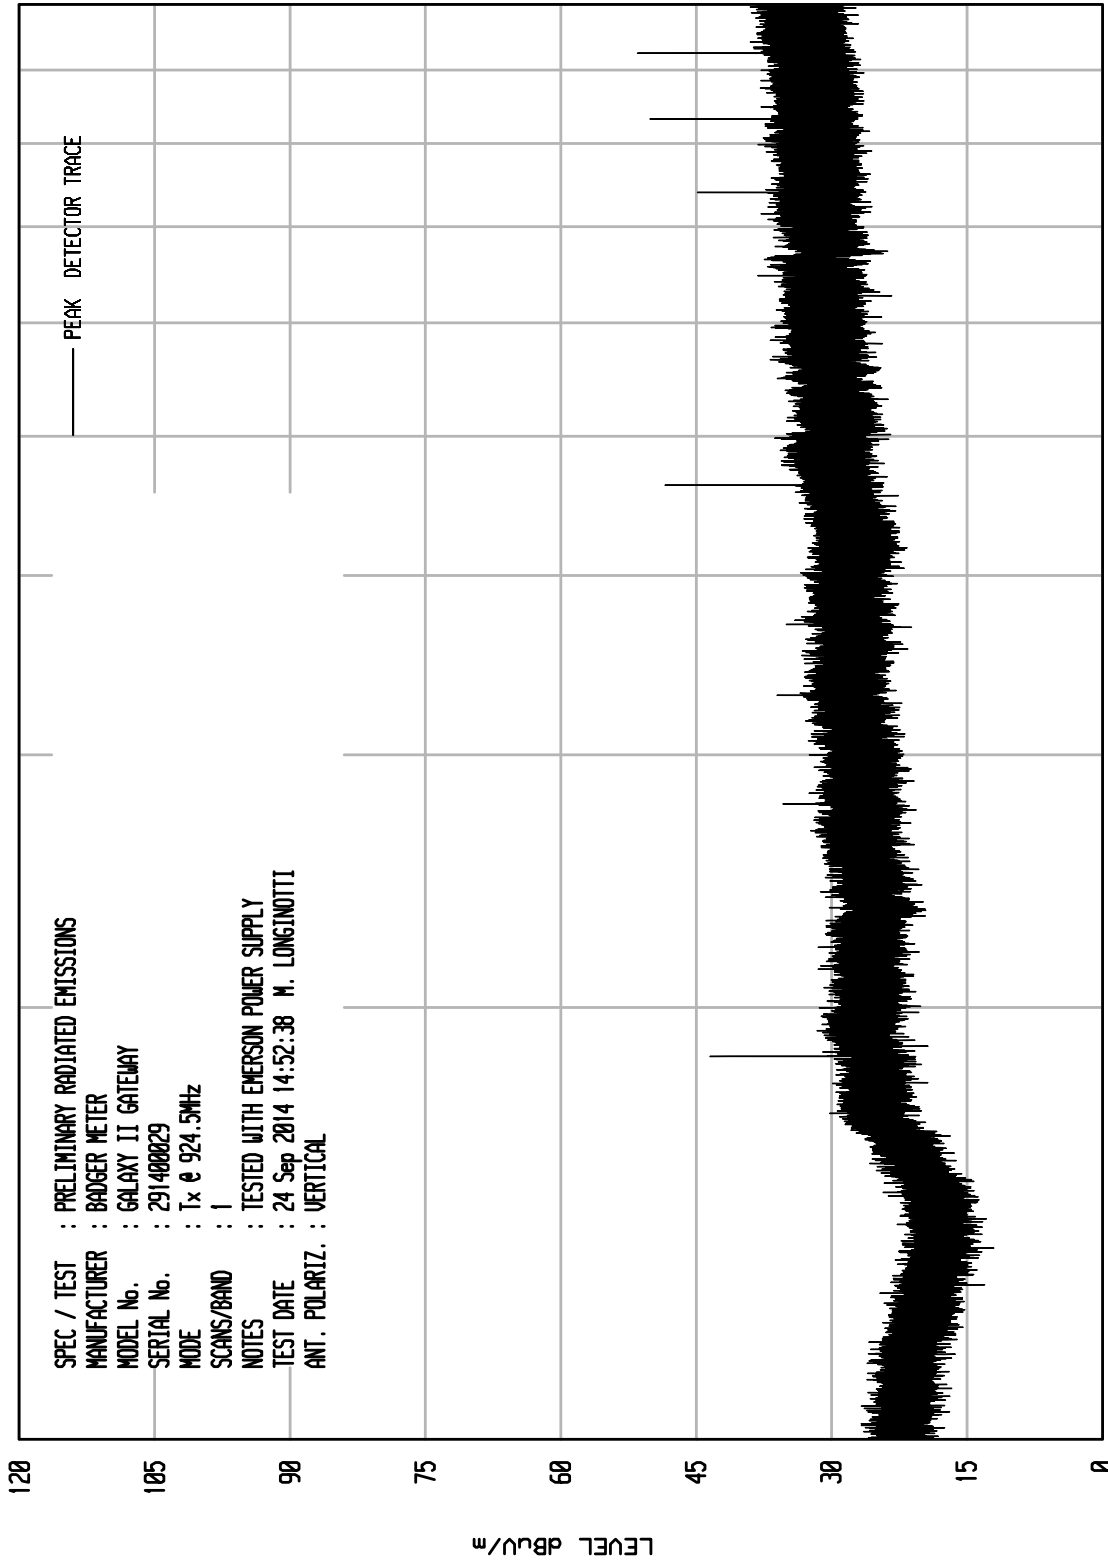

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : RADGER METER
MODEL No. : GALAXY II GATEWAY
SERIAL No. : 291400029
MODE : Tx @ 924.5MHz
SCANS/BAND : 1
NOTES : TESTED WITH EMERSON POWER SUPPLY
TEST DATE : 24 Sep 2014 14:52:38 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL

STOP = 10000

FREQUENCY MHz

START = 1000



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 904.9MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, Emerson Power Supply
NOTES : Quasi-Peak Readings in a 120kHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	QP Total dBuV/m at 3m	QP Total uV/m at 3 m	QP Limit uV/m at 3 m	Margin (dB)
73.47	H	2.8		0.4	6.6	0.0	9.9	3.1	100.0	-30.1
73.47	V	9.1		0.4	6.6	0.0	16.2	6.4	100.0	-23.8
74.04	H	3.1		0.5	6.6	0.0	10.2	3.2	100.0	-29.8
74.04	V	9.8		0.5	6.6	0.0	16.9	7.0	100.0	-23.1
74.60	H	1.2		0.5	6.7	0.0	8.3	2.6	100.0	-31.7
74.60	V	6.8		0.5	6.7	0.0	13.9	5.0	100.0	-26.1
108.41	H	12.1		0.5	11.8	0.0	24.4	16.6	150.0	-19.1
108.41	V	12.0		0.5	11.8	0.0	24.3	16.4	150.0	-19.2
260.00	H	17.7		0.8	13.4	0.0	31.9	39.5	200.0	-14.1
260.00	V	17.4		0.8	13.4	0.0	31.6	38.2	200.0	-14.4
409.68	H	16.5		1.0	16.0	0.0	33.5	47.5	200.0	-12.5
409.68	V	18.6		1.0	16.0	0.0	35.6	60.5	200.0	-10.4



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 904.9MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, Emerson Power Supply
NOTES : Peak Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2714.70	H	53.9		2.8	32.7	-39.5	49.9	312.4	5000.0	-24.1
2714.70	V	56.2		2.8	32.7	-39.5	52.2	407.2	5000.0	-21.8
3619.60	H	49.2	Ambient	3.2	33.5	-38.9	47.0	225.0	5000.0	-26.9
3619.60	V	50.5		3.2	33.5	-38.9	48.3	261.3	5000.0	-25.6
4524.50	H	52.0		3.6	34.5	-38.9	51.2	363.8	5000.0	-22.8
4524.50	V	53.6		3.6	34.5	-38.9	52.8	437.4	5000.0	-21.2
5429.40	H	48.1	Ambient	3.9	34.9	-39.0	47.9	248.2	5000.0	-26.1
5429.40	V	47.8	Ambient	3.9	34.9	-39.0	47.6	239.7	5000.0	-26.4
8144.10	H	50.5	Ambient	4.9	35.9	-39.0	52.4	415.5	5000.0	-21.6
8144.10	V	53.5		4.9	35.9	-39.0	55.4	586.9	5000.0	-18.6
9049.00	H	47.8	Ambient	5.0	36.2	-38.9	50.1	318.4	5000.0	-23.9
9049.00	V	49.4	Ambient	5.0	36.2	-38.9	51.7	382.8	5000.0	-22.3



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 904.9MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, Emerson Power Supply
NOTES : Average Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2714.70	H	48.00		2.8	32.7	-39.5	-8.1	35.9	62.1	500.0	-18.1
2714.70	V	51.7		2.8	32.7	-39.5	-8.1	39.6	95.0	500.0	-14.4
3619.60	H	38.7	Ambient	3.2	33.5	-38.9	-8.1	28.4	26.3	500.0	-25.6
3619.60	V	42.4		3.2	33.5	-38.9	-8.1	32.1	40.3	500.0	-21.9
4524.50	H	44.2		3.6	34.5	-38.9	-8.1	35.3	58.1	500.0	-18.7
4524.50	V	46.7		3.6	34.5	-38.9	-8.1	37.8	77.4	500.0	-16.2
5429.40	H	37.8	Ambient	3.9	34.9	-39.0	-8.1	29.5	29.7	500.0	-24.5
5429.40	V	36.8	Ambient	3.9	34.9	-39.0	-8.1	28.5	26.5	500.0	-25.5
8144.10	H	40.4	Ambient	4.9	35.9	-39.0	-8.1	34.1	50.9	500.0	-19.8
8144.10	V	45.2		4.9	35.9	-39.0	-8.1	38.9	88.4	500.0	-15.0
9049.00	H	36.7	Ambient	5.0	36.2	-38.9	-8.1	30.8	34.7	500.0	-23.2
9049.00	V	38.7	Ambient	5.0	36.2	-38.9	-8.1	32.8	43.7	500.0	-21.2



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 914.5MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, Emerson Power Supply
NOTES : Peak Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2743.50	H	51.5		2.8	32.8	-39.5	47.6	239.5	5000.0	-26.4
2743.50	V	51.7		2.8	32.8	-39.5	47.8	245.1	5000.0	-26.2
3658.00	H	47.2	Ambient	3.3	33.5	-38.9	45.1	179.9	5000.0	-28.9
3658.00	V	50.2		3.3	33.5	-38.9	48.1	254.1	5000.0	-25.9
4572.50	H	51.4		3.6	34.5	-38.9	50.6	339.8	5000.0	-23.4
4572.50	V	53.7		3.6	34.5	-38.9	52.9	442.8	5000.0	-21.1
7316.00	H	49.4		4.7	35.6	-39.0	50.7	343.5	5000.0	-23.3
7316.00	V	48.4	Ambient	4.7	35.6	-39.0	49.7	306.1	5000.0	-24.3
8230.50	H	48.8	Ambient	4.9	35.9	-39.0	50.7	343.3	5000.0	-23.3
8230.50	V	54.3		4.9	35.9	-39.0	56.2	646.8	5000.0	-17.8
9145.00	H	52.4		5.0	36.2	-38.9	54.7	543.4	5000.0	-19.3
9145.00	V	55.6		5.0	36.2	-38.9	57.9	785.5	5000.0	-16.1



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 914.5MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, Emerson Power Supply
NOTES : Average Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2743.50	H	45.00		2.8	32.8	-39.5	-8.1	32.9	44.4	500.0	-21.0
2743.50	V	44.1		2.8	32.8	-39.5	-8.1	32.0	40.0	500.0	-21.9
3658.00	H	36.2	Ambient	3.3	33.5	-38.9	-8.1	26.0	19.9	500.0	-28.0
3658.00	V	41.7		3.3	33.5	-38.9	-8.1	31.5	37.4	500.0	-22.5
4572.50	H	43.6		3.6	34.5	-38.9	-8.1	34.7	54.2	500.0	-19.3
4572.50	V	46.5		3.6	34.5	-38.9	-8.1	37.6	75.7	500.0	-16.4
7316.00	H	37.8		4.7	35.6	-39.0	-8.1	31.0	35.4	500.0	-23.0
7316.00	V	37.4	Ambient	4.7	35.6	-39.0	-8.1	30.6	33.8	500.0	-23.4
8230.50	H	37.8	Ambient	4.9	35.9	-39.0	-8.1	31.6	37.9	500.0	-22.4
8230.50	V	47.1		4.9	35.9	-39.0	-8.1	40.9	110.6	500.0	-13.1
9145.00	H	43.8		5.0	36.2	-38.9	-8.1	38.0	79.1	500.0	-16.0
9145.00	V	48.4		5.0	36.2	-38.9	-8.1	42.6	134.3	500.0	-11.4



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 924.5MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, Emerson Power Supply
NOTES : Peak Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2773.50	H	51.9		2.8	32.8	-39.5	48.1	253.5	5000.0	-25.9
2773.50	V	54.2		2.8	32.8	-39.5	50.4	330.3	5000.0	-23.6
3698.00	H	48.9	Ambient	3.3	33.5	-38.9	46.9	220.2	5000.0	-27.1
3698.00	V	48.6	Ambient	3.3	33.5	-38.9	46.6	212.7	5000.0	-27.4
4622.50	H	51.9		3.6	34.6	-38.9	51.2	362.1	5000.0	-22.8
4622.50	V	54.7		3.6	34.6	-38.9	54.0	499.9	5000.0	-20.0
7396.00	H	52.3		4.7	35.7	-39.0	53.7	482.2	5000.0	-20.3
7396.00	V	52.4		4.7	35.7	-39.0	53.8	487.8	5000.0	-20.2
8320.50	H	53.3		4.9	35.9	-39.0	55.2	574.7	5000.0	-18.8
8320.50	V	60.1		4.9	35.9	-39.0	62.0	1257.2	5000.0	-12.0




MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 924.5MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, Emerson Power Supply
NOTES : Average Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2773.50	H	44.30		2.8	32.8	-39.5	-8.1	32.3	41.4	500.0	-21.6
2773.50	V	49.0		2.8	32.8	-39.5	-8.1	37.0	71.1	500.0	-16.9
3698.00	H	38.2	Ambient	3.3	33.5	-38.9	-8.1	28.0	25.2	500.0	-26.0
3698.00	V	38.2	Ambient	3.3	33.5	-38.9	-8.1	28.0	25.2	500.0	-26.0
4622.50	H	44.4		3.6	34.6	-38.9	-8.1	35.5	59.8	500.0	-18.4
4622.50	V	49.6		3.6	34.6	-38.9	-8.1	40.7	108.9	500.0	-13.2
7396.00	H	44.1		4.7	35.7	-39.0	-8.1	37.3	73.5	500.0	-16.7
7396.00	V	43.9		4.7	35.7	-39.0	-8.1	37.1	71.8	500.0	-16.9
8320.50	H	45.7		4.9	35.9	-39.0	-8.1	39.4	93.8	500.0	-14.5
8320.50	V	54.4		4.9	35.9	-39.0	-8.1	48.1	255.5	500.0	-5.8

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIT: RCU ENI RUN 8


UKA1 04/24/13

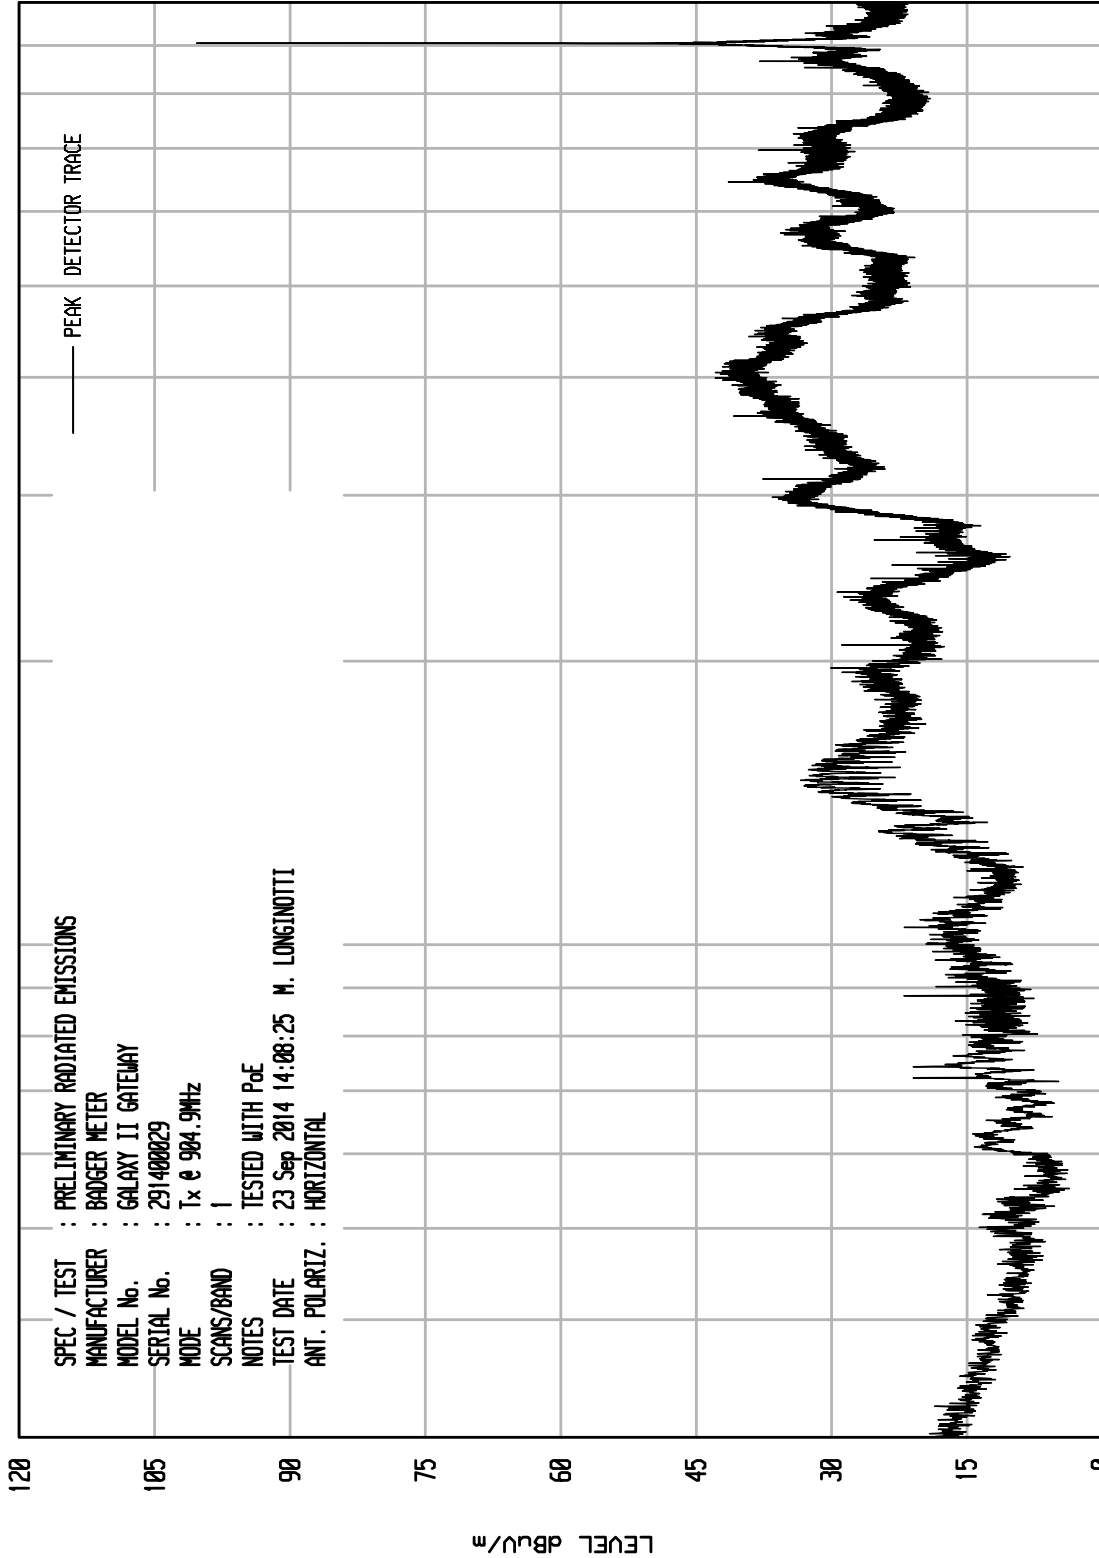

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNITU RCU ENI RUN 7

UKA1 04/24/13

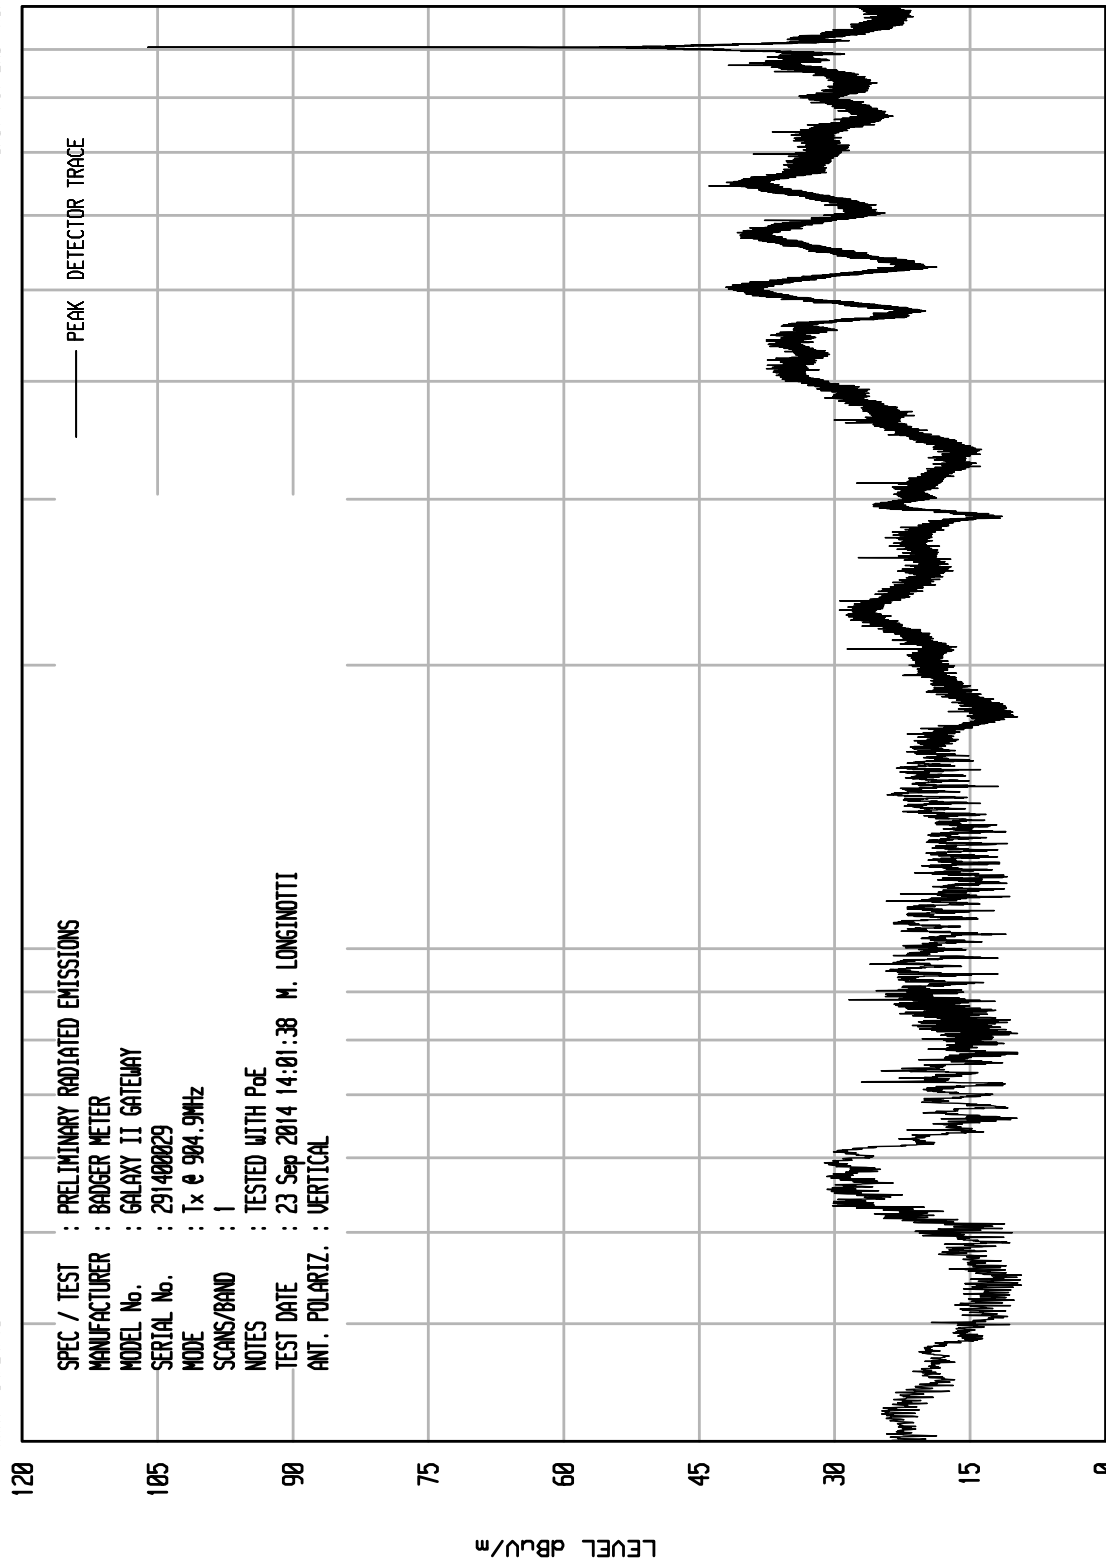

STOP = 1000


FREQUENCY MHz

START = 30

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13


UNITU RCU ENI RUN 25

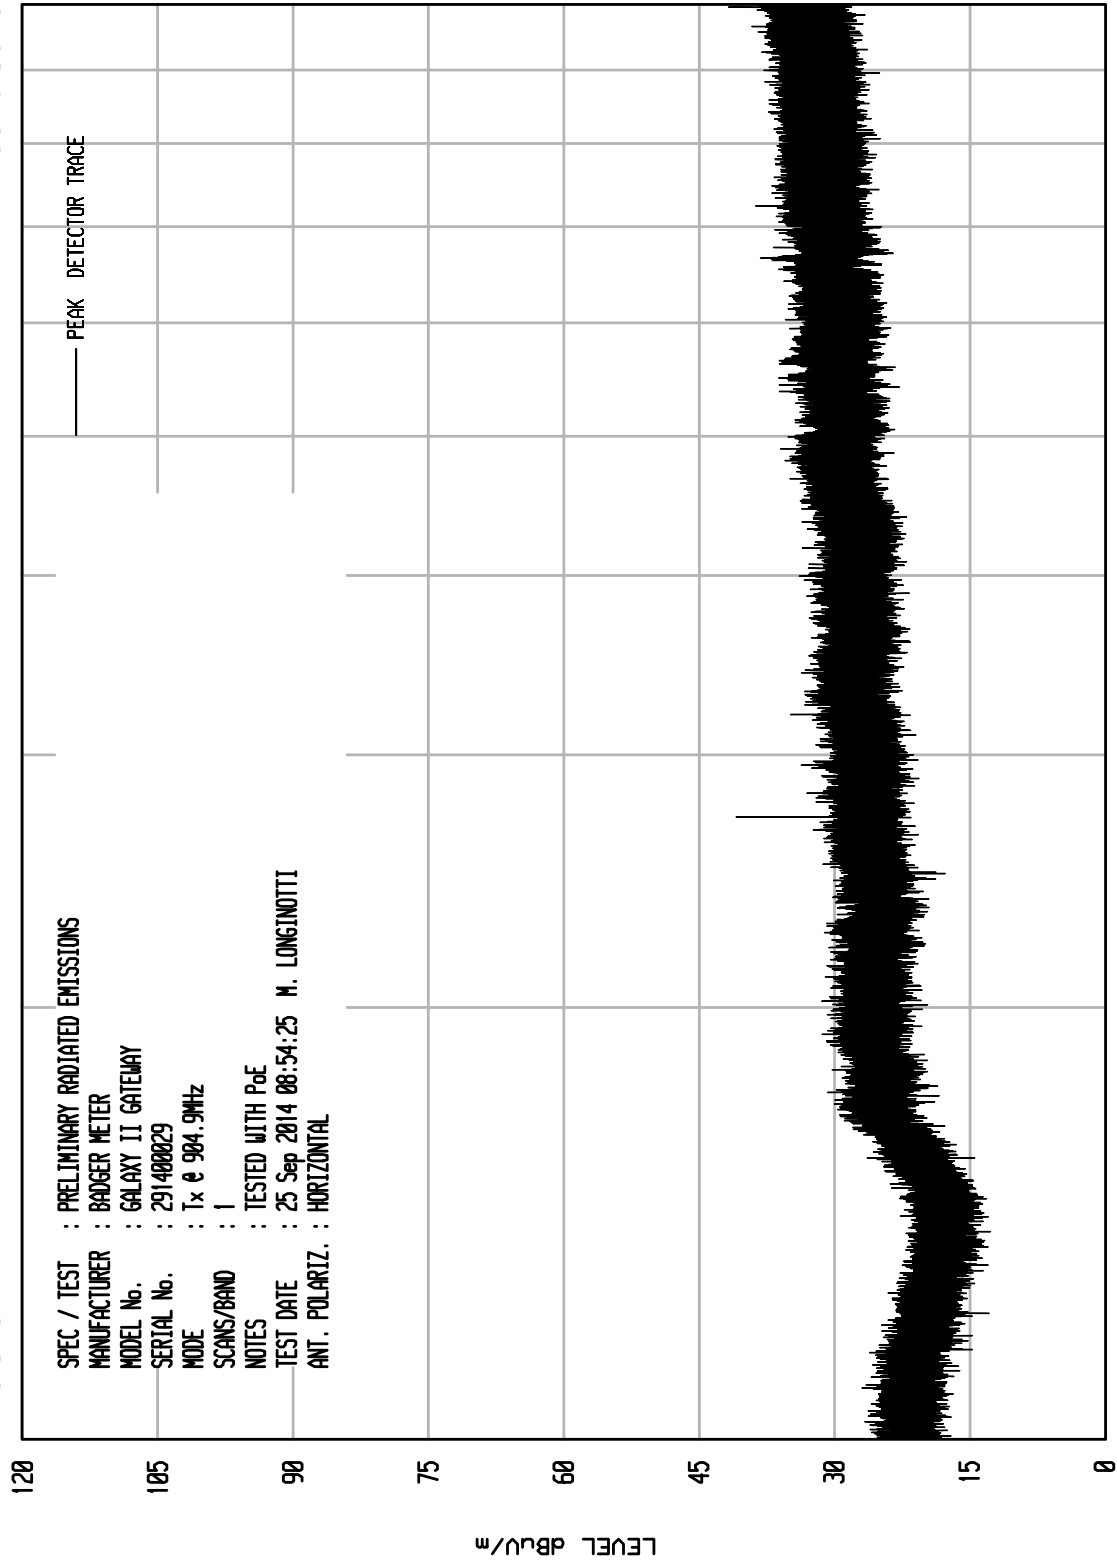

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13

UNITU RCU ENI RUN 26

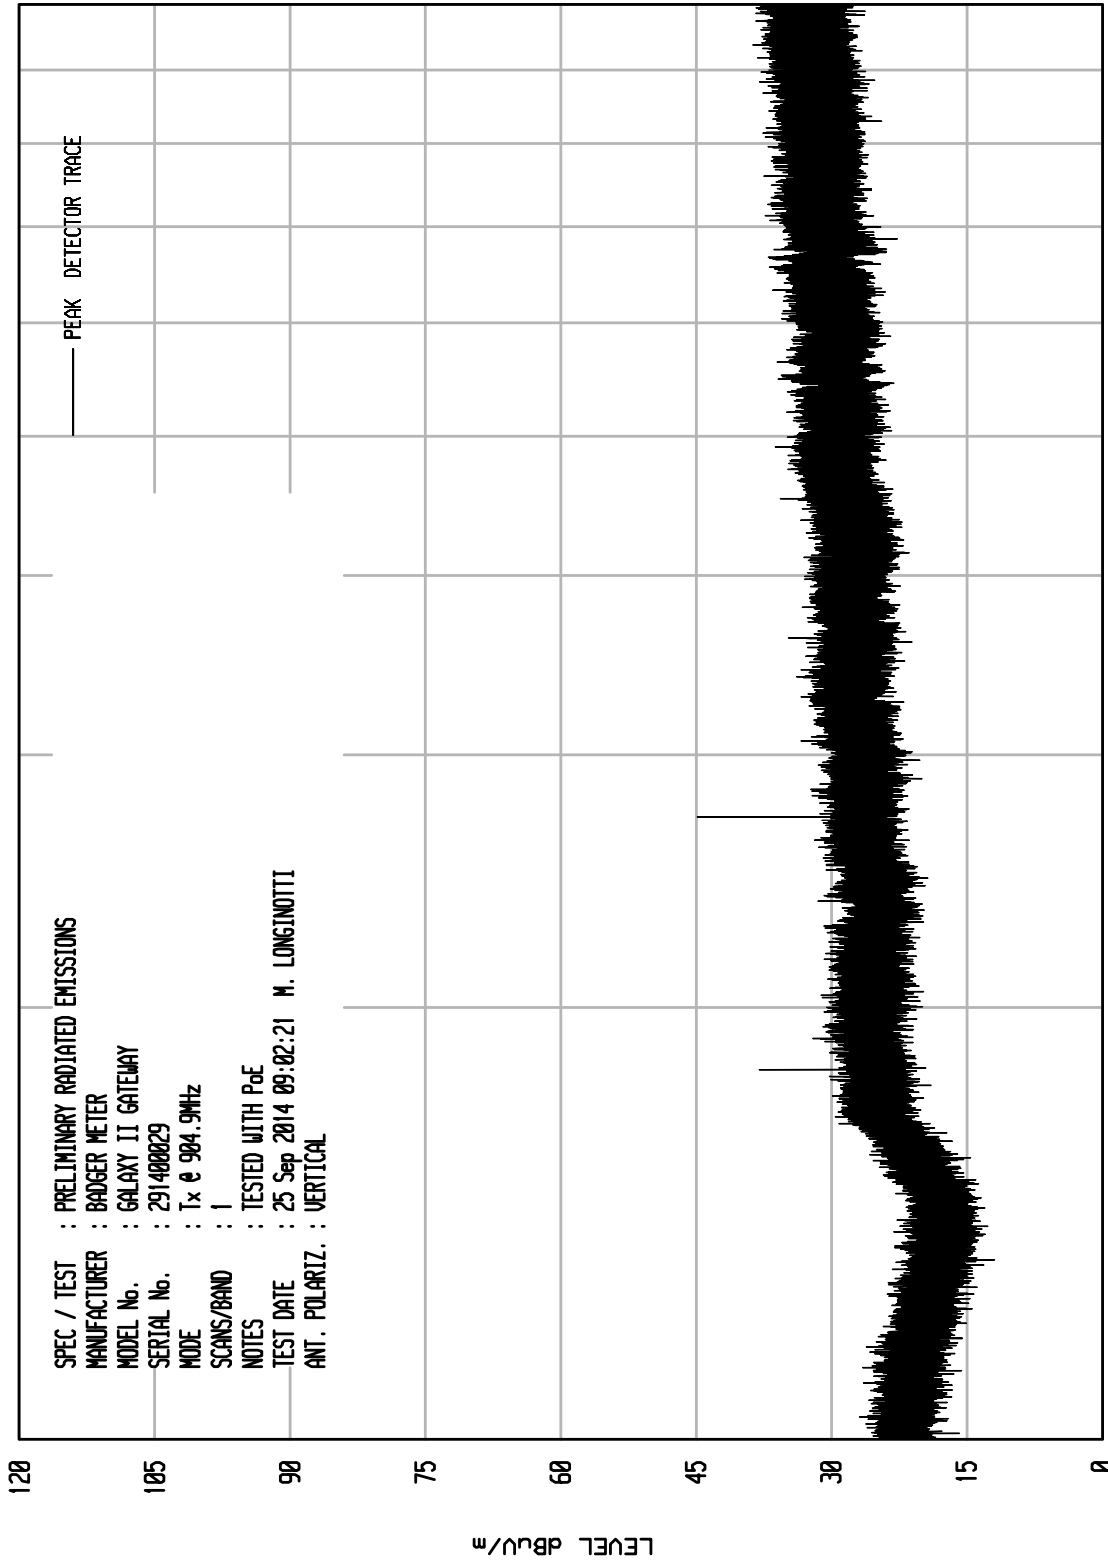

START = 1000


FREQUENCY MHz

STOP = 10000

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIT0 RCU ENI RUN 10

UKA1 04/24/13

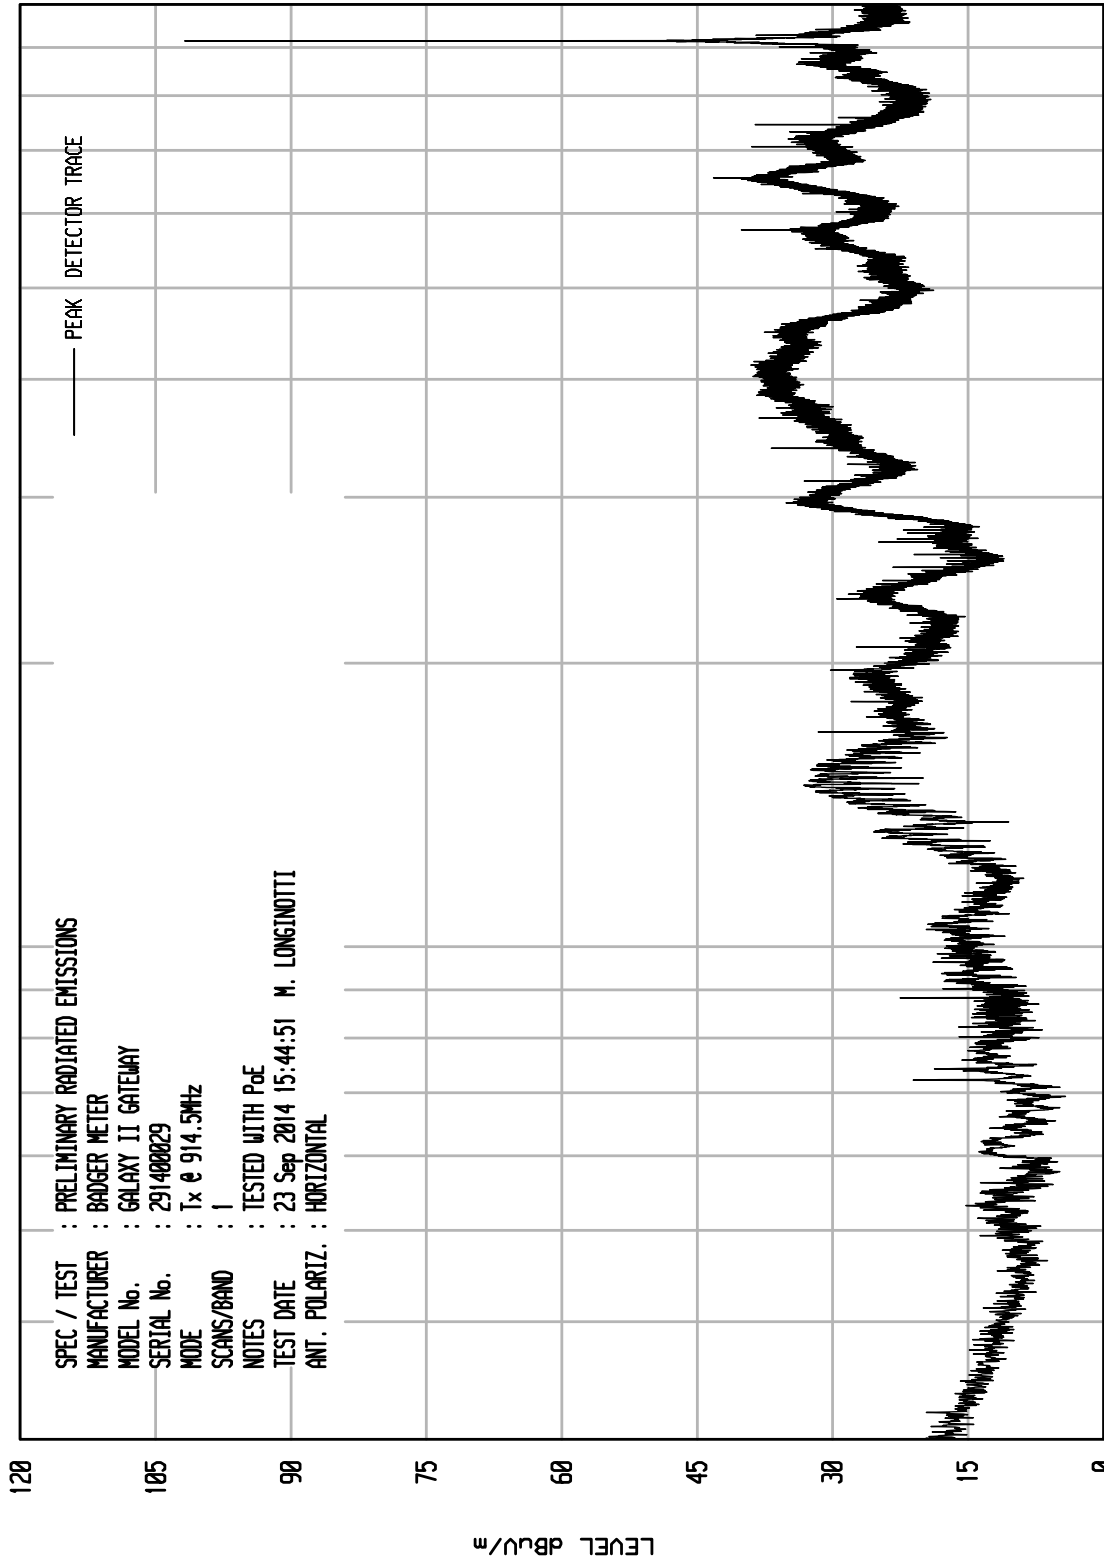

STOP = 1000


FREQUENCY MHz

START = 30

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIT: RCU ENI RUN 9

UKA1 04/24/13

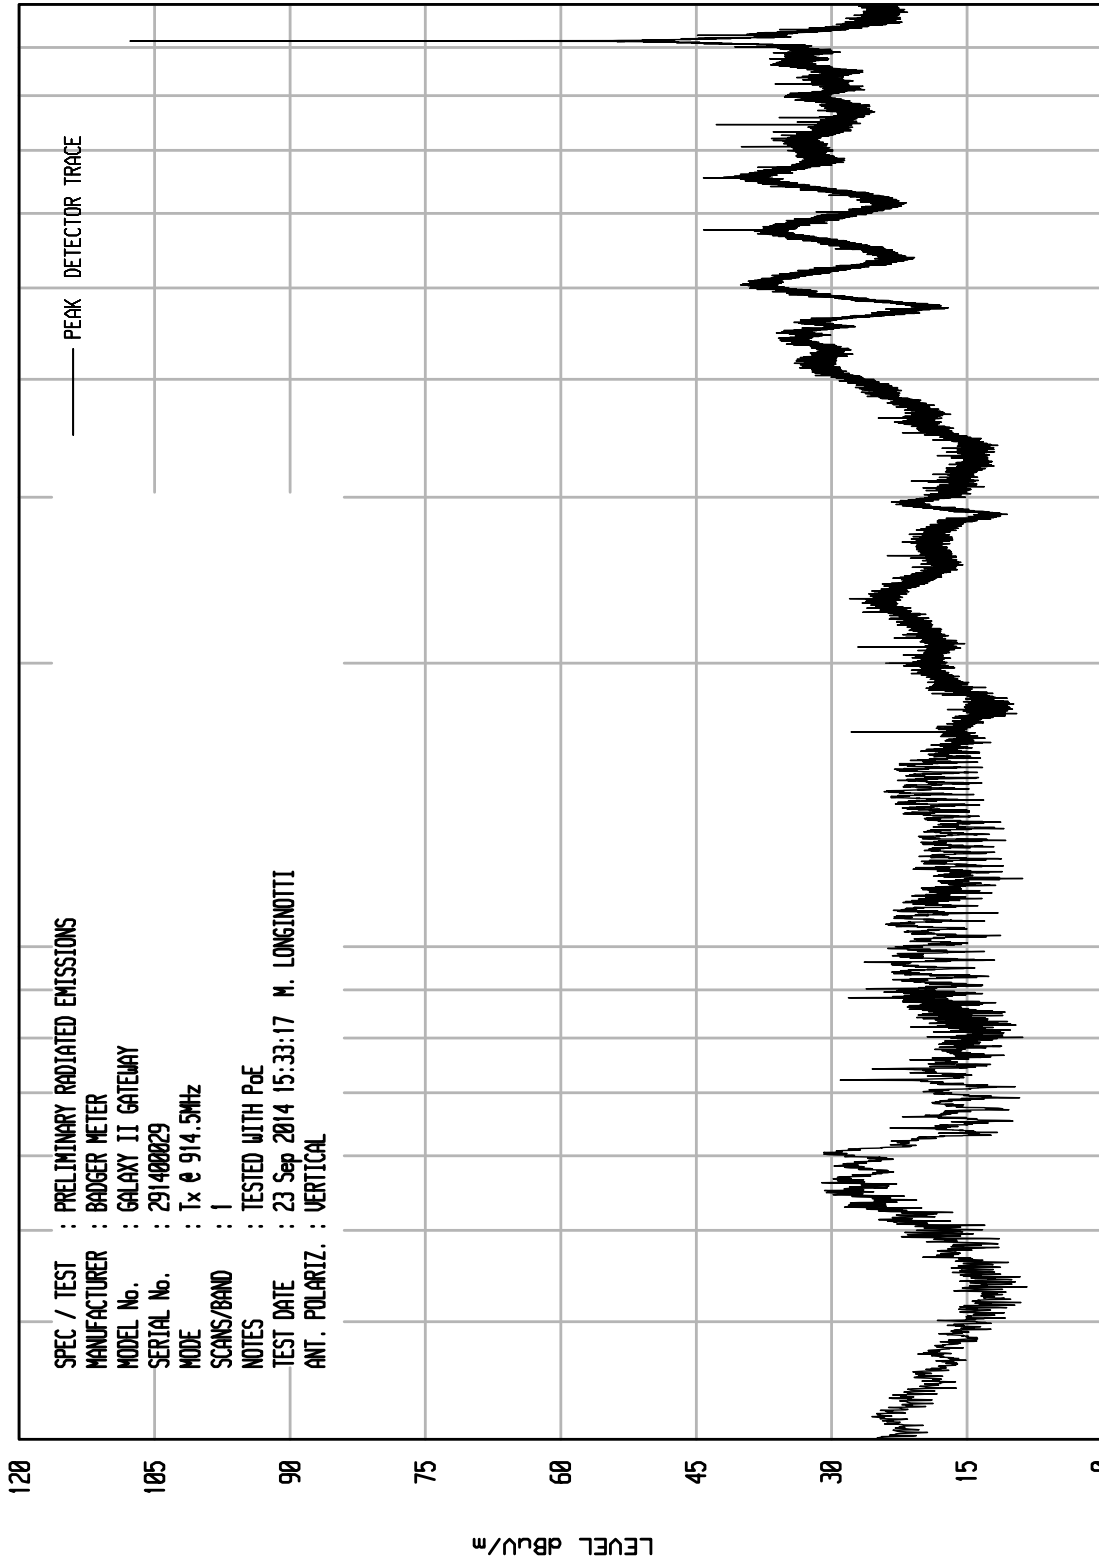

STOP = 1000


FREQUENCY MHz

START = 30

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13

UNITU RCU ENI RUN 24

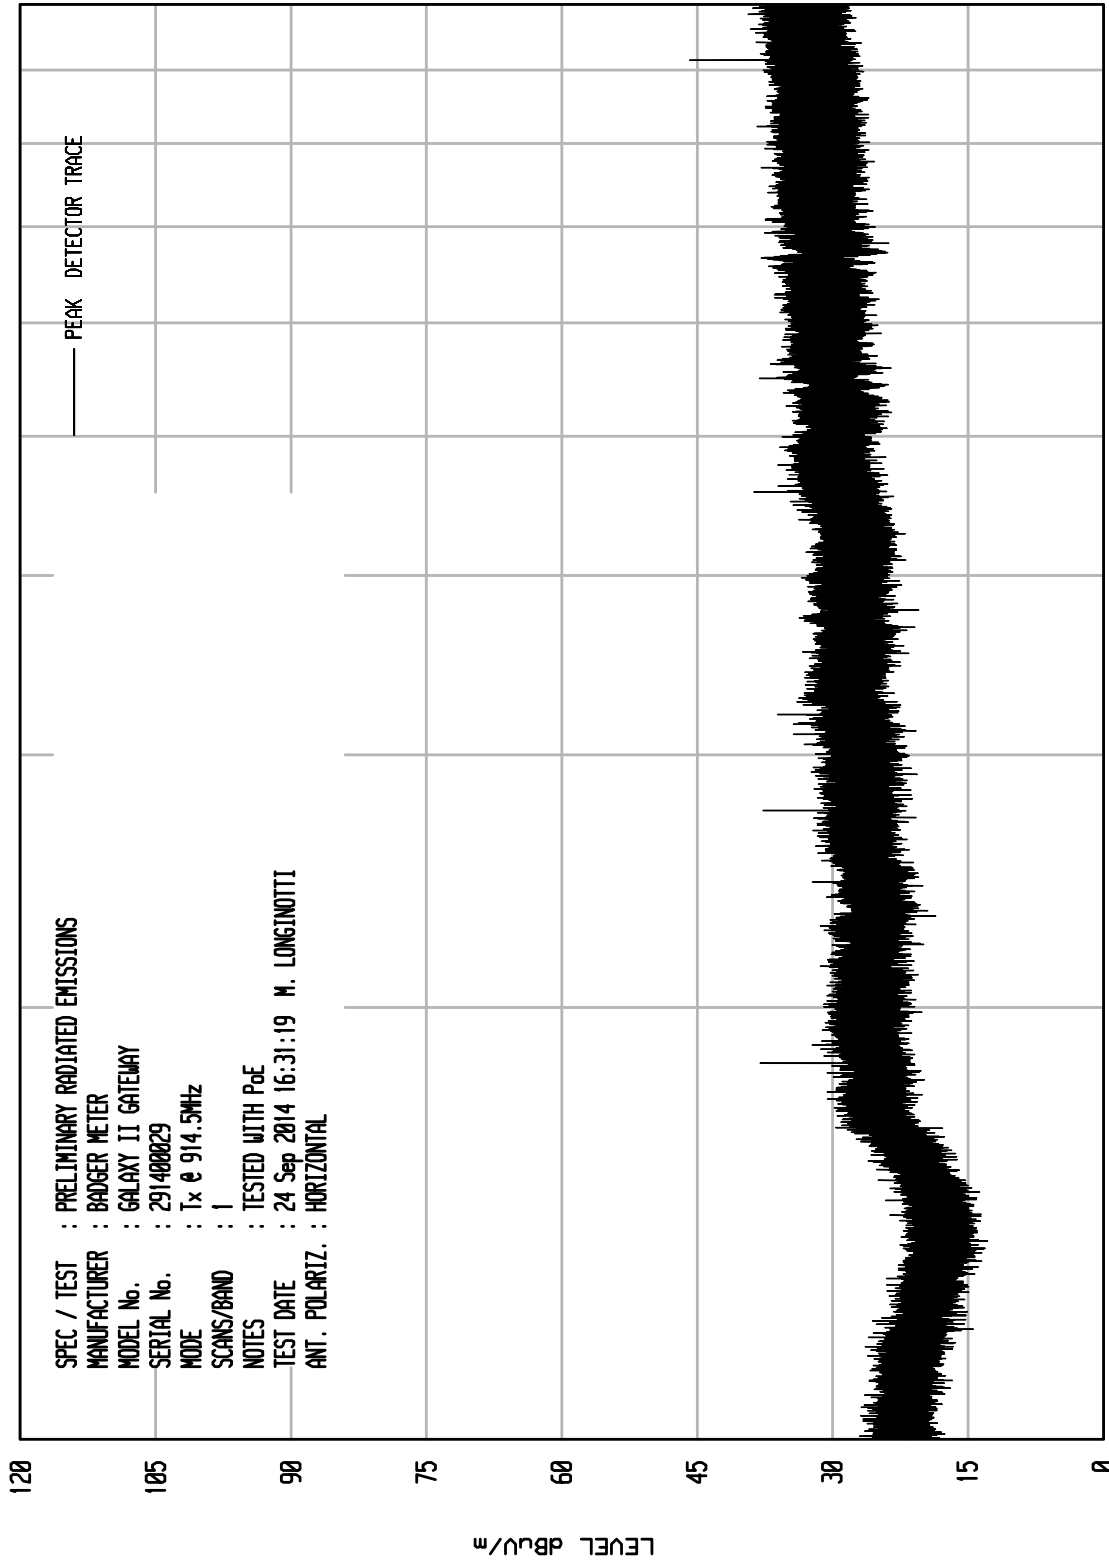

START = 1000

FREQUENCY MHz


STOP = 10000

ELITE ELECTRONIC ENGINEERING Inc.

Downers Grove, Ill. 60515

UKA1 04/24/13

UNITU RCU ENI RUN 23

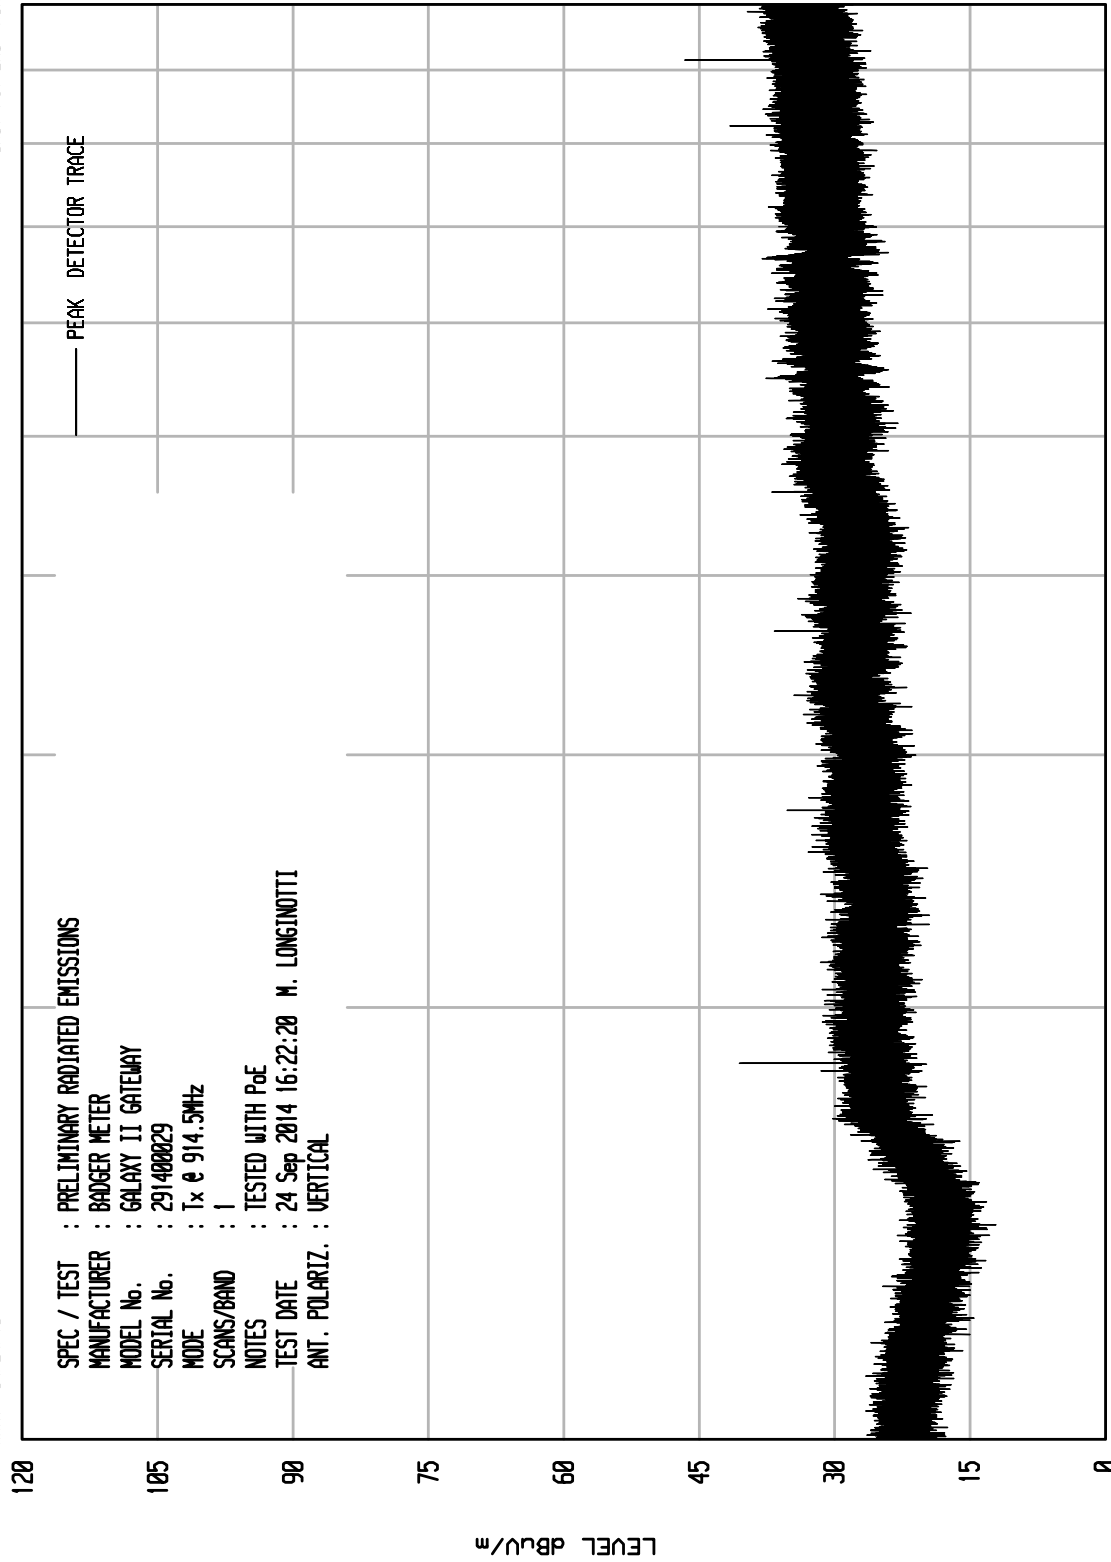

STOP = 10000


FREQUENCY MHz

START = 1000

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13

UNIT0 RCU ENI RUN 11

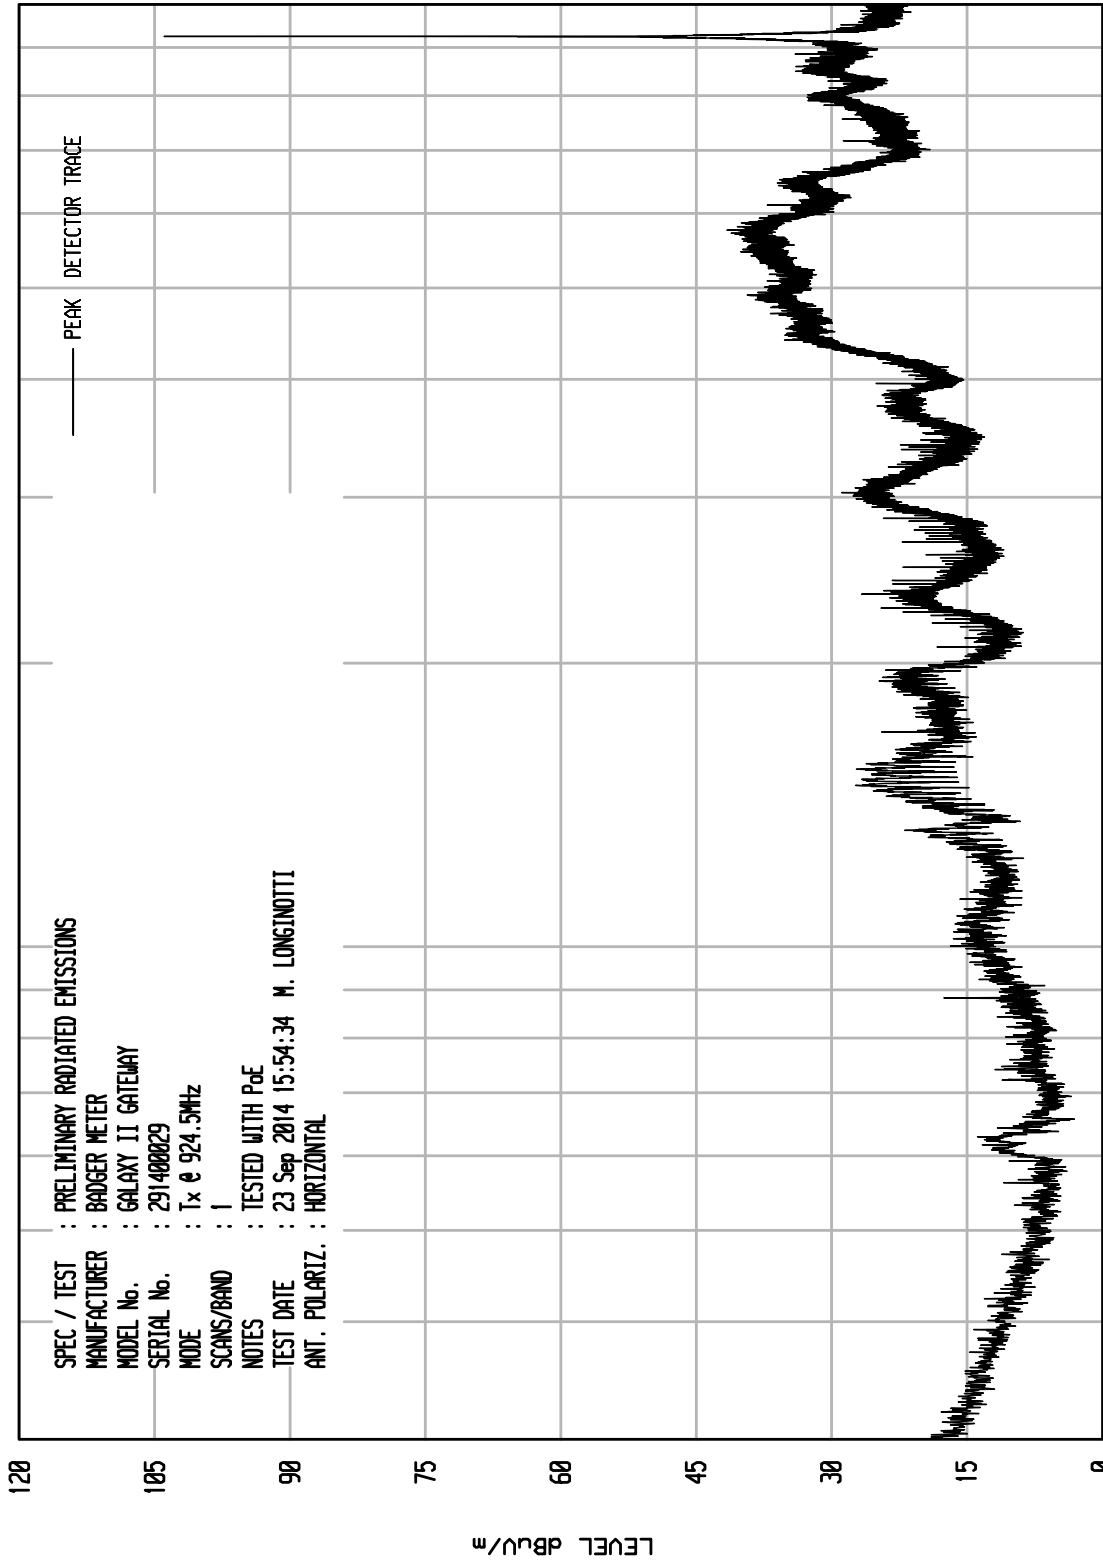

START = 30


FREQUENCY MHz

STOP = 1000

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIT: RCU ENI RUN 12

UKA1 04/24/13

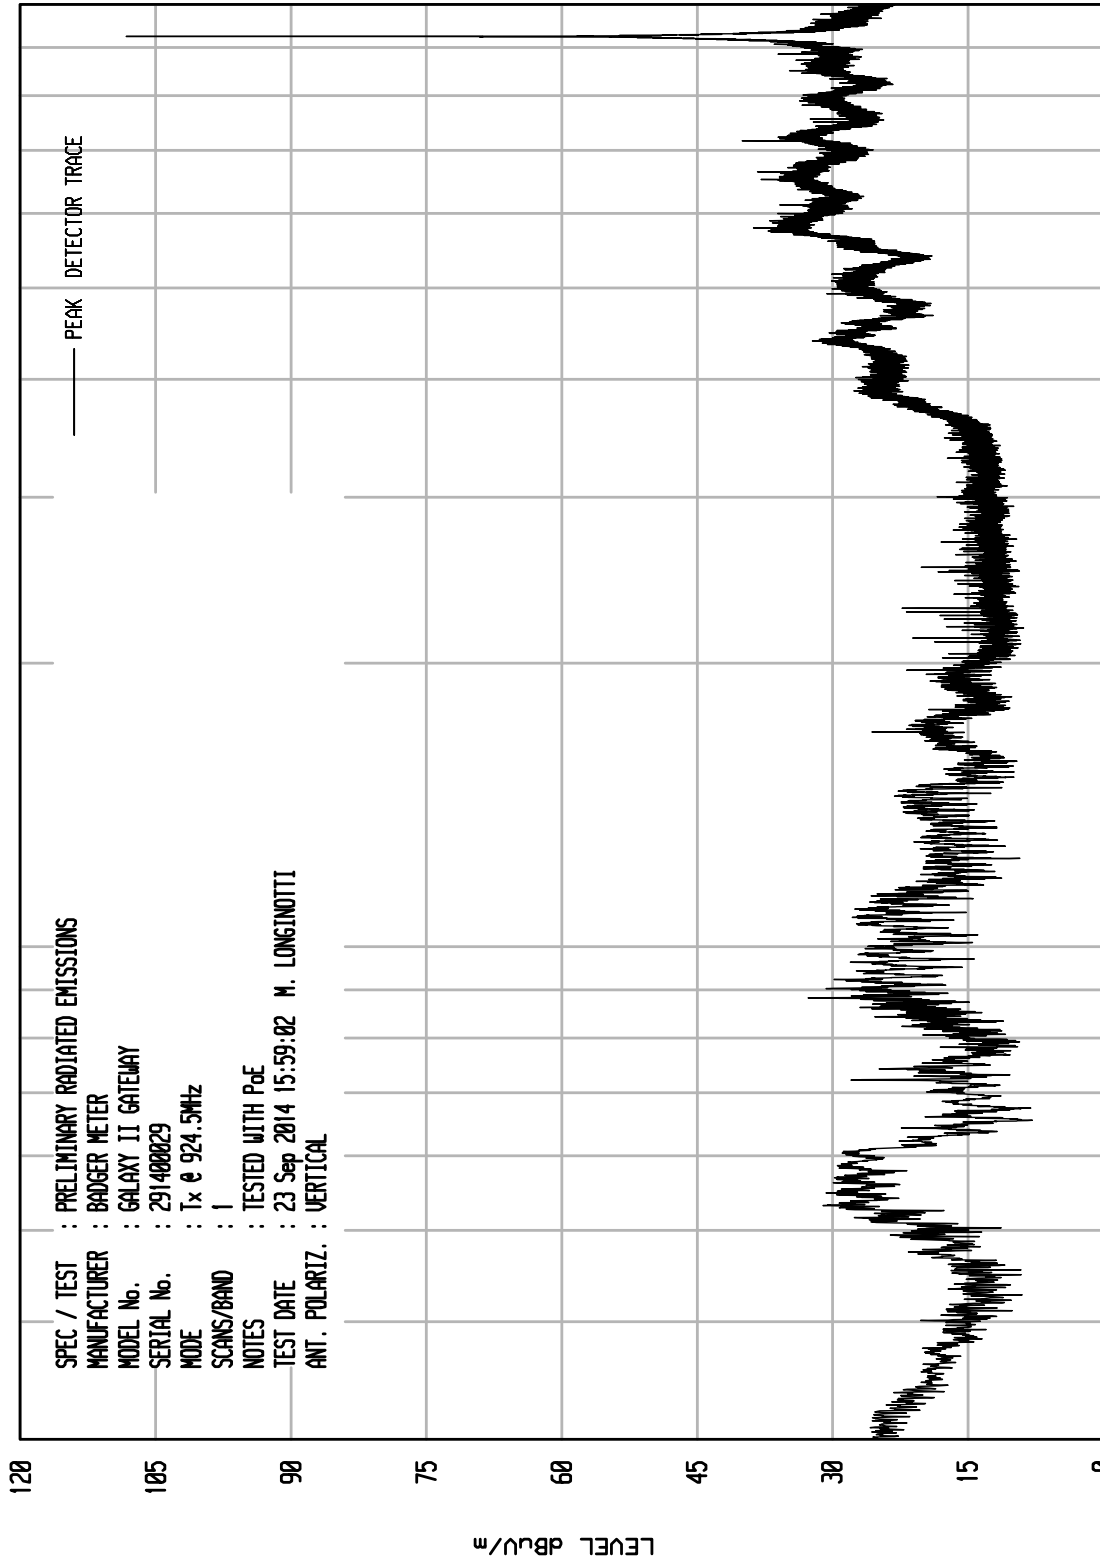

STOP = 1000

FREQUENCY MHz


START = 30

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : BADGER METER
MODEL No. : GALAXY II GATEWAY
SERIAL No. : 291400029
MODE : Tx @ 924.5MHz
SCANS/BAND : 1
NOTES : TESTED WITH PoE
TEST DATE : 23 Sep 2014 15:59:02 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13

UNITU RCU ENI RUN 22

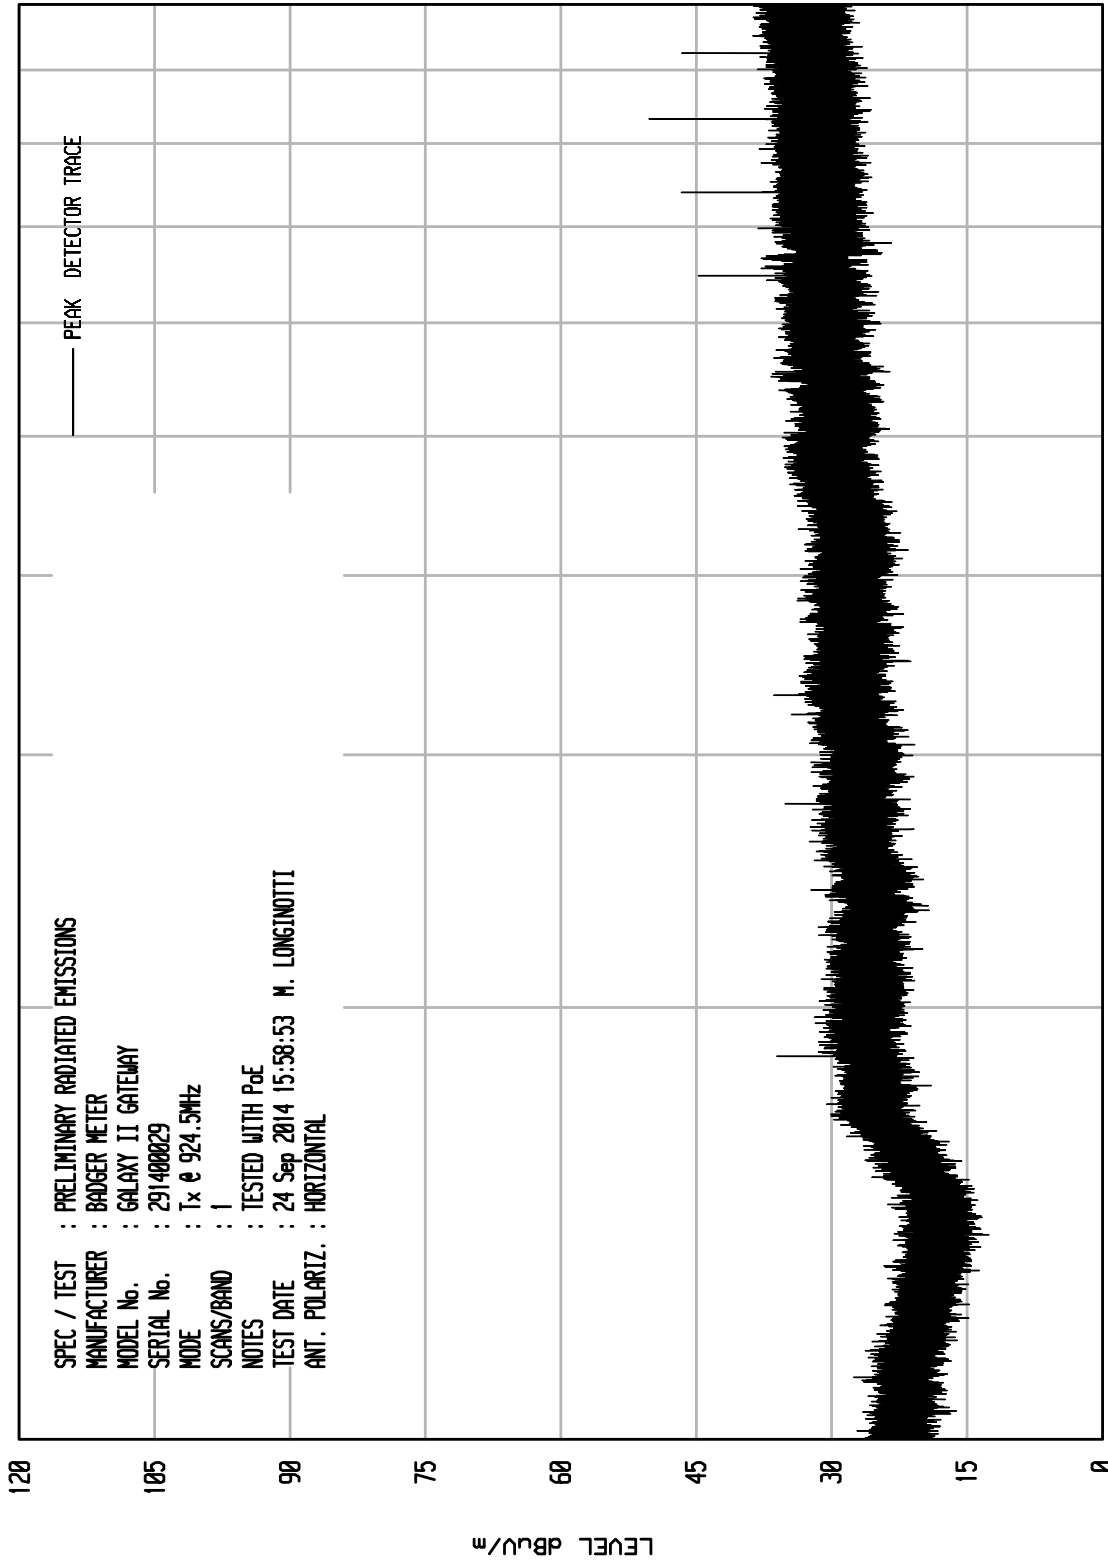

START = 1000


FREQUENCY MHz

STOP = 10000

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UKA1 04/24/13

UNITU RCU ENI RUN 21

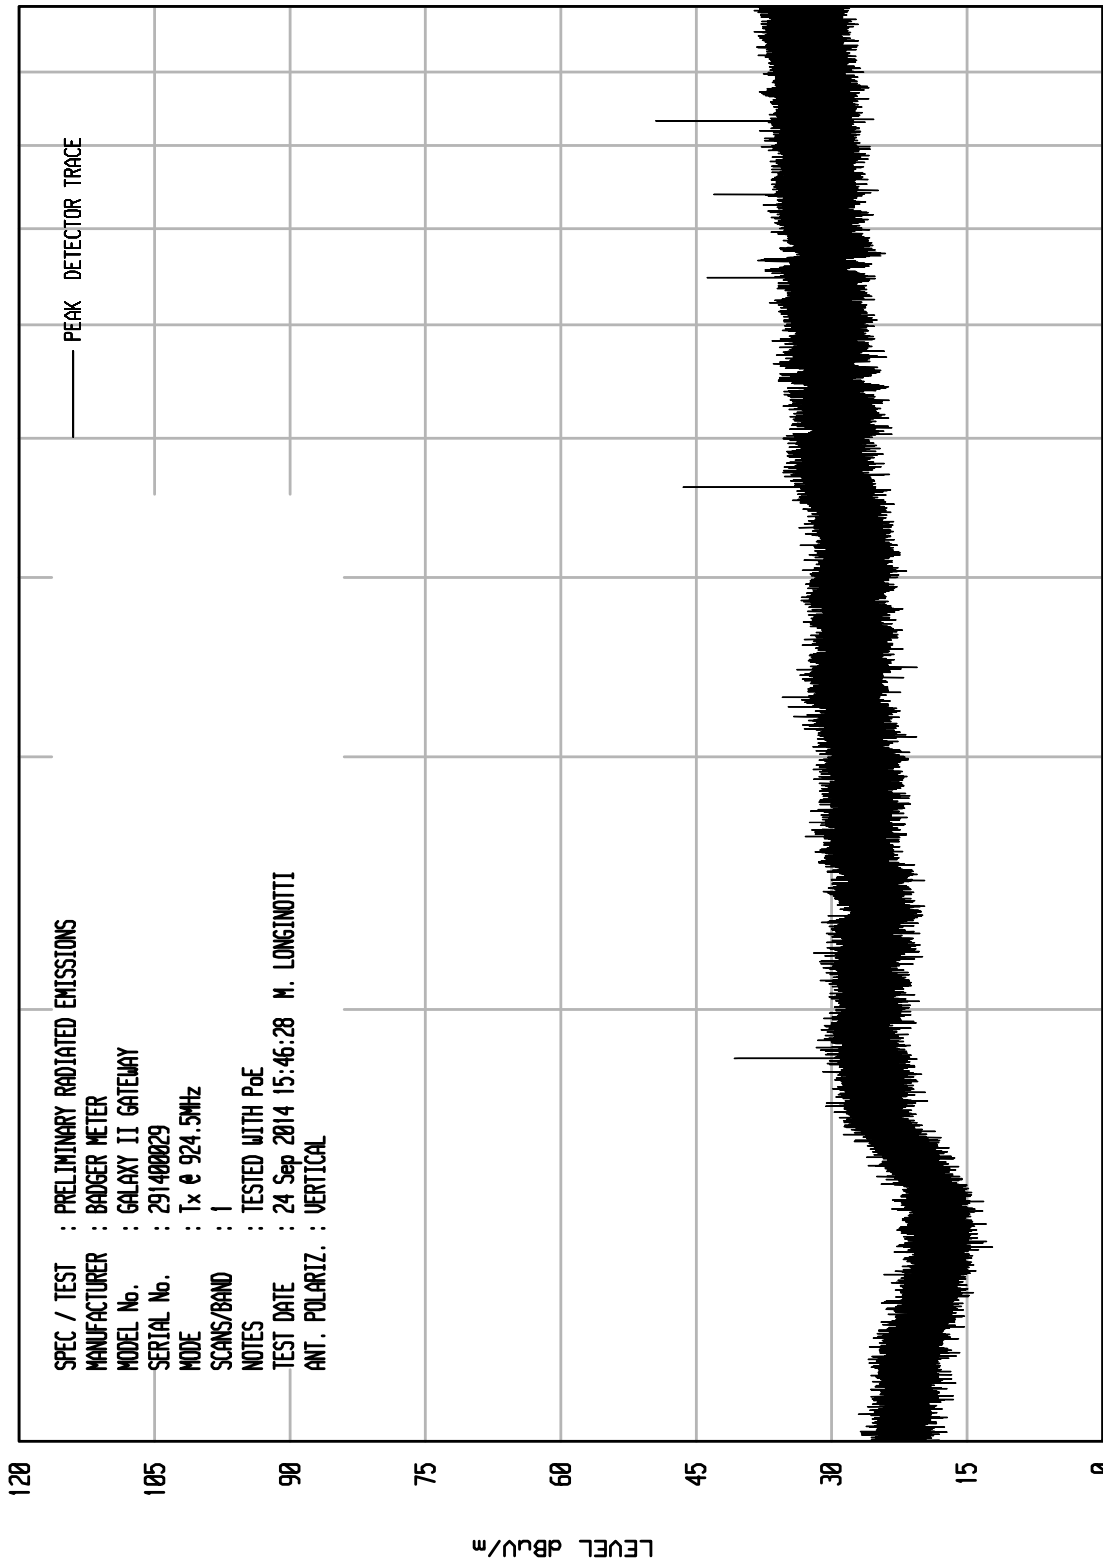

START = 1000

FREQUENCY MHz

STOP = 10000



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 904.9MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, PoE
NOTES : Quasi-Peak Readings in a 120kHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
73.47	H	7.2		0.4	6.6	0.0	14.3	5.2	100.0	-25.7
73.49	V	11.7		0.4	6.6	0.0	18.8	8.7	100.0	-21.2
74.22	H	17.7		0.5	6.7	0.0	24.8	17.4	100.0	-15.2
74.22	V	17.9		0.5	6.7	0.0	25.0	17.8	100.0	-15.0
112.33	H	7.9		0.5	12.0	0.0	20.5	10.6	150.0	-23.0
112.33	V	12.3		0.5	12.0	0.0	24.9	17.6	150.0	-18.6
114.34	H	6.7		0.6	12.2	0.0	19.4	9.4	150.0	-24.1
114.34	V	9.6		0.6	12.2	0.0	22.3	13.1	150.0	-21.2
169.00	H	14.0		0.7	9.7	0.0	24.4	16.6	150.0	-19.1
169.00	V	14.5		0.7	9.7	0.0	24.9	17.6	150.0	-18.6
260.00	H	17.4		0.8	13.4	0.0	31.6	38.2	200.0	-14.4
260.00	V	17.0		0.8	13.4	0.0	31.2	36.5	200.0	-14.8



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 904.9MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, PoE
NOTES : Peak Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2714.70	H	52.6		2.8	32.7	-39.5	48.6	269.0	5000.0	-25.4
2714.70	V	52.7		2.8	32.7	-39.5	48.7	272.1	5000.0	-25.3
3619.60	H	48.8	Ambient	3.2	33.5	-38.9	46.6	214.9	5000.0	-27.3
3619.60	V	50.9	Ambient	3.2	33.5	-38.9	48.7	273.6	5000.0	-25.2
4524.50	H	50.9	Ambient	3.6	34.5	-38.9	50.1	320.5	5000.0	-23.9
4524.50	V	51.4	Ambient	3.6	34.5	-38.9	50.6	339.5	5000.0	-23.4
5429.40	H	48.5	Ambient	3.9	34.9	-39.0	48.3	259.8	5000.0	-25.7
5429.40	V	47.6	Ambient	3.9	34.9	-39.0	47.4	234.3	5000.0	-26.6
8144.10	H	49.4	Ambient	4.9	35.9	-39.0	51.3	366.1	5000.0	-22.7
8144.10	V	52.8		4.9	35.9	-39.0	54.7	541.5	5000.0	-19.3
9049.00	H	47.3	Ambient	5.0	36.2	-38.9	49.6	300.6	5000.0	-24.4
9049.00	V	49.3	Ambient	5.0	36.2	-38.9	51.6	378.4	5000.0	-22.4



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 904.9MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, PoE
NOTES : Average Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2714.70	H	45.20		2.8	32.7	-39.5	-8.1	33.1	45.0	500.0	-20.9
2714.70	V	45.4		2.8	32.7	-39.5	-8.1	33.3	46.0	500.0	-20.7
3619.60	H	37.5	Ambient	3.2	33.5	-38.9	-8.1	27.2	22.9	500.0	-26.8
3619.60	V	40.0	Ambient	3.2	33.5	-38.9	-8.1	29.7	30.6	500.0	-24.3
4524.50	H	42.1	Ambient	3.6	34.5	-38.9	-8.1	33.2	45.6	500.0	-20.8
4524.50	V	43.3	Ambient	3.6	34.5	-38.9	-8.1	34.4	52.3	500.0	-19.6
5429.40	H	39.0	Ambient	3.9	34.9	-39.0	-8.1	30.7	34.1	500.0	-23.3
5429.40	V	36.4	Ambient	3.9	34.9	-39.0	-8.1	28.1	25.3	500.0	-25.9
8144.10	H	39.2	Ambient	4.9	35.9	-39.0	-8.1	32.9	44.3	500.0	-21.0
8144.10	V	44.1		4.9	35.9	-39.0	-8.1	37.8	77.9	500.0	-16.1
9049.00	H	36.1	Ambient	5.0	36.2	-38.9	-8.1	30.2	32.4	500.0	-23.8
9049.00	V	37.9	Ambient	5.0	36.2	-38.9	-8.1	32.0	39.9	500.0	-22.0



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 914.5MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, PoE
NOTES : Peak Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2743.50	H	50.7		2.8	32.8	-39.5	46.8	218.4	5000.0	-27.2
2743.50	V	50.4		2.8	32.8	-39.5	46.5	211.0	5000.0	-27.5
3658.00	H	47.6		3.3	33.5	-38.9	45.5	188.3	5000.0	-28.5
3658.00	V	49.1		3.3	33.5	-38.9	47.0	223.8	5000.0	-27.0
4572.50	H	51.4		3.6	34.5	-38.9	50.6	339.8	5000.0	-23.4
4572.50	V	51.7		3.6	34.5	-38.9	50.9	351.7	5000.0	-23.1
7316.00	H	48.8	Ambient	4.7	35.6	-39.0	50.1	320.6	5000.0	-23.9
7316.00	V	49.5	Ambient	4.7	35.6	-39.0	50.8	347.5	5000.0	-23.2
8230.50	H	51.0		4.9	35.9	-39.0	52.9	442.3	5000.0	-21.1
8230.50	V	54.8		4.9	35.9	-39.0	56.7	685.1	5000.0	-17.3
9145.00	H	53.2		5.0	36.2	-38.9	55.5	595.8	5000.0	-18.5
9145.00	V	56.6		5.0	36.2	-38.9	58.9	881.3	5000.0	-15.1



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 914.5MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, PoE
NOTES : Average Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2743.50	H	42.50		2.8	32.8	-39.5	-8.1	30.4	33.3	500.0	-23.5
2743.50	V	42.0		2.8	32.8	-39.5	-8.1	29.9	31.4	500.0	-24.0
3658.00	H	35.9		3.3	33.5	-38.9	-8.1	25.7	19.2	500.0	-28.3
3658.00	V	39.8		3.3	33.5	-38.9	-8.1	29.6	30.1	500.0	-24.4
4572.50	H	41.1		3.6	34.5	-38.9	-8.1	32.2	40.7	500.0	-21.8
4572.50	V	44.3		3.6	34.5	-38.9	-8.1	35.4	58.8	500.0	-18.6
7316.00	H	38.2	Ambient	4.7	35.6	-39.0	-8.1	31.4	37.1	500.0	-22.6
7316.00	V	39.0	Ambient	4.7	35.6	-39.0	-8.1	32.2	40.6	500.0	-21.8
8230.50	H	42.3		4.9	35.9	-39.0	-8.1	36.1	63.6	500.0	-17.9
8230.50	V	47.5		4.9	35.9	-39.0	-8.1	41.3	115.8	500.0	-12.7
9145.00	H	45.3		5.0	36.2	-38.9	-8.1	39.5	94.0	500.0	-14.5
9145.00	V	49.7		5.0	36.2	-38.9	-8.1	43.9	156.0	500.0	-10.1




MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 924.5MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, PoE
NOTES : Peak Readings in a 1MHz RBW

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2773.50	H	52.0		2.8	32.8	-39.5	48.2	256.4	5000.0	-25.8
2773.50	V	50.8	Ambient	2.8	32.8	-39.5	47.0	223.3	5000.0	-27.0
3698.00	H	47.7	Ambient	3.3	33.5	-38.9	45.7	191.8	5000.0	-28.3
3698.00	V	48.2	Ambient	3.3	33.5	-38.9	46.2	203.1	5000.0	-27.8
4622.50	H	53.7		3.6	34.6	-38.9	53.0	445.5	5000.0	-21.0
4622.50	V	52.8		3.6	34.6	-38.9	52.1	401.7	5000.0	-21.9
7396.00	H	52.7		4.7	35.7	-39.0	54.1	505.0	5000.0	-19.9
7396.00	V	52.0		4.7	35.7	-39.0	53.4	465.9	5000.0	-20.6
8320.50	H	53.5		4.9	35.9	-39.0	55.4	588.0	5000.0	-18.6
8320.50	V	59.7		4.9	35.9	-39.0	61.6	1200.6	5000.0	-12.4



MANUFACTURER : Badger Meter
EUT : Transceiver
MODEL : GALAXY II Gateway
SERIAL NO. : 291400029
TEST MODE : Transmit at 924.5MHz
SPECIFICATION : Spurious Radiated Emissions in Restricted Bands
DATE : September 22 through September 25, 2014
TEST EQUIPMENT : NTA3, RBA0, NWQ1, APW11, XPQ3
NOTES : Output Power = 141, PoE
NOTES : Average Readings in a 1MHz RBW


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2773.50	H	43.70		2.8	32.8	-39.5	-8.1	31.7	38.6	500.0	-22.2
2773.50	V	41.4	Ambient	2.8	32.8	-39.5	-8.1	29.4	29.6	500.0	-24.5
3698.00	H	36.4	Ambient	3.3	33.5	-38.9	-8.1	26.2	20.5	500.0	-27.8
3698.00	V	36.8	Ambient	3.3	33.5	-38.9	-8.1	26.6	21.4	500.0	-27.4
4622.50	H	47.7		3.6	34.6	-38.9	-8.1	38.8	87.5	500.0	-15.1
4622.50	V	45.7		3.6	34.6	-38.9	-8.1	36.8	69.5	500.0	-17.1
7396.00	H	44.2		4.7	35.7	-39.0	-8.1	37.4	74.3	500.0	-16.6
7396.00	V	43.3		4.7	35.7	-39.0	-8.1	36.5	67.0	500.0	-17.5
8320.50	H	44.8		4.9	35.9	-39.0	-8.1	38.5	84.6	500.0	-15.4
8320.50	V	54.0		4.9	35.9	-39.0	-8.1	47.7	244.0	500.0	-6.2

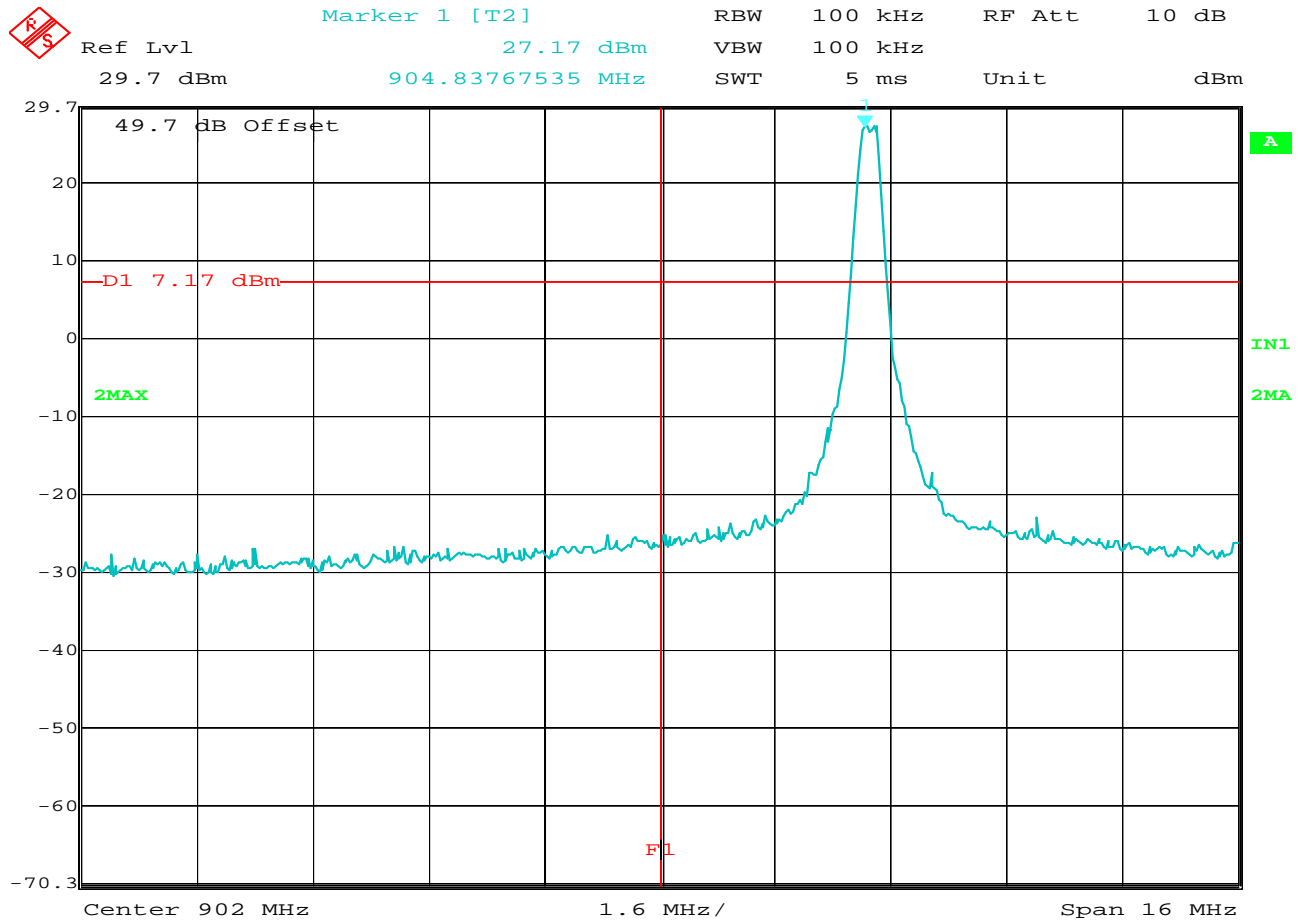

Date: 26.SEP.2014 14:05:40

Band-Edge Requirements

MANUFACTURER	: Badger Meter
MODEL NUMBER	: Galaxy II Gateway
SERIAL NUMBER	: 291400029
TEST MODE	: Tx @ 904.9MHz (Ch. 1), Emerson Power Supply
TEST PARAMETERS	: Band-Edge Requirements, ANT1 Port
NOTES	: Marker 1 = peak power in a 100kHz bandwidth. Display Line D1 represents the level 20dB down from the peak power in a 100kHz bandwidth. Display Line F1 represents the band-edge (902MHz).
EQUIPMENT USED	: RBA0, T2D8, T2S4, T1EH

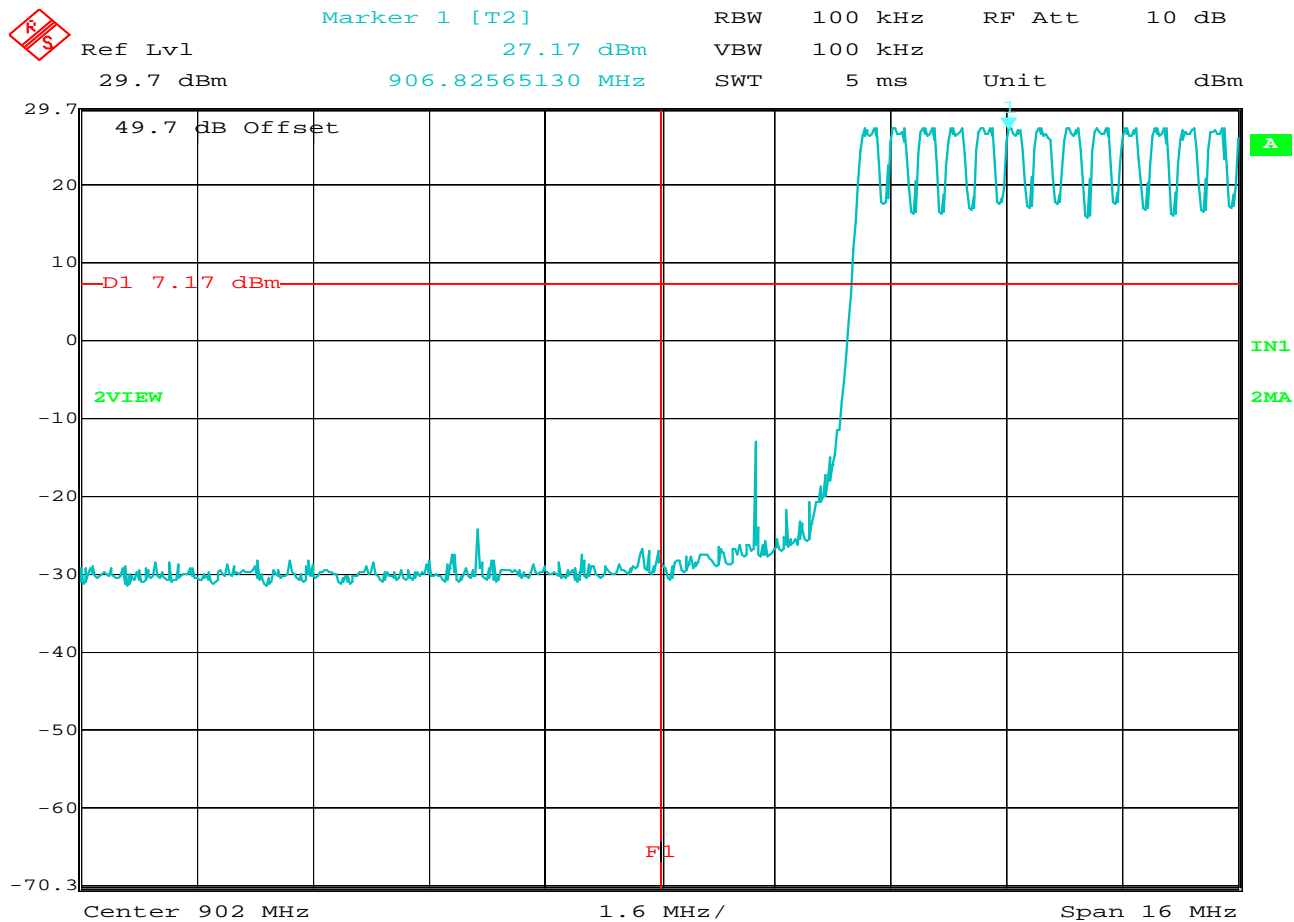

Date: 26.SEP.2014 14:07:26

Band-Edge Requirements

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, Emerson Power Supply
TEST PARAMETERS : Band-Edge Requirements, ANT1 Port
NOTES : Marker 1 = peak power in a 100kHz bandwidth. Display Line D1 represents the level 20dB down from the peak power in a 100kHz bandwidth. Display Line F1 represents the band-edge (902MHz).
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Marker 1 [T2]

RBW 100 kHz RF Att 10 dB


Ref Lvl 27.15 dBm

VBW 100 kHz

29.7 dBm 924.42484970 MHz

SWT 5 ms


Unit dBm

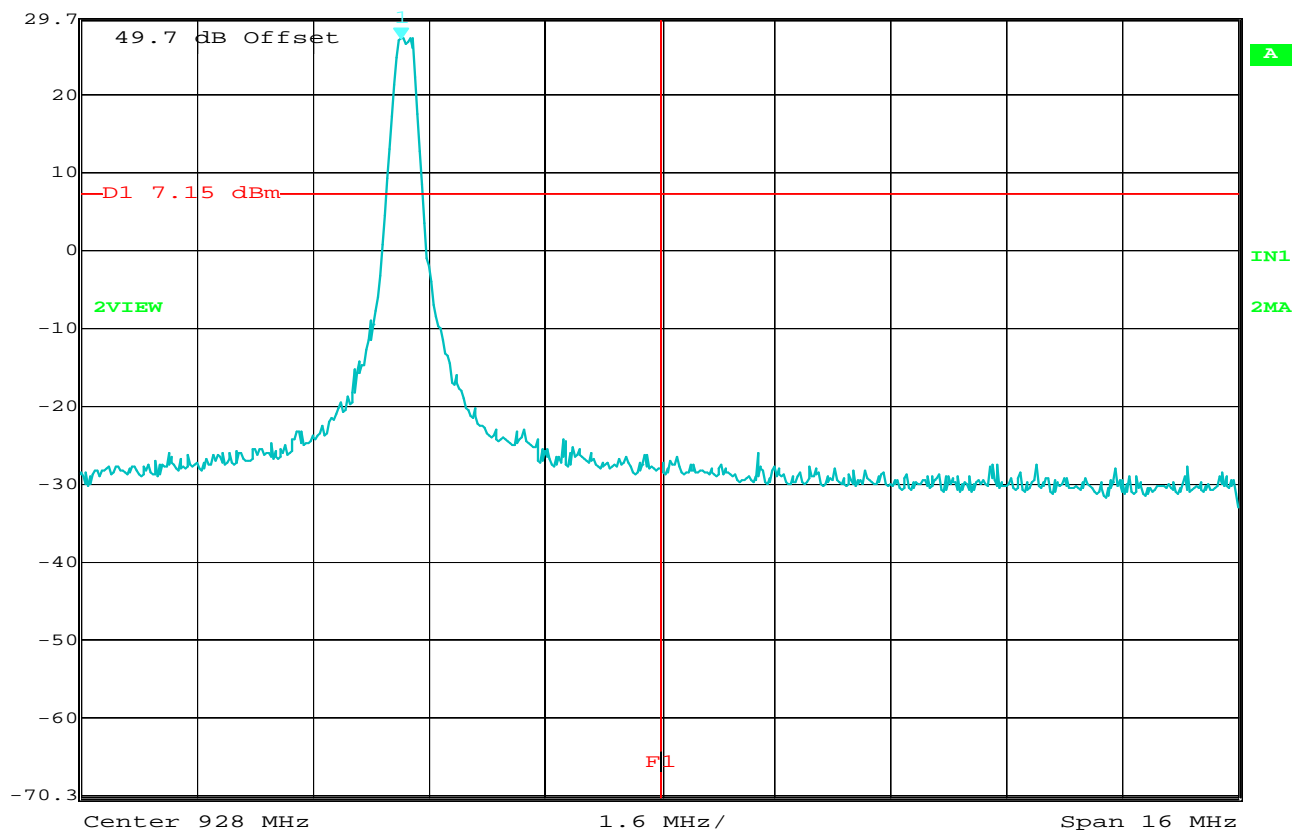

Date: 26.SEP.2014 14:09:12

Band-Edge Requirements

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Tx @ 924.5MHz (Ch. 50), Emerson Power Supply
TEST PARAMETERS : Band-Edge Requirements, ANT1 Port
NOTES : Marker 1 = peak power in a 100kHz bandwidth. Display Line D1 represents the level 20dB down from the peak power in a 100kHz bandwidth. Display Line F1 represents the band-edge (928MHz).
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH

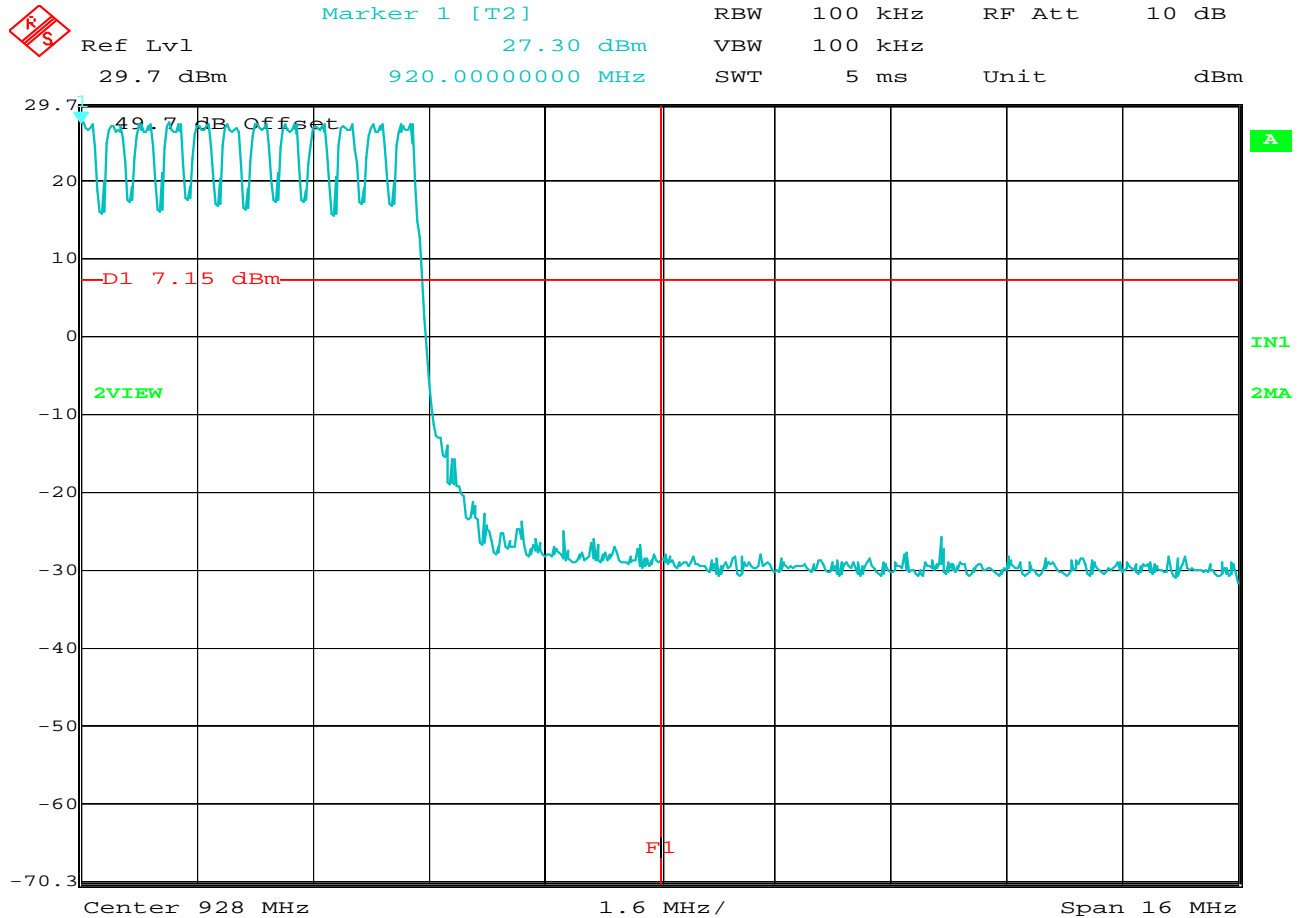

Date: 26.SEP.2014 14:11:06

Band-Edge Requirements

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, Emerson Power Supply
TEST PARAMETERS : Band-Edge Requirements, ANT1 Port
NOTES : Marker 1 = peak power in a 100kHz bandwidth. Display Line D1 represents the level 20dB down from the peak power in a 100kHz bandwidth. Display Line F1 represents the band-edge (928MHz).
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Marker 1 [T2]

RBW 100 kHz RF Att 10 dB

Ref Lvl 27.15 dBm

VBW 100 kHz


29.7 dBm

904.83767535 MHz

SWT 5 ms

Unit

dBm

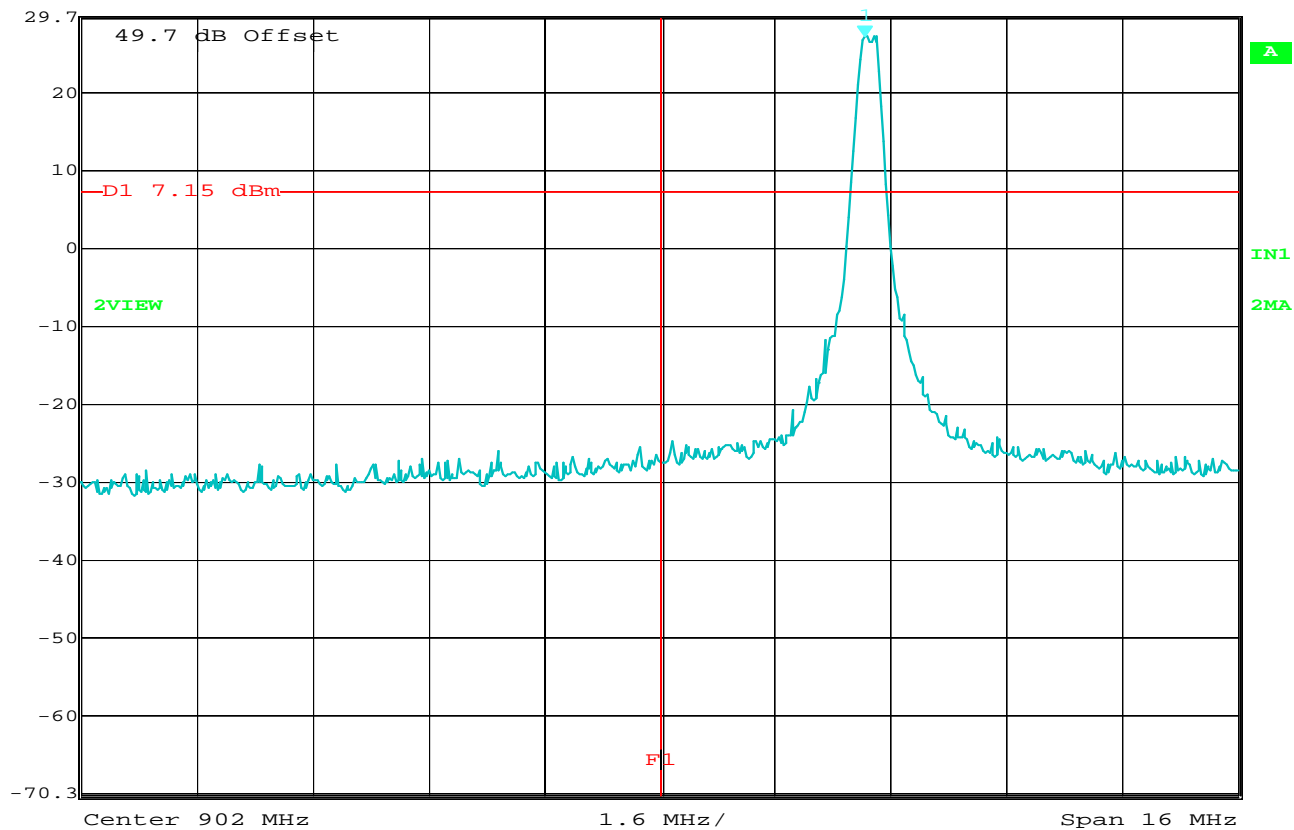

Date: 26.SEP.2014 14:17:15

Band-Edge Requirements

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Tx @ 902.9MHz, PoE
TEST PARAMETERS : Band-Edge Requirements, ANT1 Port
NOTES : Marker 1 = peak power in a 100kHz bandwidth. Display Line D1 represents the level 20dB down from the peak power in a 100kHz bandwidth. Display Line F1 represents the band-edge (902MHz).
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Marker 1 [T2]


RBW 100 kHz RF Att 10 dB

Ref Lvl 27.13 dBm

VBW 100 kHz

29.7 dBm 909.39078156 MHz

SWT 5 ms Unit dBm

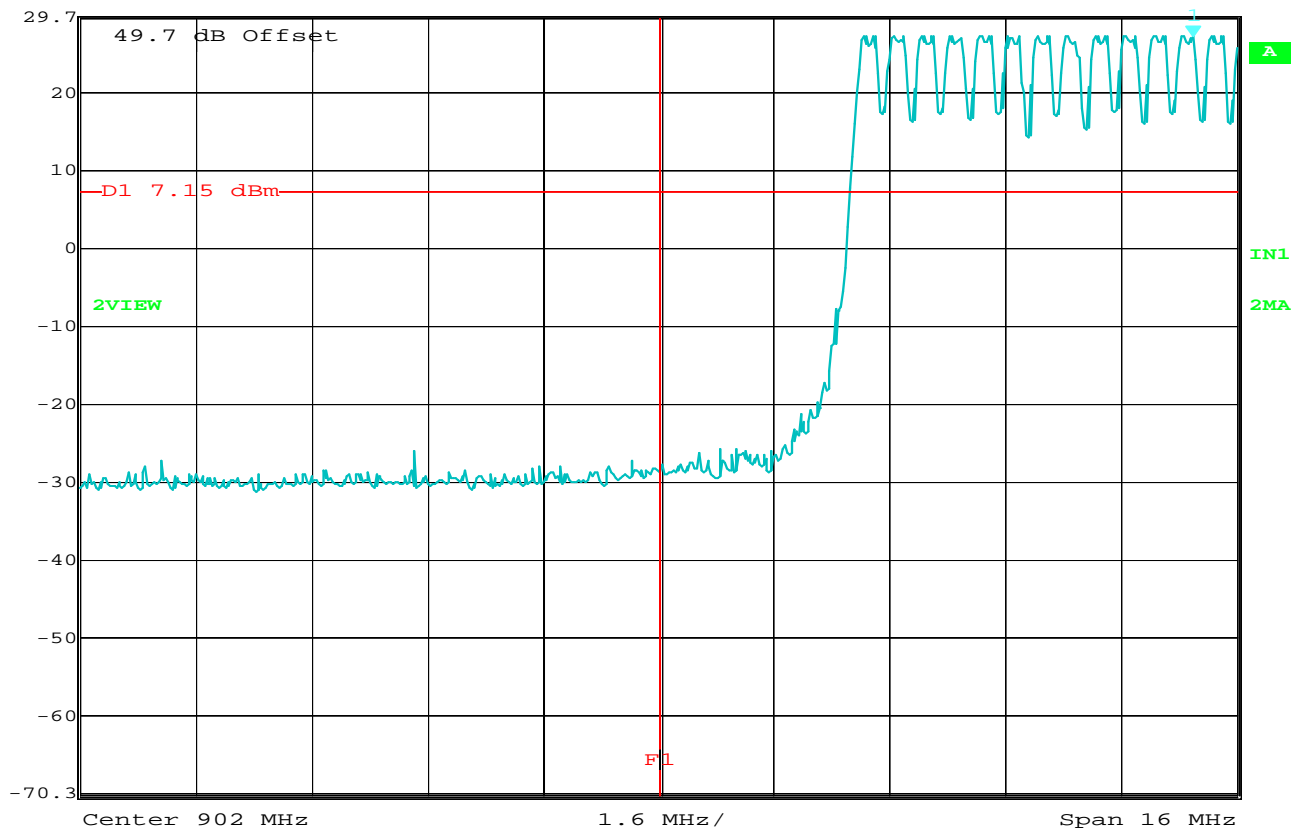

Date: 26.SEP.2014 14:19:15

Band-Edge Requirements

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, PoE
TEST PARAMETERS : Band-Edge Requirements, ANT1 Port
NOTES : Marker 1 = peak power in a 100kHz bandwidth. Display Line D1 represents the level 20dB down from the peak power in a 100kHz bandwidth. Display Line F1 represents the band-edge (902MHz).
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH



Marker 1 [T2]

RBW 100 kHz RF Att 10 dB


Ref Lvl 27.37 dBm

VBW 100 kHz

29.7 dBm 924.42484970 MHz

SWT 5 ms


Unit dBm

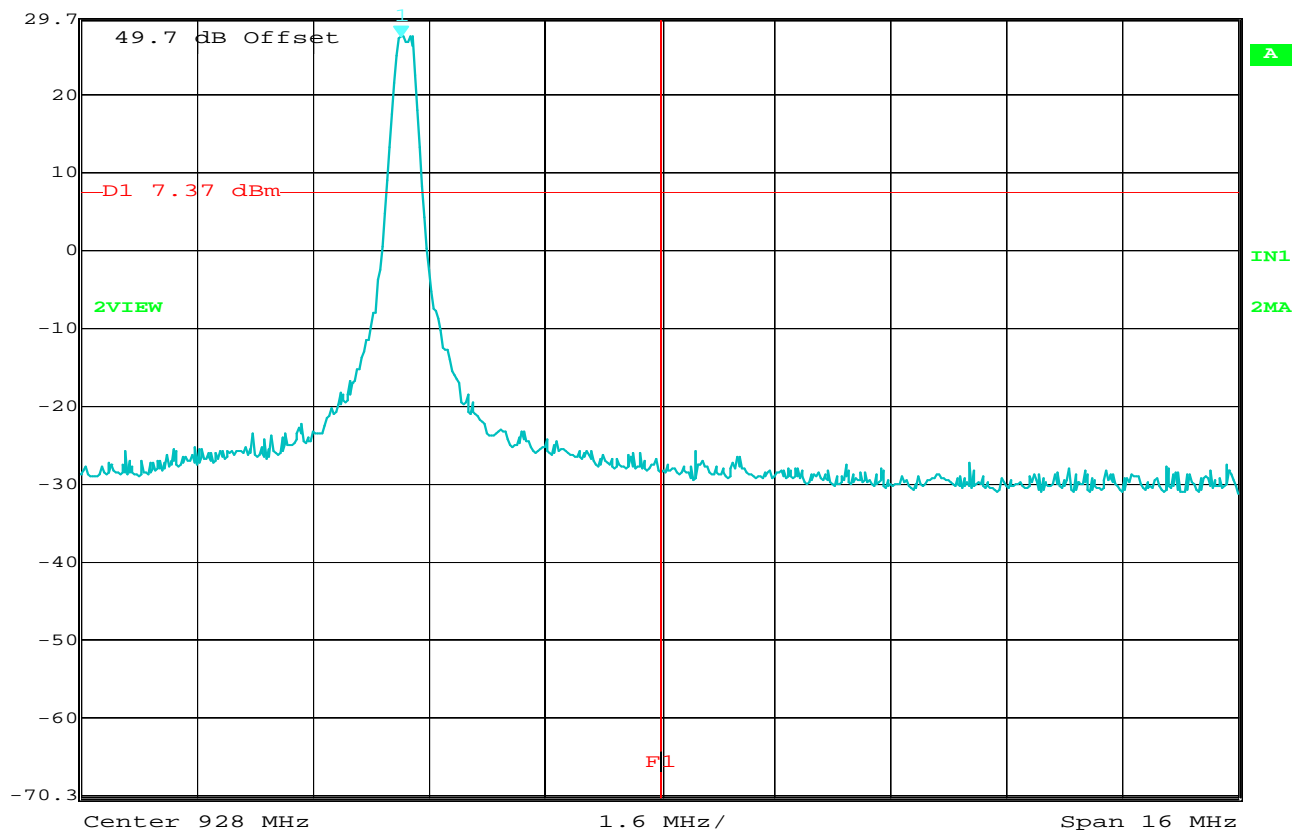

Date: 26.SEP.2014 14:14:01

Band-Edge Requirements

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Transmit @ 924.5MHz, PoE
TEST PARAMETERS : Band-Edge Requirements, ANT1 Port
NOTES : Marker 1 = peak power in a 100kHz bandwidth. Display Line D1 represents the level 20dB down from the peak power in a 100kHz bandwidth. Display Line F1 represents the band-edge (928MHz).
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH

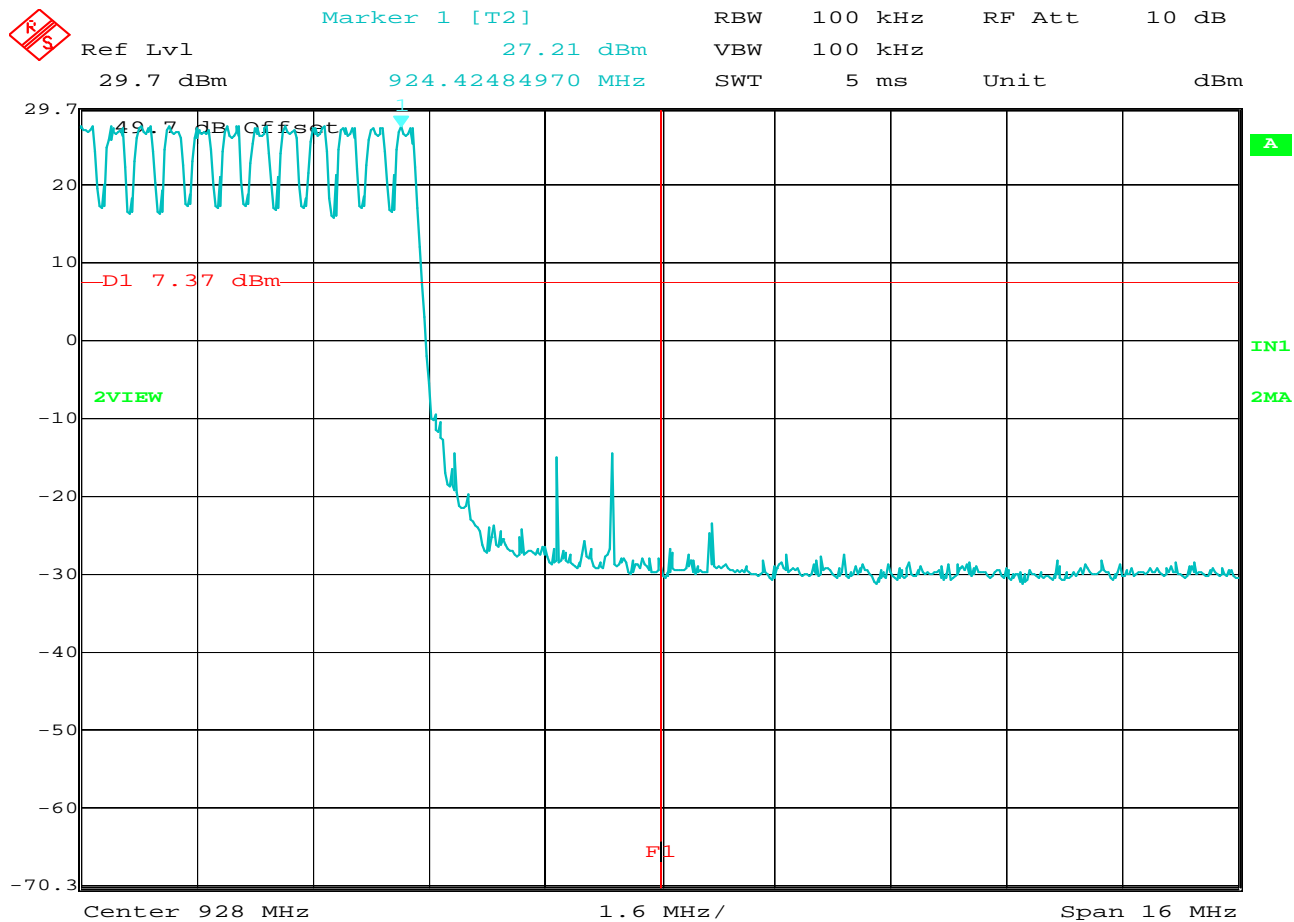

Date: 26.SEP.2014 14:15:41

Band-Edge Requirements

MANUFACTURER : Badger Meter
MODEL NUMBER : Galaxy II Gateway
SERIAL NUMBER : 291400029
TEST MODE : Hopping Enabled, PoE
TEST PARAMETERS : Band-Edge Requirements, ANT1 Port
NOTES : Marker 1 = peak power in a 100kHz bandwidth. Display Line D1 represents the level 20dB down from the peak power in a 100kHz bandwidth. Display Line F1 represents the band-edge (928MHz).
EQUIPMENT USED : RBA0, T2D8, T2S4, T1EH