



## Measurement of RF Interference from an Orion SE Gen II Gateway Transceiver

For : Badger Meter, Inc.  
: 4545 W. Brown Deer Road  
: Milwaukee, WI

P.O. No. : 263574  
Date Tested : November 8-27 and December 23, 2013  
Test Personnel : Richard E. King  
Specification : FCC "Code of Federal Regulations" Title 47, Part 15,  
: Subpart C, Sections 15.207 and 15.247 for  
: Frequency Hopping Spread Spectrum Intentional Radiators  
: Operating within the band 902-928MHz  
: FCC "Code of Federal Regulations" Title 47, Part 15,  
: Subpart 15B, Section 15.107 and 15.109 for Receivers  
: Industry Canada RSS-210  
: Industry Canada RSS-GEN

Test Report By : *RICHARD E. KING*  
Richard E. King  
EMC Engineer

Approved By : *Raymond J. Klouda*  
Raymond J. Klouda  
Registered Professional Engineer of  
Illinois - 44894

## TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1	INTRODUCTION.....	5
1.1	Scope of Tests.....	5
1.2	Purpose.....	5
1.3	Deviations, Additions and Exclusions.....	5
1.4	EMC Laboratory Identification.....	5
1.5	Laboratory Conditions.....	5
2	APPLICABLE DOCUMENTS.....	5
3	EUT SETUP AND OPERATION.....	6
3.1	General Description.....	6
3.1.1	Power Input.....	6
3.1.2	Peripheral Equipment.....	6
3.1.3	Interconnect Cables.....	6
3.1.4	Grounding.....	6
3.2	Operational Mode.....	6
3.3	EUT Modifications.....	6
4	TEST FACILITY AND TEST INSTRUMENTATION.....	6
4.1	Shielded Enclosure.....	6
4.2	Test Instrumentation.....	7
4.3	Calibration Traceability.....	7
4.4	Measurement Uncertainty.....	7
5	TEST PROCEDURES.....	7
5.1	Receiver.....	7
5.1.1	Powerline Conducted Emissions.....	7
5.1.1.1	Requirements.....	7
5.1.1.2	Procedures.....	8
5.1.1.3	Results.....	8
5.1.2	Radiated Measurements.....	8
5.1.2.1	Requirements.....	8
5.1.2.2	Procedures.....	9
5.1.2.3	Results.....	10
5.2	Transmitter.....	10
5.2.1	Powerline Conducted Emissions.....	10
5.2.1.1	Requirements.....	10
5.2.1.1	Procedures.....	10
5.2.1.1	Results.....	11
5.2.2	20dB Bandwidth.....	11
5.2.2.1	Requirements.....	11
5.2.2.2	Procedures.....	11
5.2.2.3	Results.....	11
5.2.3	Carrier Frequency Separation.....	11
5.2.3.1	Requirements.....	11
5.2.3.2	Procedures.....	12
5.2.3.3	Results.....	12
5.2.4	Number of Hopping Frequencies.....	12
5.2.4.1	Requirements.....	12
5.2.4.2	Procedures.....	12

**THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.**



5.2.4.3	Results .....	12
5.2.5	Time of Occupancy .....	12
5.2.5.1	Requirements .....	12
5.2.5.2	Procedures .....	12
5.2.5.3	Results .....	13
5.2.6	Antenna Conducted Peak Output Power .....	13
5.2.6.1	Requirements .....	13
5.2.6.2	Procedures .....	13
5.2.6.3	Results .....	13
5.2.7	Effective Isotropic Radiated Power (EIRP) .....	13
5.2.7.1	Requirements .....	13
5.2.7.2	Procedures .....	13
5.2.7.3	Results .....	14
5.2.8	Antenna Conducted Spurious Emissions .....	14
5.2.8.1	Requirements .....	14
5.2.8.2	Procedures .....	14
5.2.8.3	Results .....	14
5.2.9	Radiated Spurious Emissions Measurements .....	14
5.2.9.1	Requirements .....	14
5.2.9.2	Procedures .....	14
5.2.9.3	Results .....	15
5.2.10	Band Edge Compliance .....	15
5.2.10.1	Requirements .....	15
5.2.10.2	Procedures .....	15
5.2.10.2.1	Low Band Edge .....	15
5.2.10.2.2	High Band Edge .....	16
5.2.10.3	Results .....	17
6	CONCLUSIONS .....	17
7	CERTIFICATION .....	17
8	ENDORSEMENT DISCLAIMER .....	17
9	EQUIPMENT LIST .....	18

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE  
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

## REVISION HISTORY

Revision	Date	Description
—	26 DEC 2013	Initial release

## Measurement of RF Emissions from an Orion SE Gen II Gateway Transceiver

### 1 INTRODUCTION

#### 1.1 Scope of Tests

This document represents the results of the series of radio interference measurements performed on a Badger Meter, Inc. Orion SE Gen II Gateway Transceiver, Serial No. 24012, (hereinafter referred to as the EUT). The EUT is a frequency hopping spread spectrum transceiver. The transceiver was designed to transmit and receive in the 902-928 MHz band using an external antenna. The EUT contained a super-heterodyne type receiver which utilizes an intermediate frequency (IF) of 56.6 kHz. The EUT was manufactured and submitted for testing by Badger Meter, Inc. located in Milwaukee, WI.

#### 1.2 Purpose

The test series was performed to determine if the EUT meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109, for receivers and Subpart C, Sections 15.207 and 15.247 for Intentional Radiators Operating within the 902-928 MHz band.

The test series was also performed to determine if the EUT meets the conducted and radiated RF emission requirements of the Industry Canada Radio Standards Specification, RSS-Gen, Section 7.2.2 and Section 7.2.3 for receivers and the Industry Canada Radio Standards Specification RSS-Gen Section 7.2.2 and RSS-210 Annex 2, section A2.9 for Transmitters.

Testing was performed in accordance with ANSI C63.4-2009.

#### 1.3 Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series.

#### 1.4 EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

#### 1.5 Laboratory Conditions

The temperature at the time of the test was 22°C and the relative humidity was 33%.

### 2 APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subparts B and C, dated October 2013
- ANSI C63.4-2009, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- FCC Public Notice, DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems", Released March 30, 2000
- Industry Canada RSS-210, Issue 8, June 2010, "Spectrum Management and Telecommunications Radio Standards Specification, Low-power License-exempt radio communication devices (All Frequency Bands): Category I Equipment"
- Industry Canada RSS-GEN, Issue 3, June 2010, "Spectrum Management and Telecommunications Radio Standards Specification, General Requirements and Information for the Certification of radio communication equipment"

### 3 EUT SETUP AND OPERATION

#### 3.1 General Description

The EUT is an Orion SE Gen II Gateway Transceiver. A block diagram of the EUT setup is shown as Figure 1.

##### 3.1.1 Power Input

The EUT obtained 24VDC from a Pihong AC Power Adapter, Model No. PSAA60M-240, via 100 feet of 4 wire cable. The Pihong AC Power Adapter was powered with 115V, 60Hz via a 1.8 meter long, 3-wire power cable. For conducted emissions tests, the high and low leads were connected through a line impedance stabilization network (LISN) which was located on the copper ground plane. The network complies with the requirements of Paragraph 4.1.2 of ANSI C63.4-2001.

The EUT was also alternately powered by a Power Over Ethernet (referred to as POE) adapter which was used in testing the EUT while supplied from either supply.

##### 3.1.2 Peripheral Equipment

Equipment	Description
EUT Stand	A 80cm tall stand for mounting the EUT
POE	Power Over Ethernet brick for powering the EUT over Ethernet lines.
Pihong AC Power Adapter	Standard 120VAC 60Hz to DC power brick

##### 3.1.3 Interconnect Cables

No interconnect cables were submitted with the EUT.

##### 3.1.4 Grounding

The EUT was grounded only through the third wire of its input power cord.

#### 3.2 Software

For all tests the EUT had Firmware Version 1.8.2 loaded onto the device to provide correct load characteristics. The EUT requires Software Version 1.5.0.6 to configure the device for testing.

#### 3.3 Operational Mode

For all tests, the EUT was placed on an 80cm high stand. The EUT was energized. The unit was programmed to operate in one of the following modes:

- Transmit at 904.9MHz (Channel 1)
- Transmit at 914.5MHz (Channel 25)
- Transmit at 924.5MHz (Channel 50)
- Receive at 904.9MHz (Channel 1)
- Receive at 914.5MHz (Channel 25)
- Receive at 924.5MHz (Channel 50)
- Frequency Hopping Enabled

#### 3.4 EUT Modifications

No modifications were required for compliance.

### 4 TEST FACILITY AND TEST INSTRUMENTATION

#### 4.1 Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the

exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2009 for site attenuation.

#### 4.2 Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1.

Conducted emission tests were performed with a spectrum analyzer in conjunction with a quasi-peak adapter. Radiated emissions were performed with a spectrum analyzer. This receiver allows measurements with the bandwidths specified by the FCC and with the quasi-peak and average detector functions.

#### 4.3 Calibration Traceability

Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

#### 4.4 Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system. The measurement uncertainty for these tests is presented below:

Conducted Emission Measurements		
Combined Standard Uncertainty	1.07	-1.07
Expanded Uncertainty (95% confidence)	2.1	-2.1

Radiated Emission Measurements		
Combined Standard Uncertainty	2.26	-2.18
Expanded Uncertainty (95% confidence)	4.5	-4.4

## 5 TEST PROCEDURES

### 5.1 Receiver

#### 5.1.1 Powerline Conducted Emissions

##### 5.1.1.1 Requirements

Per the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, 15.107(a) and Industry Canada RSS-Gen Section 7.2.2, all radio frequency voltages on the power lines of a receiver shall be below the values shown below when using a quasi-peak or average detector:

#### CONDUCTED LIMITS FOR A RECEIVER

Frequency MHz	RFI Voltage dBuV(QP)	RFI Voltage dBuV(Average)
0.15-0.5	66 decreasing with logarithm of frequency to 56	56 decreasing with logarithm of frequency to 46
0.5-5	56	46
5-30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: If the levels measured using the QP detector meet both the QP and the Average limits, the EUT is considered to have met both requirements and measurements do not need to be performed using the Average detector.

#### 5.1.1.2 Procedures

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.

- a) The EUT was operated in the Receive mode.
- b) Measurements were first made on the 120V, 60Hz high line of the Pihong AC Power Adapter.
- c) The frequency range from 150 kHz to 30 MHz was broken up into smaller frequency sub-bands.
- d) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- e) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- f) Steps (d) and (e) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits.
- g) Steps (c) through (f) were repeated on the 120V, 60Hz return line of the Pihong AC Power Adapter.

#### 5.1.1.3 Results

The tabular data and the plots of the peak, quasi-peak, and average conducted voltage levels acquired from each input power line with the EUT operated in the Receive mode are shown on pages 24 through 27. All power line conducted emissions measured from the EUT with the additional of a power line filter were within the specification limits.

Photographs of the test configuration which yielded the highest or worst case, conducted emission levels are shown on Figure 2.

Initial testing produced emissions which were in excess of the conducted emissions limits. The EUT was modified with a Schurter EMI filter model 5120.1003.0.

### 5.1.2 Radiated Measurements

#### 5.1.2.1 Requirements

Per the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Section 15.109(a) and Industry Canada RSS-Gen, Section 7.2.3, all radio frequency emissions from a receiver shall be below the limits shown on the following table:



#### RADIATION LIMITS FOR A RECEIVER

Frequency MHz	Distance between EUT And Antenna in Meters	Field Strength uV/m	Field Strength dBuV/m
30-88	3	100	40
88-216	3	150	43.5
216-960	3	200	46
Above 960	3	500	54

Note: The tighter limit shall apply at the edge between the two frequency bands.

#### 5.1.2.2 Procedures

Testing was performed separately on a low, middle, and high channel. The emissions in the frequency range of 30MHz to 5GHz were measured and plotted using a 'screen-dump' utility. Testing was performed with the antenna of the EUT in place.

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2009 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Since a quasi-peak detector and an average detector require long integration times, it is not practical to automatically sweep through the quasi-peak and average levels. Therefore, radiated emissions from the EUT were first scanned using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured using the quasi-peak detector or average detector.

The broadband measuring antenna was positioned at a 3 meter distance from the EUT. The frequency range from 30MHz to 1 GHz was investigated using a peak detector function with the bilog antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The frequency range from 1 GHz to 5GHz was investigated using a peak detector function with the double ridged waveguide antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The maximum levels for each antenna polarization were plotted.

Final radiated emissions were performed on all significant broadband and narrowband emissions found in the preliminary sweeps using the following methods:

- 1) Measurements from 30MHz to 1 GHz were made using a quasi-peak detector and a broadband bilog antenna. Measurements above 1 GHz were made using an average detector and a broadband double ridged waveguide antenna.
- 2) To ensure that maximum or worst case, emission levels were measured, the following steps were taken:
  - a) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
  - b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
  - c) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization

to maximize the readings.

- d) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

### 5.1.2.3 Results

The preliminary plots are presented on pages 28 through 39. The plots are presented for a reference only, and are not used to determine compliance. The final radiated levels are presented on pages 40 through 45. As can be seen from the data, all emissions measured from the EUT were within the specification limits.

Photographs of the test configuration which yielded the highest or worst case, radiated emission levels are shown on Figure 3 and Figure 4.

## 5.2 Transmitter

### 5.2.1 Powerline Conducted Emissions

#### 5.2.1.1 Requirements

Per the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Per 15.207(a) and Industry Canada RSS-Gen section 7.2.2, all radio frequency voltages on the power lines of a transmitter shall be below the values shown below when using a quasi-peak or average detector:

Frequency MHz	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 – 0.5	66 decreasing with logarithm of frequency to 56	56 decreasing with logarithm of frequency to 46
0.5 – 5	56	46
5 – 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: If the levels measured using the QP detector meet both the QP and the Average limits, the test item is considered to have met both requirements and measurements do not need to be performed using the Average detector.

#### 5.2.1.1 Procedures

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.

- a) The EUT was operated in the Transmit at 914.5MHz mode.
- b) Measurements were first made on the 120V, 60Hz high line of the Phihong AC Adapter.
- c) The frequency range from 150 kHz to 30 MHz was broken up into smaller frequency sub-bands.
- d) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- e) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)

- f) Steps (d) and (e) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150 kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits.
- g) Steps (c) through (f) were repeated on the 120V, 60Hz return line of the Phihong AC Adapter.
- h) Steps (c) through (f) were repeated on the POE power adaptor.

#### 5.2.1.1 Results

The plots and tabular data of the peak, quasi-peak, and average conducted voltage levels acquired from each input power line with the EUT operated in the Transmit at 914.5MHz mode are shown on pages 46 through 52. All power line conducted emissions measured from the EUT with addition of filter were within the specification limits.

Photographs of the test configuration which yielded the highest or worst case, conducted emission levels are shown on Figure 2.

Initial testing produced emissions which were in excess of the conducted emissions limits. The EUT was modified with a Schurter EMI filter model 5120.1003.0.

### 5.2.2 20dB Bandwidth

#### 5.2.2.1 Requirements

Per 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928 MHz band, the 20 dB bandwidth shall be measured for determination of the carrier frequency separation limits and must not exceed 500 kHz. If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels. If the 20dB bandwidth of the hopping channel is 250 kHz or greater (but not greater than 500 kHz), the system shall use at least 25 hopping channels.

#### 5.2.2.2 Procedures

The output of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to  $\geq 1\%$  of the 20 dB BW. The span was set to approximately 2 to 3 times the 20 dB bandwidth.

The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.

#### 5.2.2.3 Results

The plots on pages 53 through 55 show that the maximum 20 dB bandwidth was 112.2 kHz. The 99% bandwidth was measured to be 110.2 kHz. Therefore, since the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels.

### 5.2.3 Carrier Frequency Separation

#### 5.2.3.1 Requirements

Per section 15.247 (a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 5.2.3.2 Procedures

The output of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to  $> 1\%$  of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the peaks of at least two adjacent channels. When the trace had stabilized after multiple scans, the marker-delta function was used to determine the separation between the peaks of the adjacent channels. The analyzer's display was plotted using a 'screen dump' utility.

#### 5.2.3.3 Results

Page 55 shows the carrier frequency separation. As can be seen from this plot, the carrier frequency separation is 400.8 kHz, which is greater than the 20dB bandwidth.

### 5.2.4 Number of Hopping Frequencies

#### 5.2.4.1 Requirements

Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928MHz band, the 20dB bandwidth shall be measured for determination of the carrier frequency separation limits and must not exceed 500 kHz. If the 20dB bandwidth of the hopping channel is less than 250kHz, the system shall use at least 50 hopping channels. If the 20dB bandwidth of the hopping channel is 250kHz or greater (but not greater than 500kHz), the system shall use at least 25 hopping channels.

#### 5.2.4.2 Procedures

The output of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to  $\geq 1\%$  of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the entire frequency band of operation.

The EUT's signal was allowed to stabilize after multiple scans. The number of hopping frequencies was counted. The analyzer's display was plotted using a 'screen dump' utility.

#### 5.2.4.3 Results

Page 56 shows the number of hopping frequencies. As can be seen from this plot, the number of hopping frequencies is 50 which is equal to minimum number of required hopping frequencies for systems with a 20dB bandwidth less than 250kHz.

### 5.2.5 Time of Occupancy

#### 5.2.5.1 Requirements

Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928MHz band, if the 20dB bandwidth of the hopping channel is less than 250kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

#### 5.2.5.2 Procedures

The output of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to 100 kHz. The peak detector and 'Max-Hold' function were engaged. With the span set to 0Hz, the sweep time was adjusted to capture a single event in order to measure the dwell time per hop. The analyzer's display was plotted using a 'screen dump' utility. Then, the sweep time was expanded to 20 seconds to capture the number of hops in the appropriate sweep time. A single sweep was

made. The analyzer's display was plotted using a 'screen dump' utility.

The dwell time in the specified time period was then calculated from dwell time per hop multiplied by the number of hops in the specified time period.

#### 5.2.5.3 Results

Pages 58 and 59 show the plots for the time of occupancy (dwell time). As can be seen from the plots, the time of occupancy can be determined by (dwell time/hop) multiplied by (# of hops). This calculated value is equal to 0.398 seconds, which is less than the 0.4 seconds maximum allowed.

### 5.2.6 Antenna Conducted Peak Output Power

#### 5.2.6.1 Requirements

Per section 15.247(b)(2), for frequency hopping systems operating in the 902-928MHz band and employing at least 50 hopping channels, the maximum peak output conducted power shall not be greater than 1W (30dBm). Per section 15.247(b)(4), this limit is based on the use of antennas with directional gains that do not exceed 6dBi.

#### 5.2.6.2 Procedures

The output of the EUT was connected to the spectrum analyzer through 50dB of attenuation. With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The 'Max-Hold' function was engaged. The maximum meter reading was recorded. The peak power output was calculated for the low, middle and high hopping frequencies.

#### 5.2.6.3 Results

The results are presented on pages 60 through 62. The maximum peak conducted output power from the transmitter was 758mW (28.97dBm) which is below the 1 Watt limit.

### 5.2.7 Effective Isotropic Radiated Power (EIRP)

#### 5.2.7.1 Requirements

Per section 15.247(b)(2), for frequency hopping systems operating in the 902-928MHz band and employing at least 50 hopping channels, the maximum peak output conducted power shall not be greater than 1W (30dBm). Per section 15.247(b)(4), this limit is based on the use of antennas with directional gains that do not exceed 6dBi. Since the limit allows for a 6dBi antenna gain, the maximum EIRP can be increased by 6dB to 4 W (36 dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below 30dBm by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 5.2.7.2 Procedures

The EUT was placed on the stand and set to transmit. A dipole antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle and high hopping frequencies.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a second dipole antenna was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss, as required. The peak power output was calculated for low, middle, and high hopping frequencies.

### 5.2.7.3 Results

The results are presented on page 63. The maximum EIRP measured from the transmitter was 35.6 dBm or 3.63 Watts which is below the 4 Watt de facto limit.

## 5.2.8 Antenna Conducted Spurious Emissions

### 5.2.8.1 Requirements

Per section 15.247(c), the spurious emissions in any 100 kHz BW outside the frequency band must be at least 20dB below the highest 100 kHz BW level measured within the band.

### 5.2.8.2 Procedures

The output of the EUT was connected to the spectrum analyzer through 50 dB of attenuation. The frequency hopping function was disabled. The resolution bandwidth (RBW) was set to 100 kHz. The peak detector and 'Max-Hold' function were engaged. The emissions in the frequency range from 30 MHz to were observed and plotted separately with the EUT transmitting at low, middle and high hopping frequencies.

### 5.2.8.3 Results

The results of the antenna conducted emissions levels were plotted. These plots are presented on pages 64 through 66. These plots show that the spurious emissions were at least 20 dB below the level of the fundamental.

## 5.2.9 Radiated Spurious Emissions Measurements

### 5.2.9.1 Requirements

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a). Paragraph 15.209(a) has the following radiated emission limits:

Frequency MHz	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

### 5.2.9.2 Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 10.0GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 10.0GHz.

For all emissions in the restricted bands, the following procedure was used:

- The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log



antenna was positioned at a 3 meter distance from the EUT. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.

- b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
  - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
  - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
  - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
  - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
- d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).
- f) Next, for all radiated emissions measurements above 1 GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken. If the dwell time per channel of the hopping signal is less than 100msec, then the reading obtained with the 10 Hz video bandwidth may be further adjusted by a "duty cycle correction factor", derived from  $20 \cdot \log(\text{dwell time}/100\text{msec})$ . These readings must be no greater than the limits specified in 15.209(a).

#### 5.2.9.3 Results

Preliminary radiated emissions plots with the EUT transmitting at low, middle, and high hopping frequencies are shown on pages 67 through 78. Final radiated emissions data are presented on data pages 84 through 84. As can be seen from the data, all emissions measured from the EUT were within the specification limits. Photographs of the test configuration which yielded the highest or worst case radiated emission levels are shown on Figures 3 and Figure 4.

### 5.2.10 Band Edge Compliance

#### 5.2.10.1 Requirements

Per section 15.247(d), the emissions at the band-edges must be at least 20dB below the highest level measured within the band but attenuation below the general limits listed in 15.209(a) is not required.

#### 5.2.10.2 Procedures

##### 5.2.10.2.1 Low Band Edge

- 1) The output of the EUT was connected to the spectrum analyzer through 50dB of attenuation..
- 2) A broadband measuring antenna was placed at a test distance of 3 meters from the EUT.
- 3) The EUT was set to transmit continuously at the channel closest to the low band-edge (hopping function disabled).
- 4) The EUT was maximized for worst case emissions at the measuring antenna. The maximum meter reading was recorded.
- 5) To determine the band edge compliance, the following spectrum analyzer settings were used:
  - a. Center frequency = low band-edge frequency.
  - b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
  - c. Resolution bandwidth (RBW) =100kHz.
  - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
  - e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.)
  - f. The analyzer's display was plotted using a 'screen dump' utility.
- 6) Step 5) was repeated with the frequency hopping function enabled.

#### 5.2.10.2.2 High Band Edge

- 1) The output of the EUT was connected to the spectrum analyzer through 50dB of attenuation.
- 2) A broadband measuring antenna was placed at a test distance of 3 meters from the EUT.
- 3) The EUT was set to transmit continuously at the channel closest to the high band-edge (hopping function disabled).
- 4) The EUT was maximized for worst case emissions at the measuring antenna.
- 5) To determine the band edge compliance, the following spectrum analyzer settings were used:
  - a. Center frequency = high band-edge frequency.
  - b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
  - c. Resolution bandwidth = 100kHz.
  - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
  - e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the right of the center frequency (band-edge) must be below the display line.)
  - f. The analyzer's display was plotted using a 'screen dump' utility.
- 6) Step 5) was repeated with the frequency hopping function enabled.





#### 5.2.10.3 Results

Pages 85 through 88 show the radiated band-edge compliance results. As can be seen from these plots, the emissions at the low end band edge and the high end band edge are within the 20 dB down limits.

## 6 CONCLUSIONS

It was determined that the Badger Meter, Inc. Orion SE Gen II Gateway frequency hopping spread transceiver, Serial No. 24012, with the Schurter EMI filter model 5120.1003.0 in place, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109 for receivers and Subpart C, Sections 15.207 and 15.247 for Intentional Radiators Operating within the 902-928 MHz band, when tested per ANSI C63.4-2009.

It was also determined that the Badger Meter, Inc. Orion SE Gen II Gateway frequency hopping spread spectrum transceiver, Serial No. 24012, with the Schurter EMI filter model 5120.1003.0 in place, did fully meet the conducted and radiated RF emission requirements of the Industry Canada Radio Standards Specification, RSS-Gen, Section 7.2.2 and Section 7.2.3 for receivers and the Industry Canada Radio Standards Specification RSS-Gen Section 7.2.2 and RSS-210 Annex 2, section A2.9 for transmitters, when tested per ANSI C63.4-2009.

## 7 CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test date. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

## 8 ENDORSEMENT DISCLAIMER

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.



## 9 EQUIPMENT LIST

**Table 9-1 Equipment List**

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW3	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-35-120-5R0-10-12	PL2924	1GHZ-20GHZ	10/8/2013	10/8/2014
CDX4	COMPUTER	ELITE CUSTOM	WINDOW 7 PRO			NOTE 1	
CDX8	COMPUTER	ELITE	WORKSTATION			N/A	
CDY0	WORKSTATION	ELITE	WORKSTATION			N/A	
CMA1	Controllers	EMCO	2090	9701-1213	---	N/A	
GCR0	SIGNAL GENERATOR	HEWLETT PACKARD	8647A	3414U00454	0.25-1000MHZ	8/12/2013	8/12/2014
GRB0	1MHZ, LISN SIGNAL CHECKER	ELITE	LISNCHKR1M	1	1MHZ	1/9/2013	1/9/2014
NTA2	BILOG ANTENNA	TESEQ	6112D	28040	25-1000MHz	8/30/2013	8/30/2014
NTA3	BILOG ANTENNA	TESEQ	6112D	28040	25-1000MHz	2/15/2013	2/15/2014
NWQ1	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS-LINDGREN	3117	66655	1GHZ-18GHZ	3/18/2013	3/18/2014
NWQ2	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66659	1GHZ-18GHZ	3/18/2013	3/18/2014
PLF1	CISPR16 50UH LISN	ELITE	CISPR16/70A	001	.15-30MHz	6/18/2013	6/18/2014
PLF3	CISPR16 50UH LISN	ELITE	CISPR16/70A	003	.15-30MHz	6/18/2013	6/18/2014
RAKG	RF SECTION	HEWLETT PACKARD	85462A	3549A00284	0.009-6500MHZ	3/20/2013	3/20/2014
RAKH	RF FILTER SECTION	HEWLETT PACKARD	85460A	3448A00324	---	3/12/2013	3/12/2014
RAKI	RF SECTION	HEWLETT PACKARD	85462A	3411A00181	0.009-6500MHZ	3/15/2013	3/15/2014
RAKJ	RF FILTER SECTION	HEWLETT PACKARD	85460A	3330A00154	---	3/15/2013	3/15/2014
RBA0	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB26	100145	20HZ-26.5GHZ	3/12/2013	3/12/2014
RBA1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB26	100146	20HZ-26.5GHZ	3/4/2013	3/4/2014
T1E0	10DB 25W ATTENUATOR	WEINSCHEL	46-10-43	AU1882	DC-18GHZ	7/29/2013	7/29/2014
T2D5	20DB, 25W ATTENUATOR	WEINSCHEL	46-20-43	AY9244	DC-18GHZ	1/8/2013	1/8/2014
T2S3	20DB 25W ATTENUATOR	WEINSCHEL	46-20-34	BV3544	DC-18GHZ	11/7/2013	11/7/2014
T2SH	20DB 25W ATTENUATOR	WEINSCHEL	46-20-34	CD5017	DC-18GHZ	1/2/2013	1/2/2014
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	
WQB0	RE_8546A						
WQC0	HF_8546A						
XLTO	5W, 50 OHM TERMINATION	JFW INDUSTRIES	JFW 50T-052	001	DC-2GHZ	1/8/2013	1/8/2014
XPQ2	HIGH PASS FILTER	K&L MICROWAVE	4IH30-1804/T10000-0	3	1.8-10GHZ	10/25/2013	10/25/2014

I/O: Initial Only N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

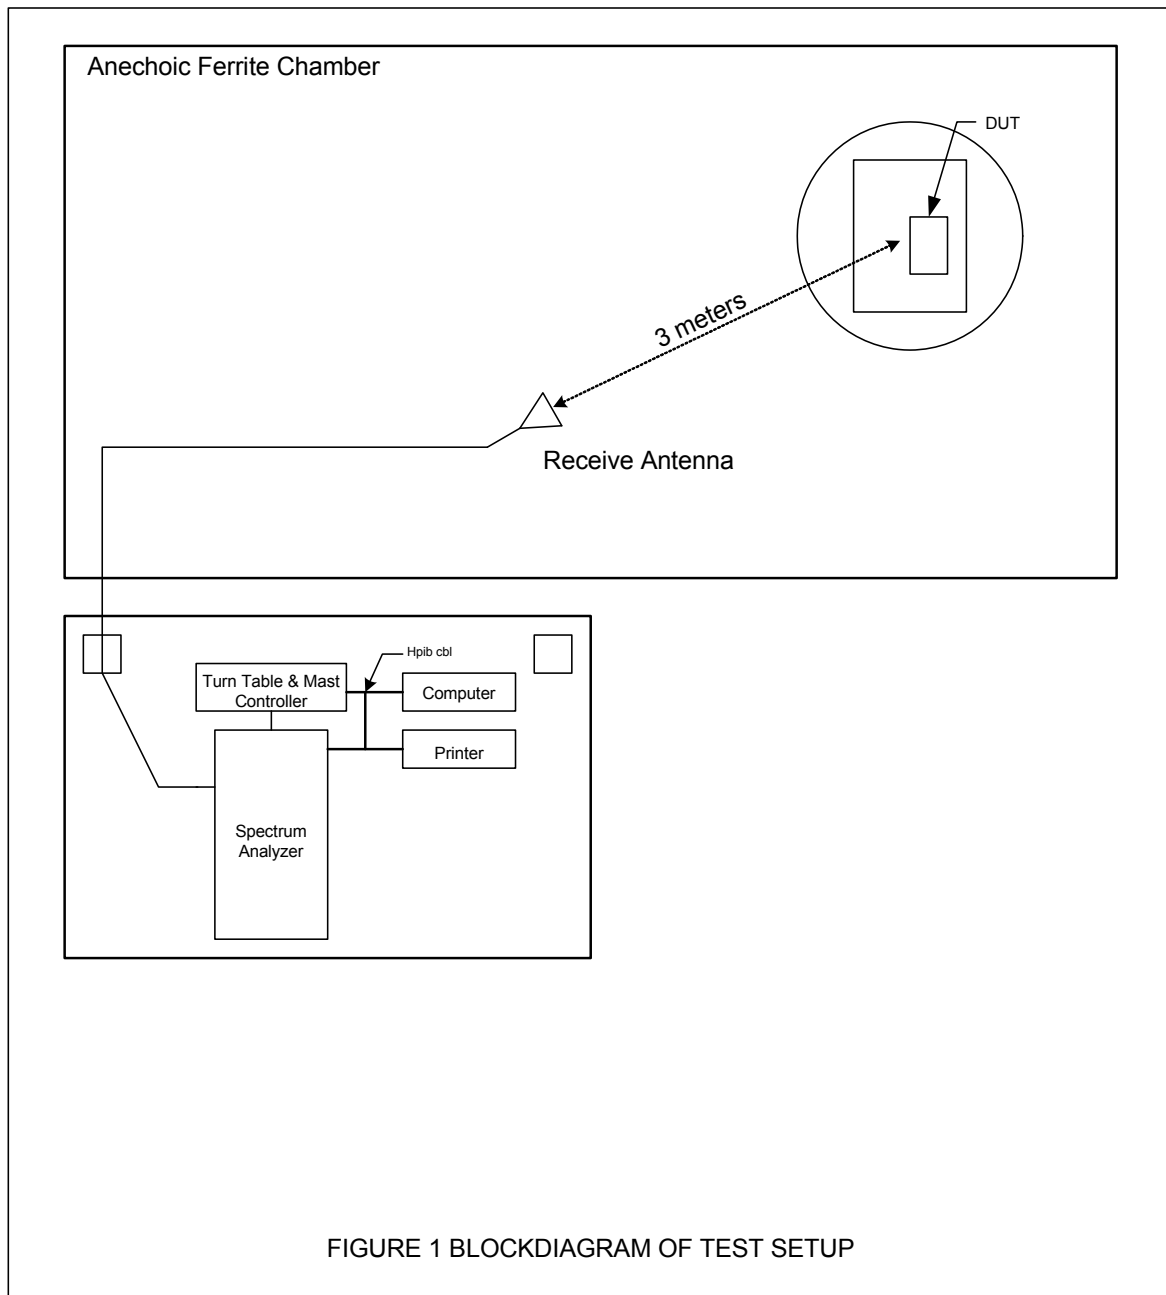


Figure 2




Test Setup for Conducted Emissions



Test Setup for Conducted Emissions (L1)

Figure 3

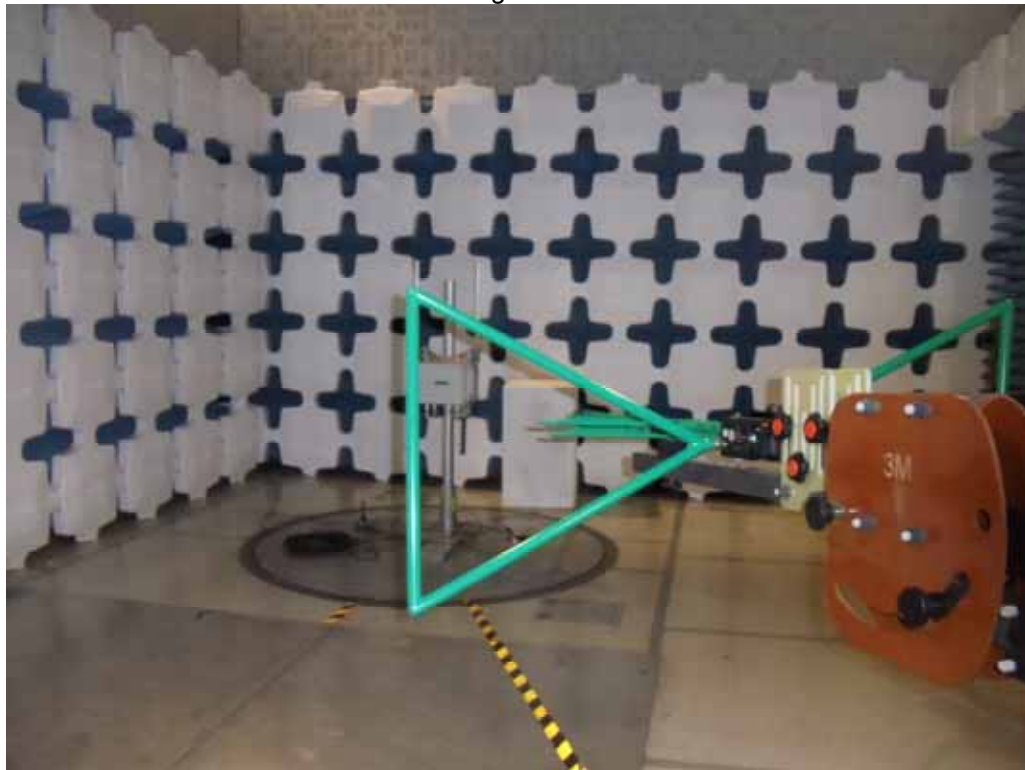

Test Setup for Radiated Emissions – 30MHz to 1 GHz, Horizontal Polarization




Test Setup for Radiated Emissions – 30MHz to 1 GHz, Vertical Polarization



Figure 4



Test Setup for Radiated Emissions – 1 GHz to 10GHz, Horizontal Polarization

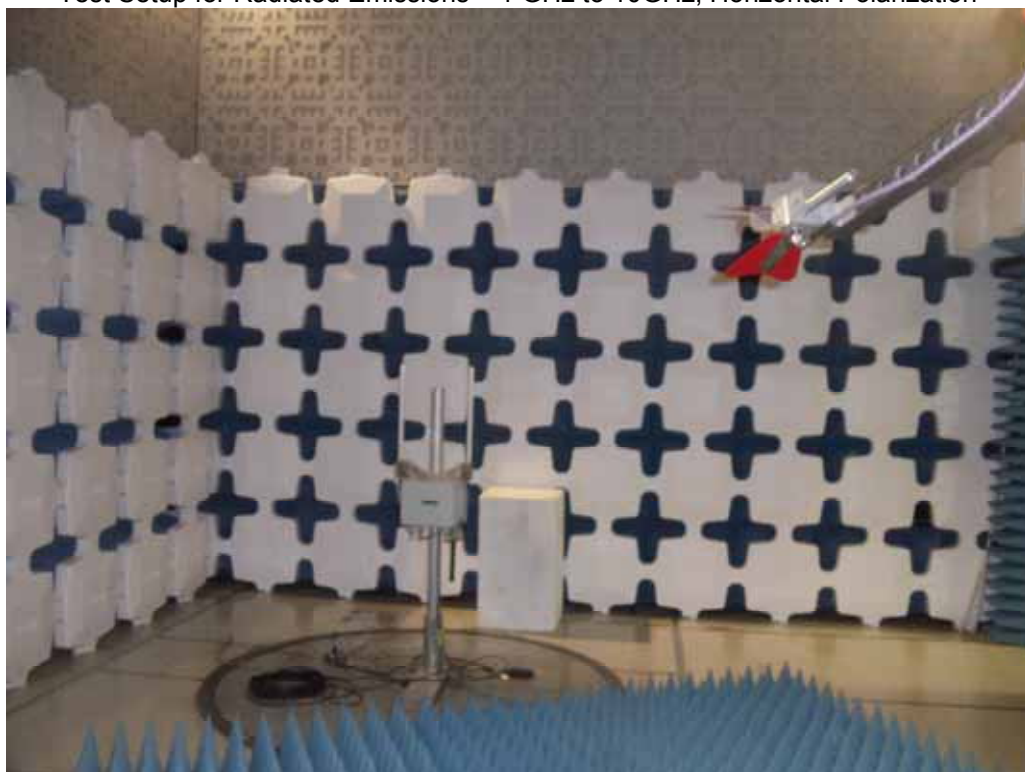

Test Setup for Radiated Emissions – 1 GHz to 10GHz, Vertical Polarization

Figure 5



Direct Antenna Port Setup



## FCC Part 15 Subpart B Conducted Emissions Test

### Significant Emissions Data

VB\*\* 02/09/2011

Manufacturer : BADGER METER INC.  
Model : ORION SE GEN II GATEWAY  
DUT Mode : Rx  
Line Tested : L1  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes :  
Test Engineer : R. King  
Limit : Class B  
Test Date : Nov 27, 2013 02:24:22 PM  
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.186	54.5	64.2		40.5	54.2	
0.491	33.4	56.2		16.4	46.2	
0.500	32.0	56.0		15.4	46.0	
0.790	21.2	56.0		7.9	46.0	
1.979	7.3	56.0		2.3	46.0	
2.619	9.9	56.0		4.5	46.0	
4.958	16.2	56.0		8.6	46.0	
7.138	17.0	60.0		9.2	50.0	
11.646	21.0	60.0		12.5	50.0	
29.435	37.5	60.0		26.0	50.0	






## FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VB\*\* 02/09/2011

Manufacturer : BADGER METER INC.  
Model : ORION SE GEN II GATEWAY  
DUT Mode : Rx  
Line Tested : L1  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes :  
Test Engineer : R. King  
Limit : Class B  
Test Date : Nov 27, 2013 02:24:22 PM

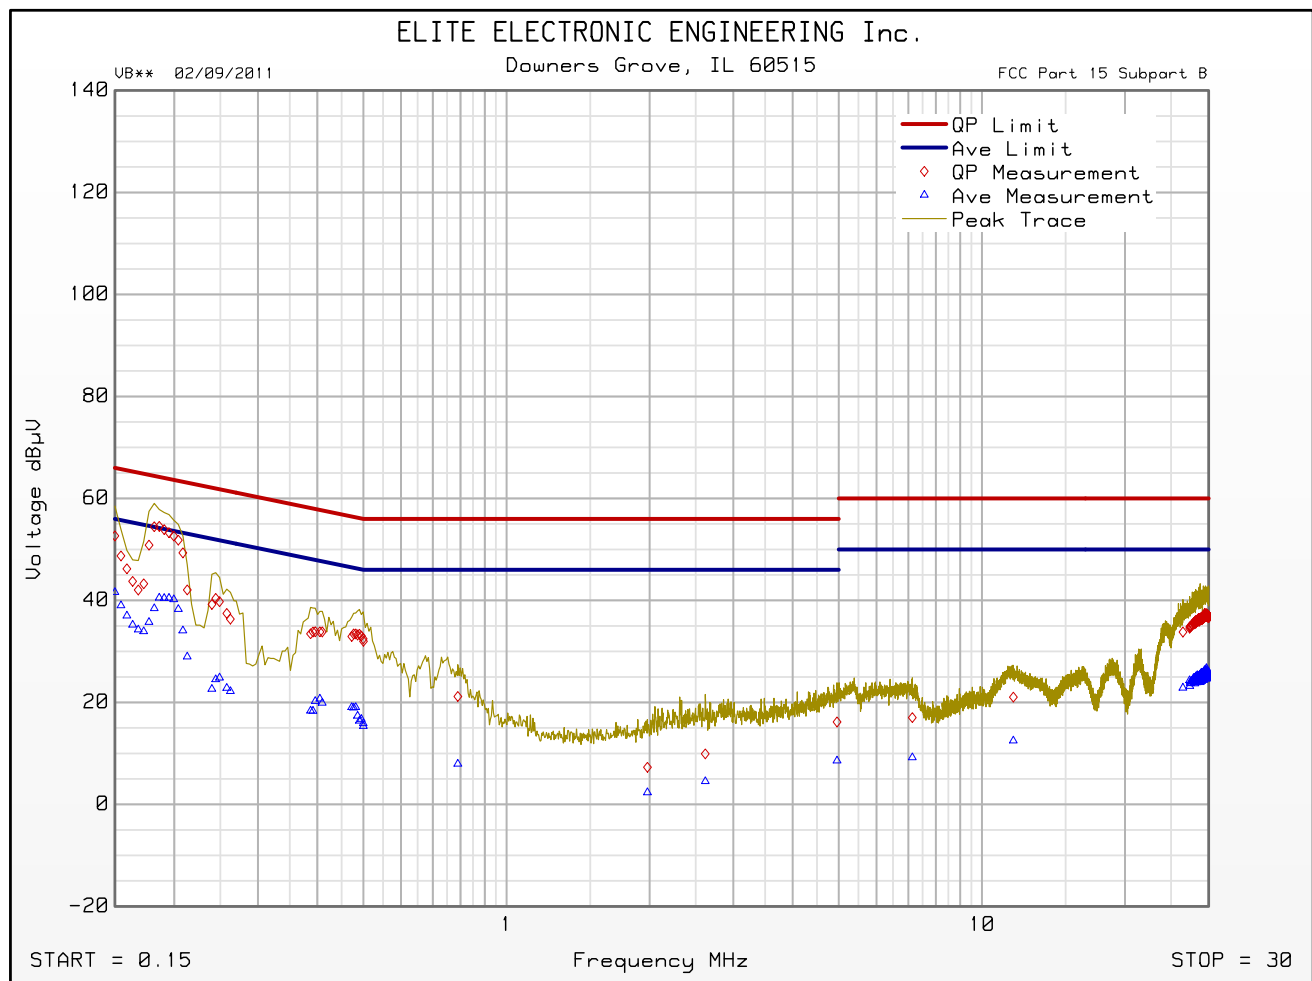

Emissions Meet QP Limit  
Emissions Meet Ave Limit



## FCC Part 15 Subpart B Conducted Emissions Test

### Significant Emissions Data

VB\*\* 02/09/2011

Manufacturer : BADGER METER INC.  
Model : ORION SE GEN II GATEWAY  
DUT Mode : Rx  
Line Tested : L2  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes :  
Test Engineer : R. King  
Limit : Class B  
Test Date : Nov 27, 2013 02:13:00 PM  
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit


Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.186	54.0	64.2		40.0	54.2	
0.486	33.2	56.2		17.6	46.2	
0.500	31.5	56.0		16.2	46.0	
0.795	20.9	56.0		8.2	46.0	
1.979	7.3	56.0		2.8	46.0	
2.403	9.0	56.0		3.7	46.0	
4.990	16.6	56.0		8.7	46.0	
6.521	17.4	60.0		9.3	50.0	
16.196	21.9	60.0		14.1	50.0	
29.615	38.2	60.0		26.5	50.0	




## FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data


VB\*\* 02/09/2011


Manufacturer : BADGER METER INC.  
Model : ORION SE GEN II GATEWAY  
DUT Mode : Rx  
Line Tested : L2  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes :  
Test Engineer : R. King  
Limit : Class B  
Test Date : Nov 27, 2013 02:13:00 PM

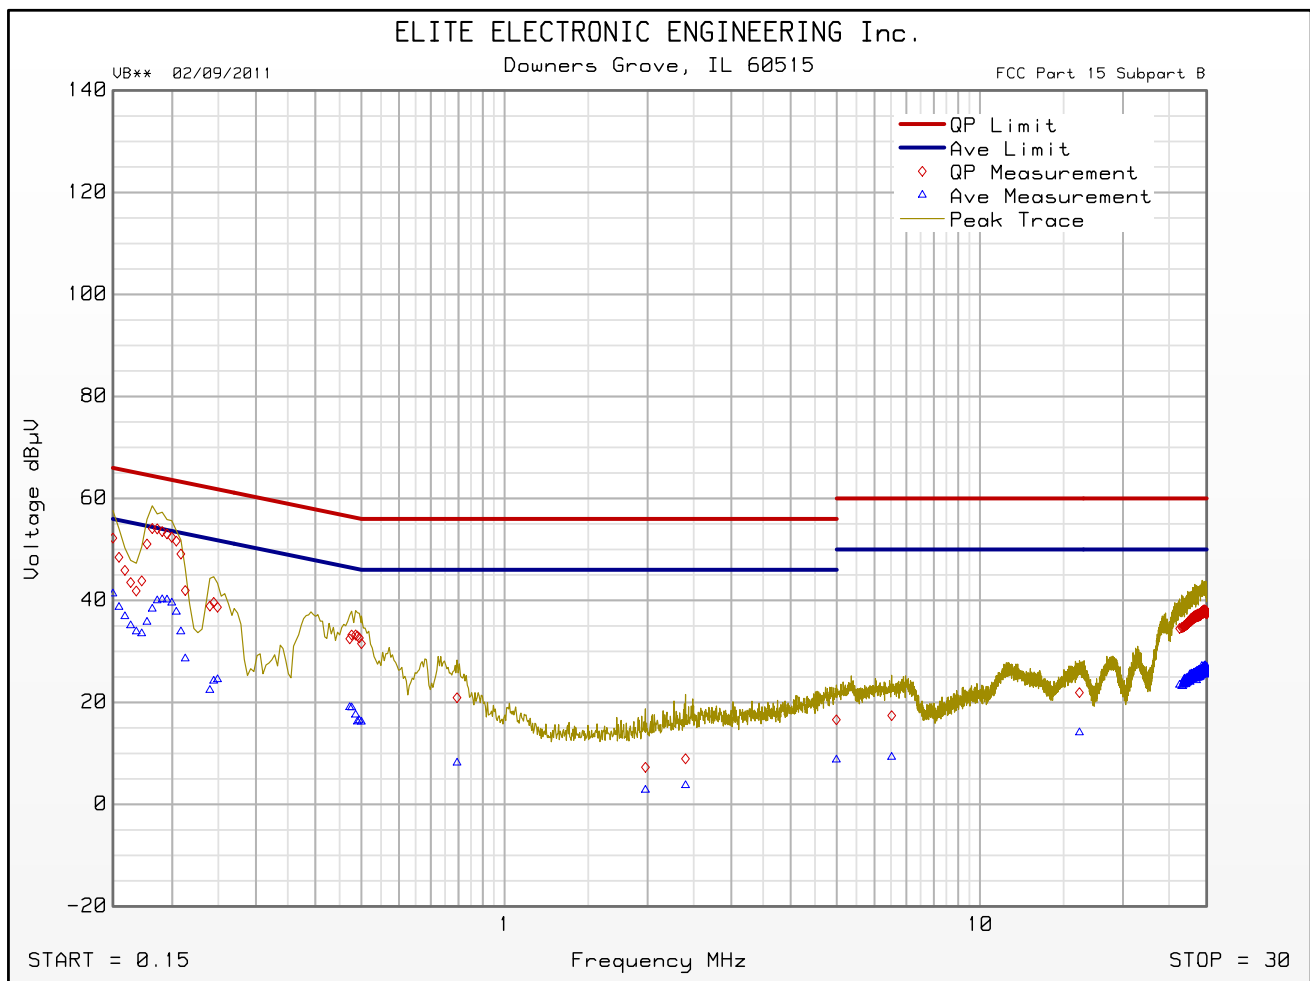



Emissions Meet QP Limit  
Emissions Meet Ave Limit

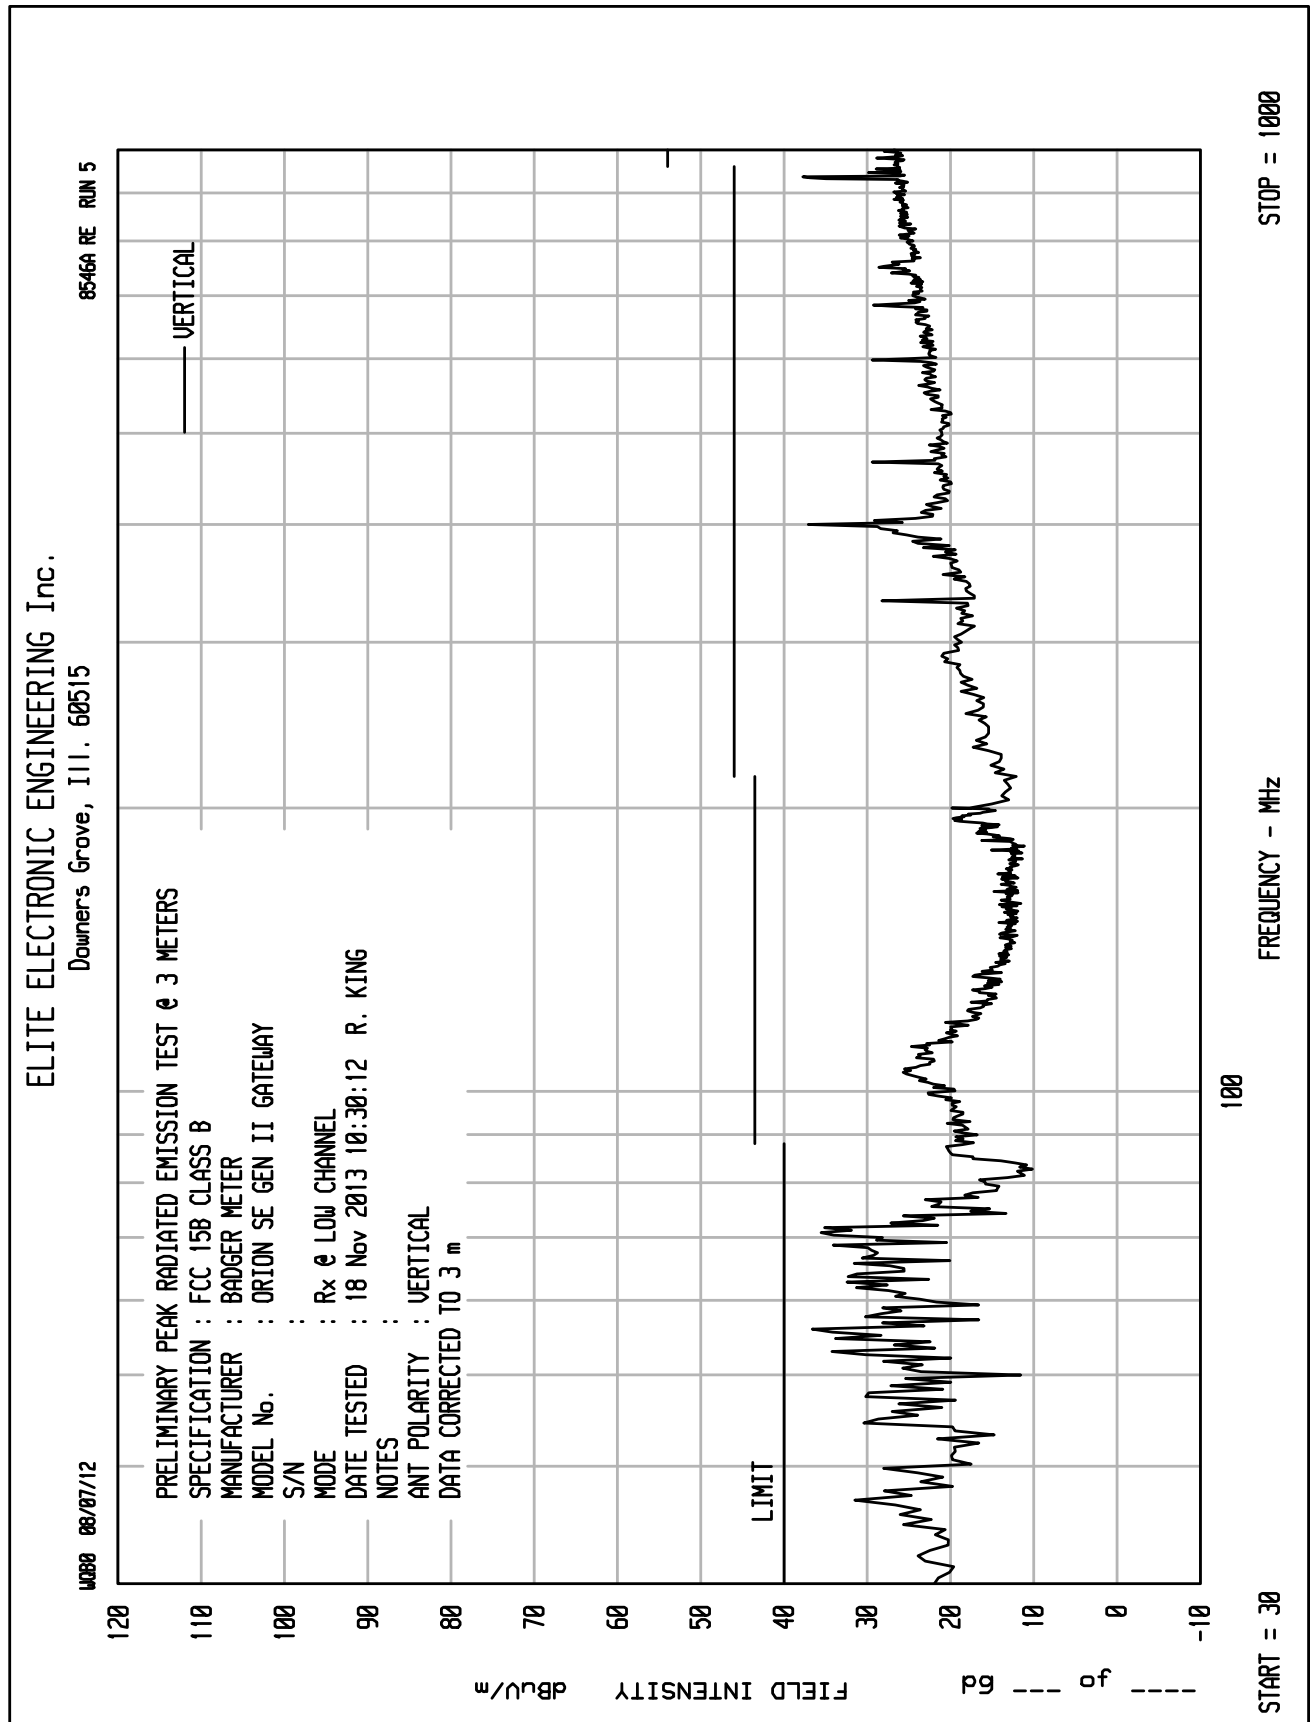

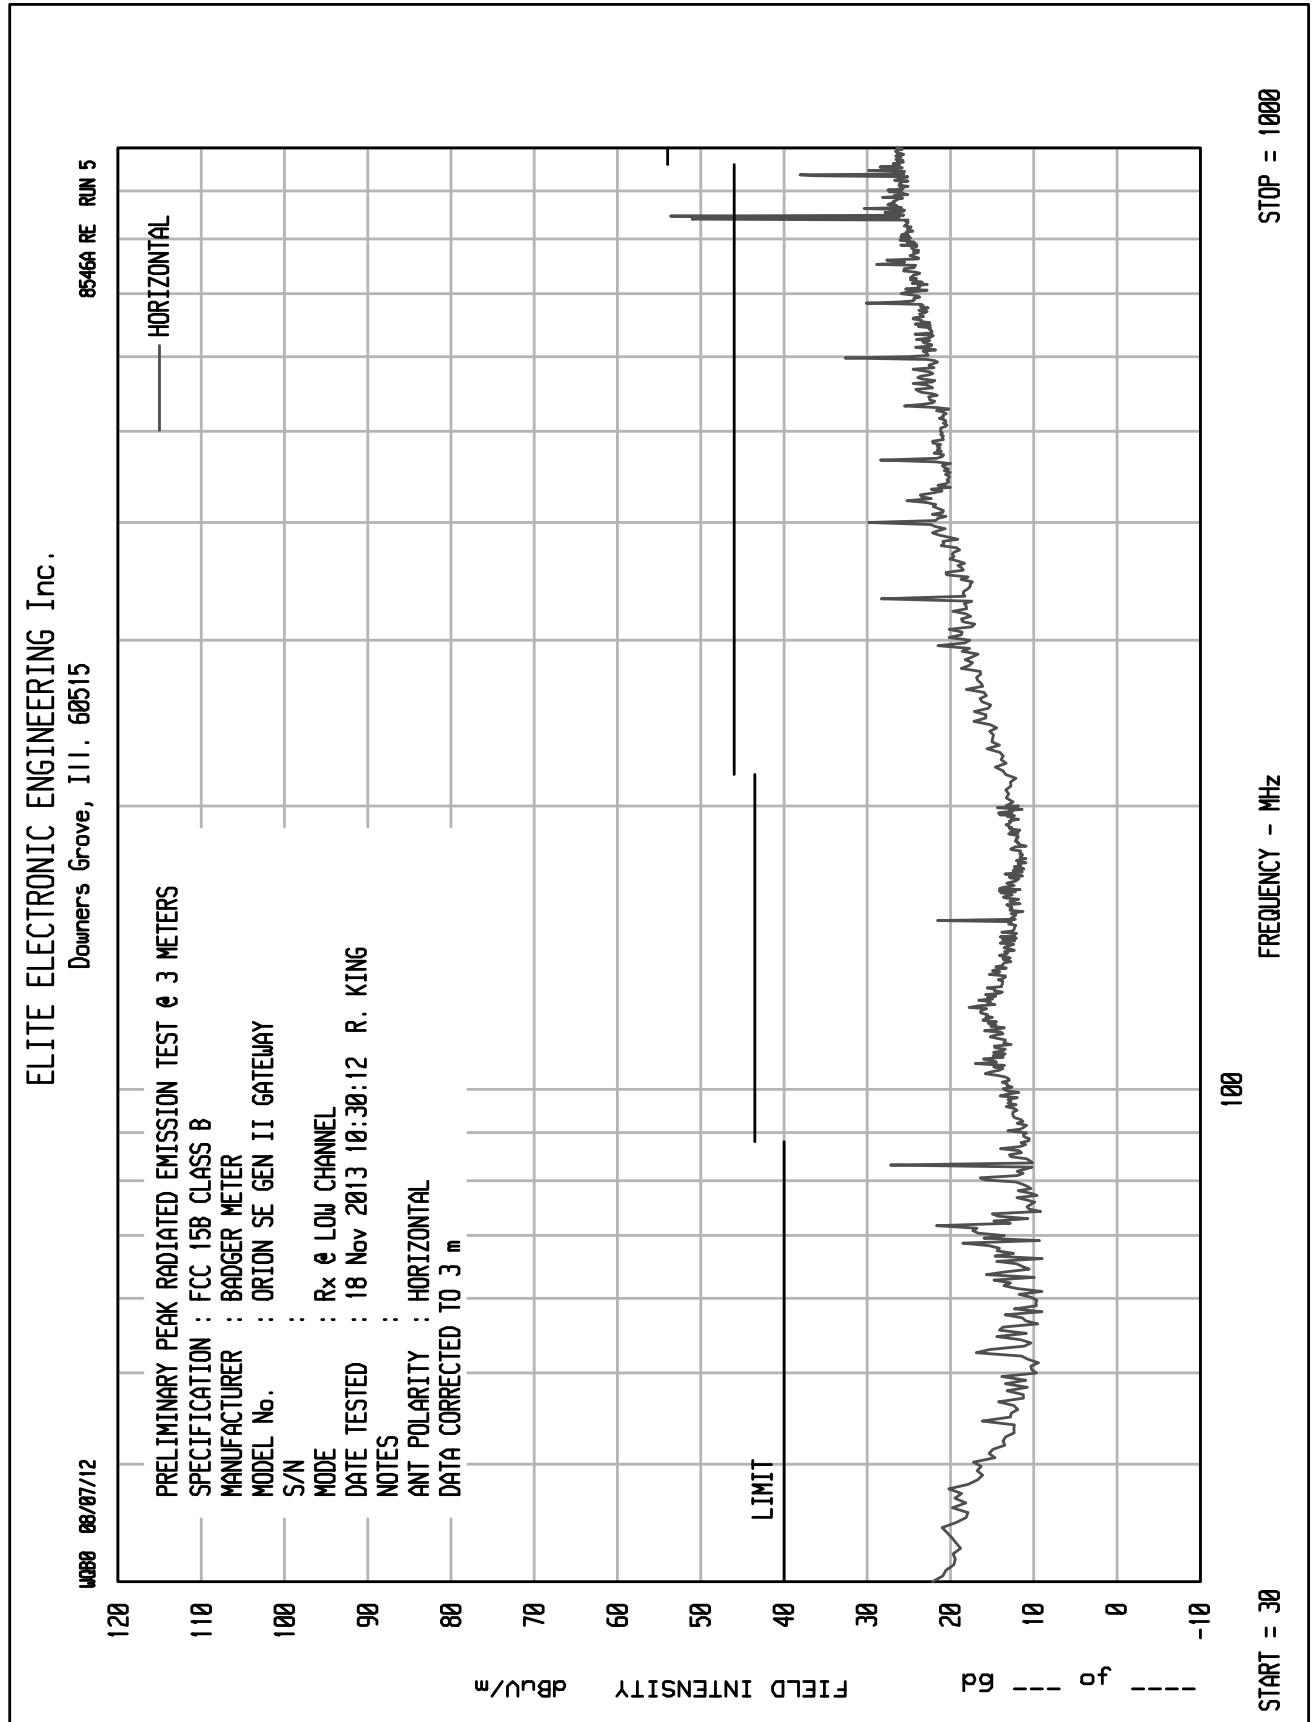


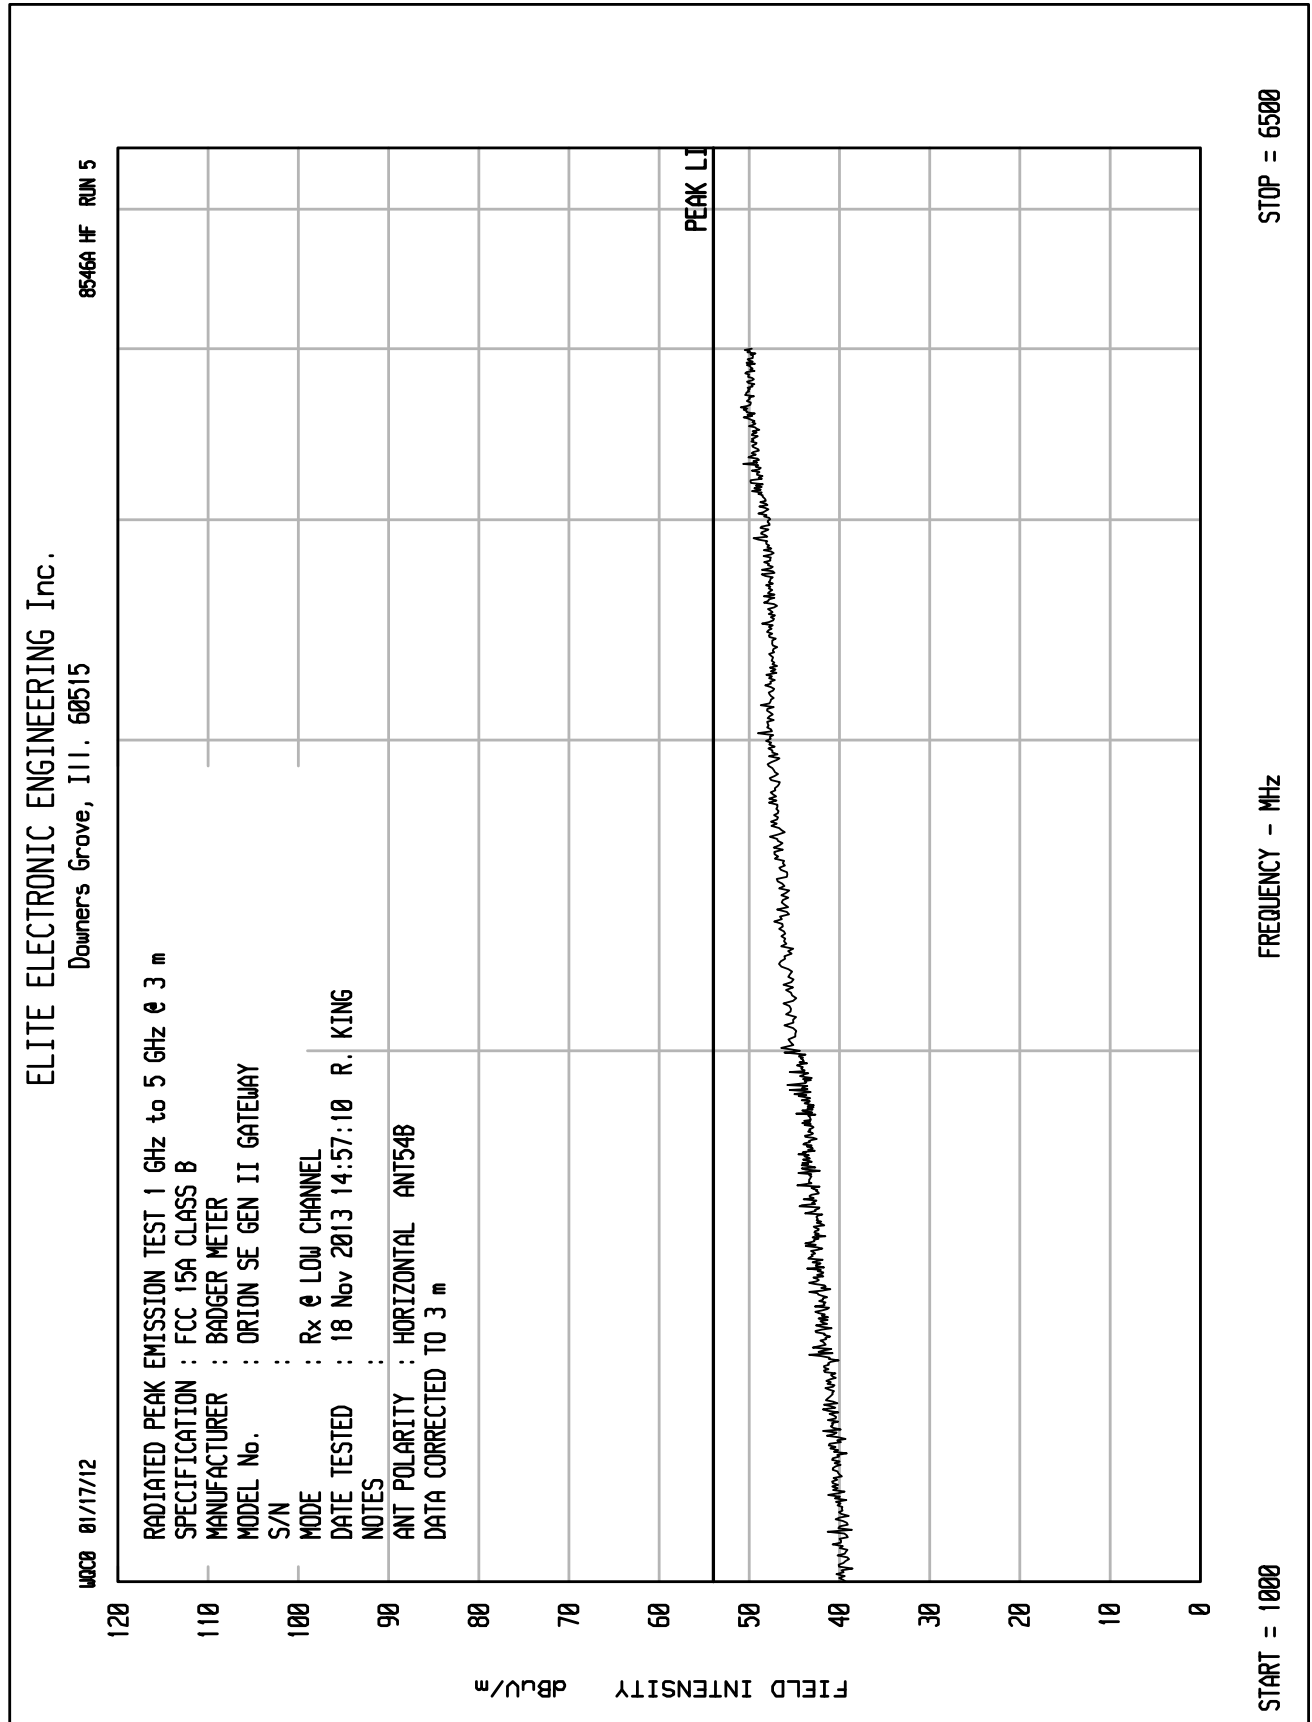


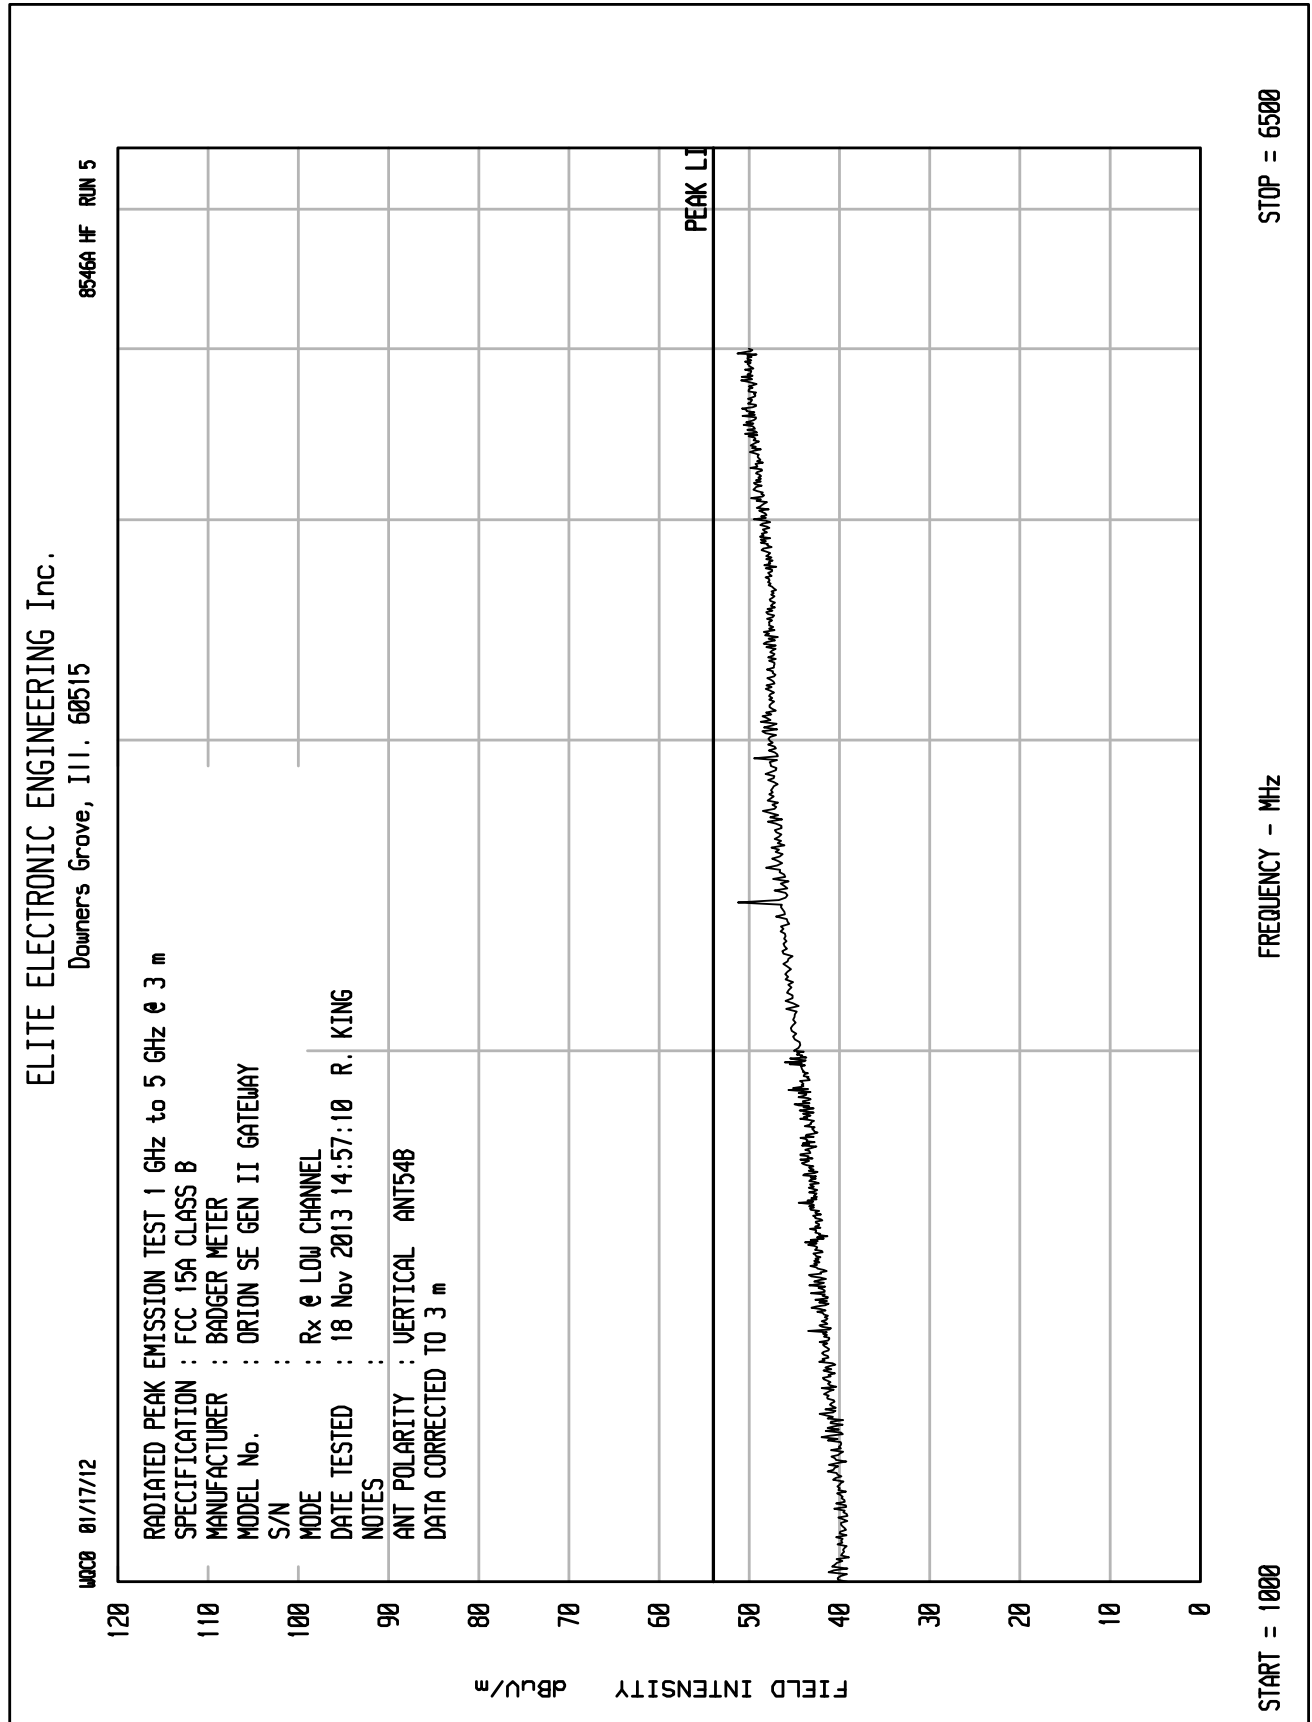


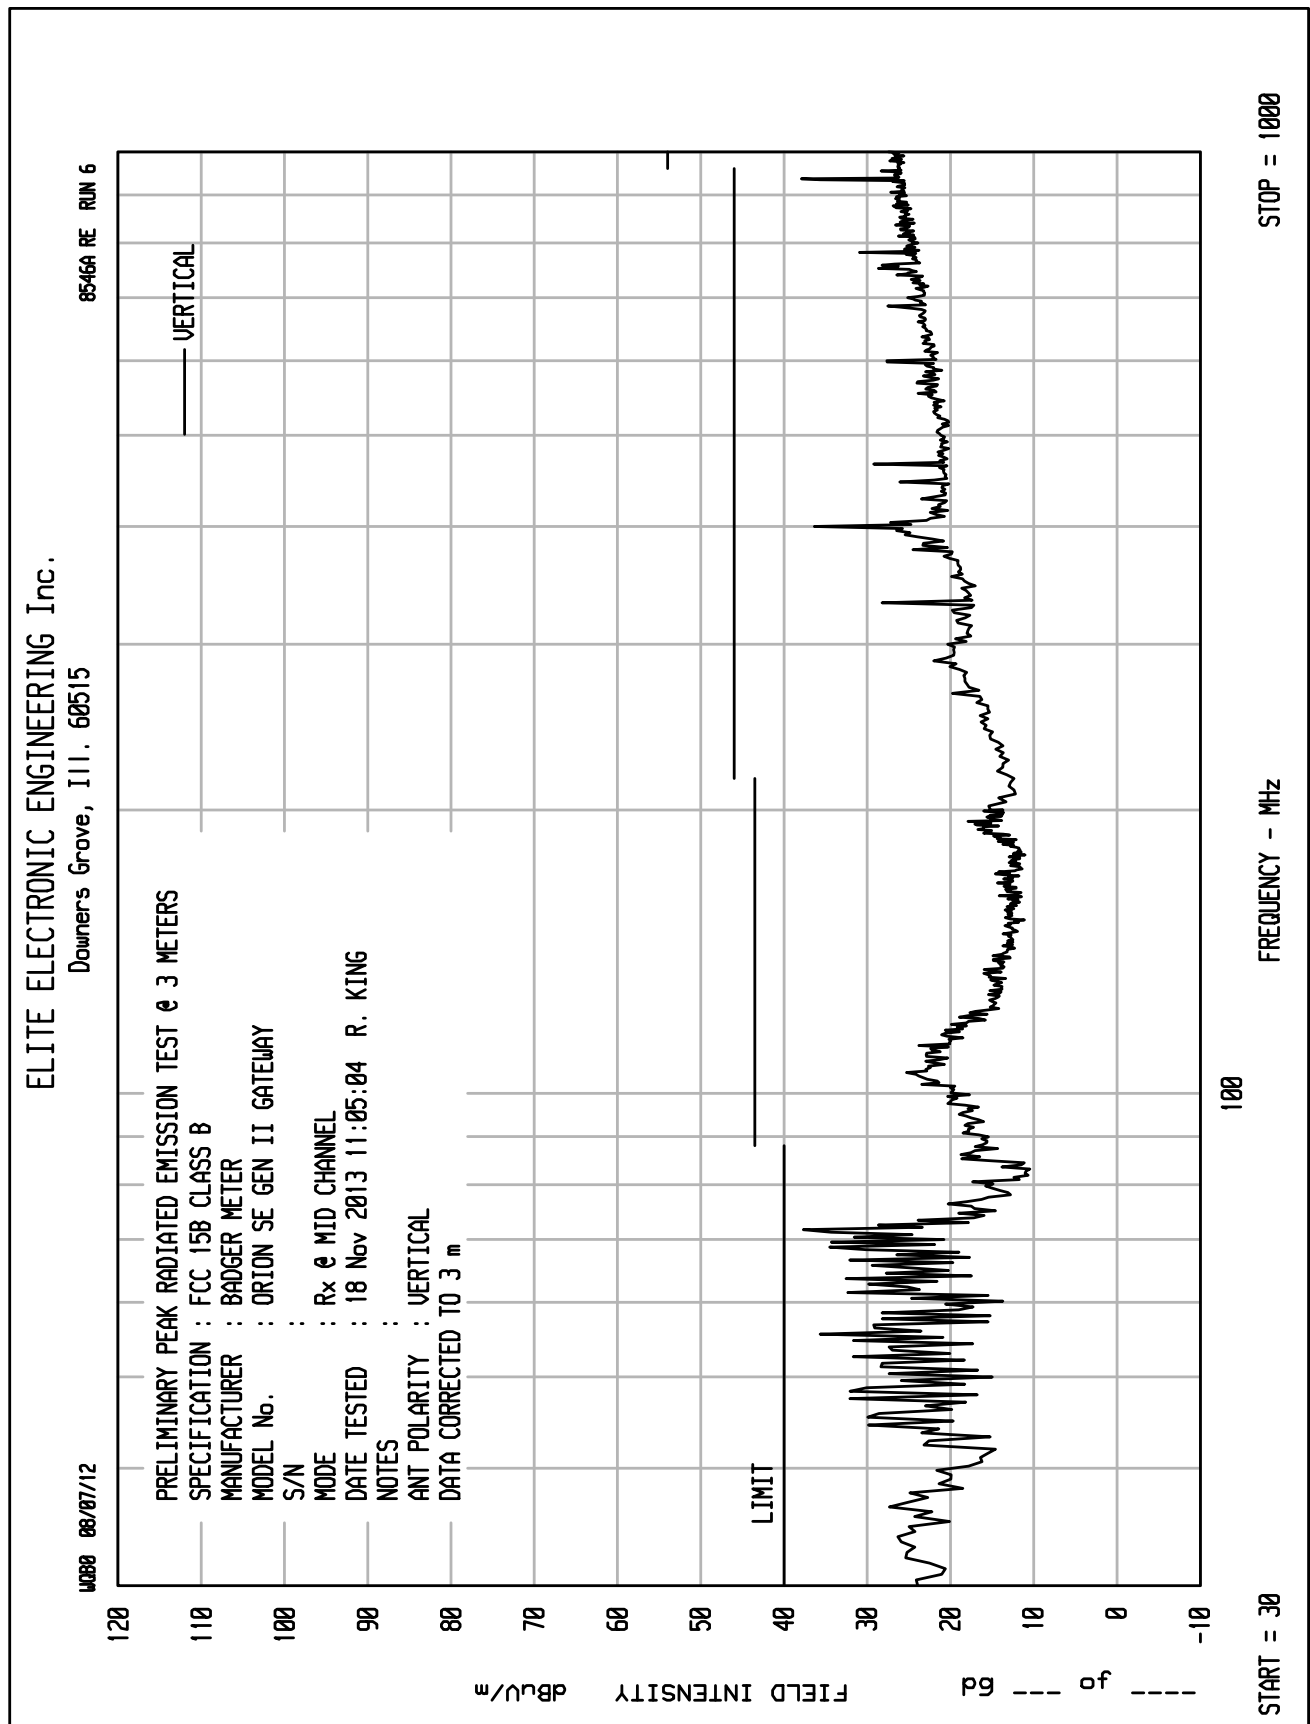





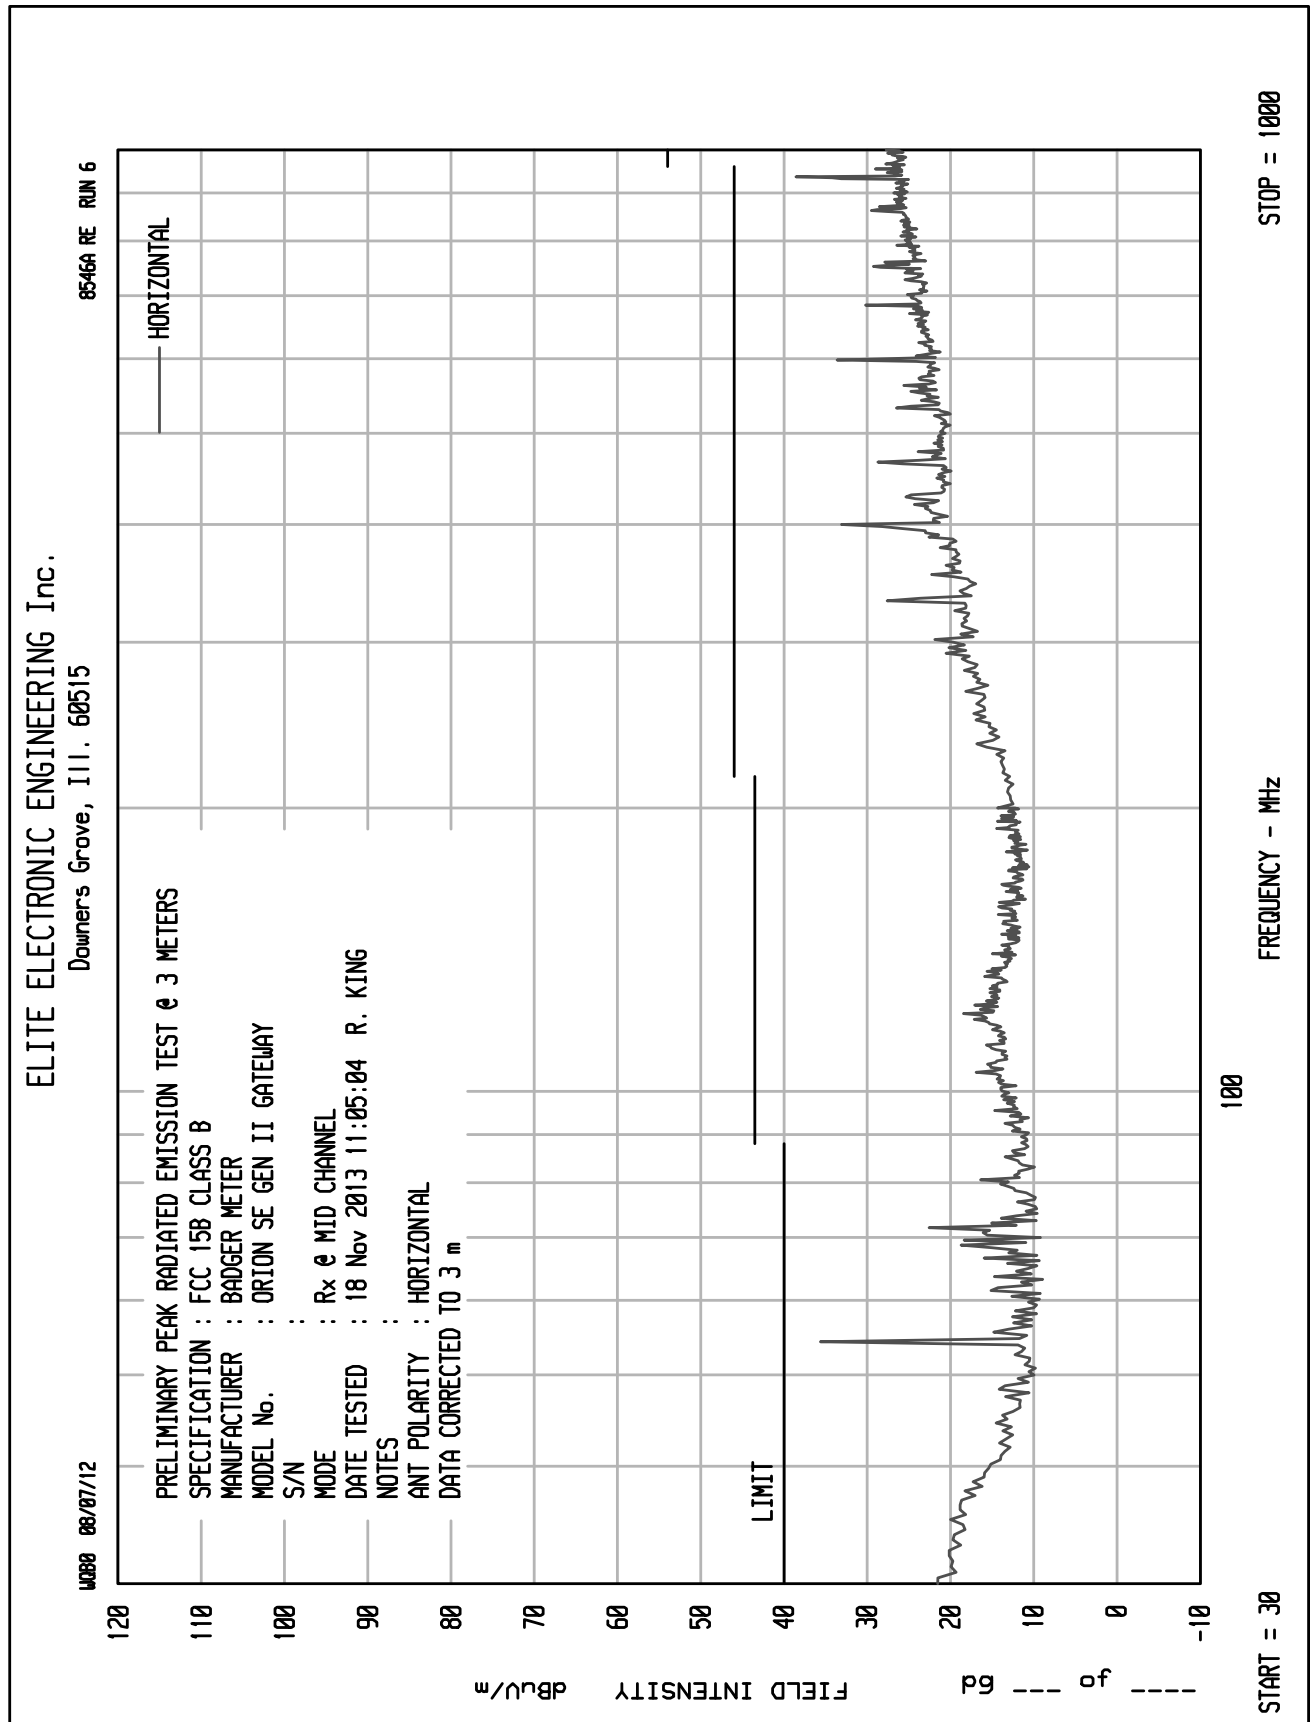


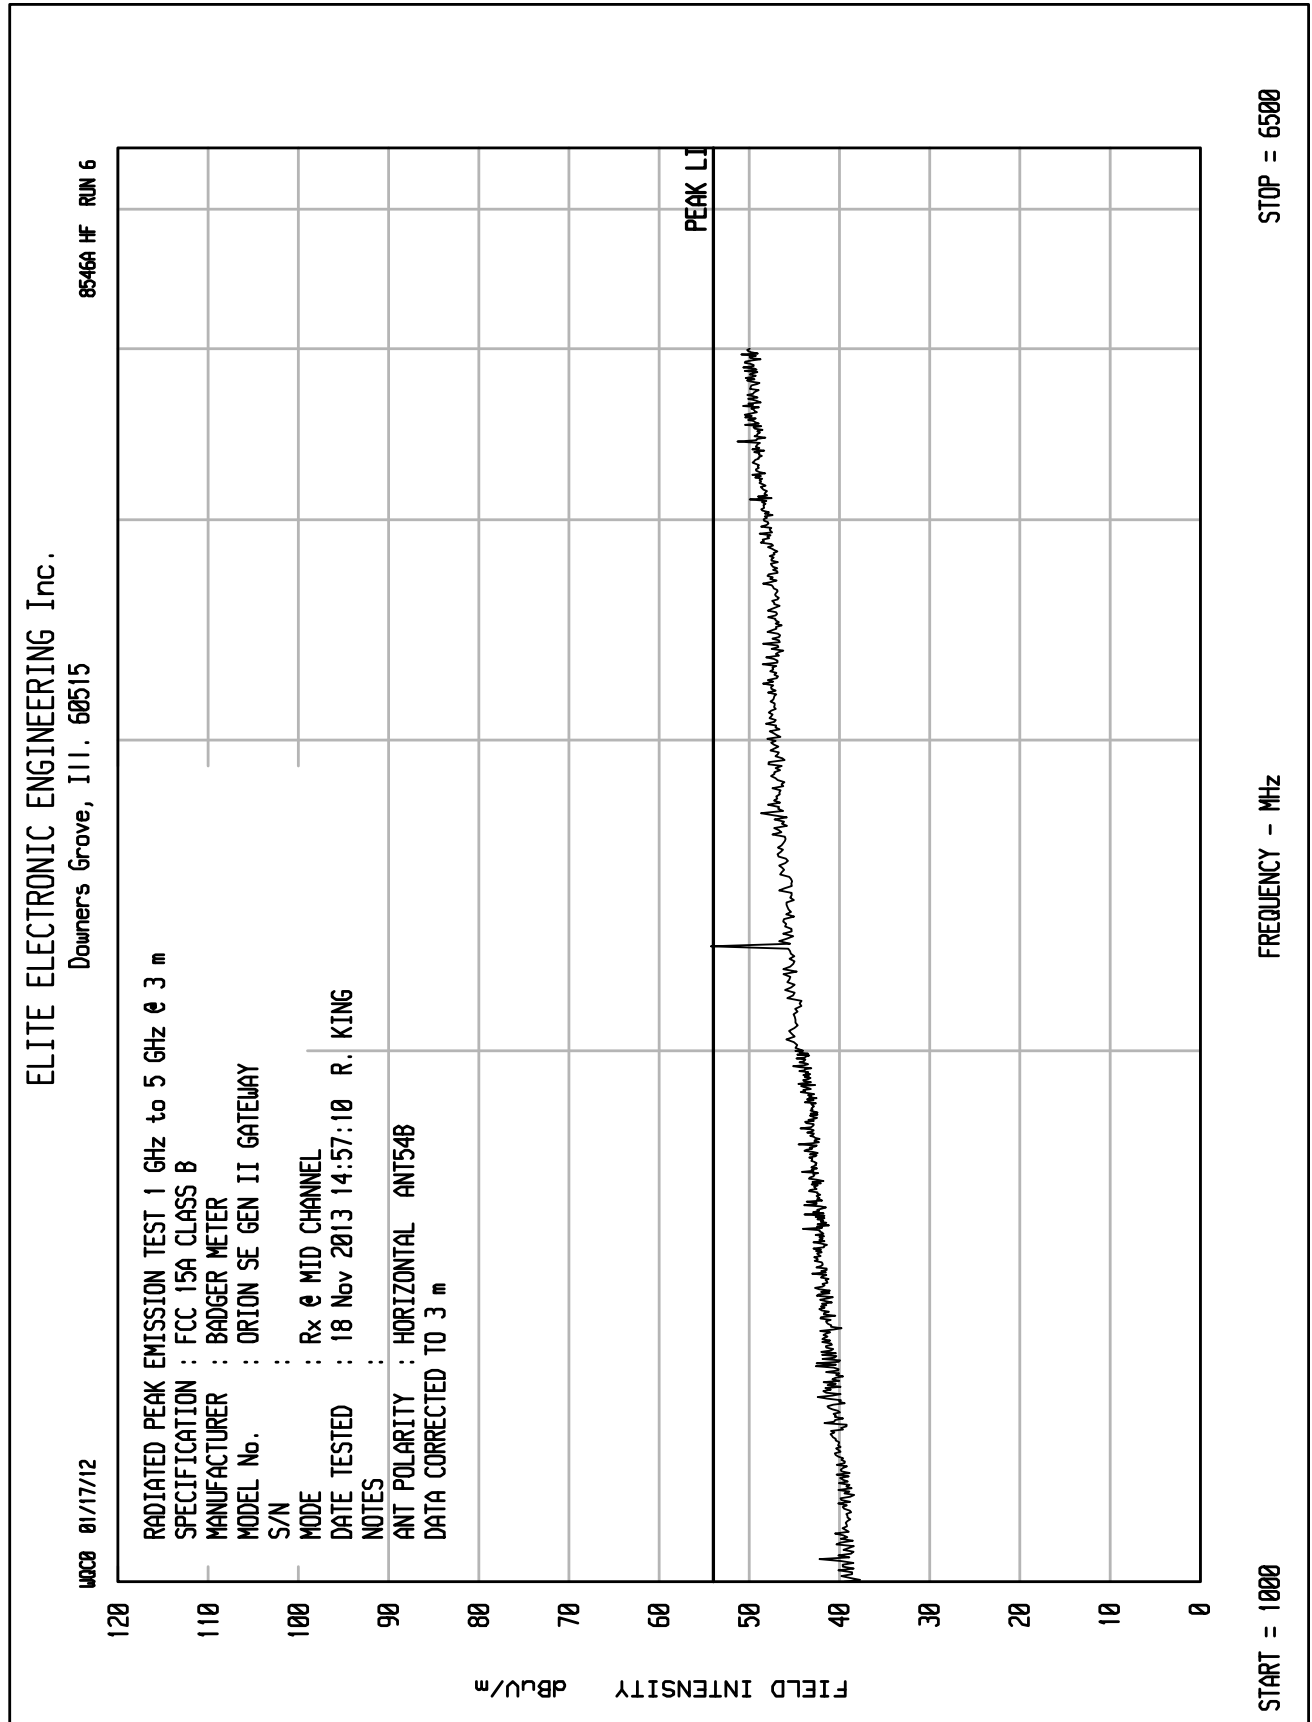


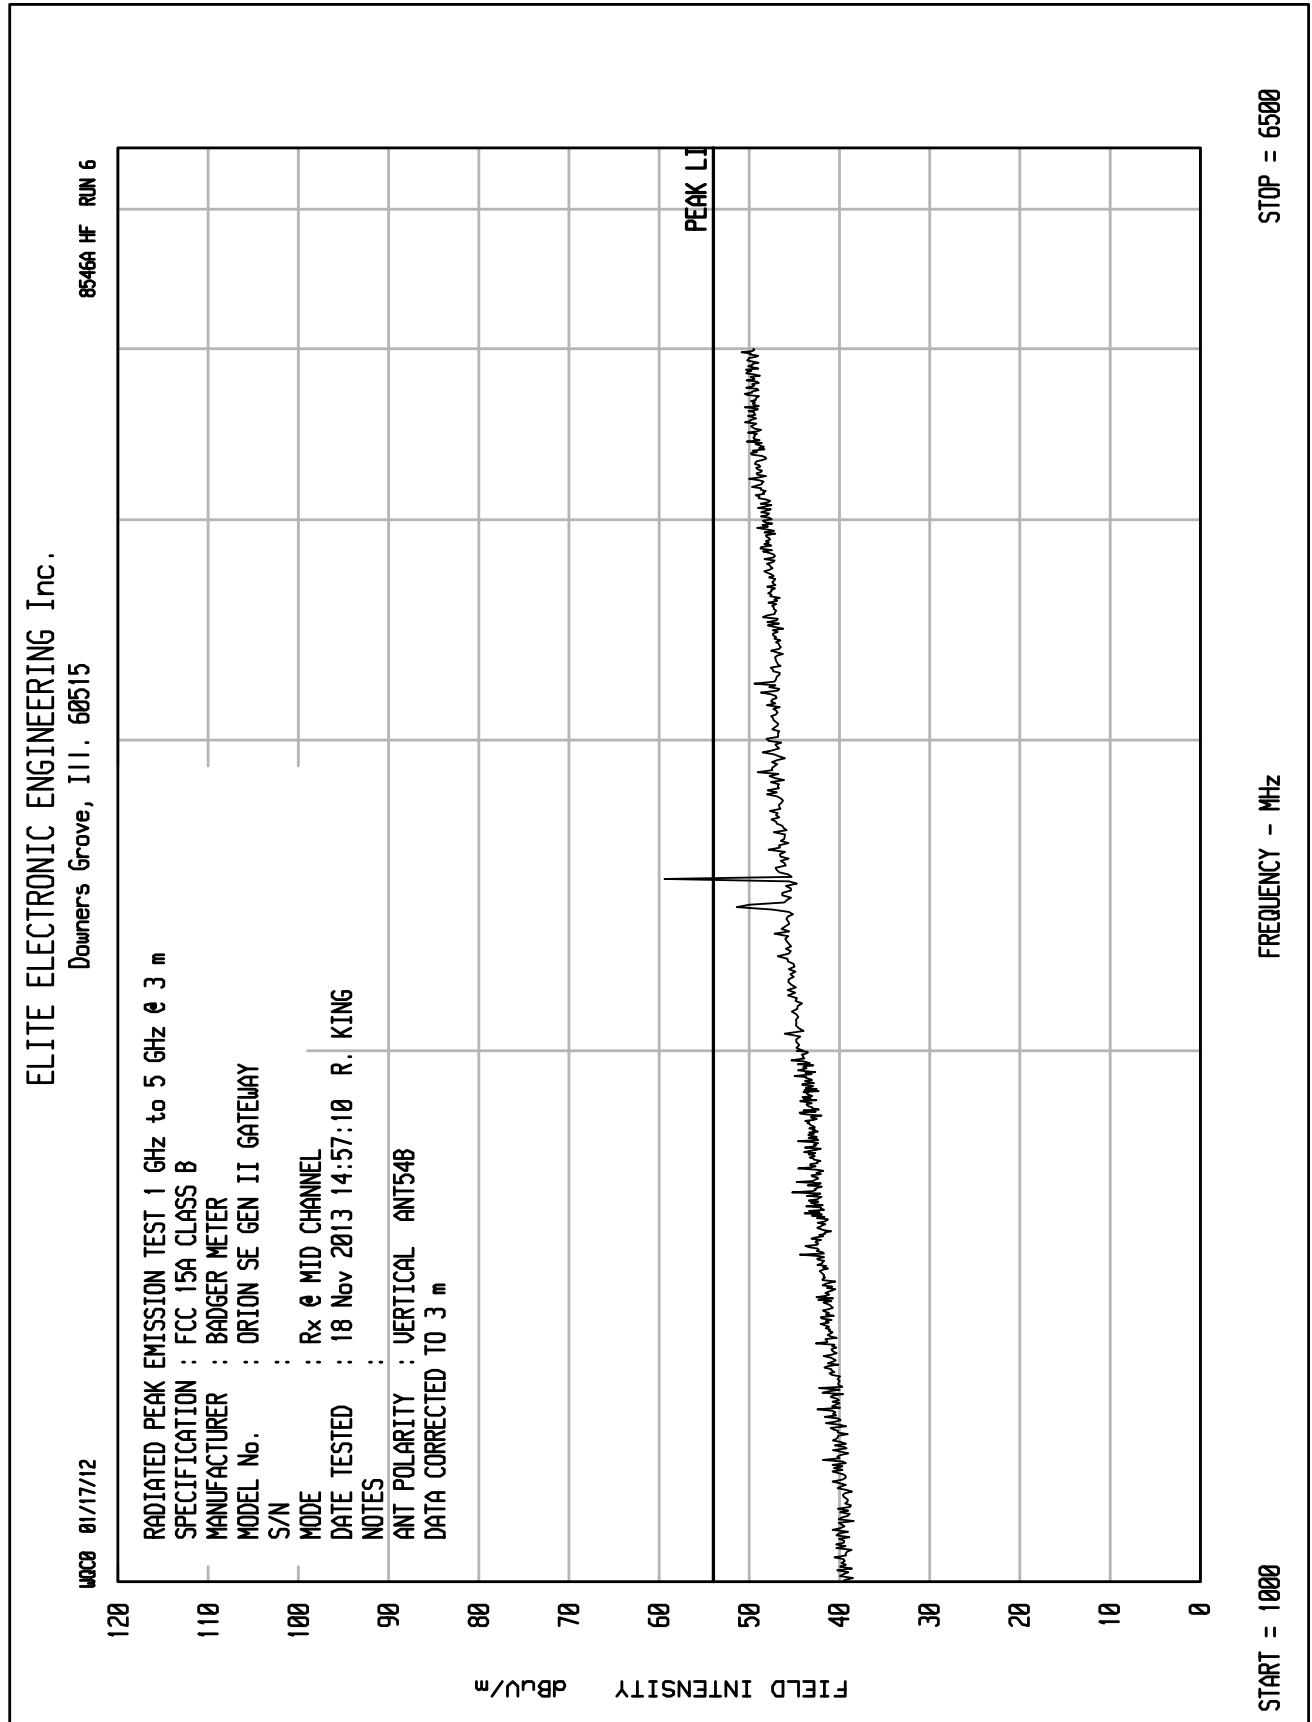

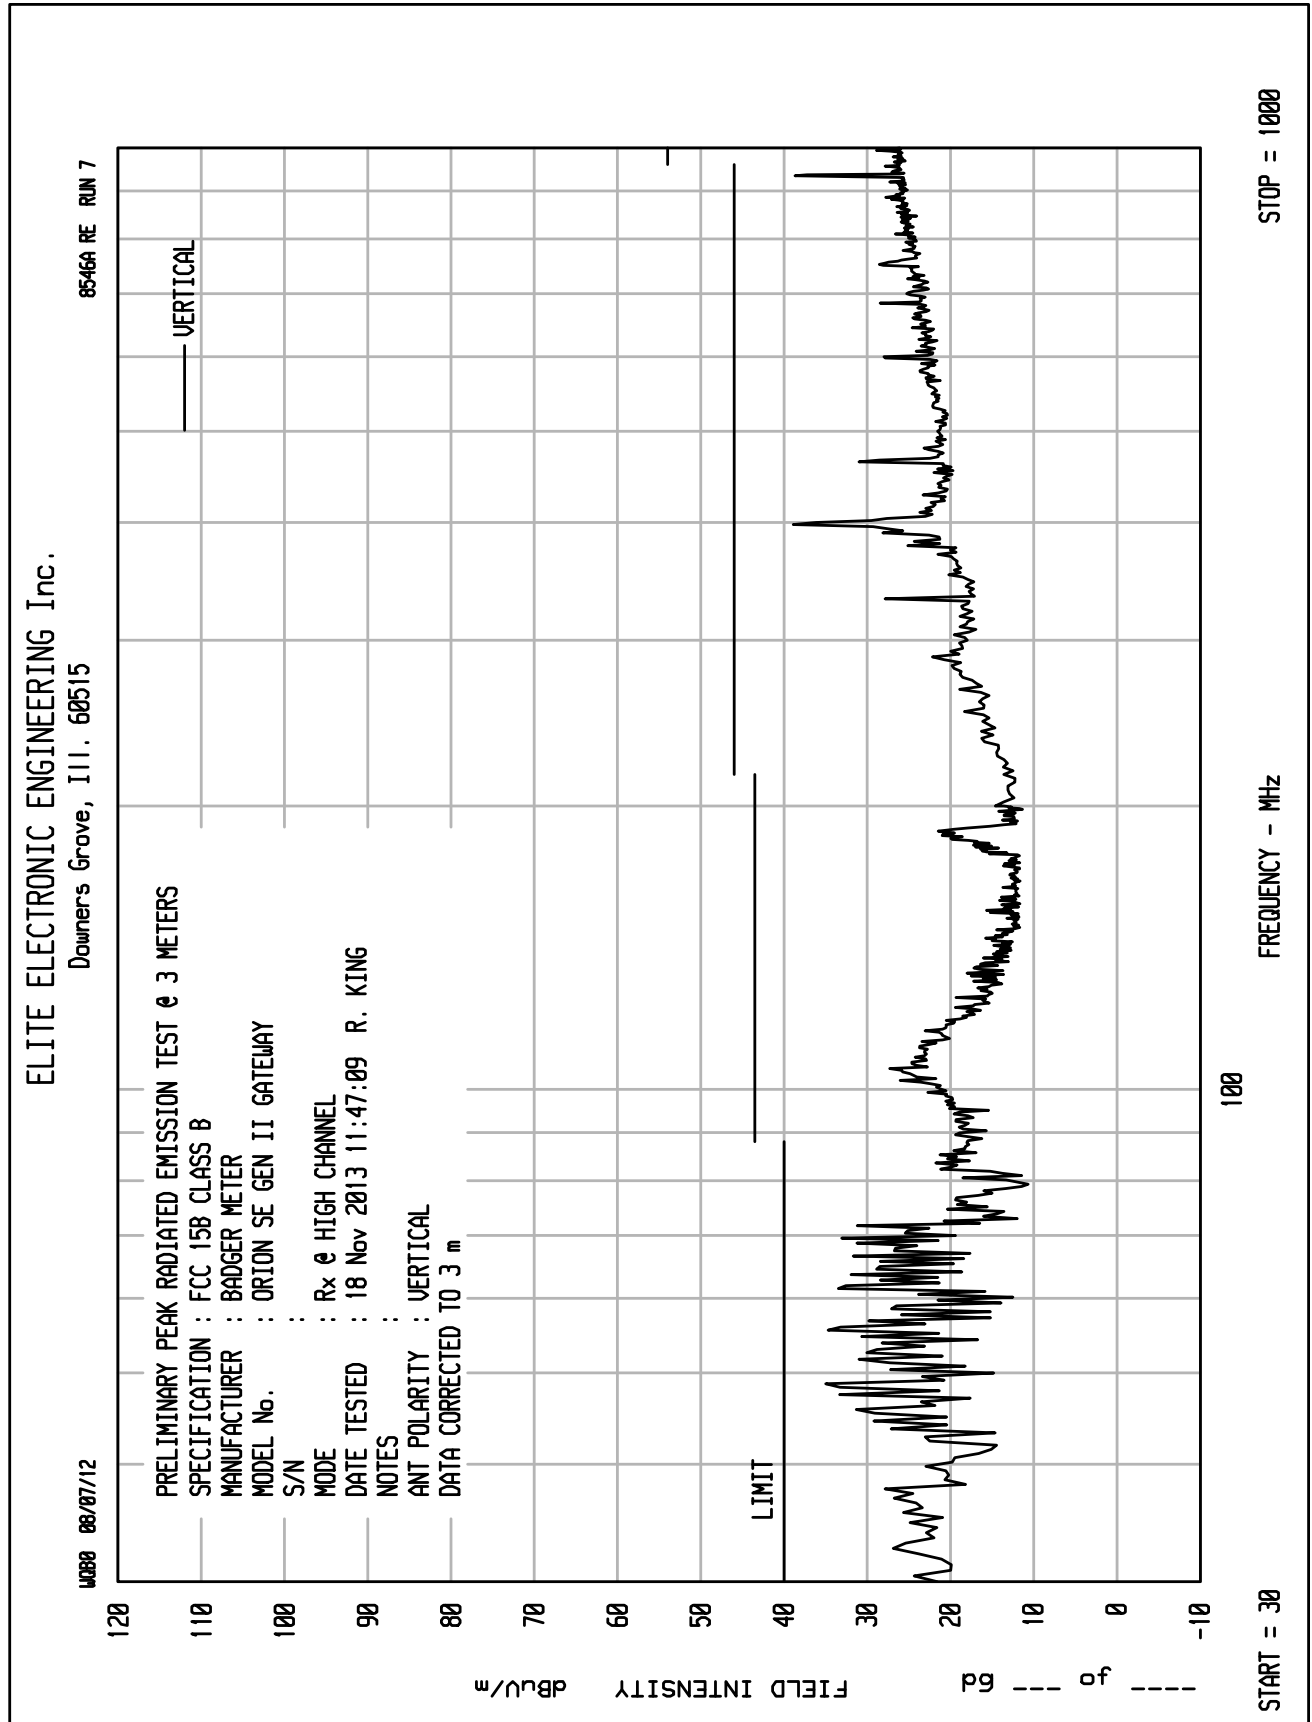

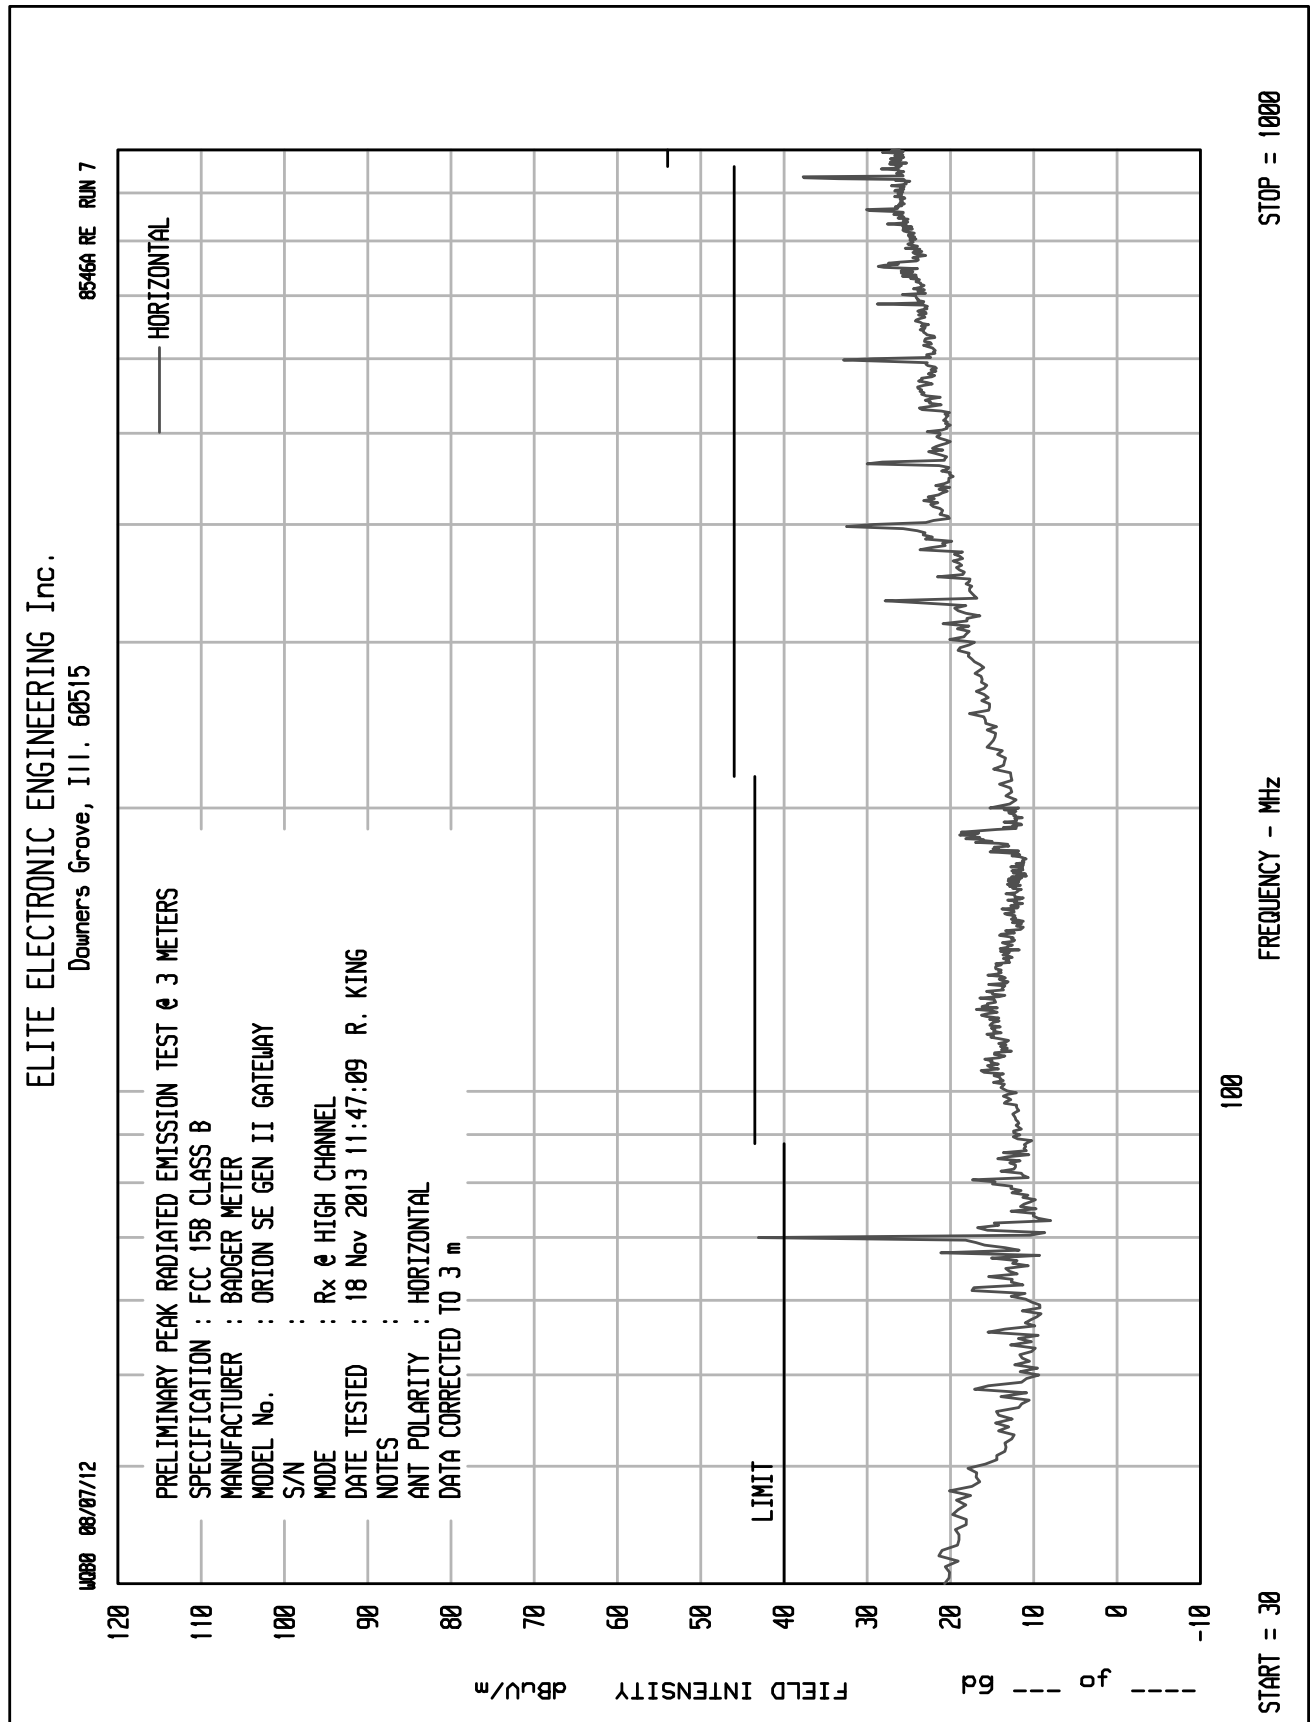

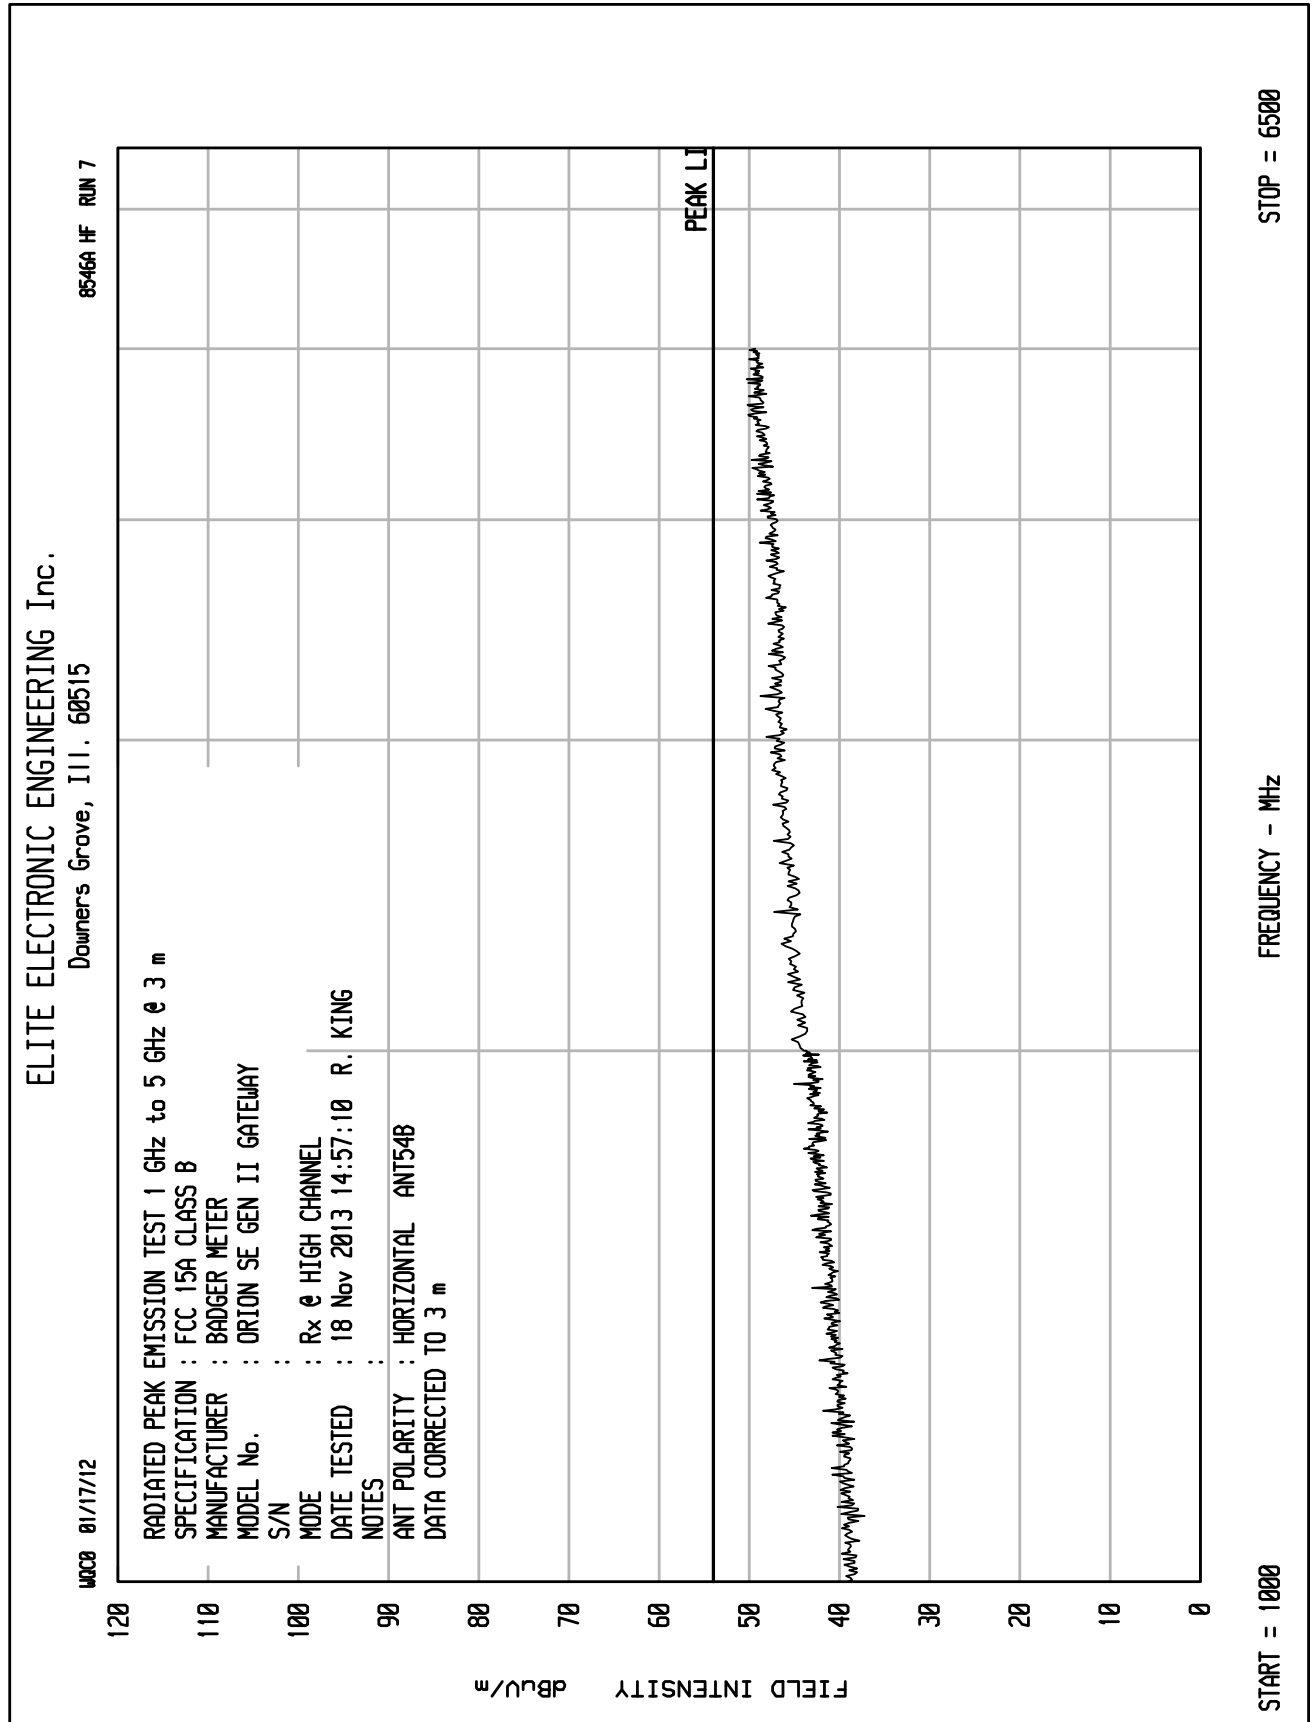

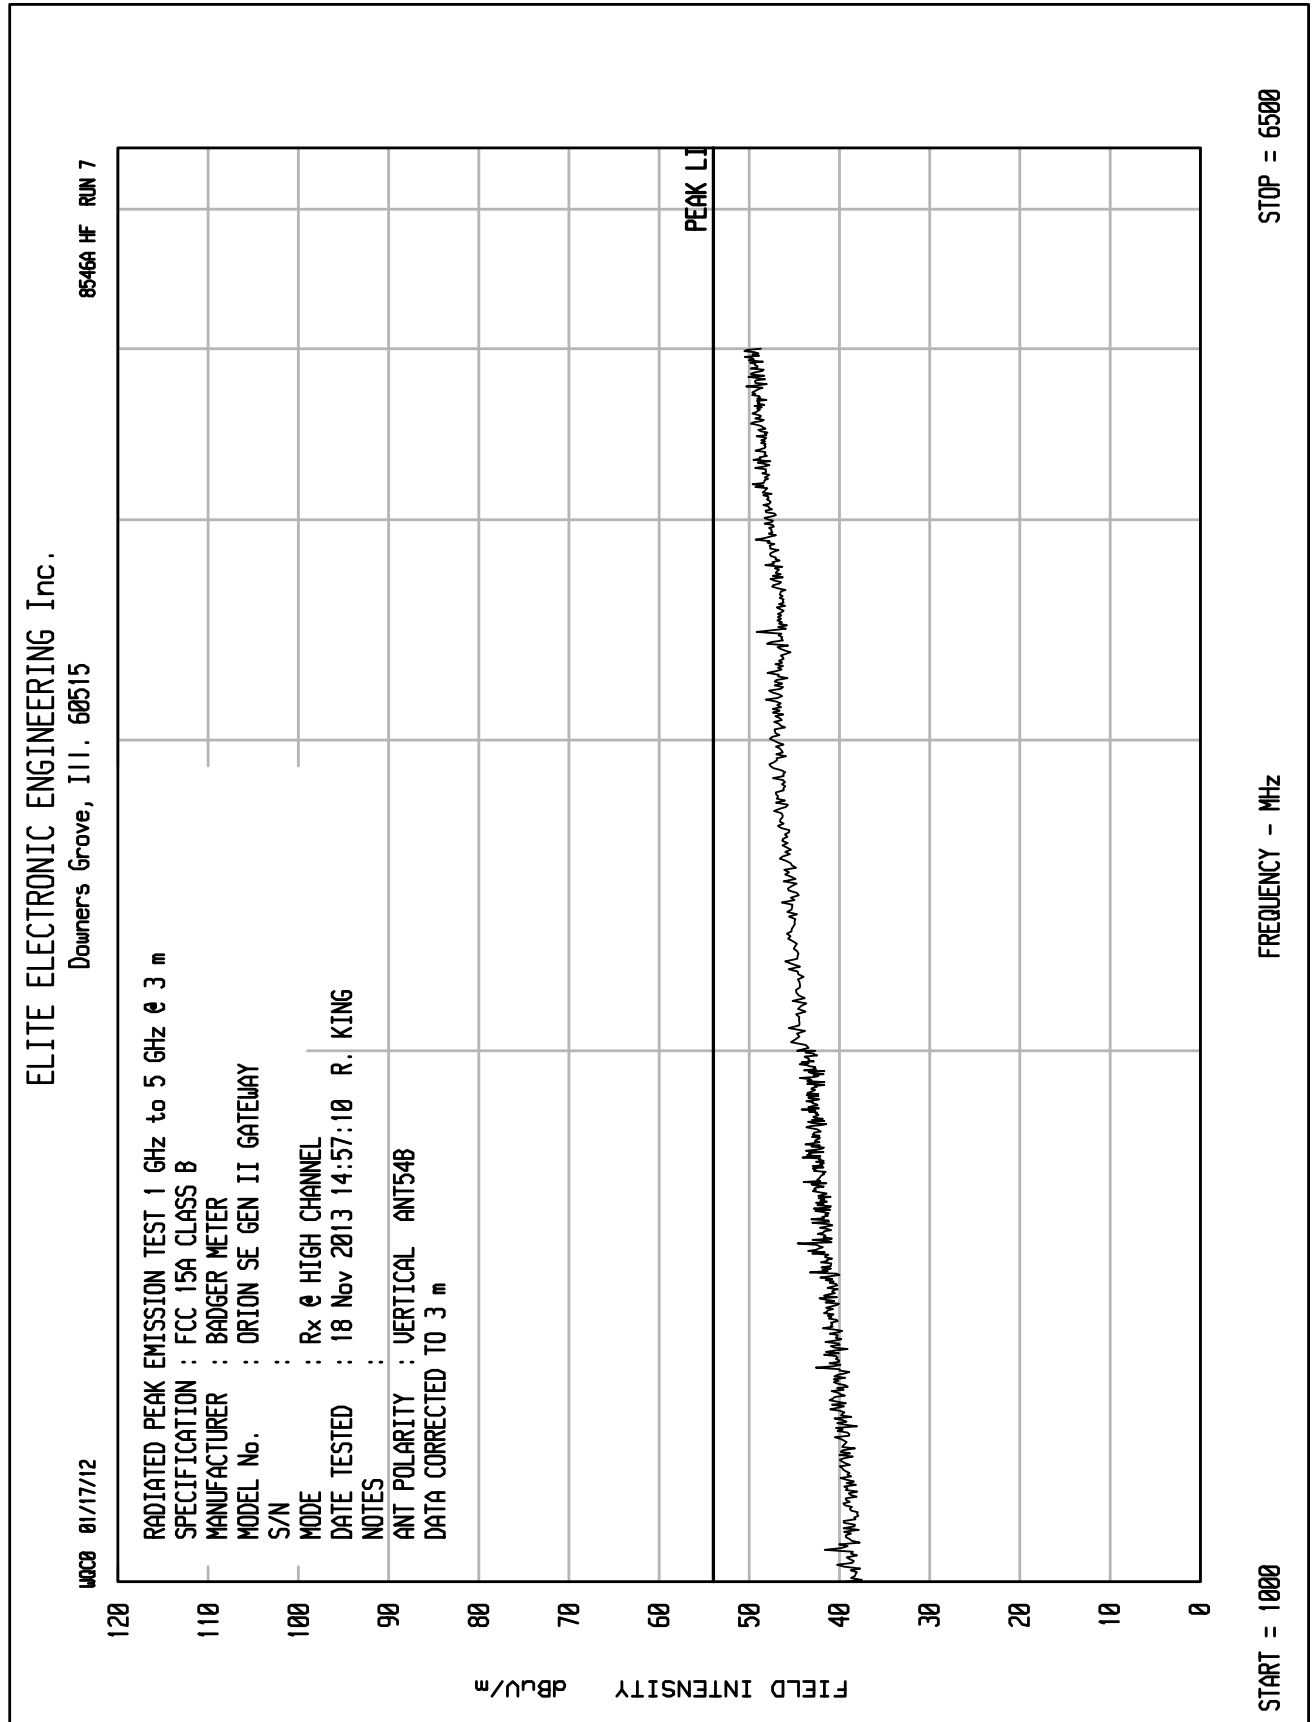



ETR No. 8546A  
DATA SHEET TEST NO. 5  
RADIATED QP EMISSION MEASUREMENTS in a 3 m SEMI-ANECHOIC ROOM  
SPECIFICATION : FCC 15B CLASS B  
MANUFACTURER : BADGER METER  
MODEL NO. : ORION SE GEN II GATEWAY  
SERIAL NO. :  
TEST MODE : Rx @ LOW CHANNEL  
NOTES :  
TEST DATE : 18 Nov 2013 10:30:12  
TEST DISTANCE : 3 m (DATA EXTRAPOLATED TO 3 m)

FREQUENCY	QP	ANT	CBL	EXT	DIST	TOTAL	QP	AZ	ANT	POLAR
MHz	READING	FAC	FAC	ATTN	FAC	dBuV/m	LIMIT	deg	HT	
	dBuV	dB	dB	dB	dB		dBuV/m		cm	
37.50	-4.5	14.9	.5	0.0	0.0	10.8	40.0	315	120	V
54.29	-5.5	8.4	.5	0.0	0.0	3.4	40.0	315	120	V
79.99	5.0	8.1	.5	0.0	0.0	13.5	40.0	135	120	H
104.62	13.4	11.9	.5	0.0	0.0	25.8	43.5	315	120	V
120.85	-0.0	12.8	.6	0.0	0.0	13.4	43.5	315	200	V
150.64	-8.0	11.1	.8	0.0	0.0	3.9	43.5	180	120	H
189.51	1.3	10.5	1.0	0.0	0.0	12.8	43.5	315	120	V
194.17	2.2	10.7	1.0	0.0	0.0	13.8	43.5	315	120	V
329.99	12.1	14.7	1.2	0.0	0.0	28.0	46.0	315	120	H
395.99	19.5	16.5	1.5	0.0	0.0	37.5	46.0	315	120	V
527.99	3.3	18.1	1.5	0.0	0.0	22.9	46.0	90	200	H
593.99	11.9	19.1	1.5	0.0	0.0	32.5	46.0	270	120	H
747.85	-.1	20.3	1.9	0.0	0.0	22.1	46.0	270	340	H
841.10	-6.3	21.2	2.0	0.0	0.0	16.9	46.0	270	200	H
931.33	11.8	21.8	2.0	0.0	0.0	35.6	46.0	315	340	H

Checked BY RICHARD E. KING :

Richard E. King





ETR No.

8546A

## DATA SHEET

TEST NO. 6

RADIATED QP EMISSION MEASUREMENTS in a 3 m SEMI-ANECHOIC ROOM

SPECIFICATION : FCC 15B CLASS B

MANUFACTURER : BADGER METER

MODEL NO. : ORION SE GEN II GATEWAY

SERIAL NO. :

TEST MODE : Rx @ MID CHANNEL

NOTES :

TEST DATE : 18 Nov 2013 11:05:04

TEST DISTANCE : 3 m (DATA EXTRAPOLATED TO 3 m)

FREQUENCY	QP	ANT	CBL	EXT	DIST	TOTAL	QP	AZ	ANT	POLAR
MHz	READING	FAC	FAC	ATTN	FAC	dBuV/m	LIMIT	deg	HT	
	dBuV	dB	dB	dB	dB		dBuV/m		cm	
47.37	19.3	9.9	.5	0.0	0.0	29.7	40.0	-0	200	V
71.06	29.1	7.2	.5	0.0	0.0	36.8	40.0	45	200	V
74.02	10.7	7.0	.5	0.0	0.0	18.2	40.0	315	200	V
104.62	12.2	11.9	.5	0.0	0.0	24.6	43.5	-0	200	V
119.71	2.8	12.7	.6	0.0	0.0	16.1	43.5	-0	200	V
154.97	-4.5	10.9	.8	0.0	0.0	7.2	43.5	270	200	H
192.23	-1.0	10.6	1.0	0.0	0.0	10.5	43.5	315	200	V
194.76	.1	10.7	1.0	0.0	0.0	11.7	43.5	315	200	V
329.99	11.1	14.7	1.2	0.0	0.0	27.0	46.0	-0	200	V
395.99	16.7	16.5	1.5	0.0	0.0	34.7	46.0	315	200	V
527.99	3.0	18.1	1.5	0.0	0.0	22.6	46.0	135	200	H
593.99	11.3	19.1	1.5	0.0	0.0	31.9	46.0	270	120	H
784.26	1.6	20.5	2.0	0.0	0.0	24.1	46.0	225	200	V
858.00	4.9	21.3	2.0	0.0	0.0	28.2	46.0	225	200	H
929.62	8.3	21.8	2.0	0.0	0.0	32.1	46.0	90	340	H

Checked BY RICHARD E. KING :

---

Richard E. King



ETR No.

8546A

## DATA SHEET

TEST NO. 7

RADIATED QP EMISSION MEASUREMENTS in a 3 m SEMI-ANECHOIC ROOM

SPECIFICATION : FCC 15B CLASS B

MANUFACTURER : BADGER METER

MODEL NO. : ORION SE GEN II GATEWAY

SERIAL NO. :

TEST MODE : Rx @ HIGH CHANNEL

NOTES :

TEST DATE : 18 Nov 2013 11:47:09

TEST DISTANCE : 3 m (DATA EXTRAPOLATED TO 3 m)

FREQUENCY	QP	ANT	CBL	EXT	DIST	TOTAL	QP	AZ	ANT	POLAR
MHz	READING	FAC	FAC	ATTN	FAC	dBuV/m	LIMIT	deg	HT	
	dBuV	dB	dB	dB	dB		dBuV/m		cm	
48.36	25.4	9.4	.5	0.0	0.0	35.3	40.0	315	120	V
71.06	6.9	7.2	.5	0.0	0.0	14.6	40.0	315	120	H
84.86	10.8	9.0	.5	0.0	0.0	20.3	40.0	315	120	V
104.62	14.0	11.9	.5	0.0	0.0	26.4	43.5	315	120	V
121.42	2.6	12.8	.6	0.0	0.0	16.1	43.5	315	120	V
144.11	-3.6	11.5	.8	0.0	0.0	8.7	43.5	-0	200	V
185.83	6.3	10.4	.9	0.0	0.0	17.6	43.5	-0	200	V
187.82	2.2	10.5	1.0	0.0	0.0	13.6	43.5	225	120	V
329.99	12.5	14.7	1.2	0.0	0.0	28.4	46.0	315	120	H
395.99	3.2	16.5	1.5	0.0	0.0	21.2	46.0	315	120	V
553.50	-6.8	18.9	1.5	0.0	0.0	13.6	46.0	315	200	H
593.99	11.6	19.1	1.5	0.0	0.0	32.2	46.0	45	120	H
747.53	.5	20.3	1.9	0.0	0.0	22.7	46.0	180	340	H
858.00	3.8	21.3	2.0	0.0	0.0	27.1	46.0	180	120	H
931.29	9.4	21.8	2.0	0.0	0.0	33.2	46.0	180	120	V

Checked BY RICHARD E. KING :

---

Richard E. King



## DATA SHEET

HF TEST NO. 5

RADIATED AVG EMISSION MEASUREMENTS  $\geq 1000$  MHz in a 3 m ANECHOIC ROOM

SPECIFICATION : FCC 15A CLASS B

MANUFACTURER : BADGER METER

MODEL NO. : ORION SE GEN II GATEWAY

SERIAL NO. :

TEST MODE : Rx @ LOW CHANNEL

NOTES :

TEST DATE : 18 Nov 2013 14:57:10

TEST DISTANCE : 3 m

ANTENNA : ANT54B

FREQUENCY	AVG	ANT	CBL	DIST	TOTAL	AVG	PASS/	AZ	ANT	POLAR
MHz	READING	FAC	FAC	FAC	dBuV/m	LIMIT	FAIL	deg	HT	
	dBuV	dB	dB	dB		dBuV/m			cm	
1066.46	-2.8	27.9	2.1	0.0	27.2	54.0		315	340	H
1282.55	-3.3	28.9	2.4	0.0	28.0	54.0		135	120	V
1396.61	-2.9	29.4	2.5	0.0	29.0	54.0		180	200	V
1508.05	-3.2	29.9	2.6	0.0	29.3	54.0		90	200	H
1663.12	-2.8	30.4	2.7	0.0	30.4	54.0		180	200	H
1663.87	-2.9	30.4	2.7	0.0	30.2	54.0		270	340	V
1929.70	-3.2	31.3	2.9	0.0	31.0	54.0		180	200	H
1986.17	-3.0	31.4	3.0	0.0	31.4	54.0		135	340	H
2425.29	7.8	32.0	3.4	0.0	43.3	54.0		315	340	V
2916.97	-3.3	32.6	3.8	0.0	33.1	54.0		-0	120	V
3074.99	-3.2	32.8	3.9	0.0	33.5	54.0		135	340	V
3707.87	-3.9	33.4	4.3	0.0	33.8	54.0		225	200	H
4198.53	-3.2	34.0	4.6	0.0	35.4	54.0		0	340	H
4654.92	-3.3	34.7	4.8	0.0	36.3	54.0		270	120	H
4945.38	-3.4	35.0	5.0	0.0	36.6	54.0		45	200	V

Checked BY RICHARD E. KING :

---

Richard E. King



DATA SHEET HF TEST NO. 6  
RADIATED AVG EMISSION MEASUREMENTS  $\geq 1000$  MHz in a 3 m ANECHOIC ROOM  
SPECIFICATION : FCC 15A CLASS B  
MANUFACTURER : BADGER METER  
MODEL NO. : ORION SE GEN II GATEWAY  
SERIAL NO. :  
TEST MODE : Rx @ MID CHANNEL  
NOTES :  
TEST DATE : 18 Nov 2013 14:57:10  
TEST DISTANCE : 3 m  
ANTENNA : ANT54B

FREQUENCY	AVG	ANT	CBL	DIST	TOTAL	AVG	PASS/	AZ	ANT	POLAR
MHz	READING	FAC	FAC	FAC	dBuV/m	LIMIT	FAIL	deg	HT	
	dBuV	dB	dB	dB		dBuV/m			cm	
1050.03	-2.4	27.8	2.1	0.0	27.4	54.0		-0	120	H
1254.03	-2.9	28.8	2.3	0.0	28.2	54.0		45	200	V
1352.18	-2.9	29.2	2.4	0.0	28.8	54.0		90	340	V
1548.80	7.9	30.0	2.6	0.0	40.5	54.0		0	120	V
1658.32	-3.2	30.4	2.7	0.0	29.9	54.0		90	120	V
1702.25	-3.3	30.5	2.8	0.0	30.1	54.0		45	120	V
1926.61	-3.1	31.2	2.9	0.0	31.1	54.0		90	200	V
2201.76	-2.9	31.8	3.2	0.0	32.1	54.0		0	120	H
2493.61	-3.0	32.1	3.5	0.0	32.6	54.0		90	120	V
2871.92	-2.8	32.6	3.8	0.0	33.6	54.0		45	120	V

Checked BY RICHARD E. KING :

Richard E. King



## DATA SHEET

HF TEST NO. 7

RADIATED AVG EMISSION MEASUREMENTS  $\geq 1000$  MHz in a 3 m ANECHOIC ROOM

SPECIFICATION : FCC 15A CLASS B

MANUFACTURER : BADGER METER

MODEL NO. : ORION SE GEN II GATEWAY

SERIAL NO. :

TEST MODE : Rx @ HIGH CHANNEL

NOTES :

TEST DATE : 18 Nov 2013 14:57:10

TEST DISTANCE : 3 m

ANTENNA : ANT54B

FREQUENCY	AVG	ANT	CBL	DIST	TOTAL	AVG	PASS/	AZ	ANT	POLAR
MHz	READING	FAC	FAC	FAC	dBuV/m	LIMIT	FAIL	deg	HT	
	dBuV	dB	dB	dB		dBuV/m			cm	
1021.91	-2.7	27.6	2.0	0.0	26.9	54.0		-0	340	V
1261.94	7.5	28.8	2.3	0.0	38.7	54.0		-0	120	H
1329.42	-2.9	29.1	2.4	0.0	28.6	54.0		-0	120	V
1658.32	-3.2	30.4	2.7	0.0	29.9	54.0		90	120	V
1702.25	-3.3	30.5	2.8	0.0	30.1	54.0		45	120	V
1926.61	-3.1	31.2	2.9	0.0	31.1	54.0		90	200	V
2201.76	-2.9	31.8	3.2	0.0	32.1	54.0		0	120	H
3074.99	-3.2	32.8	3.9	0.0	33.5	54.0		135	340	V
3707.87	-3.9	33.4	4.3	0.0	33.8	54.0		225	200	H
4198.53	-3.2	34.0	4.6	0.0	35.4	54.0		0	340	H
4654.92	-3.3	34.7	4.8	0.0	36.3	54.0		270	120	H

Checked BY RICHARD E. KING :

---

Richard E. King



## FCC Part 15 Subpart B Conducted Emissions Test

### Significant Emissions Data

VB\*\* 02/09/2011

Manufacturer : BADGER METER INC.  
Model : ORION SE GEN II GATEWAY  
DUT Mode : Tx  
Line Tested : L1  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes :  
Test Engineer : R. King  
Limit : Class B  
Test Date : Nov 27, 2013 02:38:28 PM  
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit


Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.186	56.4	64.2		44.2	54.2	
0.195	54.8	63.8		44.3	53.8	
0.477	37.6	56.4		24.3	46.4	
0.505	32.5	56.0		19.0	46.0	
0.808	18.8	56.0		9.0	46.0	
1.912	8.4	56.0		3.0	46.0	
2.853	12.6	56.0		6.7	46.0	
4.787	18.0	56.0		11.1	46.0	
6.773	19.5	60.0		12.6	50.0	
15.728	27.1	60.0		23.2	50.0	
29.633	39.1	60.0		31.1	50.0	



## FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VB\*\* 02/09/2011

Manufacturer : BADGER METER INC.  
Model : ORION SE GEN II GATEWAY  
DUT Mode : Tx  
Line Tested : L1  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes :  
Test Engineer : R. King  
Limit : Class B  
Test Date : Nov 27, 2013 02:38:28 PM

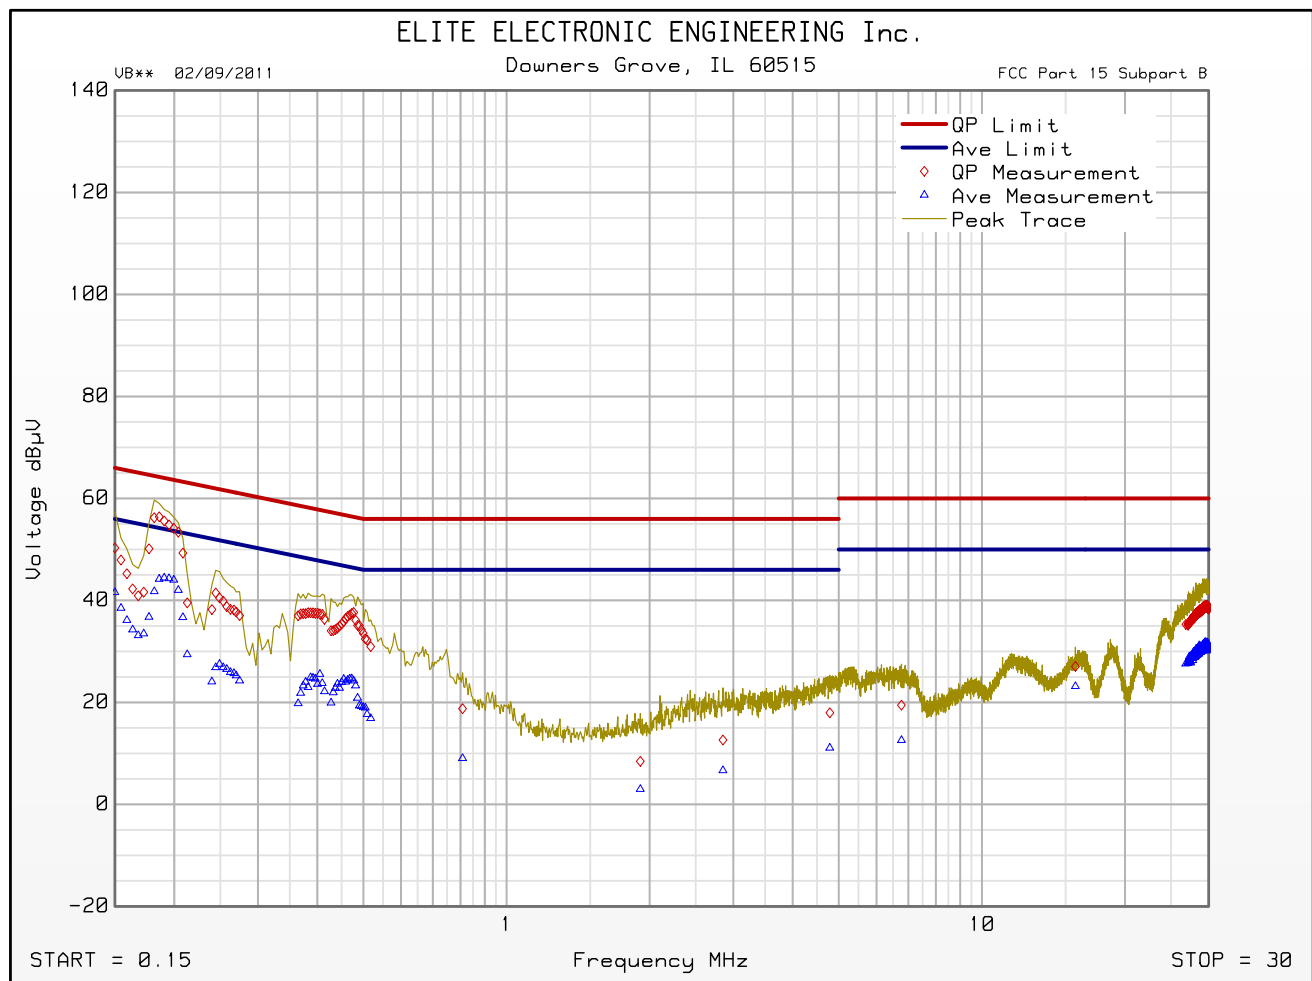

Emissions Meet QP Limit  
Emissions Meet Ave Limit



## FCC Part 15 Subpart B Conducted Emissions Test

### Significant Emissions Data

VB\*\* 02/09/2011

Manufacturer : BADGER METER INC.  
Model : ORION SE GEN II GATEWAY  
DUT Mode : Tx  
Line Tested : L2  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes :  
Test Engineer : R. King  
Limit : Class B  
Test Date : Nov 27, 2013 02:53:44 PM  
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.186	56.9	64.2		44.2	54.2	
0.195	55.4	63.8		45.2	53.8	
0.477	36.2	56.4		21.5	46.4	
0.505	31.0	56.0		17.3	46.0	
0.795	21.9	56.0		10.3	46.0	
1.817	8.4	56.0		3.0	46.0	
2.345	11.2	56.0		4.4	46.0	
4.904	19.0	56.0		11.4	46.0	
5.243	19.9	60.0		12.9	50.0	
16.344	24.4	60.0		16.0	50.0	
29.732	39.9	60.0		31.8	50.0	






## FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VB\*\* 02/09/2011

Manufacturer : BADGER METER INC.  
Model : ORION SE GEN II GATEWAY  
DUT Mode : Tx  
Line Tested : L2  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes :  
Test Engineer : R. King  
Limit : Class B  
Test Date : Nov 27, 2013 02:53:44 PM

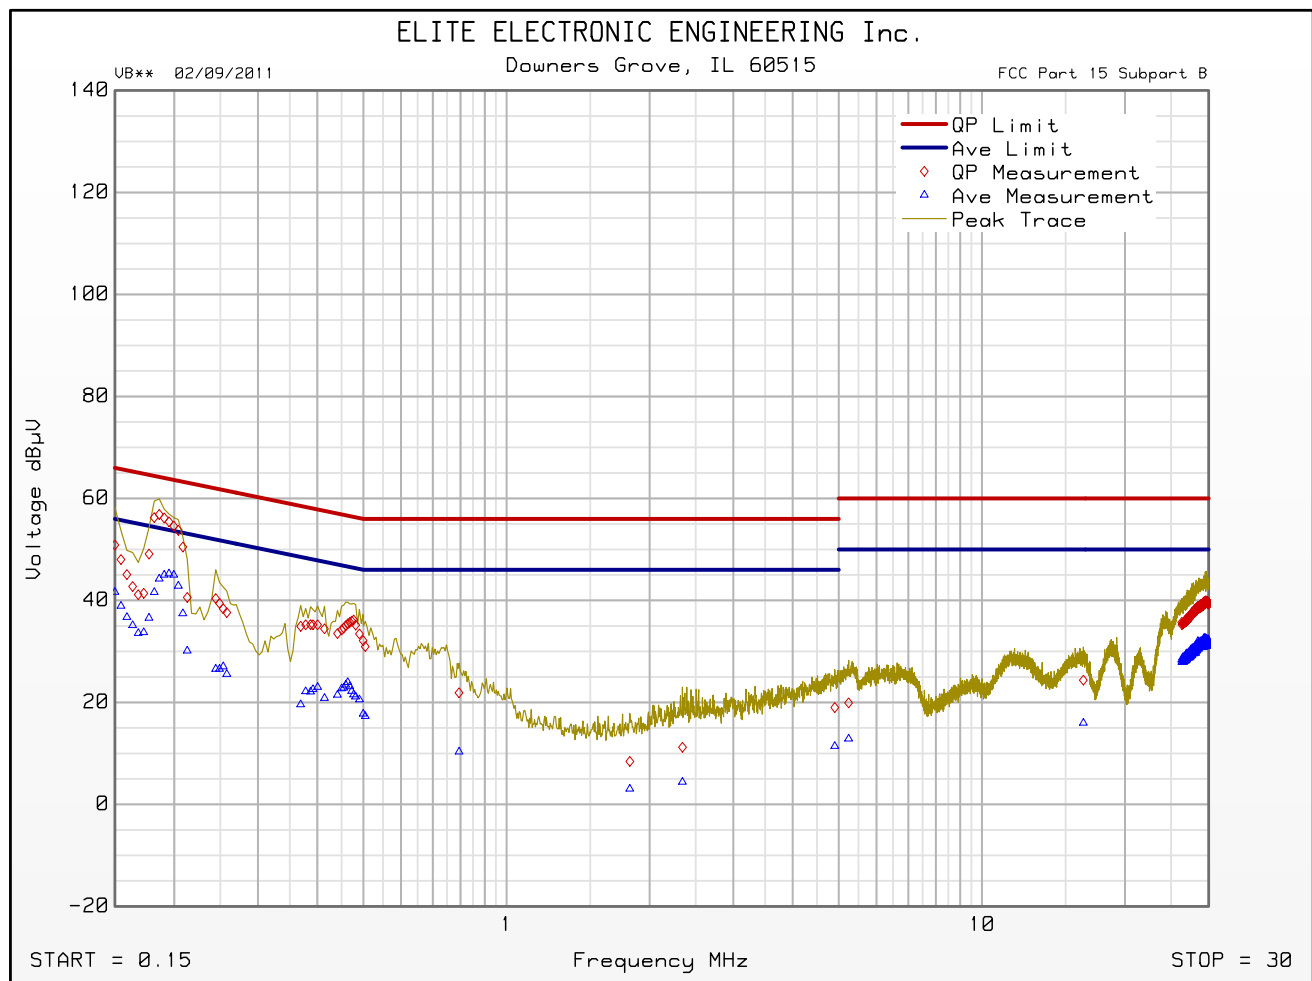

Emissions Meet QP Limit  
Emissions Meet Ave Limit



## CISPR 22/EN 55022 Conducted Emissions Test

### Significant Emissions Data

VB\*\* 02/09/2011

Manufacturer : BADGER METER INC.  
Model : ORION SE GEN II GATEWAY  
DUT Mode : Tx  
Line Tested : ETHERNET  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes :  
Test Engineer : R. King  
Limit : Telecommunication Ports, Class B  
Test Date : Nov 27, 2013 03:22:13 PM  
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
0.200	38.3	81.6		35.1	71.6	
0.320	36.0	77.7		30.9	67.7	
0.748	34.9	74.0		32.5	64.0	
1.267	45.9	74.0		43.4	64.0	
1.542	42.7	74.0		39.9	64.0	
3.038	45.5	74.0		42.3	64.0	
5.235	49.8	74.0		46.3	64.0	
10.244	53.9	74.0		50.5	64.0	
13.359	58.8	74.0		55.4	64.0	
13.417	58.1	74.0		54.3	64.0	
13.480	58.6	74.0		55.1	64.0	
14.214	58.4	74.0		54.9	64.0	
15.618	58.0	74.0		54.5	64.0	
16.167	61.1	74.0		57.7	64.0	
16.230	62.1	74.0		58.6	64.0	
16.473	57.7	74.0		54.4	64.0	
16.900	58.7	74.0		55.2	64.0	
17.085	57.5	74.0		54.0	64.0	
17.571	57.8	74.0		54.3	64.0	
17.692	62.0	74.0		58.6	64.0	
17.938	59.3	74.0		55.7	64.0	
18.244	63.8	74.0		60.3	64.0	
18.303	61.2	74.0		57.9	64.0	
18.366	61.4	74.0		58.1	64.0	
18.487	59.8	74.0		56.3	64.0	
18.915	60.5	74.0		57.2	64.0	
19.585	58.2	74.0		55.0	64.0	
19.711	61.7	74.0		58.1	64.0	
20.197	59.3	74.0		56.0	64.0	
20.260	62.1	74.0		58.6	64.0	
20.319	61.1	74.0		57.2	64.0	
20.382	60.4	74.0		56.9	64.0	


Freq MHz	Quasi-peak Level dBμV	Quasi-peak Limit dBμV	Excessive Quasi-peak Emissions	Average Level dBμV	Average Limit dBμV	Excessive Average Emissions
20.809	60.4	74.0		57.0	64.0	
20.868	58.4	74.0		54.2	64.0	
21.052	59.6	74.0		56.0	64.0	
21.115	58.0	74.0		54.4	64.0	
21.174	58.1	74.0		54.4	64.0	
21.664	62.4	74.0		59.0	64.0	
21.907	60.3	74.0		56.8	64.0	
22.213	58.7	74.0		55.2	64.0	
22.456	60.4	74.0		56.9	64.0	
22.578	59.5	74.0		56.1	64.0	
22.884	60.2	74.0		56.8	64.0	
23.068	61.2	74.0		57.8	64.0	
23.127	64.1	74.0		60.7	64.0	
23.739	57.4	74.0		54.1	64.0	
24.045	59.1	74.0		55.7	64.0	
24.351	60.9	74.0		57.5	64.0	
24.535	58.6	74.0		54.8	64.0	
24.900	59.0	74.0		55.6	64.0	
25.692	58.7	74.0		55.4	64.0	
25.876	60.1	74.0		56.6	64.0	
25.998	58.2	74.0		54.8	64.0	
26.488	61.5	74.0		58.0	64.0	
26.547	60.0	74.0		56.5	64.0	
26.610	62.0	74.0		58.7	64.0	
27.159	61.3	74.0		57.8	64.0	
27.343	58.3	74.0		54.8	64.0	
28.563	57.8	74.0		54.4	64.0	
28.684	59.8	74.0		56.4	64.0	
29.233	58.9	74.0		55.6	64.0	




## CISPR 22/EN 55022 Conducted Emissions Test Cumulative Data

VB\*\* 02/09/2011

Manufacturer : BADGER METER INC.  
Model : ORION SE GEN II GATEWAY  
DUT Mode : Tx  
Line Tested : ETHERNET  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes :  
Test Engineer : R. King  
Limit : Telecommunication Ports, Class B  
Test Date : Nov 27, 2013 03:22:13 PM

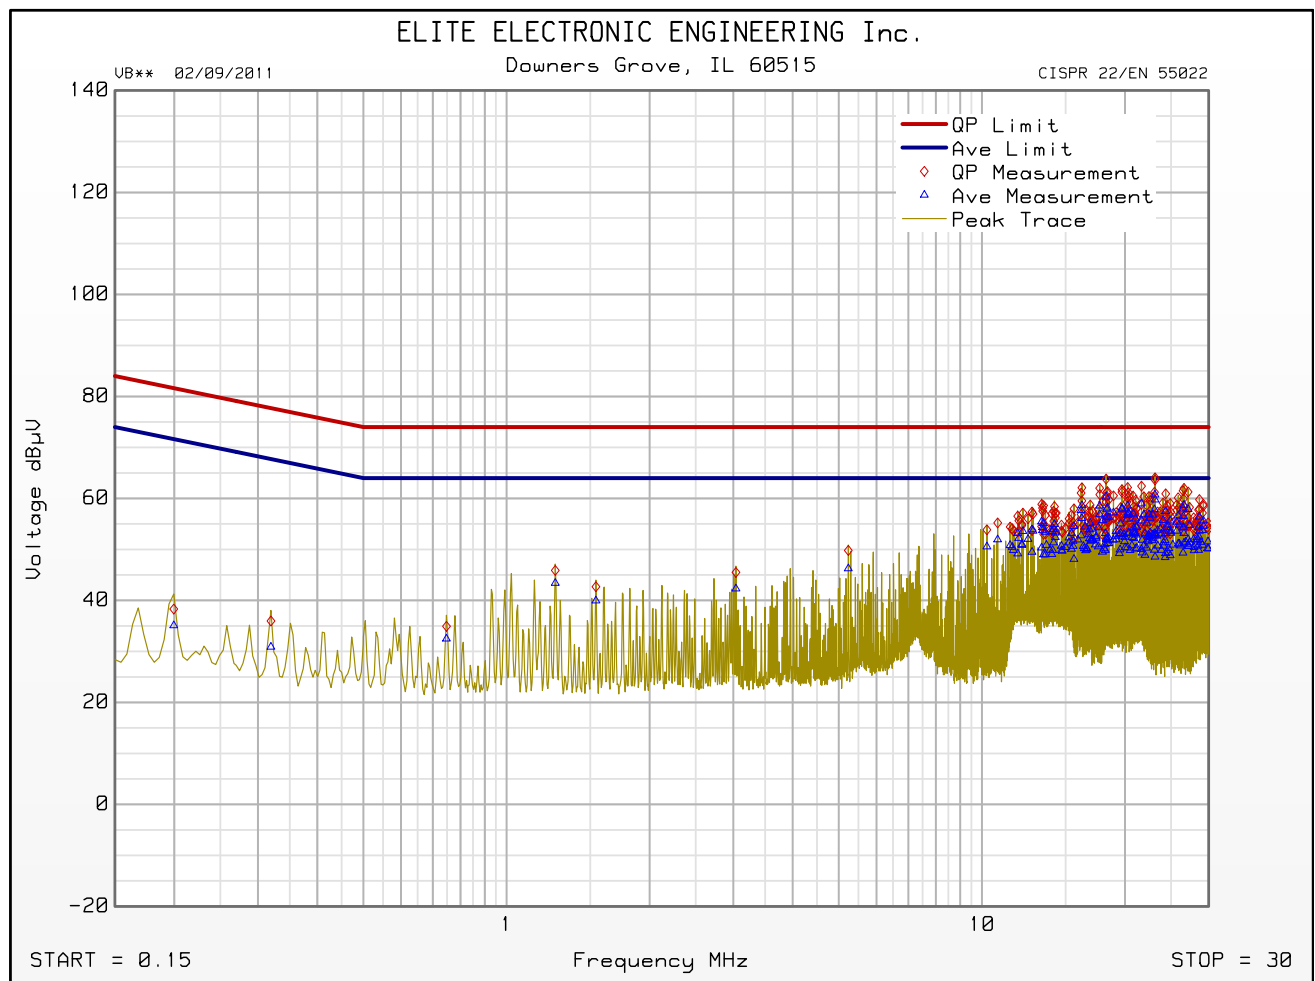

Emissions Meet QP Limit  
Emissions Meet Ave Limit

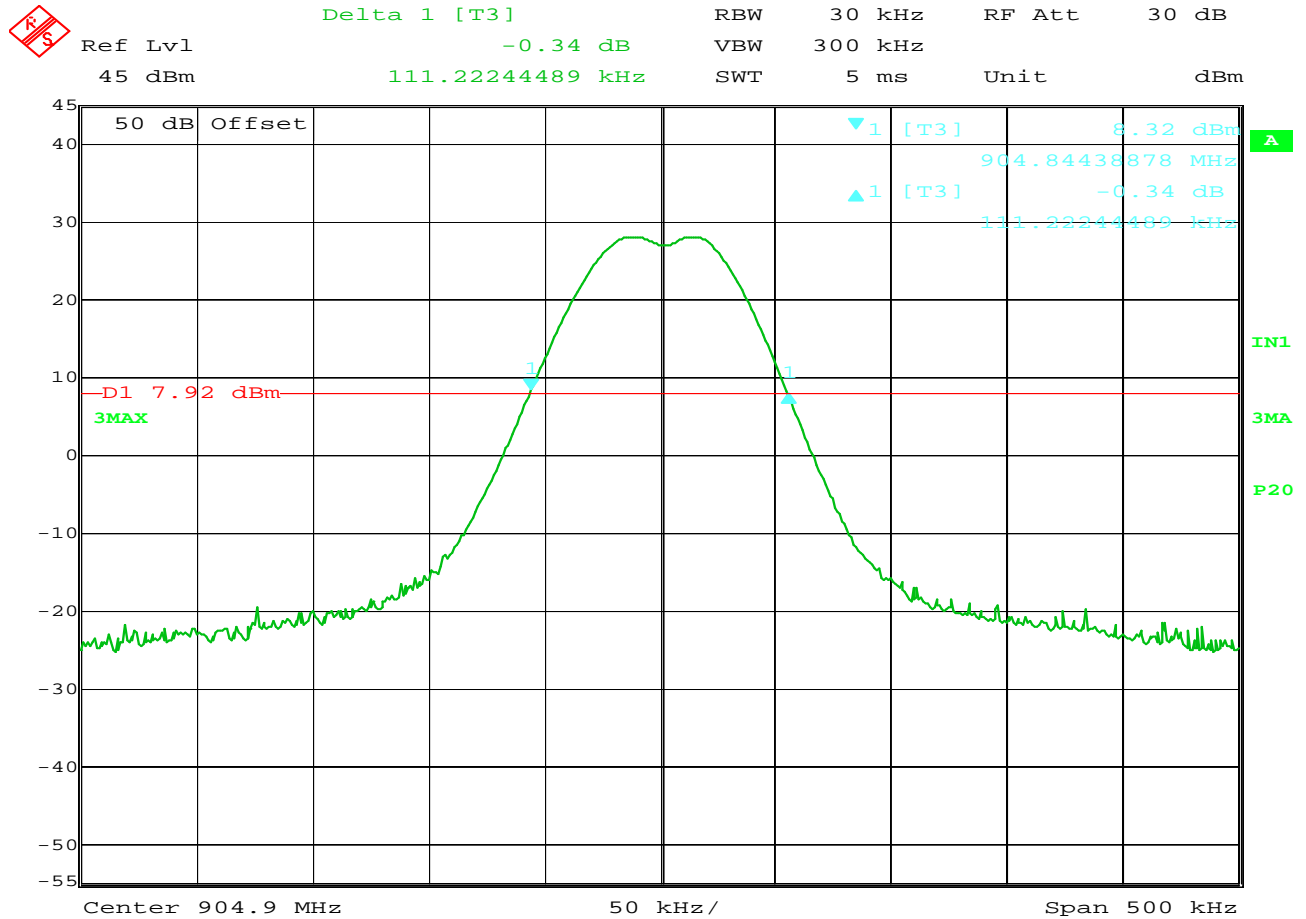

Date: 15.NOV.2013 14:48:00


### FCC 15.247 20 dB Bandwidth

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Tx @ 904.9 MHz  
NOTES :

NOTES



Ref Lvl 45 dBm  
Delta 1 [T3] -0.11 dB  
112.22444890 kHz  
RBW 30 kHz  
VBW 300 kHz  
SWT 5 ms  
RF Att 30 dB  
Unit dBm

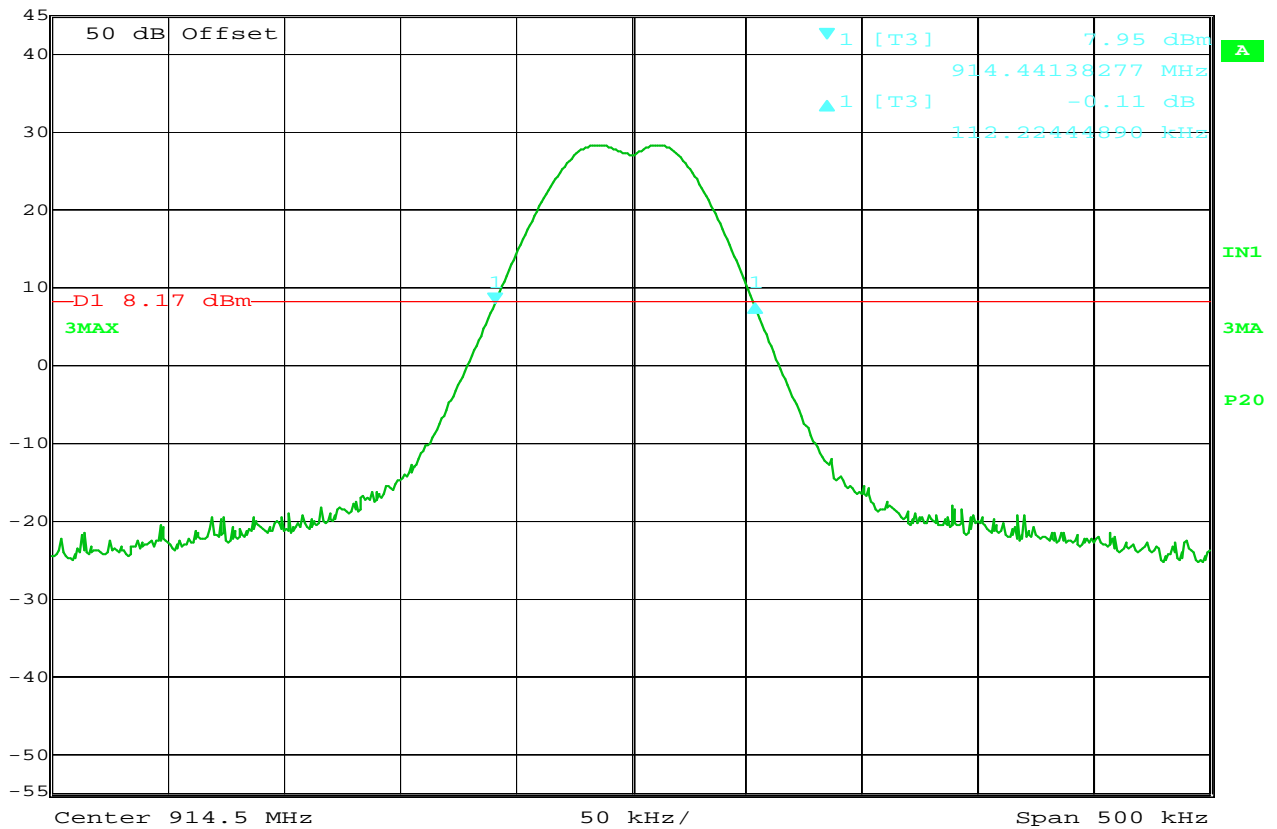


Date: 15.NOV.2013 14:46:34

### FCC 15.247 20 dB Bandwidth

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Tx @ 914.5 MHz  
NOTES :

NOTES

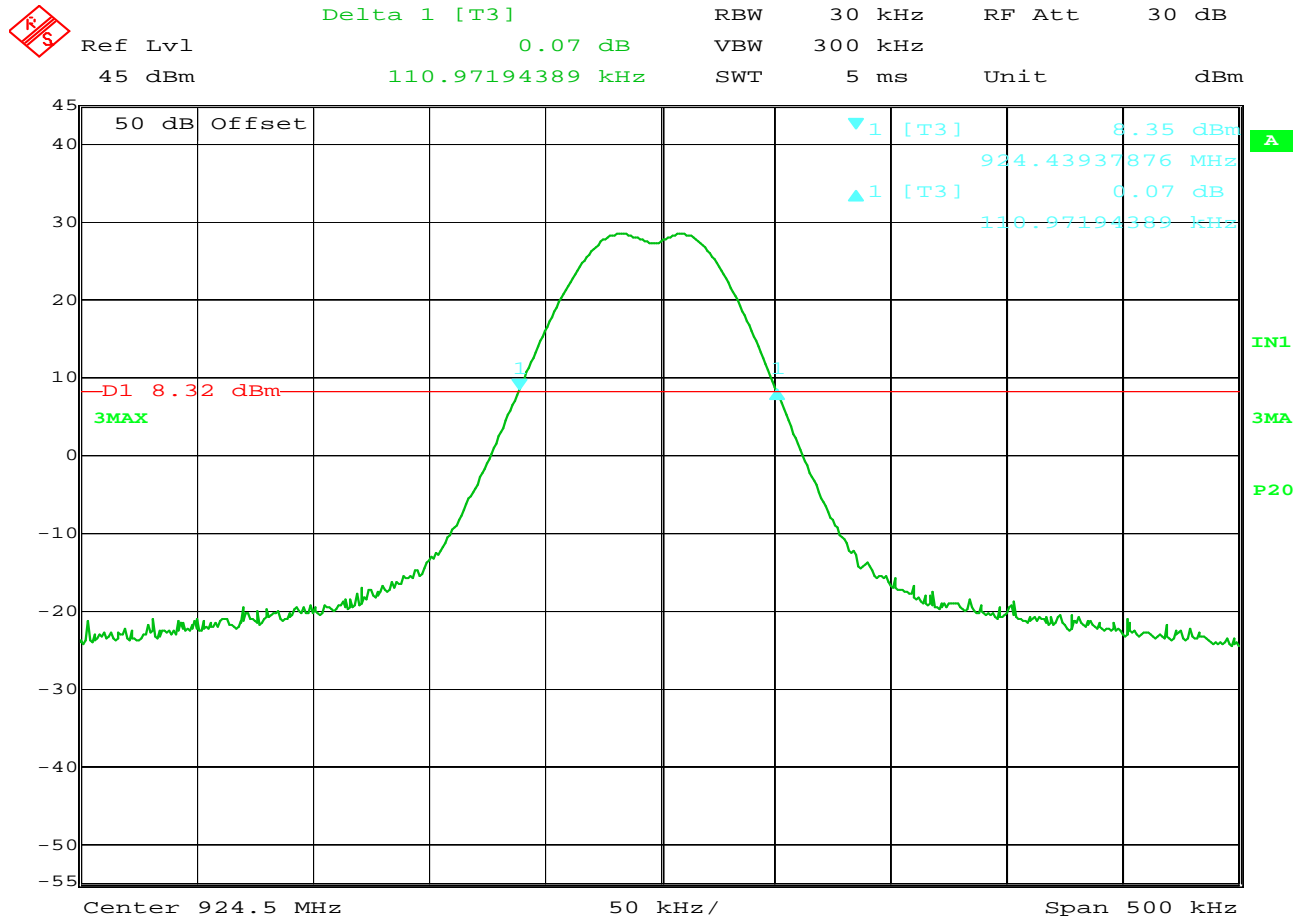

Date: 15.NOV.2013 14:37:26


### FCC 15.247 20 dB Bandwidth

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Tx @ 924.5 MHz  
NOTES :

NOTES



Delta 1 [T3] RBW 100 kHz RF Att 30 dB  
Ref Lvl 0.00 dB VBW 1 MHz  
45 dBm 400.80160321 kHz SWT 5 ms Unit dBm

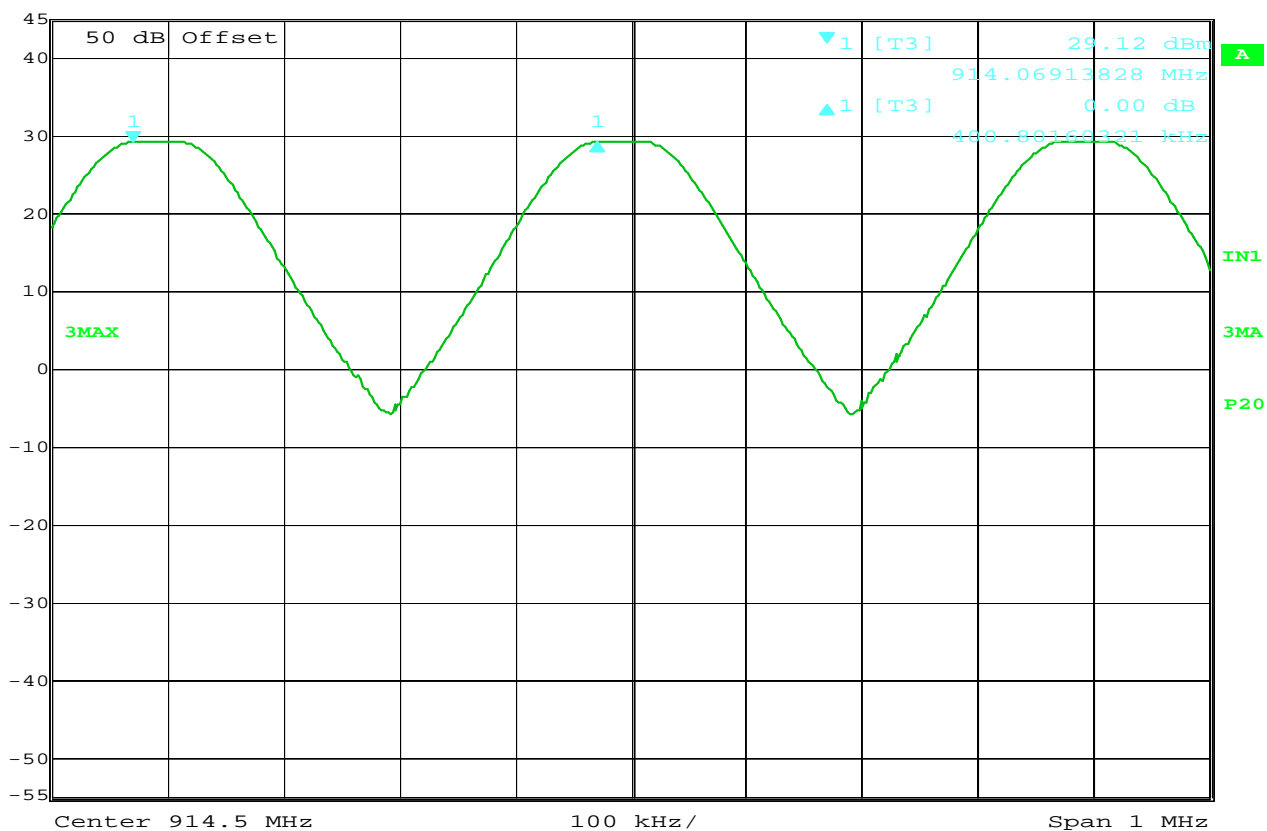

Date: 15.NOV.2013 13:53:52

### FCC 15.247 Carrier Frequency Separation

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Hopping  
NOTES : Carrer Frequency Seperation = 400.8kHz


NOTES





Ref Lvl  
45 dBm

RBW 100 kHz RF Att 30 dB  
VBW 1 MHz  
SWT 6.5 ms Unit dBm

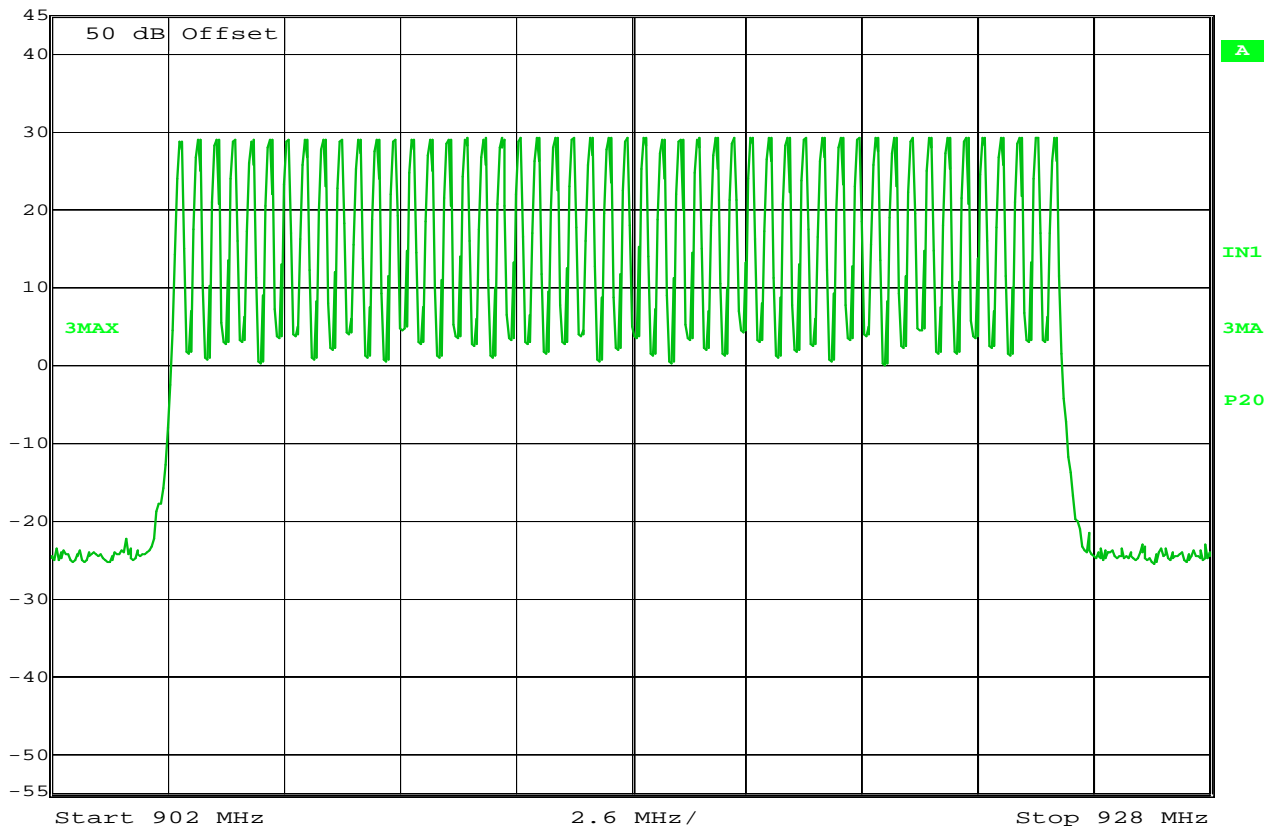

Date: 15.NOV.2013 13:59:25


### FCC 15.247 Number of Hopping Frequencies

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Hopping  
NOTES : Number of Hopping Frequencies = 50

NOTES



Delta 1 [T3] RBW 100 kHz RF Att 30 dB  
Ref Lvl 0.00 dB VBW 1 MHz  
45 dBm 199.398798 ms SWT 500 ms Unit dBm

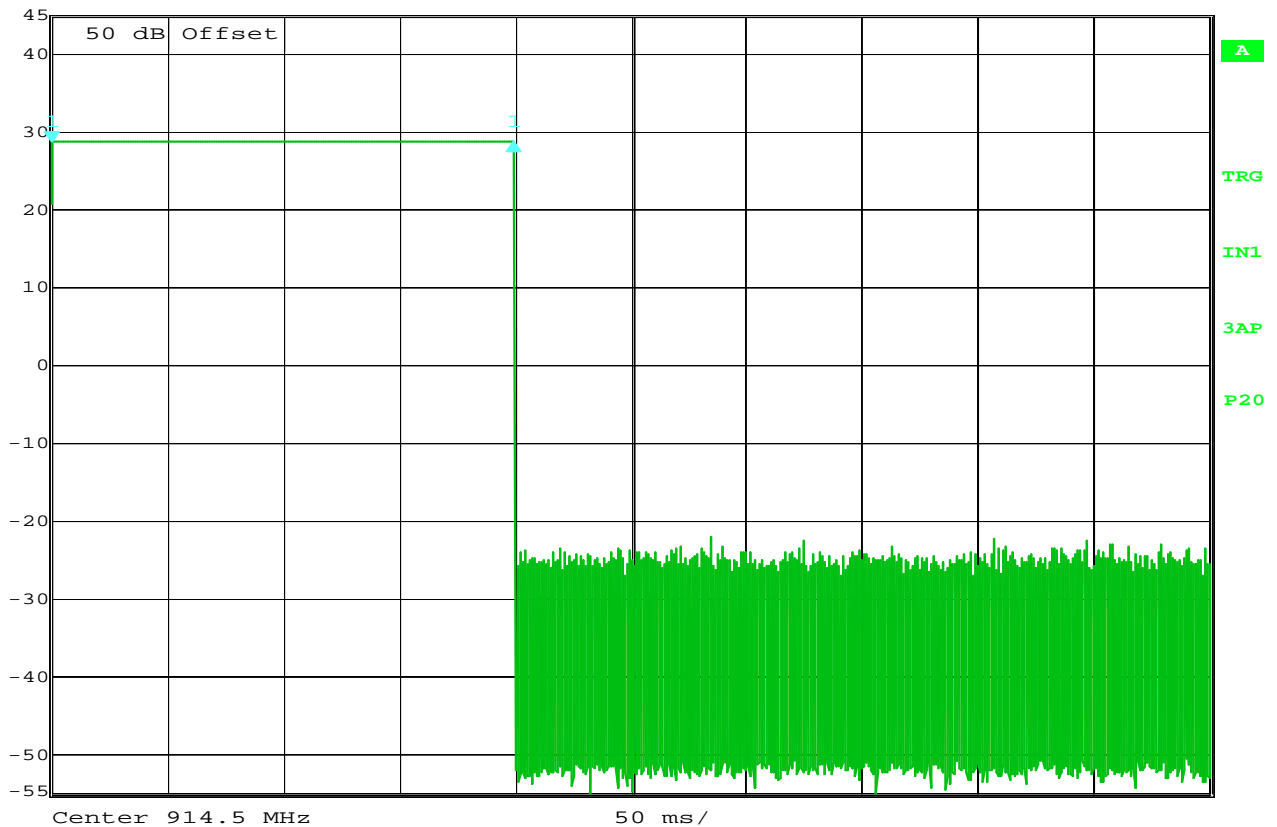


Date: 23.DEC.2013 13:03:54

### FCC 15.247 Dwell Time

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Tx @ 924.5 MHz  
NOTES : Pulse Width = 199.39 mS

NOTES

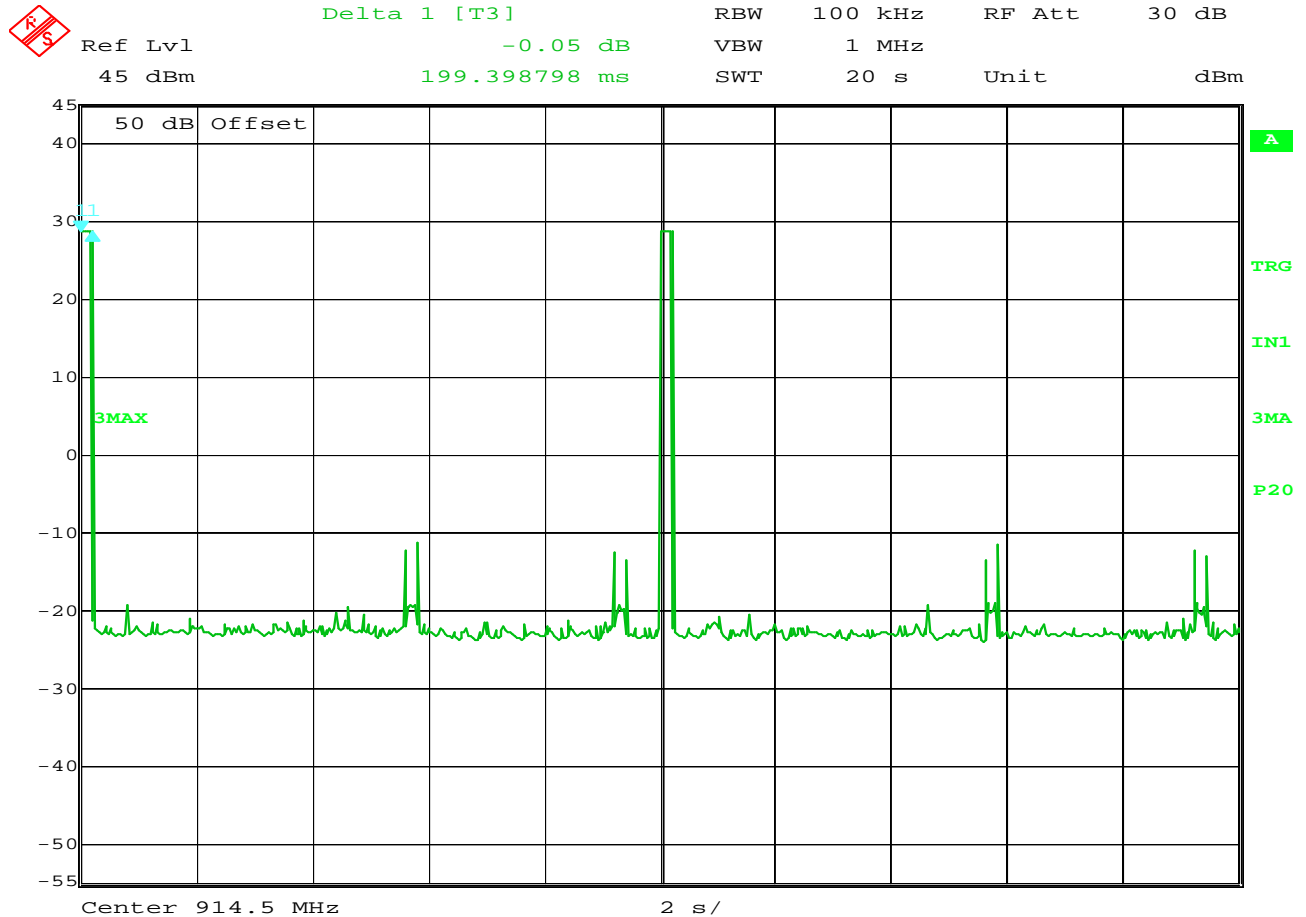

Date: 23.DEC.2013 13:05:07


**FCC 15.247 Dwell Time**

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Hopping  
NOTES : number of hops in 20 seconds = 2

NOTES



Marker 1 [T3] RBW 1 MHz RF Att 30 dB  
28.71 dBm VBW 10 MHz  
904.84789579 MHz SWT 5 ms Unit dBm

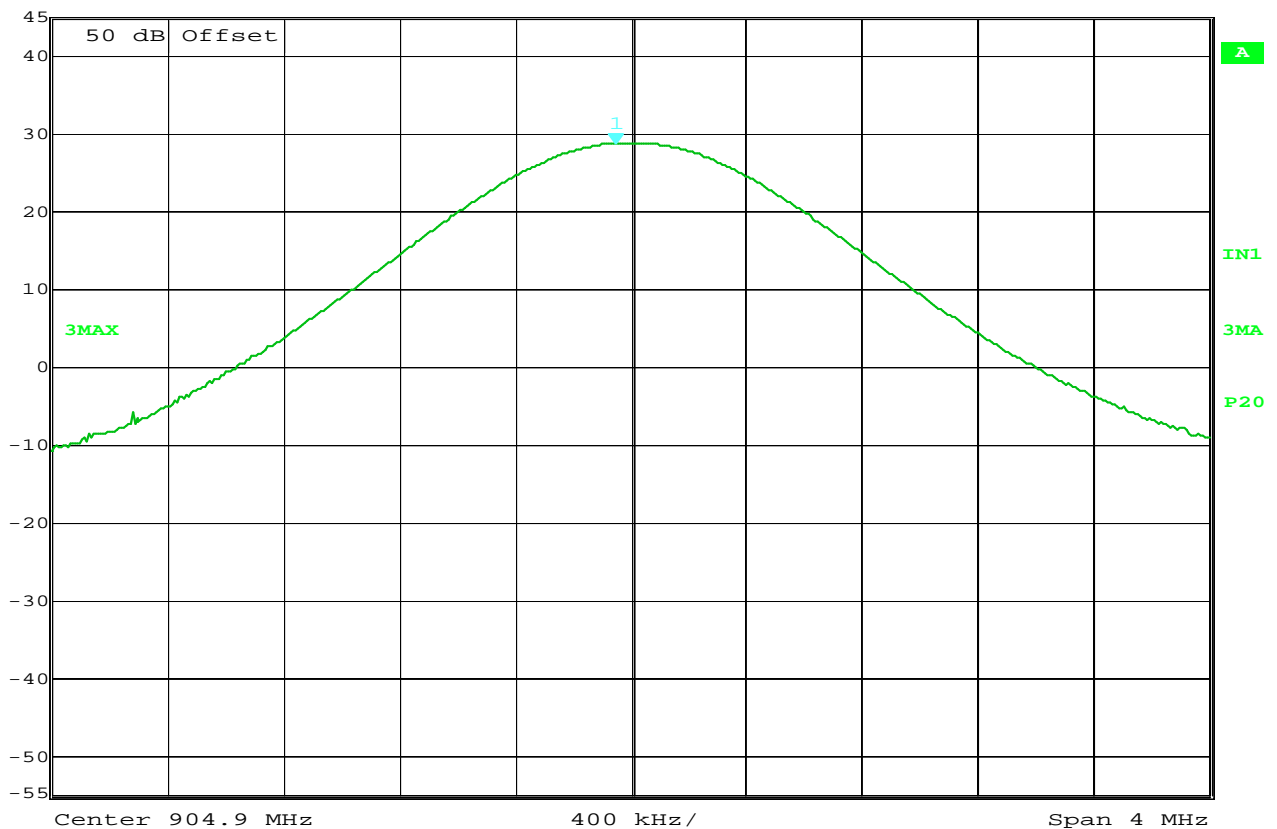

Date: 15.NOV.2013 10:57:18


### FCC 15C Output Power Measurements

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gateway  
TEST MODE : Tx @ 904.9 MHz  
NOTES :

NOTES



Marker 1 [T3] RBW 1 MHz RF Att 30 dB  
28.97 dBm VBW 10 MHz  
914.45591182 MHz SWT 5 ms Unit dBm

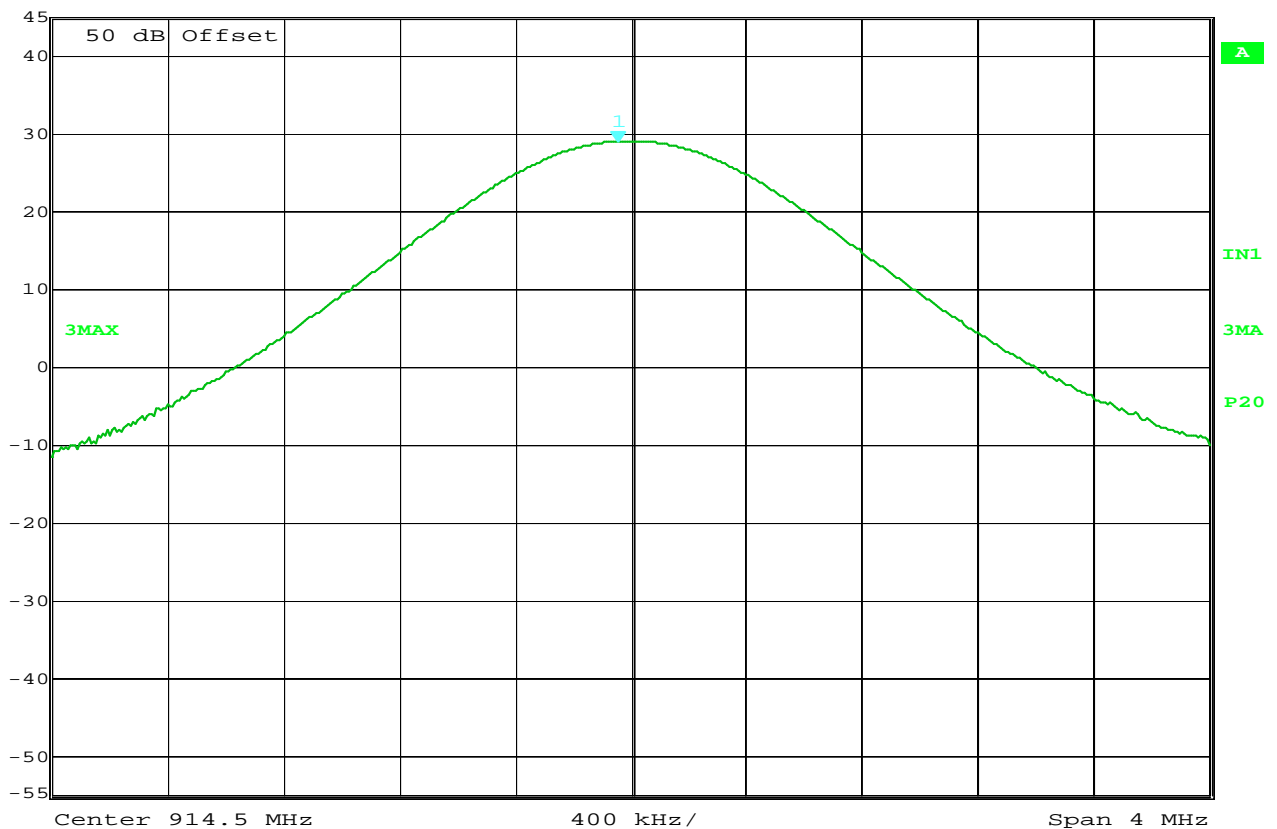

Date: 15.NOV.2013 10:49:05


### FCC 15C Output Power Measurements

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gateway  
TEST MODE : Tx @ 914.5 MHz  
NOTES :

NOTES



Marker 1 [T3] RBW 1 MHz RF Att 30 dB  
28.97 dBm VBW 10 MHz  
924.43186373 MHz SWT 5 ms Unit dBm

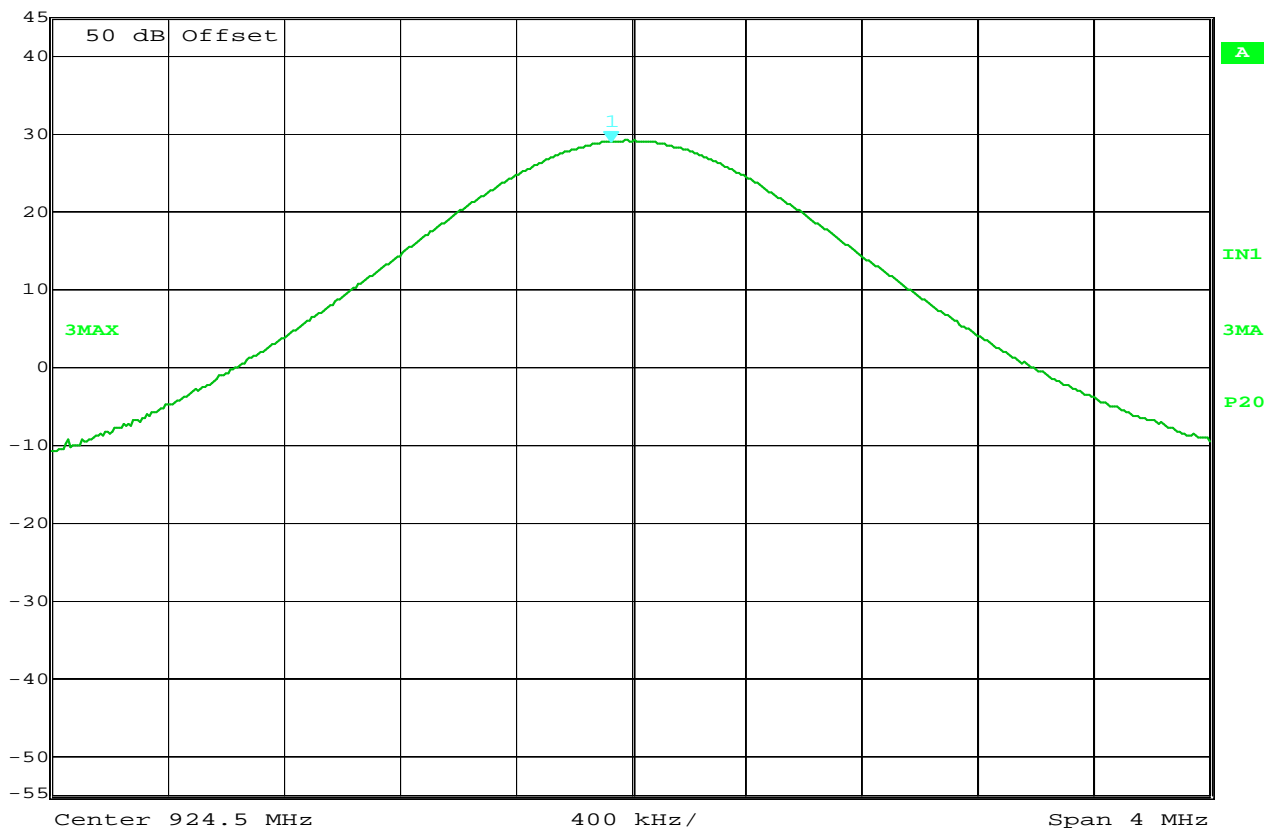

Date: 15.NOV.2013 10:52:53

### FCC 15C Output Power Measurements

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gateway  
TEST MODE : Tx @ 924.5 MHz  
NOTES :


NOTES



Manufacturer : Badger Meter  
Model No. : Orion SE Gen2 Gateway  
Specification : FCC-15.247 Effective Isotropic Radiated Power (EIRP)  
Date : November 19, 2013  
Mode : See Below  
Notes : Test Distance is 3 meters

Freq. (MHz)	Ant Pol	Wide BW Meter Reading (dBuV)	Matched Sig. Gen. Reading (dB)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
904.90	H	94.6	20.8	2.2	2.0	20.9	36.0
904.90	V	107.8	35.0	2.2	2.0	35.1	36.0
914.50	H	94.6	20.6	2.2	2.1	20.7	36.0
914.50	V	108.2	35.5	2.2	2.1	35.6	36.0
924.50	H	93.6	20.6	2.2	2.1	20.7	36.0
924.50	V	108.6	35.5	2.2	2.1	35.6	36.0

$EIRP\ (dBm) = \text{Matched Signal Generator}\ (dBm) + \text{Antenna Gain}\ (dB) - \text{Antenna Gain}\ (dB)$

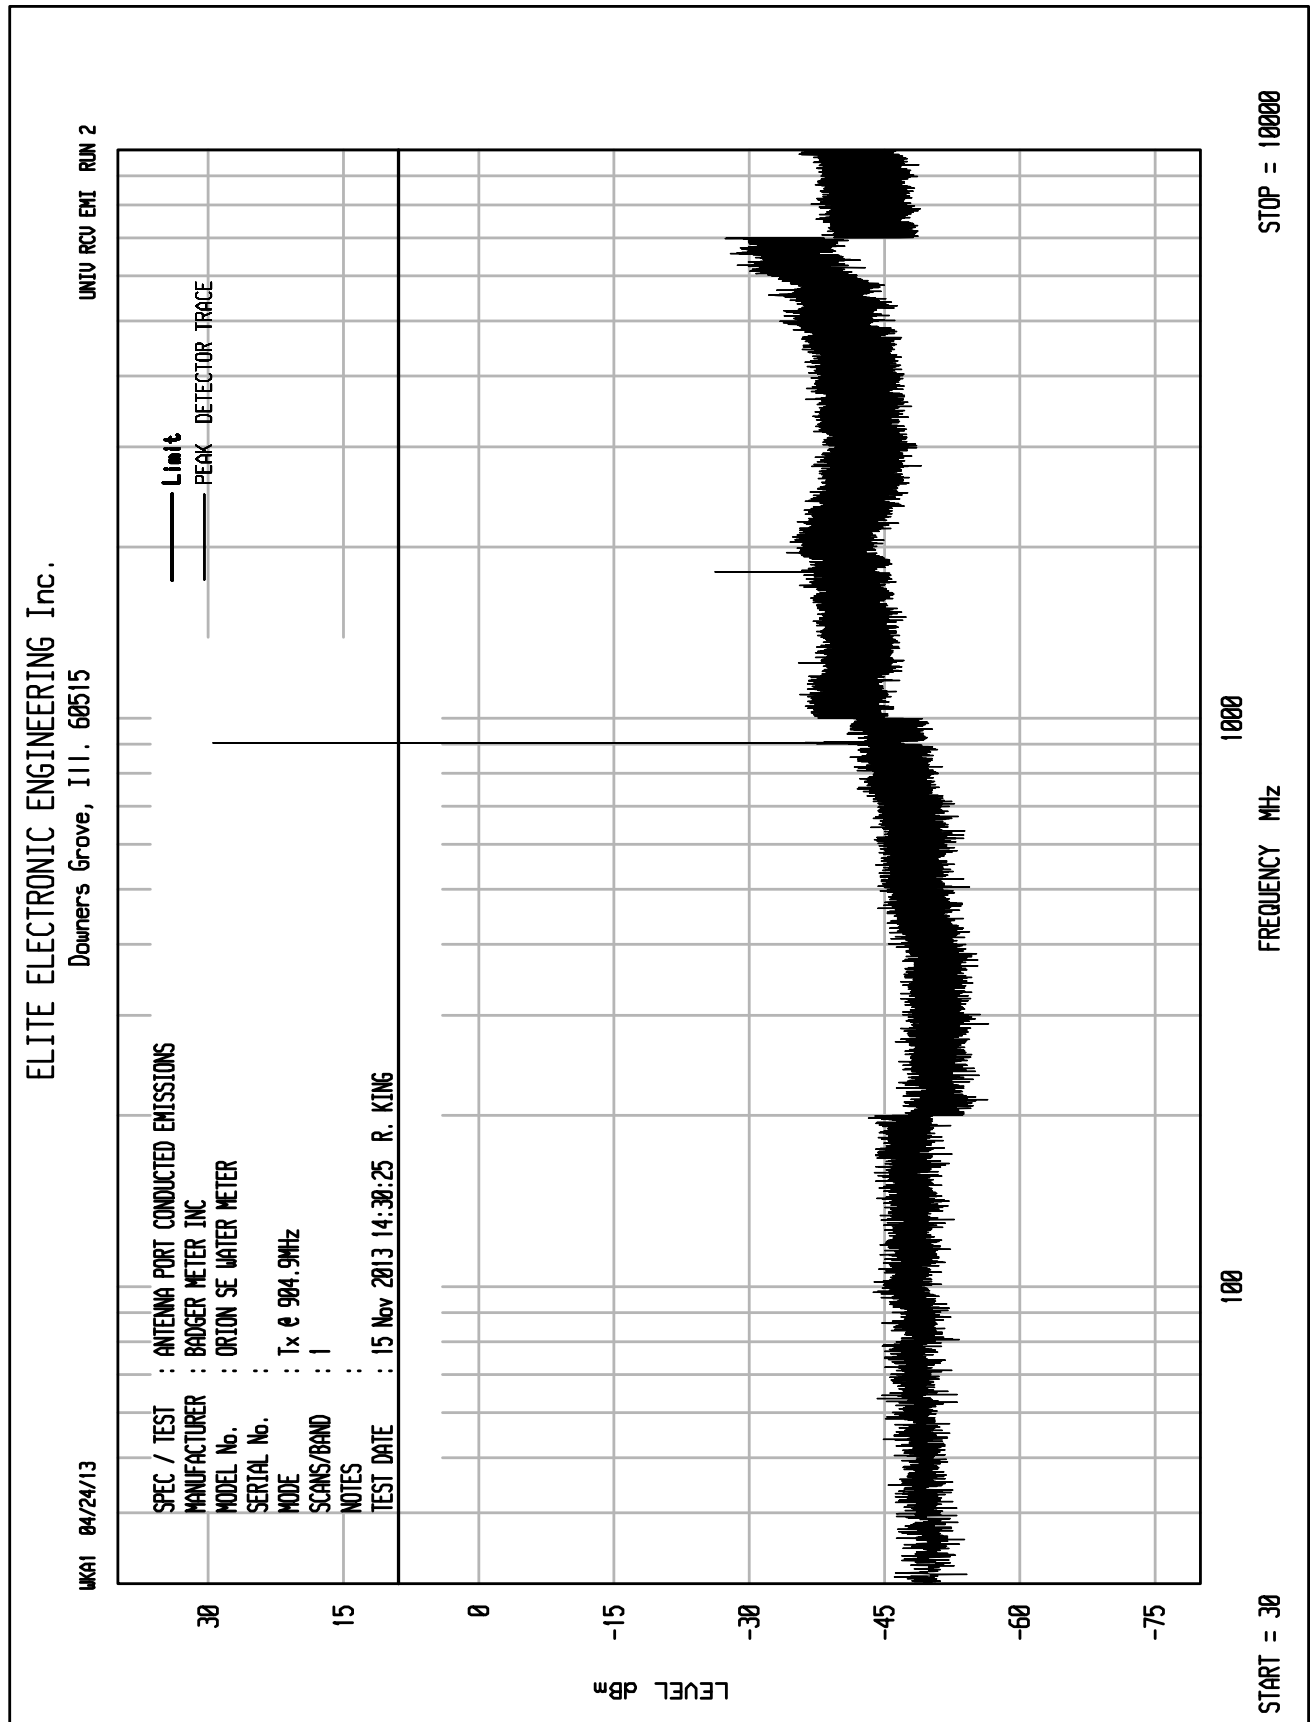








ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515


UNIU RCU ENI RUN 3

UKAI 04/24/13

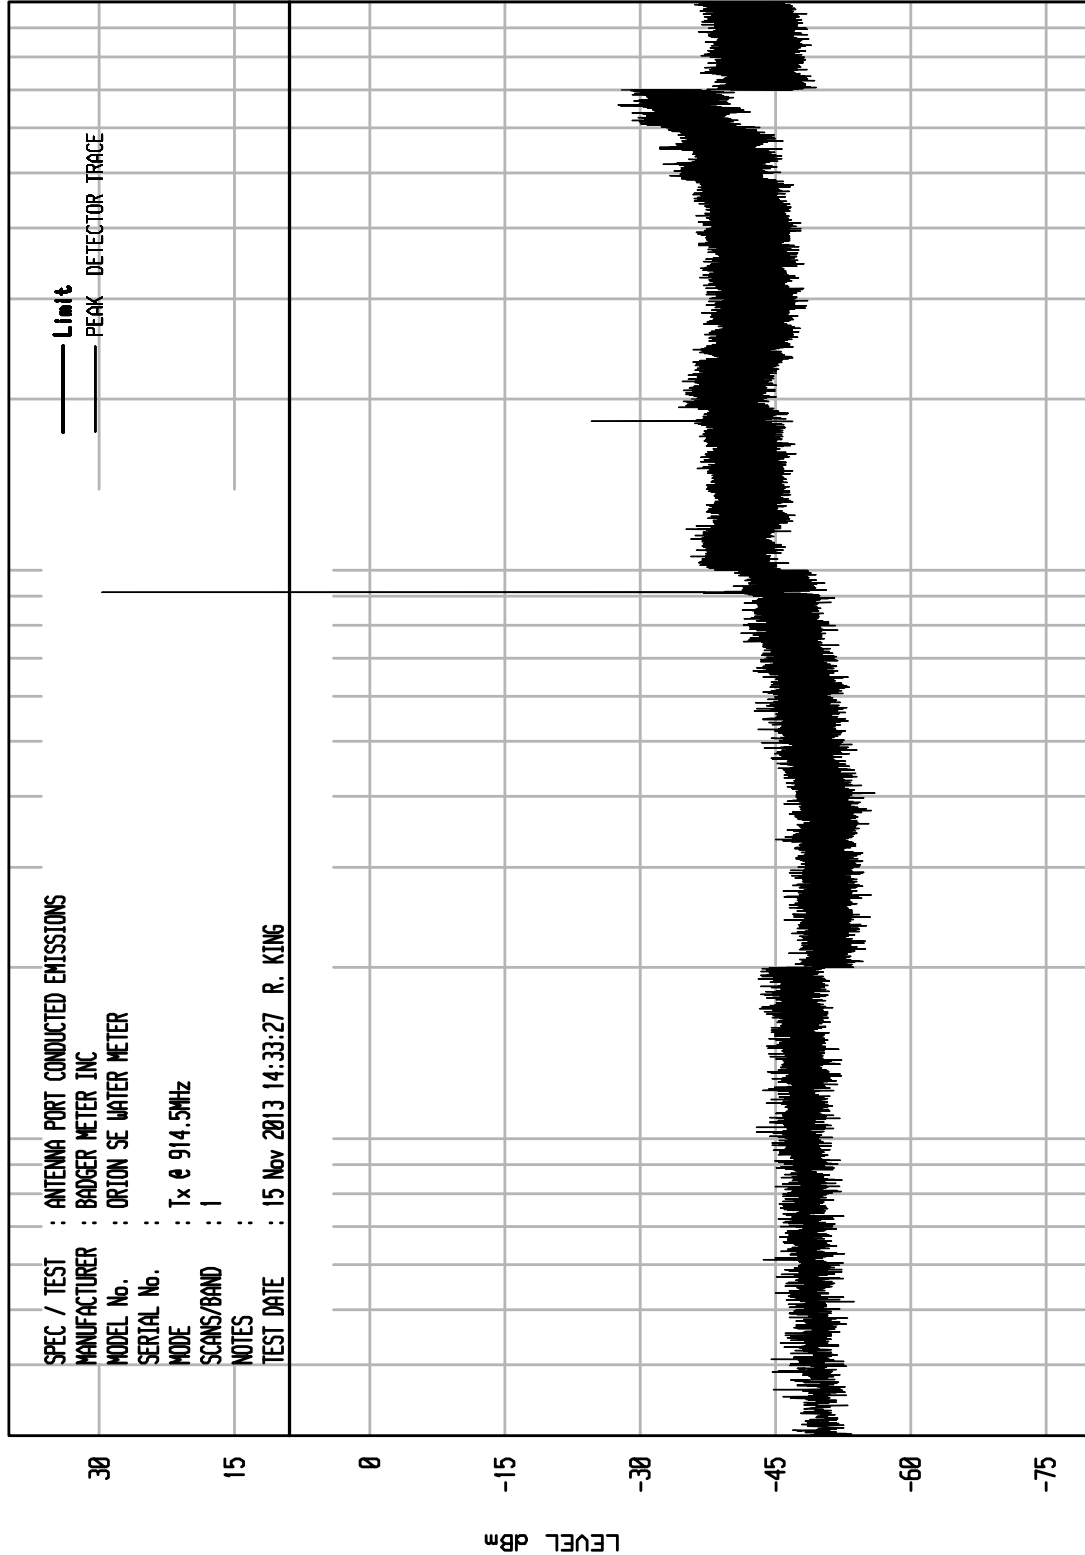

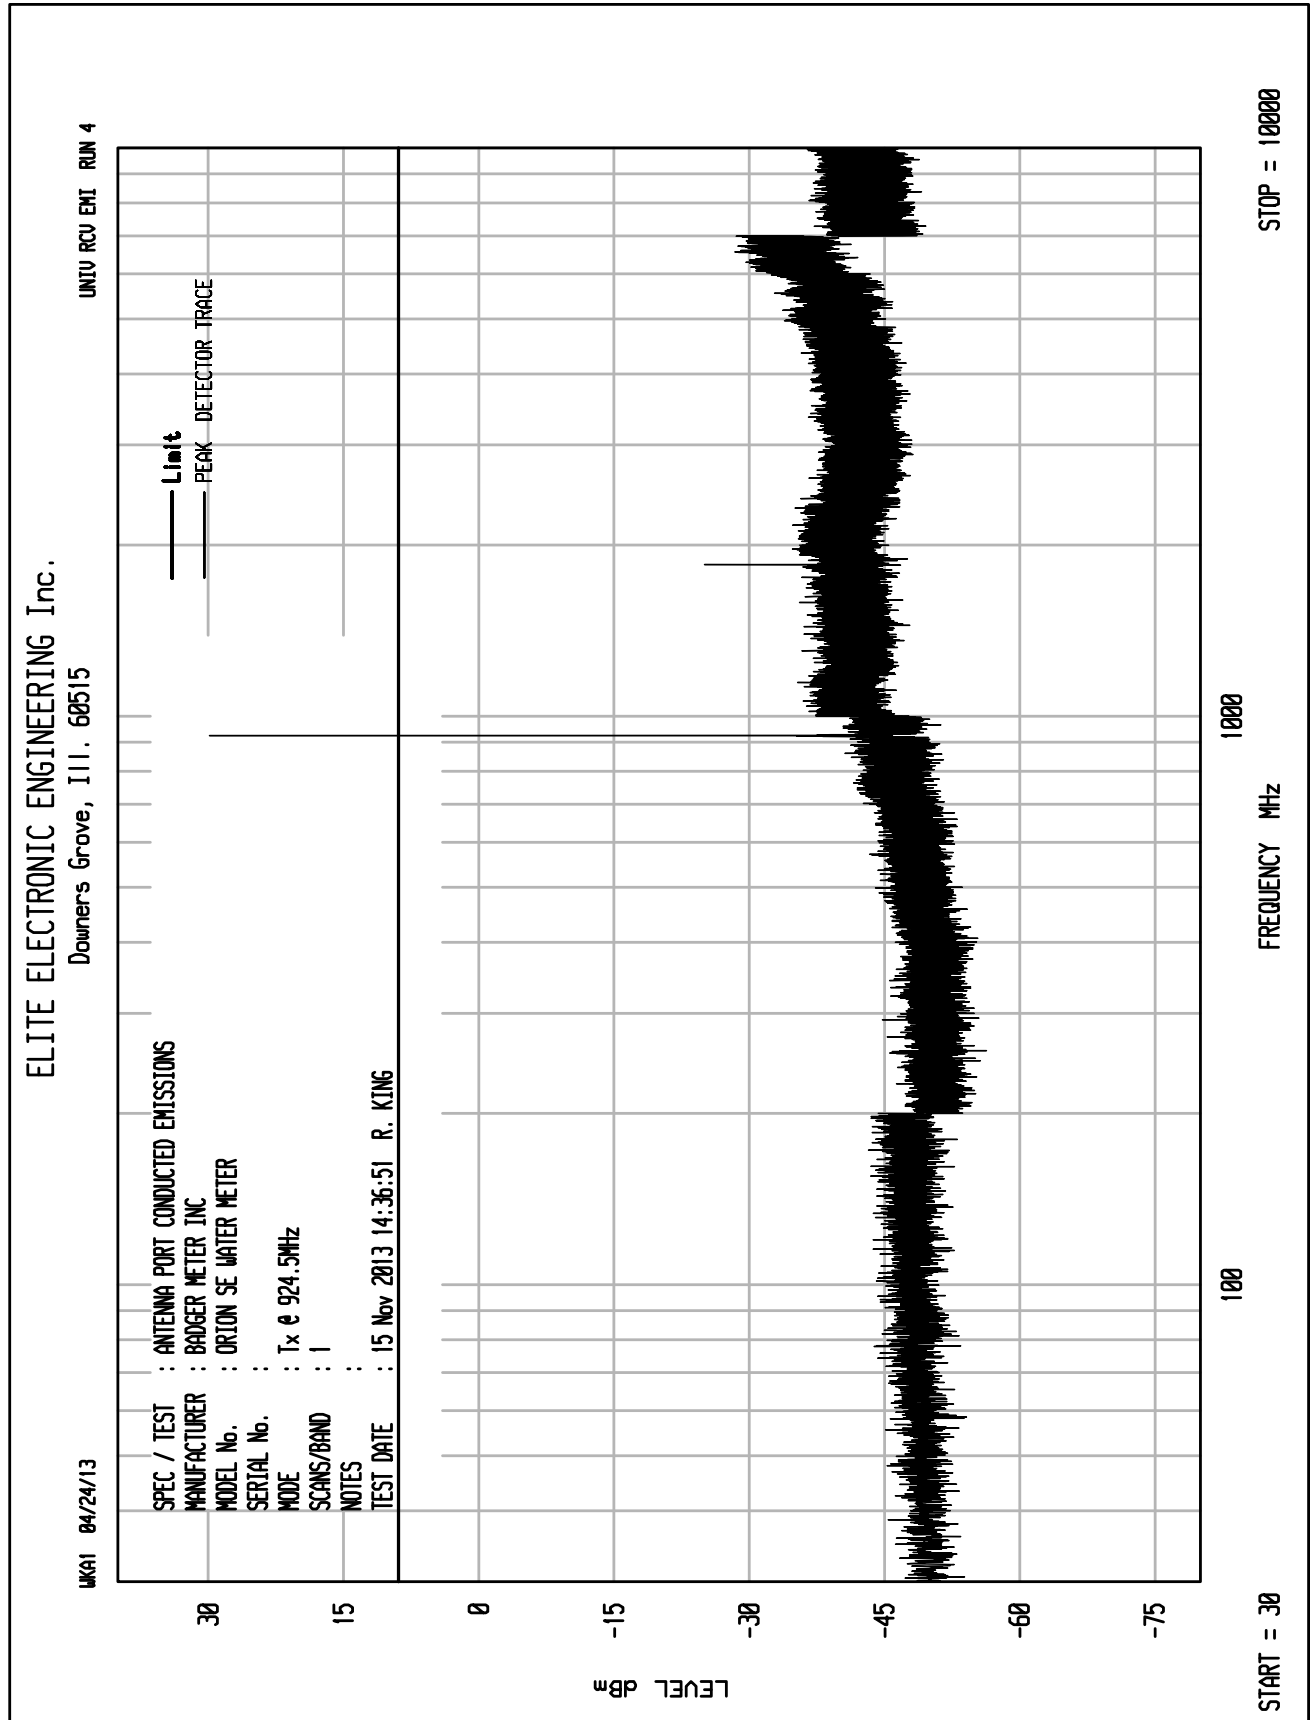

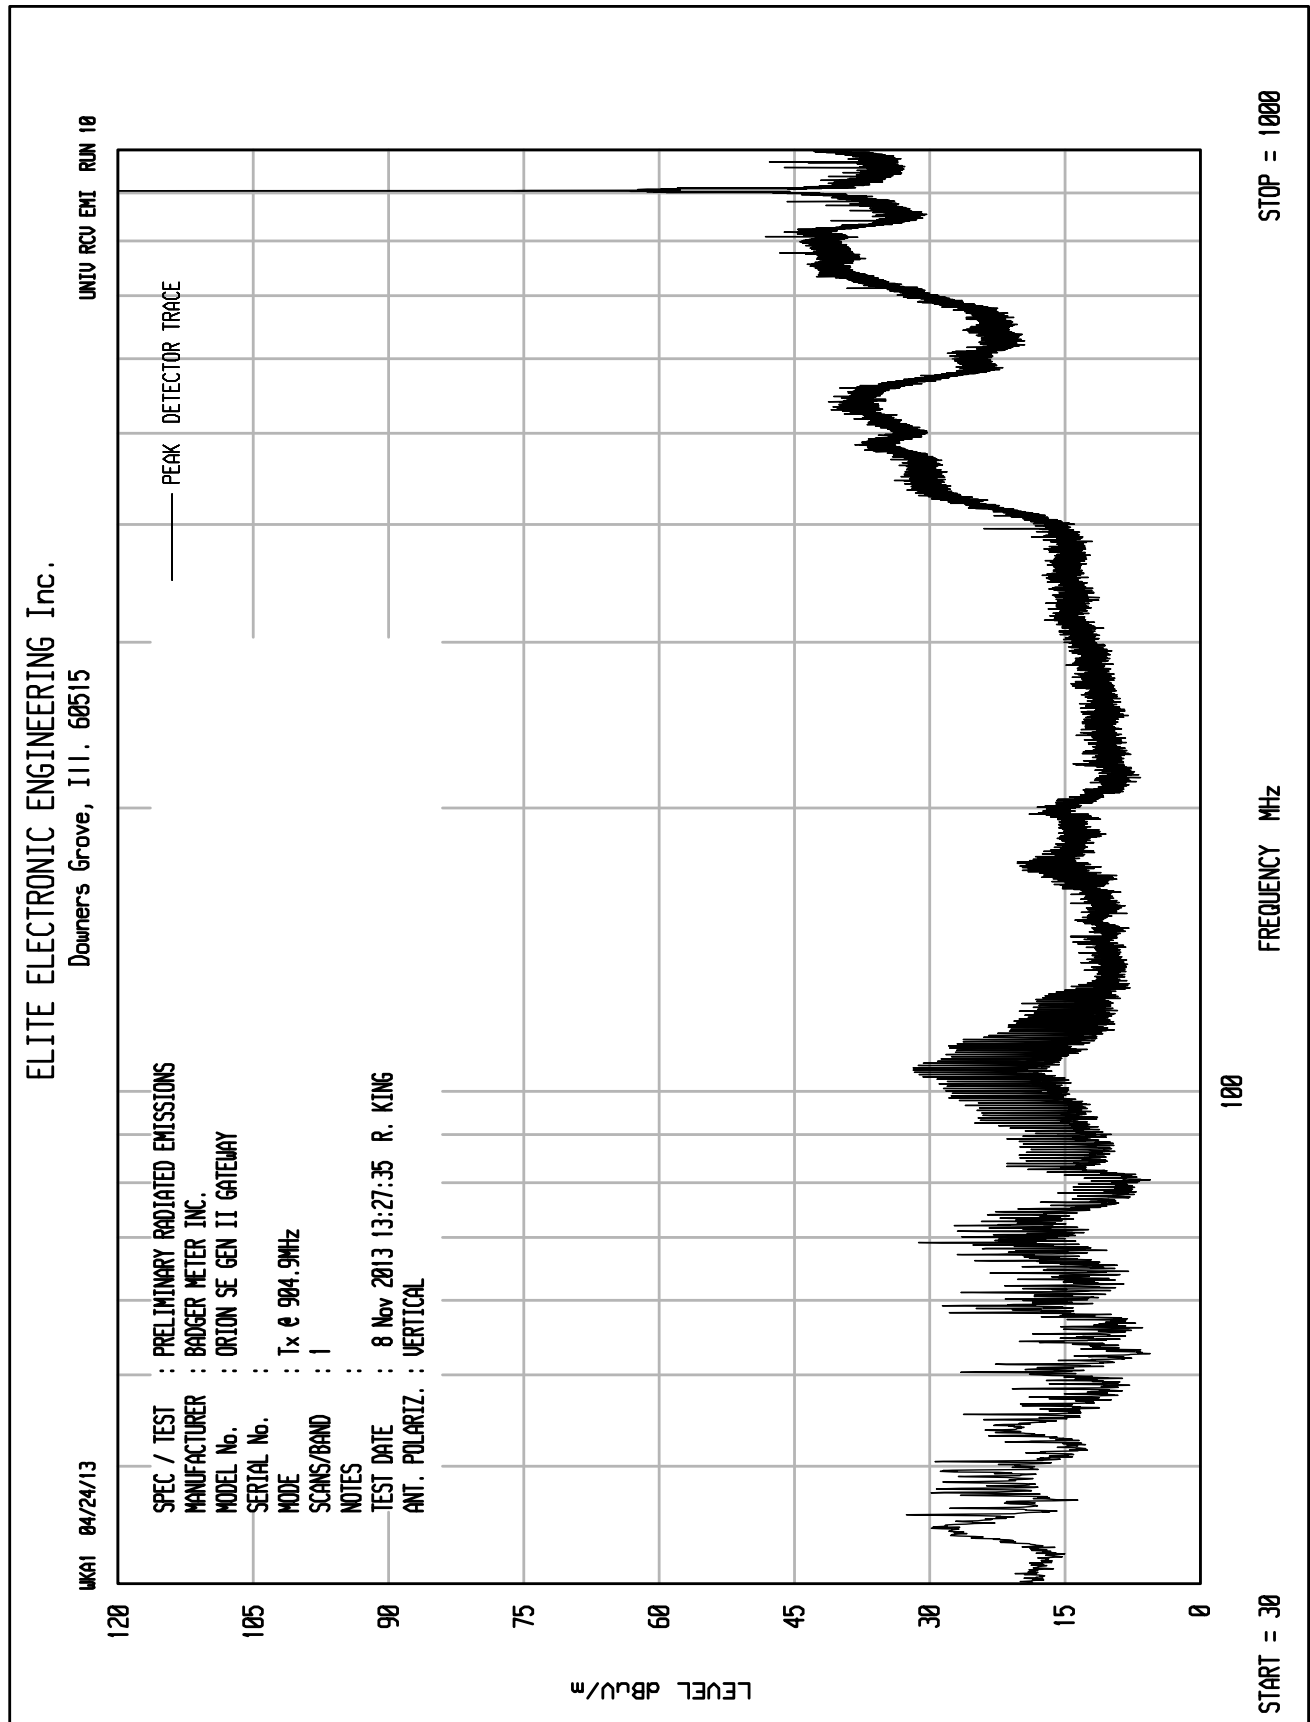

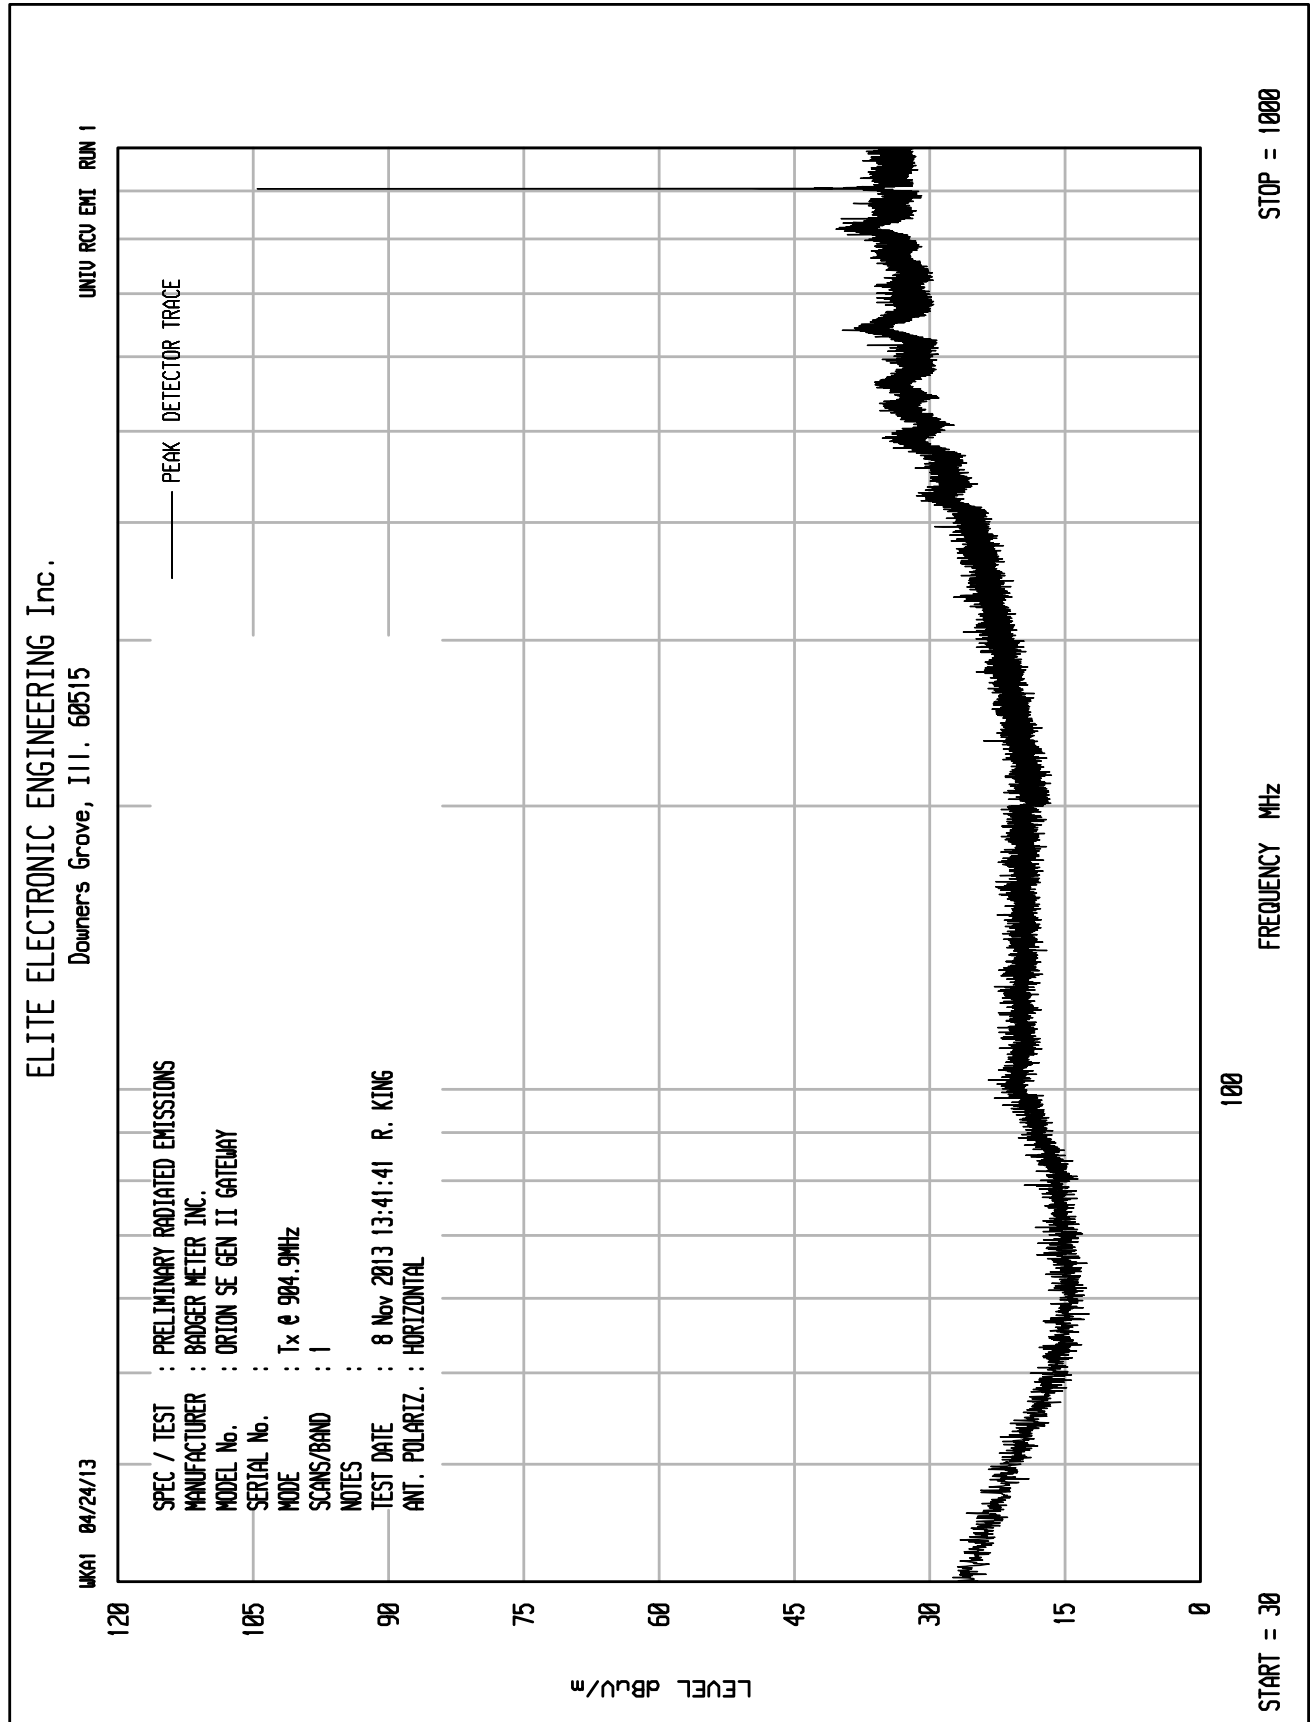






ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515


UNIT: RCU ENI RUN 2

UKA1 04/24/13

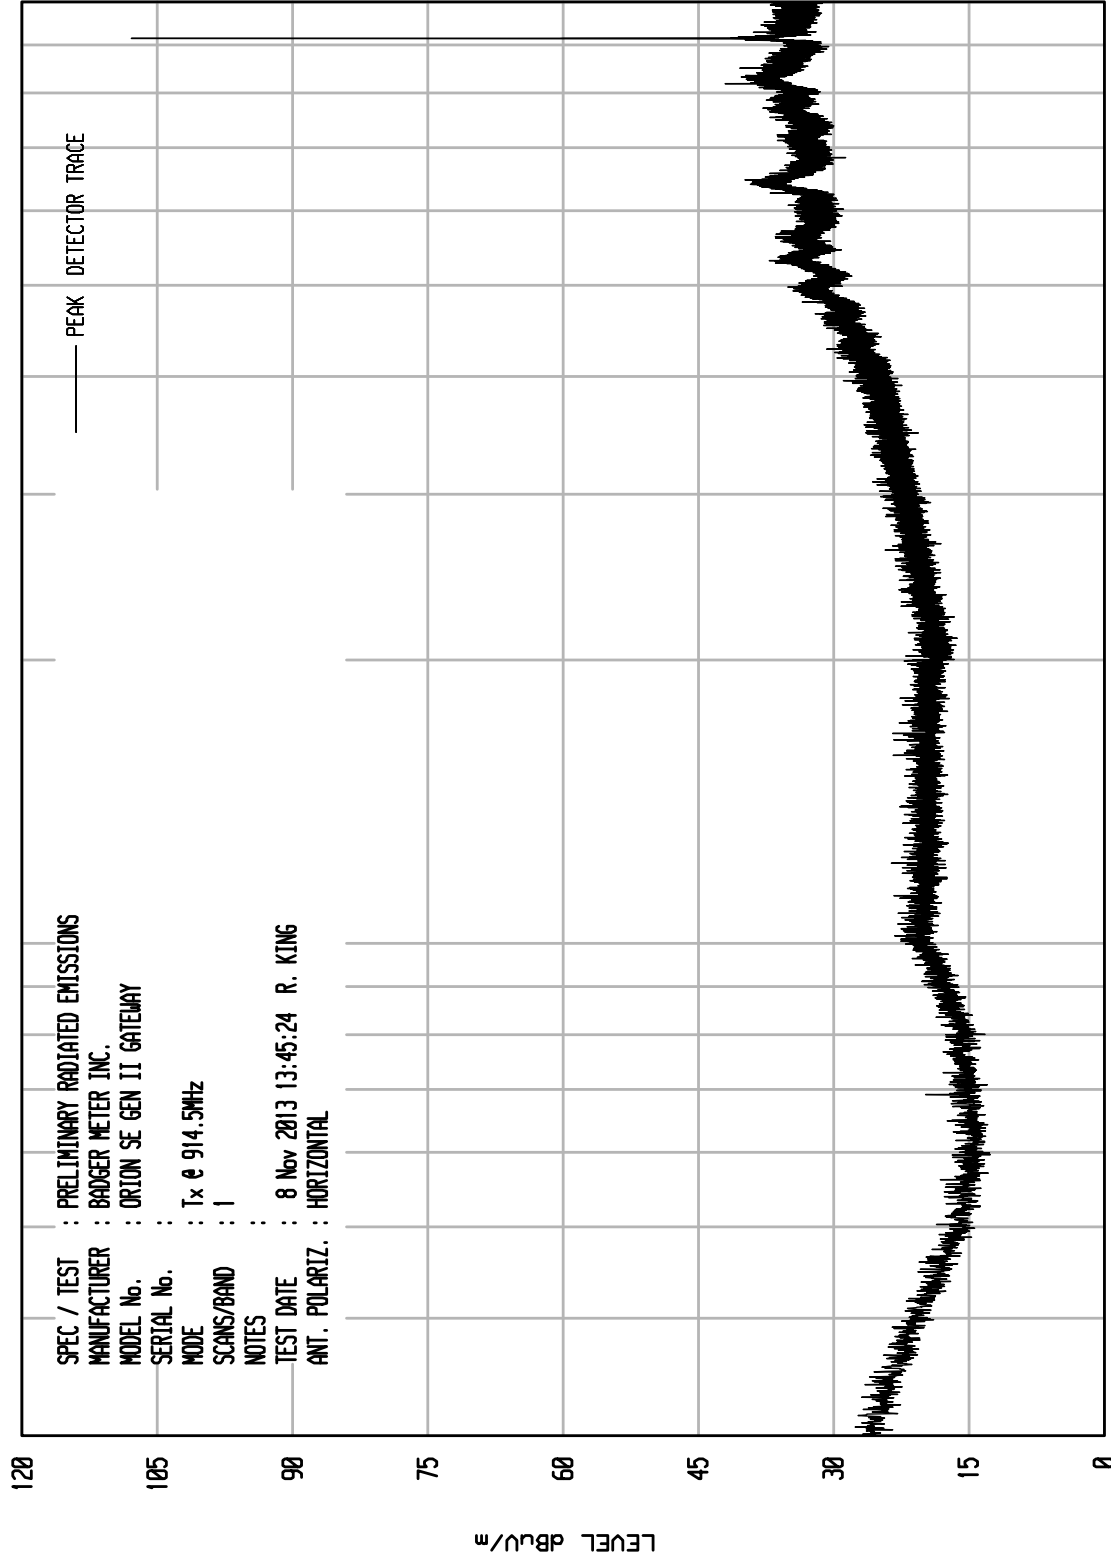


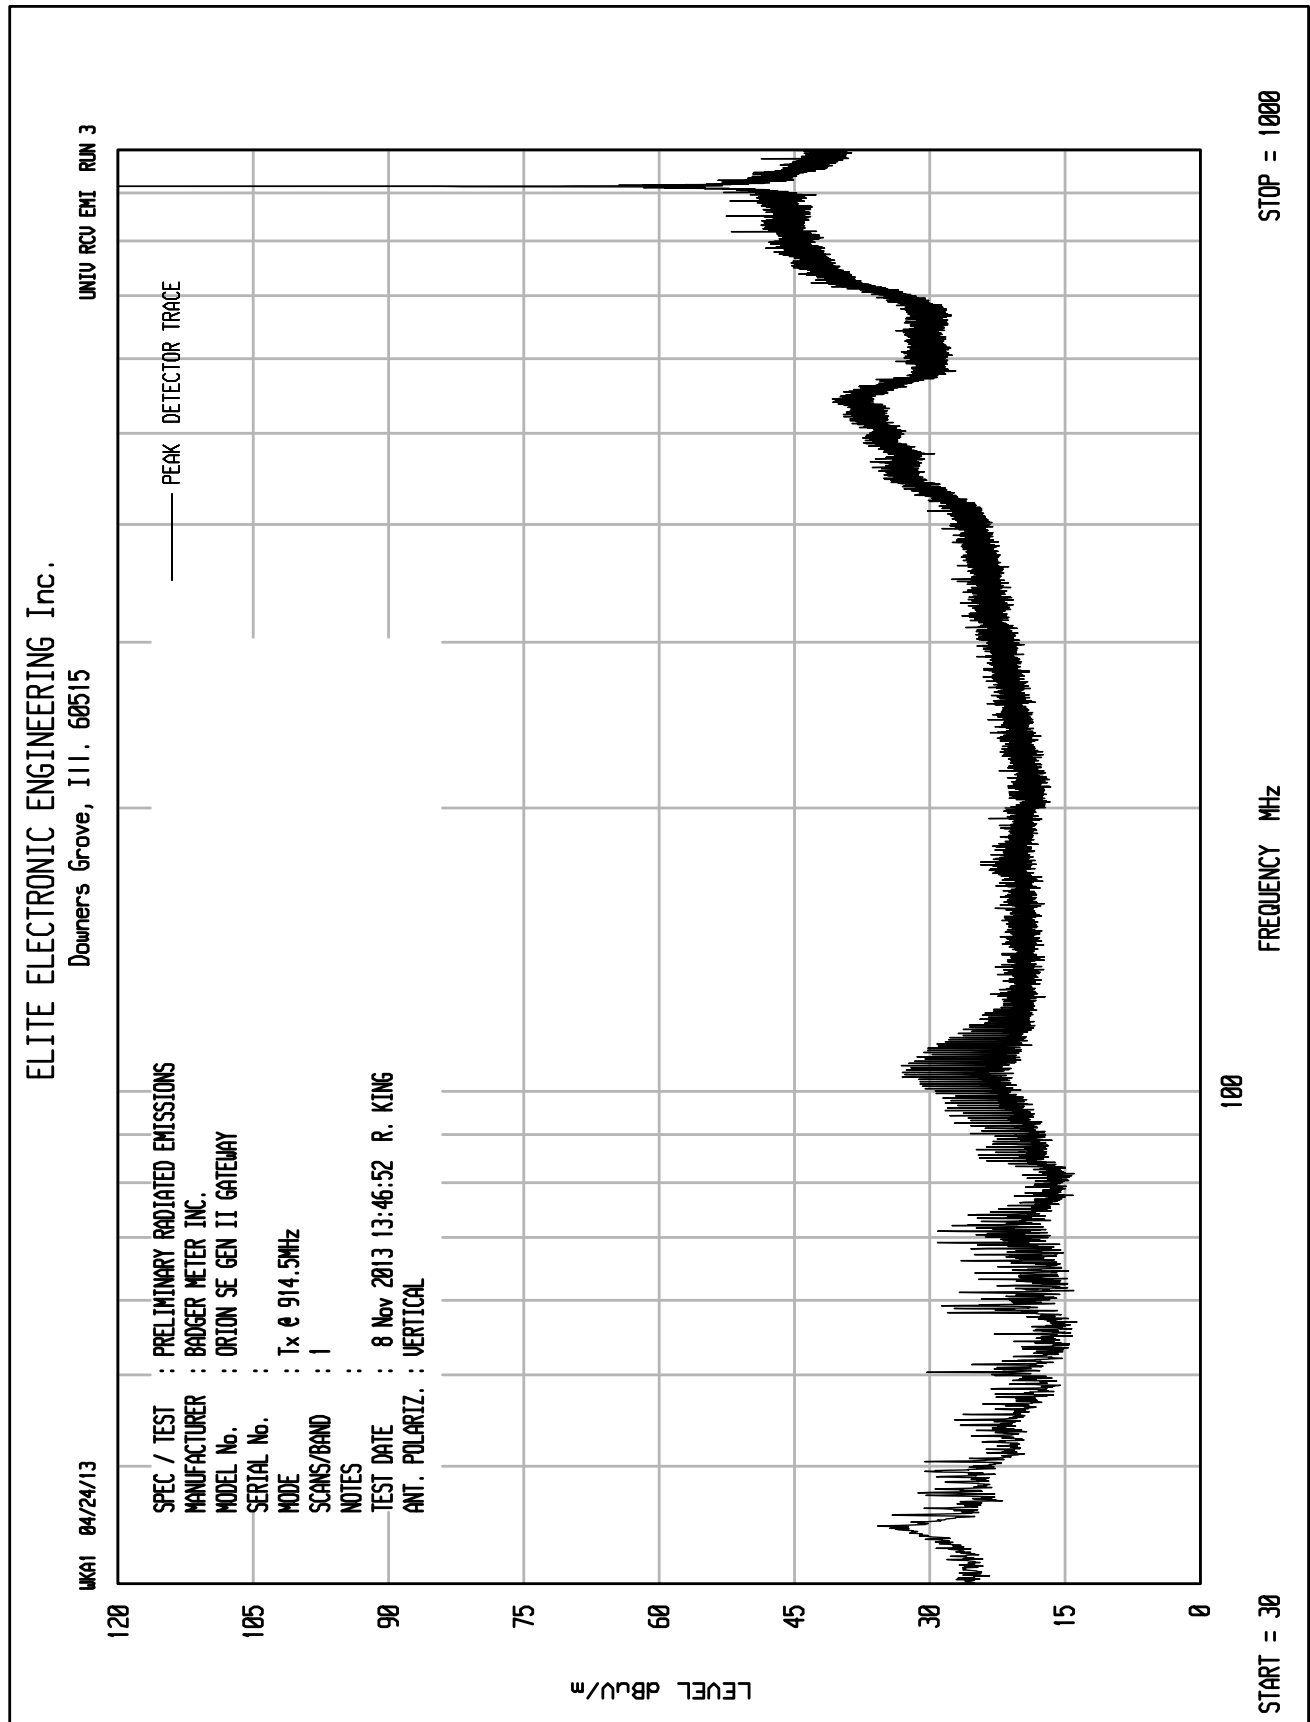


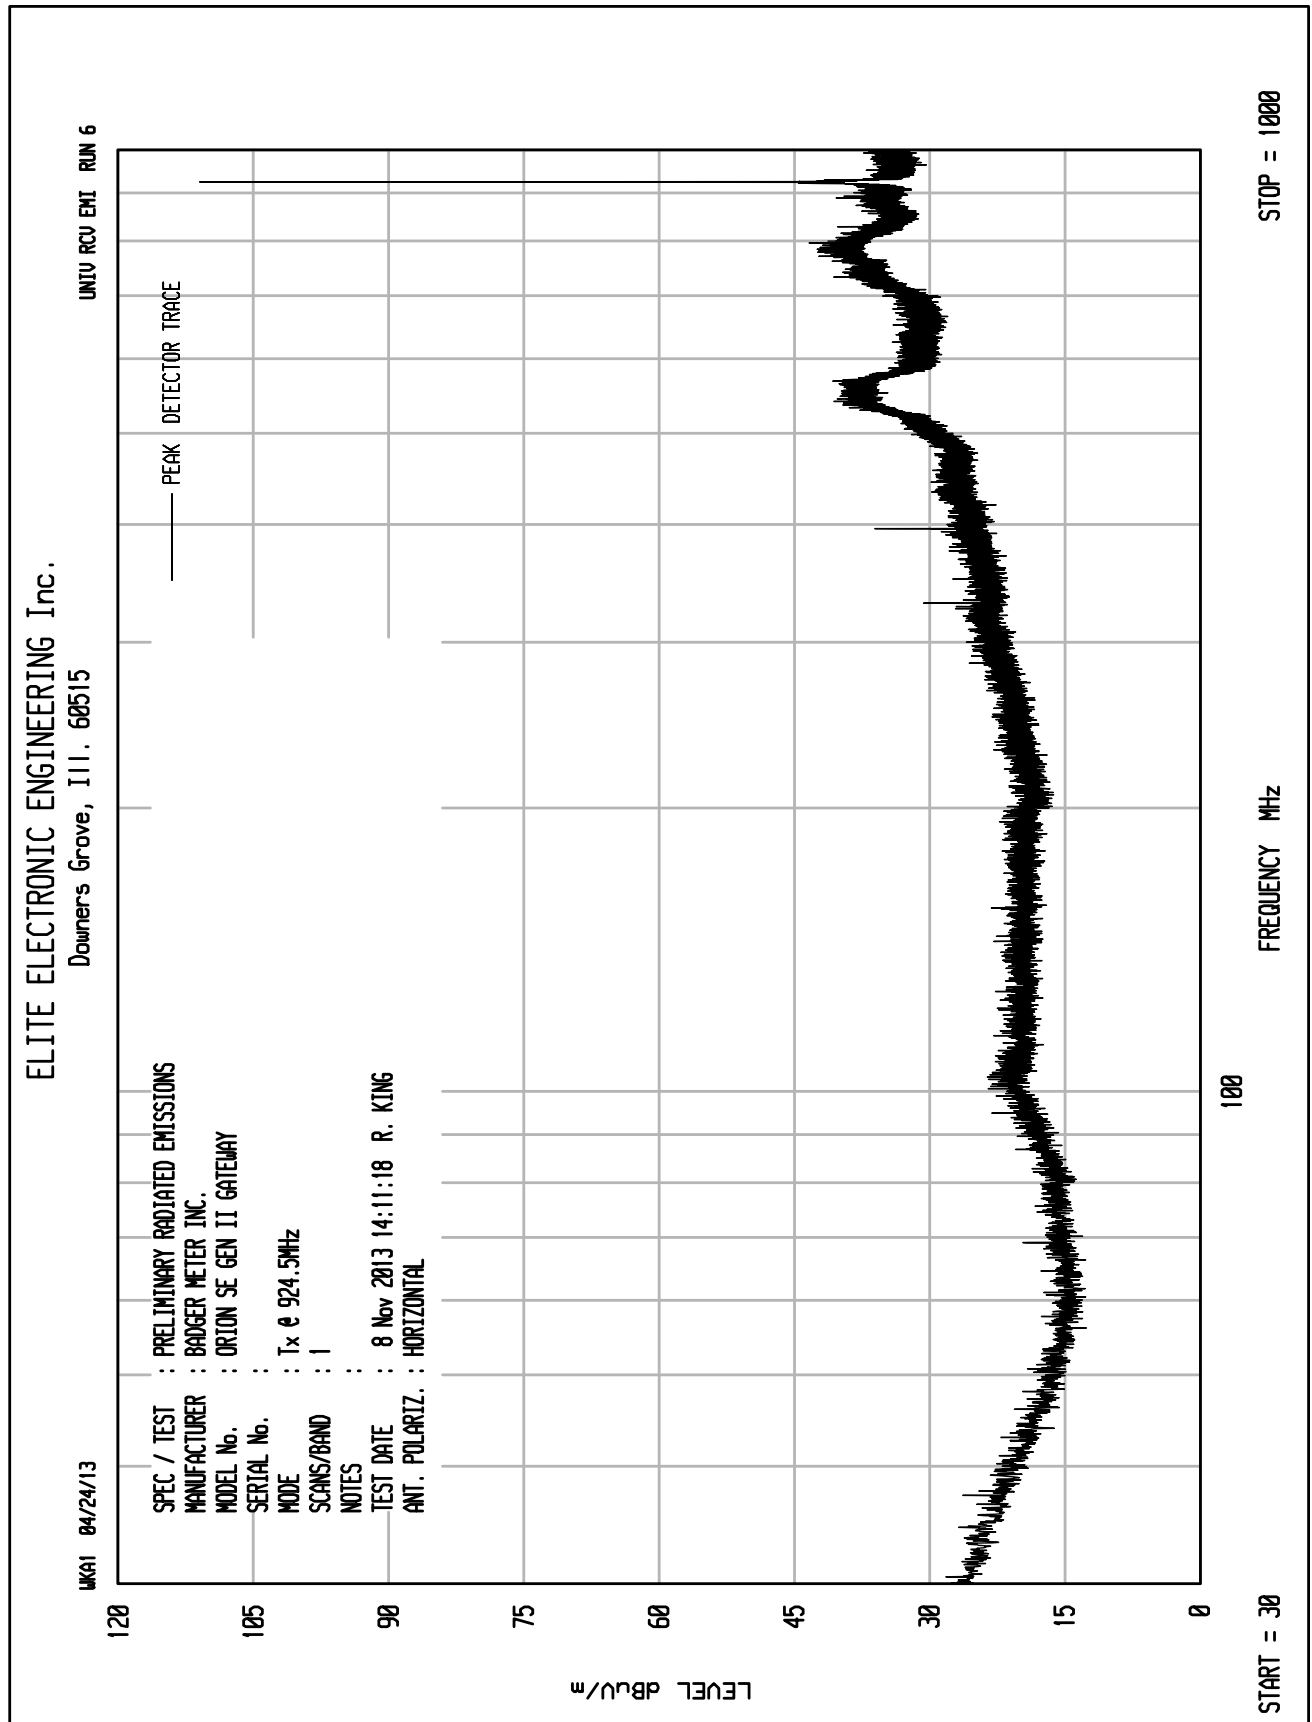

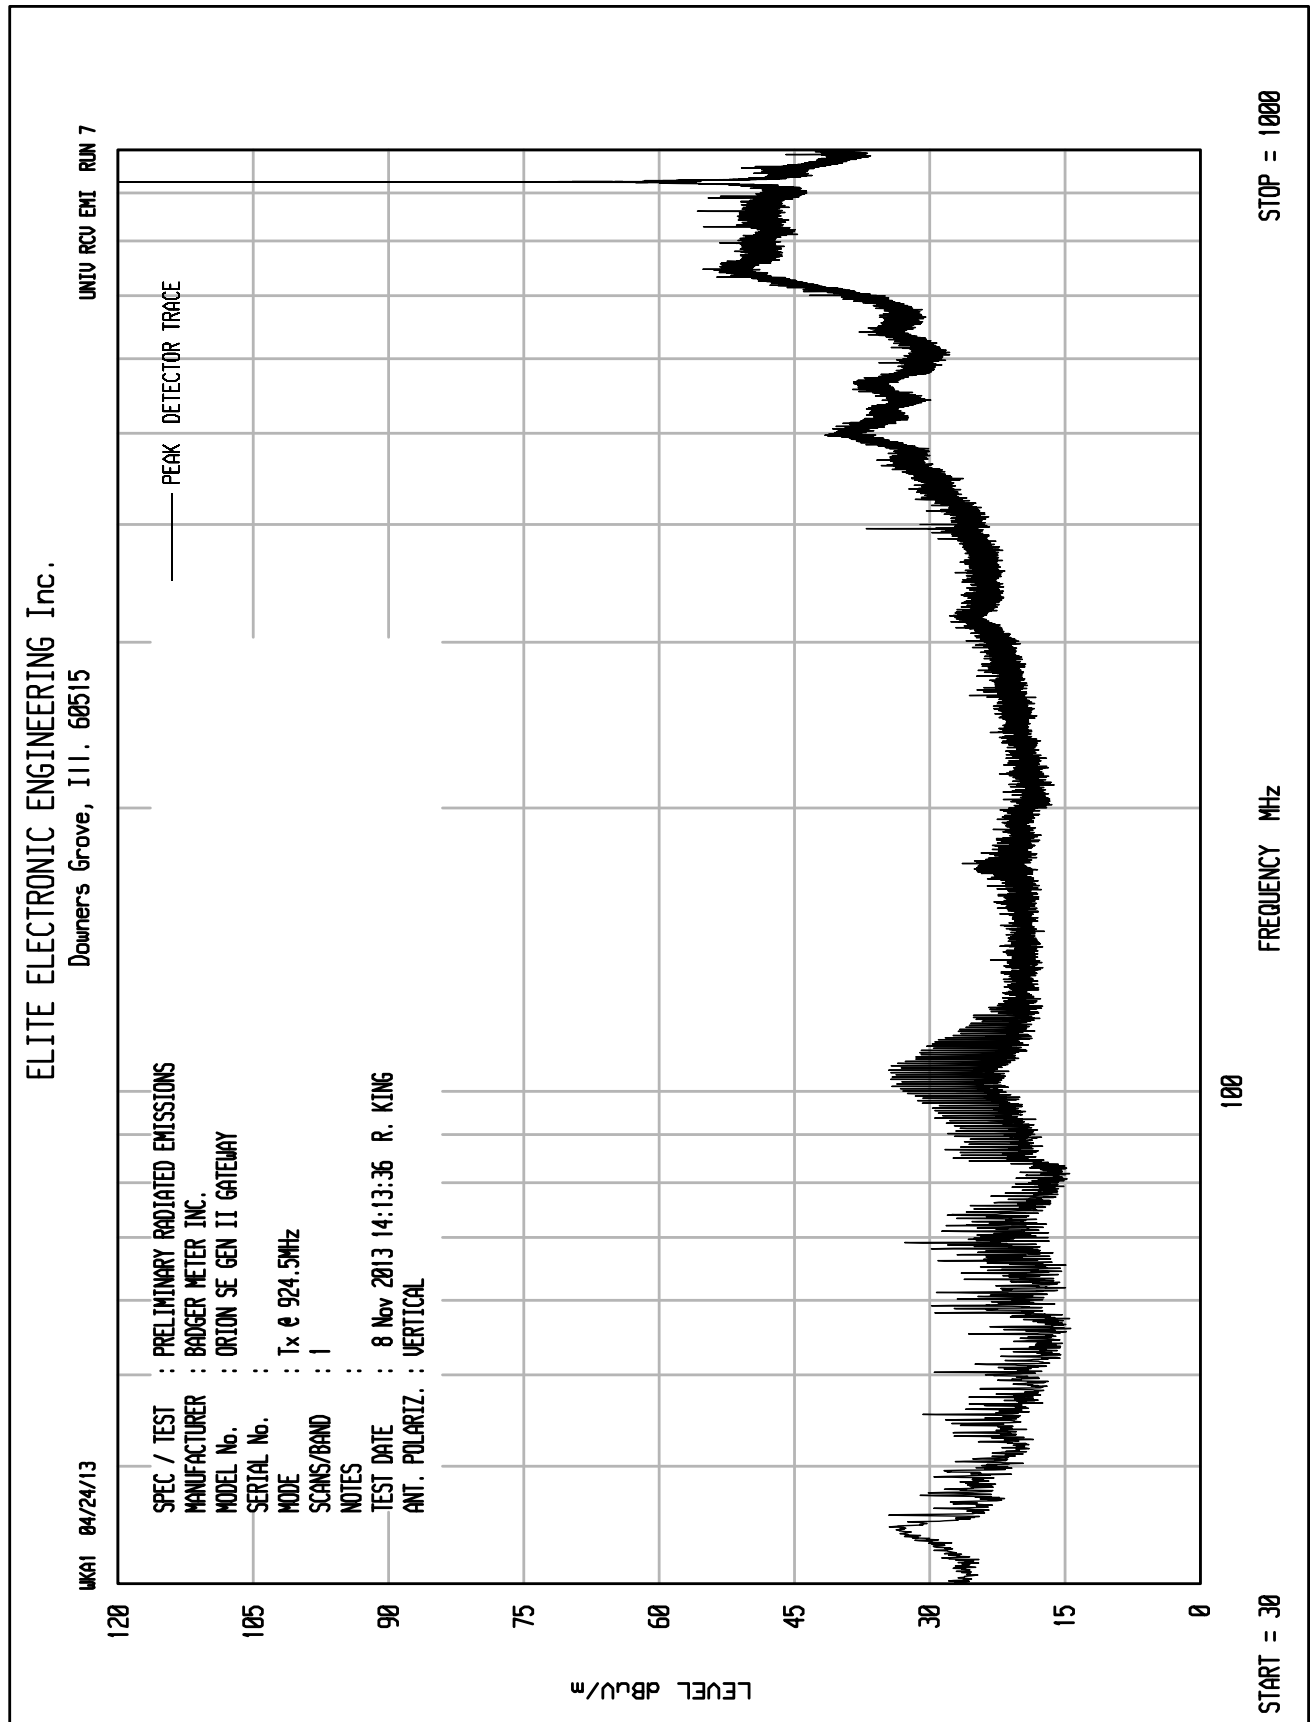



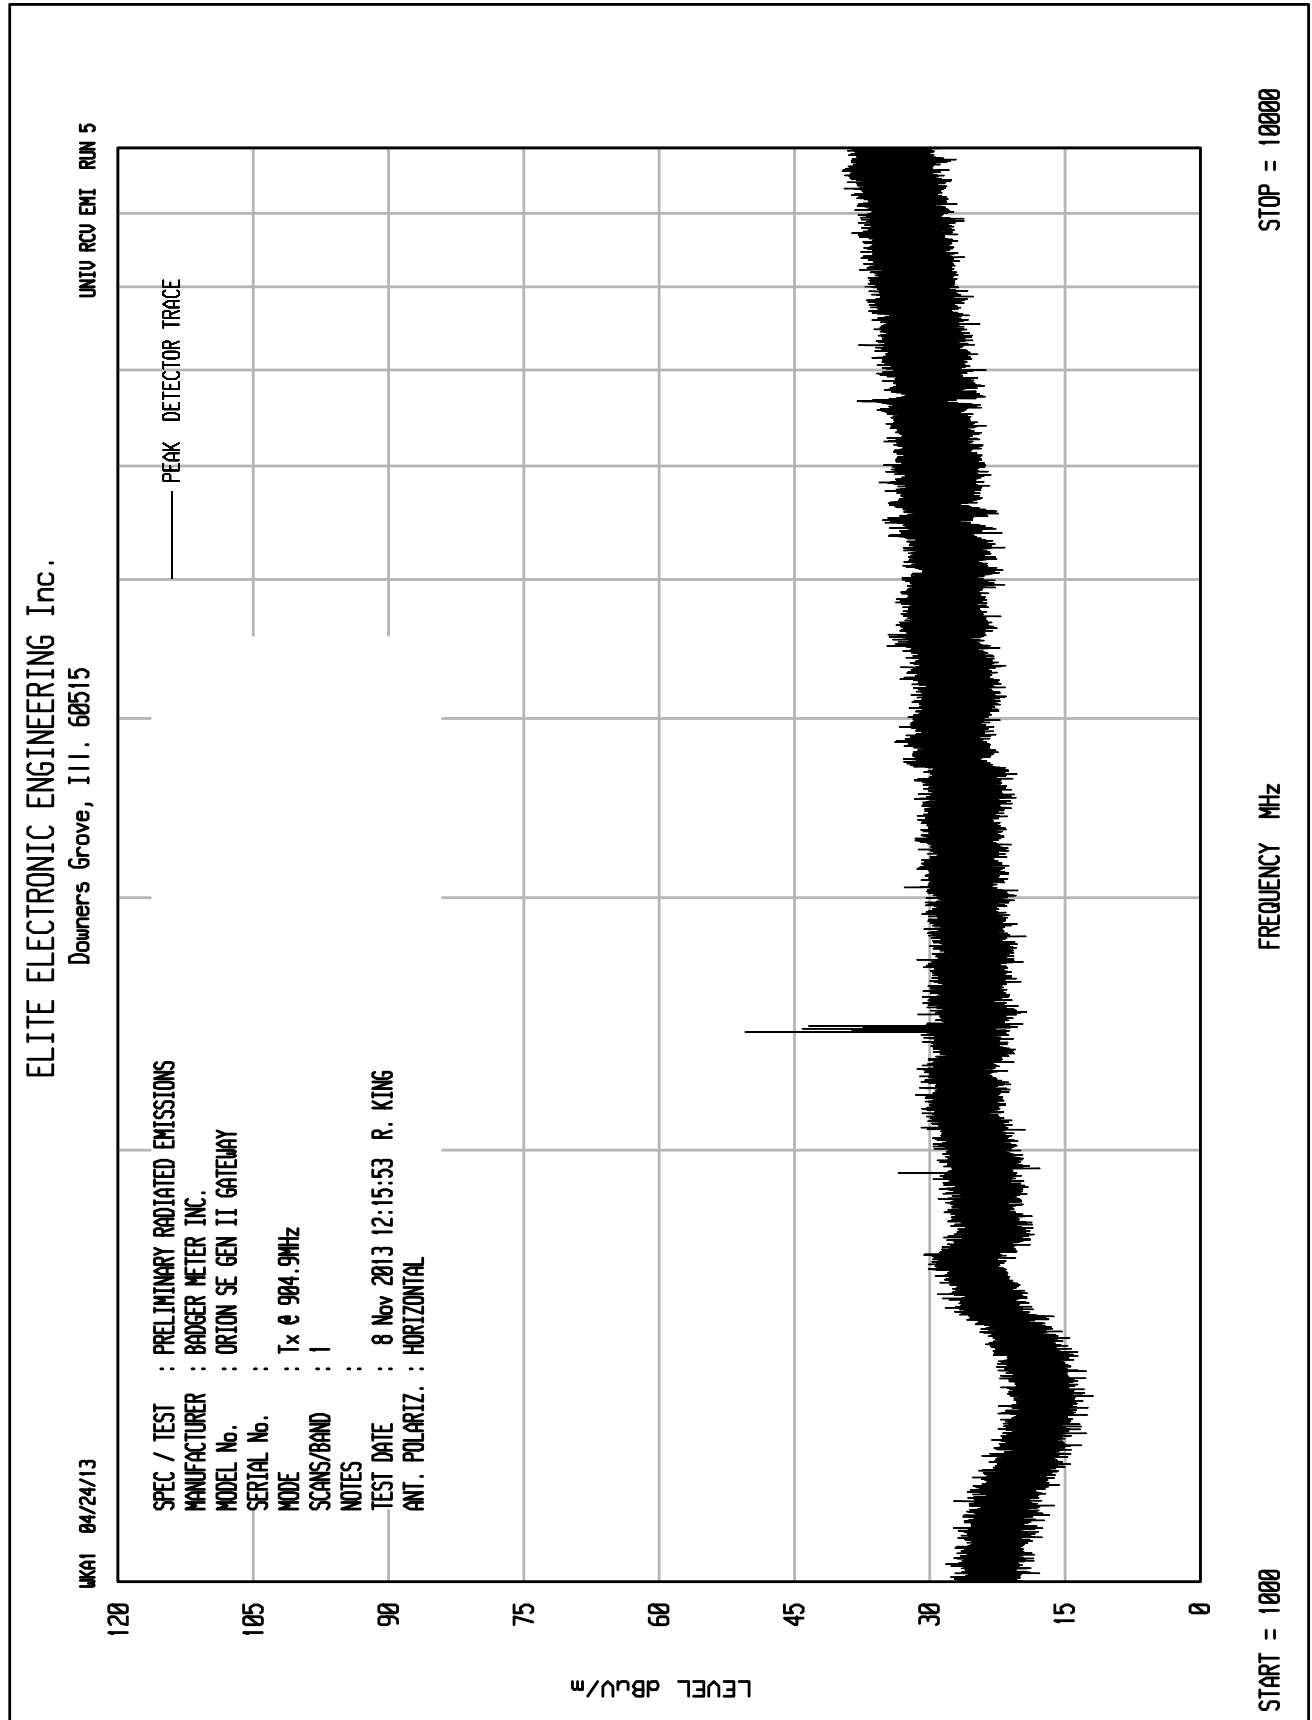

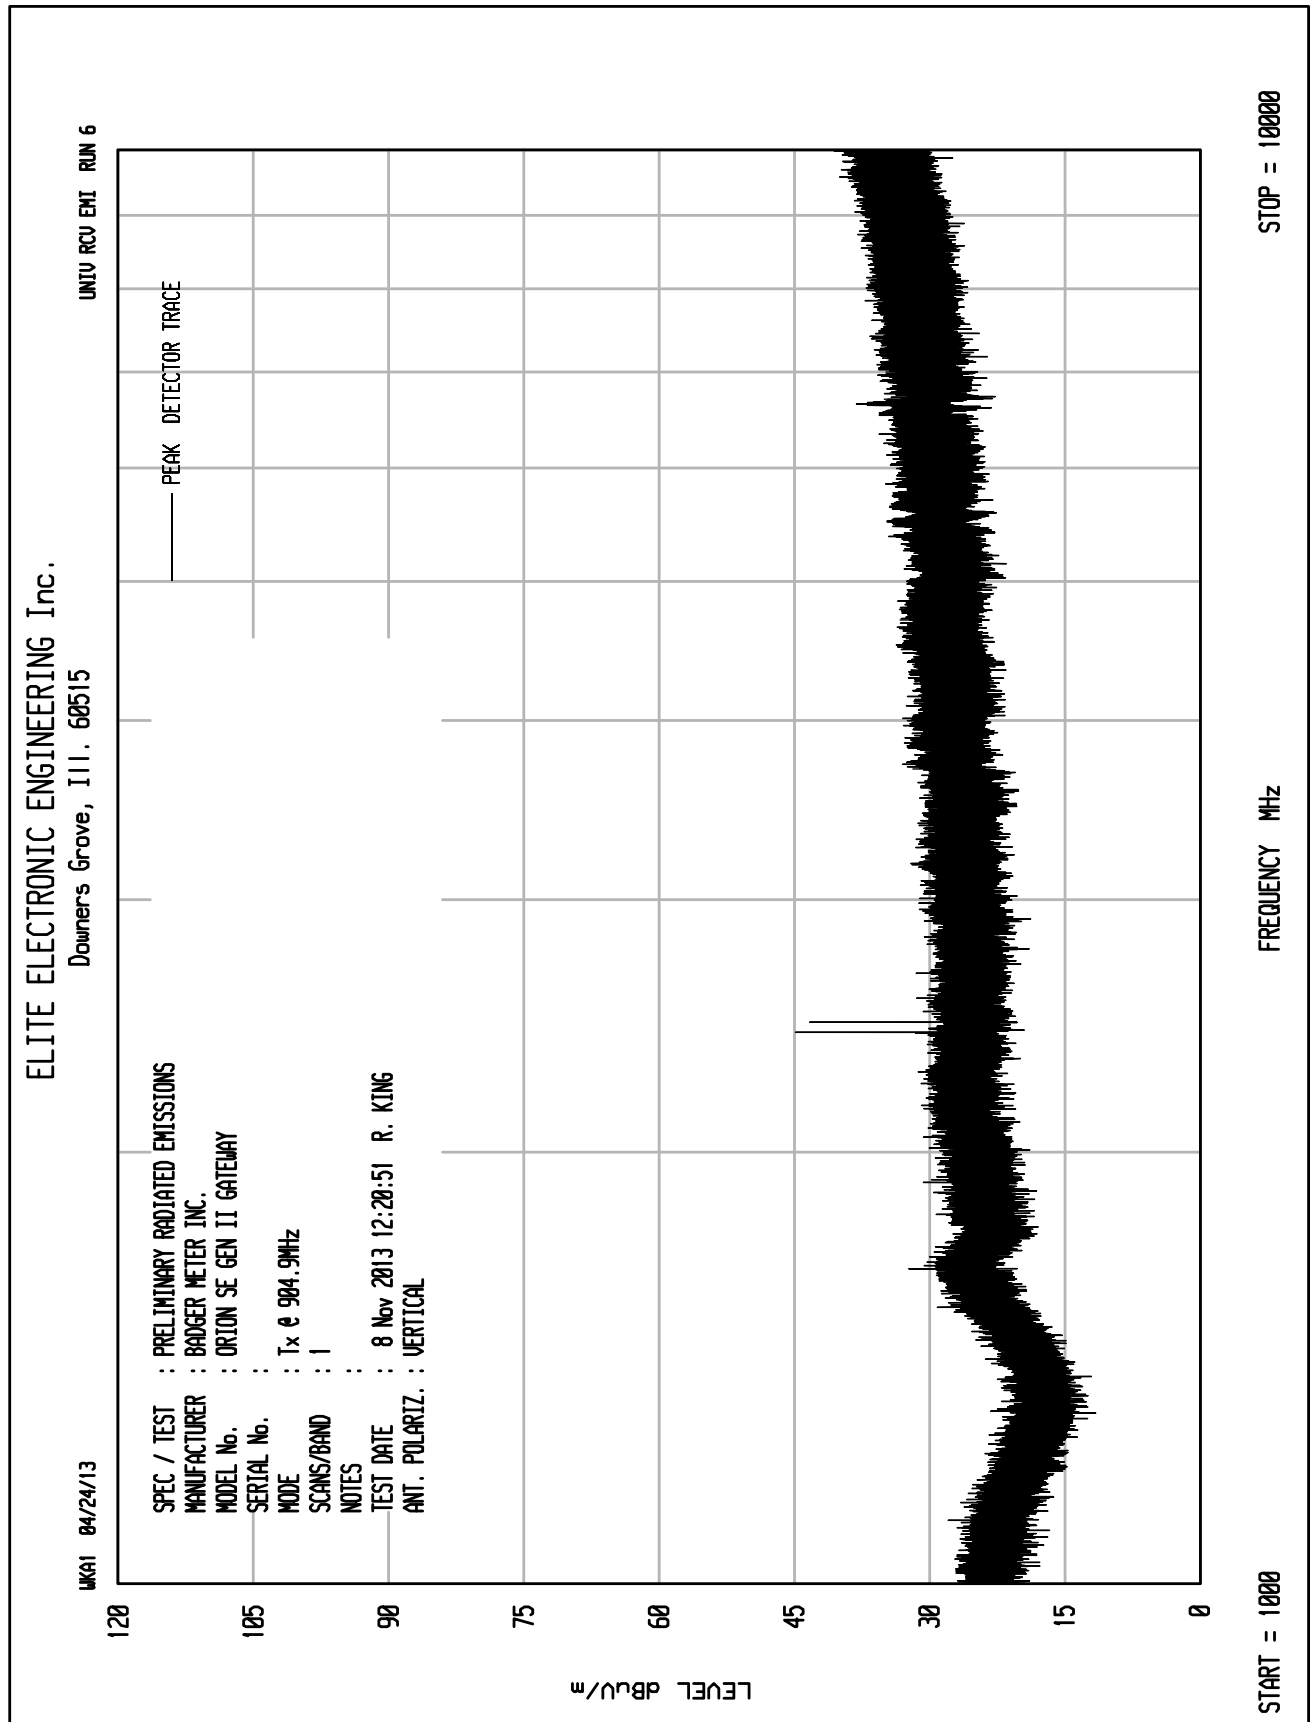




ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515


UNIT: RCU ENI RUN 7


UKA1 04/24/13

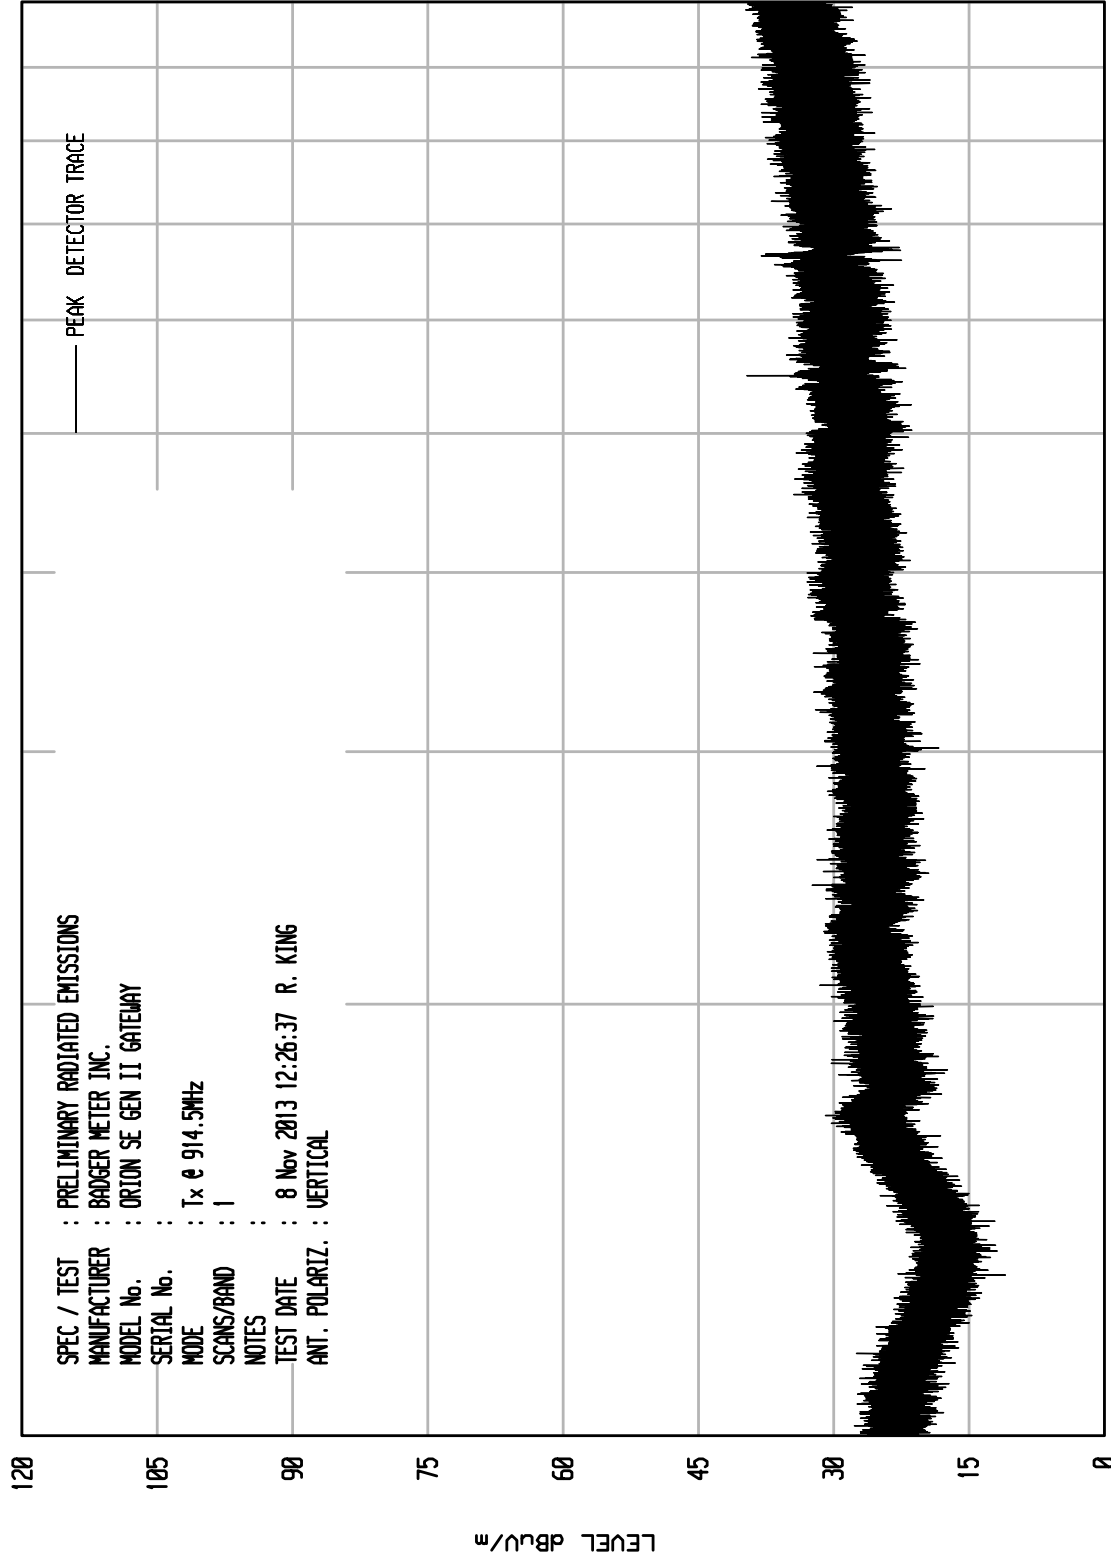


STOP = 10000

START = 1000

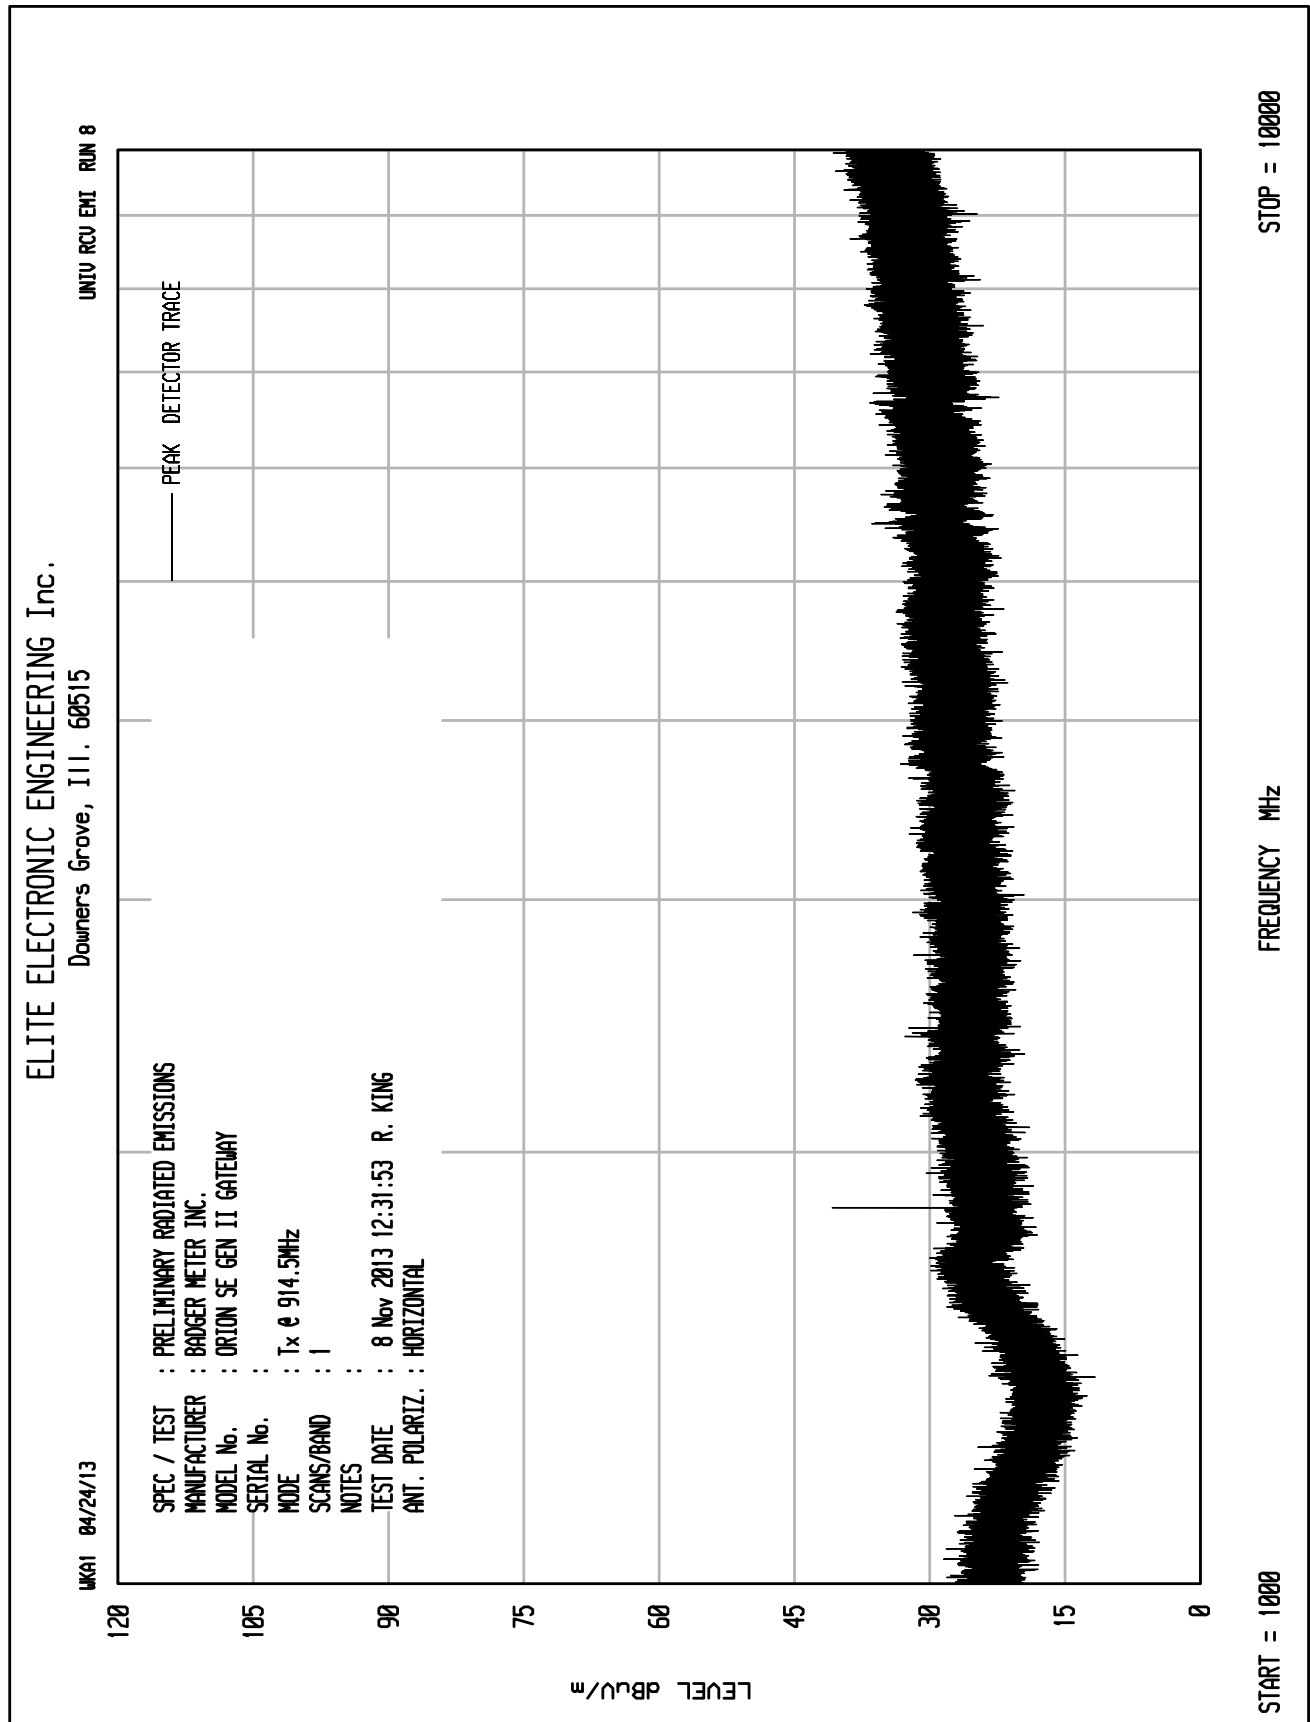

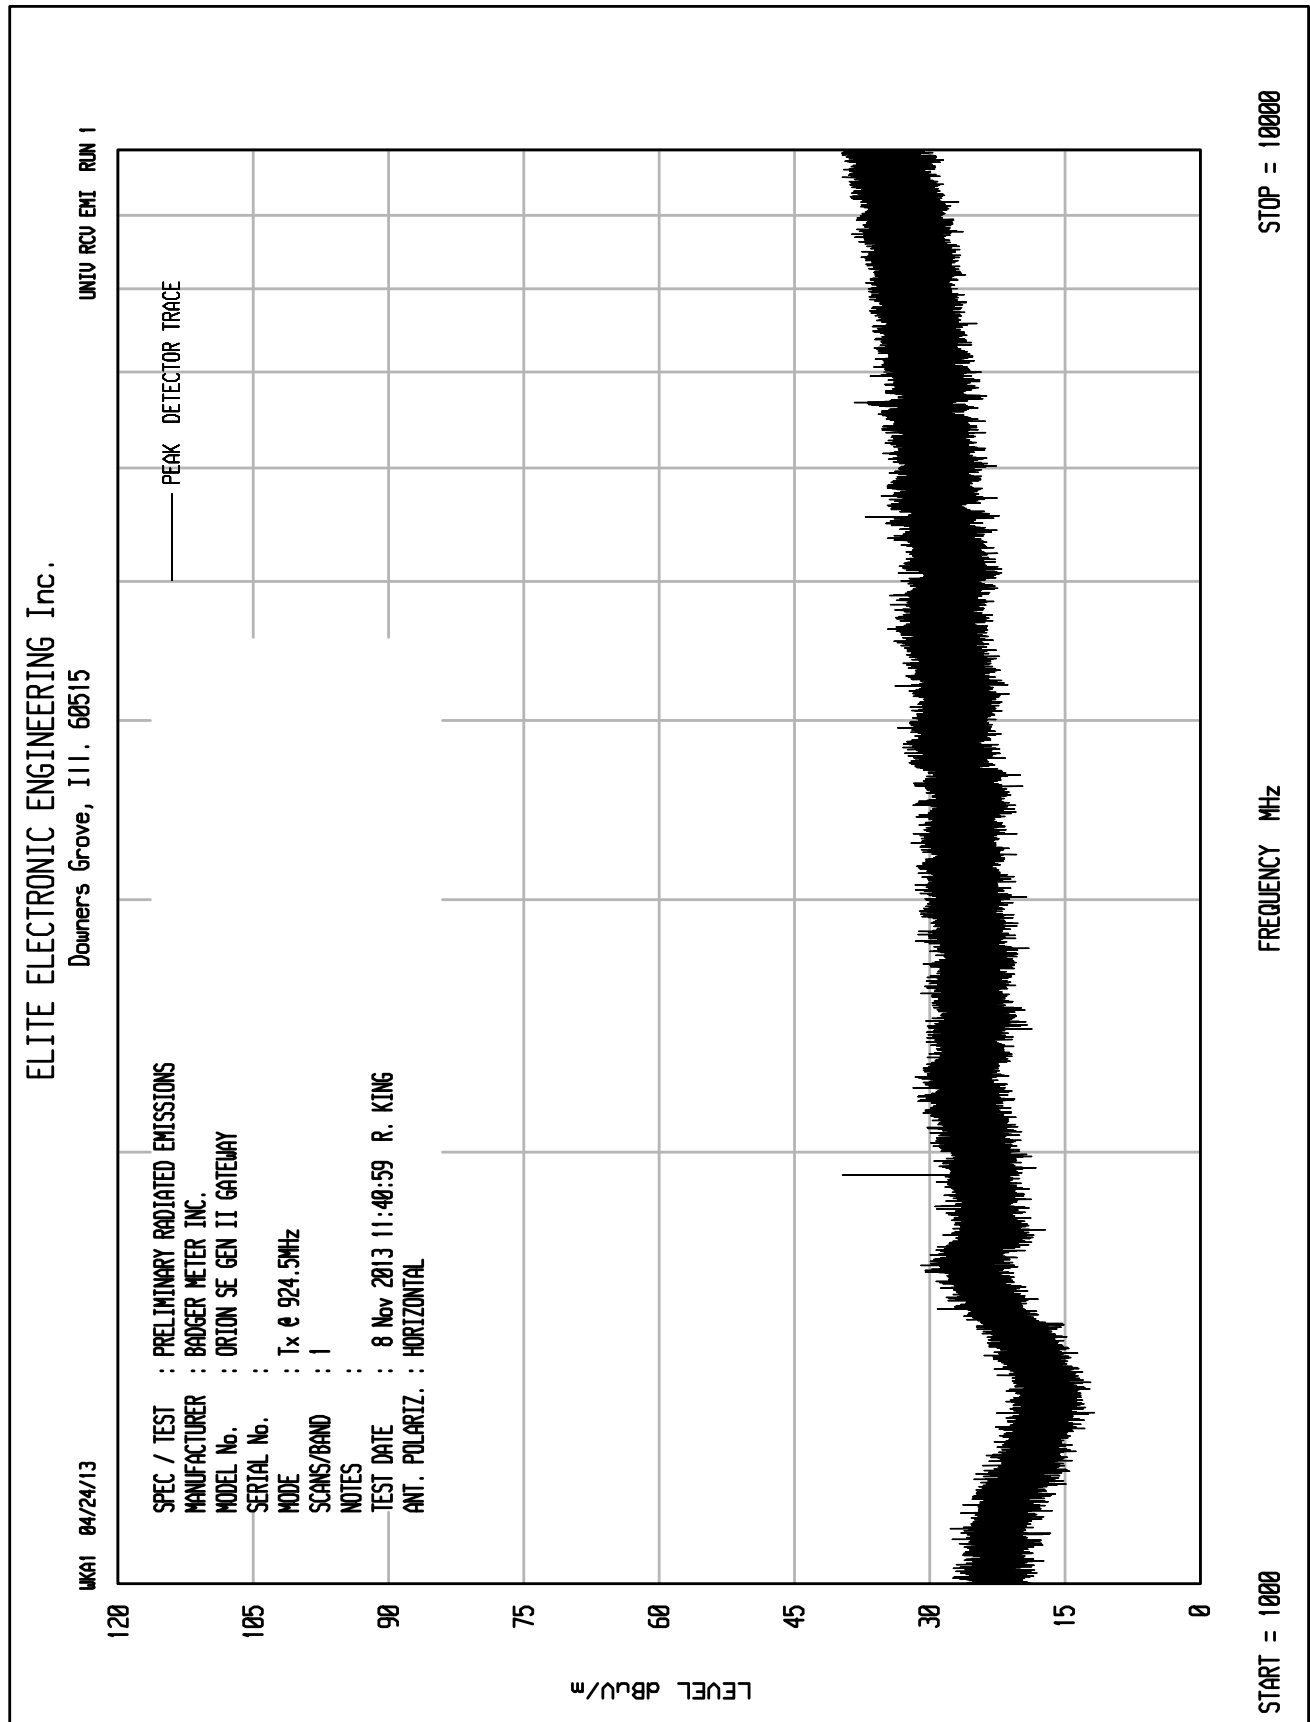

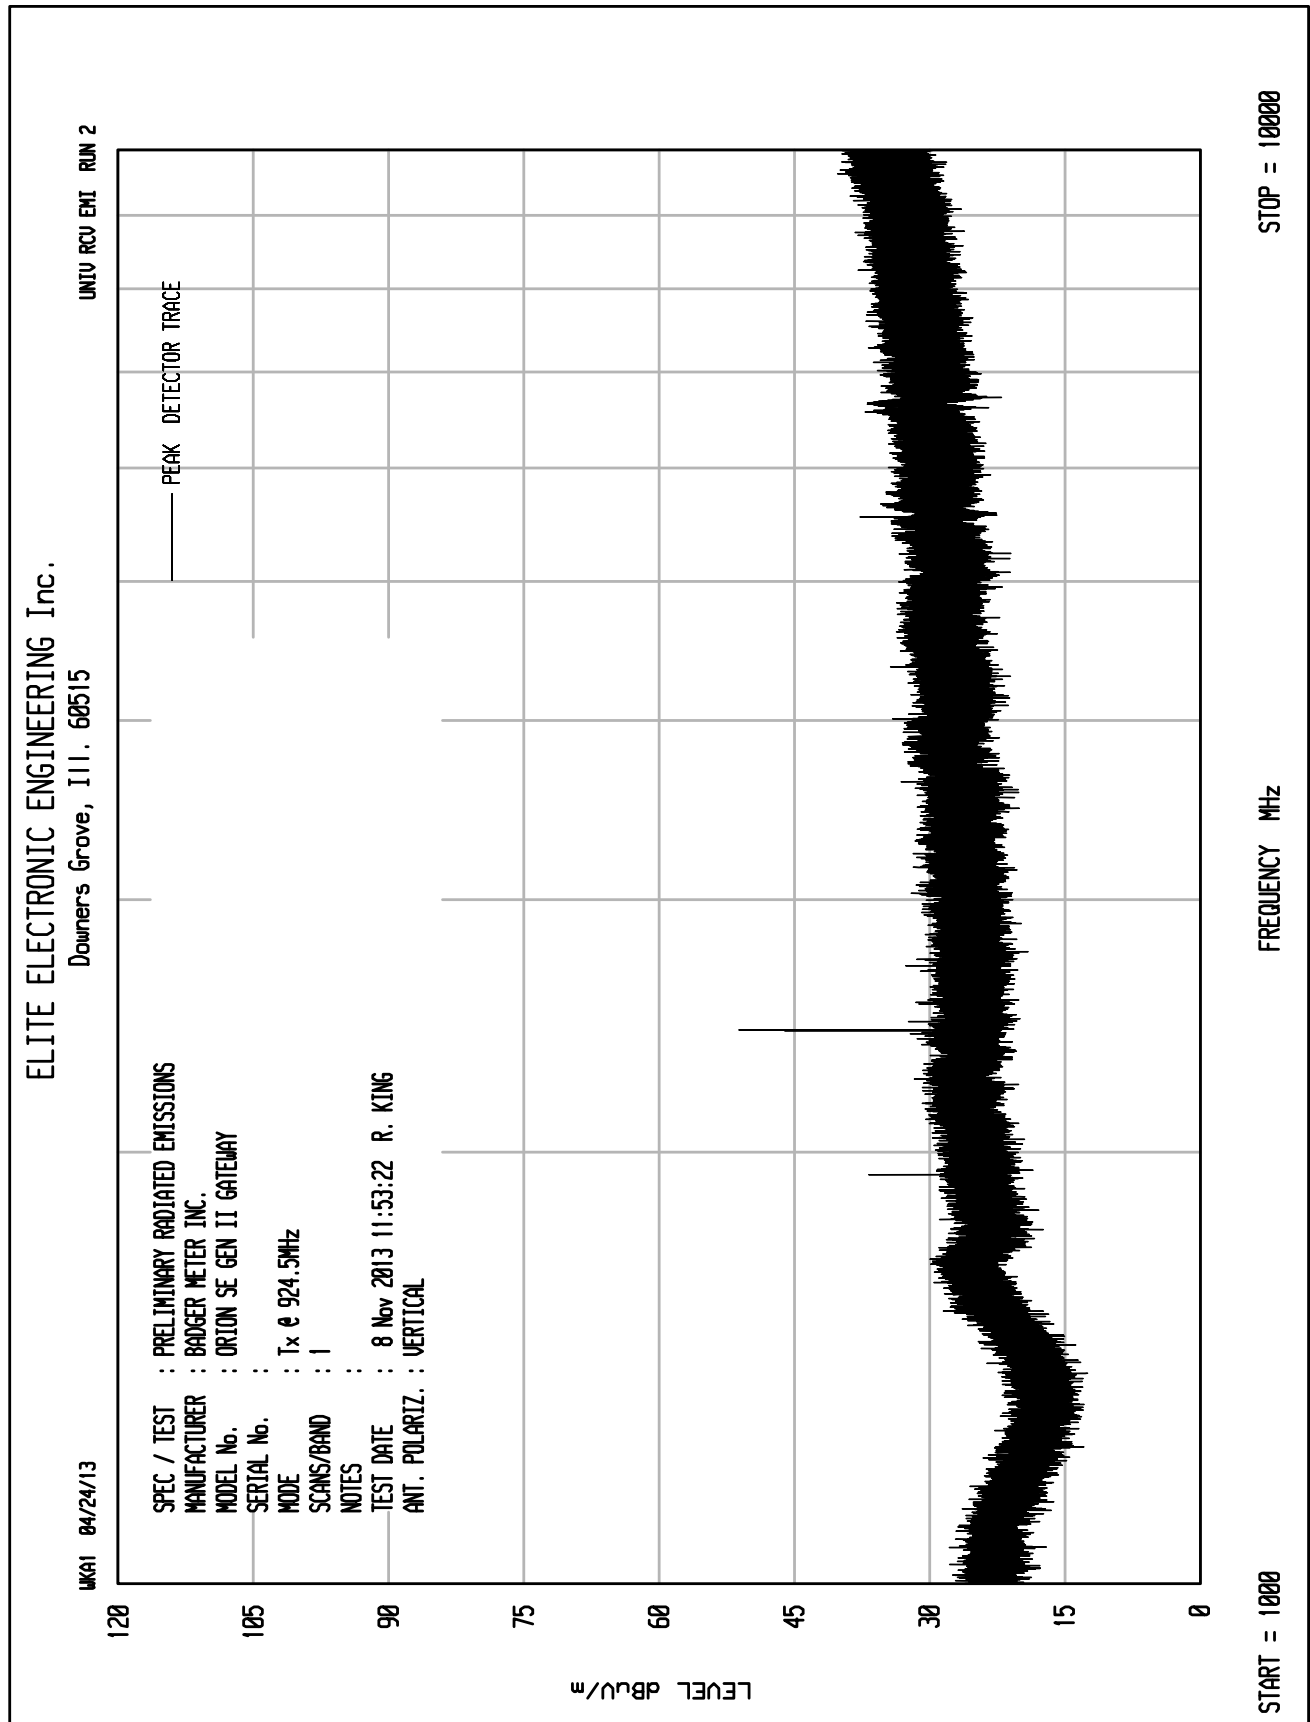



Manufacturer : Badger Meter  
Model No. : Orion SE Gateway  
Specification : FCC-15.247 Spurious Radiated Emissions in Restricted Bands  
Date : November 19, 2013  
Mode : Tx @ 904.9MHz (Ch. 1)  
Notes : Test Distance is 3 meters  
Notes : Maximized Peak Readings in Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2714.70	H	49.6		3.7	32.7	-40.3	45.6	191.5	5000.0	-28.3
2714.70	V	49.9		3.7	32.7	-40.3	45.9	198.0	5000.0	-28.0
3619.60	H	46.9		4.3	33.5	-40.1	44.5	167.4	5000.0	-29.5
3619.60	V	46.2		4.3	33.5	-40.1	43.8	154.6	5000.0	-30.2
4524.50	H	44.6	*	4.7	34.5	-40.0	43.8	155.7	5000.0	-30.1
4524.50	V	46.0	*	4.7	34.5	-40.0	45.3	183.8	5000.0	-28.7
5429.40	H	45.8	*	5.2	34.9	-40.1	45.8	194.7	5000.0	-28.2
5429.40	V	46.5	*	5.2	34.9	-40.1	46.5	211.0	5000.0	-27.5
8144.10	H	45.4	*	6.5	35.9	-39.6	48.3	259.1	5000.0	-25.7
8144.10	V	45.8	*	6.5	35.9	-39.6	48.7	271.0	5000.0	-25.3
9049.00	H	45.5	*	6.5	36.2	-39.1	49.1	285.7	5000.0	-24.9
9049.00	V	45.5	*	6.5	36.2	-39.1	49.1	286.4	5000.0	-24.8

H – Horizontal

V – Vertical

\* - Ambient

$$\text{Total (dBuV/m)} = \text{Meter Reading (dBuV)} + \text{Cable Factor (dB)} + \text{Antenna Factor (dB)} + \text{Pre Amp (dB)}$$
Checked BY RICHARD E. KING :Richard E. King



Manufacturer : Badger Meter  
Model No. : Orion SE Gateway  
Specification : FCC-15.247 Spurious Radiated Emissions in Restricted Bands  
Date : November 19, 2013  
Mode : Tx @ 904.9MHz (Ch. 1)  
Notes : Test Distance is 3 meters  
Notes : Average Readings in Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBUV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2714.70	H	38.6		3.7	32.7	-40.3	0.0	34.6	53.7	500.0	-19.4
2714.70	V	43.8		3.7	32.7	-40.3	0.0	39.8	97.9	500.0	-14.2
3619.60	H	34.9		4.3	33.5	-40.1	0.0	32.5	42.3	500.0	-21.4
3619.60	V	32.9		4.3	33.5	-40.1	0.0	30.5	33.4	500.0	-23.5
4524.50	H	32.2	*	4.7	34.5	-40.0	0.0	31.5	37.5	500.0	-22.5
4524.50	V	32.4	*	4.7	34.5	-40.0	0.0	31.7	38.4	500.0	-22.3
5429.40	H	36.6	*	5.2	34.9	-40.1	0.0	36.5	67.1	500.0	-17.4
5429.40	V	36.6	*	5.2	34.9	-40.1	0.0	36.6	67.3	500.0	-17.4
8144.10	H	32.9	*	3.7	32.7	-40.3	0.0	34.6	53.7	500.0	-19.4
8144.10	V	32.9	*	3.7	32.7	-40.3	0.0	39.8	97.9	500.0	-14.2
9049.00	H	32.5	*	4.3	33.5	-40.1	0.0	32.5	42.3	500.0	-21.4
9049.00	V	32.5	*	4.3	33.5	-40.1	0.0	30.5	33.4	500.0	-23.5

H – Horizontal

V – Vertical

\* - Ambient

Total (dBuV/m) = Meter Reading (dBUV) + Cable Factor (dB) + Antenna Factor (dB) + Pre Amp (dB) + Duty Cycle (dB)

Checked BY Richard E. King :

---

Richard E. King





Manufacturer : Badger Meter  
Model No. : Orion SE Gateway  
Specification : FCC-15.247 Spurious Radiated Emissions in Restricted Bands  
Date : November 19, 2013  
Mode : Tx @ 914.5MHz (Ch. 25)  
Notes : Test Distance is 3 meters  
Notes : Maximized Peak Readings in Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2743.50	H	54.4		3.7	32.8	-40.3	50.6	337.1	5000.0	-23.4
2743.50	V	52.9		3.7	32.8	-40.3	49.0	282.0	5000.0	-25.0
3658.00	H	45.4	*	4.3	33.5	-40.1	43.1	142.3	5000.0	-30.9
3658.00	V	46.2	*	4.3	33.5	-40.1	43.9	156.8	5000.0	-30.1
4572.50	H	45.2	*	4.7	34.5	-40.0	44.5	167.7	5000.0	-29.5
4572.50	V	44.8	*	4.7	34.5	-40.0	44.0	159.4	5000.0	-29.9
7316.00	H	45.7	*	6.2	35.6	-39.8	47.7	243.6	5000.0	-26.2
7316.00	V	45.7	*	6.2	35.6	-39.8	47.7	243.6	5000.0	-26.2
8230.50	H	49.3	*	6.5	35.9	-39.5	52.2	409.3	5000.0	-21.7
8230.50	V	45.7	*	6.5	35.9	-39.5	48.6	269.5	5000.0	-25.4
9145.00	H	48.3	*	6.6	36.2	-39.0	52.0	399.7	5000.0	-21.9
9145.00	V	48.0	*	6.6	36.2	-39.0	51.7	384.8	5000.0	-22.3

H – Horizontal

V – Vertical

\* - Ambient

$$\text{Total (dBuV/m)} = \text{Meter Reading (dBuV)} + \text{Cable Factor (dB)} + \text{Antenna Factor (dB)} + \text{Pre Amp (dB)}$$
Checked BY RICHARD E. KING :

---

Richard E. King



Manufacturer : Badger Meter  
Model No. : Orion SE Gateway  
Specification : FCC-15.247 Spurious Radiated Emissions in Restricted Bands  
Date : November 19, 2013  
Mode : Tx @ 914.5MHz (Ch. 25)  
Notes : Test Distance is 3 meters  
Notes : Average Readings in Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2743.50	H	51.4		3.7	32.8	-40.3	0.0	47.5	238.1	500.0	-6.4
2743.50	V	49.7		3.7	32.8	-40.3	0.0	45.8	194.2	500.0	-8.2
3658.00	H	33.3	*	4.3	33.5	-40.1	0.0	31.0	35.3	500.0	-23.0
3658.00	V	35.5	*	4.3	33.5	-40.1	0.0	33.2	45.5	500.0	-20.8
4572.50	H	32.1	*	4.7	34.5	-40.0	0.0	31.3	36.9	500.0	-22.6
4572.50	V	32.3	*	4.7	34.5	-40.0	0.0	31.6	37.8	500.0	-22.4
7316.00	H	31.9	*	6.2	35.6	-39.8	0.0	33.9	49.7	500.0	-20.1
7316.00	V	35.3	*	6.2	35.6	-39.8	0.0	37.4	73.9	500.0	-16.6
8230.50	H	35.2	*	6.5	35.9	-39.5	0.0	38.1	80.3	500.0	-15.9
8230.50	V	35.2	*	6.5	35.9	-39.5	0.0	38.2	80.8	500.0	-15.8
9145.00	H	35.4	*	6.6	36.2	-39.0	0.0	39.1	90.0	500.0	-14.9
9145.00	V	35.3	*	6.6	36.2	-39.0	0.0	39.0	89.4	500.0	-15.0

H – Horizontal

V – Vertical

\* - Ambient

$$\text{Total (dBuV/m)} = \text{Meter Reading (dBuV)} + \text{Cable Factor (dB)} + \text{Antenna Factor (dB)} + \text{Pre Amp (dB)} + \text{Duty Cycle (dB)}$$
Checked BY RICHARD E. KING :Richard E. King



Manufacturer : Badger Meter  
Model No. : Orion SE Gateway  
Specification : FCC-15.247 Spurious Radiated Emissions in Restricted Bands  
Date : November 19, 2013  
Mode : Tx @ 924.5MHz (Ch. 50)  
Notes : Test Distance is 3 meters  
Notes : Maximized Peak Readings in Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2773.50	H	51.3		3.7	32.8	-40.3	47.5	236.9	5000.0	-26.5
2773.50	V	52.9		3.7	32.8	-40.3	49.1	285.4	5000.0	-24.9
3698.00	H	49.4		4.3	33.5	-40.1	47.1	227.3	5000.0	-26.8
3698.00	V	48.9		4.3	33.5	-40.1	46.7	215.8	5000.0	-27.3
4622.50	H	48.4	*	4.8	34.6	-40.0	47.7	242.4	5000.0	-26.3
4622.50	V	49.0	*	4.8	34.6	-40.0	48.3	260.3	5000.0	-25.7
7396.00	H	47.9		6.2	35.7	-39.7	50.0	315.6	5000.0	-24.0
7396.00	V	47.7		6.2	35.7	-39.7	49.8	308.4	5000.0	-24.2
8320.50	H	48.2	*	6.5	35.9	-39.5	51.1	359.6	5000.0	-22.9
8320.50	V	49.6	*	6.5	35.9	-39.5	52.5	422.0	5000.0	-21.5

H – Horizontal

V – Vertical

\* - Ambient

$$\text{Total (dBuV/m)} = \text{Meter Reading (dBuV)} + \text{Cable Factor (dB)} + \text{Antenna Factor (dB)} + \text{Pre Amp (dB)}$$
Checked BY RICHARD E. KING :

---

Richard E. King



Manufacturer : Badger Meter  
Model No. : Orion SE Gateway  
Specification : FCC-15.247 Spurious Radiated Emissions in Restricted Bands  
Date : November 19, 2013  
Mode : Tx @ 924.5MHz (Ch. 50)  
Notes : Test Distance is 3 meters  
Notes : Average Readings in Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2773.50	H	39.49		3.7	32.8	-40.3	0.0	35.7	60.8	500.0	-18.3
2773.50	V	45.3		3.7	32.8	-40.3	0.0	41.4	118.0	500.0	-12.5
3698.00	H	36.0		4.3	33.5	-40.1	0.0	33.8	49.1	500.0	-20.2
3698.00	V	38.4		4.3	33.5	-40.1	0.0	36.2	64.5	500.0	-17.8
4622.50	H	35.1	*	4.8	34.6	-40.0	0.0	34.4	52.7	500.0	-19.6
4622.50	V	35.2	*	4.8	34.6	-40.0	0.0	34.5	53.1	500.0	-19.5
7396.00	H	35.5		6.2	35.7	-39.7	0.0	37.6	75.6	500.0	-16.4
7396.00	V	35.3		6.2	35.7	-39.7	0.0	37.4	74.3	500.0	-16.6
8320.50	H	35.8	*	6.5	35.9	-39.5	0.0	38.7	86.1	500.0	-15.3
8320.50	V	35.7	*	6.5	35.9	-39.5	0.0	38.6	85.6	500.0	-15.3

H – Horizontal

V – Vertical


\* - Ambient

Total (dBuV/m) = Meter Reading (dBuV) + Cable Factor (dB) + Antenna Factor (dB) + Pre Amp (dB) + Duty Cycle (dB)

Checked BY RICHARD E. KING :

---

Richard E. King

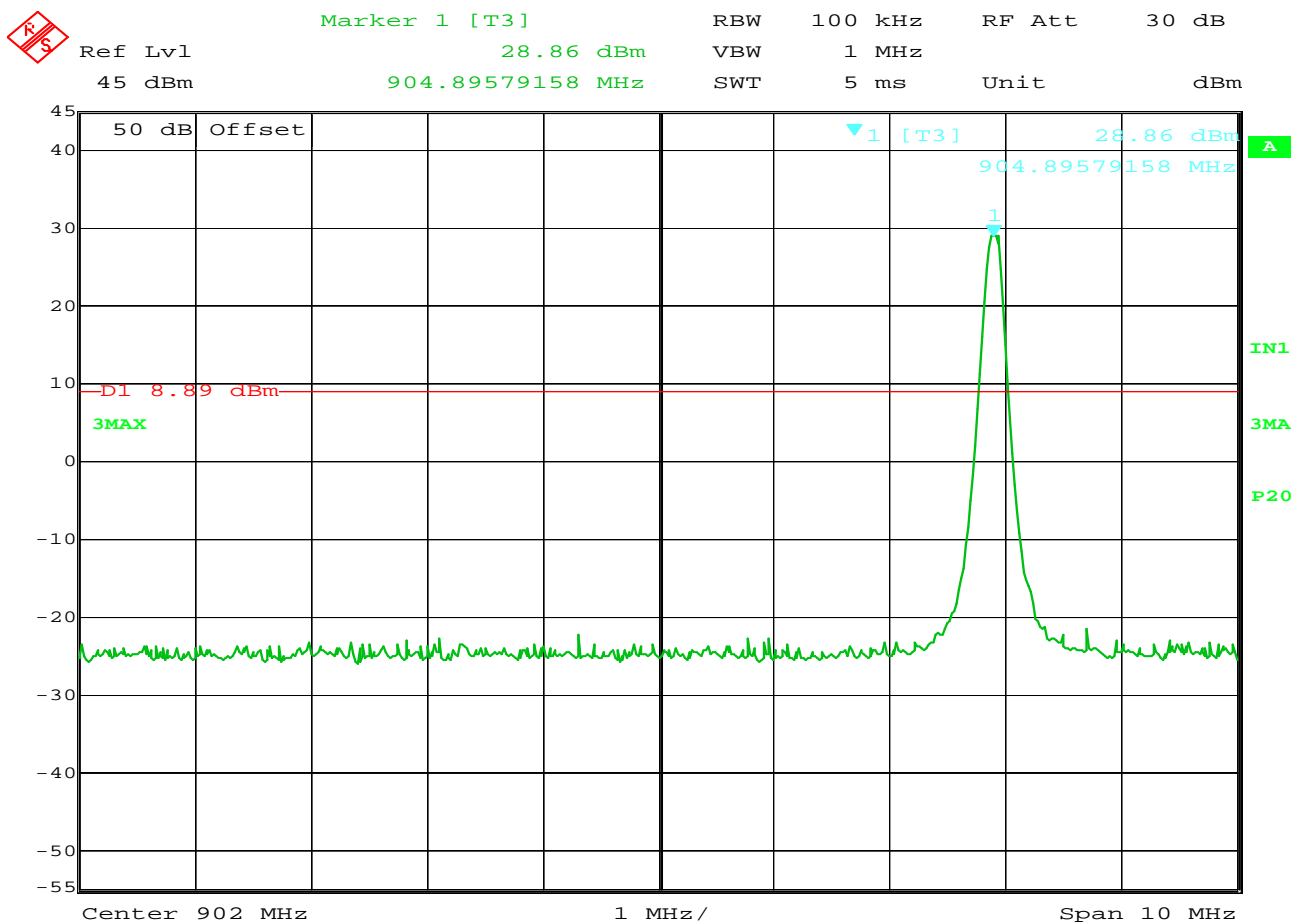


Date: 15.NOV.2013 14:05:07

**FCC 15.247 Bandedge Compliance**

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Tx @ 904.9MHz  
NOTES :

NOTES

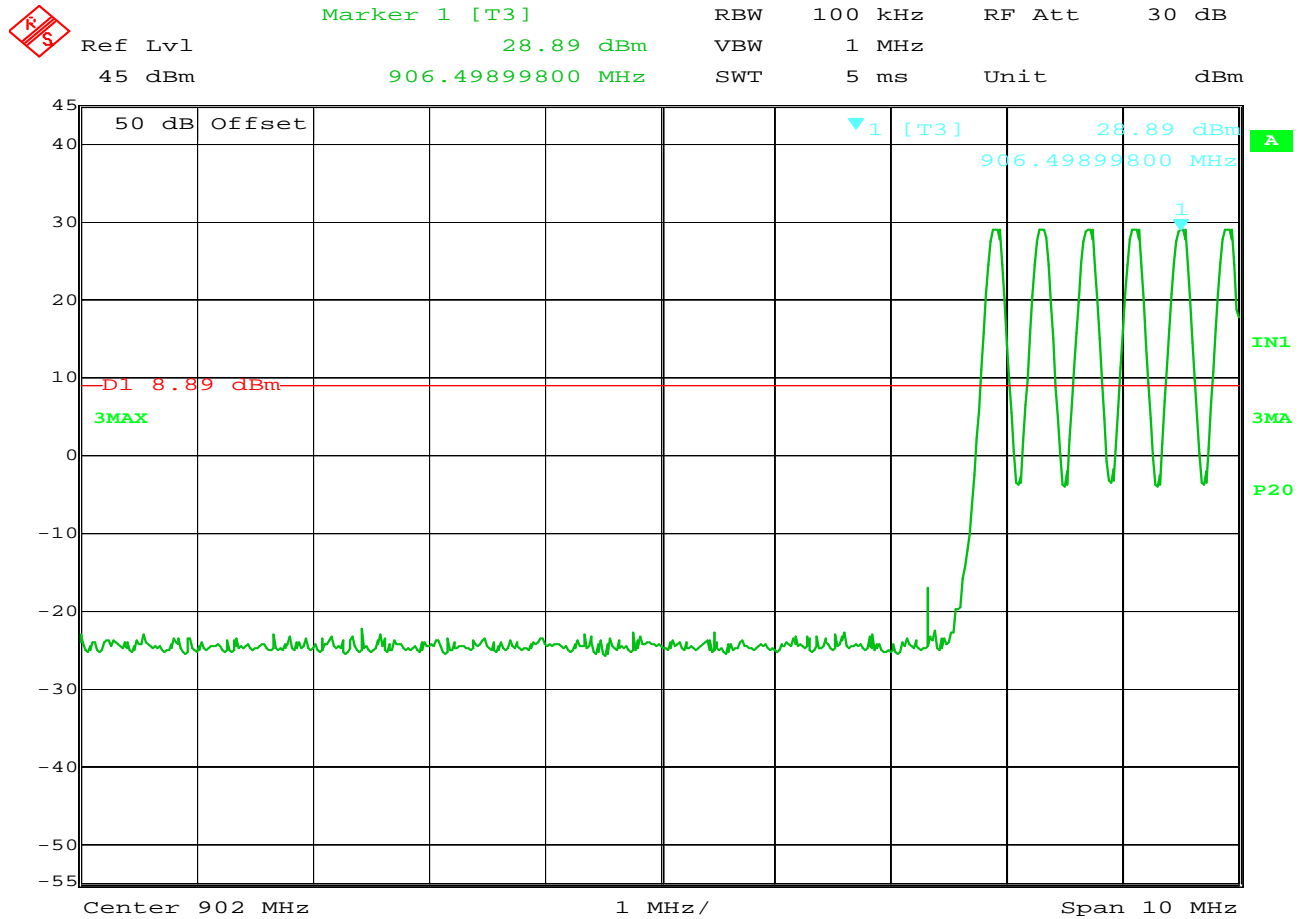

Date: 15.NOV.2013 14:03:37


### FCC 15.247 Bandedge Compliance

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Hopping  
NOTES :

NOTES



Ref Lvl 45 dBm  
Marker 1 [T3] 29.14 dBm  
924.50300601 MHz  
RBW 100 kHz  
VBW 1 MHz  
SWT 5 ms  
RF Att 30 dB  
Unit dBm

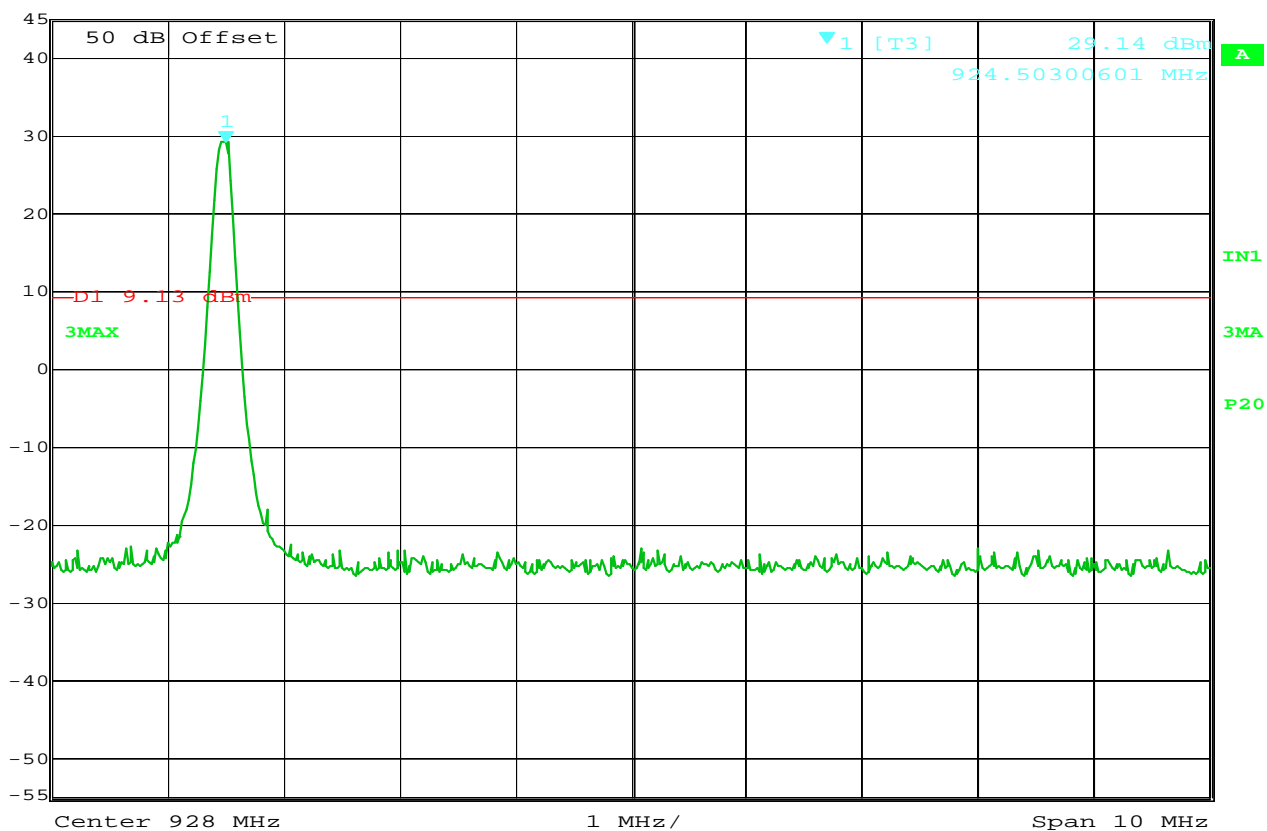


Date: 15.NOV.2013 14:08:13

### FCC 15.247 Bandedge Compliance

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Tx @ 924.5 MHz  
NOTES :

NOTES

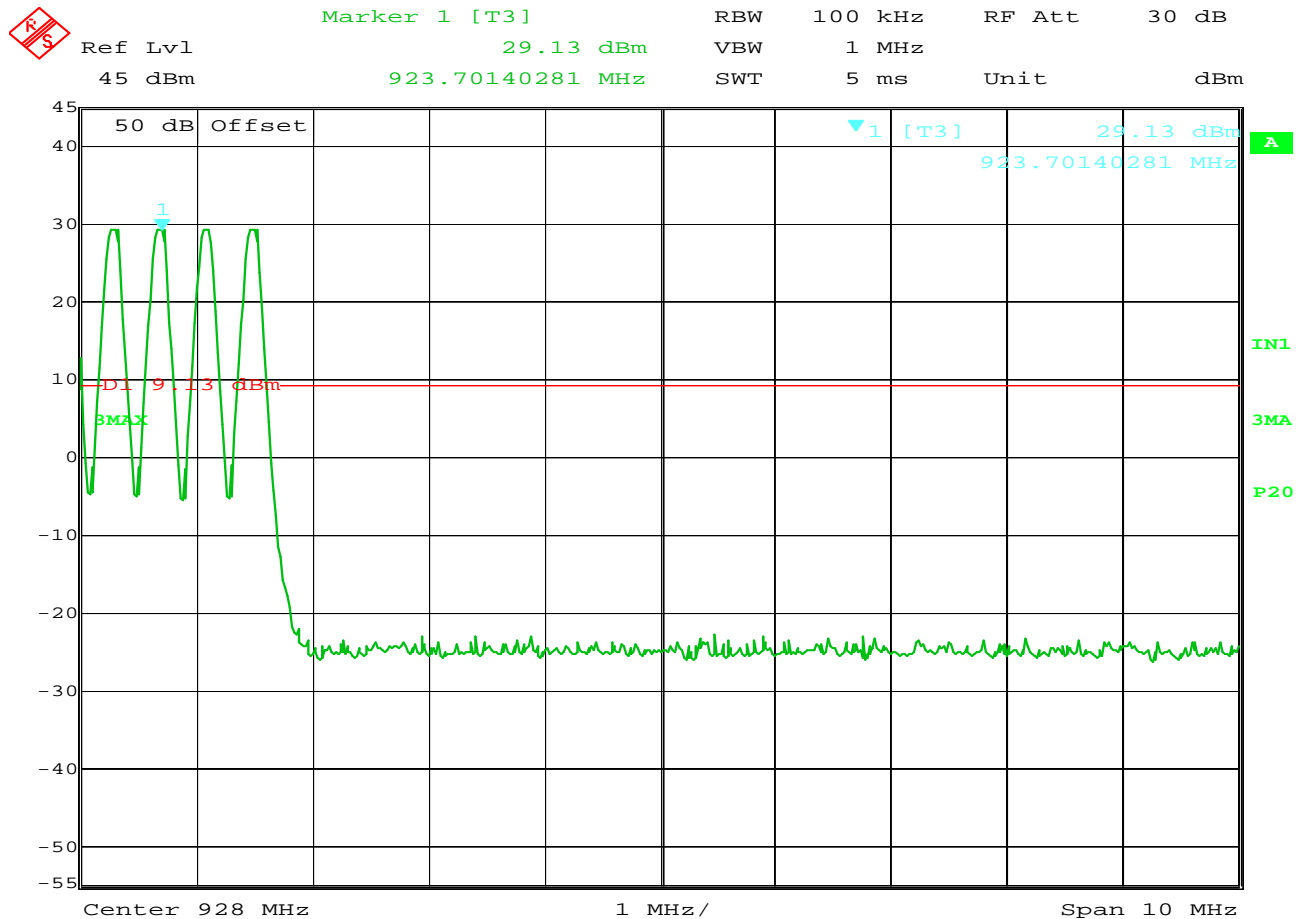

Date: 15.NOV.2013 14:06:58

### FCC 15.247 Bandedge Compliance

MANUFACTURER : Badger Meter Inc.  
MODEL NUMBER : Orion SE Gen II Gateway  
TEST MODE : Hopping  
NOTES :

NOTES