



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822  
Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltlab.com>



Dates of Tests: Dec 25 2010~Jan 11 2011  
Test Report S/N: LR500111101E  
Test Site : LTA CO., LTD.

# **CERTIFICATION OF COMPLIANCE**

FCC ID.  
IC  
APPLICANT

**GJW-XGPS150  
4038A-XGPS150**

<b>Equipment Class</b>	:	<b>Part 15 Spread Spectrum Transmitter (DSS)</b>
<b>Manufacturing Description</b>	:	<b>Universal Bluetooth GPS Receiver</b>
<b>Manufacturer</b>	:	<b>Namsung Electronics Ltd.</b>
<b>Model name</b>	:	<b>XGPS150</b>
<b>Test Device Serial No.:</b>	:	<b>Identical prototype</b>
<b>Rule Part(s)</b>	:	<b>FCC Part 15.247 Subpart C; ANSI C-63.4-2003</b>
	:	<b>RSS-210 and ISSUE No.: 8 Date: 2010</b>
<b>Frequency Range</b>	:	<b>2402 ~ 2480MHz</b>
<b>RF power</b>	:	<b>0.51 dBm - Conducted</b>
<b>Data of issue</b>	:	<b>January 11, 2011</b>

This test report is issued under the authority of:

The test was supervised by:

*John*

his

Hyun-Chae You, Manager

Il-Shin kim, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.

NVLAQ®

NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION'S	-----	3
2. INFORMATION'S ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 CARRIER FREQUENCY SEPARATION	-----	6
3.2.2 NUMBER OF HOPPING FREQUENCIES	-----	8
3.2.3 20 dB BANDWIDTH	-----	10
3.2.4 TIME OF OCCUPANCY (Dwell Time)	-----	17
3.2.5 TTANSMITTER OUTPUT POWER	-----	22
3.2.6 BAND – EDGE & SPURIOUS	-----	26
3.2.7 FIELD STRENGTH OF HARMONICS -Transmitter	-----	32
3.2.8 FIELD STRENGTH OF HARMONICS -Receiver	-----	36
3.2.9 AC CONDUCTED EMISSIONS	-----	38

## **APPENDIX**

APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	41
--	-------	----

## 1. General information's

### **1-1 Test Performed**

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### **1-2 Accredited agencies**

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2011-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2011-06-20	EMC accredited Lab.
FCC	U.S.A	610755	2011-04-22	FCC filing
VCCI	JAPAN	R2133, C2307	2011-06-21	VCCI registration
IC	CANADA	IC5799	2012-05-14	IC filing

## 2. Information's about test item

### 2-1 Applicant

Company name : Namsung Corporation.  
 Address : ACE Techno Tower 13th Fl, 197-22, Guro-dong, Guro-gu, Seoul, Korea  
 Tel / Fax : Tel. +82-2-2109-1561/ Fax +82-2-864-8399

### 2-2 Manufacturer

Company name : Namsung Electronics Ltd.  
 Address : 34 International District, Xian Town Baoan, Shenzhen, China  
 Tel / Fax : Tel : +86-755-2785-3841 / Fax : +86-755-2785-3840

### 2-3 Equipment Under Test (EUT)

Trade name : Universal Bluetooth GPS Receiver  
 FCC ID : GJW-XGPS150  
 Model name : XGPS150  
 Serial number : Identical prototype  
 Date of receipt : December 27, 2010  
 EUT condition : Pre-production, not damaged  
 Antenna type : Chip Antenna (M/N: ALA131C3) Max Gain 0.15 dBi  
 Frequency Range : 2402 ~ 2480MHz  
 RF output power : Maximum 0.51 dBm  
 Number of channels : 79  
 Channel spacing : 1MHz  
 Channel Access Protocol : Frequency Hopping Spread Spectrum (FHSS)  
 Type of Modulation : Basic Mode(GFSK), EDR Mode(Pi/4 DQPSK, 8DPSK)  
 Power Source : DC 5.0V By PC USB

### 2-4 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

### 2-5 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	PP37L	8V5RBN1	DELL
PRINTER	STYLUS C65	JF5Y020825	EPSON

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	20 dB Bandwidth 99% Bandwidth	> 1.5 MHz		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 250 mWatt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.109	Field Strength	-		C
15.207 /15.107	AC Conducted Emissions	EN 55022	Line Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2003

RSS-210 and ISSUE No.: 8 Date: 2010

#### → Antenna Requirement

The Namsung Corporation. XGPS150 unit complies with the requirement of §15.203.

- . The antenna is connected to inside of EUT. And type is Chip antenna.

## 3.2 Transmitter requirements

### 3.2.1 Carrier Frequency Separation

#### Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

#### The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 10 kHz (1% of the span or more)      Sweep = auto

VBW = 10 kHz      Detector function = peak

Trace = max hold

#### Measurement Data:

Test Results	
Carrier Frequency Separation (MHz)	Result
1.0029	Complies

- See next pages for actual measured spectrum plots.

#### Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of 20dB bandwidth of the hopping channel, whichever is greater.

#### Measurement Setup

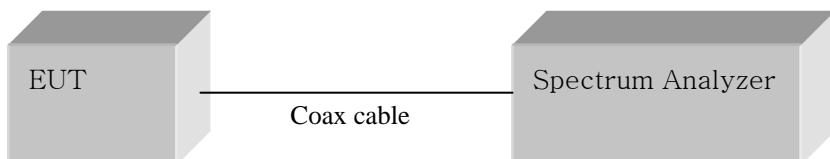
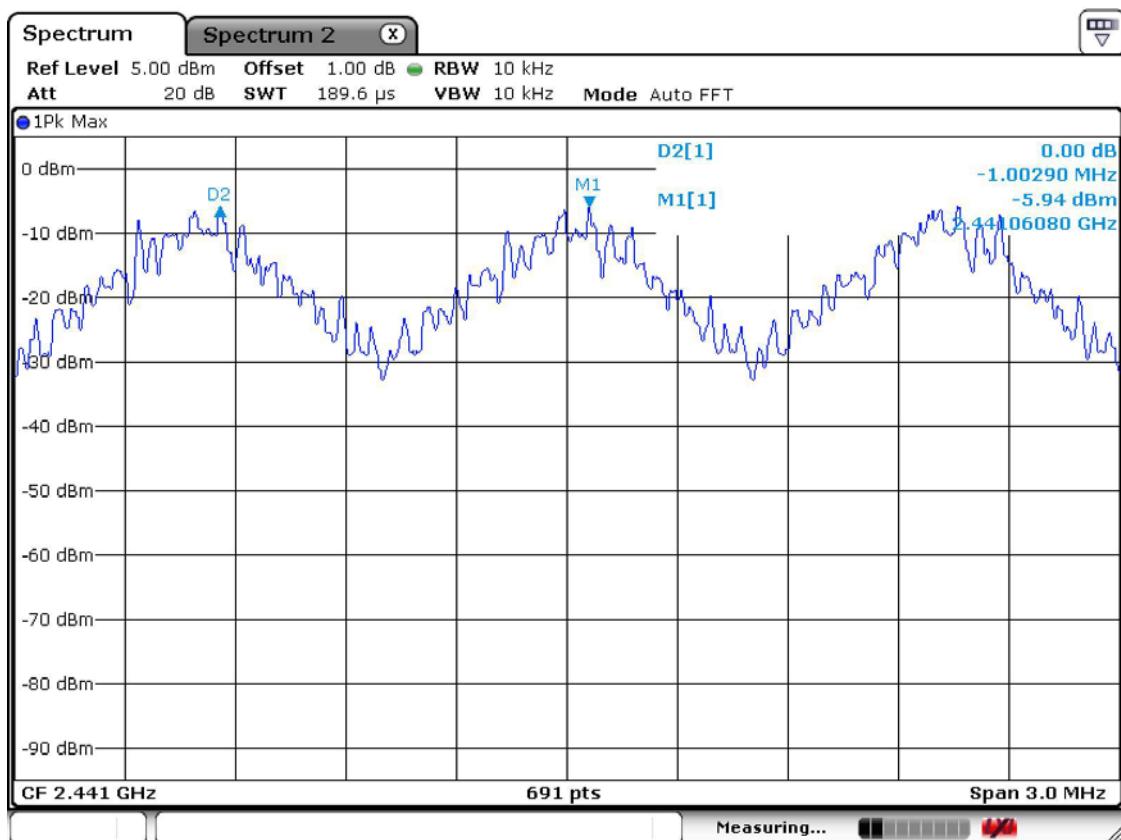
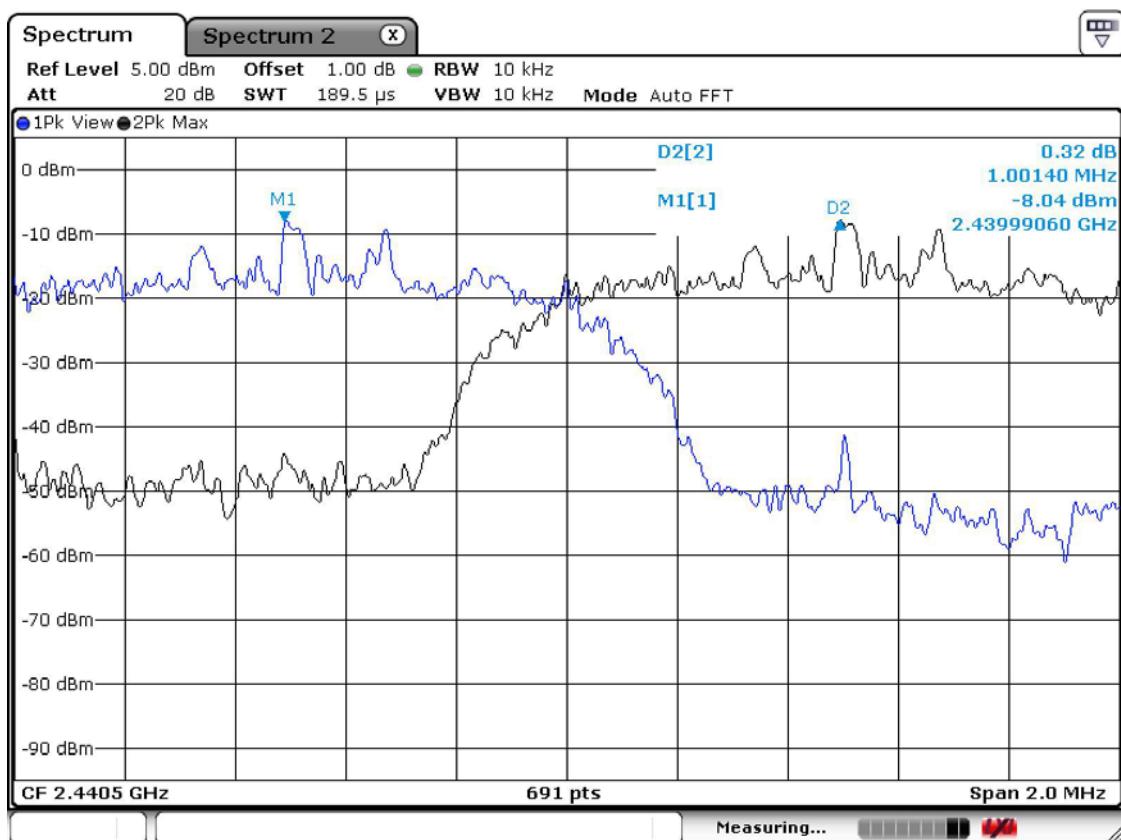


Figure 1: Measurement setup for the carrier frequency separation

Carrier Frequency SeparationBasic ModeEDR Mode

### 3.2.2 Number of Hopping Frequencies

#### Procedure:

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

#### The spectrum analyzer is set to:

Frequency range 1: Start = 2400.0MHz, Stop = 2483.5 MHz

RBW = 100 kHz (1% of the span or more) Sweep = auto

VBW = 100 kHz (VBW  $\geq$  RBW) Detector function = peak

Trace = max hold Span > 40MHz

#### Measurement Data: Complies

Total number of Hopping Channels	79
----------------------------------	----

- See next pages for actual measured spectrum plots.


#### Minimum Standard:

At least 15 hopes

#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

### Number of Hopping Frequencies

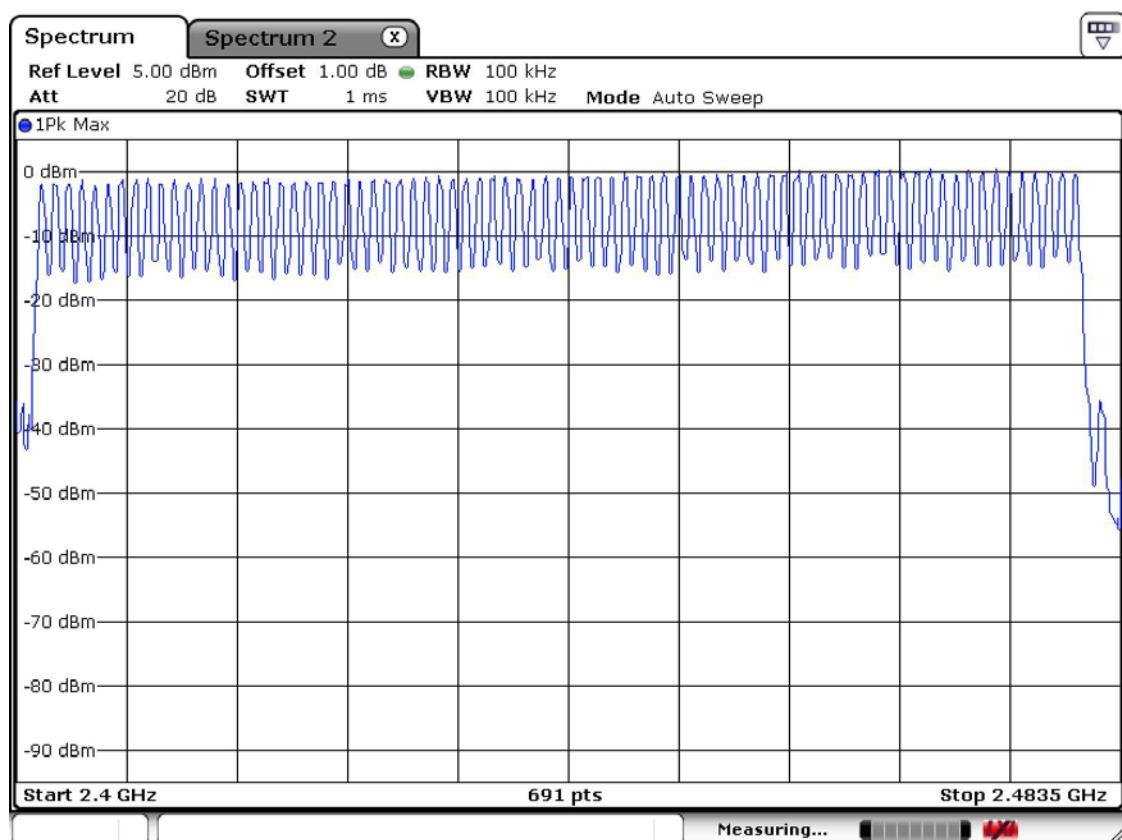

### 3.2.3 20 dB Bandwidth

#### Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

#### The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz (VBW  $\geq$  RBW)

Detector function = peak

Trace = max hold

dB/Div = 5dB

#### Measurement Data: Basic Mode

Frequency (MHz)	Channel No.	Test Results(MHz)	
		20dB Bandwidth	99% Bandwidth
2402	0	0.819	0.874
2441	39	0.816	0.877
2480	78	0.816	0.874

#### Measurement Data: EDR Mode

Frequency (MHz)	Channel No.	Test Results(MHz)	
		20dB Bandwidth	99% Bandwidth
2402	0	1.253	1.169
2441	39	1.260	1.172
2480	78	1.210	1.172

- See next pages for actual measured spectrum plots.

#### Minimum Standard:

N/A



#### Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)


Channel 1 of basic mode20 dB Bandwidth99% Bandwidth

Channel 2 of basic mode20 dB Bandwidth99% Bandwidth

Channel 3 of basic mode20 dB Bandwidth99% Bandwidth

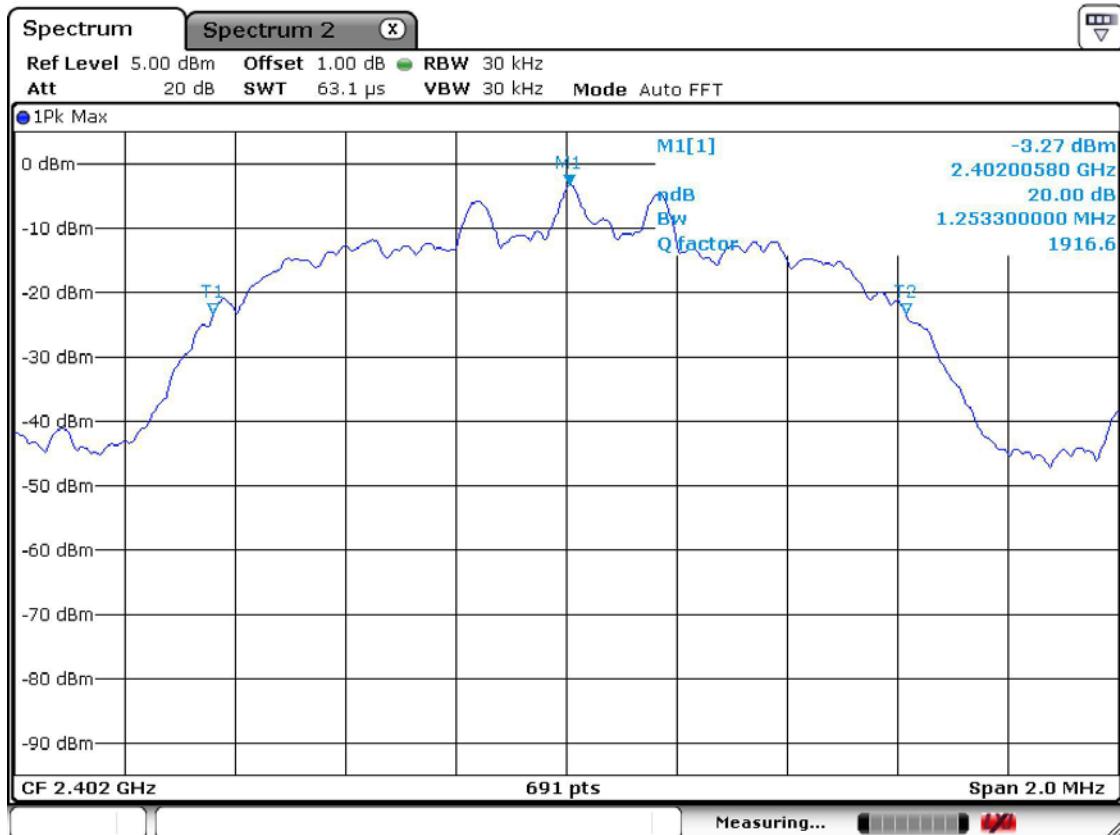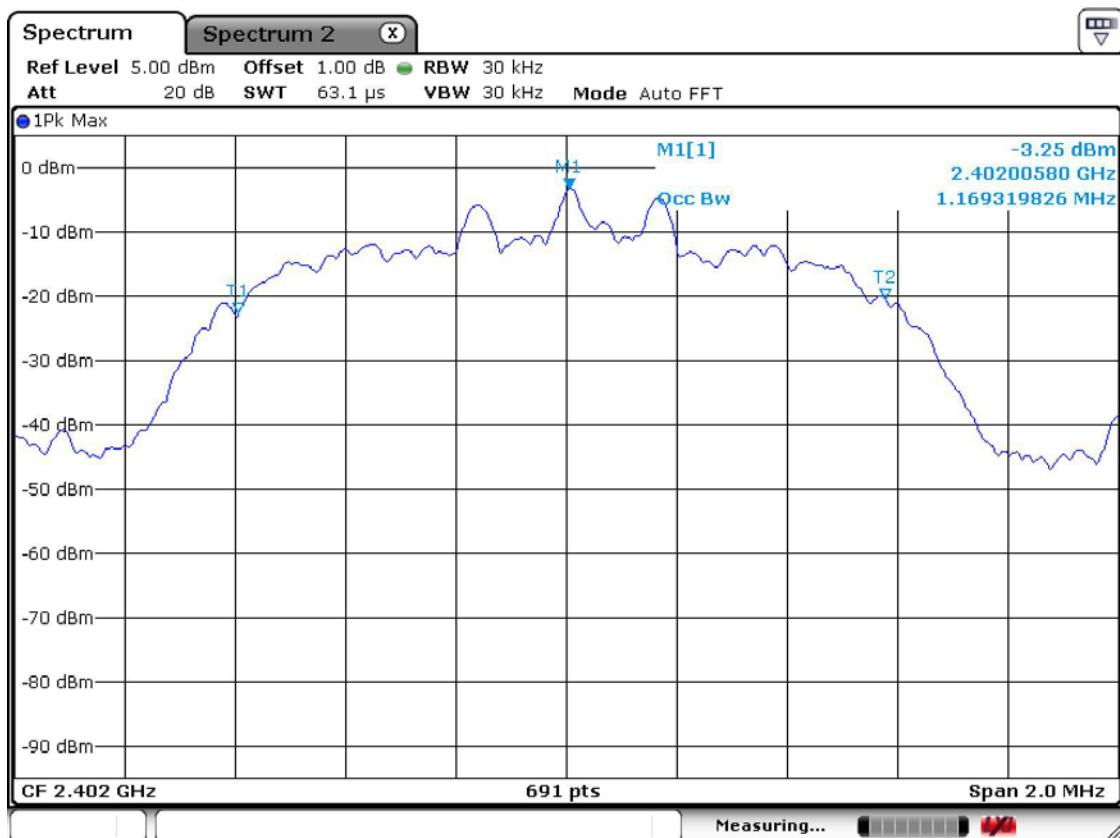Channel 1 at EDR mode20 dB Bandwidth99% Bandwidth

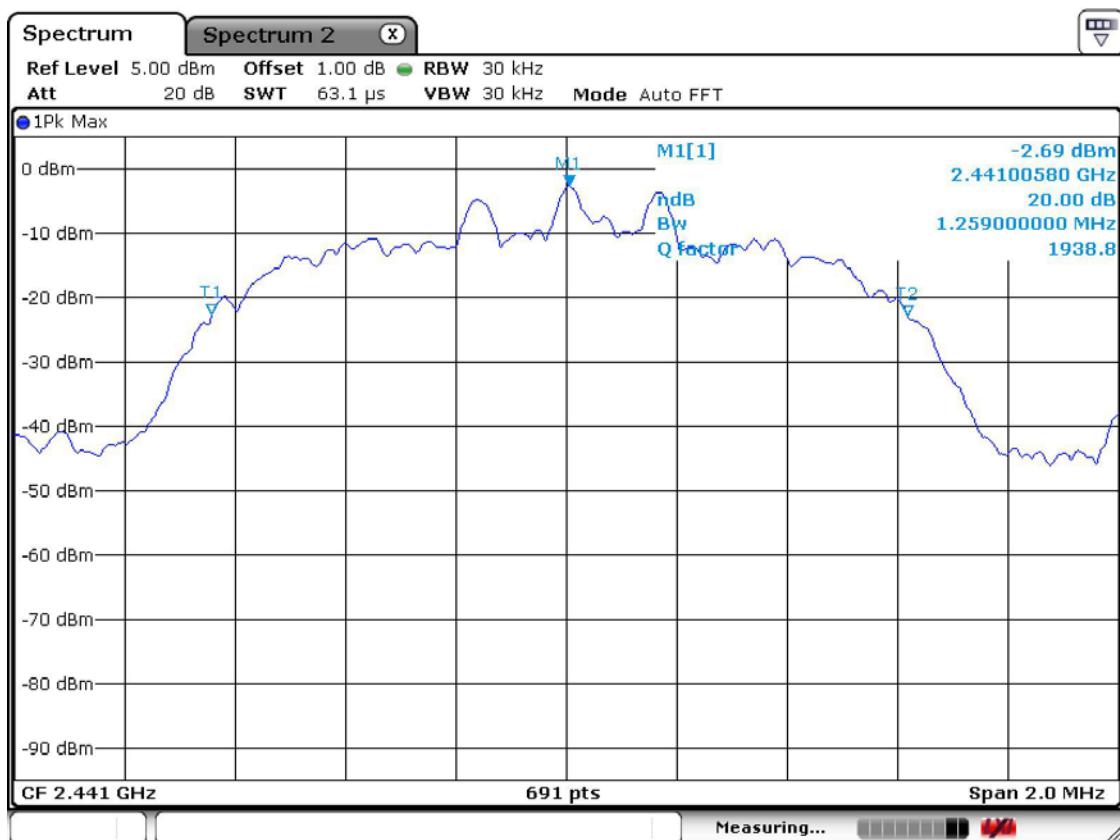Channel 2 at EDR mode20 dB Bandwidth99% Bandwidth

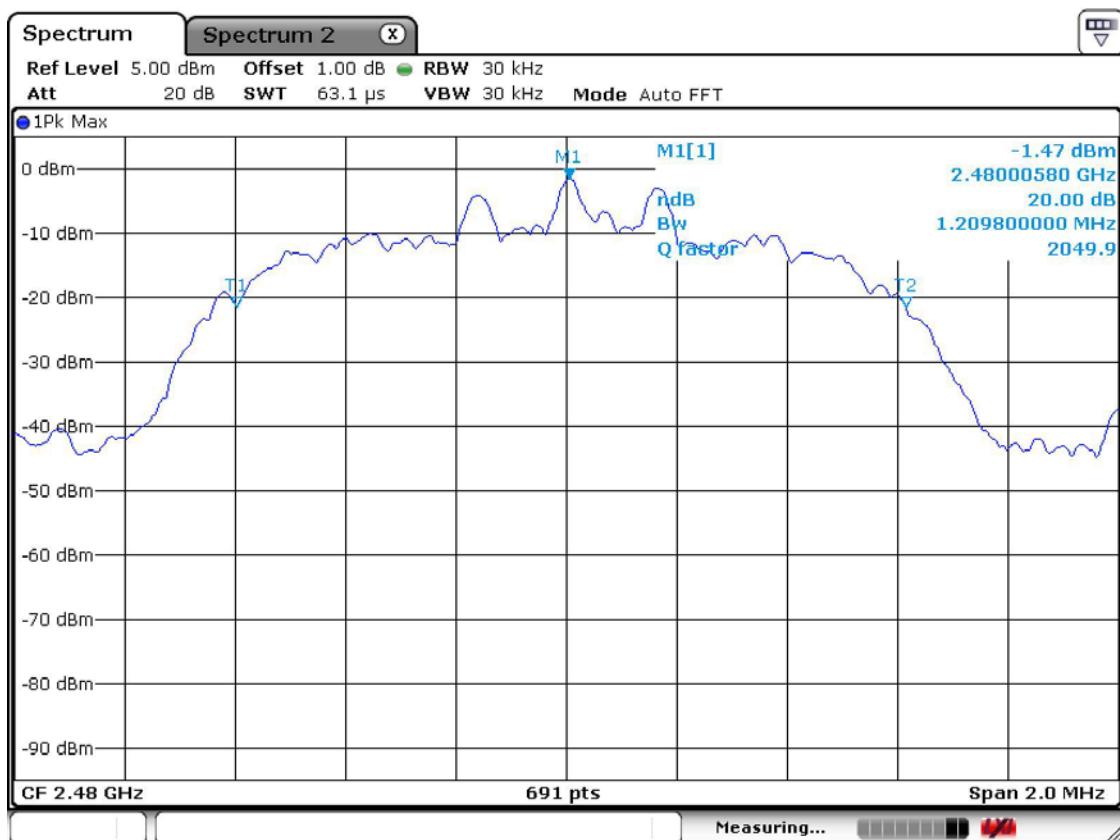Channel 3 at EDR mode20 dB Bandwidth99% Bandwidth

### 3.2.4 Time of Occupancy (Dwell Time)

#### Procedure:

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW  $\geq$  RBW)

Trace = max hold

Detector function = peak

#### Measurement Data:

Mode	Number of transmission in a 31.6s ( 79Hopping*0.4)	Length of Transmission Time (msec)	Result (msec)	Limit (msec)
DH1	30(Times / 3sec) *10.533 = 315.99	0.525	165.89	400
DH3	15(Times / 3sec) *10.533 = 158.00	1.762	278.40	400
DH5	10(Times / 3sec) *10.533 = 105.33	3.045	320.73	400
EDR 3Mbps DH5	10(Times / 3sec) *10.533 = 105.33	3.051	321.36	400



- See next pages for actual measured spectrum plots.
- dwell time = {(number of hopping per second / number of slot) x duration time per channel} x 0.4 ms



#### Minimum Standard:



0.4 seconds within a 30 second period per any frequency



#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

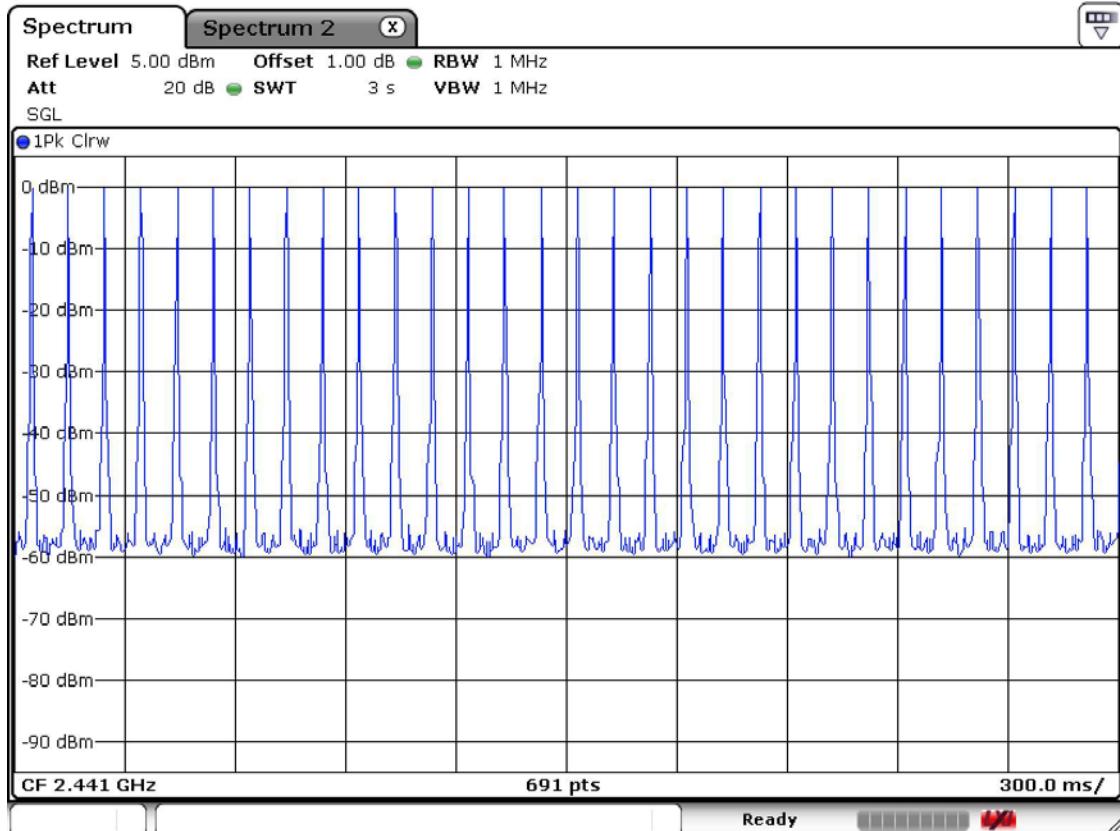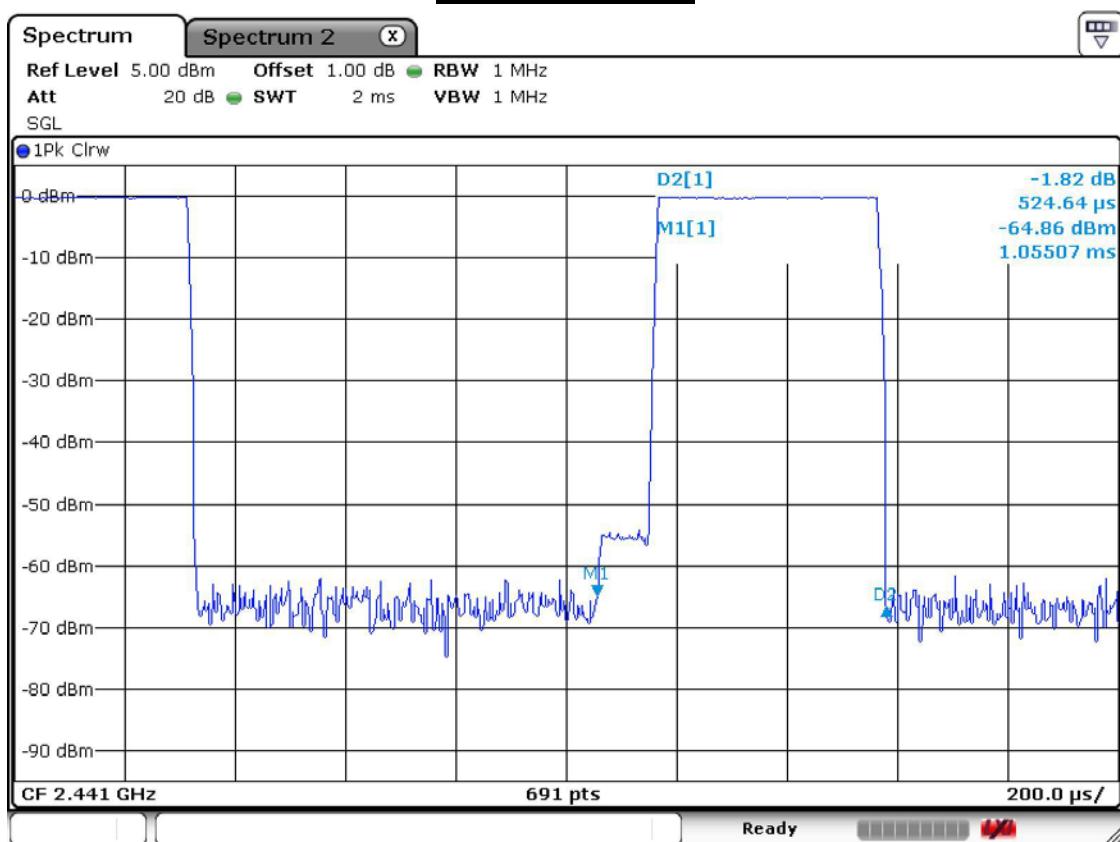**DH1 at basic mode**

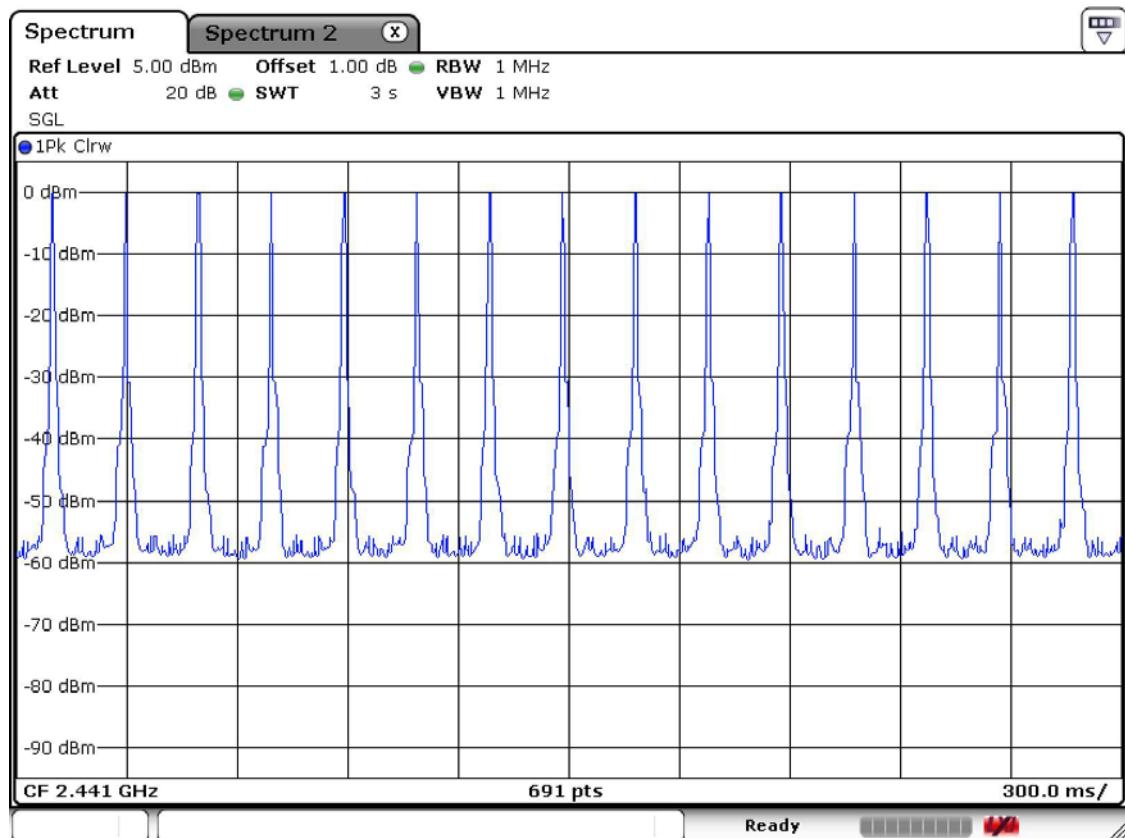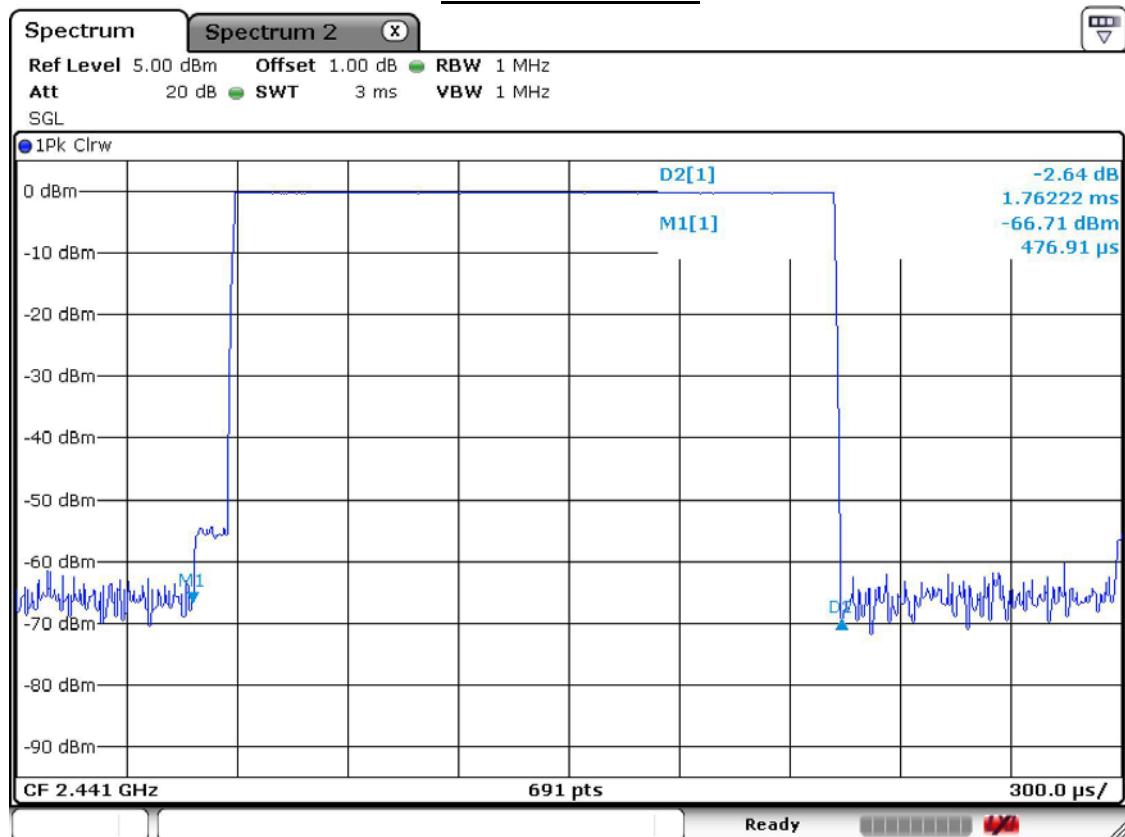**DH3 at basic mode**

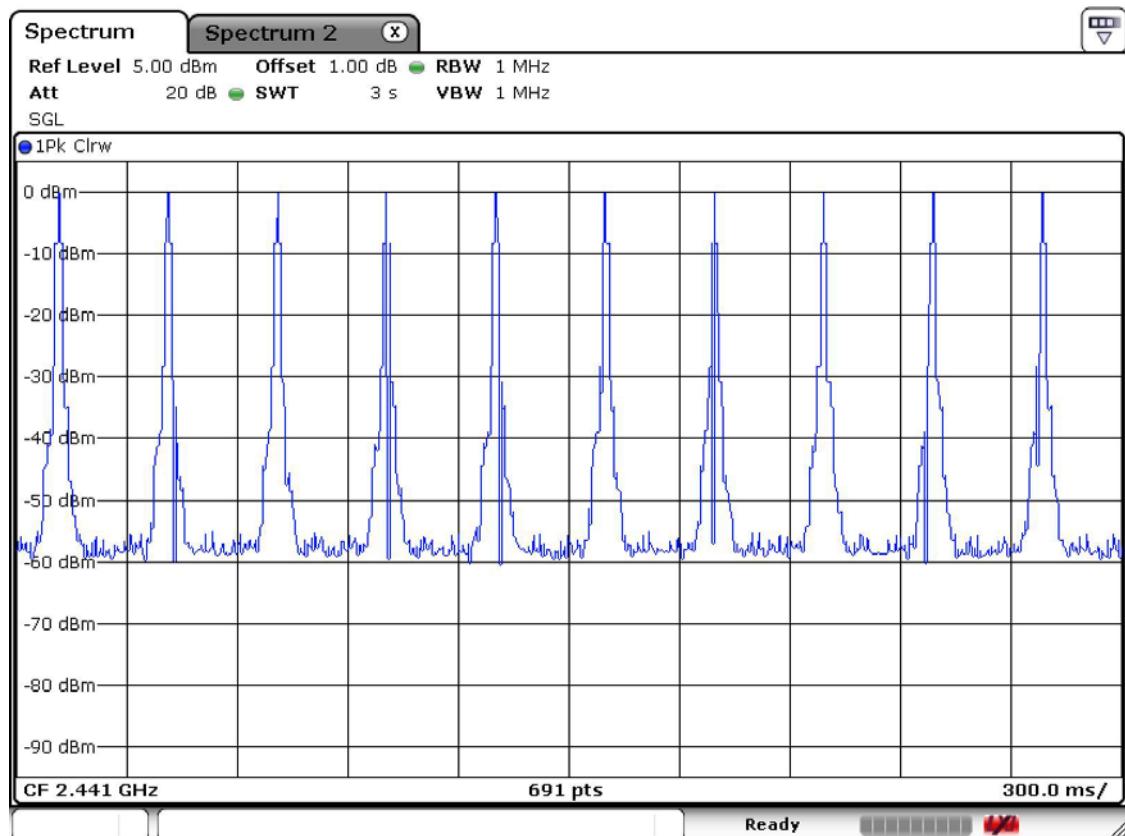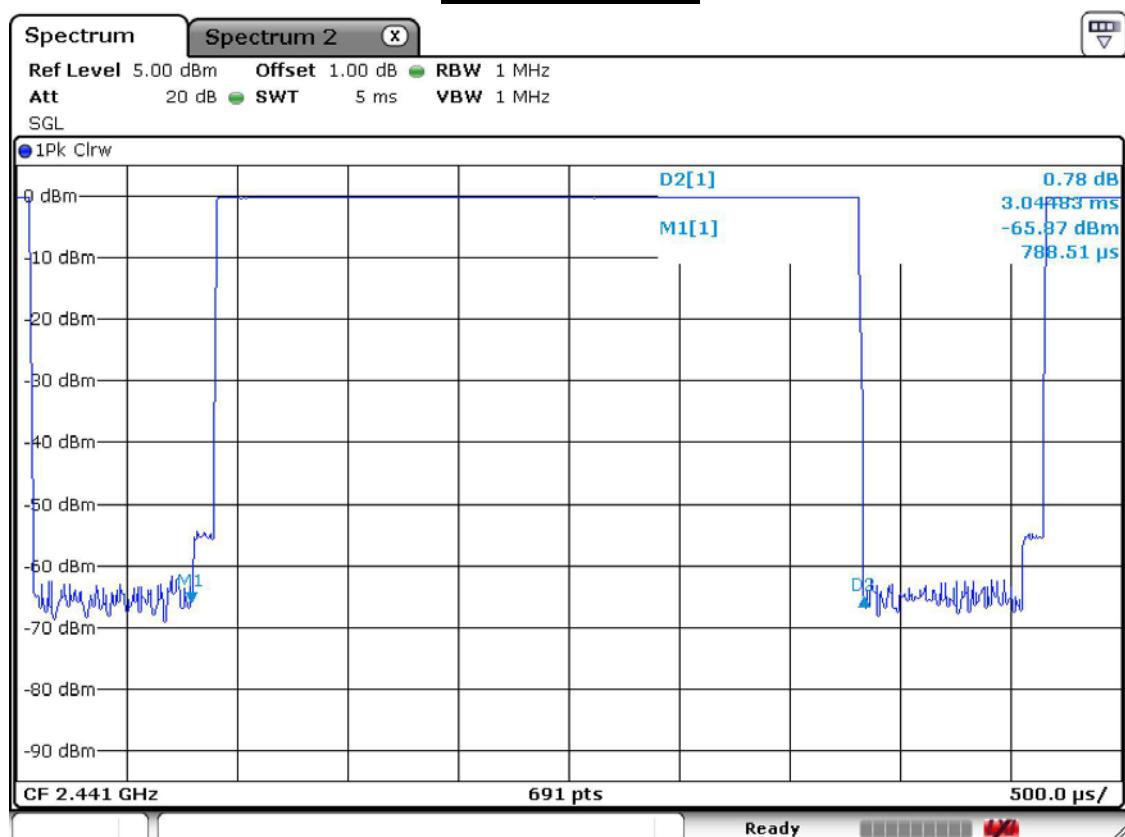**DH5 at basic mode**

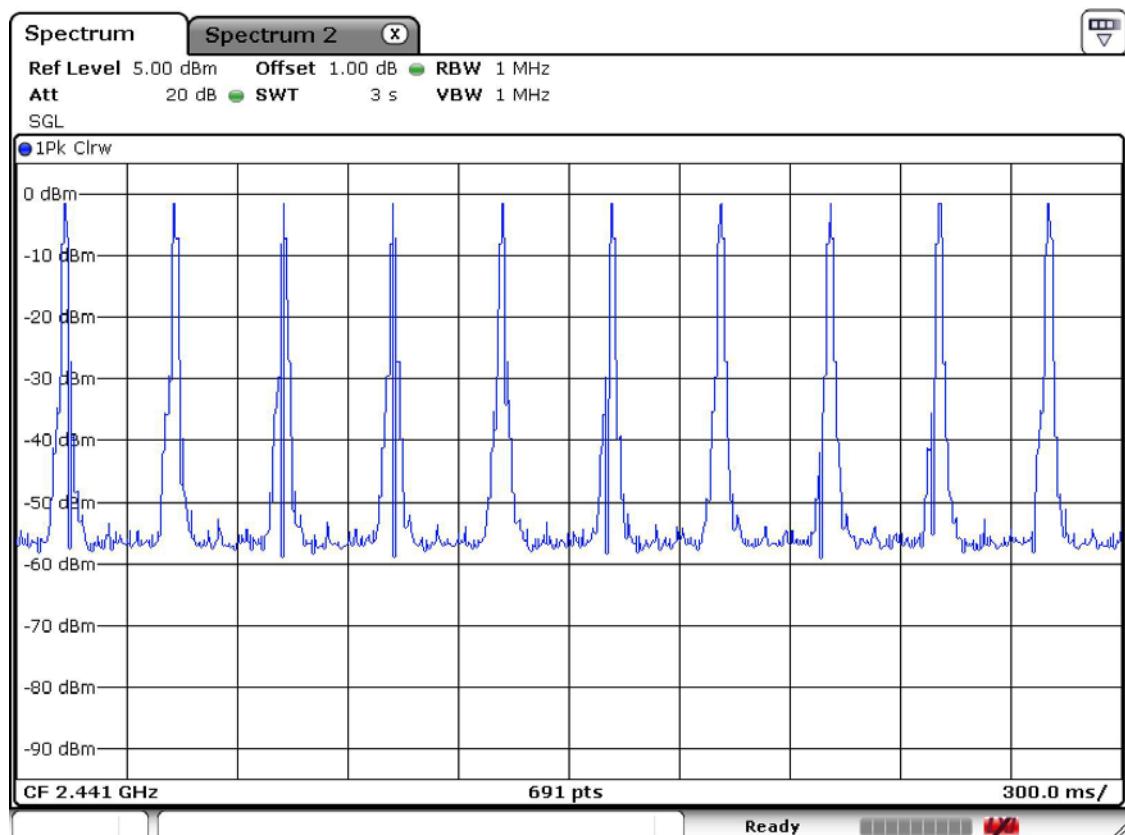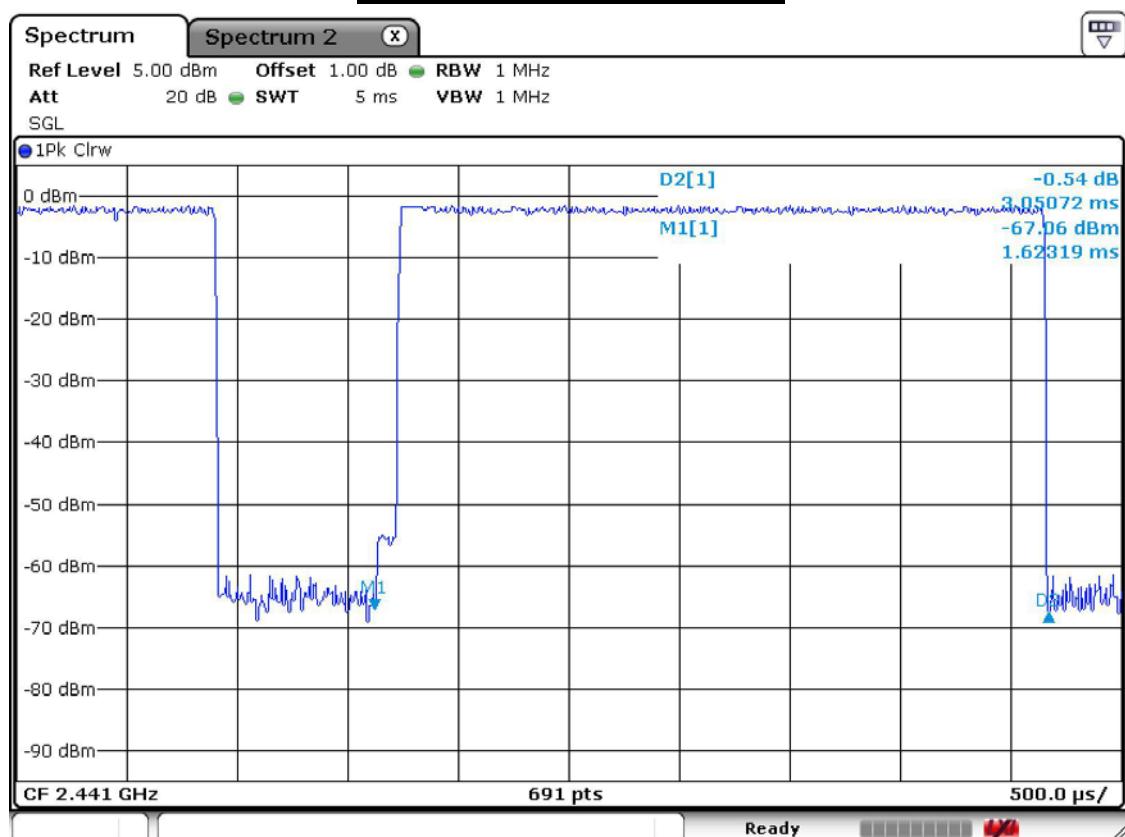**DH5 at EDR mode with 3Mbps**

### 3.2.5 Transmitter Output Power

#### Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

#### The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 20 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 3 MHz (VBW  $\geq$  RBW)      Detector function = peak

Trace = max hold      Sweep = auto

#### Measurement Data: Basic Mode

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	0	<b>-1.22</b>	<b>0.76</b>	Complies
2441	39	<b>-0.15</b>	<b>0.97</b>	Complies
2480	78	<b>0.51</b>	<b>1.12</b>	Complies

#### Measurement Data: EDR Mode

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	0	<b>-2.12</b>	<b>0.61</b>	Complies
2441	39	<b>-1.02</b>	<b>0.79</b>	Complies
2480	78	<b>-0.33</b>	<b>0.93</b>	Complies


- See next pages for actual measured spectrum plots.

<b>Minimum Standard:</b>	< 250 mW
--------------------------	----------

#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


## Channel 1 Basic mode

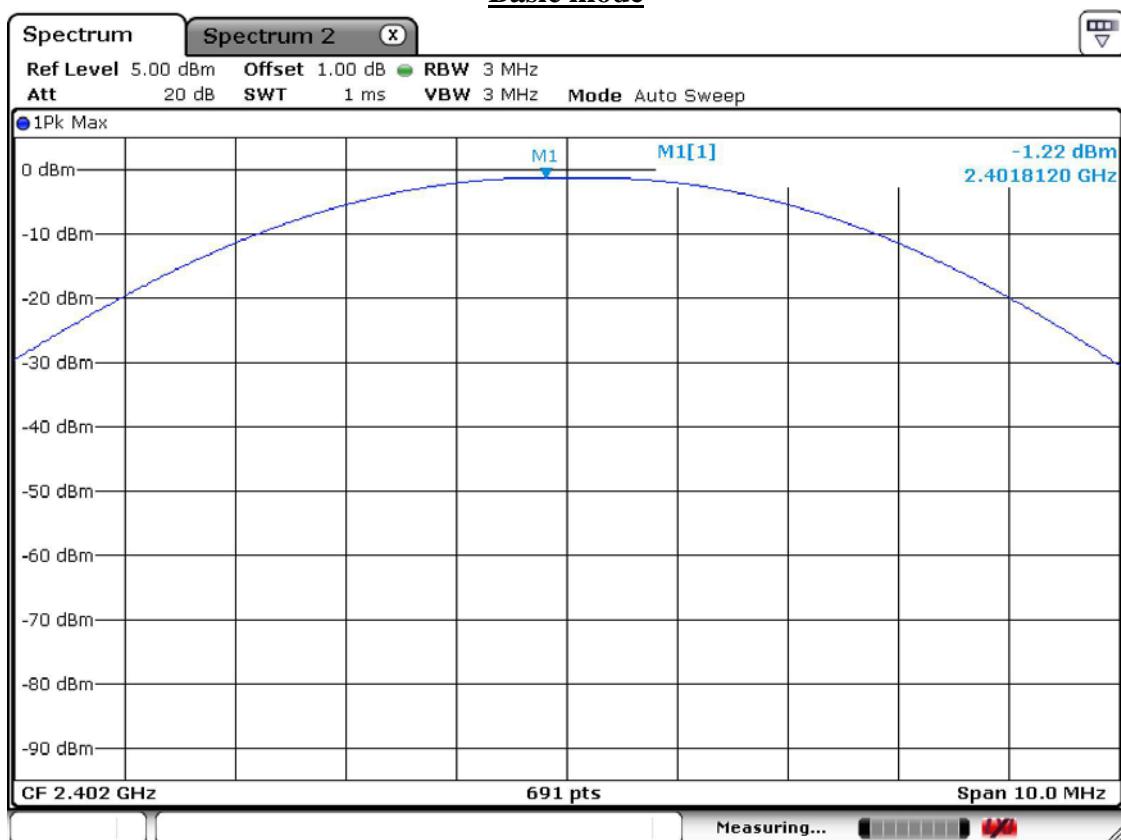


## EDR mode




**Channel 2**  
**Basic mode**

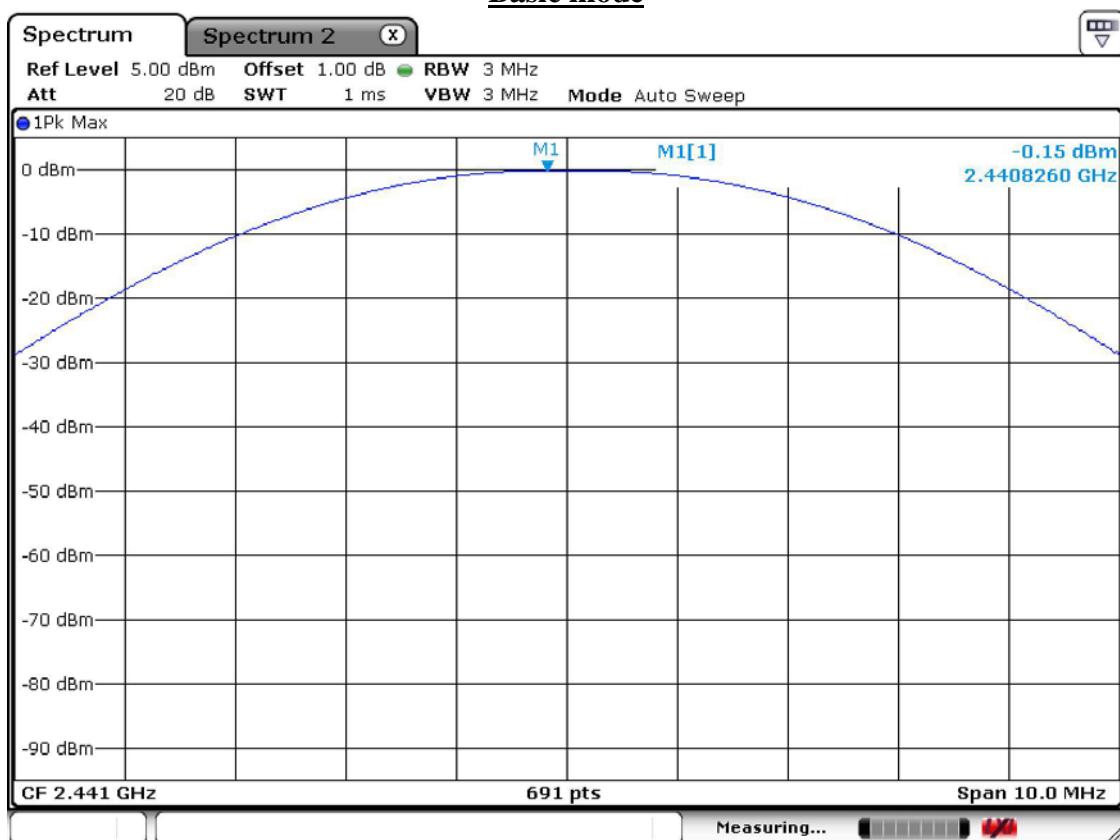


**EDR mode**

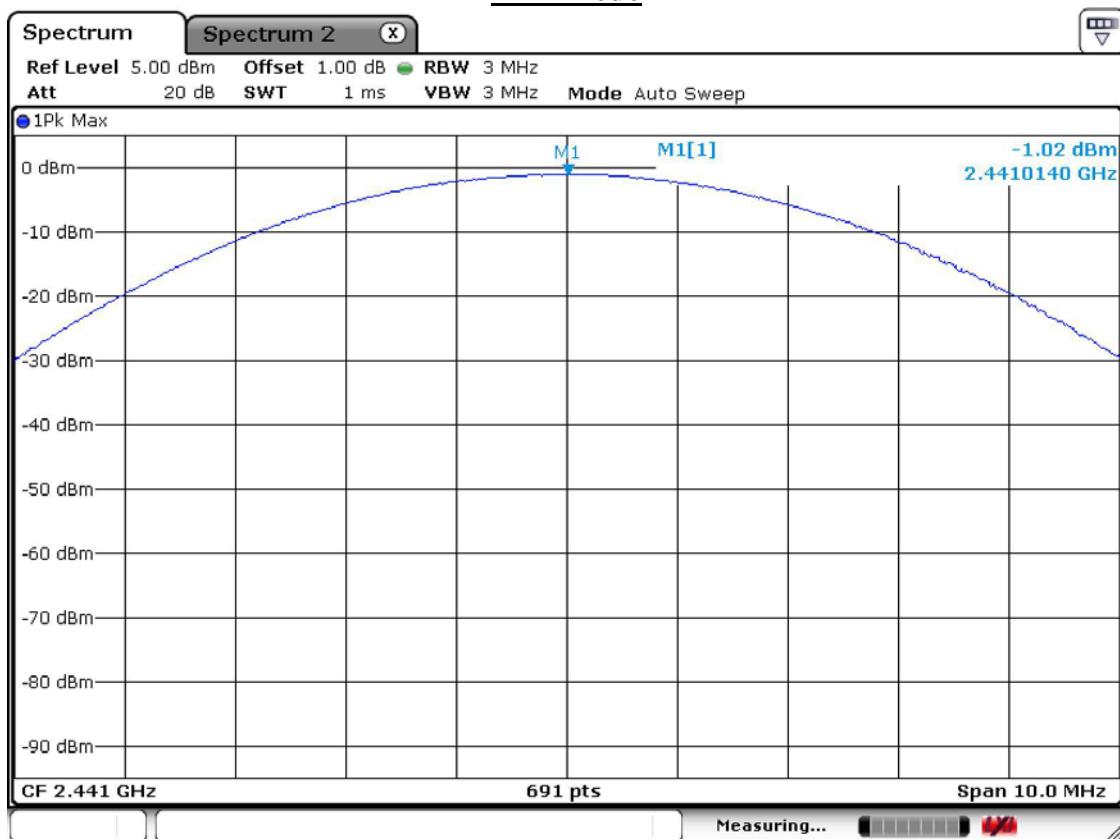

**Channel 3**  
**Basic mode**

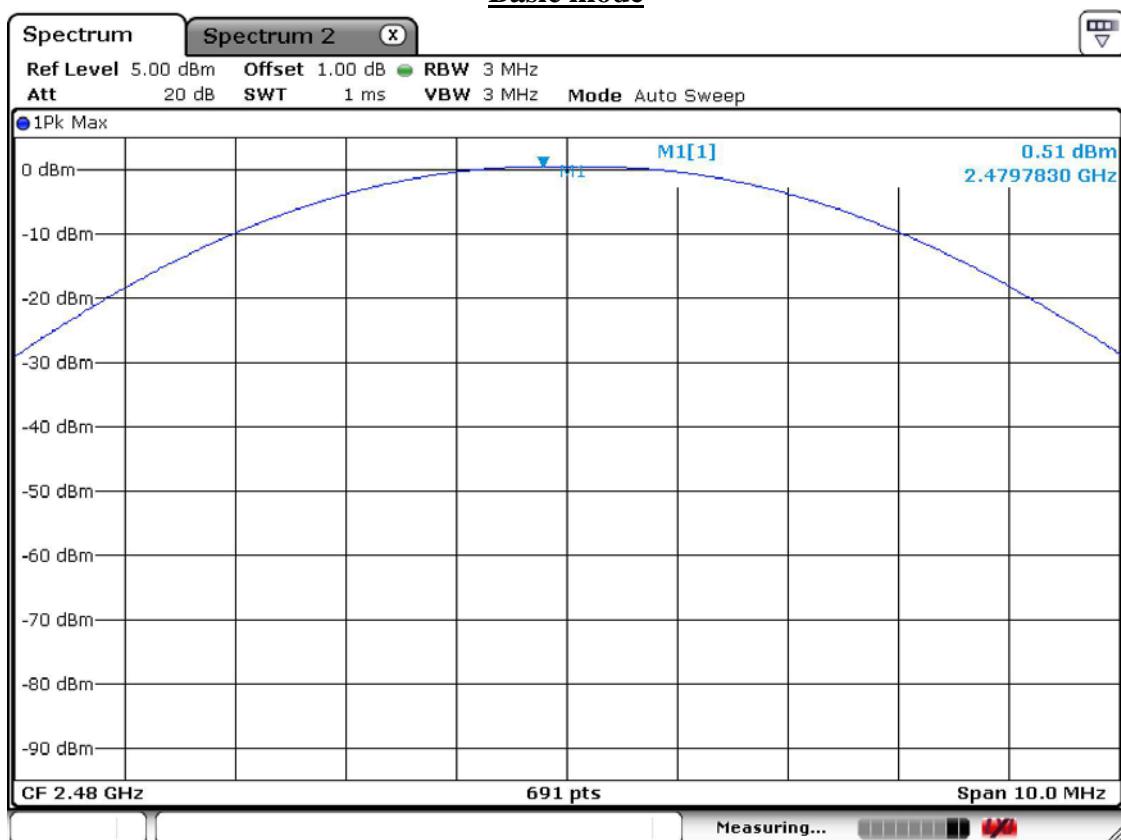

**EDR mode**

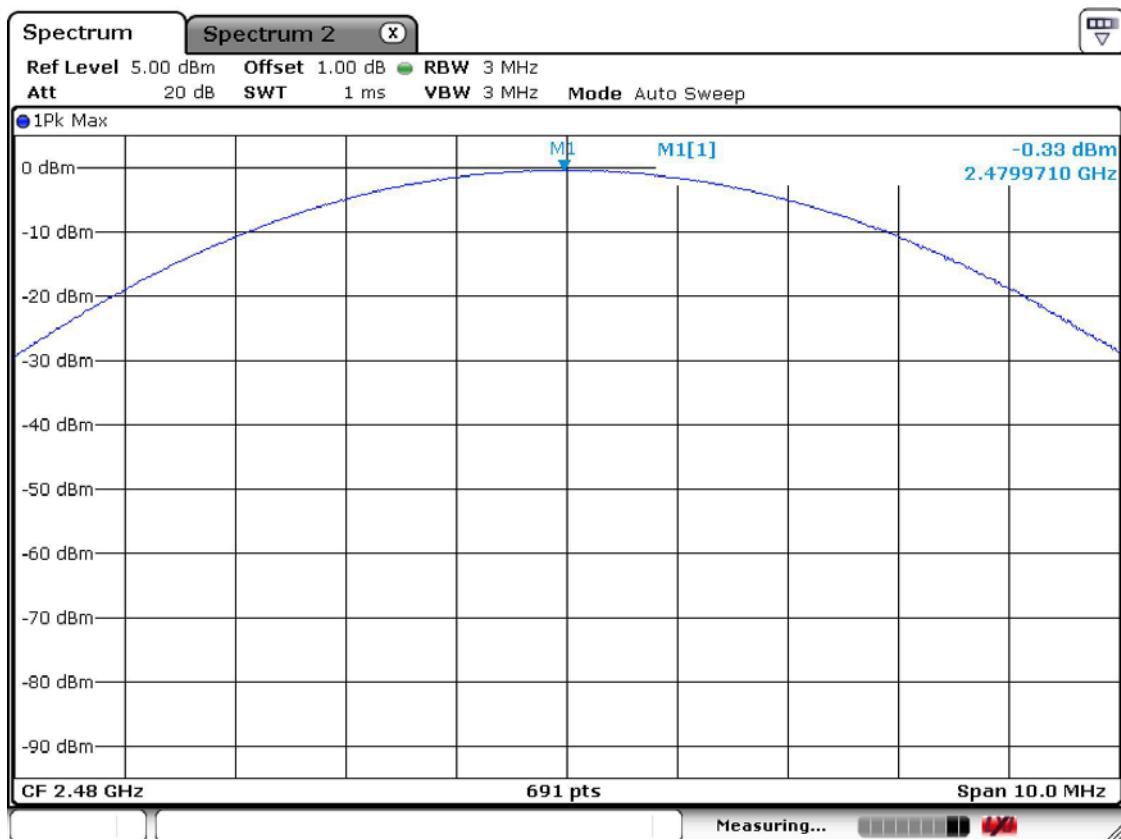

### 3.2.6 Band Edge

## Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

VBW = 100 kHz

Span = 10 MHz

Detector function = peak

#### Measurement Data: Complies



- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

---

<b>Minimum Standard:</b>	> 20 dBc
--------------------------	----------

## Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

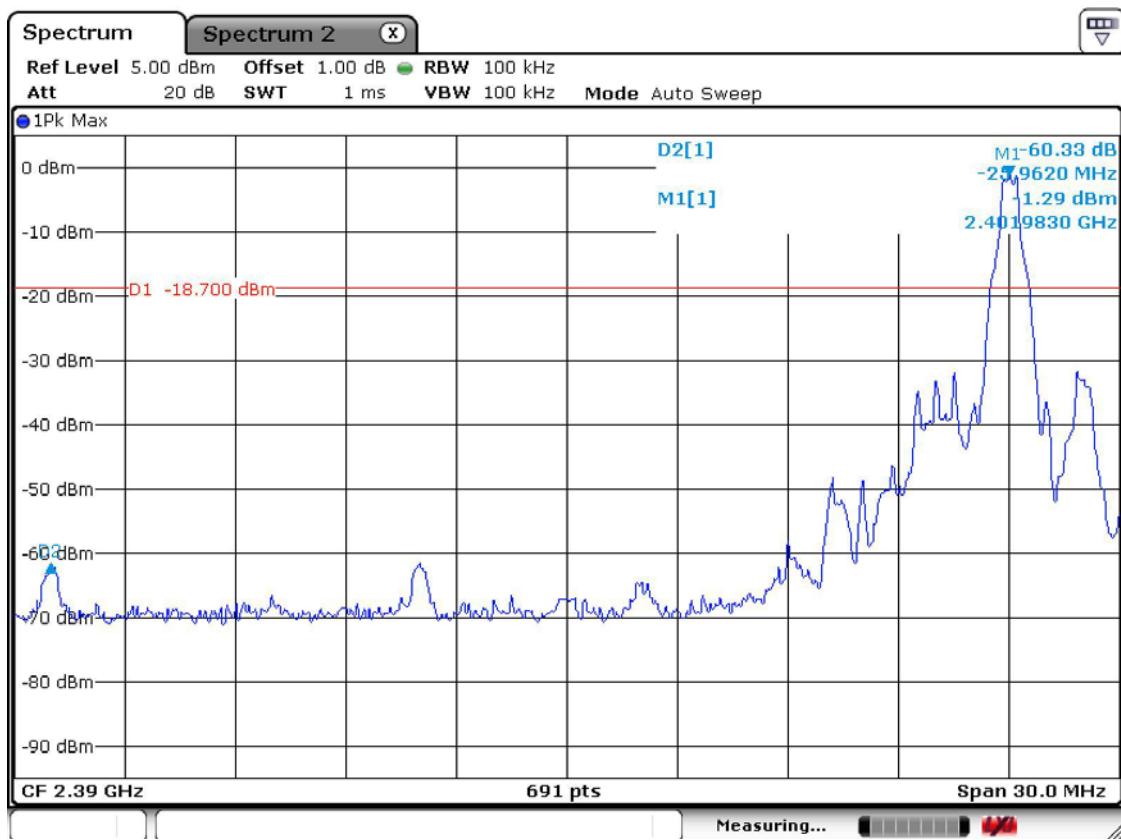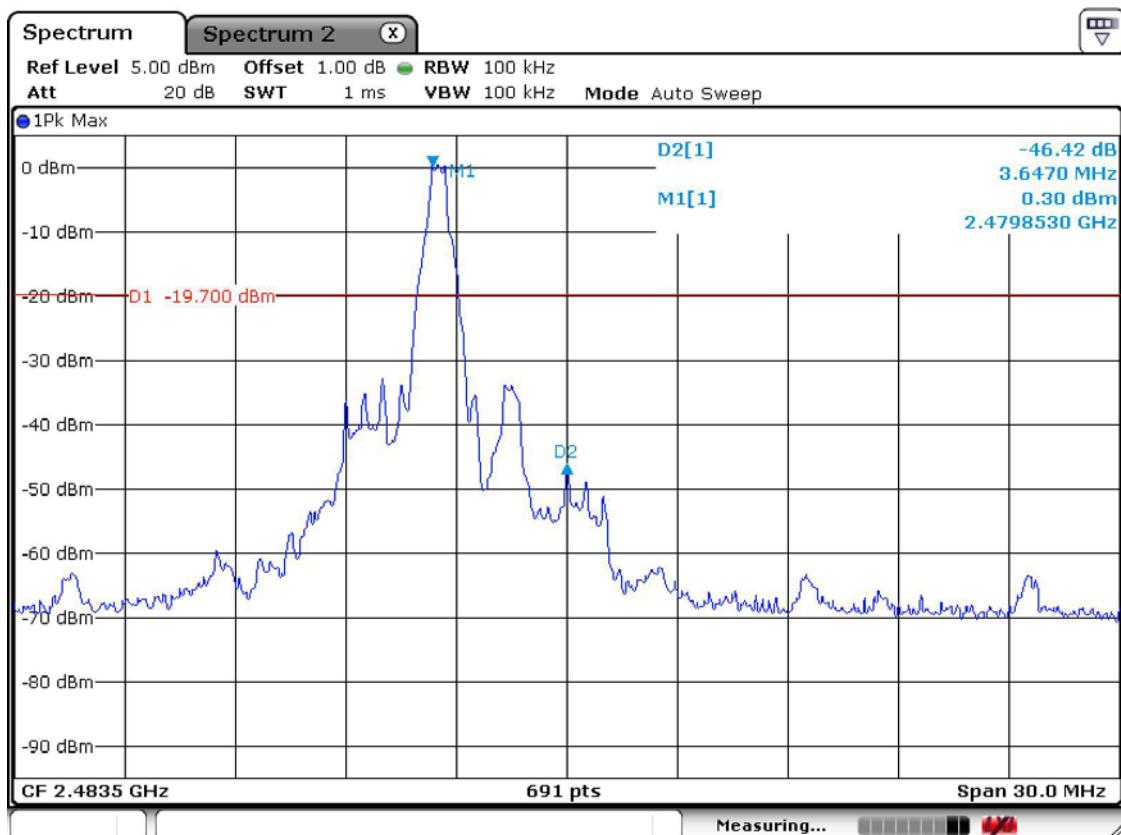Band – edgeLower edgeUpper edge

**Measurement Data****Band-edges in the restricted band 2310-2390 MHz measurement**


Frequency [MHz]	Reading [dBuV/m]	Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
			Antenna	Amp. Gain	Cable	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak
2390	43.2 56.8	H	26.0	36.0	8.2	54.0 74.0	41.4 55.0	12.6 19.0			

**Band-edges in the restricted band 2483.5-2500 MHz measurement**


Frequency [MHz]	Reading [dBuV/m]	Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
			Antenna	Amp. Gain	Cable	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak
2483.5	45.3 58.4	H	26.0	36.0	8.2	54.0 74.0	43.5 56.6	10.5 17.4			

**Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented.**


Unwanted Emission – Low channel  
Frequency Range = 30 MHz ~ 26.5 GHz

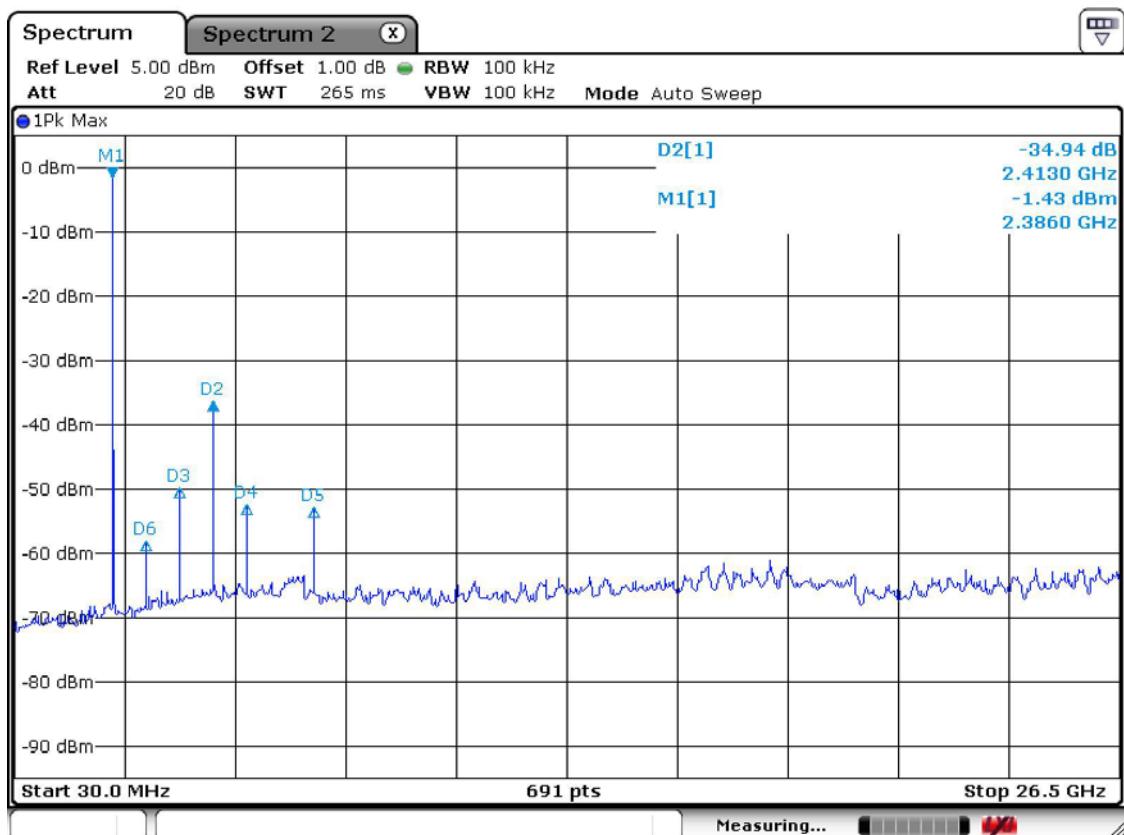

**Unwanted Emission – Middle channel**  
**Frequency Range = 30 MHz ~ 26.5 GHz**

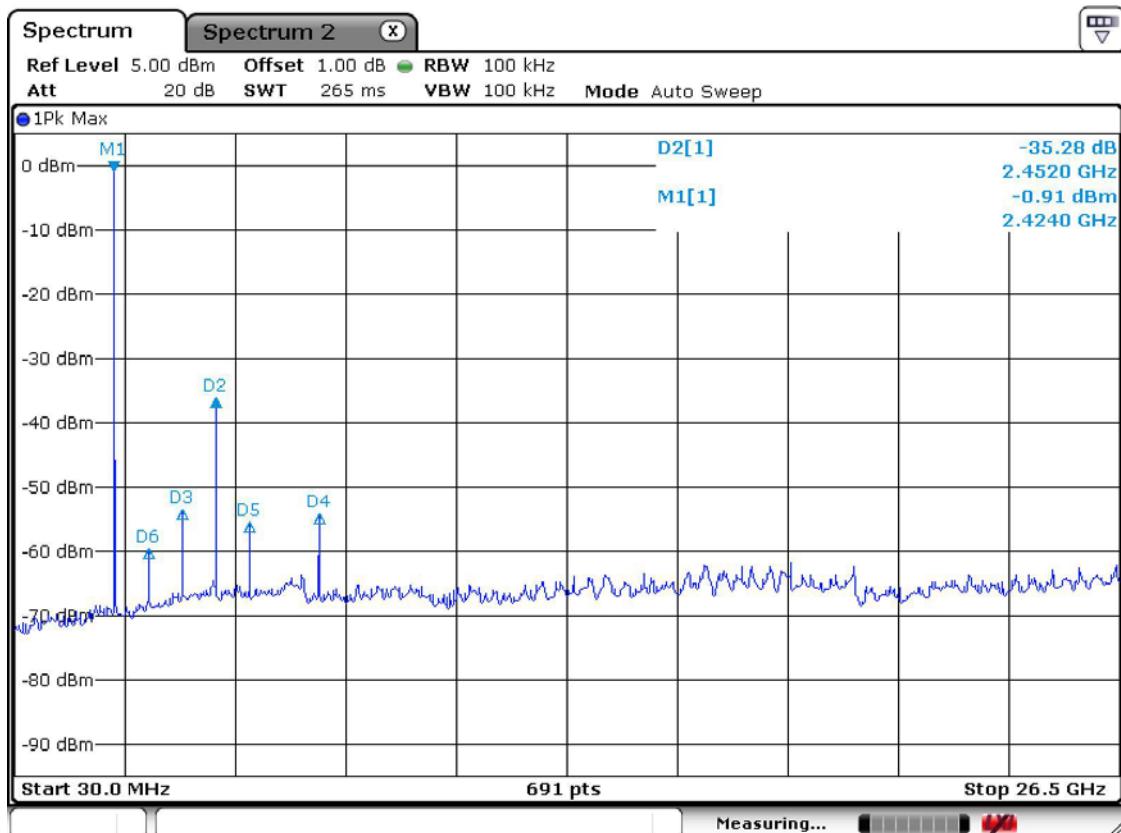

Unwanted Emission – High channel  
Frequency Range = 30 MHz ~ 26.5 GHz

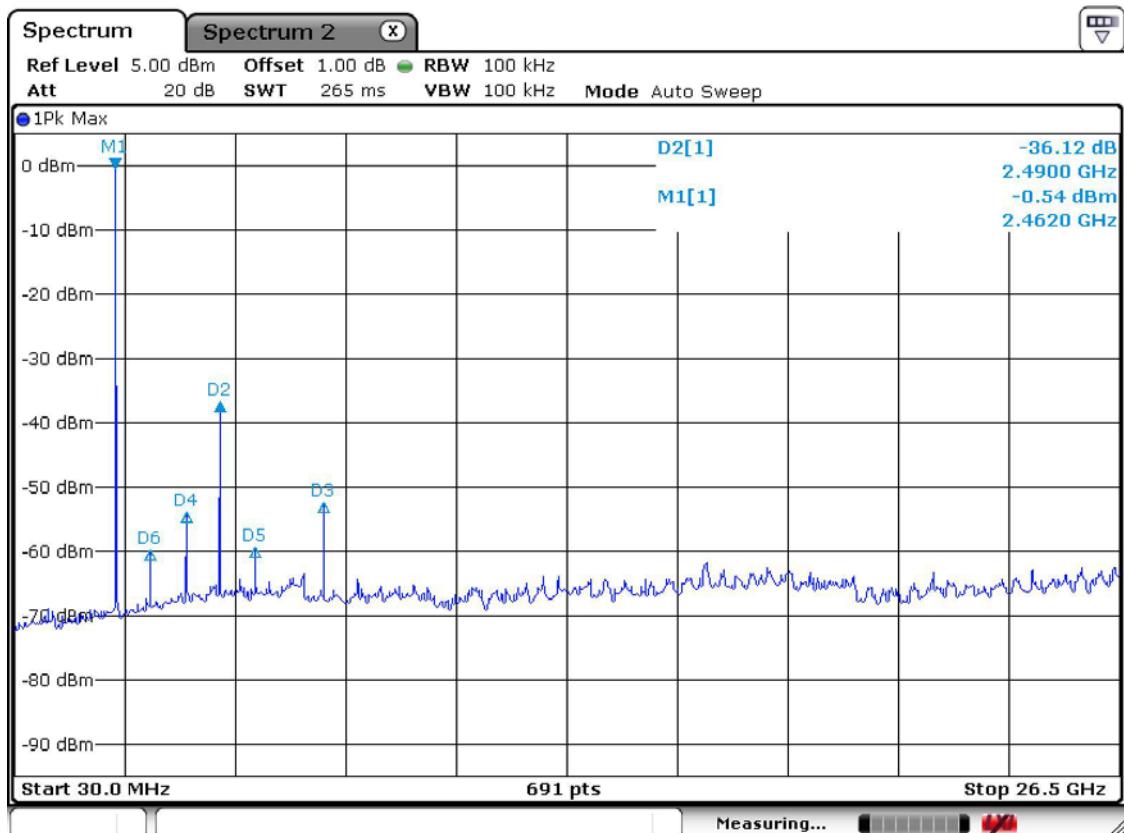

### 3.2.7 Field Strength of Harmonics

#### Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions. In case of the air temperature of the test site is out of the range is 10 to 40°C. Before the testing proceeds the warm-up time of EUT maintain adequately

#### The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.

RBW = 100 kHz ( 30MHz ~ 1 GHz)

Peak:VBW ≥ RBW

= 1 MHz (1 GHz ~ 10<sup>th</sup> harmonic )

Average:VBW=10Hz

Span = 100 MHz

Detector function = Peak and Average

Trace = max hold

Sweep = auto

#### Measurement Data: Complies

- Refer to the next page.
- The warm-up time of the EUT is 20min.
- No other emissions were detected at a level greater than 20dB below limit.

#### Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

## Measurement Data

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			D.C.F	Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Antenna	Amp.Gain	Cable		AV/Peak	AV/Peak	AV/Peak	AV/Peak	AV / Peak	AV / Peak
4804.00	47.2	56	H	31.4	34.6	8.7	-30.25	54.0	74.0	22.4	31.2	31.6	42.8
Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			D.C.F	Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Antenna	Amp.Gain	Cable		AV/Peak	AV/Peak	AV/Peak	AV/Peak	AV / Peak	AV / Peak
4882.0	48.2	57.3	H	31.4	34.6	8.7	-30.25	54.0	74.0	23.4	32.5	30.6	41.5
Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			D.C.F	Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Antenna	Amp.Gain	Cable		AV/Peak	AV/Peak	AV/Peak	AV/Peak	AV / Peak	AV / Peak
4960.0	46.8	55.9	H	31.4	34.6	8.7	-30.25	54.0	74.0	22.0	31.1	32.0	42.9

## NOTE.

- No other emissions were detected at a level greater than 20dB below limit.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{C.F} + \text{DF} \quad / \quad \text{C.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, C.F = Correction Factor, AF=Antenna, CL=Cable, AG=Amp.Gain

$$\text{D.C.F ( Duty Cycle Correction Factor)} = 20\log(\text{The worst Case DWELL Time}/100ms)$$

$$= 20\log(3.073ms/100ms) = -30.25$$

Bluetooth + GPS + USB Charging mode


243 Jubug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel: +82-31-3236008,9  
Fax: +82-31-3236010

EUT/Model No.: XGPS150

TEST MODE: Bluetooth+GPS+USB Charging mode

Temp Humi : 1 / 35

Tested by: PARK.H.W

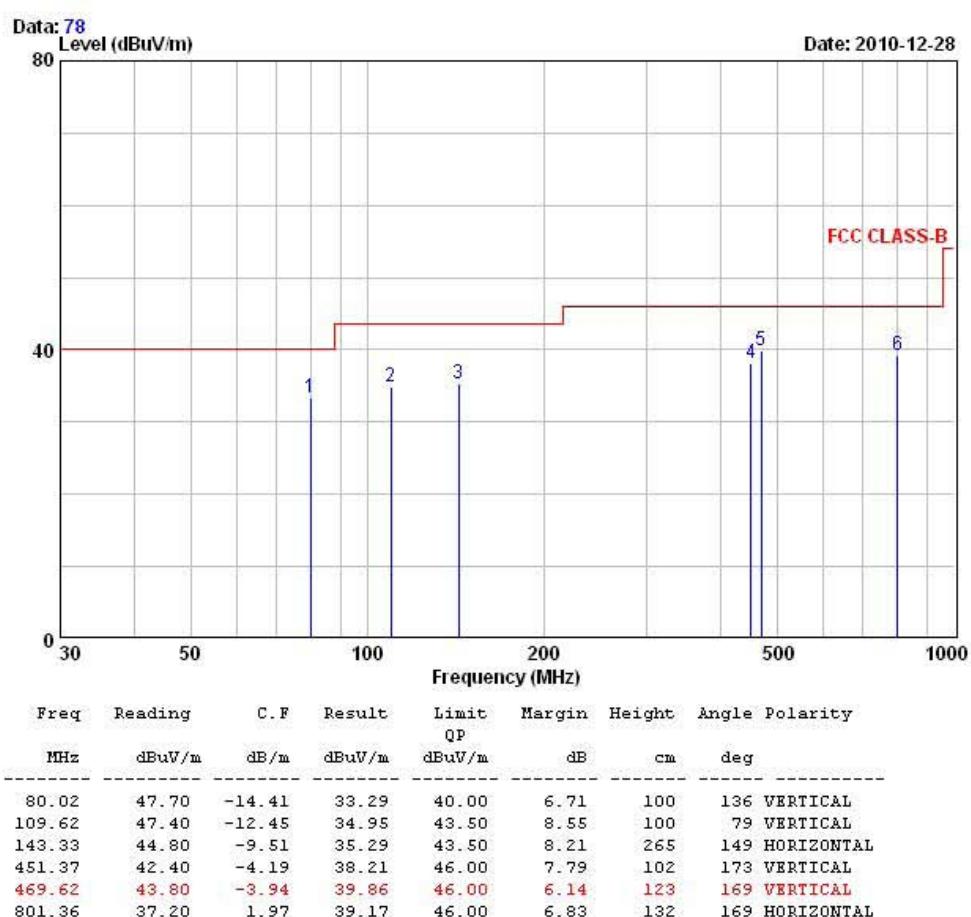

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

**Bluetooth + GPS + Car adapter Charging mode**


243 Jubug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel :+82-31-3236008,9  
Fax :+82-31-3236010

EUT/Model No.: XGPS150

TEST MODE: Bluetooth+GPS+Car adapter Charging mode

Temp Humi : 1 / 35

Tested by: PARK.H.W

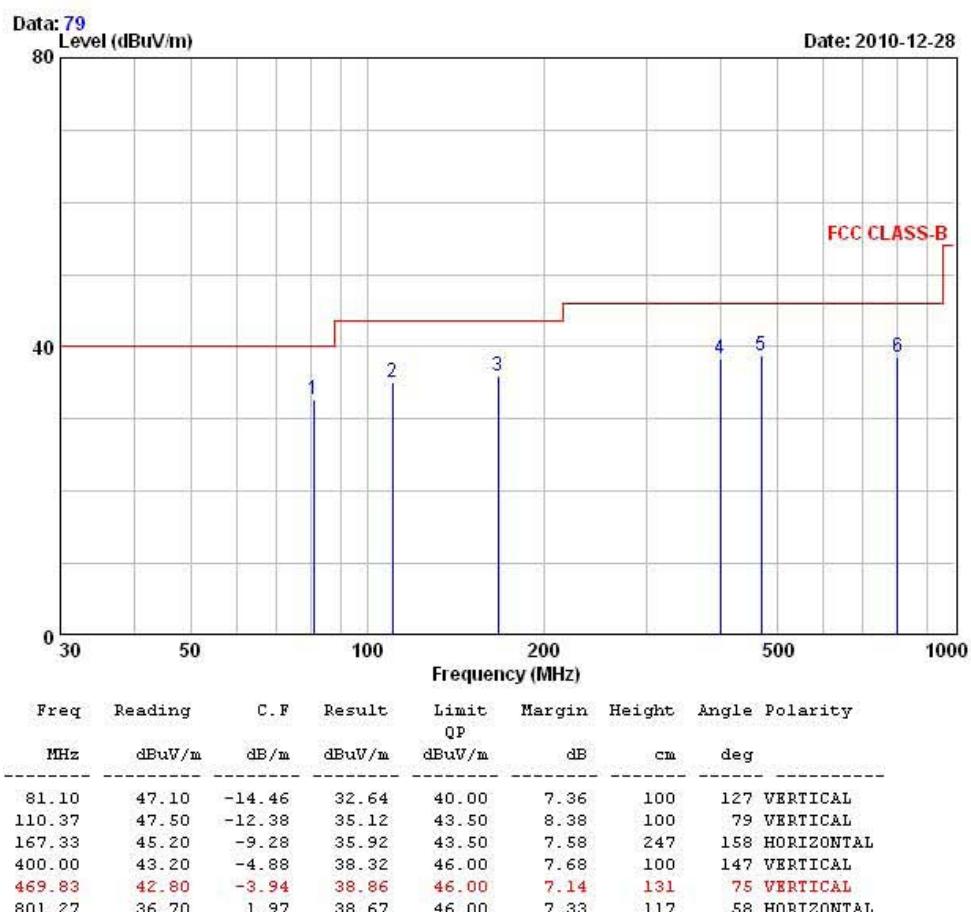

### 3.2.8 Field Strength of Harmonics -Receiver

#### Definition:

The field strength of emissions from intentional radiators was measured. In case of the air temperature of the test site is out of the range is 10 to 40°C. Before the testing proceeds the warm-up time of EUT maintain adequately

Test method	: FCC Part 15.209
Frequency Range	: 30 MHz ~ 10 <sup>th</sup> harmonic.
Bandwidth	: 120 kHz (F < 1GHz) 1 MHz (F > 1GHz)
Distance of antenna	: 3 meters
Test mode	: Rx mode
Result	: <b>Complies</b>

#### Measurement Data:

- No other emissions were detected at a level greater than 20dB below limit.
- The warm-up time of the EUT is 20min.
- Refer to the next page.

#### Field Strength Limit

##### Part 15.209 LIMIT:

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100**
88 ~ 216	150**
216 ~ 960	200**
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

## Measurement Data

Frequency [MHz]	Reading [dBuV/m]	Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
			Antenna	Amp.Gain	Cable	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
Frequency [MHz]	Reading [dBuV/m]	Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
			Antenna	Amp.Gain	Cable	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
Frequency [MHz]	Reading [dBuV/m]	Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
			Antenna	Amp.Gain	Cable	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

No other emissions were detected at a level greater than 20dB below limit.

### 3.2.9 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

#### Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 10dB below limit.

#### Minimum Standard: FCC Part 15.207(a)/EN 55022


Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

AC Conducted Emissions at Bluetooth + GPS + USB Charging mode – Line

243 Jibug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel. +82-31-3236008,9  
Fax. +82-31-3236010

EUT / Model No. : XGPS150 Phase : LINE  
Test Mode : Bluetooth+GPS+USB Charging mode Test Power : 120 / 60  
Temp./Humi. : 13 / 36 Test Engineer : PARK.H.W

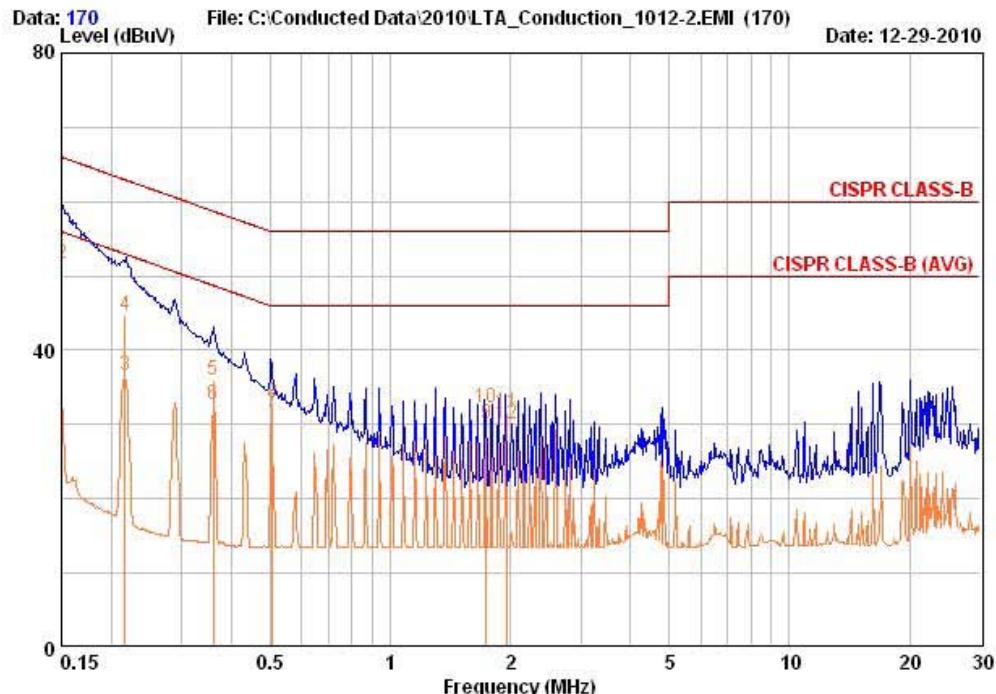


Freq MHz	RD QP dBuV	RD AV dBuV	C. F dB	Result		Limit		Margin	
				QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.150	42.05	25.45	9.66	51.71	35.11	66.00	56.00	14.29	20.89
0.216	35.06	26.96	9.64	44.70	36.60	62.97	52.97	18.27	16.37
0.361	26.25	22.95	9.66	35.92	32.62	58.71	48.71	22.79	16.09
0.506	23.25	21.85	9.67	32.92	31.52	56.00	46.00	23.08	14.48
1.737	22.51	20.31	9.68	32.20	30.00	56.00	46.00	23.80	16.00
1.953	21.93	20.43	9.68	31.61	30.11	56.00	46.00	24.39	15.89

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions at Bluetooth + GPS + USB Charging mode – Neutral

243 Jibug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel. +82-31-3236008,9  
Fax.+82-31-3236010

EUT / Model No. : XGPS150 Phase : NEUTRAL  
 Test Mode : Bluetooth+GPS+USB Charging mode Test Power : 120 / 60  
 Temp./Humi. : 13 / 36 Test Engineer : PARK.H.W

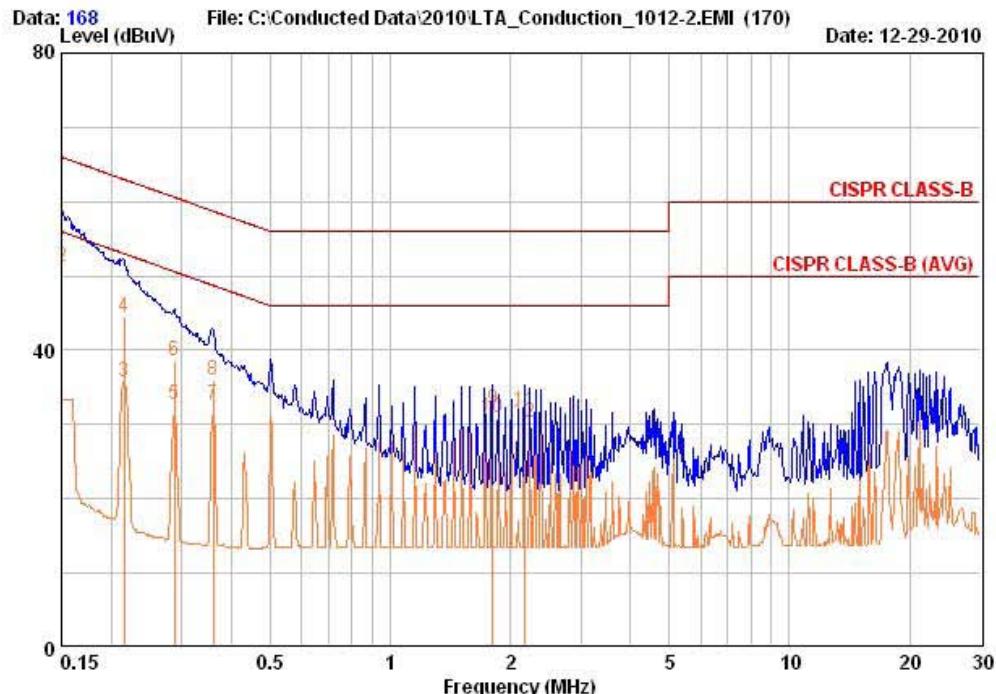

Freq MHz	RD QP	RD AV	C. F dB	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.150	41.45	24.15	9.67	51.12	33.82	66.00	56.00	14.88	22.18
0.215	34.86	26.16	9.64	44.50	35.80	63.01	53.01	18.51	17.21
0.288	28.96	22.96	9.65	38.61	32.61	60.58	50.58	21.97	17.97
0.360	26.25	23.05	9.65	35.90	32.70	58.73	48.73	22.82	16.02
1.805	22.42	21.32	9.68	32.10	31.00	56.00	46.00	23.90	15.00
2.167	22.21	20.51	9.68	31.90	30.20	56.00	46.00	24.10	15.80

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

## APPENDIX

### TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Spectrum Analyzer	FSV-30	100757	R&S	1 year	2010-02-01
2	Spectrum Analyzer	8563E	3425A02505	HP	1 year	2010-03-29
3	Spectrum Analyzer	8594E	3710A04074	HP	2 year	2009-10-12
4	Signal Generator	8648C	3623A02597	HP	1 year	2010-03-30
5	Signal Generator	83711B	US34490456	HP	1 year	2010-03-30
6	Attenuator (3dB)	8491A	37822	HP	1 year	2010-10-08
7	Attenuator (10dB)	8491A	63196	HP	1 year	2010-10-08
8	EMI Test Receiver	ESCI7	100722	R&S	1 year	2010-10-08
9	Horn Antenna(18 ~ 40GHz)	SAS-574	154	Schwarzbeck	2 year	2010-11-25
10	Horn Antenna(18 ~ 40GHz)	SAS-574	155	Schwarzbeck	2 year	2010-11-25
11	RF Amplifier	8447D	2949A02670	HP	2 year	2009-10-12
12	RF Amplifier	8449B	3008A02126	HP	1 year	2010-03-29
13	Test Receiver	ESHS10	828404/009	R&S	1 year	2010-03-29
14	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	2 year	2009-04-02
15	Log Periodic Antenna	VULP 9118	9118 A 401	SCHWARZBECK	2 year	2009-04-13
16	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	2 year	2009-04-13
17	Horn Antenna	3115	00055005	ETS LINDGREN	2 year	2009-03-16
18	Horn Antenna	BBHA 9120D	9120D122	SCHWARZBECK	2 year	2010-12-24
19	Dipole Antenna	VHA9103	2116	SCHWARZBECK	2 year	2010-11-25
20	Dipole Antenna	VHA9103	2117	SCHWARZBECK	2 year	2010-11-25
21	Dipole Antenna	VHA9105	2261	SCHWARZBECK	2 year	2010-11-25
22	Dipole Antenna	VHA9105	2262	SCHWARZBECK	2 year	2010-11-25
23	Hygro-Thermograph	THB-36	0041557-01	ISUZU	1 year	2010-04-12
24	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
25	Power Divider	11636A	6243	HP	1 year	2010-10-08
26	DC Power Supply	6622A	3448A03079	HP	1 year	2010-10-08
27	Frequency Counter	5342A	2826A12411	HP	1 year	2010-03-30
28	Power Meter	EPM-441A	GB32481702	HP	1 year	2010-03-29
29	Power Sensor	8481A	US41030291	HP	1 year	2010-10-08
30	Audio Analyzer	8903B	3729A18901	HP	1 year	2010-10-08
31	Modulation Analyzer	8901B	3749A05878	HP	1 year	2010-10-08
32	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2010-10-08
33	LOOP-ANTENNA	FMZB 1516	151602/94	SCHWARZBECK	2 year	2009-03-02
34	Stop Watch	HS-3	601Q09R	CASIO	2 year	2010-03-31
35	LISN	ENV216	100408	R&S	1 year	2010-10-08
36	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	2 year	2010-05-13
37	Attenuator (30dB)	8498A	3318A10929	HP	1 year	2011-01-05