



## FCC / ISED Test Report

**For:**  
Xirgo Technologies LLC

**Model:**  
XT6384-1

**Product Description:**  
Vehicle tracking solutions with optional OBD to support a wide range of vehicle protocols

**FCC ID:** GKM-XT6384-1  
**IC:** 10281A-XT6384A

**Applied Rules and Standards:**  
47 CFR Part 15.247 (DTS)  
RSS-247 Issue 2 (DTSs) & RSS-Gen Issue 5

**REPORT #:** EMC\_XIRGO-186-22001\_FCC\_15\_247\_Rev1

**DATE:** 2022-12-22



A2LA Accredited

IC recognized #  
3462B-1

**CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [contact@cetecom.com](mailto:contact@cetecom.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571



**TABLE OF CONTENTS**

**1 ASSESSMENT ..... 3**

**2 ADMINISTRATIVE DATA ..... 4**

2.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT ..... 4

2.2 IDENTIFICATION OF THE CLIENT ..... 4

2.3 IDENTIFICATION OF THE MANUFACTURER..... 4

**3 EQUIPMENT UNDER TEST (EUT)..... 5**

3.1 EUT SPECIFICATIONS ..... 5

3.2 EUT SAMPLE DETAILS ..... 6

3.3 ACCESSORY EQUIPMENT (AE) DETAILS..... 6

3.4 TEST SAMPLE CONFIGURATION ..... 6

3.5 JUSTIFICATION FOR WORST CASE MODE OF OPERATION..... 6

**4 SUBJECT OF INVESTIGATION ..... 7**

**5 MEASUREMENT RESULTS SUMMARY ..... 7**

**6 MEASUREMENT UNCERTAINTY..... 8**

6.1 ENVIRONMENTAL CONDITIONS DURING TESTING:..... 8

6.2 DATES OF TESTING: ..... 8

**7 MEASUREMENT PROCEDURES ..... 9**

7.1 RADIATED MEASUREMENT..... 9

7.2 POWER LINE CONDUCTED MEASUREMENT PROCEDURE ..... 11

7.3 RF CONDUCTED MEASUREMENT PROCEDURE ..... 11

**8 TEST RESULT DATA ..... 12**

8.1 MAXIMUM PEAK CONDUCTED OUTPUT POWER..... 12

8.2 POWER SPECTRAL DENSITY ..... 15

8.3 DUTY CYCLE..... 18

8.4 BAND EDGE COMPLIANCE ..... 19

8.5 EMISSION BANDWIDTH 6dB AND 99% OCCUPIED BANDWIDTH..... 25

8.6 RADIATED TRANSMITTER SPURIOUS EMISSIONS AND RESTRICTED BANDS ..... 30

**9 TEST SETUP PHOTOS ..... 44**

**10 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING ..... 44**

**11 HISTORY ..... 45**



### 1 Assessment

The following device was evaluated against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and the relevant ISED Canada standard RSS-247.

No deviations were ascertained.

Company	Description	Model #
Xirgo Technologies LLC	Vehicle tracking solutions with optional OBD to support a wide range of vehicle protocols	XT6384-1

#### Responsible for Testing Laboratory:

2022-12-22	Compliance	Arndt Stoecker (Director of Regulatory Services)	
Date	Section	Name	Signature

#### Responsible for the Report:

2022-12-22	Compliance	Cheng Song (EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

## 2 Administrative Data

### 2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

<b>Company Name:</b>	CETECOM Inc.
<b>Department:</b>	Compliance
<b>Street Address:</b>	411 Dixon Landing Road
<b>City/Zip Code</b>	Milpitas, CA 95035
<b>Country</b>	USA
<b>Telephone:</b>	+1 (408) 586 6200
<b>Fax:</b>	+1 (408) 586 6299
<b>EMC Lab Manager:</b>	Arndt Stoecker
<b>Responsible Project Leader:</b>	Akanksha Baskaran

### 2.2 Identification of the Client

<b>Client's Name:</b>	Xirgo Technologies, LLC.
<b>Street Address:</b>	1461 Lawrence Dr, Ste 1
<b>City/Zip Code</b>	Thousand Oaks, CA 91320
<b>Country</b>	USA

### 2.3 Identification of the Manufacturer

<b>Manufacturer's Name:</b>	Same as Client
<b>Manufacturers Address:</b>	
<b>City/Zip Code</b>	
<b>Country</b>	



### 3 Equipment Under Test (EUT)

#### 3.1 EUT Specifications

<b>Model No:</b>	XT6384-1
<b>HW Version :</b>	XT6384-1-001
<b>SW Version :</b>	XT6384-1-01
<b>FCC-ID :</b>	GKM-XT6384-1
<b>IC:</b>	10281A-XT6384A
<b>PMN:</b>	XT6384-1
<b>Product Description:</b>	Vehicle tracking solutions with optional OBD to support a wide range of vehicle protocols
<b>Radio Information:</b>	<b><u>Bluetooth Low Energy (BLE):</u></b> <ul style="list-style-type: none"> <li>• Module: Nordic nRF52810</li> <li>• Modulation: Bluetooth 5.0, GFSK</li> </ul>
<b>Antenna Information:</b>	SMT Taoglas Max Gain 1.5 dBi
<b>Power Supply/ Rated Operating Voltage Range:</b>	Vmin: 8.0 VDC/ Vnom: 12 VDC / Vmax: 24 VDC
<b>Operating Temperature Range</b>	-30 °C to 70 °C
<b>Sample Revision</b>	<input type="checkbox"/> Prototype Unit; <input type="checkbox"/> Production Unit; <input checked="" type="checkbox"/> Pre-Production

### 3.2 EUT Sample details

EUT #	Model Number	HW Version	SW Version	Notes/Comments
1	XT6384-1	XT6384-1-001	XT6384-1-01	Conducted RF
2	XT6384-1	XT6384-1-001	XT6384-1-01	Radiated Emissions

### 3.3 Accessory Equipment (AE) details

AE #	Type	Model	Manufacturer	Serial Number
1				

### 3.4 Test Sample Configuration

EUT Set-up #	Combination of AE used for test set up	Comments
1	EUT#1	The radio of the EUT was configured to a fixed channel transmission with highest possible duty cycle using software that is not available to the end user. The measurement equipment was connected to the 50 ohm RF port of the EUT.
2	EUT#2	The radio of the EUT was configured to a fixed channel transmission with highest possible duty cycle using software that is not available to the end user. The internal antenna was connected.

### 3.5 Justification for Worst Case Mode of Operation

During the testing process, the EUT was tested with transmitter sets on low, mid and high channels, and highest possible duty cycle. For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

#### 4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the performance of the EUT according to the relevant requirements specified in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 of ISED Canada.

#### 5 Measurement Results Summary

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	NA	NP	Result
§15.247(a)(1) RSS-247 5.2(a)	Emission Bandwidth	Nominal	BTLE	■	□	□	Complies
§15.247(e) RSS-247 5.2(b)	Power Spectral Density	Nominal	BTLE	■	□	□	Complies
§15.247(b)(1) RSS-247 5.4(d)	Maximum Conducted Output Power and EIRP	Nominal	BTLE	■	□	□	Complies
§15.247(d) RSS-247 5.5	Band edge compliance Unrestricted Band Edges	Nominal	BTLE	■	□	□	Complies
§15.247; 15.209; 15.205 RSS-Gen 8.9; 8.10	Band edge compliance Restricted Band Edges	Nominal	BTLE	■	□	□	Complies
§15.247(d); §15.209 RSS-Gen 6.13	TX Spurious emissions- Radiated	Nominal	BTLE	■	□	□	Complies
§15.207(a) RSS Gen 8.8	AC Conducted Emissions	Nominal		□	■	□	Note 2

**Note 1:** NA= Not Applicable; NP= Not Performed.

**Note 2:** EUT powered by external DC power supply.

## 6 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=2.

<b>Measurement System</b>	<b>EMC 1</b>	<b>EMC 2</b>
Conducted Emissions (mains port)	1.12 dB	0.46 dB
Radiated Emissions (<30 MHz)	3.66 dB	3.88 dB
(30 MHz – 1 GHz)	3.17 dB	3.34 dB
(1 GHz – 3 GHz)	5.01 dB	4.45 dB
(> 3 GHz)	4.0 dB	4.79 dB

### 6.1 Environmental Conditions During Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25° C
- Relative humidity: 40-60%

### 6.2 Dates of Testing:

11/16/2022 – 11/18/2022




## 7 Measurement Procedures


### 7.1 Radiated Measurement

The radiated measurement is performed according to ANSI C63.10 (2013)


- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.

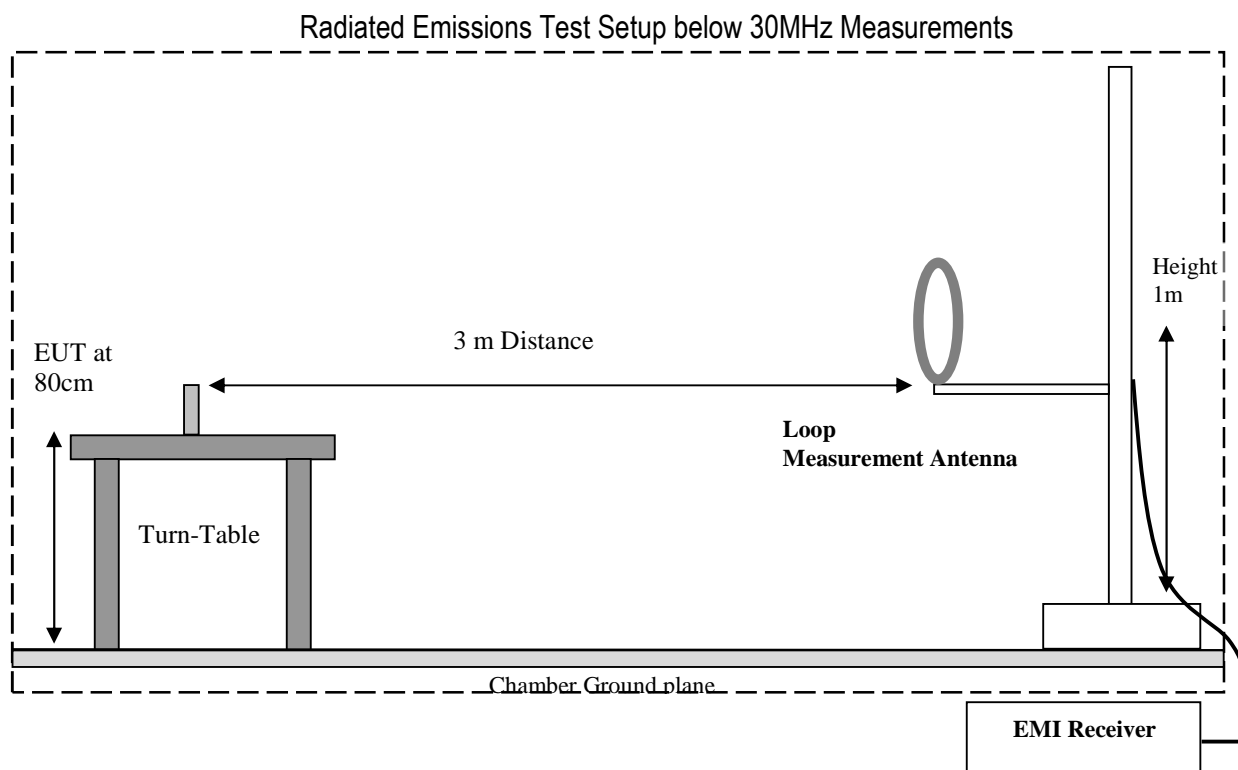

### Radiated Emissions Test Setup 30MHz-1GHz Measurements

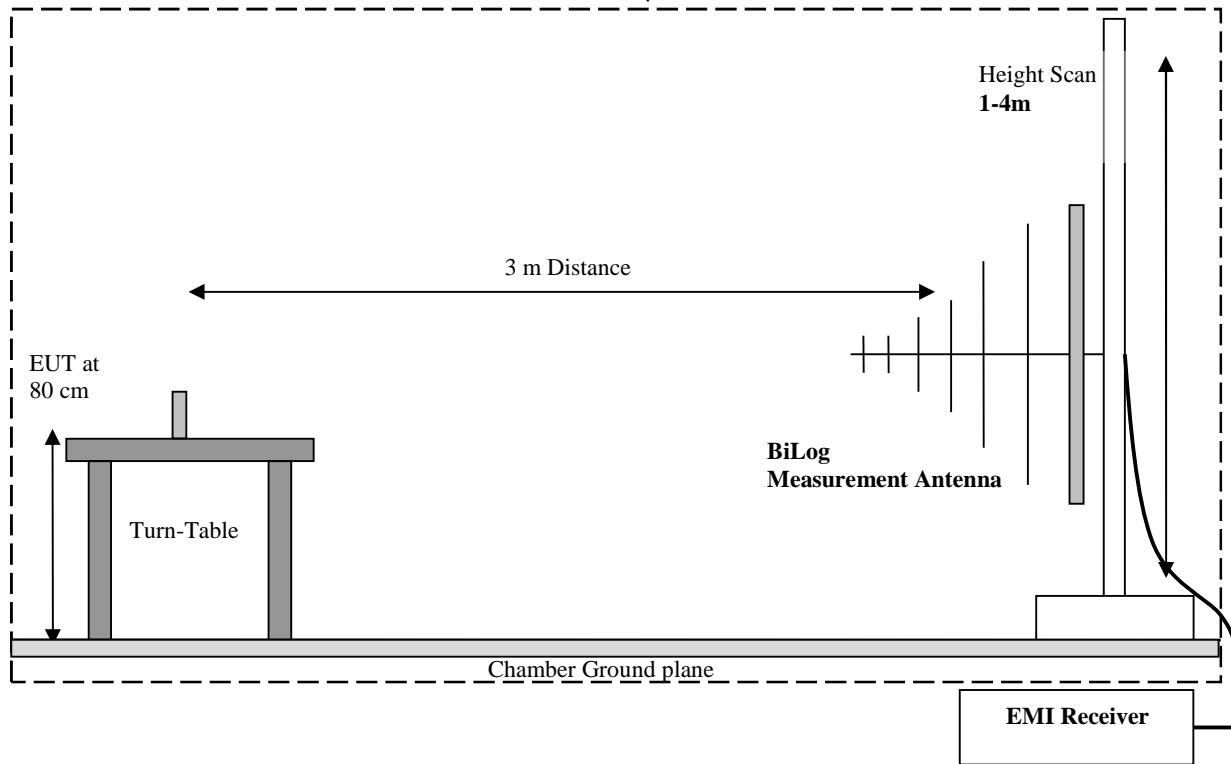

### Radiated Emissions Test Setup above 1GHz Measurements

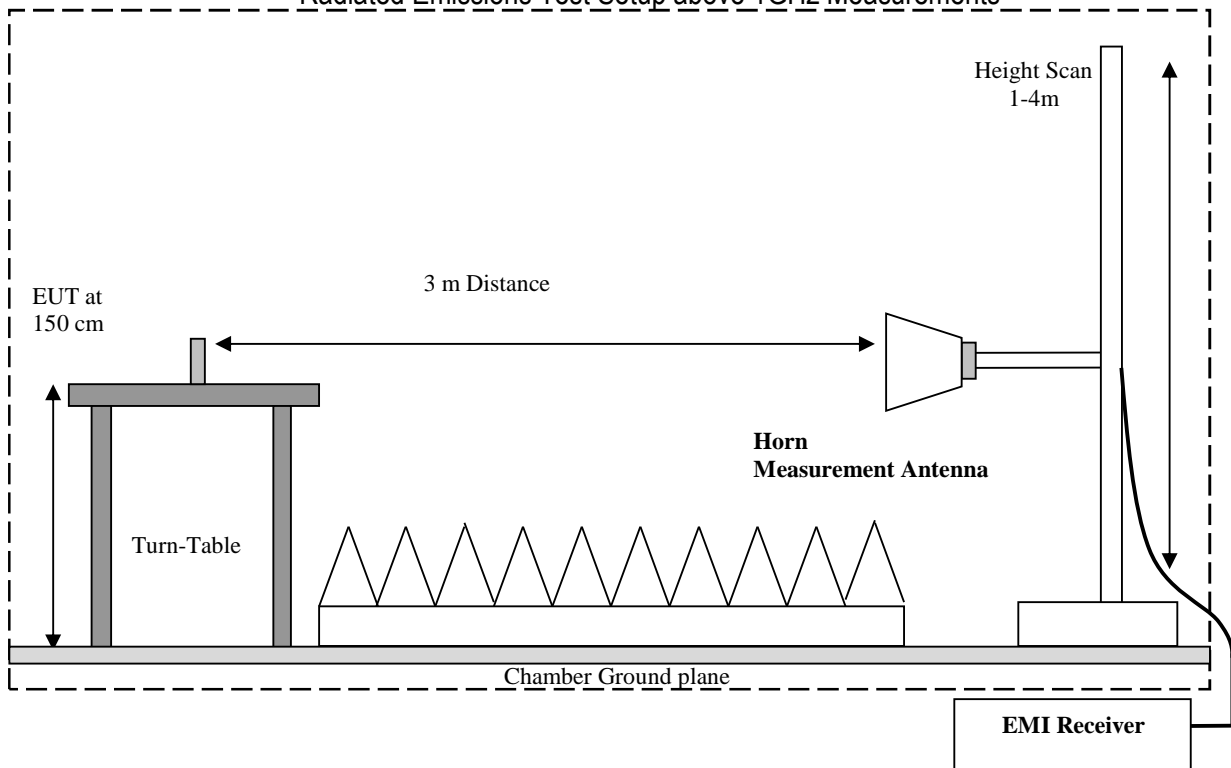

### 7.1.1 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dBμV
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:


Frequency (MHz)	Measured SA (dBμV)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dBμV/m)
1000	80.5	3.5	14	98.0

### 7.2 Power Line Conducted Measurement Procedure

AC Power Line conducted emissions measurements performed according to: ANSI C63.4 (2014)

### 7.3 RF Conducted Measurement Procedure

Testing procedures are based on 558074 D01 15.247 Meas Guidance v05r02 – “GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES” - April 2, 2019, by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.



- Connect the equipment as shown in the above diagram.
- Adjust the settings of the SA (Rohde-Schwarz Spectrum Analyzer) to connect the EUT at the required mode of test.
- Measurements are to be performed with the EUT set to the low, middle and high channels and for worst case modulation schemes.

## 8 Test Result Data

### 8.1 Maximum Peak Conducted Output Power

#### 8.1.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

##### Spectrum Analyzer settings:

- RBW  $\geq$  DTS bandwidth
- VBW  $\geq$  3 x RBW
- Span  $\geq$  3 x RBW
- Sweep = Auto couple
- Detector function = Peak
- Trace = Max hold
- Use peak marker function to determine the peak amplitude level

#### 8.1.2 Limits:

##### Maximum Peak Output Power:

- FCC §15.247 (b)(1): 1 W
- IC RSS-247: 1 W


#### 8.1.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain
22° C	1	GFSK continuous fixed channel	12 VDC	1.5 dBi

#### 8.1.4 Measurement result:

Plot #	Frequency (MHz)	PHY	Maximum Peak Conducted Output Power (dBm)	EIRP (dBm)	Limit (dBm)	Result
1	2402	LE 1M	5.61	7.11	30 (Pk) / 36 (EIRP)	Pass
2	2440	LE 1M	5.65	7.15	30 (Pk) / 36 (EIRP)	Pass
3	2480	LE 1M	5.73	7.33	30 (Pk) / 36 (EIRP)	Pass
4	2402	LE 2M	5.69	7.19	30 (Pk) / 36 (EIRP)	Pass
5	2440	LE 2M	5.71	7.21	30 (Pk) / 36 (EIRP)	Pass
6	2480	LE 2M	5.78	7.28	30 (Pk) / 36 (EIRP)	Pass


### 8.1.5 Measurement Plots:

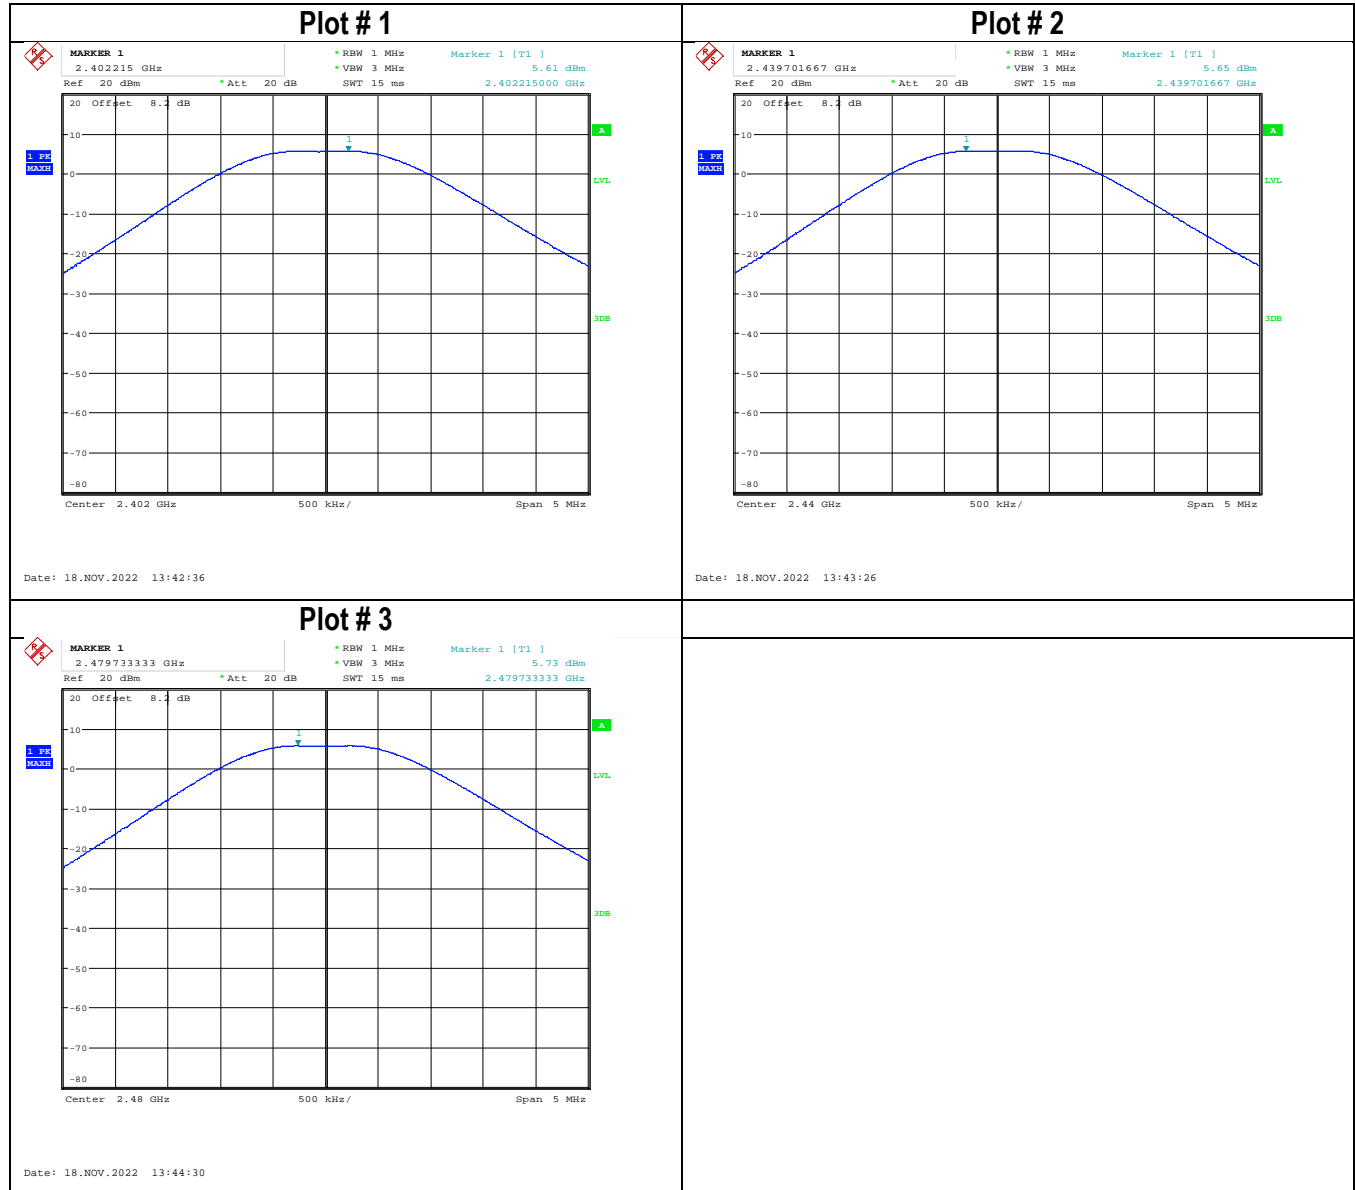



Plot # 4


MARKER 1  
2.402243333 GHz  
Ref 20 dBm  
Att 20 dB  
RBW 2 MHz  
VBW 10 MHz  
SWT 15 ms  
Marker 1 [T1]  
5.69 dBm  
2.402243333 GHz

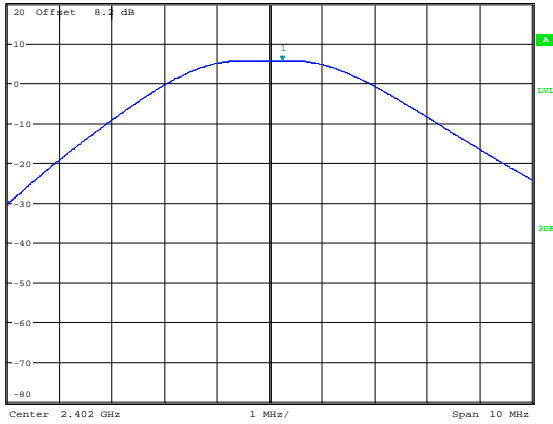

Date: 18.NOV.2022 13:46:37

Plot # 5


MARKER 1  
2.44037 GHz  
Ref 20 dBm  
Att 20 dB  
RBW 2 MHz  
VBW 10 MHz  
SWT 15 ms  
Marker 1 [T1]  
5.71 dBm  
2.440370000 GHz

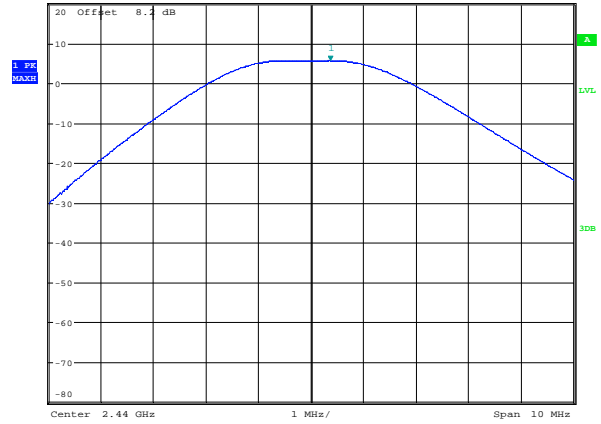

Date: 18.NOV.2022 13:46:03

Plot # 6

MARKER 1  
2.48029 GHz  
Ref 20 dBm  
Att 20 dB  
RBW 2 MHz  
VBW 10 MHz  
SWT 15 ms  
Marker 1 [T1]  
5.78 dBm  
2.480290000 GHz

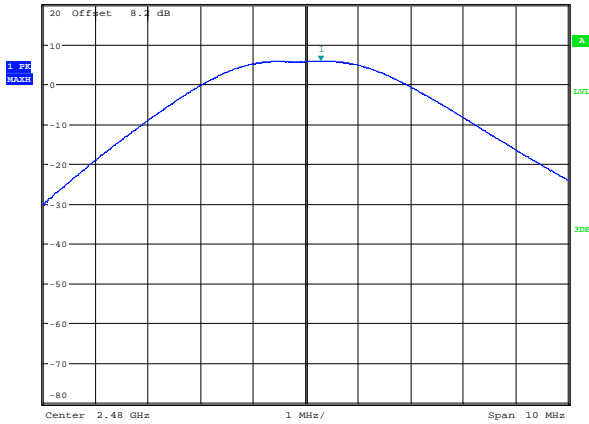

Date: 18.NOV.2022 13:45:29



## 8.2 Power Spectral Density

### 8.2.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

#### Spectrum Analyzer settings for Peak PSD method:

- Set analyzer center frequency to DTS channel center frequency
- Set the span to 1.5 x DTS bandwidth
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- Set the VBW  $\geq 3 \times \text{RBW}$
- Detector = Peak
- Sweep time = Auto couple
- Trace mode = Max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level within the RBW
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

### 8.2.2 Limits:

#### FCC§15.247(e) & RSS-247 5.2(b)

- For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### 8.2.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain
22° C	1	GFSK continuous fixed channel	12 VDC	1.5 dBi

### 8.2.4 Measurement result:

Plot #	Frequency (MHz)	PHY	Maximum Power Spectral Density (dBm/3 kHz)	Limit ( dBm / 3 kHz )	Result
1	2402	LE 1M	-8.71	8	Pass
2	2440	LE 1M	-8.60	8	Pass
3	2480	LE 1M	-8.51	8	Pass
4	2402	LE 2M	-10.59	8	Pass
5	2440	LE 2M	-10.68	8	Pass
6	2480	LE 2M	-10.62	8	Pass


### 8.2.5 Measurement Plots:

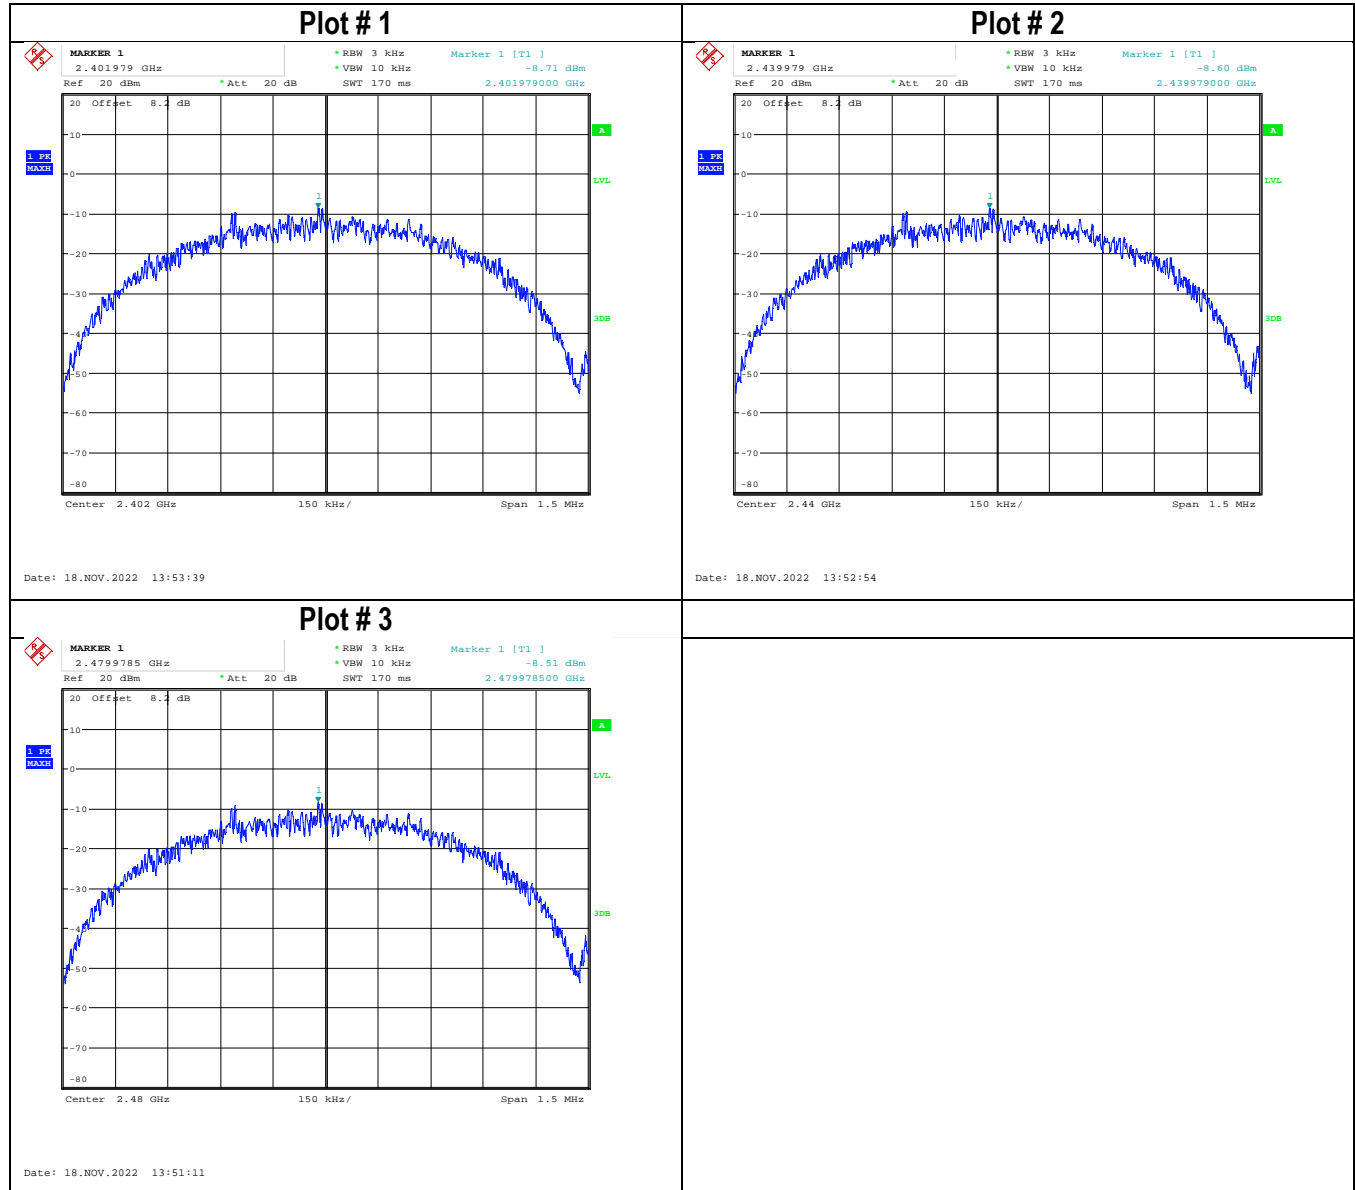






Plot # 4

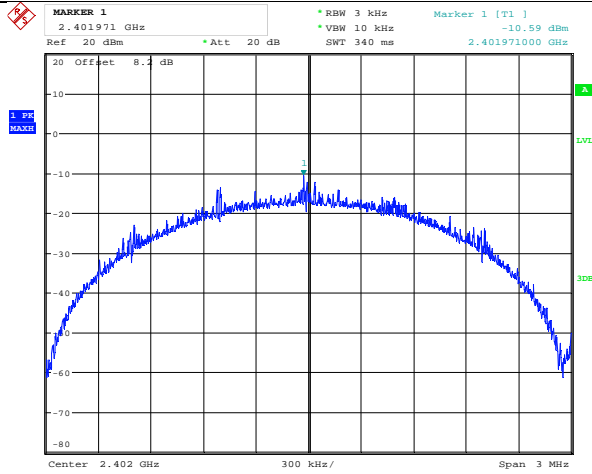


Date: 18.NOV.2022 13:47:25

Plot # 5

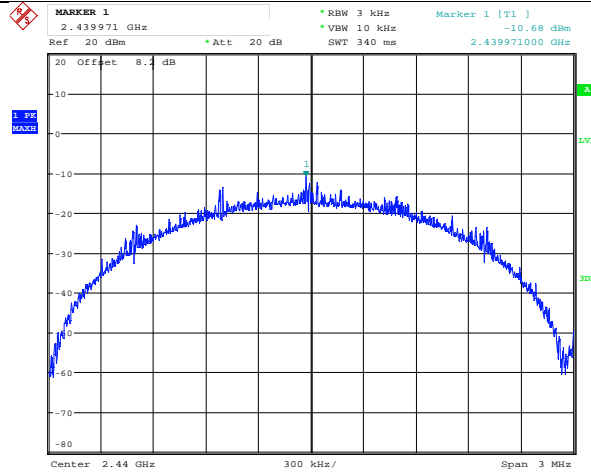

Date: 18.NOV.2022 13:48:02

Plot # 6

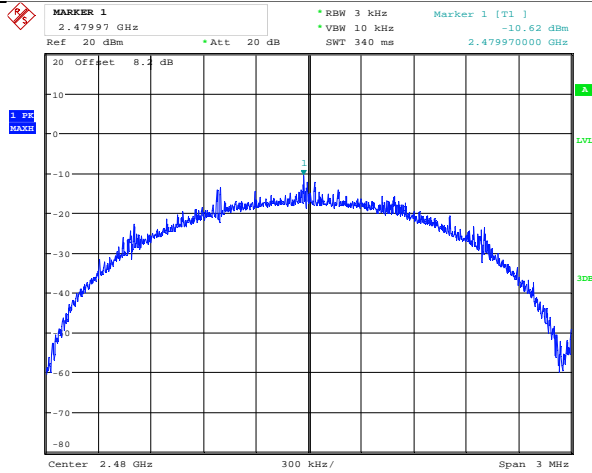

Date: 18.NOV.2022 13:48:50


### 8.3 Duty cycle

#### 8.3.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

##### Spectrum Analyzer settings:

- Set the center frequency and of the instrument to the center frequency of the transmission
- Zero span
- Set RBW >=OBW if possible; otherwise, set RBW to the largest available value
- Detector = Peak or average

#### 8.3.2 Measurement result

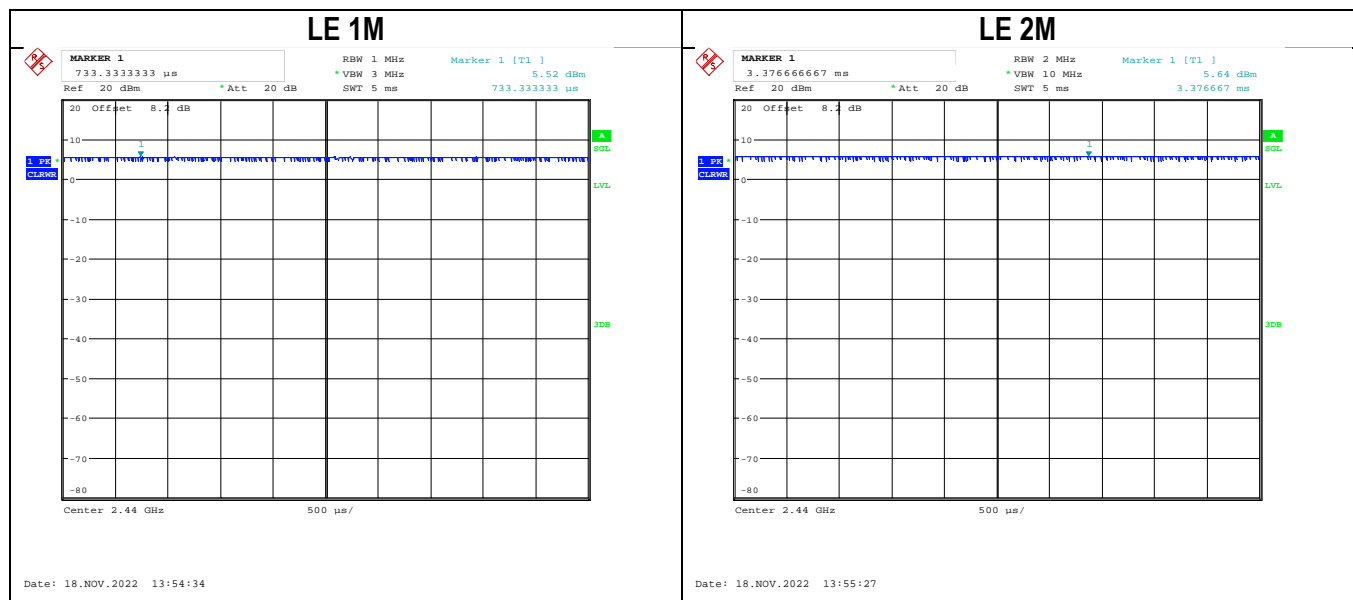

Duty cycle = 100%

Duty cycle correction factor =  $10 \cdot \log(1/1) = 0$  dB

## 8.4 Band Edge Compliance

### 8.4.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

#### Spectrum Analyzer settings for band edge:

- Set the center frequency and span to encompass frequency range to be measured
- RBW = 100 kHz
- VBW  $\geq 3 \times$  RBW
- Sweep Time: Auto couple
- Detector = Peak
- Trace = Max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level
- Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge

### 8.4.2 Limits non restricted band:

#### FCC§15.247 (d)

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### RSS-247 5/5

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB.

#### Spectrum Analyzer settings for restricted band:

- Peak measurements are made using a peak detector and RBW=1 MHz

**8.4.3 Limits restricted band §15.247/15.209/15.205 and RSS-Gen 8.9/8.10**

- \*PEAK LIMIT= 74 dBµV/m @3m =-21.23 dBm
- \*AVG. LIMIT= 54 dBµV/m @3m =-41.23 dBm
- Start frequency & stop frequency according to frequency range specified in the restricted band table in FCC section 15.205 & RSS-Gen 8.10
- Measurements with a peak detector were used to show compliance to average limits, thus showing compliance to both peak and average limits.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

**8.4.4 Test conditions and setup:**

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain
22° C	1	GFSK continuous fixed channel	12 VDC	1.5 dBi

**8.4.5 Measurement result:**

Plot #	EUT operating mode	PHY	Band Edge	Band Edge Delta (dBc)	Limit (dBc)	Result
1	GFSK continuous fixed channel	LE 1M	Lower, Non-restricted	-53.72	-20	Pass
2	GFSK continuous fixed channel	LE 2M	Lower, Non-restricted	-31.75	-20	Pass


**Note:** Conducted method is used for Non-restricted Band Edge measurement.

Plot #	EUT operating mode	PHY	Band Edge	Measured Peak Value (dBµV/m)	Limit (dBµV/m)	Result
3	GFSK continuous fixed channel	LE 1M	Upper Restricted Peak	38.64	74 Peak	Pass
	GFSK continuous fixed channel	LE 1M	Upper Restricted AVG	26.02	54 AVG	Pass
4	GFSK continuous fixed channel	LE 2M	Upper Restricted Peak	50.86	74 Peak	Pass
	GFSK continuous fixed channel	LE 2M	Upper Restricted AVG	38.16	54 AVG	Pass

**Note:** Radiated method is used for Restricted Band Edge measurement.




### 8.4.6 Measurement Plots:

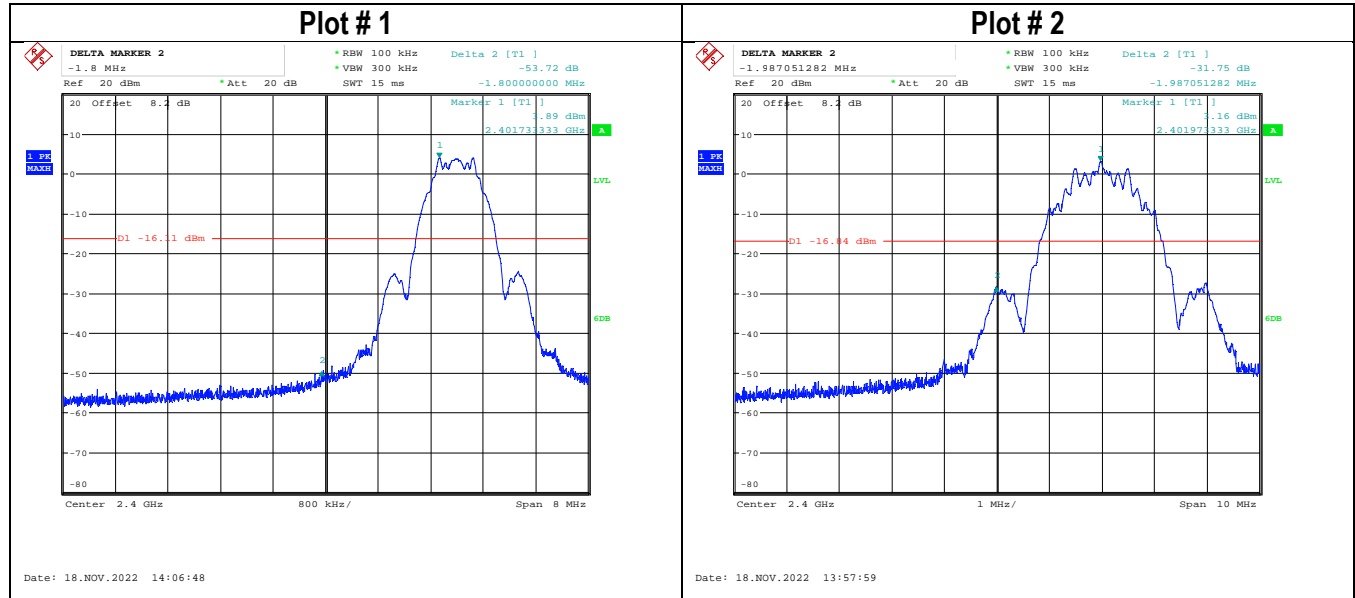



**Plot # 3**

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2495.67	---	26.02	54.00	27.98	500.0	1000.0	125.0	H	286.0	6.5
2495.67	38.64	---	74.00	35.36	500.0	1000.0	125.0	H	286.0	6.5

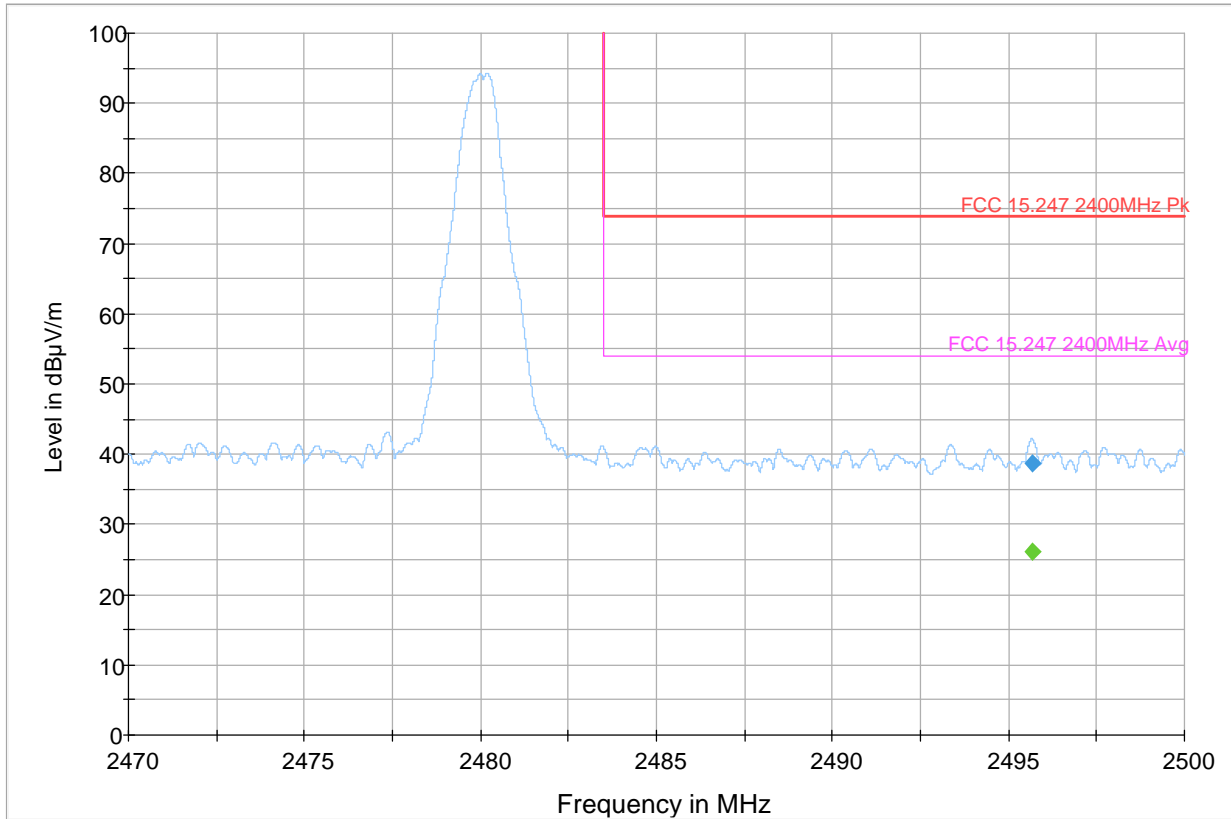


— Preview Result 2-AVG     
 — Preview Result 1-PK+     
 — FCC 15.247 2400MHz Pk  
— FCC 15.247 2400MHz Avg     
 ◆ Final\_Result PK+     
 ◆ Final\_Result CAV



**Plot # 4**

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.57	---	38.16	54.00	15.84	500.0	1000.0	116.0	H	117.0	6.4
2483.57	50.86	---	74.00	23.14	500.0	1000.0	116.0	H	117.0	6.4

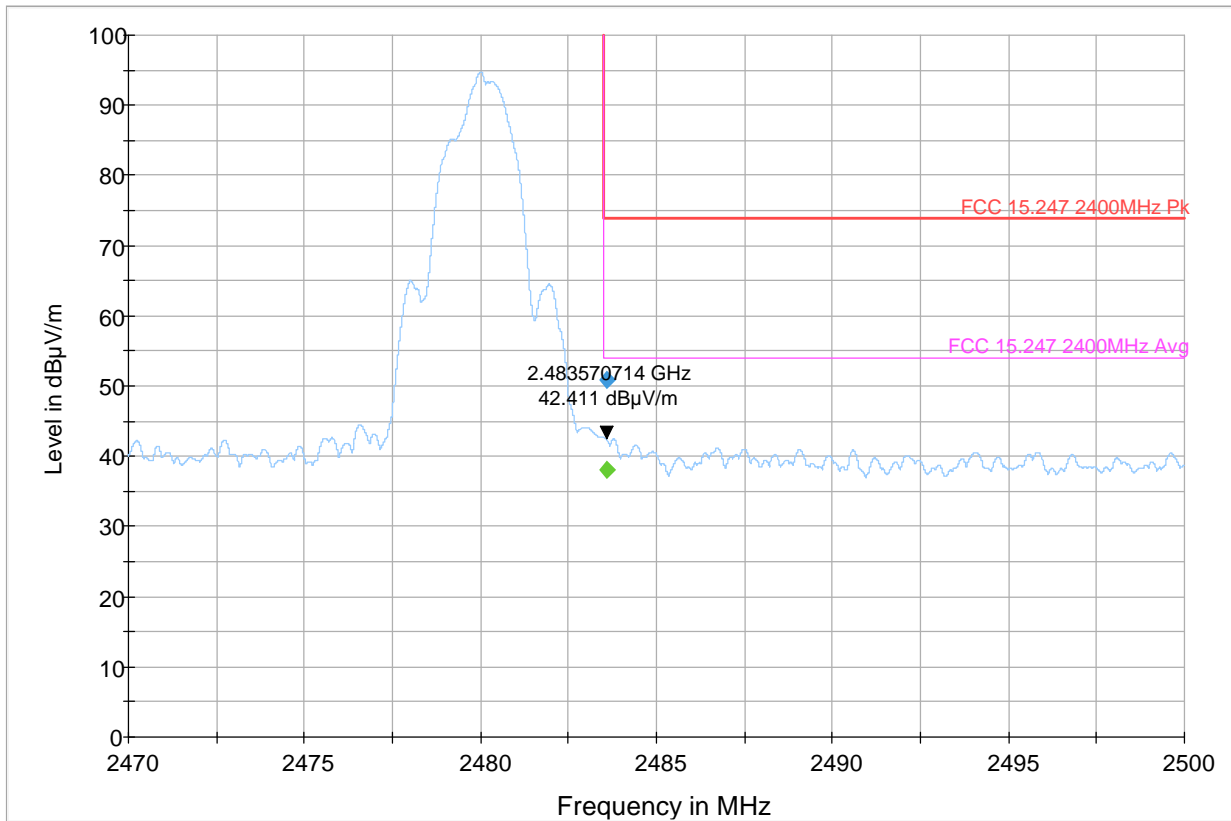

- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC 15.247 2400MHz Avg
- Final\_Result PK+
- FCC 15.247 2400MHz Pk
- Final\_Result CAV



## 8.5 Emission Bandwidth 6dB and 99% Occupied Bandwidth

### 8.5.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

#### Spectrum Analyzer settings:

##### 6dB (DTS) Bandwidth:

- Set RBW = 100 kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep = Auto couple
- Allow the trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

##### 99% Occupied Bandwidth:

- Set frequency = nominal EUT channel center frequency
- Set Span = 1.5 x to 5.0 x OBW
- Set RBW = 1% to 5% of OBW
- Set the video bandwidth (VBW)  $\approx 3 \times$  RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep = Auto couple
- Allow the trace to stabilize
- Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth
- If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

### 8.5.2 Limits:

#### FCC §15.247(a)(2) and RSS-247 5.2(a)

- Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.5.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
22° C	1	GFSK continuous fixed channel	12 VDC


### 8.5.4 Measurement result:

Plot #	Frequency (MHz)	PHY	6dB Emissions Bandwidth (MHz)	Limit (MHz)	Result
1	2402	LE 1M	0.735	> 0.5	Pass
2	2440	LE 1M	0.732	> 0.5	Pass
3	2480	LE 1M	0.740	> 0.5	Pass
4	2402	LE 2M	1.170	> 0.5	Pass
5	2440	LE 2M	1.177	> 0.5	Pass
6	2480	LE 2M	1.173	> 0.5	Pass

Plot #	Frequency (MHz)	PHY	99% Occupied Bandwidth (MHz)	Limit (MHz)	Result
7	2402	LE 1M	1.055	NA	Pass
8	2440	LE 1M	1.060	NA	Pass
9	2480	LE 1M	1.062	NA	Pass
10	2402	LE 2M	2.077	NA	Pass
11	2440	LE 2M	2.080	NA	Pass
12	2480	LE 2M	2.083	NA	Pass




### 8.5.5 Measurement Plots:

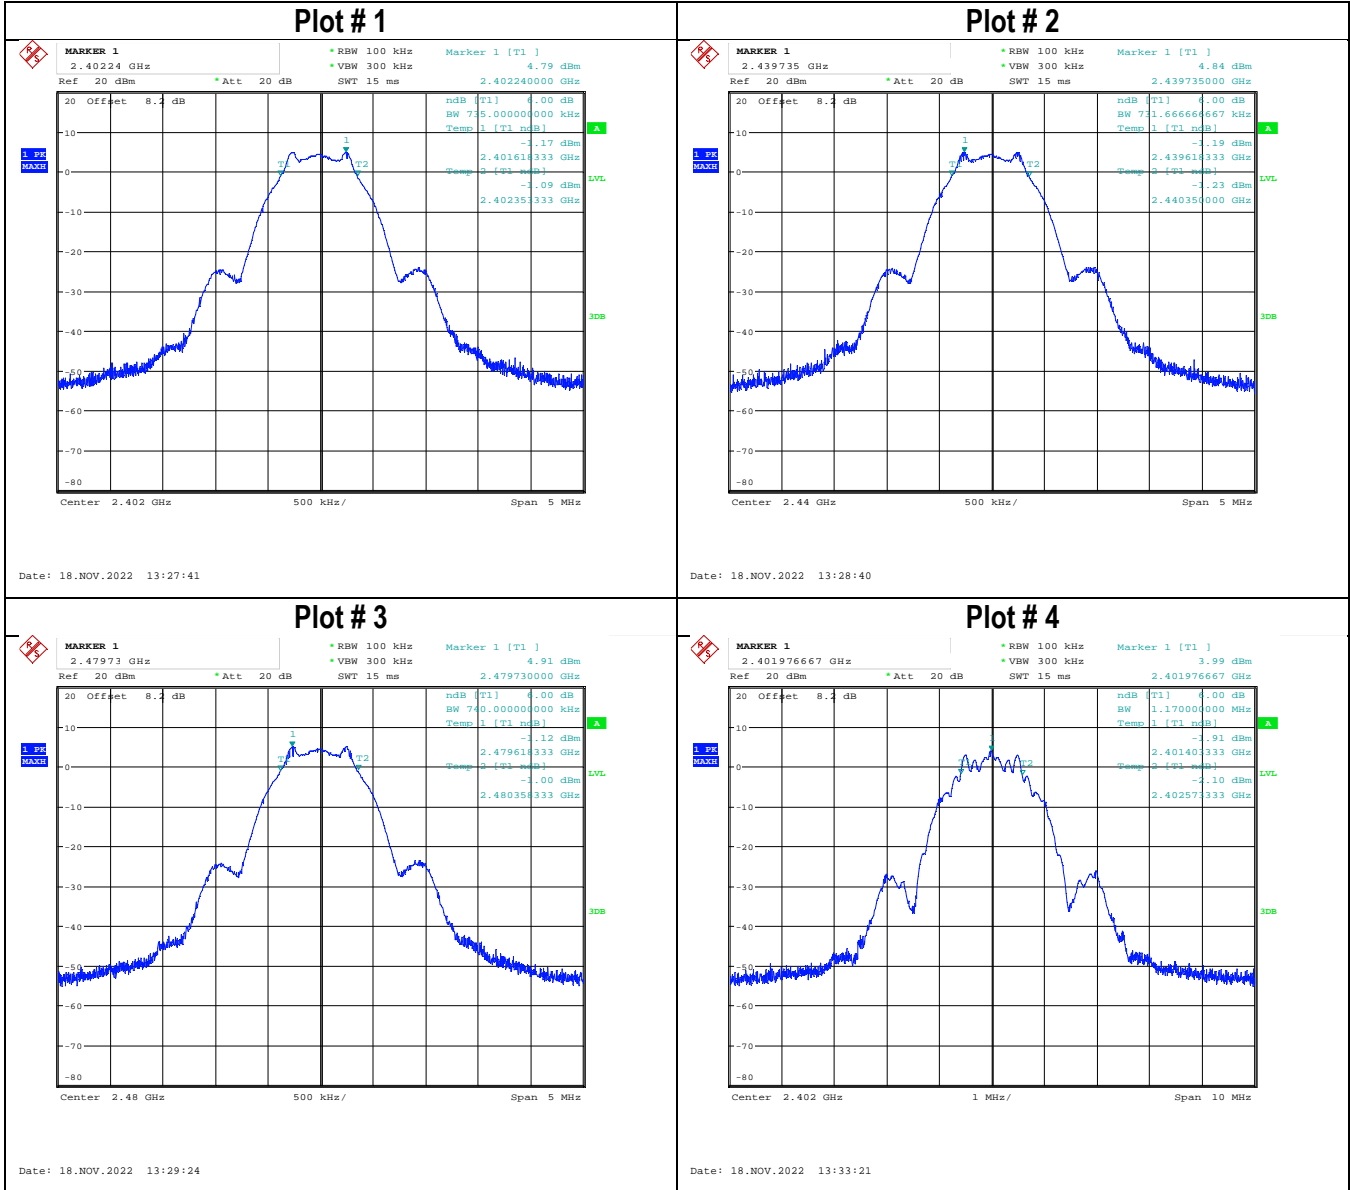




**Plot # 5**

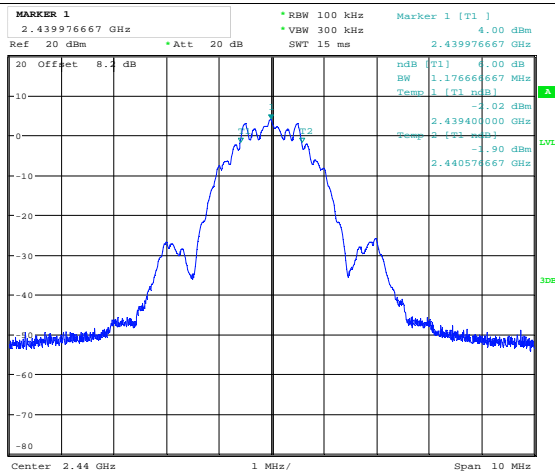


Date: 18.NOV.2022 13:32:32

**Plot # 6**

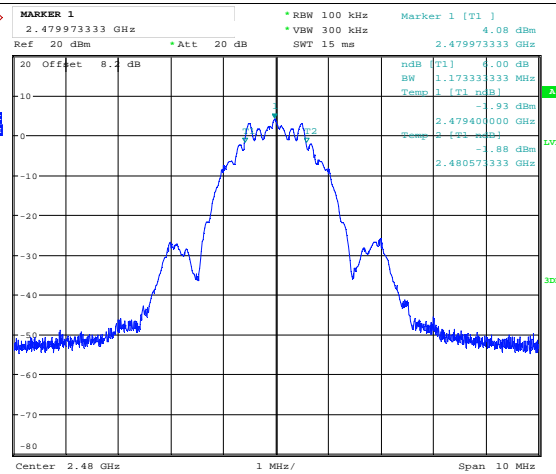


Date: 18.NOV.2022 13:30:29

**Plot # 7**

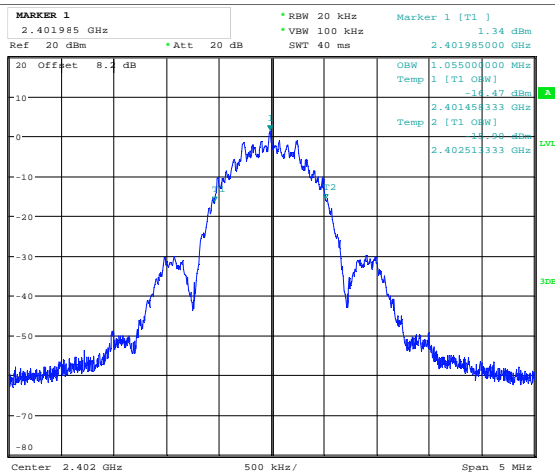

Date: 18.NOV.2022 13:41:45


**Plot # 8**

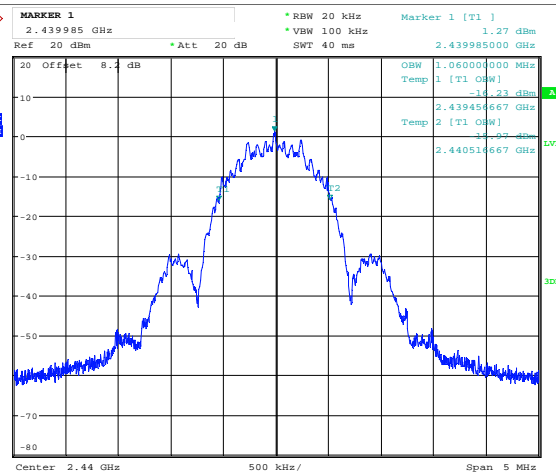

Date: 18.NOV.2022 13:40:49




Plot # 9

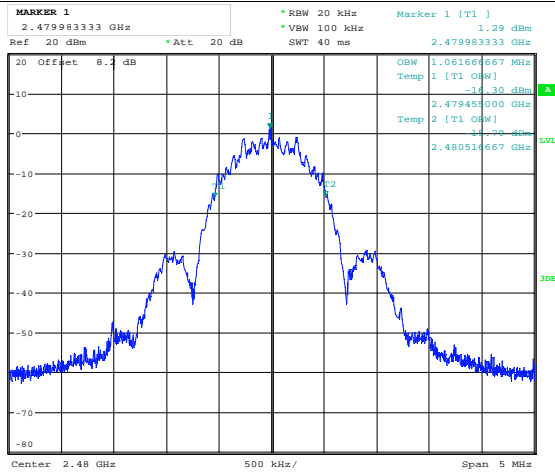


Date: 18.NOV.2022 13:39:54

Plot # 10

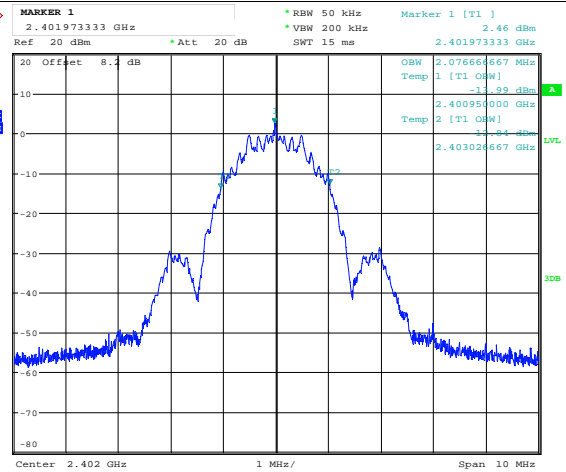


Date: 18.NOV.2022 13:35:34

Plot # 11

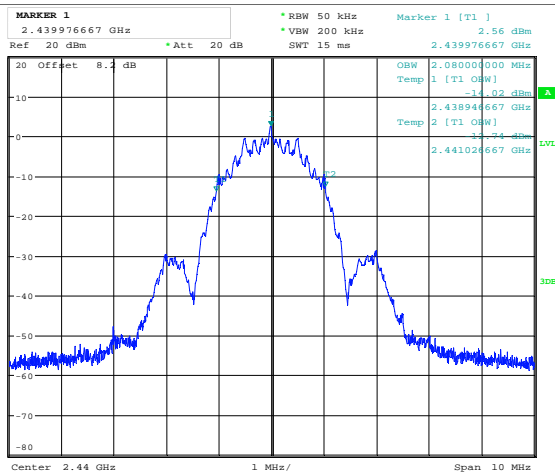

Date: 18.NOV.2022 13:36:25

Plot # 12

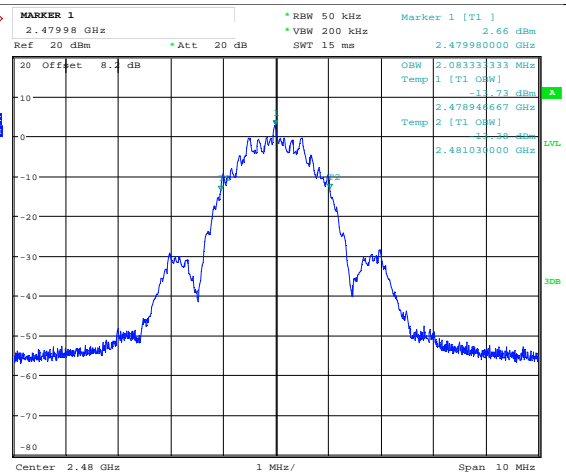

Date: 18.NOV.2022 13:38:10

## 8.6 Radiated Transmitter Spurious Emissions and Restricted Bands

### 8.6.1 Measurement according to ANSI C63.10 (2013)

#### Spectrum Analyzer Settings:

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector: Peak
  
- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW= 120 KHz (<1GHz)
  
- Frequency > 1 GHz
- Detector = Peak / Average
- RBW = 1 MHz
  
- Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements.
- The highest (or worst-case) data rate shall be recorded for each measurement.
- For testing frequencies below 30 MHz at distance other than the specified in the standard, the limit conversion is calculated by using the FCC materials for the ANSI 63 committee issued on January, 27 1991.

### 8.6.2 Limits:

#### FCC §15.247

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



FCC §15.209 & RSS-Gen 8.9

- Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency of emission (MHz)	Field strength (µV/m)	Measurement Distance (m)	Field strength @ 3m (dBµV/m)
0.009–0.490	2400/F(kHz) / -----	300	-
0.490–1.705	24000/F(kHz) / -----	30	-
1.705–30.0	30 / (29.5)	30	-
30–88	100	3	40 dBµV/m
88–216	150	3	43.5 dBµV/m
216–960	200	3	46 dBµV/m
Above 960	500	3	54 dBµV/m

FCC §15.205 & RSS-Gen 8.10

- Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
  - \*PEAK LIMIT= 74 dBµV/m
  - \*AVG. LIMIT= 54 dBµV/m

### 8.6.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
22° C	2	GFSK continuous fixed channel LE 1M	12 VDC

### 8.6.4 Measurement result:


Plot #	Channel #	Scan Frequency	Limit	Result
1-3	Low	30 MHz – 18 GHz	See section 8.6.2	Pass
4-8	Mid	9 kHz – 26 GHz	See section 8.6.2	Pass
9-11	High	30 MHz – 18 GHz	See section 8.6.2	Pass



### 8.6.5 Measurement Plots:

Plot # 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.26	26.83	40.00	13.17	500.0	120.0	175.0	H	162.0	23.7
105.66	36.03	43.50	7.47	500.0	120.0	221.0	V	90.0	21.9
153.60	28.43	43.50	15.07	500.0	120.0	107.0	V	11.0	25.8
159.25	24.23	43.50	19.27	500.0	120.0	117.0	V	267.0	26.3
170.63	33.36	43.50	10.14	500.0	120.0	100.0	V	26.0	24.8
902.90	26.89	46.02	19.13	500.0	120.0	261.0	V	295.0	31.5

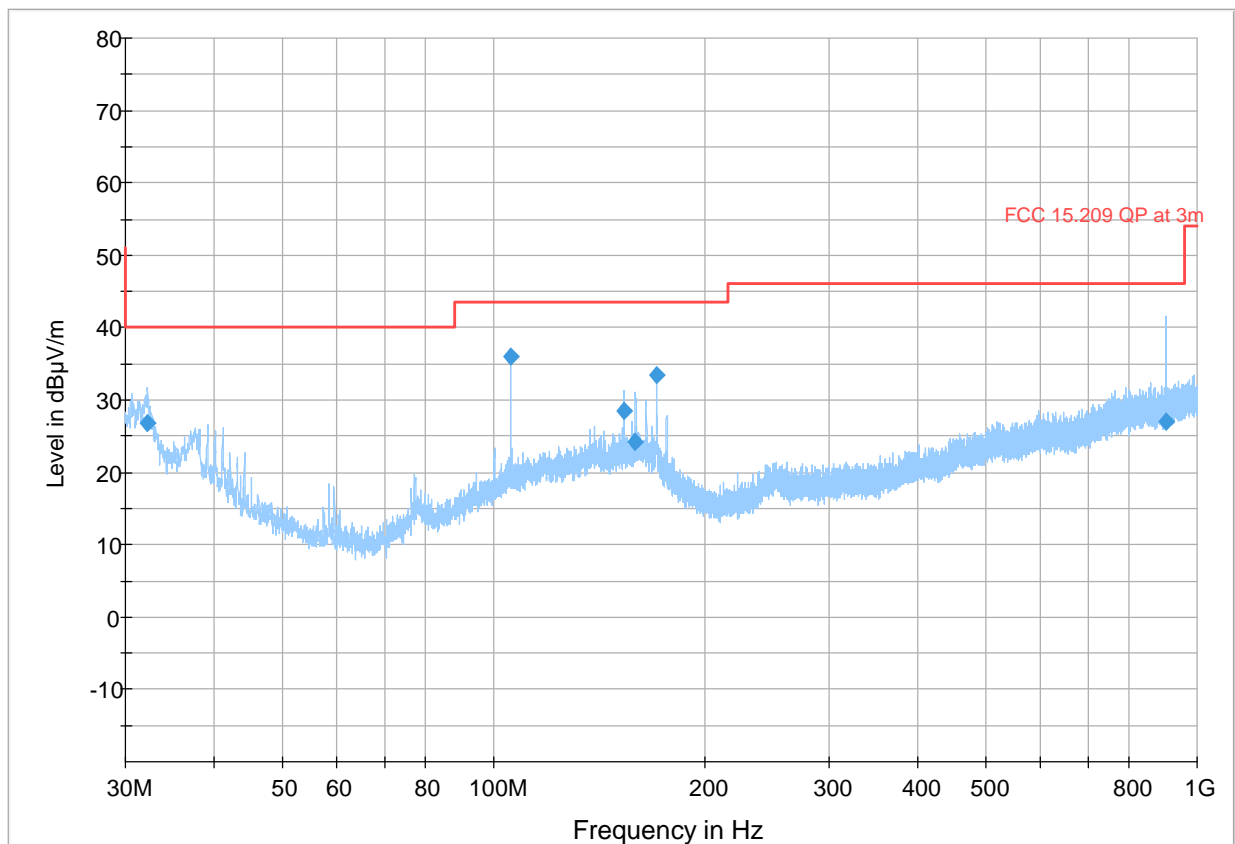

Preview Result 2-AVG    Preview Result 1-PK+    FCC 15.209 QP at 3m    Final\_Result

**Plot # 2**

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2839.43	---	27.98	53.98	26.00	500.0	1000.0	268.0	H	8.0	7.8
2839.43	40.54	---	73.98	33.43	500.0	1000.0	268.0	H	8.0	7.8

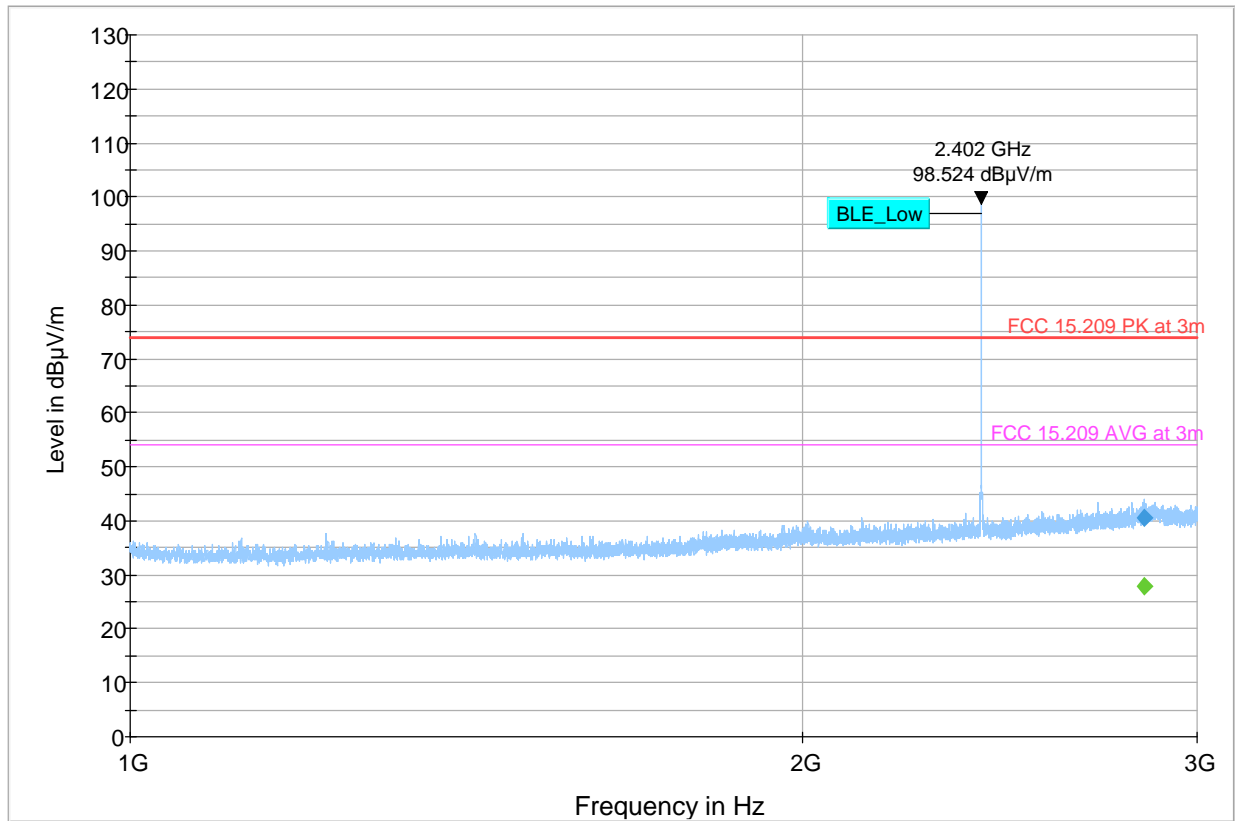


- Preview Result 2-AVG
- FCC 15.209 AVG at 3m
- Preview Result 1-PK+
- Final\_Result PK+
- FCC 15.209 PK at 3m
- Final\_Result CAV



**Plot # 3**


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.75	54.49	---	73.98	19.49	500.0	1000.0	107.0	V	49.0	-0.6
7205.75	---	50.71	53.98	3.27	500.0	1000.0	107.0	V	49.0	-0.6
17755.25	51.98	---	73.98	22.00	500.0	1000.0	268.0	H	132.0	16.7
17755.25	---	39.89	53.98	14.09	500.0	1000.0	268.0	H	132.0	16.7

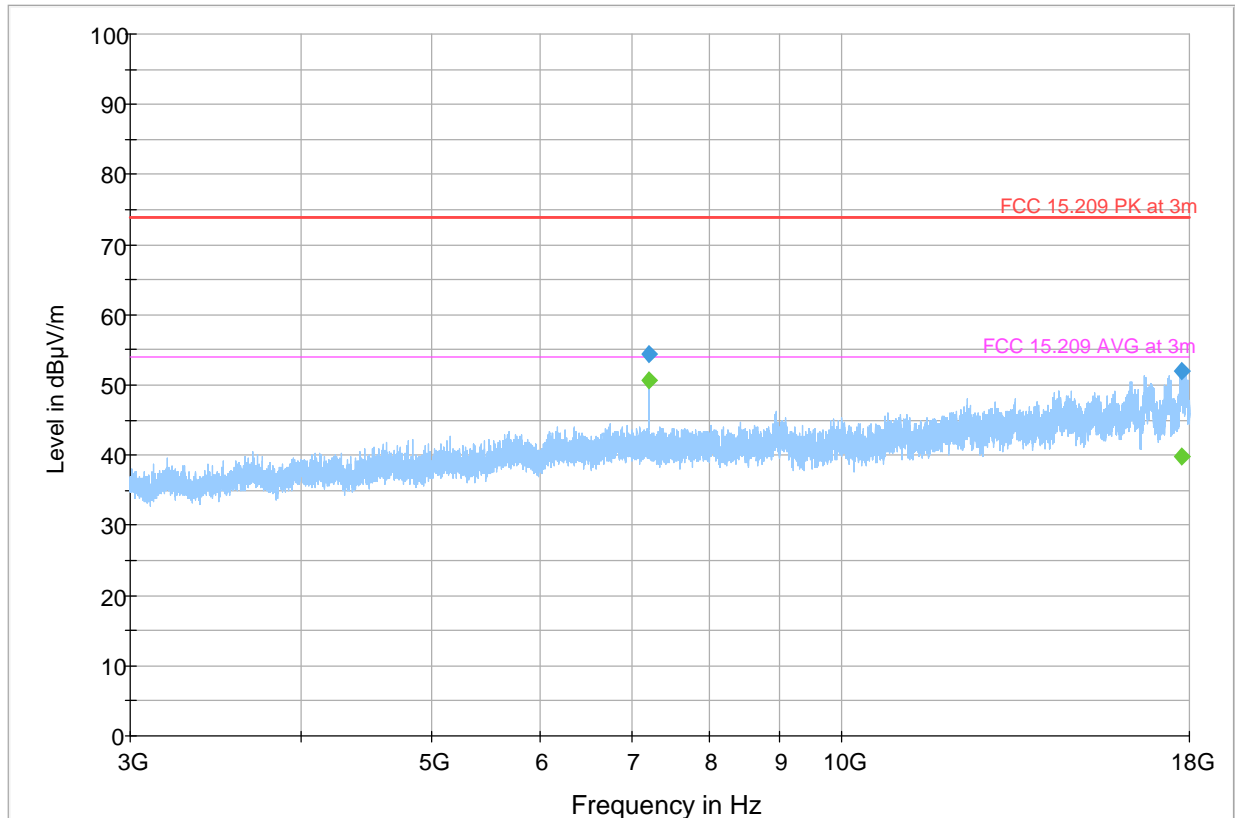

— Preview Result 2-AVG    
 — Preview Result 1-PK+    
 — FCC 15.209 PK at 3m  
— FCC 15.209 AVG at 3m    
 ◆ Final\_Result PK+    
 ◆ Final\_Result CAV

**Plot # 4**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20.47	41.64	55.75	14.11	500.0	9.0	100.0	V	88.0	16.4
20.99	40.03	55.44	15.41	500.0	9.0	100.0	V	101.0	16.4
29.91	32.24	51.08	18.83	500.0	9.0	100.0	V	69.0	15.9

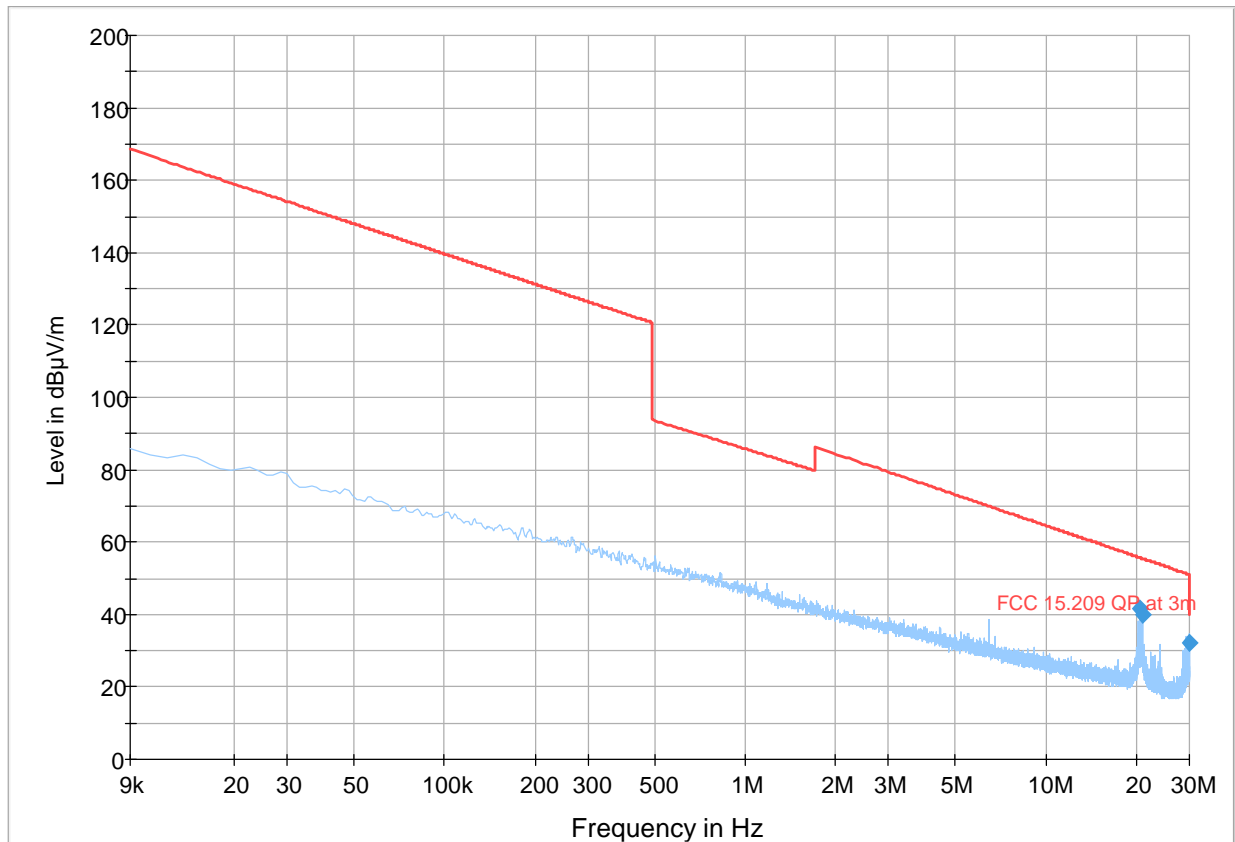


— Preview Result 2-AVG   
 — Preview Result 1-PK+   
 — FCC 15.209 QP at 3m   
 ◆ Final\_Result



**Plot # 5**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.04	27.61	40.00	12.39	500.0	120.0	167.0	H	64.0	23.8
41.28	23.42	40.00	16.58	500.0	120.0	100.0	V	194.0	19.2
105.66	34.19	43.50	9.31	500.0	120.0	222.0	V	19.0	21.9
159.20	28.61	43.50	14.89	500.0	120.0	145.0	V	-50.0	26.3
170.55	33.96	43.50	9.54	500.0	120.0	107.0	V	22.0	24.8

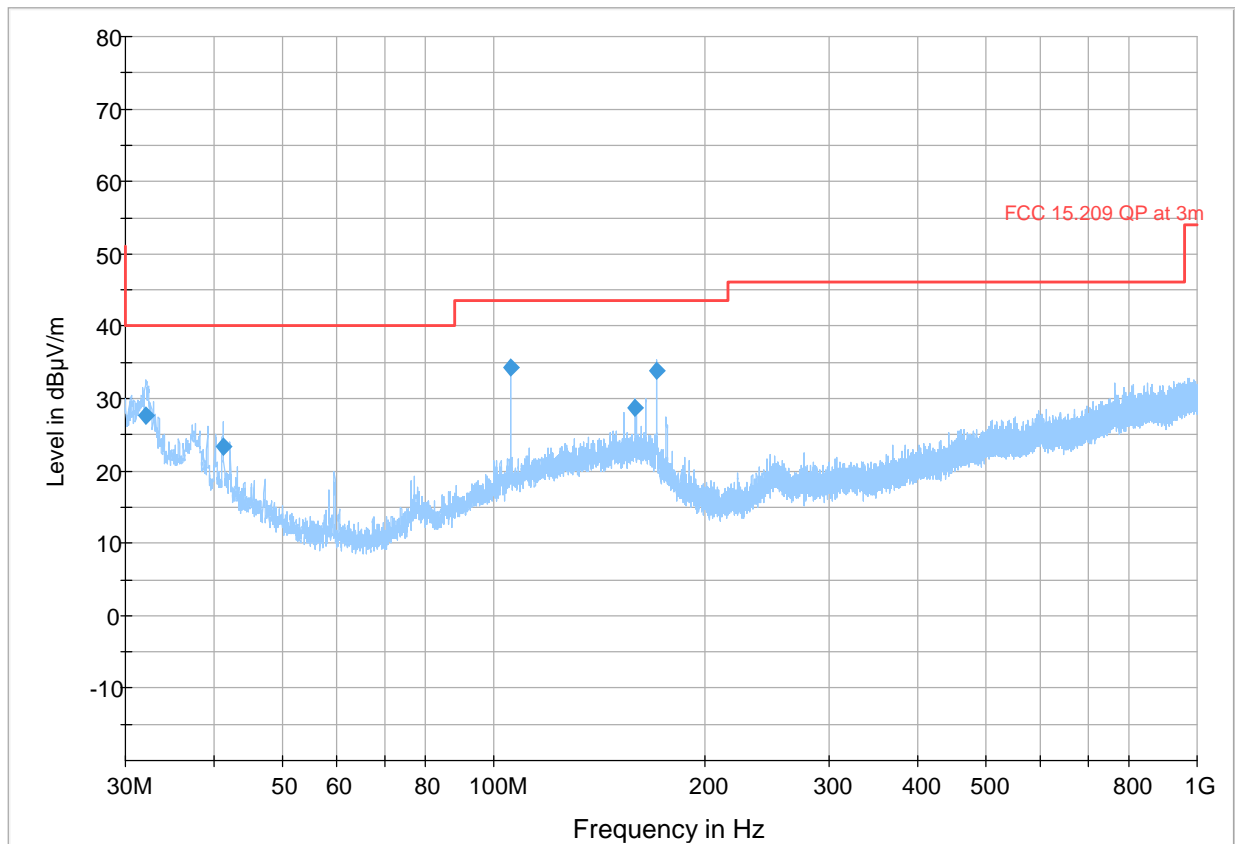


— Preview Result 2-AVG   
 — Preview Result 1-PK+   
 — FCC 15.209 QP at 3m   
 ◆ Final\_Result



Plot # 6

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1972.00	---	25.81	53.98	28.17	500.0	1000.0	107.0	V	-20.0	4.9
1972.00	38.53	---	73.98	35.45	500.0	1000.0	107.0	V	-20.0	4.9
2862.43	---	28.14	53.98	25.84	500.0	1000.0	177.0	V	170.0	8.0
2862.43	41.00	---	73.98	32.98	500.0	1000.0	177.0	V	170.0	8.0

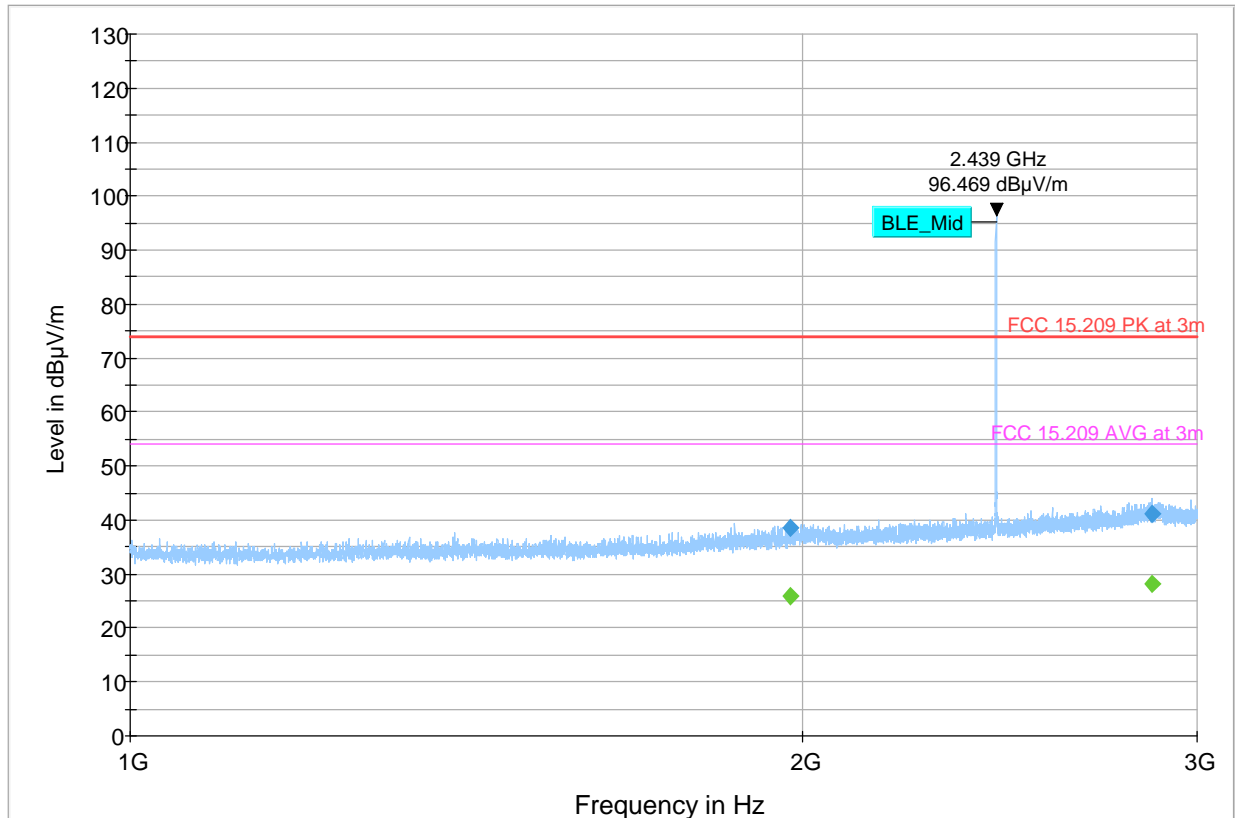


— Preview Result 2-AVG     — Preview Result 1-PK+     — FCC 15.209 PK at 3m  
— FCC 15.209 AVG at 3m     ◆ Final\_Result PK+     ◆ Final\_Result CAV



Plot # 7

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7316.75	---	47.59	53.98	6.39	500.0	1000.0	100.0	V	45.0	-0.4
7316.75	52.43	---	73.98	21.55	500.0	1000.0	100.0	V	45.0	-0.4
17353.25	53.66	---	73.98	20.32	500.0	1000.0	107.0	H	-75.0	15.8
17353.25	---	41.08	53.98	12.90	500.0	1000.0	107.0	H	-75.0	15.8
17874.75	54.20	---	73.98	19.78	500.0	1000.0	197.0	V	104.0	18.2
17874.75	---	41.54	53.98	12.44	500.0	1000.0	197.0	V	104.0	18.2

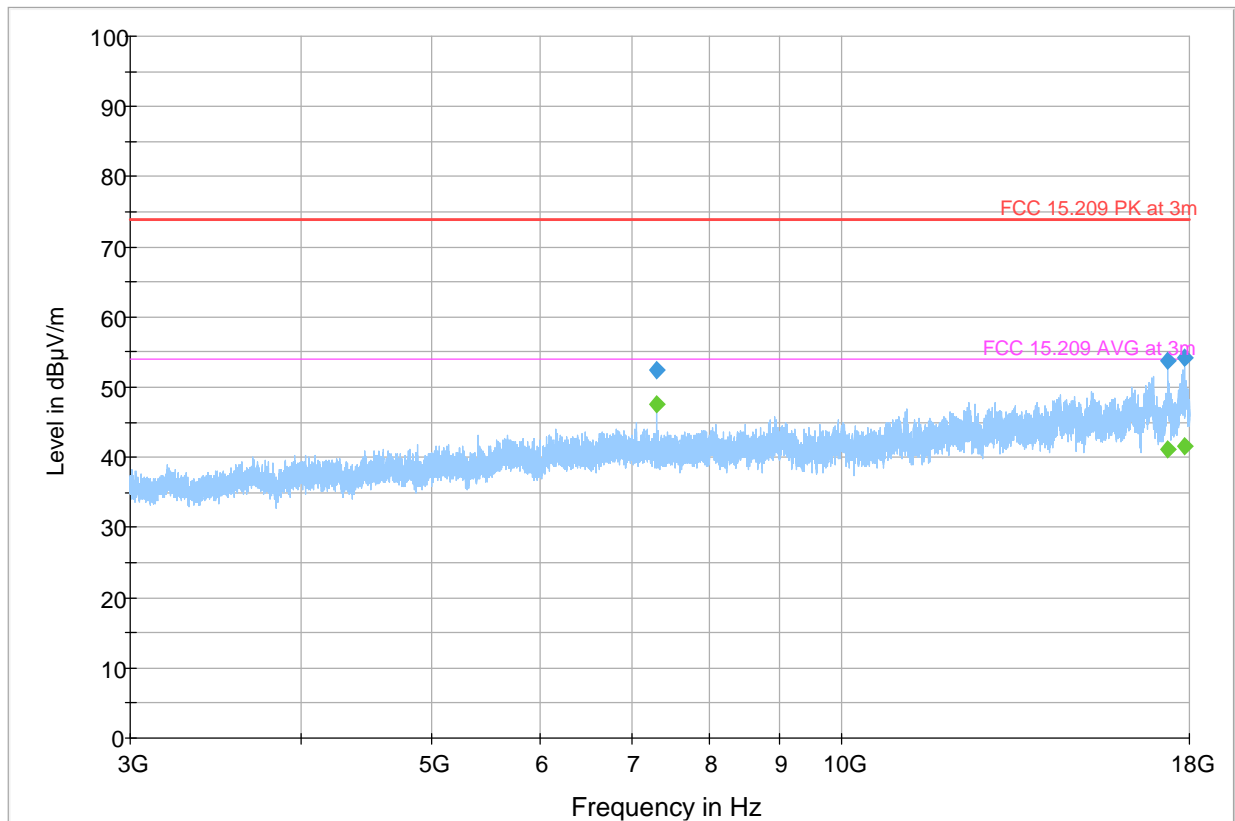


— Preview Result 2-AVG    
 — Preview Result 1-PK+    
 — FCC 15.209 PK at 3m  
— FCC 15.209 AVG at 3m    
 ◆ Final\_Result PK+    
 ◆ Final\_Result CAV



**Plot # 8**

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---		---	---

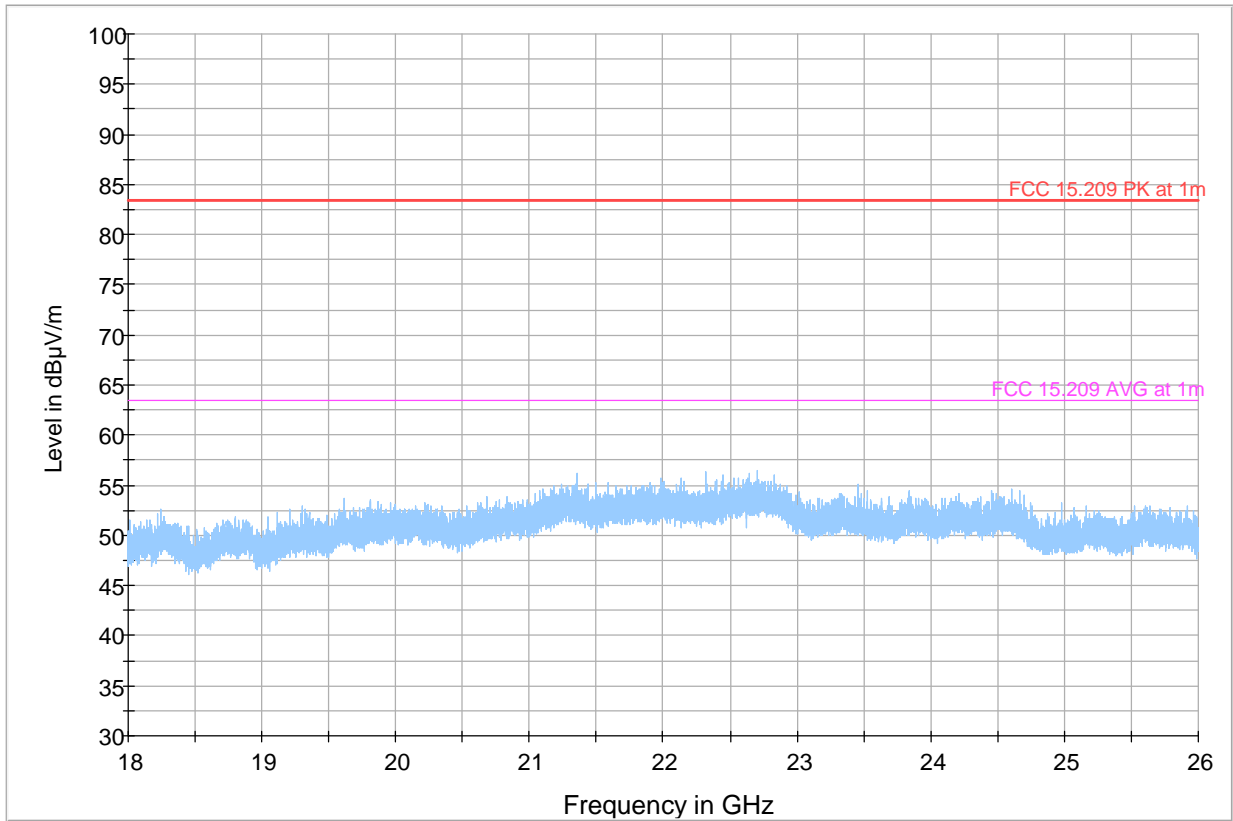


- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC 15.209 PK at 1m
- ◆ Final\_Result PK+
- ◆ Final\_Result CAV



**Plot # 9**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.00	25.98	40.00	14.02	500.0	120.0	129.0	V	146.0	24.4
31.72	30.65	40.00	9.35	500.0	120.0	100.0	H	249.0	23.9
41.30	25.14	40.00	14.86	500.0	120.0	241.0	V	39.0	19.2
105.68	35.74	43.50	7.76	500.0	120.0	221.0	V	106.0	22.0
170.46	24.94	43.50	18.56	500.0	120.0	206.0	V	7.0	24.8

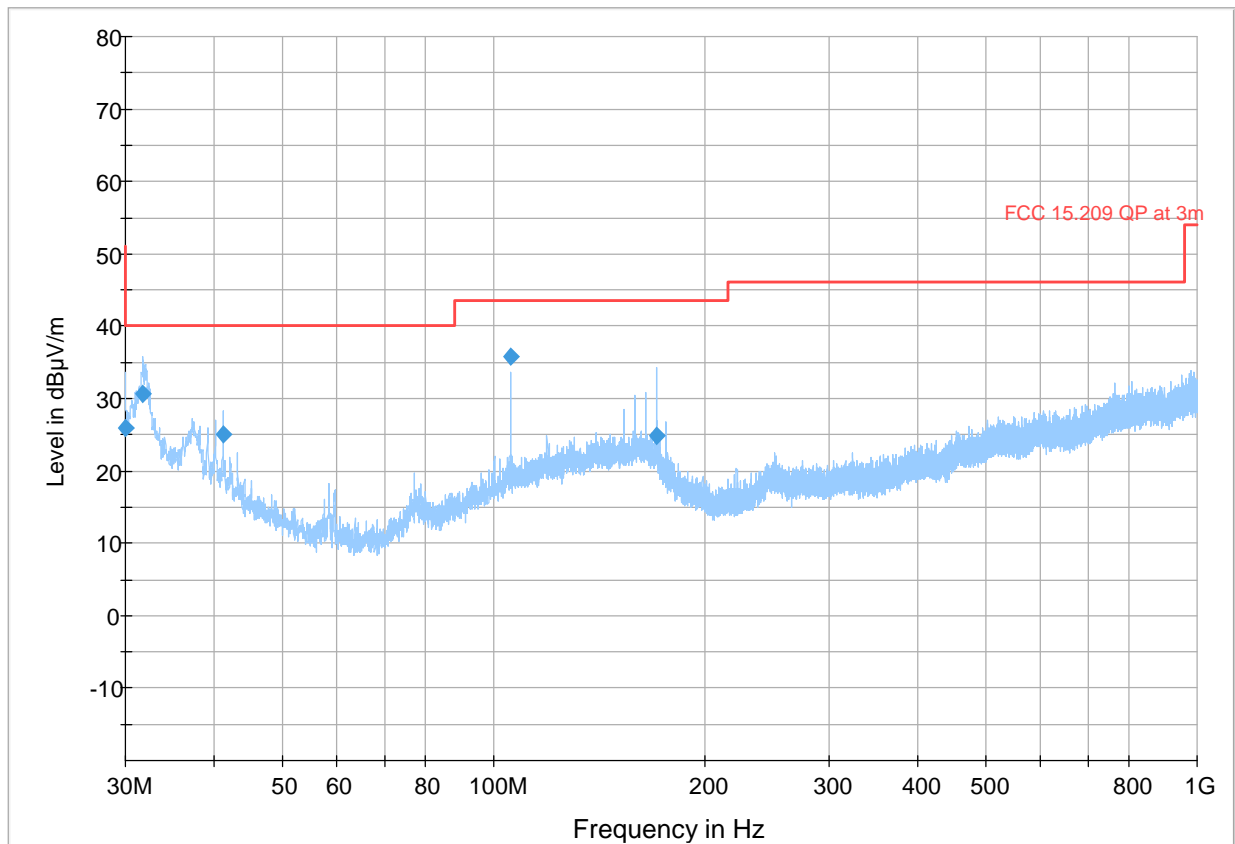


— Preview Result 2-AVG   
 — Preview Result 1-PK+   
 — FCC 15.209 QP at 3m   
 ◆ Final\_Result



**Plot # 10**

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---		---	---

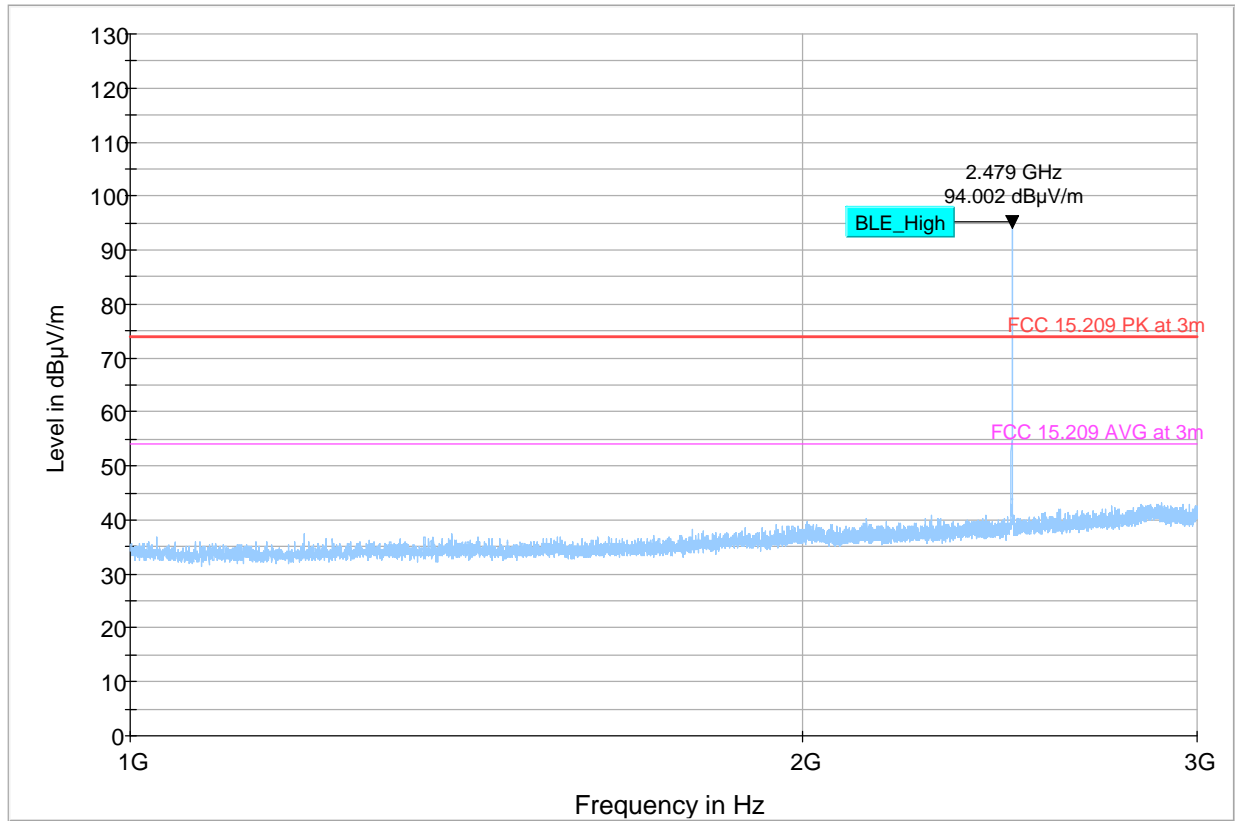


— Preview Result 2-AVG     — Preview Result 1-PK+     — FCC 15.209 PK at 3m  
— FCC 15.209 AVG at 3m     ◆ Final\_Result PK+     ◆ Final\_Result CAV



Plot # 11

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7437.00	---	41.68	53.98	12.30	500.0	1000.0	100.0	H	33.0	0.2
7437.00	49.36	---	73.98	24.62	500.0	1000.0	100.0	H	33.0	0.2
17349.75	53.30	---	73.98	20.68	500.0	1000.0	267.0	V	253.0	15.8
17349.75	---	40.88	53.98	13.10	500.0	1000.0	267.0	V	253.0	15.8
17808.50	53.40	---	73.98	20.58	500.0	1000.0	337.0	H	228.0	17.8
17808.50	---	40.64	53.98	13.34	500.0	1000.0	337.0	H	228.0	17.8

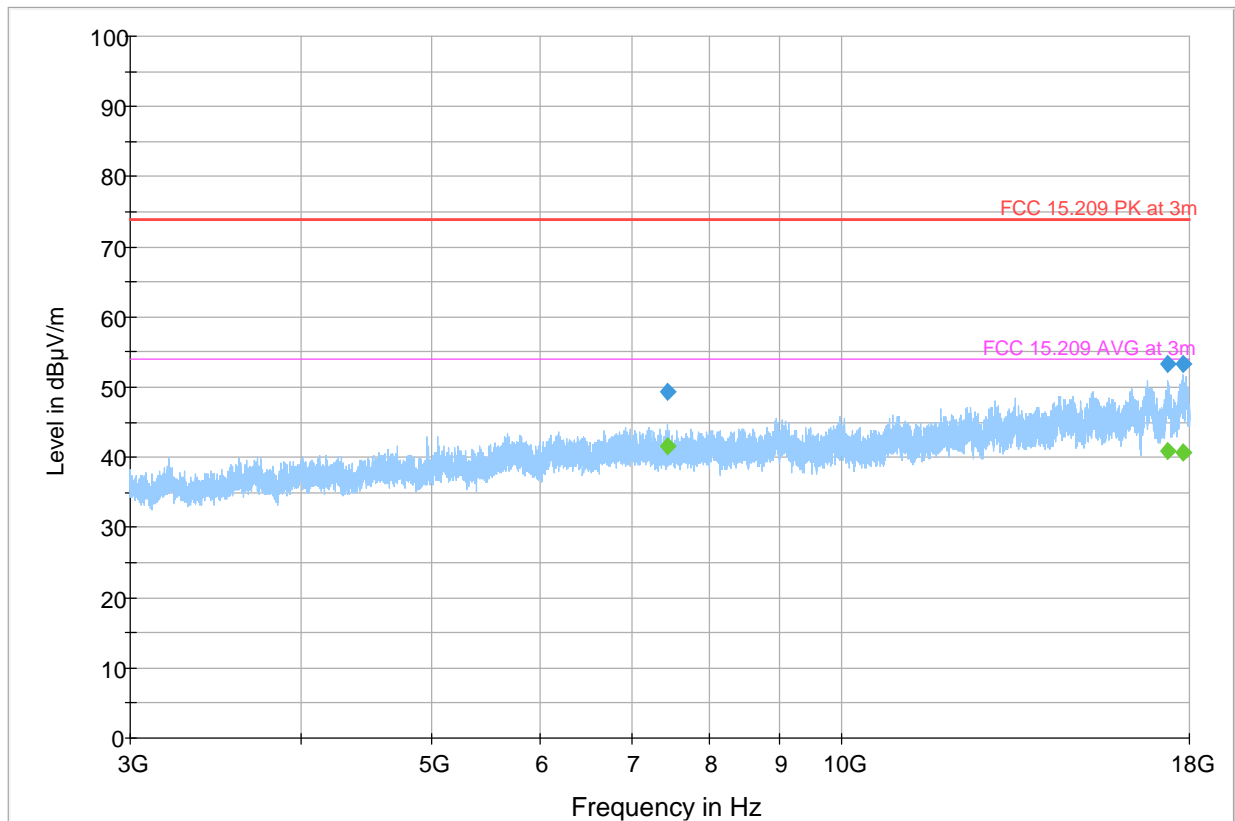

— Preview Result 2-AVG    
 — Preview Result 1-PK+    
 — FCC 15.209 PK at 3m  
— FCC 15.209 AVG at 3m    
 ◆ Final\_Result PK+    
 ◆ Final\_Result CAV



**9 Test setup photos**

Setup photos are included in supporting file name: "EMC\_XIRGO-186-22001\_FCC\_Setup\_Photos"

**10 Test Equipment And Ancillaries Used For Testing**

Equipment Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
ACTIVE LOOP ANTENNA	ETS LINDGREN	6507	00161344	3 YEARS	10/30/2020
BILOG ANTENNA	ETS.LINDGREN	3142E	00166067	3 YEARS	10/21/2021
HORN ANTENNA	EMCO	3115	00035111	3 YEARS	09/30/2021
HORN ANTENNA	ETS.LINDGREN	3117	00215984	3 YEARS	01/31/2021
HORN ANTENNA	ETS.LINDGREN	3116	00070497	3 YEARS	11/23/2020
TEST RECEIVER	R&S	ESU40	100251	3 YEARS	09/13/2021
DIGITAL THRMOMETER	CONTROL COMPANY	36934-164	181230565	3 YEARS	10/20/2021

Note: Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels. Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.



## 11 History

<b>Date</b>	<b>Report Name</b>	<b>Changes to report</b>	<b>Prepared by</b>
2022-12-02	EMC_XIRGO-186-22001_FCC_15_247	Initial Version	Art Thammanavarat
2022-12-22	EMC_XIRGO-186-22001_FCC_15_247_Rev1	Updated section 8.4 Band Edge Compliance	Art Thammanavarat

<<< The End >>>