



Compliance Certification Services Inc.

Report No: 90403108-RP1 FCC ID:GKR-BCM94312MCG Date of Issue: April 20, 2009

FCC 47 CFR PART 15 SUBPART C

PERMISSIVE CLASS II CHANGE TEST REPORT

For

802.11b/g WIRELESS LAN PCI-E Minicard

Model: BCM94312MCG

Trade Name: Compal

Issued to

COMPAL ELECTRONICS, INC.

No.581, Ruiguang Rd., Neihu District, Taipei City 11492, Taiwan

Issued by

Compliance Certification Services Inc.

No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang,

Taoyuan Shien, (338) Taiwan, R.O.C.

TEL: 886-3-324-0332

FAX: 886-3-324-5235

<http://www.ccsrf.com>

service@ccsrf.com



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 20, 2009	Initial Issue	ALL	Jill Shiau



TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION4

2 EUT DESCRIPTION5

3 TEST METHODOLOGY.....6

3.1. EUT CONFIGURATION.....6

3.2. EUT EXERCISE.....6

3.3. GENERAL TEST PROCEDURES.....6

3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS7

3.5. DESCRIPTION OF TEST MODES8

4 INSTRUMENT CALIBRATION9

4.1. MEASURING INSTRUMENT CALIBRATION9

4.2. MEASUREMENT EQUIPMENT USED9

4.3. MEASUREMENT UNCERTAINTY10

5 FACILITIES AND ACCREDITATIONS11

5.1 FACILITIES.....11

5.2 EQUIPMENT11

5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....12

6 SETUP OF EQUIPMENT UNDER TEST.....13

6.1. SETUP CONFIGURATION OF EUT13

6.2. SUPPORT EQUIPMENT13

7 FCC PART 15.247 REQUIREMENTS.....14

7.1. 6dB BANDWIDTH.....14

7.2. PEAK POWER.....15

7.3. BAND EDGES MEASUREMENT19

7.4. PEAK POWER SPECTRAL DENSITY.....28

7.5. SPURIOUS EMISSIONS29

7.6. POWERLINE CONDUCTED EMISSIONS40

APPENDIX I RADIO FREQUENCY EXPOSURE.....43

APPENDIX II PHOTOGRAPHS OF TEST SETUP.....44



1 TEST RESULT CERTIFICATION

Applicant: **COMPAL ELECTRONICS, INC.**
 No.581, Ruiguang Rd., Neihu District, Taipei City 11492, Taiwan

Equipment Under Test: 802.11b/g WIRELESS LAN PCI-E Minicard

Trade Name: Compal

Model: BCM94312MCG

Date of Test: April 8 ~ 15, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted


We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.


The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:



 Ethan Huang
 Section Manager



 Julia Wei
 Senior Specialist



2 EUT DESCRIPTION

Product	802.11b/g WIRELESS LAN PCI-E Minicard
Trade Name	Compal
Model Number	BCM94312MCG
Power Supply	Powered form DC Source
Operating Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b: 21.54 dBm IEEE 802.11g: 21.59 dBm
Modulation Technique	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps
Number of Channels	11 Channels
Channels Spacing	5MHz
Antenna Specification	Tyco / 2023797-1; Gain: 1.56dBi
	WNC / 81.EK515.G01; Gain: -1.06dBi

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **GKR-BCM94312MCG** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. Class II permissive change laptops to be added:

Type	Trade Name	Model
Notebook PC	Lenovo	2957
Power Adapter	Lite-On	PA-1400-12LC

Note: This Notebook PC (Model: 2957) has two transmits, 802.11b/g WIRELESS LAN PCI-E Minicard (FCC ID: GKR-BCM94312MCG) and Bluetooth (FCC ID: MCLBCM92046).



3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 (2003) and FCC CFR 47 Part 2, 15.207, 15.209 and 15.247.

3.1. EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3. GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2003).



3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5. DESCRIPTION OF TEST MODES

All testing were performed on the Lenovo (20027) laptop with the BCM94312MCG pre-approved module. The data presented in this report was collected for a Class II permissive change to add the laptop to the BCM94312MCG (FCC ID: GKR-BCM94312MCG) module application.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

IEEE802.11b: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.



4 INSTRUMENT CALIBRATION

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2. MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEB	825829/011	10/29/2009

3M Chamber Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilnet	E4446A	MY48250064	10/28/2009
Spectrum Analyzer	R&S	FSEB	825829/011	10/29/2009
Pre-Amplifier	Anritsu	MH648A	M89145	07/25/2009
Pre-Amplifier	Agilent	8449B	3008A01738	04/17/2010
Bilog Antenna	FRANKONIA	BTA-M	030003M	04/03/2010
Horn Antenna	EMCO	3115	00022250	05/08/2010
Antenna Tower	HD	AS620E	N/A	N.C.R
Controller	HD	HD100	N/A	N.C.R
Turn Table	HD	DT-K312	N/A	N.C.R
Test S/W	LabVIEW 6.1 (Wugu Chamber EMI Test V1_4.5.3)			

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	845552/030	04/08/2009
LISN	R&S	ENV216	100074	12/09/2009
LISN	FCC	FCC-LISN-50/ 250-16-2-07	06013	10/12/2009
Test S/W	LabVIEW 6.1 (CCS Conduction Test SW Version_01)			



4.3. MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Powerline Conducted Emission	± 1.7806
3M Semi Anechoic Chamber / 30MHz ~ 1GHz	± 3.8856
3M Semi Anechoic Chamber / Above 1GHz	± 3.8721

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang, Taoyuan Shien, (338) Taiwan, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

5.2 EQUIPMENT





Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	 <p>ACCREDITED No. 0824-01</p>
USA	FCC MRA	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	<p>VCCI</p> <p>R-2882/2541/2798/725/1868 C-402/747/912 T-321/325</p>
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	<p>SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014</p>
Canada	Industry Canada	RSS212, Issue 1	 <p>IC 2324C-3 IC 2324C-5</p>

Note: No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



6 SETUP OF EQUIPMENT UNDER TEST

6.1. SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2. SUPPORT EQUIPMENT

For Conducted Measurement							
No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

For Powerline and Radiated Measurement							
No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	LCD Monitor	DELL	2407WFPb	CN-0FC255-46633-675-22TJS	FCC DoC	D-SUB Cable: Unshielded, 1.8m with two cores	Unshielded, 1.8m
2.	USB Mouse	HP	MO19UCA	020509284	FCC DoC	Unshielded, 1.8m	N/A
3.	USB 2.0 External HDD	TeraSys	F12-UF	A0100214-43b0015	FCC DoC	Unshielded, 1.8m	N/A
4.	USB 2.0 External HDD	TeraSys	F12-UF	A0100214-43b0015	FCC DoC	Unshielded, 1.8m	N/A
5.	Multimedia Headset	CJC	CJC-5258MV	0507106338	FCC DoC	Unshielded, 1.8m	N/A
6.	Notebook PC (Remote)	HP	DX-7300	SGH7390F4P	FCC DoC	LAN Cable: Unshielded, 1.8m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7 FCC PART 15.247 REQUIREMENTS

7.1. 6dB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 20MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

Not applicable




7.2. PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

- 1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

TEST RESULTS

No non-compliance noted

TEST DATA

IEEE 802.11b

Table with 6 columns: Channel, Frequency (MHz), Output Power (dBm), Output Power (W), Limit (W), Test Result. Rows for Low, Mid, High channels.

IEEE 802.11g


Table with 6 columns: Channel, Frequency (MHz), Output Power (dBm), Output Power (W), Limit (W), Test Result. Rows for Low, Mid, High channels.



Test Plot


IEEE 802.11b mode

Peak Power (CH Low)

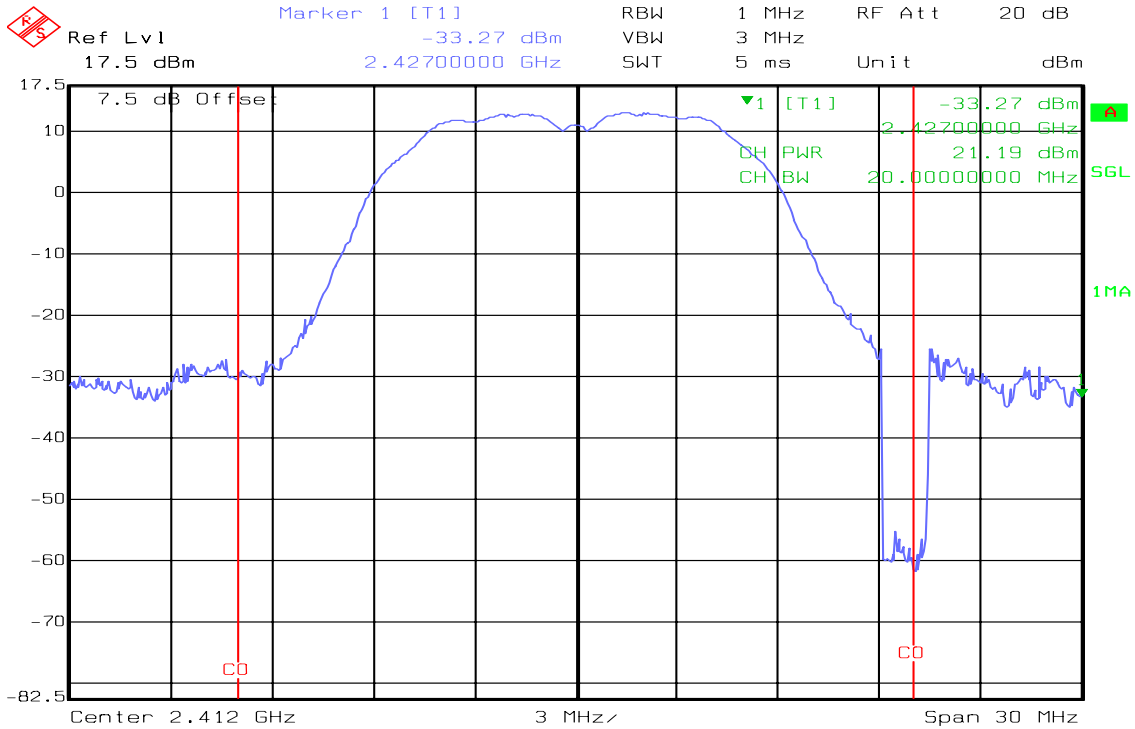

Date: 04.MAY 2009 15:29:00


Peak Power (CH Mid)

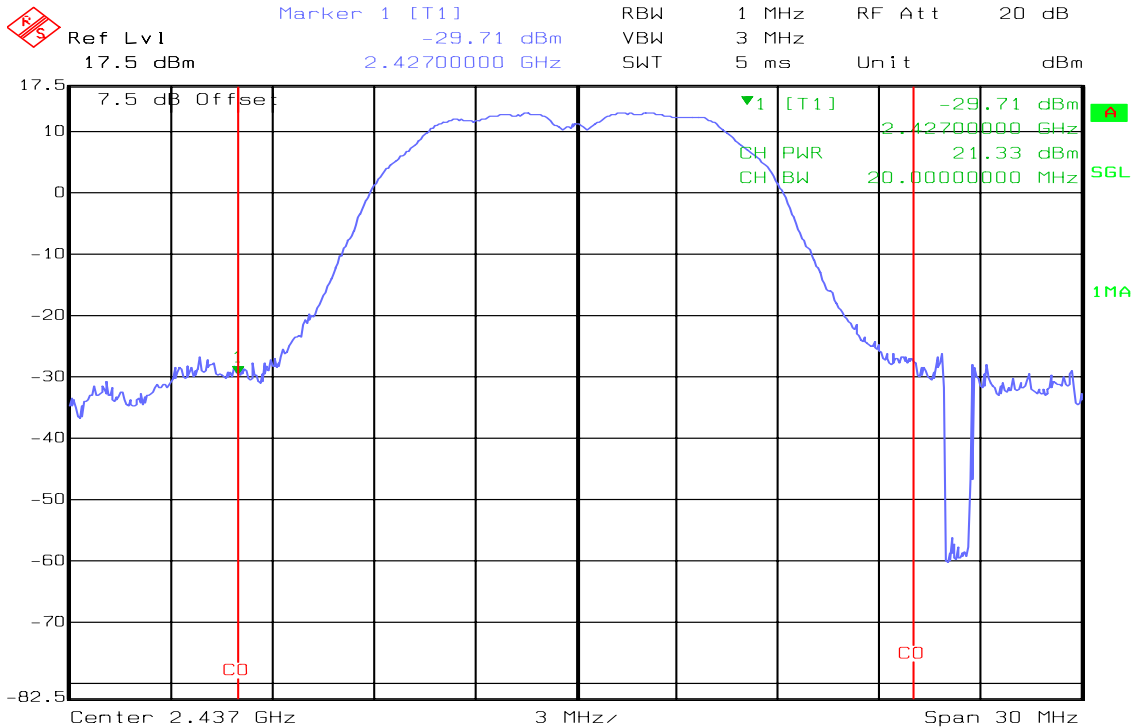

Date: 04.MAY 2009 15:33:06




Peak Power (CH High)

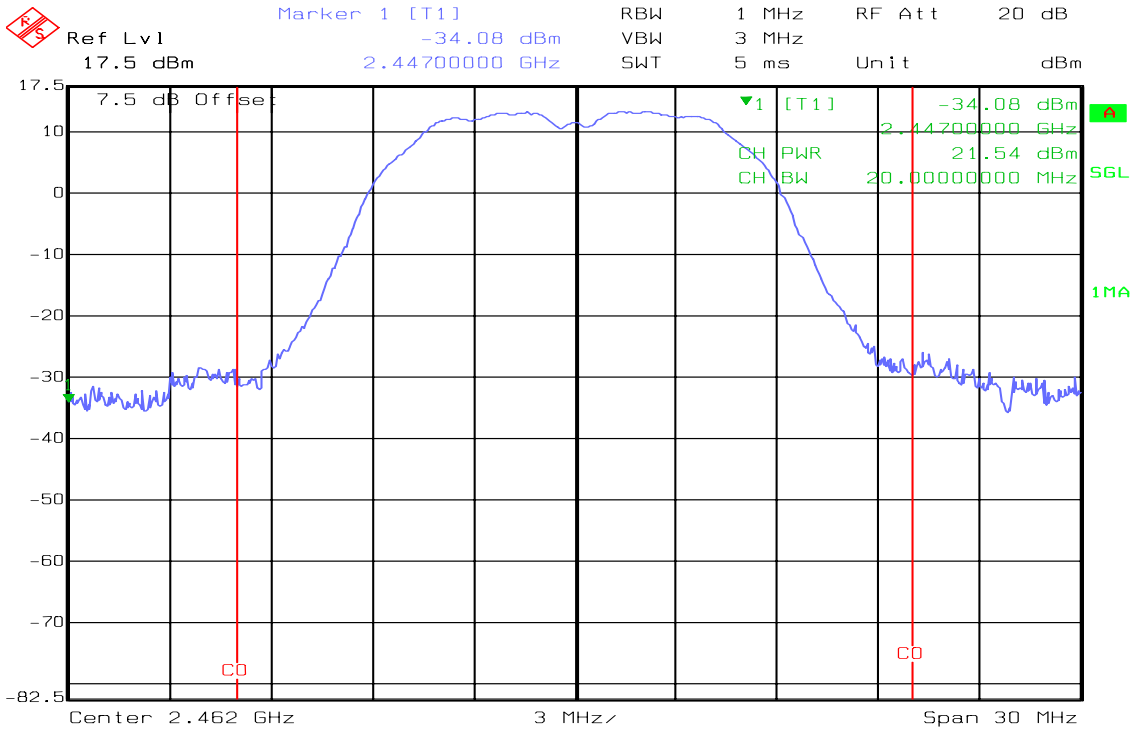

Date: 04.MAY 2009 15:36:32

IEEE 802.11g mode


Peak Power (CH Low)

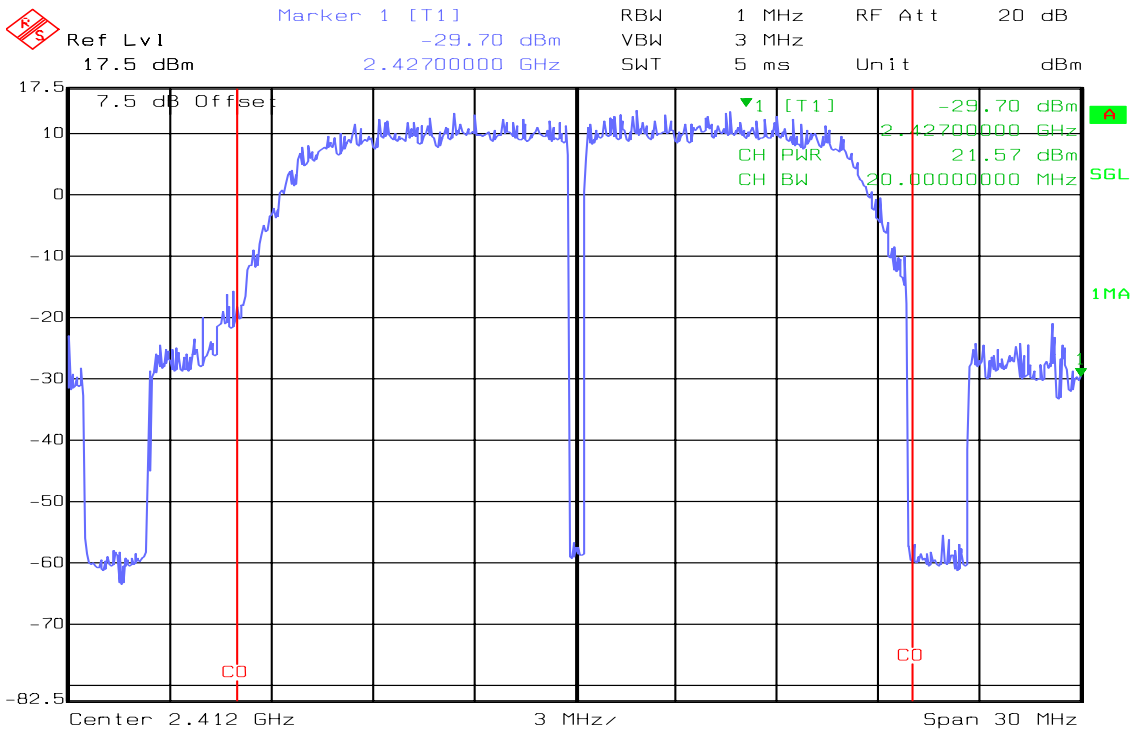

Date: 04.MAY 2009 15:44:51




Peak Power (CH Mid)

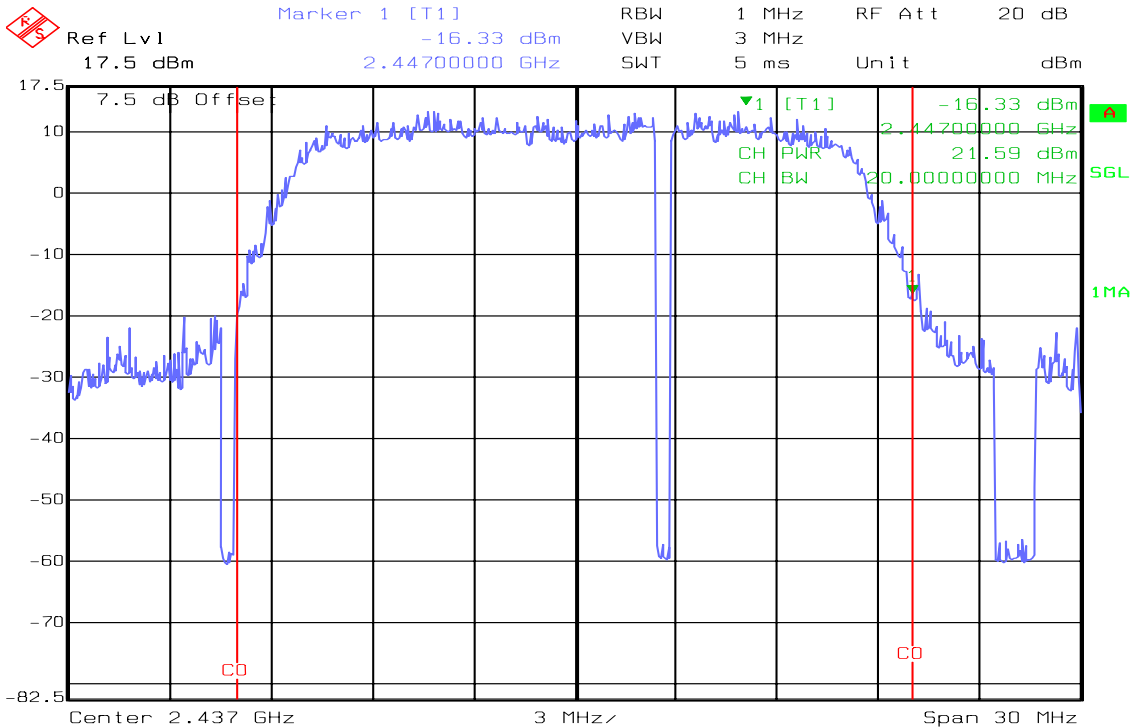

Date: 04.MAY 2009 15:42:33

Peak Power (CH High)

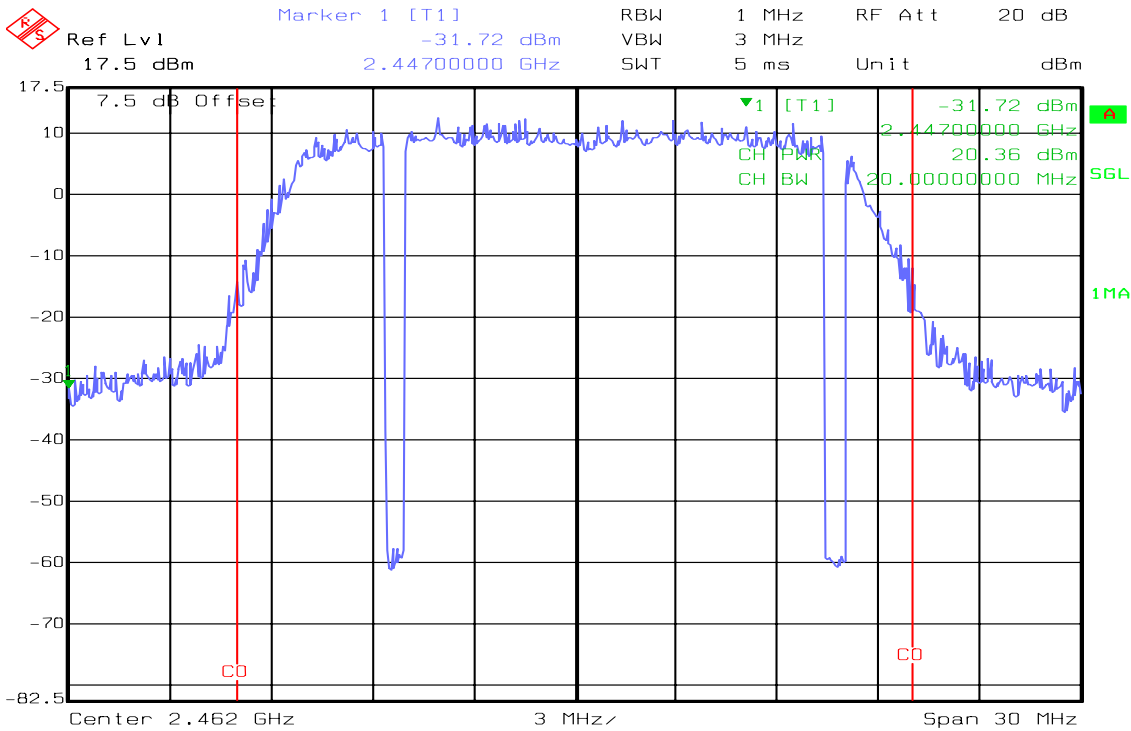


Date: 04.MAY 2009 15:38:46

7.3. BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION

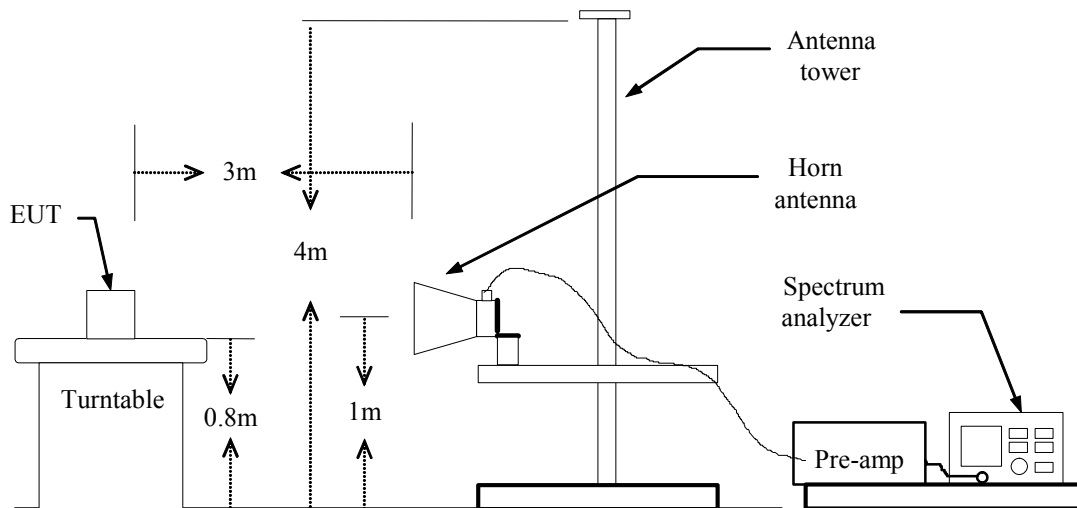

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Test Plot

Band Edges (IEEE 802.11b / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 10:51:05 Apr 13, 2009

R T

Mkr1 2.390 00 GHz
50.69 dB μ V

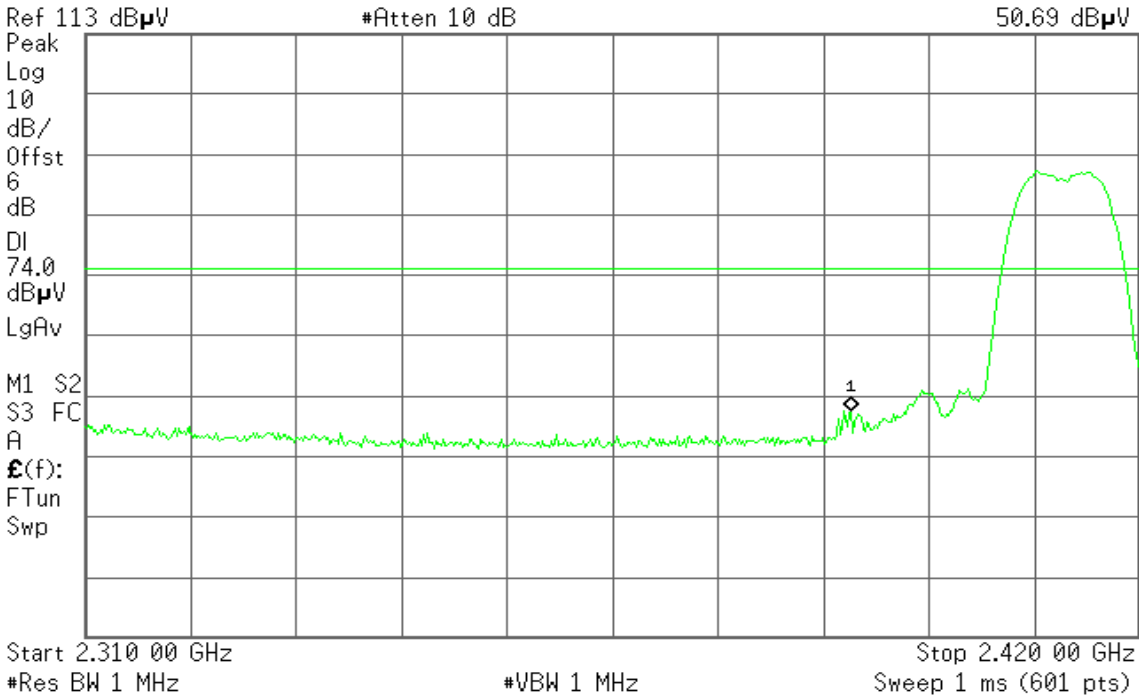


Detector mode: Average

Polarity: Vertical

Agilent 10:52:04 Apr 13, 2009

R T

Mkr1 2.390 00 GHz
35.43 dB μ V

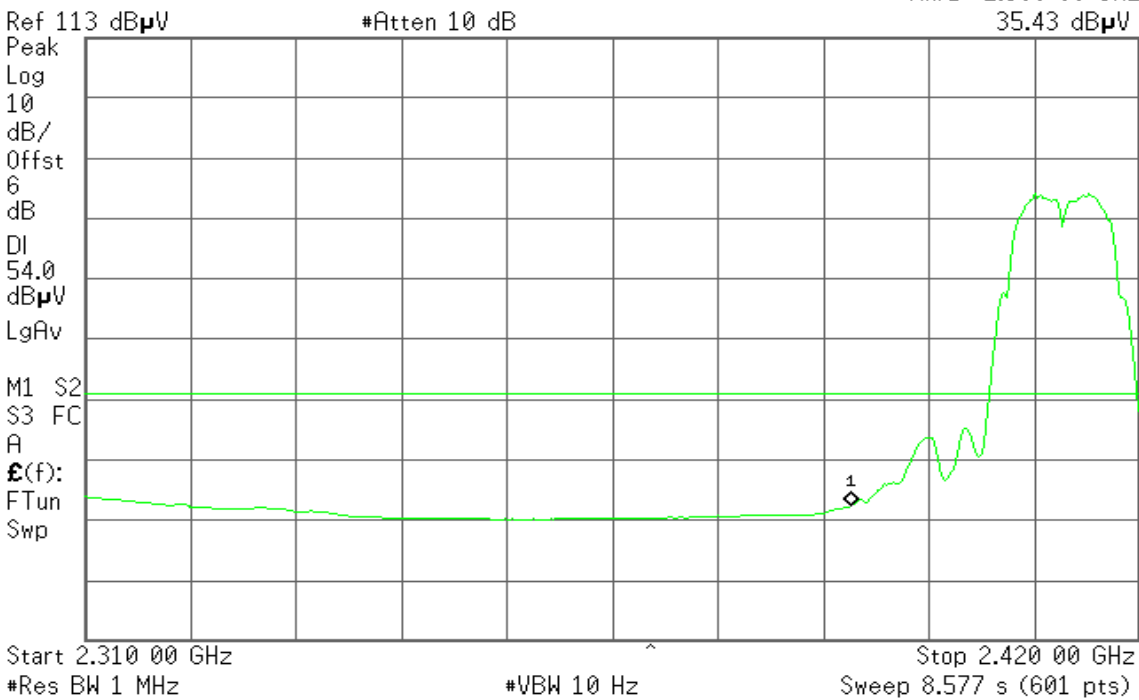




Detector mode: Peak

Polarity: Horizontal

Agilent 10:55:55 Apr 13, 2009

R T

Mkr1 2.390 00 GHz
46.18 dBµV

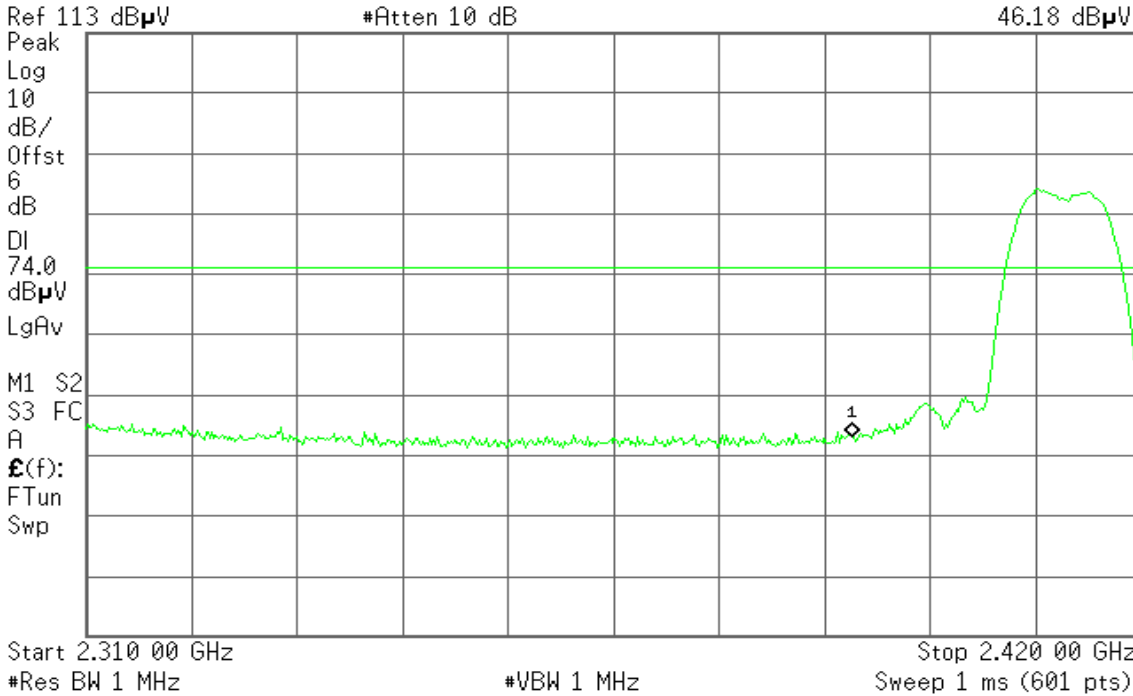


Detector mode: Average

Polarity: Horizontal

Agilent 10:56:37 Apr 13, 2009

R T

Mkr1 2.390 00 GHz
34.21 dBµV

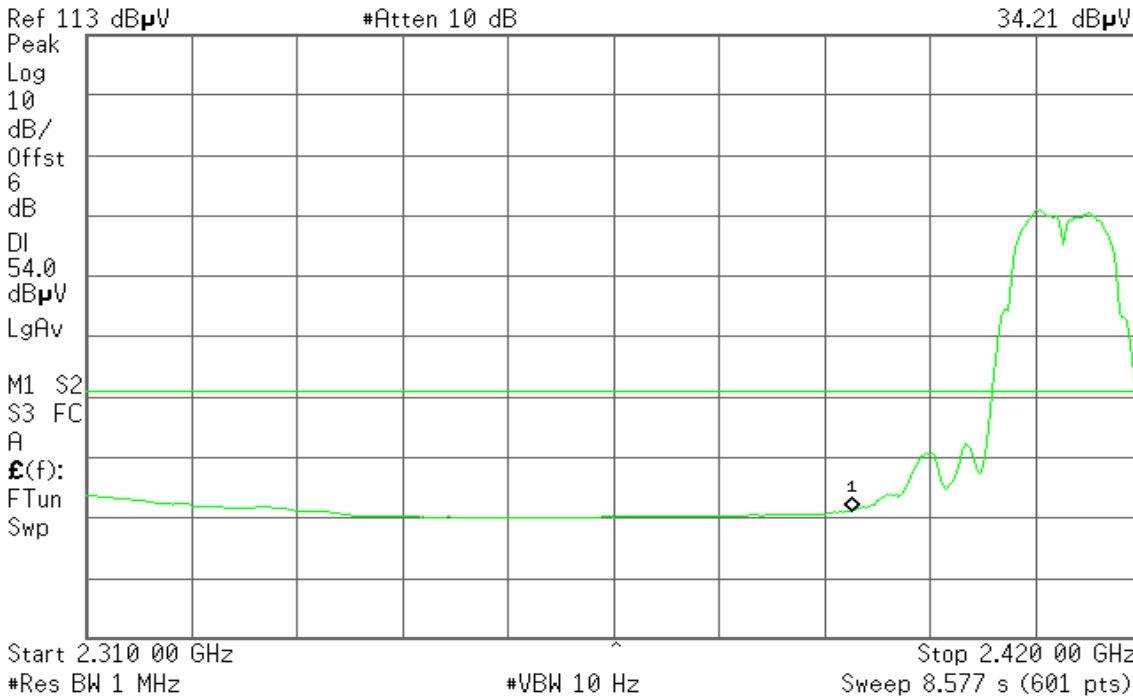



Band Edges (IEEE 802.11b / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 11:24:33 Apr 13, 2009

R T

Mkr1 2.483 50 GHz
47.19 dB μ V

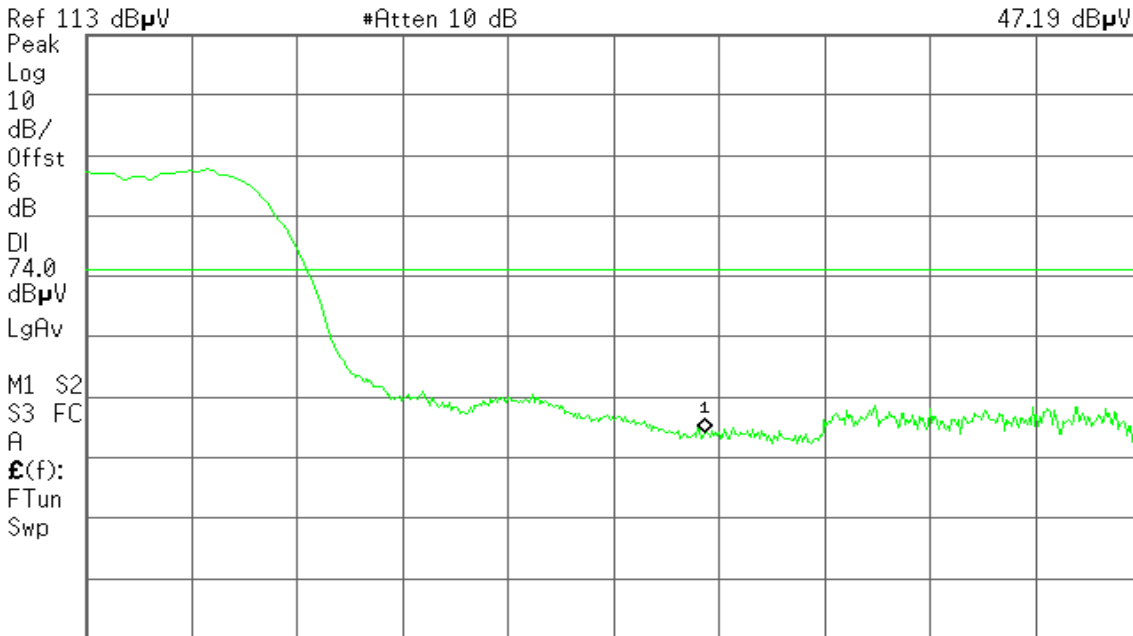

Start 2.460 00 GHz #Res BW 1 MHz #VBW 1 MHz Stop 2.500 00 GHz Sweep 1 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 11:25:08 Apr 13, 2009

R T

Mkr1 2.483 50 GHz
35.47 dB μ V

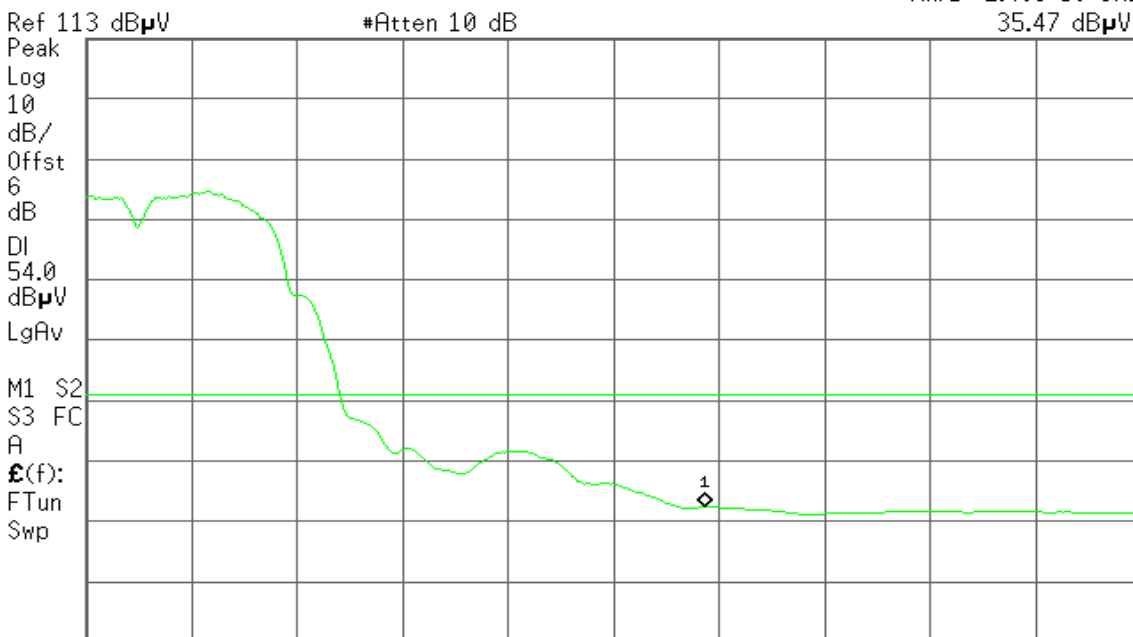

Start 2.460 00 GHz #Res BW 1 MHz #VBW 10 Hz Stop 2.500 00 GHz Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 11:29:22 Apr 13, 2009

R T

Mkr1 2.483 50 GHz
45.75 dBμV

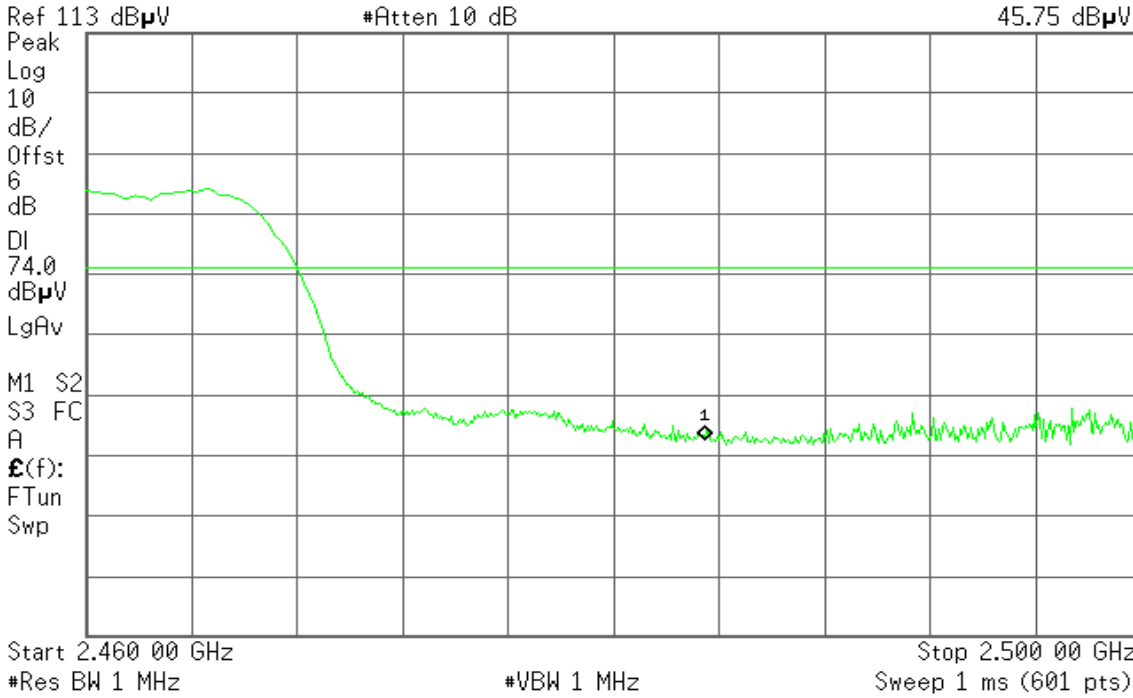


Detector mode: Average

Polarity: Horizontal

Agilent 11:30:08 Apr 13, 2009

R T

Mkr1 2.483 50 GHz
34.57 dBμV

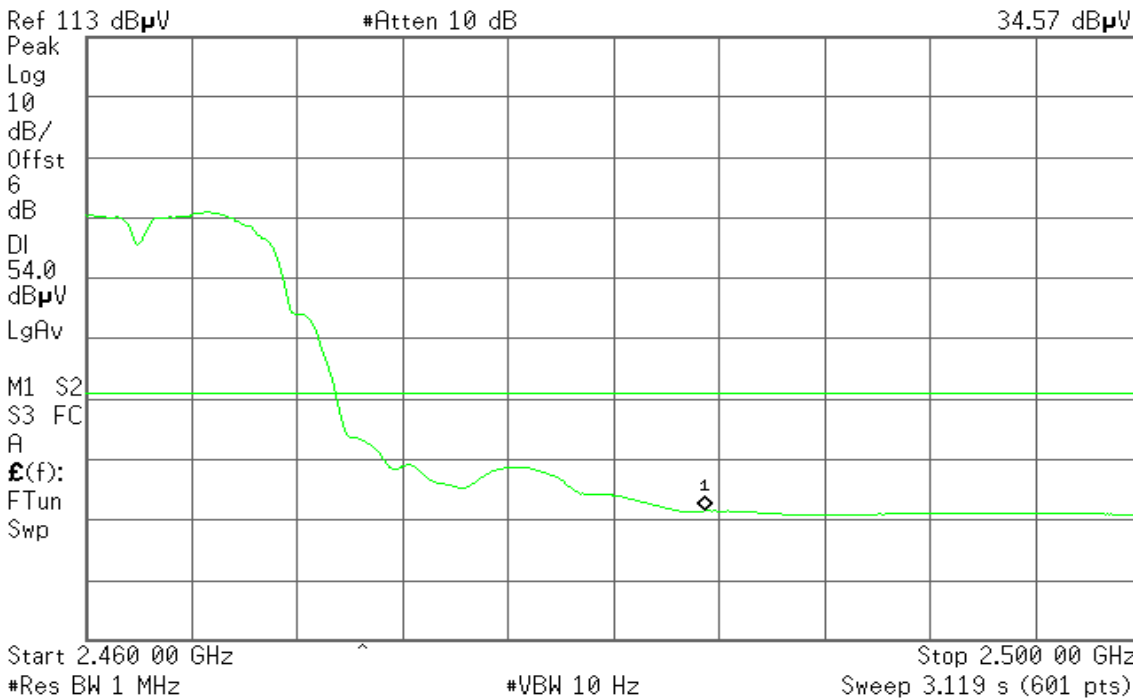



Band Edges (IEEE 802.11g / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 10:18:48 Apr 13, 2009

R T

Mkr1 2.390 00 GHz
53.83 dBµV

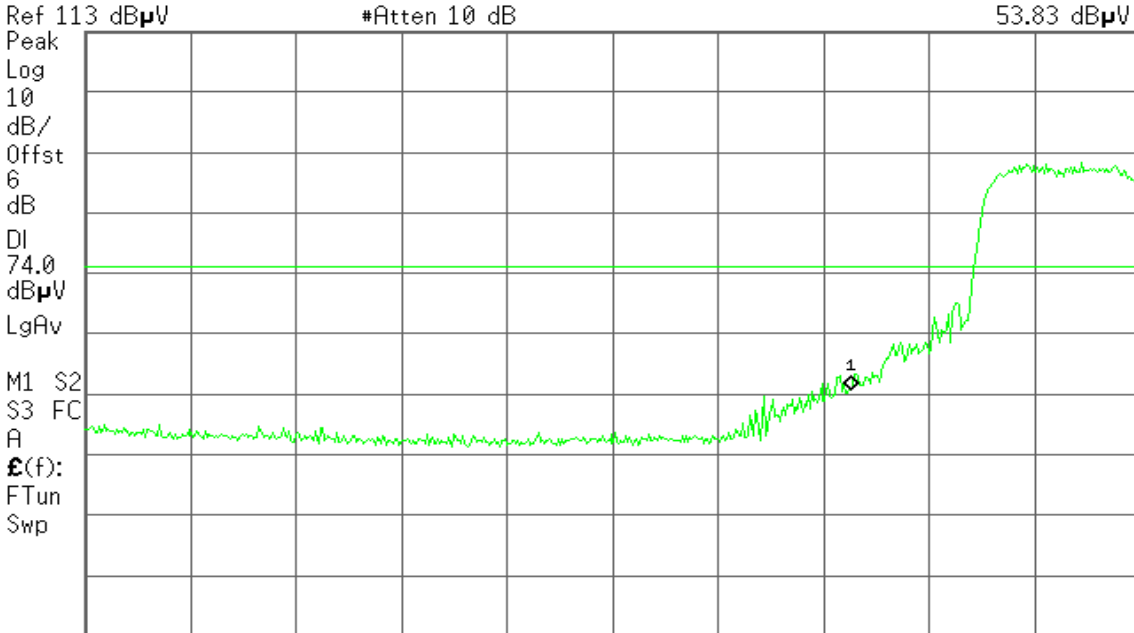

Start 2.310 00 GHz #Res BW 1 MHz #VBW 1 MHz Stop 2.420 00 GHz Sweep 1 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 10:23:30 Apr 13, 2009

R T

Mkr1 2.390 00 GHz
36.44 dBµV

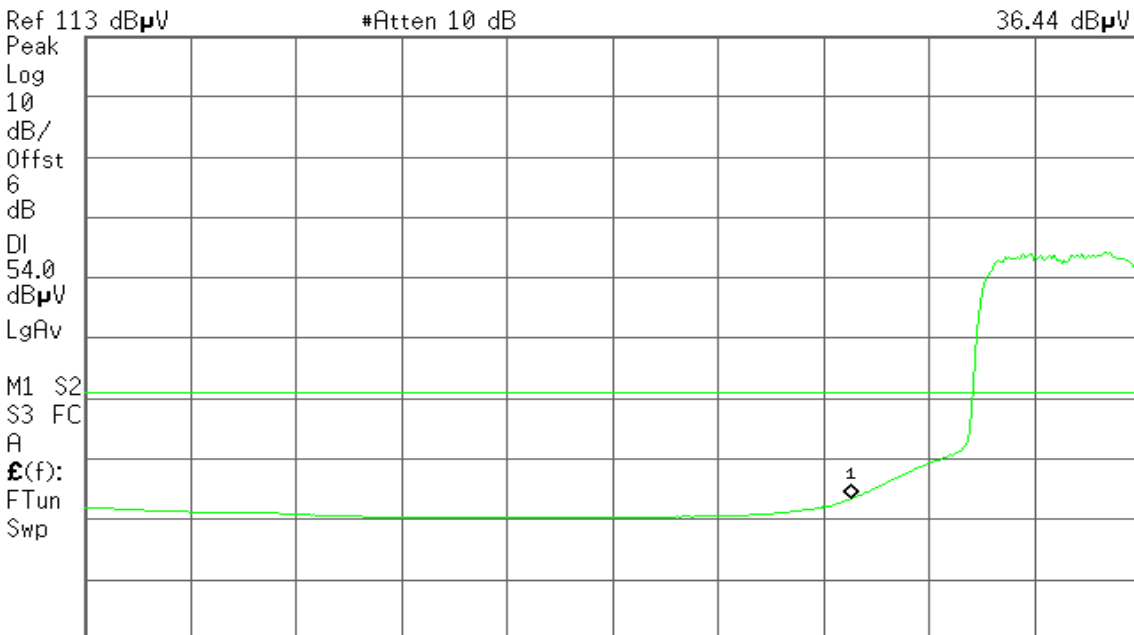

Start 2.310 00 GHz #Res BW 1 MHz #VBW 10 Hz Stop 2.420 00 GHz Sweep 8.577 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 11:00:53 Apr 13, 2009

R T

Mkr1 2.390 00 GHz
52.69 dBμV

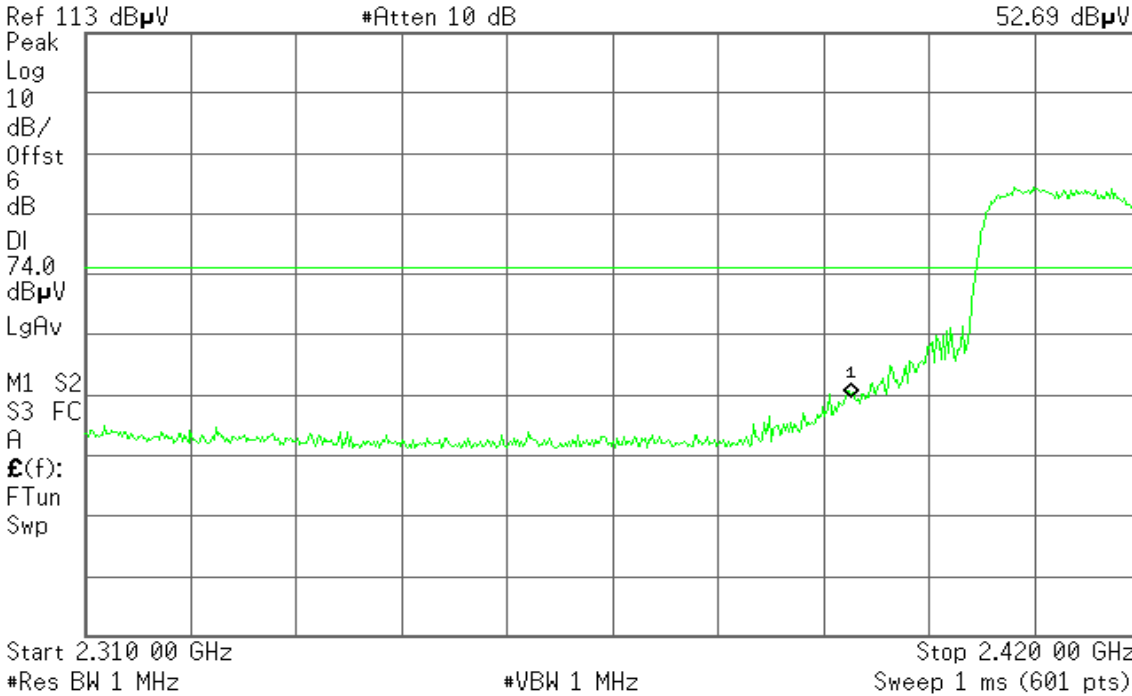


Detector mode: Average

Polarity: Horizontal

Agilent 11:01:33 Apr 13, 2009

R T

Mkr1 2.390 00 GHz
35.37 dBμV

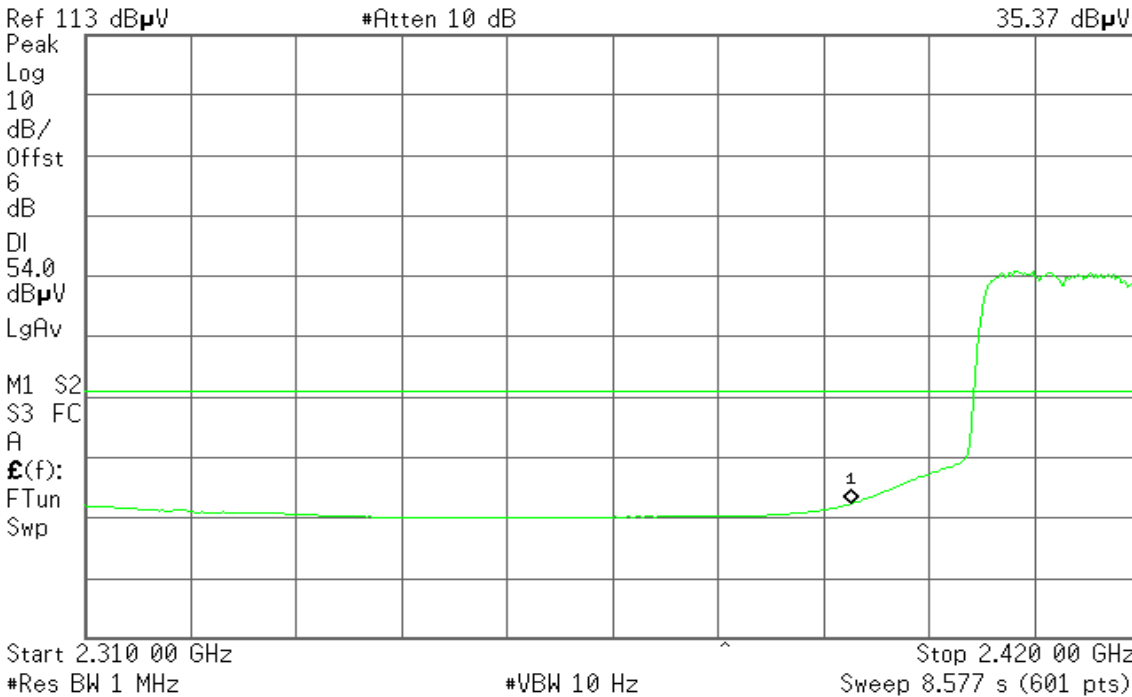



Band Edges (IEEE 802.11g / CH High)


Detector mode: Peak

Polarity: Vertical

* Agilent 11:11:58 Apr 13, 2009

R T

Mkr1 2.483 50 GHz
54.69 dB μ V

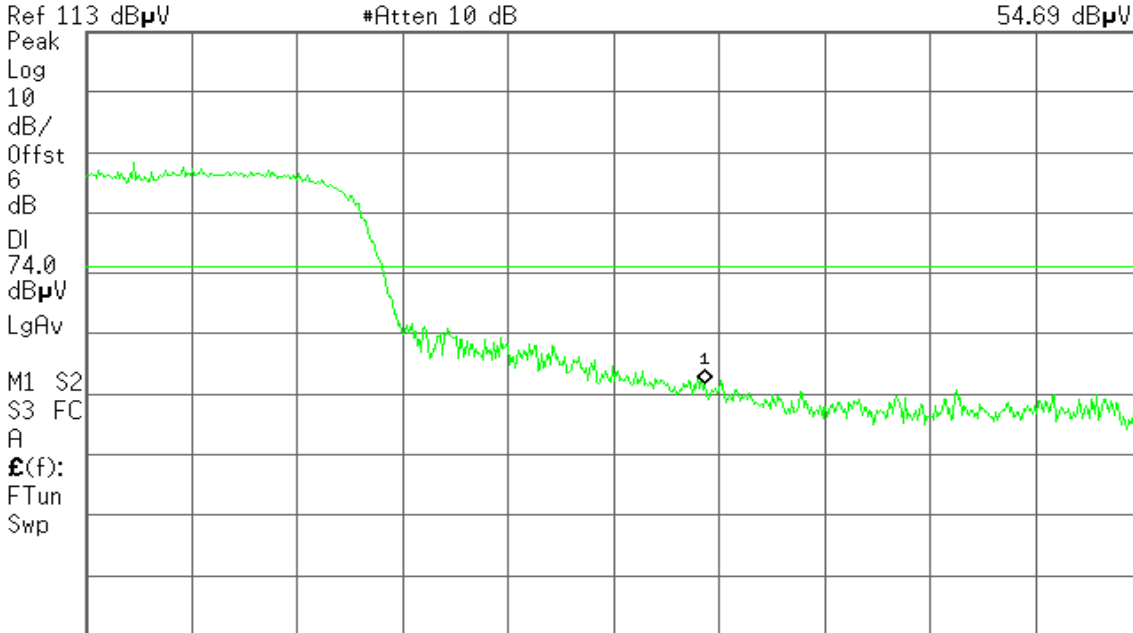

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)


Detector mode: Average

Polarity: Vertical

* Agilent 11:13:06 Apr 13, 2009

R T

Mkr1 2.483 50 GHz
35.73 dB μ V

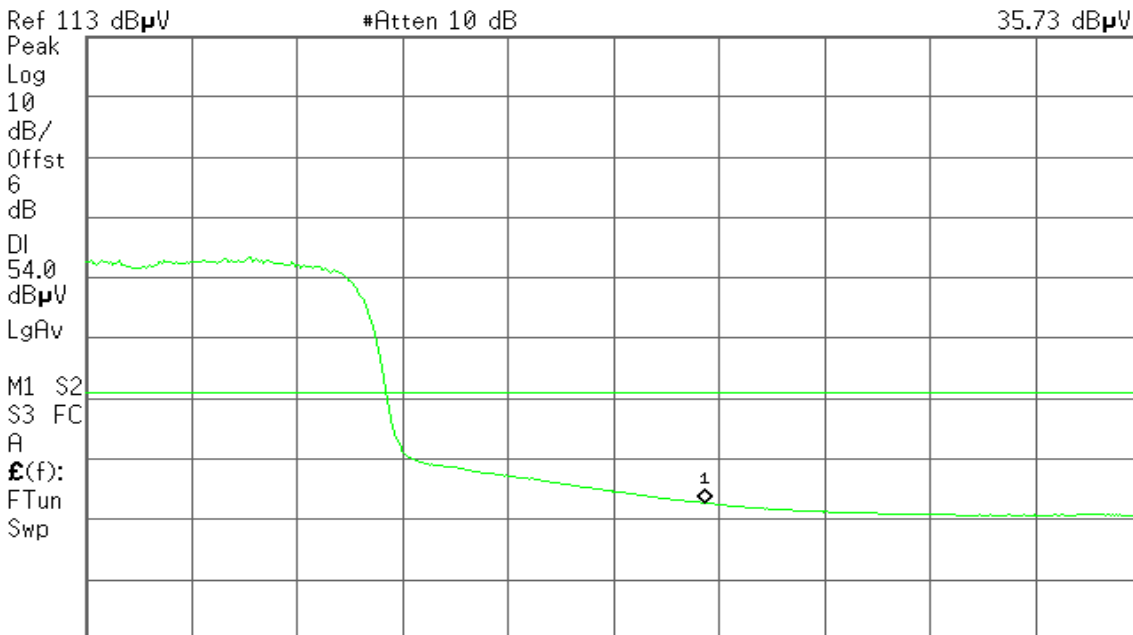

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 11:06:57 Apr 13, 2009

R T

Mkr1 2.483 50 GHz
53.14 dB μ V

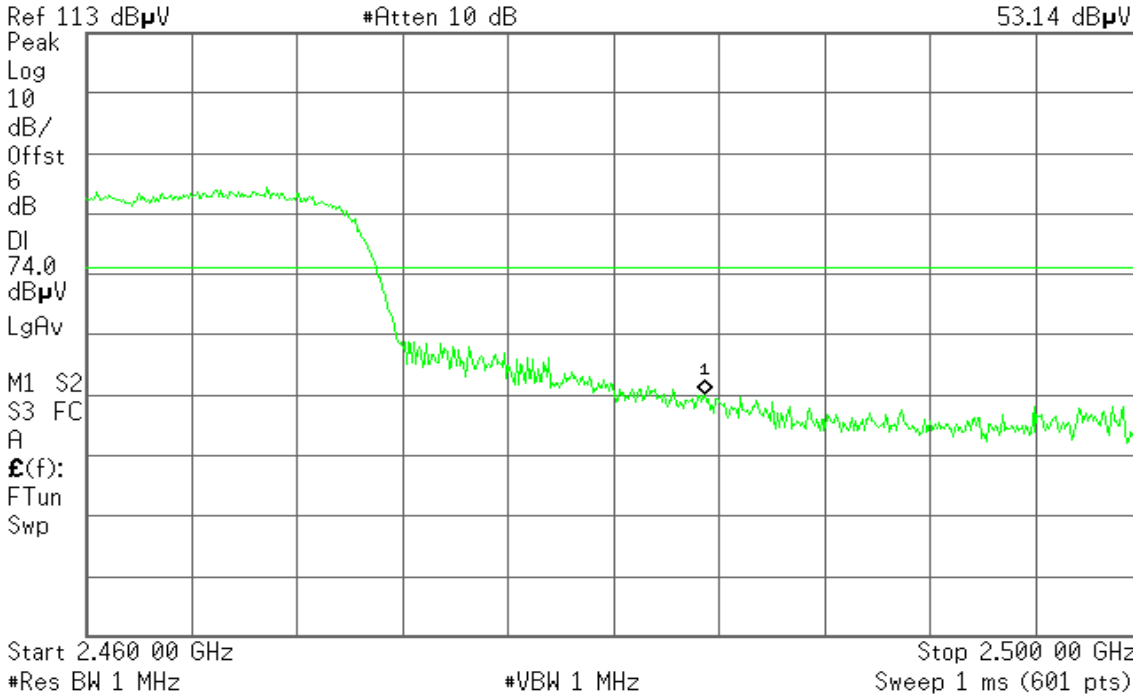


Detector mode: Average

Polarity: Horizontal

Agilent 11:07:45 Apr 13, 2009

R T

Mkr1 2.483 50 GHz
35.04 dB μ V

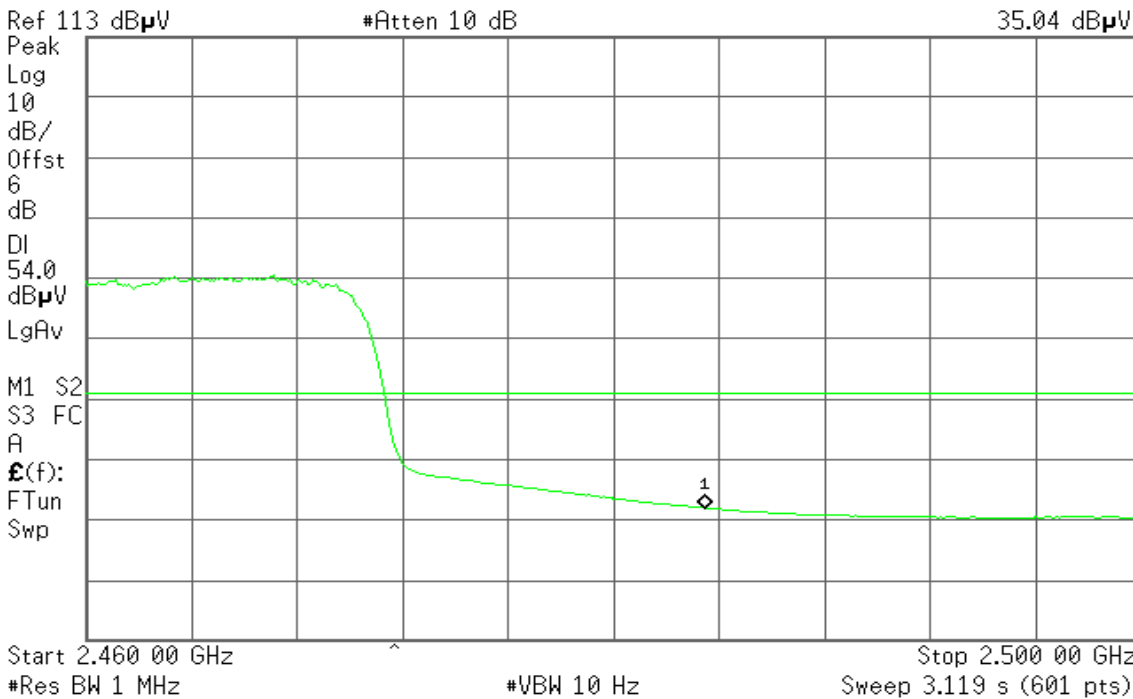




7.4. PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

Not applicable




7.5. SPURIOUS EMISSIONS

7.5.1. CONDUCTED MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

Not applicable



7.5.2. RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

TEST CONFIGURATION

Below 1 GHz

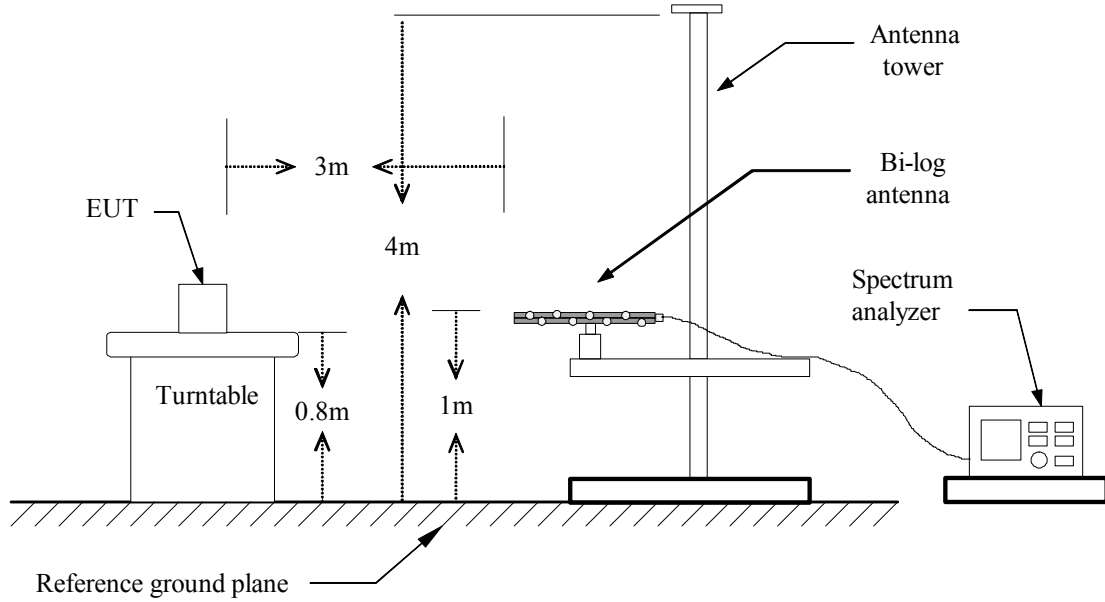

Above 1 GHz

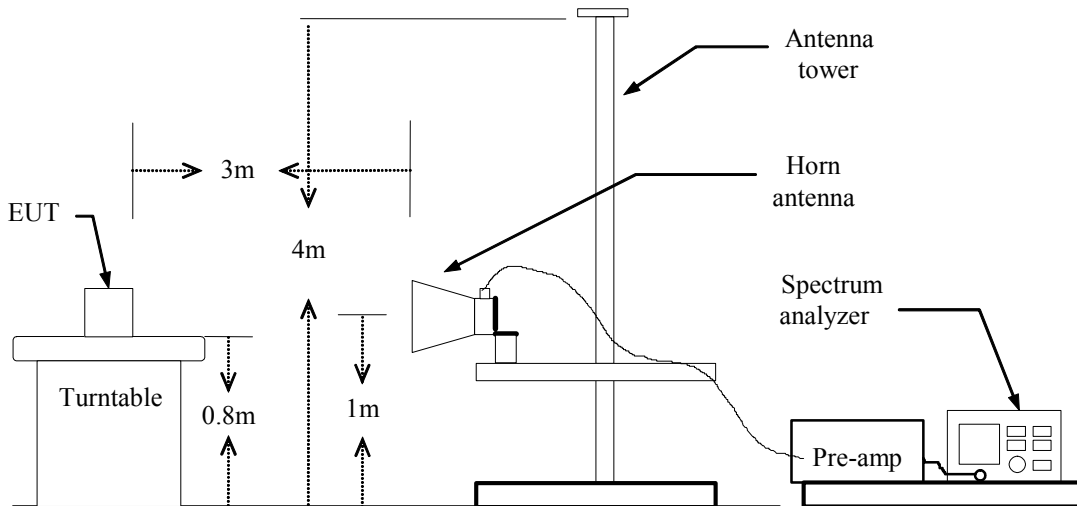



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted.



TEST DATA

Below 1 GHz

Operation Mode: Normal Link

Test Date: April 8, 2009

Temperature: 18°C

Tested by: Alonso Lu

Humidity: 60% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit 3m (dBUV/m)	Safe Margin (dB)
85.7750	V	Peak	47.72	-18.63	29.09	40.00	-10.91
211.8750	V	Peak	41.67	-14.43	27.24	43.50	-16.26
262.8000	V	Peak	44.24	-12.69	31.55	46.00	-14.45
316.1500	V	Peak	48.11	-12.34	35.77	46.00	-10.23
476.2000	V	Peak	44.41	-8.61	35.80	46.00	-10.20
529.5500	V	Peak	43.75	-8.63	35.12	46.00	-10.88
580.4750	V	Peak	40.26	-7.59	32.67	46.00	-13.33
105.1750	H	Peak	41.71	-16.18	25.53	43.50	-17.97
262.8000	H	Peak	36.63	-12.69	23.94	46.00	-22.06
318.5750	H	Peak	43.76	-12.34	31.42	46.00	-14.58
476.2000	H	Peak	38.22	-8.61	29.61	46.00	-16.39
529.5500	H	Peak	44.56	-8.63	35.93	46.00	-10.07
580.4750	H	Peak	46.78	-7.59	39.19	46.00	-6.81
740.5250	H	Peak	36.82	-3.36	33.46	46.00	-12.54

Remark:

1. No emission found between lowest internal used / generated frequency to 30 MHz. (9kHz ~ 30MHz)
2. Measuring frequencies from 30 MHz to the 1GHz.
3. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Above 1 GHz

Operation Mode: IEEE 802.11b / TX / CH Low

Test Date: April 13, 2009

Temperature: 17°C

Tested by: Alonso Lu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1863.33	V	53.29	---	-6.31	46.98	---	74.00	54.00	-7.02	Peak
2303.33	V	51.42	---	-4.84	46.58	---	74.00	54.00	-7.42	Peak
2560.00	V	50.74	---	-4.12	46.62	---	74.00	54.00	-7.38	Peak
4825.00	V	50.99	49.26	1.89	52.88	51.15	74.00	54.00	-2.85	AVG
N/A										
1486.67	H	50.19	---	-8.45	41.74	---	74.00	54.00	-12.26	Peak
1880.00	H	50.55	---	-6.22	44.34	---	74.00	54.00	-9.66	Peak
2306.67	H	51.44	---	-4.84	46.60	---	74.00	54.00	-7.40	Peak
2876.67	H	49.73	---	-2.67	47.06	---	74.00	54.00	-6.94	Peak
4825.00	H	44.65	---	1.89	46.53	---	74.00	54.00	-7.47	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11b / TX / CH Mid

Test Date: April 13, 2009

Temperature: 17°C

Tested by: Alonso Lu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1860.00	V	52.43	---	-6.33	46.10	---	74.00	54.00	-7.90	Peak
2130.00	V	50.14	---	-5.24	44.91	---	74.00	54.00	-9.09	Peak
2310.00	V	52.06	---	-4.83	47.23	---	74.00	54.00	-6.77	Peak
2493.33	V	51.22	---	-4.42	46.80	---	74.00	54.00	-7.20	Peak
4875.00	V	50.47	49.82	2.03	52.50	51.85	74.00	54.00	-2.15	Peak
5883.33	V	42.70	---	4.04	46.73	---	74.00	54.00	-7.27	Peak
1130.00	H	53.09	---	-10.10	42.99	---	74.00	54.00	-11.01	Peak
1396.67	H	51.67	---	-8.87	42.80	---	74.00	54.00	-11.20	Peak
2310.00	H	51.65	---	-4.83	46.82	---	74.00	54.00	-7.18	Peak
2533.33	H	50.36	---	-4.25	46.12	---	74.00	54.00	-7.88	Peak
4875.00	H	45.48	---	2.03	47.51	---	74.00	54.00	-6.49	Peak
6758.33	H	41.58	---	5.10	46.68	---	74.00	54.00	-7.32	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11b / TX / CH High

Test Date: April 13, 2009

Temperature: 17°C

Tested by: Alonso Lu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1860.00	V	52.47	---	-6.33	46.14	---	74.00	54.00	-7.86	Peak
2303.33	V	53.27	---	-4.84	48.43	---	74.00	54.00	-5.57	Peak
2393.33	V	51.94	---	-4.64	47.30	---	74.00	54.00	-6.70	Peak
2773.33	V	49.49	---	-3.14	46.35	---	74.00	54.00	-7.65	Peak
4925.00	V	50.22	49.51	2.18	52.40	51.69	74.00	54.00	-2.31	AVG
7391.67	V	42.58	---	6.84	49.42	---	74.00	54.00	-4.58	Peak
1586.67	H	50.50	---	-7.89	42.60	---	74.00	54.00	-11.40	Peak
2300.00	H	52.65	---	-4.85	47.80	---	74.00	54.00	-6.20	Peak
2616.67	H	49.78	---	-3.86	45.91	---	74.00	54.00	-8.09	Peak
4925.00	H	45.08	---	2.18	47.26	---	74.00	54.00	-6.74	Peak
7741.67	H	42.17	---	7.08	49.25	---	74.00	54.00	-4.75	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Compliance Certification Services Inc.

Report No: 90403108-RP1 FCC ID:GKR-BCM94312MCG Date of Issue: April 20, 2009

Operation Mode: IEEE 802.11g / TX / CH Low
Temperature: 17°C
Humidity: 53% RH

Test Date: April 13, 2009
Tested by: Alonso Lu
Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1860.00	V	52.75	---	-6.33	46.42	---	74.00	54.00	-7.58	Peak
2130.00	V	51.37	---	-5.24	46.14	---	74.00	54.00	-7.86	Peak
2293.33	V	51.95	---	-4.87	47.08	---	74.00	54.00	-6.92	Peak
2496.67	V	56.29	---	-4.41	51.88	---	74.00	54.00	-2.12	Peak
4825.00	V	44.93	---	1.89	46.81	---	74.00	54.00	-7.19	Peak
7241.67	V	53.03	29.61	6.44	59.47	36.05	74.00	54.00	-17.95	AVG
1673.33	H	51.34	---	-7.40	43.94	---	74.00	54.00	-10.06	Peak
2496.67	H	50.33	---	-4.41	45.93	---	74.00	54.00	-8.07	Peak
2756.67	H	49.56	---	-3.22	46.34	---	74.00	54.00	-7.66	Peak
4858.33	H	41.03	---	1.98	43.01	---	74.00	54.00	-10.99	Peak
7233.33	H	49.29	28.47	6.42	55.71	34.89	74.00	54.00	-19.11	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m)



Compliance Certification Services Inc.

Report No: 90403108-RP1 FCC ID:GKR-BCM94312MCG Date of Issue: April 20, 2009

Operation Mode: IEEE 802.11g / TX / CH Mid

Test Date: April 13, 2009

Temperature: 17°C

Tested by: Alonso Lu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1366.67	V	50.90	---	-9.01	41.89	---	74.00	54.00	-12.11	Peak
1863.33	V	51.97	---	-6.31	45.65	---	74.00	54.00	-8.35	Peak
2293.33	V	50.73	---	-4.87	45.86	---	74.00	54.00	-8.14	Peak
2496.67	V	54.41	---	-4.41	50.00	---	74.00	54.00	-4.00	Peak
4866.67	V	45.29	---	2.01	47.30	---	74.00	54.00	-6.70	Peak
7316.67	V	51.54	29.83	6.64	58.17	36.47	74.00	54.00	-17.53	AVG
1546.67	H	50.73	---	-8.12	42.61	---	74.00	54.00	-11.39	Peak
2300.00	H	50.31	---	-4.85	45.46	---	74.00	54.00	-8.54	Peak
2490.00	H	52.14	---	-4.42	47.72	---	74.00	54.00	-6.28	Peak
4750.00	H	41.93	---	1.67	43.60	---	74.00	54.00	-10.40	Peak
5750.00	H	41.45	---	3.80	45.26	---	74.00	54.00	-8.74	Peak
7300.00	H	46.87	28.13	6.59	53.47	34.72	74.00	54.00	-19.28	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11g / TX / CH High

Test Date: April 13, 2009

Temperature: 17°C

Tested by: Alonso Lu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1266.67	V	51.16	---	-9.47	41.69	---	74.00	54.00	-12.31	Peak
1860.00	V	52.51	---	-6.33	46.17	---	74.00	54.00	-7.83	Peak
2303.33	V	52.10	---	-4.84	47.26	---	74.00	54.00	-6.74	Peak
2860.00	V	49.53	---	-2.74	46.78	---	74.00	54.00	-7.22	Peak
4925.00	V	44.85	---	2.18	47.03	---	74.00	54.00	-6.97	Peak
7383.33	V	51.78	29.64	6.82	58.60	36.46	74.00	54.00	-17.54	AVG
1230.00	1230.00	51.42	---	-9.64	41.78	---	74.00	54.00	-12.22	Peak
2306.67	2306.67	52.63	---	-4.84	47.80	---	74.00	54.00	-6.20	Peak
2673.33	2673.33	49.56	---	-3.60	45.96	---	74.00	54.00	-8.04	Peak
4933.33	4933.33	42.29	---	2.20	44.50	---	74.00	54.00	-9.50	Peak
7383.33	7383.33	45.80	28.95	6.82	52.62	35.77	74.00	54.00	-18.23	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.6. POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



TEST DATA

Operation Mode: Normal Link
Temperature: 25°C
Humidity: 57% RH

Test Date: April 15, 2009
Tested by: Stan Lin

Table with 11 columns: Freq. (MHz), QP Reading (dBuV), AV Reading (dBuV), Corr. factor (dB), QP Result (dBuV), AV Result (dBuV), QP Limit (dBuV), AV Limit (dBuV), QP Margin (dB), AV Margin (dB), Note. It contains 18 rows of test data.


Remark:

- 1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plot

Conducted emissions (Line 1)

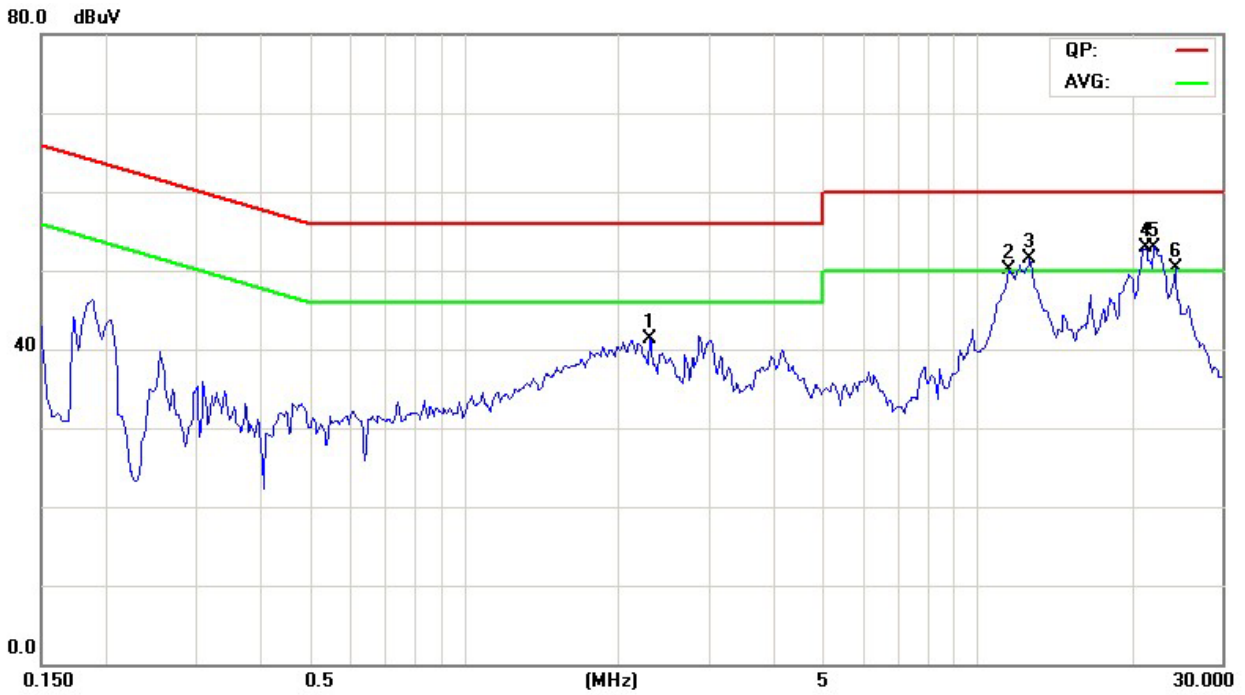

Conducted emissions (Line 2)

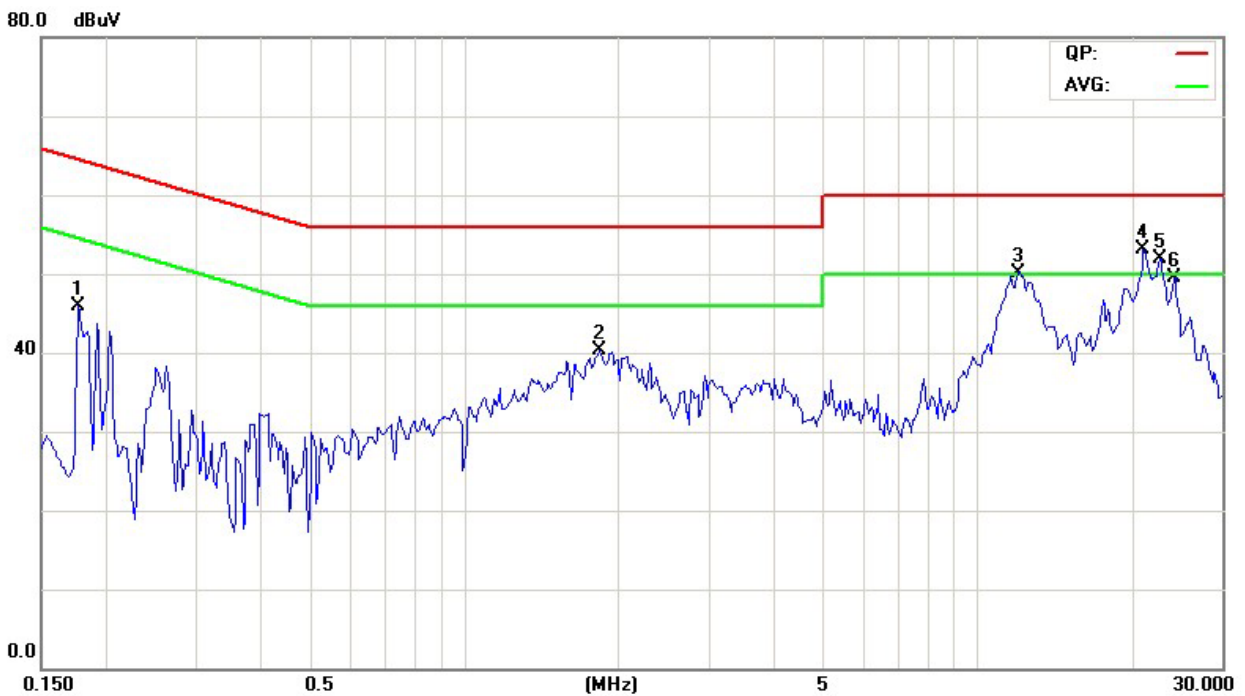



APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

EUT Specification

EUT	802.11b/g WIRELESS LAN PCI-E Minicard
Frequency band (Operating)	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input type="checkbox"/> Others
Device category	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm ²) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm ²)
Antenna diversity	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
Max. output power	IEEE 802.11b: 21.54 dBm (142.56mW) IEEE 802.11g: 21.59dBm (144.21mW)
Antenna gain (Max)	For Tyco Antenna 1.56 dBi (Numeric gain: 1.43) For WNC Antenna -1.06 dBi (Numeric gain: 0.78)
Evaluation applied	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

Remark:

1. The maximum output power is 21.59dBm (144.21mW) at 2437MHz (with 1.43numeric antenna gain.)
2. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.

TEST RESULTS

No non-compliance noted.

Remark: Please refer to the separated SAR report.