

FCC Test Report

(PART 27)

Report No.: RF180704C01-2

FCC ID: ZMOL850GLD

Test Model: L850-GL

Received Date: Jul. 04, 2018

Test Date: Jul. 10, 2018 ~ Jul. 16, 2018

Issued Date: Jul. 19, 2018

Applicant: Fibocom Wireless Inc.

Address: 5/F, Tower A, Technology Building II, 1057 Nanhai Blvd, Nanshan,
Shenzhen, China

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	13
3.5 General Description of Applied Standards	13
4 Test Types and Results	14
4.1 Output Power Measurement	14
4.1.1 Limits of Output Power Measurement	14
4.1.2 Test Procedures	14
4.1.3 Test Setup	14
4.1.4 Test Results	15
4.2 Modulation Characteristics Measurement	21
4.2.1 Limits of Modulation Characteristics	21
4.2.2 Test Setup	21
4.2.3 Test Procedure	21
4.2.4 Test Results	22
4.3 Frequency Stability Measurement	23
4.3.1 Limits of Frequency Stability Measurement	23
4.3.2 Test Procedure	23
4.3.3 Test Setup	23
4.3.4 Test Results	24
4.4 Occupied Bandwidth Measurement	36
4.4.1 Limits of Occupied Bandwidth Measurement	36
4.4.2 Test Procedure	36
4.4.3 Test Setup	36
4.4.4 Test Results	37
4.5 Out-of-Band Emissions Measurement	43
4.5.1 Limits of Out-of-Band Emissions Measurement	43
4.5.2 Test Setup	43
4.5.3 Test Procedures	43
4.5.4 Test Results	44
4.6 Peak to Average Ratio	68
4.6.1 Limits of Peak to Average Ratio Measurement	68
4.6.2 Test Setup	68
4.6.3 Test Procedures	68
4.6.4 Test Results	69
4.7 Conducted Spurious Emissions	75
4.7.1 Limits of Conducted Spurious Emissions Measurement	75
4.7.2 Test Setup	75
4.7.3 Test Procedure	75
4.7.4 Test Results	76
4.8 Radiated Emission Measurement	112
4.8.1 Limits of Radiated Emission Measurement	112
4.8.2 Test Procedure	112
4.8.3 Deviation from Test Standard	112
4.8.4 Test Setup	113

4.8.5 Test Results	114
5 Pictures of Test Arrangements.....	132
Appendix – Information on the Testing Laboratories	133



Release Control Record

Issue No.	Description	Date Issued
RF180704C01-2	Original Release	Jul. 19, 2018

1 Certificate of Conformity

Product: LTE module
Brand: Fibocom
Test Model: L850-GL
Sample Status: Identical Prototype
Applicant: Fibocom Wireless Inc.
Test Date: Jul. 10, 2018 ~ Jul. 16, 2018
Standards: FCC Part 27, Subpart C, M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Rona Chen, **Date:** Jul. 19, 2018
Rona Chen / Specialist

Approved by : Dylan Chiou, **Date:** Jul. 19, 2018
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(h)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
--	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(l)	Out-of-Band Emissions Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(m)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(m)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -3.45 dB at 7830.00 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY52220314	Nov. 24, 2017	Nov. 23, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 30, 2017	Nov. 29, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 184045	980116	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 13, 2017	Oct. 12, 2018
Power Meter Anritsu	ML2495A	1012010	Aug. 15, 2017	Aug. 14, 2018
Power Sensor Anritsu	MA2411B	1315050	Aug. 15, 2017	Aug. 14, 2018
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 29, 2018	Jun. 28, 2019

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is IC7450F-10.

3 General Information

3.1 General Description of EUT


Product	LTE module	
Brand	Fibocom	
Test Model	L850-GL	
Status of EUT	Identical Prototype	
Power Supply Rating	3.3 Vdc (Host equipment)	
Modulation Type	QPSK, 16QAM	
Frequency Range	LTE Band 7 (Channel Bandwidth: 5 MHz)	2502.5 ~ 2567.5 MHz
	LTE Band 7 (Channel Bandwidth: 10 MHz)	2505 ~ 2565 MHz
	LTE Band 7 (Channel Bandwidth: 15 MHz)	2507.5 ~ 2562.5 MHz
	LTE Band 7 (Channel Bandwidth: 20 MHz)	2510 ~ 2560 MHz
	LTE Band 38 (Channel Bandwidth: 5 MHz)	2572.5 ~ 2617.5 MHz
	LTE Band 38 (Channel Bandwidth: 10 MHz)	2575.0 ~ 2615.0 MHz
	LTE Band 38 (Channel Bandwidth: 15 MHz)	2577.5 ~ 2612.5 MHz
	LTE Band 38 (Channel Bandwidth: 20 MHz)	2580.0 ~ 2610.0 MHz
	LTE Band 41 (Channel Bandwidth: 5 MHz)	2498.5 ~ 2687.5 MHz
	LTE Band 41 (Channel Bandwidth: 10 MHz)	2501.0 ~ 2685.0 MHz
	LTE Band 41 (Channel Bandwidth: 15 MHz)	2503.5 ~ 2682.5 MHz
	LTE Band 41 (Channel Bandwidth: 20 MHz)	2506.0 ~ 2680.0 MHz
Max. EIRP Power	LTE Band 7 (Channel Bandwidth: 5 MHz)	755.09 mW
	LTE Band 7 (Channel Bandwidth: 10 MHz)	770.90 mW
	LTE Band 7 (Channel Bandwidth: 15 MHz)	785.24 mW
	LTE Band 7 (Channel Bandwidth: 20 MHz)	619.44 mW
	LTE Band 38 (Channel Bandwidth: 5 MHz)	584.79 mW
	LTE Band 38 (Channel Bandwidth: 10 MHz)	584.79 mW
	LTE Band 38 (Channel Bandwidth: 15 MHz)	597.04 mW
	LTE Band 38 (Channel Bandwidth: 20 MHz)	601.17 mW
	LTE Band 41 (Channel Bandwidth: 5 MHz)	610.94 mW
	LTE Band 41 (Channel Bandwidth: 10 MHz)	616.60 mW
	LTE Band 41 (Channel Bandwidth: 15 MHz)	626.61 mW
	LTE Band 41 (Channel Bandwidth: 20 MHz)	635.33 mW
Emission Designator	LTE Band 7 (Channel Bandwidth: 5 MHz)	4M50G7D
	LTE Band 7 (Channel Bandwidth: 10 MHz)	8M99G7D
	LTE Band 7 (Channel Bandwidth: 15 MHz)	13M48G7D
	LTE Band 7 (Channel Bandwidth: 20 MHz)	18M00G7D
	LTE Band 38 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 38 (Channel Bandwidth: 10 MHz)	8M99G7D
	LTE Band 38 (Channel Bandwidth: 15 MHz)	13M47G7D
	LTE Band 38 (Channel Bandwidth: 20 MHz)	17M97G7D
	LTE Band 41 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 41 (Channel Bandwidth: 10 MHz)	8M99G7D
	LTE Band 41 (Channel Bandwidth: 15 MHz)	13M48G7D
	LTE Band 41 (Channel Bandwidth: 20 MHz)	17M98G7D

Antenna Type	External Antenna with 5.0 dBi gain
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

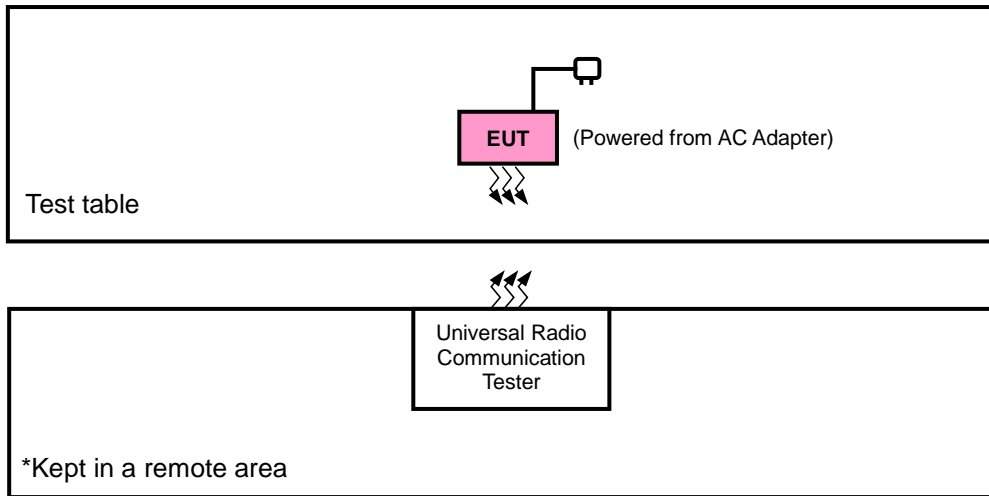

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	Radiated Emission
LTE Band 7	Z-axis
LTE Band 38	Z-axis
LTE Band 41	Z-axis

LTE Band 7

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	20850 to 21350	21100	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
-	Frequency Stability	20775 to 21425	20775, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK	1 RB / 24 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK	1 RB / 37 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK	1 RB / 50 RB Offset
-	Occupied Bandwidth	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Out-of-Band Emissions	20775 to 21425	20775, 21425	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Conducted Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK	1 RB / 24 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK	1 RB / 37 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK	1 RB / 50 RB Offset
-	Radiated Emission	20850 to 21350	20850, 21100 21350	20 MHz	QPSK	1 RB / 50 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 38

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	37850 to 38150	38000	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Frequency Stability	37775 to 38225	37775, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
		37800 to 38200	37800, 38200	10 MHz	QPSK	1 RB / 0 RB Offset
		37825 to 38175	37825, 38175	15 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Out-of-Band Emissions	37775 to 38225	37775, 38225	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		37800 to 38200	37800, 38200	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		37825 to 38175	37825, 38175	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Conducted Emission	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 41

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	39750 to 41490	40620	20 MHz	QPSK, 16QAM	1 RB / 50 RB Offset
-	Frequency Stability	39675 to 41565	39675, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39700 to 41540	39700, 41540	10 MHz	QPSK	1 RB / 24 RB Offset
		39725 to 41515	39725, 41515	15 MHz	QPSK	1 RB / 37 RB Offset
		39750 to 41490	39750, 41490	20 MHz	QPSK	1 RB / 50 RB Offset
-	Occupied Bandwidth	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Out-of-Band Emissions	39675 to 41565	39675, 41565	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 41540	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		39725 to 41515	39725, 41515	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		39750 to 41490	39750, 41490	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Conducted Emission	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK	1 RB / 24 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK	1 RB / 37 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK	1 RB / 50 RB Offset
-	Radiated Emission	39750 to 41490	39750, 40620, 41490	20 MHz	QPSK	1 RB / 50 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	3.3 Vdc	Getaz Yang
Modulation Characteristics	25 deg. C, 65 % RH	3.3 Vdc	Getaz Yang
Frequency Stability	25 deg. C, 65 % RH	3.3 Vdc	Getaz Yang
Occupied Bandwidth	25 deg. C, 65 % RH	3.3 Vdc	Getaz Yang
Out-of-Band Emissions	25 deg. C, 65 % RH	3.3 Vdc	Getaz Yang
Peak to Average Ratio	25 deg. C, 65 % RH	3.3 Vdc	Getaz Yang
Conducted Emission	25 deg. C, 65 % RH	3.3 Vdc	Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Thomas Wei

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 Test Procedures

Conducted Power Measurement:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

EIRP / ERP Measurement:

- EIRP = Conducted Output power level + Antenna gain.
- ERP power can be calculated form EIRP power by subtracting the gain of dipole, ERP power = EIPR power - 2.15dBi.
- ERP = Conducted Output power level + Antenna gain (dBi) - Isotropically Factor (2.15dB)

4.1.3 Test Setup



4.1.4 Test Results

Conducted Output Power (dBm)

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20775	Mid Ch 21100	High Ch 21425		Low Ch 20775	Mid Ch 21100	High Ch 21425	
			2502.5 MHz	2535.0 MHz	2567.5 MHz		2502.5 MHz	2535.0 MHz	2567.5 MHz	
7 / 5M	1	0	23.62	23.78	23.46	0	22.64	22.71	22.47	1
	1	12	23.56	23.67	23.36	0	22.52	22.64	22.37	1
	1	24	23.40	23.45	23.21	0	22.40	22.50	22.26	1
	12	0	22.61	22.67	22.42	1	21.54	21.56	21.29	2
	12	6	22.30	22.50	22.20	1	21.25	21.49	21.13	2
	12	13	22.32	22.43	22.08	1	21.16	21.43	21.08	2
	25	0	22.43	22.63	22.37	1	21.51	21.59	21.41	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20800	Mid Ch 21100	High Ch 21400		Low Ch 20800	Mid Ch 21100	High Ch 21400	
			2505.0 MHz	2535.0 MHz	2565.0 MHz		2505.0 MHz	2535.0 MHz	2565.0 MHz	
7 / 10M	1	0	23.73	23.87	23.53	0	22.74	22.84	22.47	1
	1	24	23.59	23.69	23.43	0	22.50	22.69	22.43	1
	1	49	23.38	23.56	23.24	0	22.27	22.43	22.23	1
	25	0	22.62	22.77	22.45	1	21.54	21.73	21.35	2
	25	12	22.42	22.60	22.22	1	21.37	21.55	21.22	2
	25	25	22.34	22.49	22.16	1	21.33	21.42	21.07	2
	50	0	22.61	22.64	22.46	1	21.43	21.66	21.42	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20825	Mid Ch 21100	High Ch 21375		Low Ch 20825	Mid Ch 21100	High Ch 21375	
			2507.5 MHz	2535.0 MHz	2562.5 MHz		2507.5 MHz	2535.0 MHz	2562.5 MHz	
7 / 15M	1	0	23.76	23.95	23.66	0	22.67	22.83	22.63	1
	1	37	23.65	23.78	23.48	0	22.57	22.75	22.48	1
	1	74	23.53	23.59	23.33	0	22.41	22.62	22.28	1
	36	0	22.67	22.82	22.57	1	21.45	21.74	21.29	2
	36	19	22.42	22.67	22.35	1	21.38	21.63	21.24	2
	36	39	22.37	22.60	22.31	1	21.31	21.52	21.13	2
	75	0	22.62	22.73	22.42	1	21.56	21.72	21.43	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20850	Mid Ch 21100	High Ch 21350		Low Ch 20850	Mid Ch 21100	High Ch 21350	
			2510.0 MHz	2535.0 MHz	2560.0 MHz		2510.0 MHz	2535.0 MHz	2560.0 MHz	
7 / 20M	1	0	22.78	22.92	22.59	0	22.73	22.97	22.64	1
	1	50	23.68	23.84	23.59	0	22.62	22.85	22.54	1
	1	99	23.58	23.62	23.32	0	22.45	22.63	22.37	1
	50	0	22.67	22.82	22.60	1	21.67	21.79	21.47	2
	50	25	22.47	22.65	22.42	1	21.43	21.58	21.32	2
	50	50	22.41	22.55	22.37	1	21.32	21.51	21.24	2
	100	0	22.70	22.82	22.50	1	21.52	21.78	21.43	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 37775	Mid Ch 38000	High Ch 38225		Low Ch 37775	Mid Ch 38000	High Ch 38225	
			2572.5 MHz	2595.0 MHz	2617.5 MHz		2572.5 MHz	2595.0 MHz	2617.5 MHz	
38 / 5M	1	0	22.53	22.56	22.67	0	21.29	21.33	21.43	1
	1	12	22.36	22.38	22.52	0	21.35	21.39	21.34	1
	1	24	22.31	22.20	22.38	0	21.27	21.22	21.30	1
	12	0	21.41	21.47	21.54	1	20.40	20.20	20.25	2
	12	6	21.27	21.32	21.33	1	20.23	20.19	20.27	2
	12	13	21.16	21.12	21.24	1	20.10	20.06	20.16	2
	25	0	21.28	21.50	21.50	1	20.36	20.38	20.47	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 37800	Mid Ch 38000	High Ch 38200		Low Ch 37800	Mid Ch 38000	High Ch 38200	
			2575.0 MHz	2595.0 MHz	2615.0 MHz		2575.0 MHz	2595.0 MHz	2615.0 MHz	
38 / 10M	1	0	22.56	22.65	22.67	0	21.31	21.51	21.47	1
	1	24	22.51	22.44	22.56	0	21.41	21.50	21.50	1
	1	49	22.26	22.33	22.43	0	21.23	21.29	21.38	1
	25	0	21.41	21.51	21.50	1	20.47	20.33	20.40	2
	25	12	21.25	21.32	21.26	1	20.21	20.25	20.32	2
	25	25	21.09	21.24	21.27	1	20.21	20.16	20.25	2
	50	0	21.36	21.54	21.54	1	20.28	20.44	20.46	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 37825	Mid Ch 38000	High Ch 38175		Low Ch 37825	Mid Ch 38000	High Ch 38175	
			2577.5 MHz	2595.0 MHz	2612.5 MHz		2577.5 MHz	2595.0 MHz	2612.5 MHz	
38 / 15M	1	0	22.61	22.68	22.76	0	21.46	21.55	21.62	1
	1	37	22.54	22.56	22.65	0	21.46	21.50	21.54	1
	1	74	22.23	22.28	22.50	0	21.37	21.41	21.43	1
	36	0	21.53	21.52	21.60	1	20.32	20.32	20.51	2
	36	19	21.32	21.36	21.46	1	20.21	20.33	20.35	2
	36	39	21.31	21.25	21.37	1	20.07	20.15	20.20	2
	75	0	21.39	21.53	21.57	1	20.38	20.49	20.50	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 37850	Mid Ch 38000	High Ch 38150		Low Ch 37850	Mid Ch 38000	High Ch 38150	
			2580.0 MHz	2595.0 MHz	2610.0 MHz		2580.0 MHz	2595.0 MHz	2610.0 MHz	
38 / 20M	1	0	22.68	22.73	22.79	0	21.67	21.64	21.70	1
	1	50	22.57	22.61	22.68	0	21.49	21.58	21.61	1
	1	99	22.38	22.40	22.50	0	21.31	21.38	21.38	1
	50	0	21.52	21.62	21.64	1	20.53	20.44	20.57	2
	50	25	21.32	21.44	21.44	1	20.33	20.34	20.44	2
	50	50	21.22	21.38	21.36	1	20.25	20.30	20.29	2
	100	0	21.55	21.57	21.63	1	20.55	20.51	20.57	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 39715	Mid Ch 40620	High Ch 41565		Low Ch 39715	Mid Ch 40620	High Ch 41565	
			2502.5 MHz	2593.0 MHz	2687.5 MHz		2502.5 MHz	2593.0 MHz	2687.5 MHz	
41 / 5M	1	0	22.51	22.86	22.70	0	21.32	21.67	21.40	1
	1	12	22.39	22.73	22.58	0	21.43	21.63	21.49	1
	1	24	22.15	22.53	22.50	0	21.24	21.48	21.37	1
	12	0	21.42	21.72	21.59	1	20.39	20.62	20.61	2
	12	6	21.18	21.51	21.42	1	20.34	20.51	20.45	2
	12	13	21.12	21.40	21.31	1	20.13	20.44	20.18	2
	25	0	21.36	21.67	21.55	1	20.34	20.70	20.49	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 39740	Mid Ch 40620	High Ch 41540		Low Ch 39740	Mid Ch 40620	High Ch 41540	
			2505.0 MHz	2593.0 MHz	2685.0 MHz		2505.0 MHz	2593.0 MHz	2685.0 MHz	
41 / 10M	1	0	21.59	22.90	22.73	0	21.45	21.76	21.56	1
	1	24	21.47	22.80	22.63	0	21.44	21.72	21.69	1
	1	49	21.23	22.64	22.50	0	21.40	21.68	21.37	1
	25	0	21.44	21.77	21.62	1	20.33	20.62	20.66	2
	25	12	21.26	21.58	21.46	1	20.24	20.60	20.34	2
	25	25	21.13	21.48	21.40	1	20.12	20.43	20.40	2
	50	0	21.42	21.82	21.54	1	20.51	20.67	20.57	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 39765	Mid Ch 40620	High Ch 41515		Low Ch 39765	Mid Ch 40620	High Ch 41515	
			2507.5 MHz	2593.0 MHz	2682.5 MHz		2507.5 MHz	2593.0 MHz	2682.5 MHz	
41 / 15M	1	0	21.68	22.97	22.80	0	21.58	21.82	21.69	1
	1	37	21.53	22.84	22.72	0	21.56	21.71	21.72	1
	1	74	21.42	22.66	22.55	0	21.29	21.53	21.48	1
	36	0	21.44	21.86	21.72	1	20.57	20.85	20.62	2
	36	19	21.36	21.73	21.51	1	20.33	20.64	20.44	2
	36	39	21.24	21.63	21.43	1	20.35	20.47	20.36	2
	75	0	21.45	21.77	21.68	1	20.57	20.83	20.59	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 39790	Mid Ch 40620	High Ch 41490		Low Ch 39790	Mid Ch 40620	High Ch 41490	
			2510.0 MHz	2593.0 MHz	2680.0 MHz		2510.0 MHz	2593.0 MHz	2680.0 MHz	
41 / 20M	1	0	21.71	23.03	22.88	0	21.70	22.02	21.86	1
	1	50	21.55	22.93	22.76	0	21.63	21.81	21.73	1
	1	99	21.42	22.79	22.50	0	21.41	21.63	21.57	1
	50	0	21.61	21.89	21.75	1	20.47	20.79	20.68	2
	50	25	21.39	21.72	21.58	1	20.40	20.62	20.46	2
	50	50	21.36	21.66	21.51	1	20.29	20.49	20.44	2
	100	0	21.55	21.87	21.73	1	20.64	20.81	20.70	2

EIRP Power (dBm)

Note: EIRP (dBm) = Max. Conducted Power (dBm) + Gain (dBi)

Band 7 / 5M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch 20775	Mid Ch 21100	High Ch 21425	Low Ch 20775	Mid Ch 21100	High Ch 21425
	2502.5 MHz	2535.0 MHz	2567.5 MHz	2502.5 MHz	2535.0 MHz	2567.5 MHz
Max. Cond. Power (dBm)	23.62	23.78	23.46	22.64	22.71	22.47
Max. EIRP Power (dBm)	28.62	28.78	28.46	27.64	27.71	27.47
Max. EIRP Power (mW)	727.78	755.09	701.46	580.76	590.20	558.47

Band 7 / 10M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch 20800	Mid Ch 21100	High Ch 21400	Low Ch 20800	Mid Ch 21100	High Ch 21400
	2505.0 MHz	2535.0 MHz	2565.0 MHz	2505.0 MHz	2535.0 MHz	2565.0 MHz
Max. Cond. Power (dBm)	23.73	23.87	23.53	22.74	22.84	22.47
Max. EIRP Power (dBm)	28.73	28.87	28.53	27.74	27.84	27.47
Max. EIRP Power (mW)	746.45	770.90	712.85	594.29	608.14	558.47

Band 7 / 15M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch 20825	Mid Ch 21100	High Ch 21375	Low Ch 20825	Mid Ch 21100	High Ch 21375
	2507.5 MHz	2535.0 MHz	2562.5 MHz	2507.5 MHz	2535.0 MHz	2562.5 MHz
Max. Cond. Power (dBm)	23.76	23.95	23.66	22.67	22.83	22.63
Max. EIRP Power (dBm)	28.76	28.95	28.66	27.67	27.83	27.63
Max. EIRP Power (mW)	751.62	785.24	734.51	584.79	606.74	579.43

Band 7 / 20M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch 20850	Mid Ch 21100	High Ch 21350	Low Ch 20850	Mid Ch 21100	High Ch 21350
	2510.0 MHz	2535.0 MHz	2560.0 MHz	2510.0 MHz	2535.0 MHz	2560.0 MHz
Max. Cond. Power (dBm)	22.78	22.92	22.59	22.73	22.97	22.64
Max. EIRP Power (dBm)	27.78	27.92	27.59	27.73	27.97	27.64
Max. EIRP Power (mW)	599.79	619.44	574.12	592.93	626.61	580.76

Band 38 / 5M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch	Mid Ch	High Ch	Low Ch	Mid Ch	High Ch
	37775	38000	38225	37775	38000	38225
2572.5 MHz	2595.0 MHz	2617.5 MHz	2572.5 MHz	2595.0 MHz	2617.5 MHz	
Max. Cond. Power (dBm)	22.53	22.56	22.67	21.29	21.33	21.43
Max. EIRP Power (dBm)	27.53	27.56	27.67	26.29	26.33	26.43
Max. EIRP Power (mW)	566.24	570.16	584.79	425.60	429.54	439.54

Band 38 / 10M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch	Mid Ch	High Ch	Low Ch	Mid Ch	High Ch
	37800	38000	38200	37800	38000	38200
2575.0 MHz	2595.0 MHz	2615.0 MHz	2575.0 MHz	2595.0 MHz	2615.0 MHz	
Max. Cond. Power (dBm)	22.56	22.65	22.67	21.31	21.51	21.47
Max. EIRP Power (dBm)	27.56	27.65	27.67	26.31	26.51	26.47
Max. EIRP Power (mW)	570.16	582.10	584.79	427.56	447.71	443.61

Band 38 / 15M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch	Mid Ch	High Ch	Low Ch	Mid Ch	High Ch
	37825	38000	38175	37825	38000	38175
2577.5 MHz	2595.0 MHz	2612.5 MHz	2577.5 MHz	2595.0 MHz	2612.5 MHz	
Max. Cond. Power (dBm)	22.61	22.68	22.76	21.46	21.55	21.62
Max. EIRP Power (dBm)	27.61	27.68	27.76	26.46	26.55	26.62
Max. EIRP Power (mW)	576.77	586.14	597.04	442.59	451.86	459.20

Band 38 / 20M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch	Mid Ch	High Ch	Low Ch	Mid Ch	High Ch
	37850	38000	38150	37850	38000	38150
2580.0 MHz	2595.0 MHz	2610.0 MHz	2580.0 MHz	2595.0 MHz	2610.0 MHz	
Max. Cond. Power (dBm)	22.68	22.73	22.79	21.67	21.64	21.70
Max. EIRP Power (dBm)	27.68	27.73	27.79	26.67	26.64	26.70
Max. EIRP Power (mW)	586.14	592.93	601.17	464.52	461.32	467.74

Band 41 / 5M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch 39675	Mid Ch 40620	High Ch 41565	Low Ch 39675	Mid Ch 40620	High Ch 41565
	2498.5 MHz	2593.0 MHz	2687.5 MHz	2498.5 MHz	2593.0 MHz	2687.5 MHz
Max. Cond. Power (dBm)	22.55	22.86	22.70	21.32	21.67	21.40
Max. EIRP Power (dBm)	27.55	27.86	27.70	26.32	26.67	26.40
Max. EIRP Power (mW)	568.85	610.94	588.84	428.55	464.52	436.52

Band 41 / 10M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch 39700	Mid Ch 40620	High Ch 41540	Low Ch 39700	Mid Ch 40620	High Ch 41540
	2501.0 MHz	2593.0 MHz	2685.0 MHz	2501.0 MHz	2593.0 MHz	2685.0 MHz
Max. Cond. Power (dBm)	22.64	22.90	22.73	21.45	21.76	21.56
Max. EIRP Power (dBm)	27.64	27.90	27.73	26.45	26.76	26.56
Max. EIRP Power (mW)	580.76	616.60	592.93	441.57	474.24	452.90

Band 41 / 15M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch 39725	Mid Ch 40620	High Ch 41515	Low Ch 39725	Mid Ch 40620	High Ch 41515
	2503.5 MHz	2593.0 MHz	2682.5 MHz	2503.5 MHz	2593.0 MHz	2682.5 MHz
Max. Cond. Power (dBm)	22.72	22.97	22.80	21.58	21.82	21.69
Max. EIRP Power (dBm)	27.72	27.97	27.80	26.58	26.82	26.69
Max. EIRP Power (mW)	591.56	626.61	602.56	454.99	480.84	466.66

Band 41 / 20M, 1RB#0						
Test Mode	QPSK			16QAM		
	Low Ch 39750	Mid Ch 40620	High Ch 41490	Low Ch 39750	Mid Ch 40620	High Ch 41490
	2506.0 MHz	2593.0 MHz	2680.0 MHz	2506.0 MHz	2593.0 MHz	2680.0 MHz
Max. Cond. Power (dBm)	22.76	23.03	22.88	21.70	22.02	21.86
Max. EIRP Power (dBm)	27.76	28.03	27.88	26.70	27.02	26.86
Max. EIRP Power (mW)	597.04	635.33	613.76	467.74	503.50	485.29

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A




4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

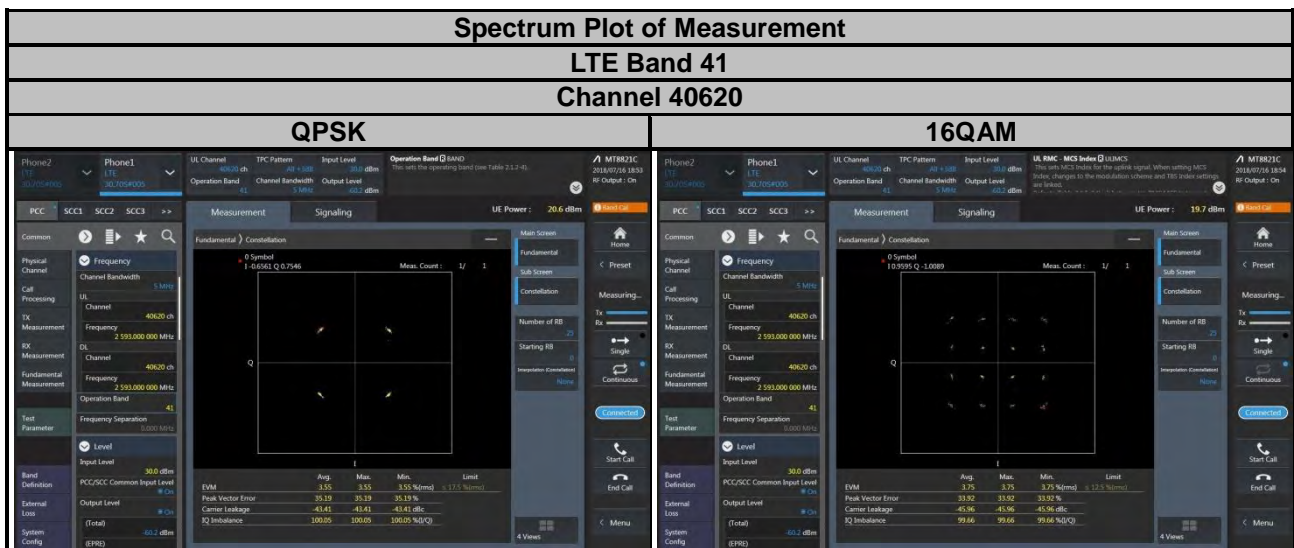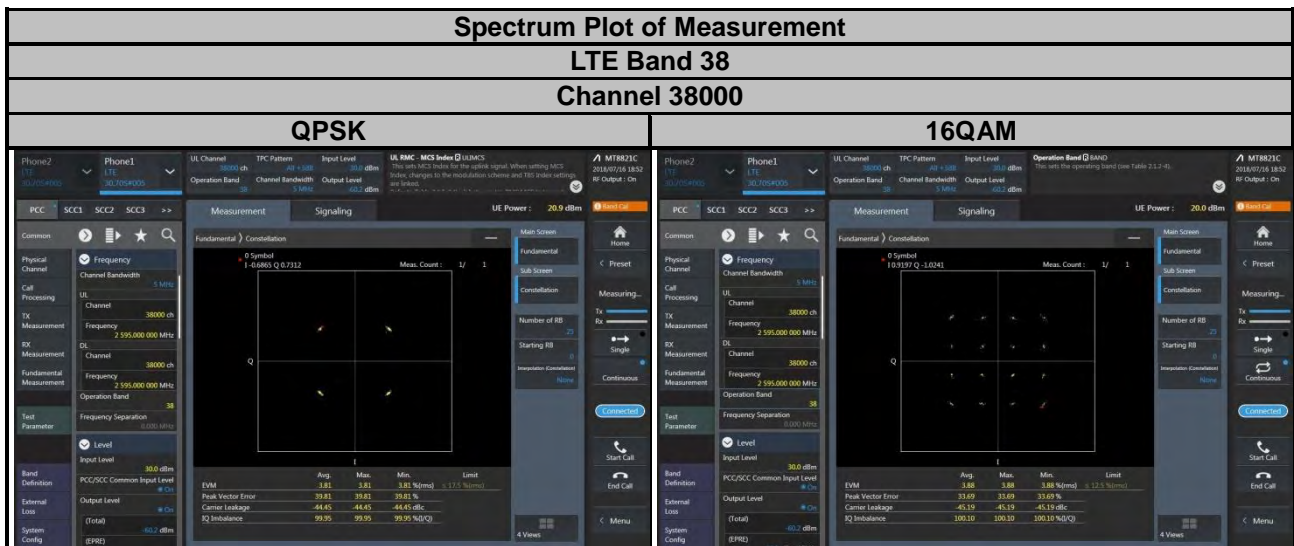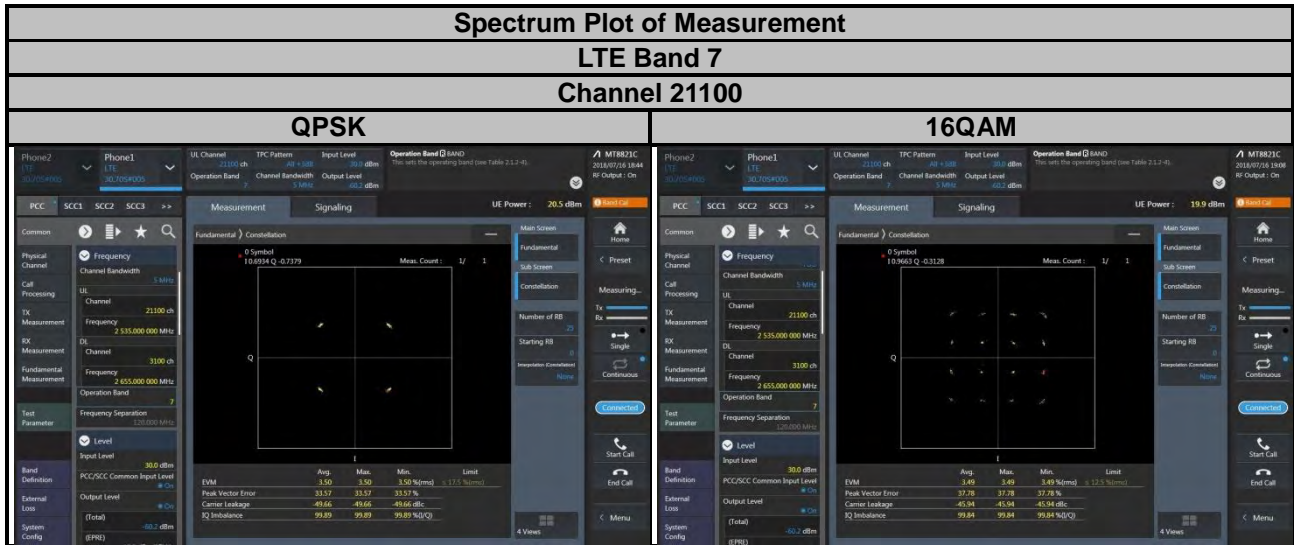

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

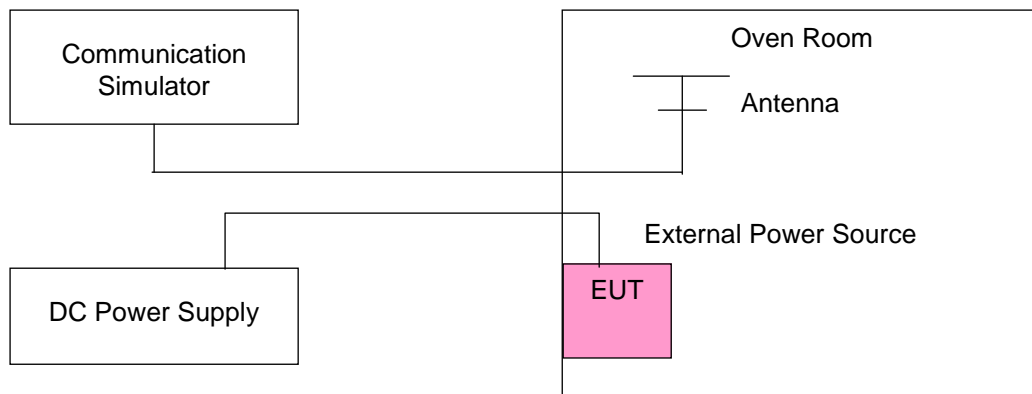

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2502.500003	0.001	2567.500001	0.000	2.5
3.135	2502.500003	0.001	2567.500002	0.001	2.5
4.4	2502.500004	0.002	2567.500003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2502.500003	0.001	2567.500002	0.001	2.5
-20	2502.500001	0.000	2567.500003	0.001	2.5
-10	2502.500001	0.001	2567.500004	0.002	2.5
0	2502.500004	0.001	2567.500002	0.001	2.5
10	2502.500003	0.001	2567.500002	0.001	2.5
20	2502.499998	-0.001	2567.499999	0.000	2.5
30	2502.499997	-0.001	2567.499996	-0.001	2.5
40	2502.499999	0.000	2567.499996	-0.001	2.5
50	2502.499998	-0.001	2567.499997	-0.001	2.5
55	2502.499997	-0.001	2567.499998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2505.000002	0.001	2565.000003	0.001	2.5
3.135	2505.000002	0.001	2565.000003	0.001	2.5
4.4	2505.000004	0.001	2565.000003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2505.000003	0.001	2565.000003	0.001	2.5
-20	2505.000003	0.001	2565.000003	0.001	2.5
-10	2505.000004	0.002	2565.000002	0.001	2.5
0	2505.000003	0.001	2565.000003	0.001	2.5
10	2505.000002	0.001	2565.000001	0.001	2.5
20	2504.999996	-0.001	2564.999998	-0.001	2.5
30	2504.999997	-0.001	2564.999996	-0.002	2.5
40	2504.999997	-0.001	2564.999997	-0.001	2.5
50	2504.999997	-0.001	2564.999997	-0.001	2.5
55	2504.999997	-0.001	2564.999997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2507.500004	0.001	2562.500002	0.001	2.5
3.135	2507.500002	0.001	2562.500002	0.001	2.5
4.4	2507.500002	0.001	2562.500003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2507.500004	0.002	2562.500003	0.001	2.5
-20	2507.500004	0.001	2562.500001	0.001	2.5
-10	2507.500002	0.001	2562.500003	0.001	2.5
0	2507.500001	0.000	2562.500004	0.001	2.5
10	2507.500002	0.001	2562.500003	0.001	2.5
20	2507.499997	-0.001	2562.499999	-0.001	2.5
30	2507.499999	0.000	2562.499998	-0.001	2.5
40	2507.499996	-0.001	2562.499998	-0.001	2.5
50	2507.499997	-0.001	2562.499998	-0.001	2.5
55	2507.499998	-0.001	2562.499997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2510.000004	0.002	2560.000002	0.001	2.5
3.135	2510.000004	0.001	2560.000002	0.001	2.5
4.4	2510.000002	0.001	2560.000002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2510.000004	0.001	2560.000004	0.001	2.5
-20	2510.000003	0.001	2560.000004	0.001	2.5
-10	2510.000004	0.002	2560.000004	0.001	2.5
0	2510.000003	0.001	2560.000002	0.001	2.5
10	2510.000003	0.001	2560.000002	0.001	2.5
20	2509.999999	0.000	2559.999997	-0.001	2.5
30	2509.999998	-0.001	2559.999997	-0.001	2.5
40	2509.999996	-0.002	2559.999998	-0.001	2.5
50	2509.999997	-0.001	2559.999998	-0.001	2.5
55	2509.999999	-0.001	2559.999997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2572.500003	0.001	2617.500003	0.001	2.5
3.135	2572.500002	0.001	2617.500001	0.000	2.5
4.4	2572.500002	0.001	2617.500003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2572.500004	0.002	2617.500002	0.001	2.5
-20	2572.500002	0.001	2617.500002	0.001	2.5
-10	2572.500004	0.001	2617.500003	0.001	2.5
0	2572.500003	0.001	2617.500003	0.001	2.5
10	2572.500002	0.001	2617.500003	0.001	2.5
20	2572.499997	-0.001	2617.499999	0.000	2.5
30	2572.499998	-0.001	2617.499999	0.000	2.5
40	2572.499998	-0.001	2617.499997	-0.001	2.5
50	2572.499997	-0.001	2617.499997	-0.001	2.5
55	2572.499997	-0.001	2617.499997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2575.000001	0.001	2615.000002	0.001	2.5
3.135	2575.000001	0.001	2615.000003	0.001	2.5
4.4	2575.000002	0.001	2615.000002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2575.000002	0.001	2615.000001	0.000	2.5
-20	2575.000003	0.001	2615.000003	0.001	2.5
-10	2575.000002	0.001	2615.000001	0.000	2.5
0	2575.000003	0.001	2615.000002	0.001	2.5
10	2575.000002	0.001	2615.000003	0.001	2.5
20	2574.999999	0.000	2614.999999	-0.001	2.5
30	2574.999998	-0.001	2614.999998	-0.001	2.5
40	2574.999998	-0.001	2614.999997	-0.001	2.5
50	2574.999996	-0.002	2614.999997	-0.001	2.5
55	2574.999998	-0.001	2614.999998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2577.500002	0.001	2612.500001	0.000	2.5
3.135	2577.500003	0.001	2612.500003	0.001	2.5
4.4	2577.500002	0.001	2612.500001	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2577.500003	0.001	2612.500002	0.001	2.5
-20	2577.500003	0.001	2612.500004	0.001	2.5
-10	2577.500004	0.001	2612.500001	0.001	2.5
0	2577.500002	0.001	2612.500003	0.001	2.5
10	2577.500001	0.000	2612.500003	0.001	2.5
20	2577.499997	-0.001	2612.499996	-0.001	2.5
30	2577.499996	-0.001	2612.499998	-0.001	2.5
40	2577.499999	-0.001	2612.499997	-0.001	2.5
50	2577.499999	0.000	2612.499997	-0.001	2.5
55	2577.499997	-0.001	2612.499998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2580.000004	0.002	2610.000004	0.001	2.5
3.135	2580.000003	0.001	2610.000002	0.001	2.5
4.4	2580.000002	0.001	2610.000001	0.000	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2580.000004	0.002	2610.000004	0.001	2.5
-20	2580.000003	0.001	2610.000001	0.000	2.5
-10	2580.000003	0.001	2610.000001	0.000	2.5
0	2580.000002	0.001	2610.000002	0.001	2.5
10	2580.000003	0.001	2610.000001	0.000	2.5
20	2579.999997	-0.001	2609.999997	-0.001	2.5
30	2579.999998	-0.001	2609.999998	-0.001	2.5
40	2579.999999	0.000	2609.999998	-0.001	2.5
50	2579.999996	-0.001	2609.999997	-0.001	2.5
55	2579.999997	-0.001	2609.999996	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2498.500002	0.001	2687.500003	0.001	2.5
3.135	2498.500003	0.001	2687.500002	0.001	2.5
4.4	2498.500003	0.001	2687.500003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2498.500003	0.001	2687.500003	0.001	2.5
-20	2498.500002	0.001	2687.500002	0.001	2.5
-10	2498.500002	0.001	2687.500003	0.001	2.5
0	2498.500004	0.002	2687.500001	0.000	2.5
10	2498.500002	0.001	2687.500002	0.001	2.5
20	2498.499998	-0.001	2687.499997	-0.001	2.5
30	2498.499999	0.000	2687.499999	0.000	2.5
40	2498.499998	-0.001	2687.499997	-0.001	2.5
50	2498.499999	-0.001	2687.499998	-0.001	2.5
55	2498.499998	-0.001	2687.499997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2501.000002	0.001	2685.000004	0.001	2.5
3.135	2501.000003	0.001	2685.000001	0.000	2.5
4.4	2501.000002	0.001	2685.000002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2501.000003	0.001	2685.000002	0.001	2.5
-20	2501.000004	0.002	2685.000004	0.001	2.5
-10	2501.000001	0.001	2685.000001	0.000	2.5
0	2501.000002	0.001	2685.000002	0.001	2.5
10	2501.000002	0.001	2685.000001	0.000	2.5
20	2500.999997	-0.001	2684.999999	0.000	2.5
30	2500.999999	0.000	2684.999997	-0.001	2.5
40	2500.999998	-0.001	2684.999998	-0.001	2.5
50	2500.999996	-0.002	2684.999996	-0.001	2.5
55	2500.999999	0.000	2684.999997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2503.500002	0.001	2682.500001	0.001	2.5
3.135	2503.500001	0.001	2682.500001	0.000	2.5
4.4	2503.500003	0.001	2682.500001	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2503.500002	0.001	2682.500002	0.001	2.5
-20	2503.500001	0.001	2682.500001	0.000	2.5
-10	2503.500003	0.001	2682.500001	0.001	2.5
0	2503.500004	0.002	2682.500003	0.001	2.5
10	2503.500002	0.001	2682.500002	0.001	2.5
20	2503.499997	-0.001	2682.499999	0.000	2.5
30	2503.499998	-0.001	2682.499998	-0.001	2.5
40	2503.499996	-0.002	2682.499997	-0.001	2.5
50	2503.499999	-0.001	2682.499998	-0.001	2.5
55	2503.499998	-0.001	2682.499997	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.3	2506.000002	0.001	2680.000001	0.000	2.5
3.135	2506.000002	0.001	2680.000003	0.001	2.5
4.4	2506.000003	0.001	2680.000002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	2506.000003	0.001	2680.000004	0.001	2.5
-20	2506.000003	0.001	2680.000001	0.000	2.5
-10	2506.000002	0.001	2680.000002	0.001	2.5
0	2506.000002	0.001	2680.000002	0.001	2.5
10	2506.000003	0.001	2680.000003	0.001	2.5
20	2505.999997	-0.001	2679.999997	-0.001	2.5
30	2505.999997	-0.001	2679.999997	-0.001	2.5
40	2505.999997	-0.001	2679.999998	-0.001	2.5
50	2505.999997	-0.001	2679.999998	-0.001	2.5
55	2505.999999	0.000	2679.999997	-0.001	2.5

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.3 Test Setup

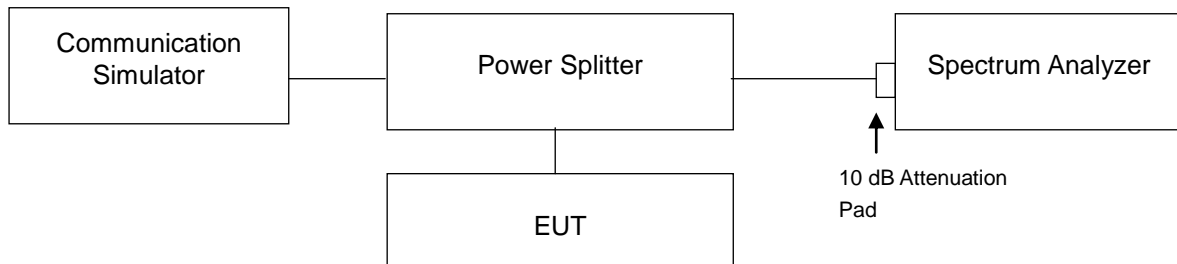

4.4.4 Test Results


LTE Band 7							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20775	2502.5	4.50	4.50	20800	2505.0	8.99	8.99
21100	2535.0	4.50	4.50	21100	2535.0	8.99	8.99
21425	2567.5	4.50	4.50	21400	2565.0	8.99	8.98

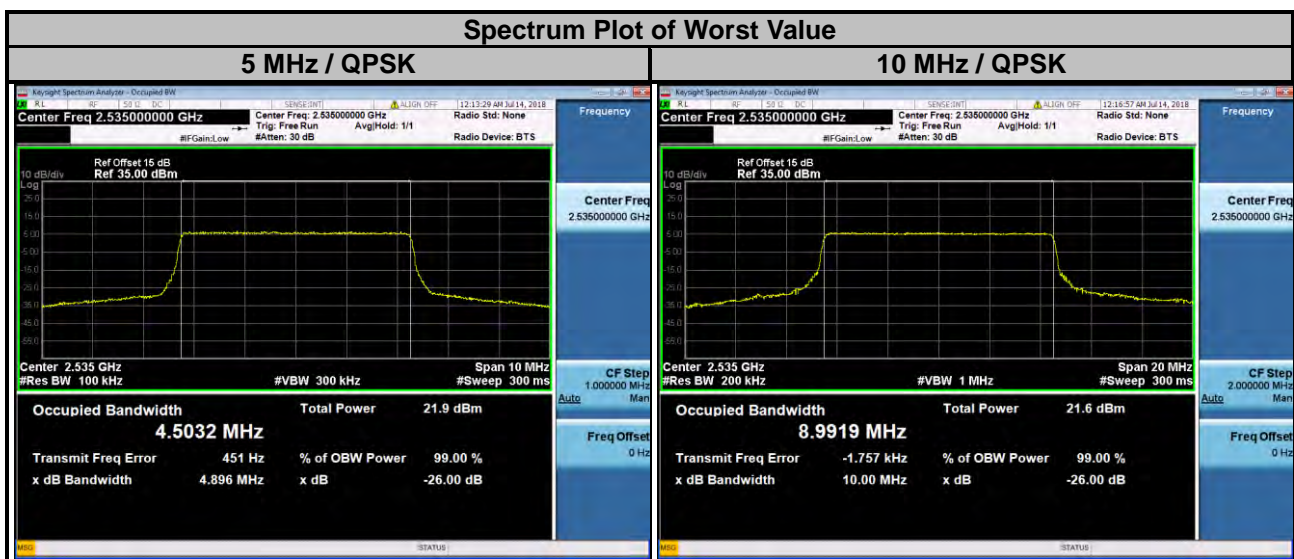

LTE Band 7

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20825	2507.5	13.46	13.46	20850	2510.0	17.94	17.95
21100	2535.0	13.48	13.48	21100	2535.0	18.00	18.00
21375	2562.5	13.45	13.45	21350	2560.0	17.92	17.92


Spectrum Plot of Worst Value

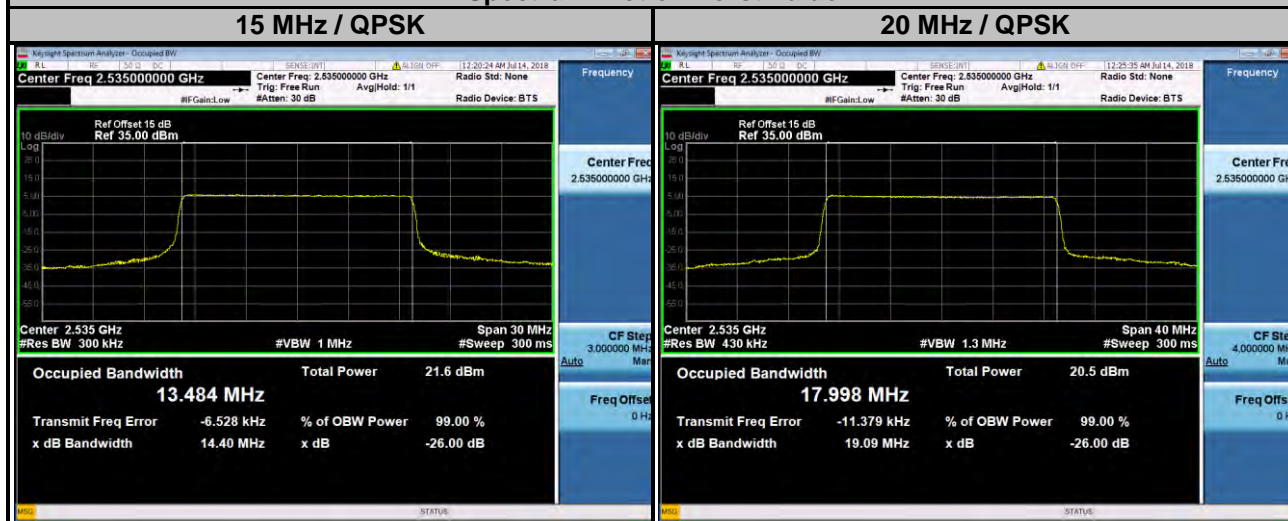

LTE Band 38

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
37775	2572.5	4.50	4.50	37800	2575.0	8.99	8.98
38000	2595.0	4.49	4.50	38000	2595.0	8.99	8.98
38225	2617.5	4.49	4.50	38200	2615.0	8.98	8.98


Spectrum Plot of Worst Value

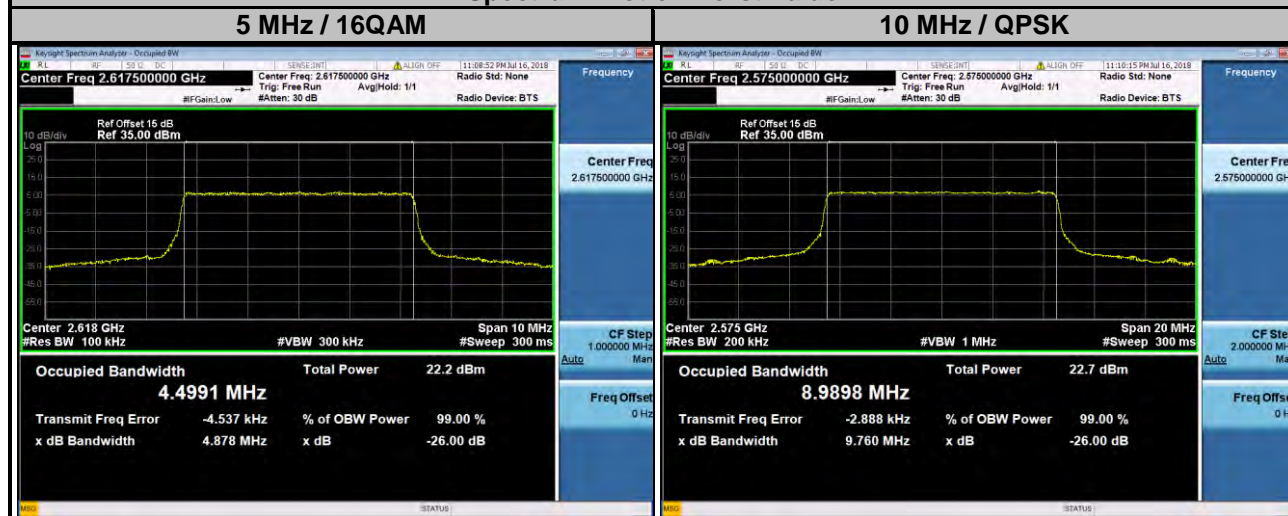

LTE Band 38

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
37825	2577.5	13.47	13.46	37850	2580.0	17.96	17.94
38000	2595.0	13.47	13.47	38000	2595.0	17.96	17.94
38175	2612.5	13.47	13.47	38150	2610.0	17.97	17.95


Spectrum Plot of Worst Value

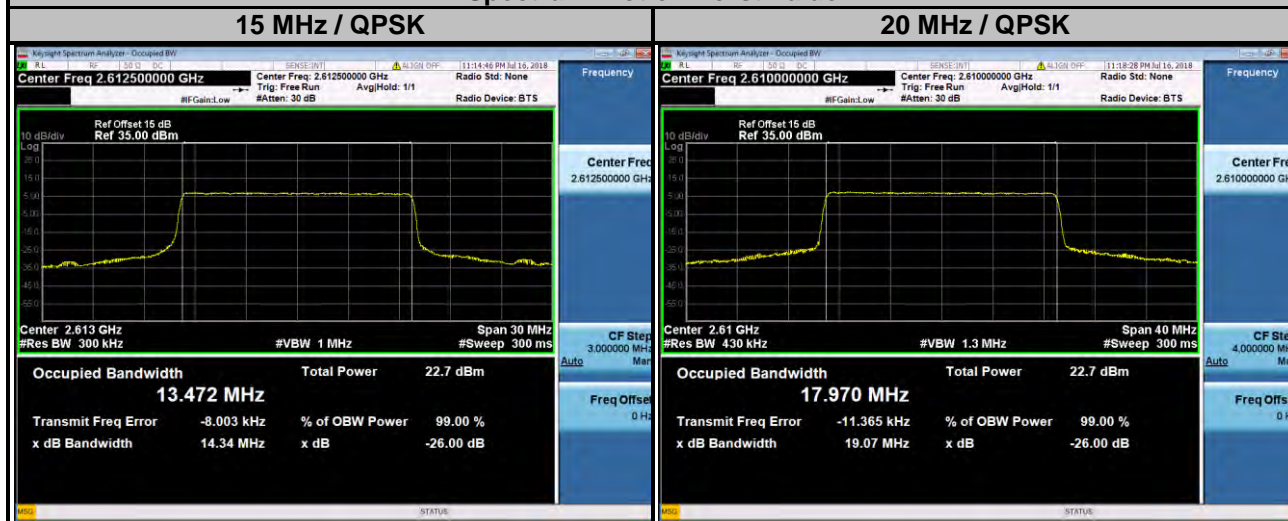

LTE Band 41

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
39675	2498.5	4.50	4.50	39700	2501.0	8.99	8.98
40620	2593.0	4.49	4.50	40620	2593.0	8.99	8.97
41565	2687.5	4.50	4.50	41540	2685.0	8.99	8.99


Spectrum Plot of Worst Value

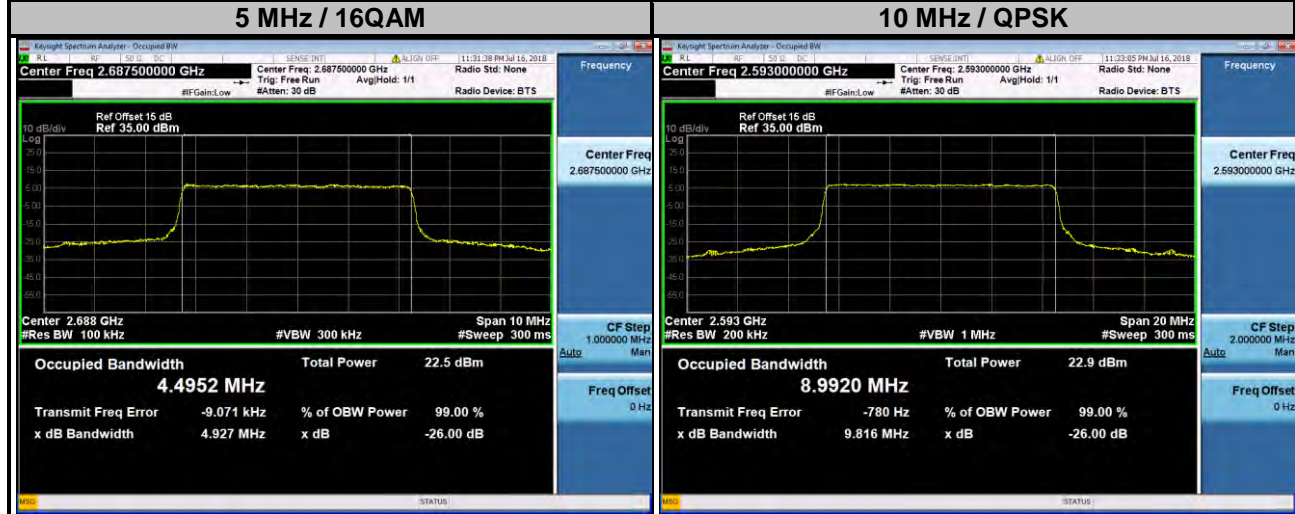

LTE Band 41

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
39725	2503.5	13.48	13.47	39750	2506.0	17.98	17.96
40620	2593.0	13.47	13.47	40620	2593.0	17.97	17.95
41515	2682.5	13.45	13.48	41490	2680.0	17.93	17.94

Spectrum Plot of Worst Value

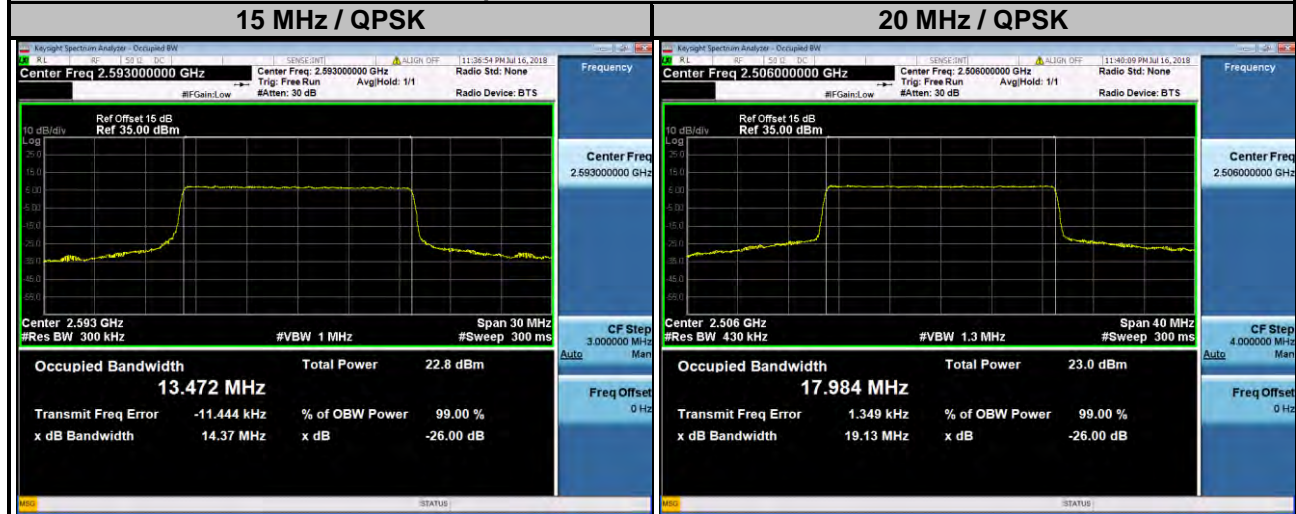


4.5 Out-of-Band Emissions Measurement

4.5.1 Limits of Out-of-Band Emissions Measurement

According to FCC 27.53(l)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.


4.5.2 Test Setup

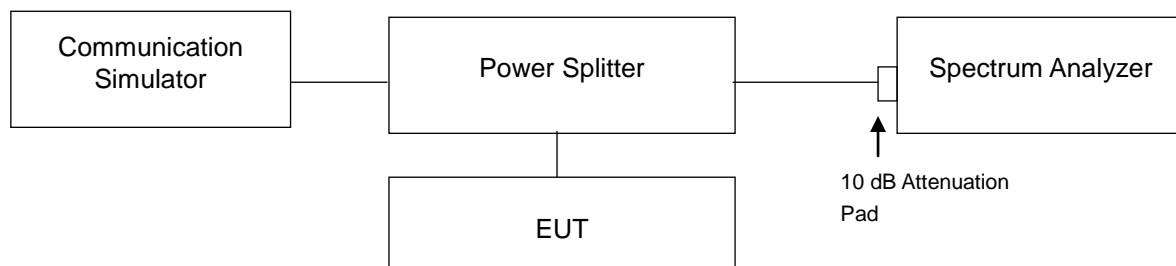

4.5.3 Test Procedures


- The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range).
- The out-of-band emissions measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Record the max. trace plot into the test report.

4.5.4 Test Results

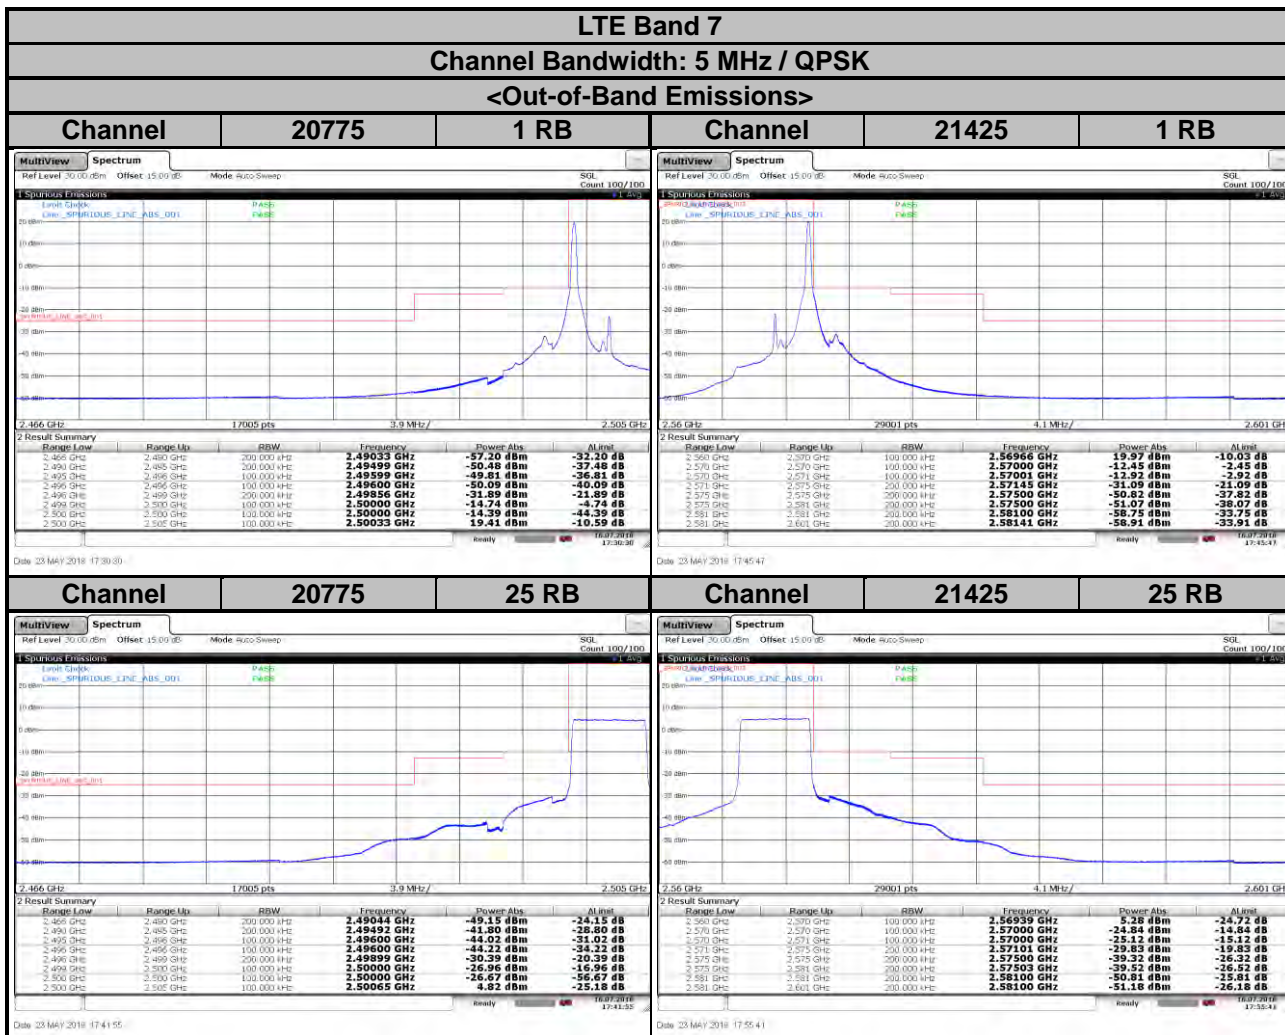


LTE Band 7
Channel Bandwidth: 5 MHz / 16QAM

<Out-of-Band Emissions>

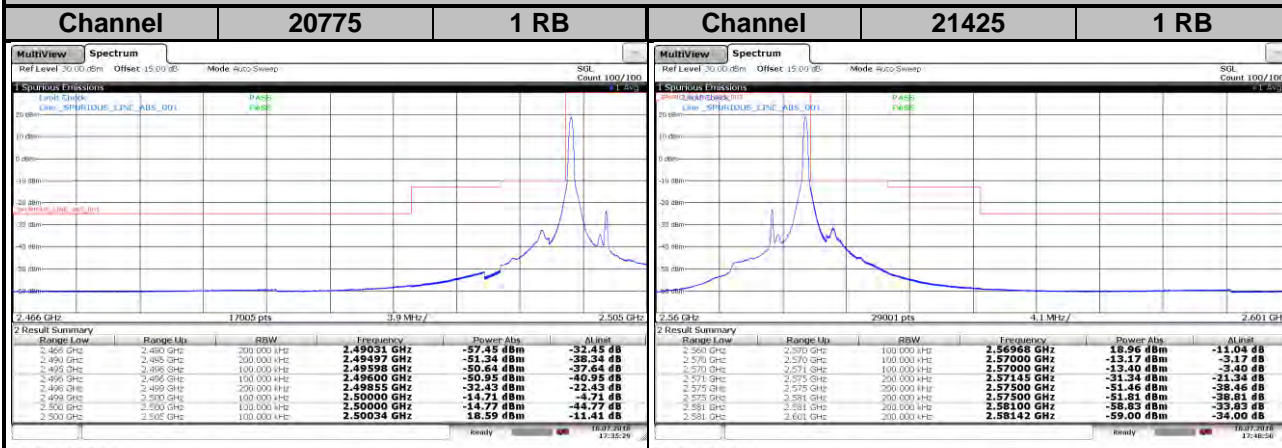



Date: 23 MAY 2018 17:35:29 Date: 23 MAY 2018 17:48:50

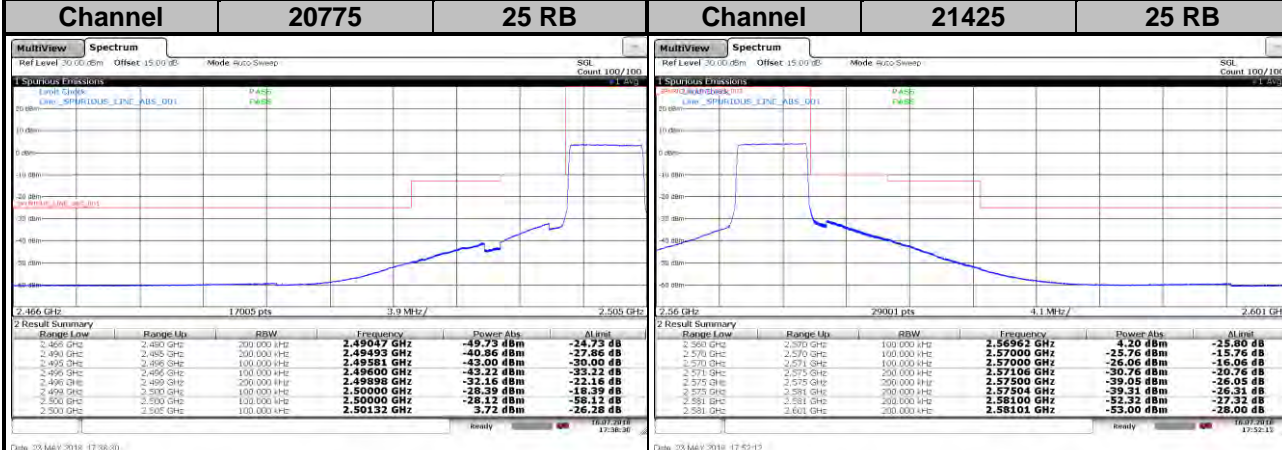



Date: 23 MAY 2018 17:38:30 Date: 23 MAY 2018 17:52:12

LTE Band 7
Channel Bandwidth: 10 MHz / QPSK


<Out-of-Band Emissions>

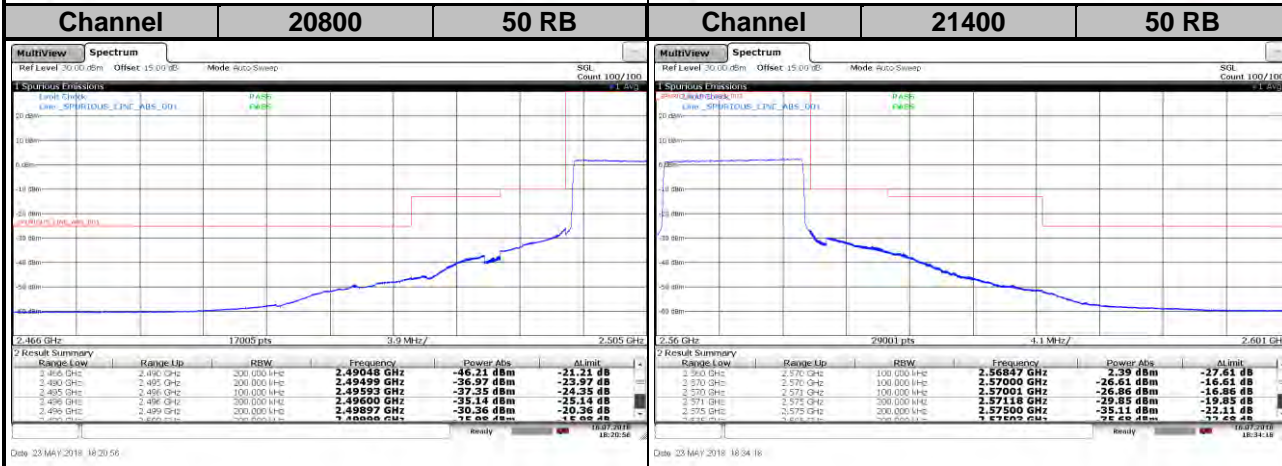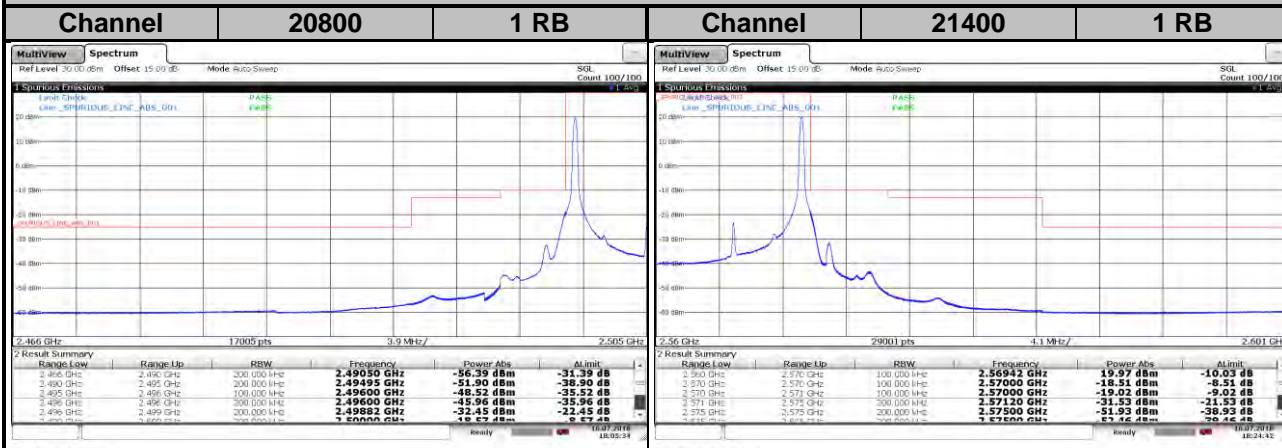



LTE Band 7
Channel Bandwidth: 10 MHz / 16QAM
<Out-of-Band Emissions>

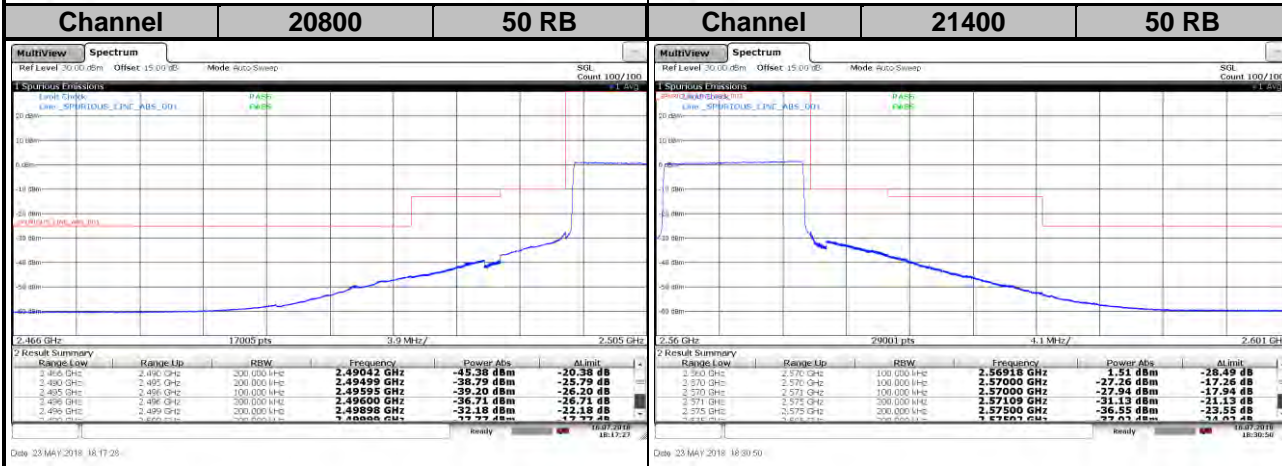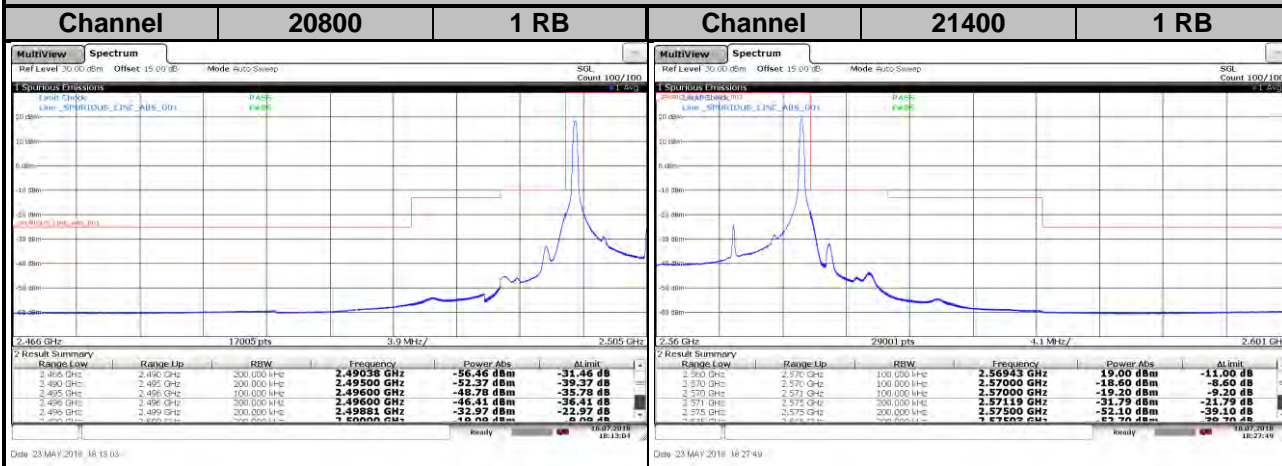



LTE Band 7
Channel Bandwidth: 15 MHz / QPSK
<Out-of-Band Emissions>

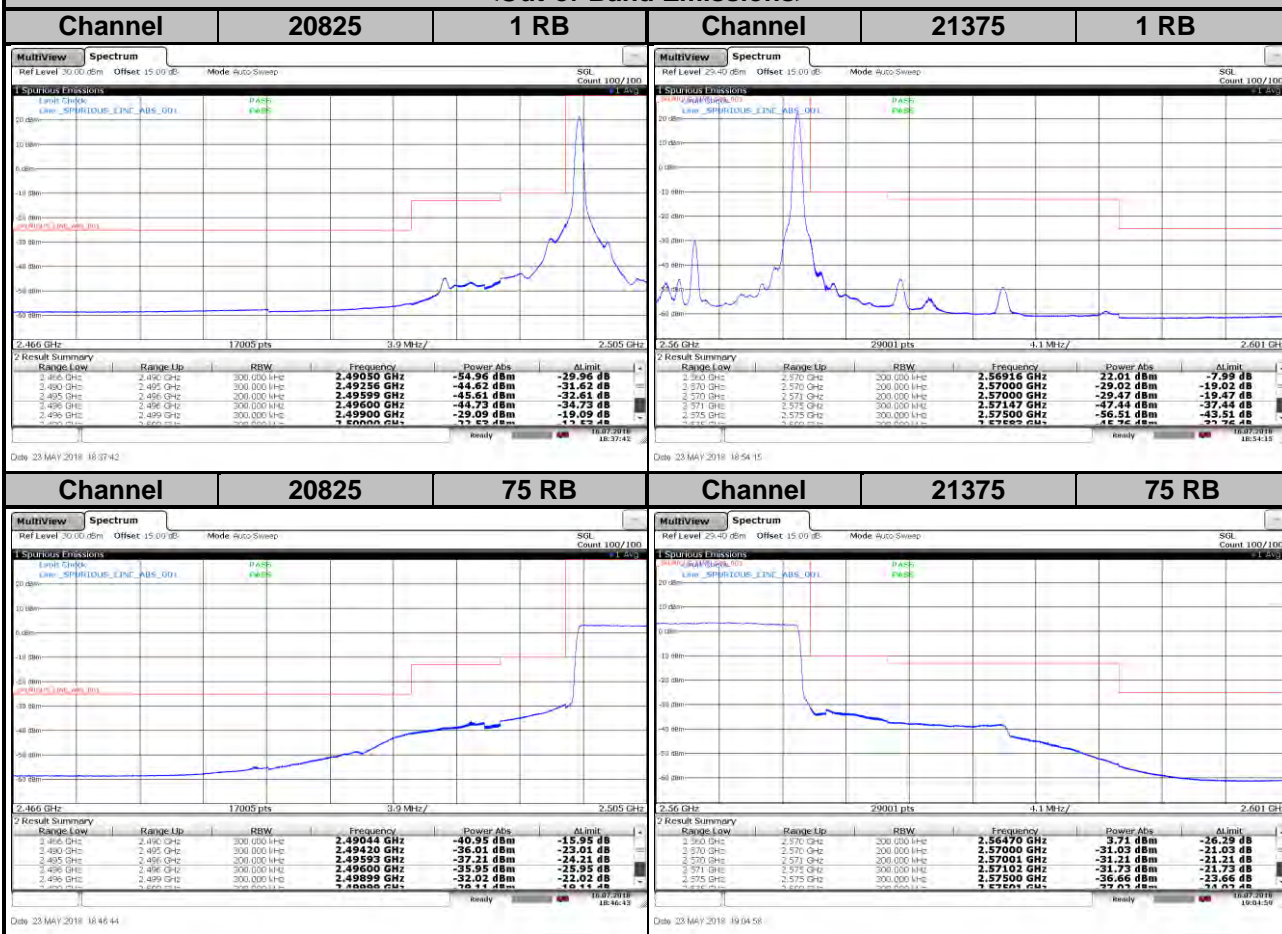



LTE Band 7
Channel Bandwidth: 15 MHz / 16QAM
<Out-of-Band Emissions>

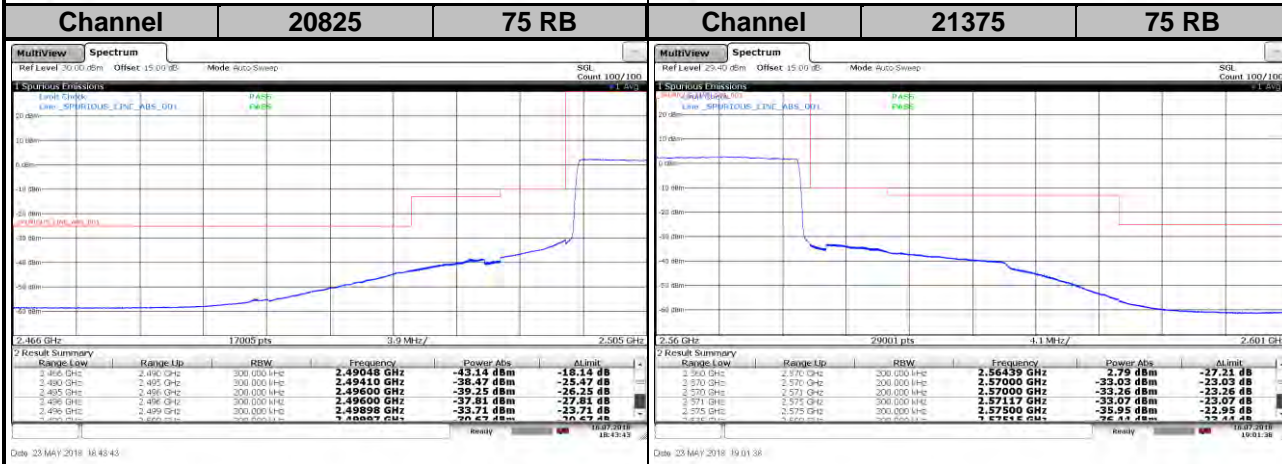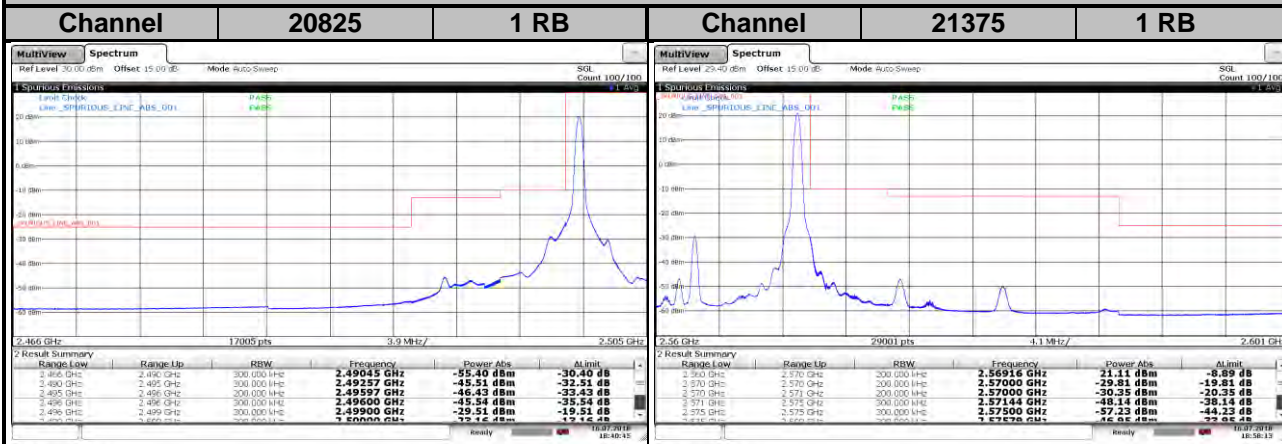



LTE Band 7
Channel Bandwidth: 20 MHz / QPSK
<Out-of-Band Emissions>

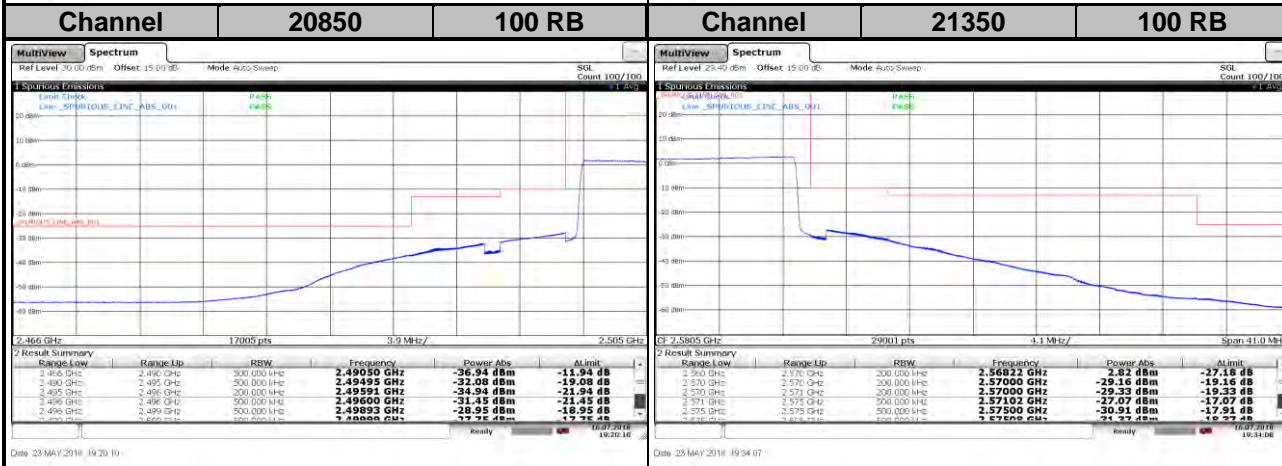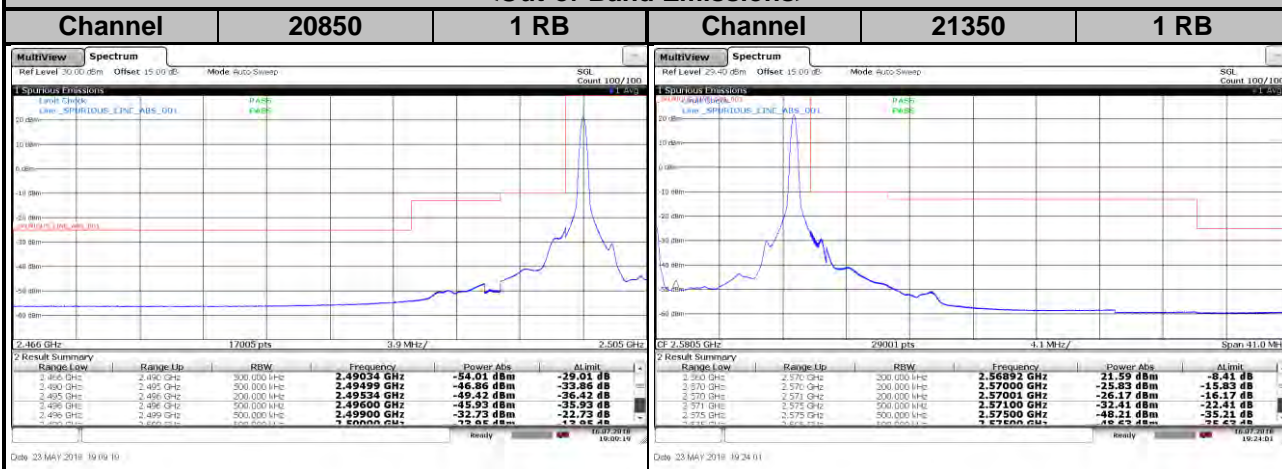



LTE Band 7
Channel Bandwidth: 20 MHz / 16QAM
<Out-of-Band Emissions>

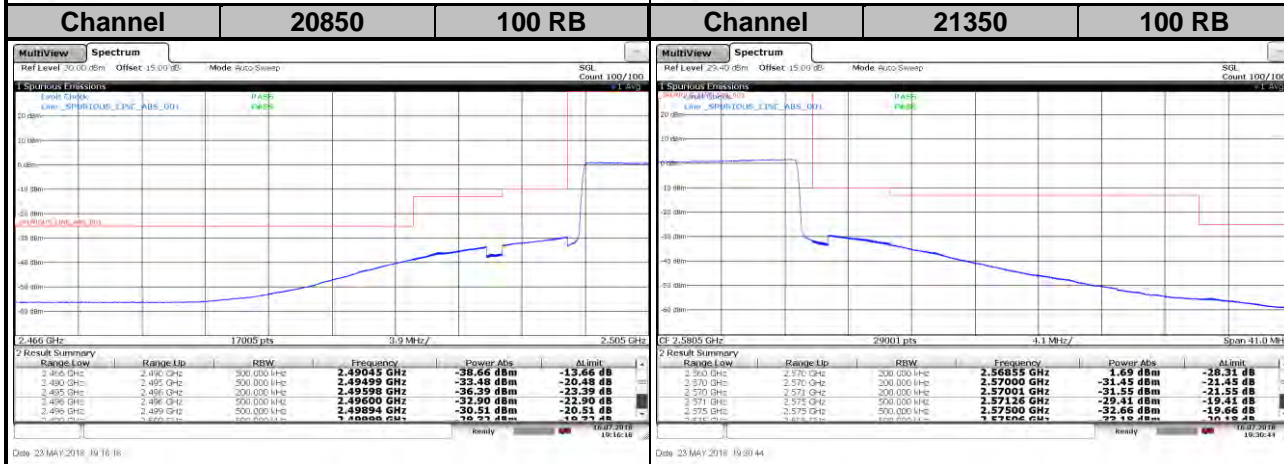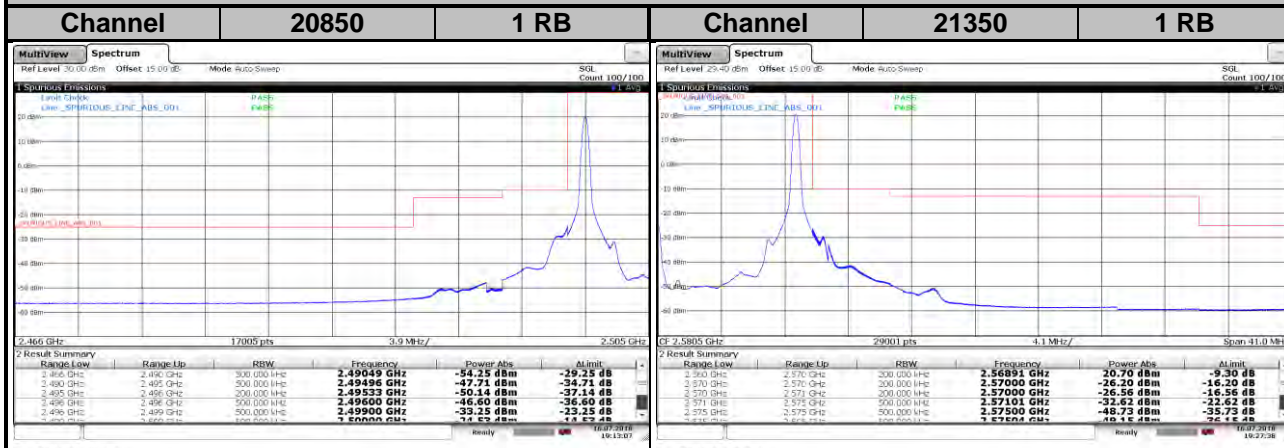

LTE Band 38
Channel Bandwidth: 5 MHz / QPSK
<Out-of-Band Emissions>

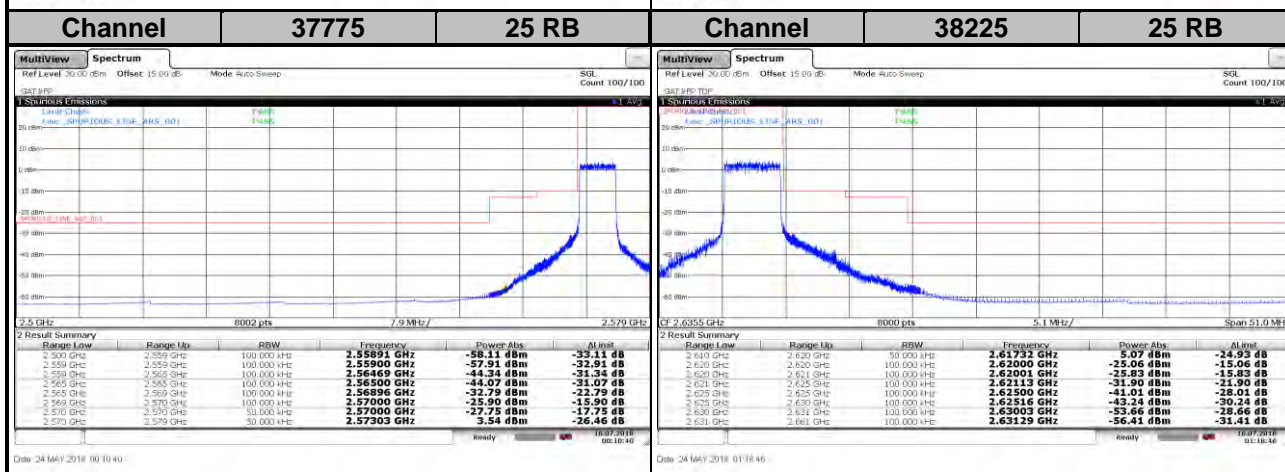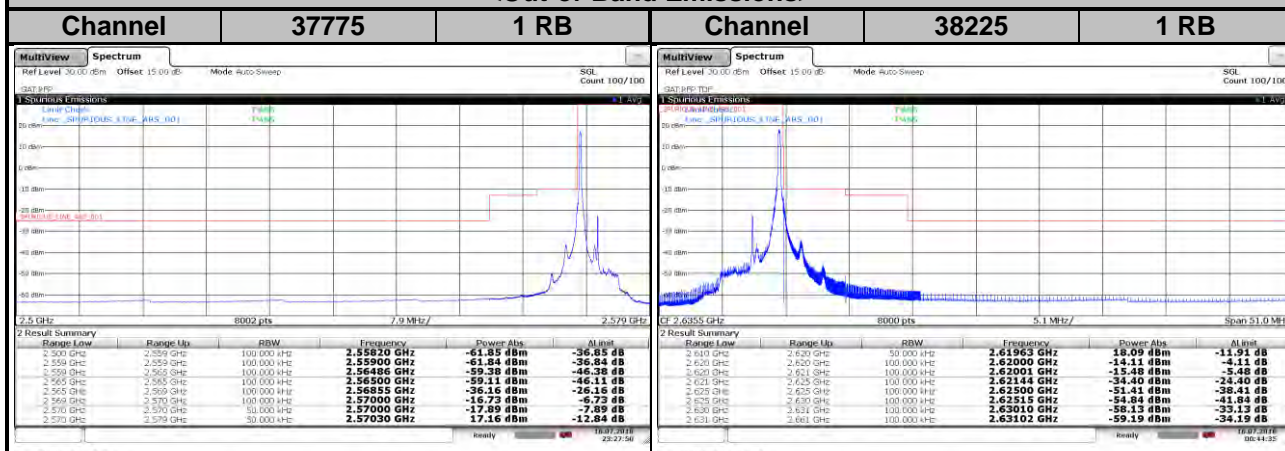


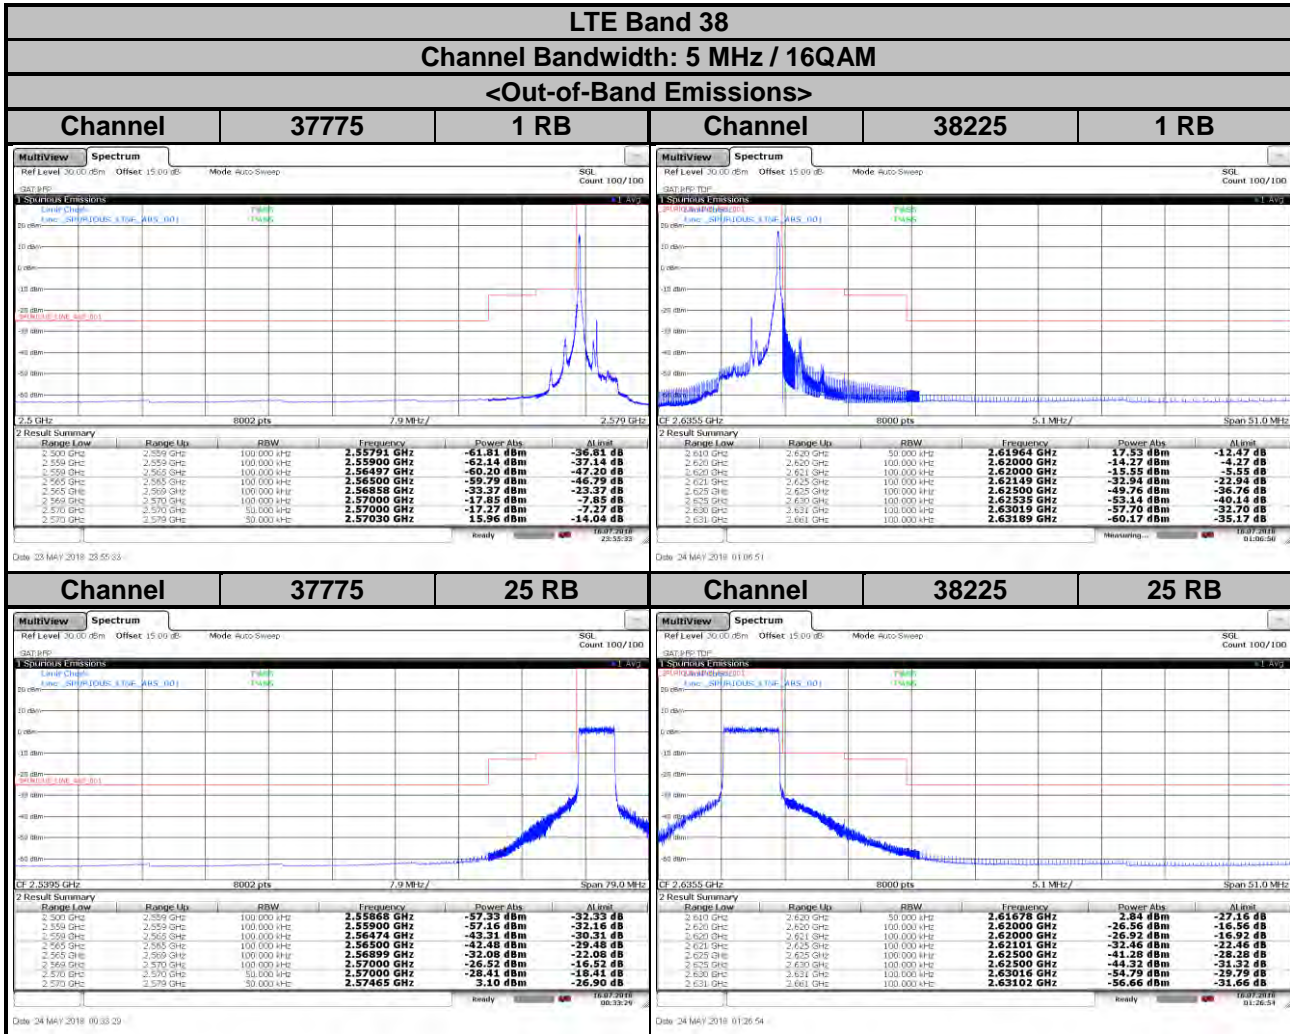


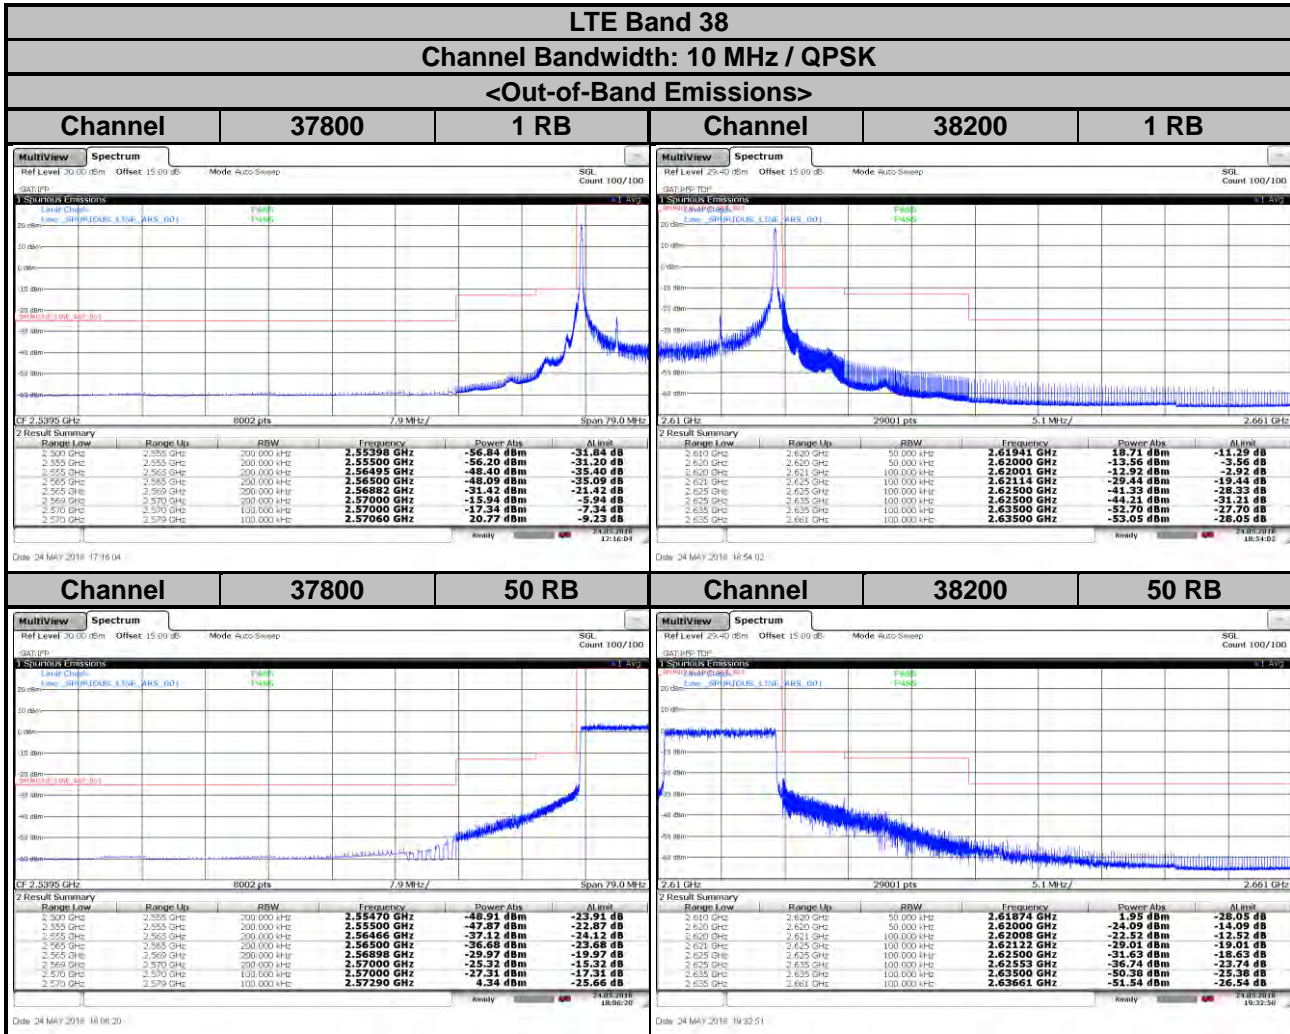


LTE Band 38
Channel Bandwidth: 10 MHz / 16QAM

<Out-of-Band Emissions>

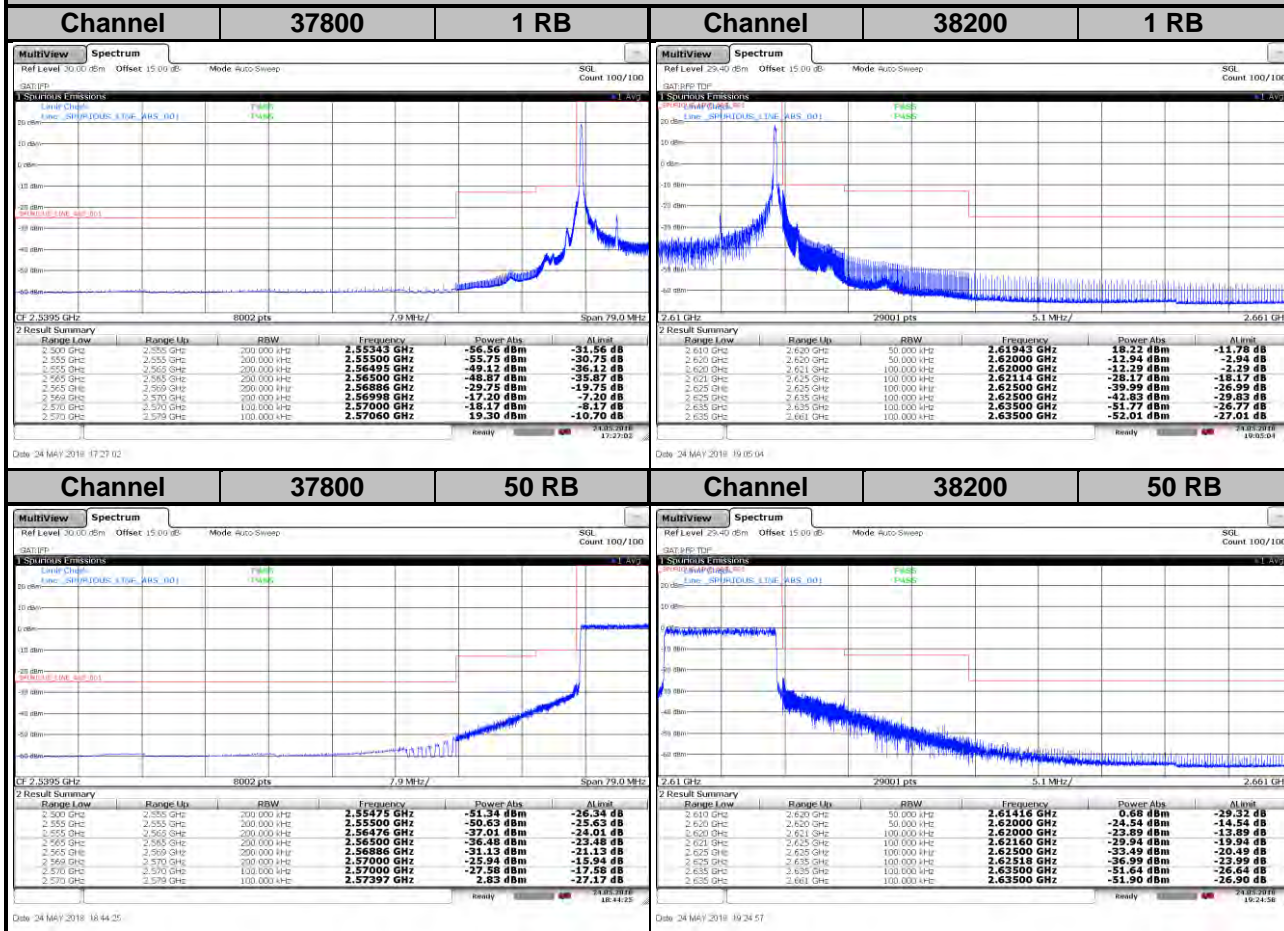


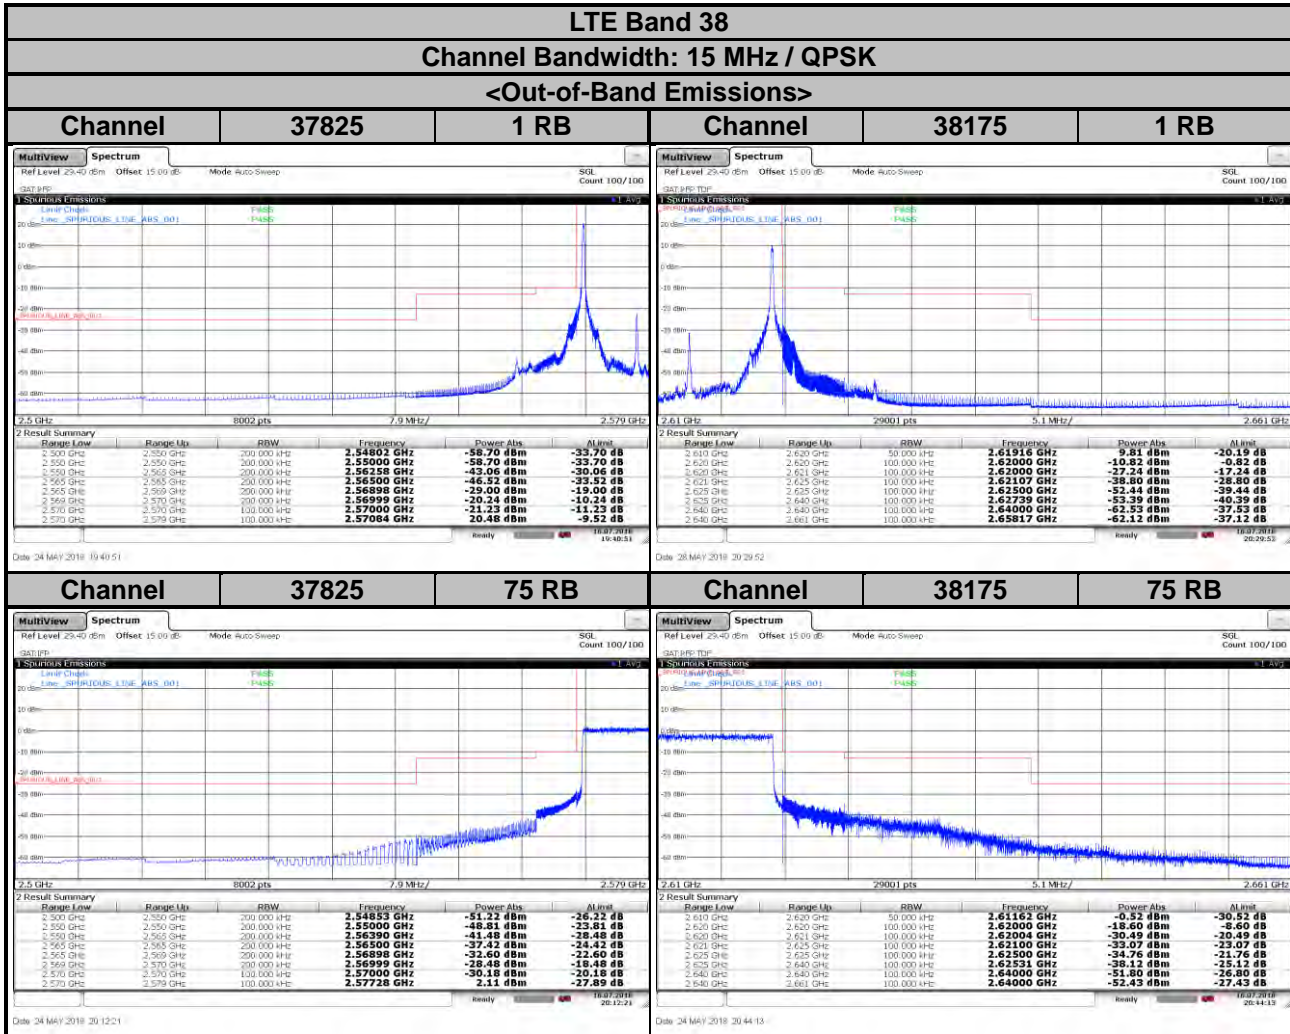


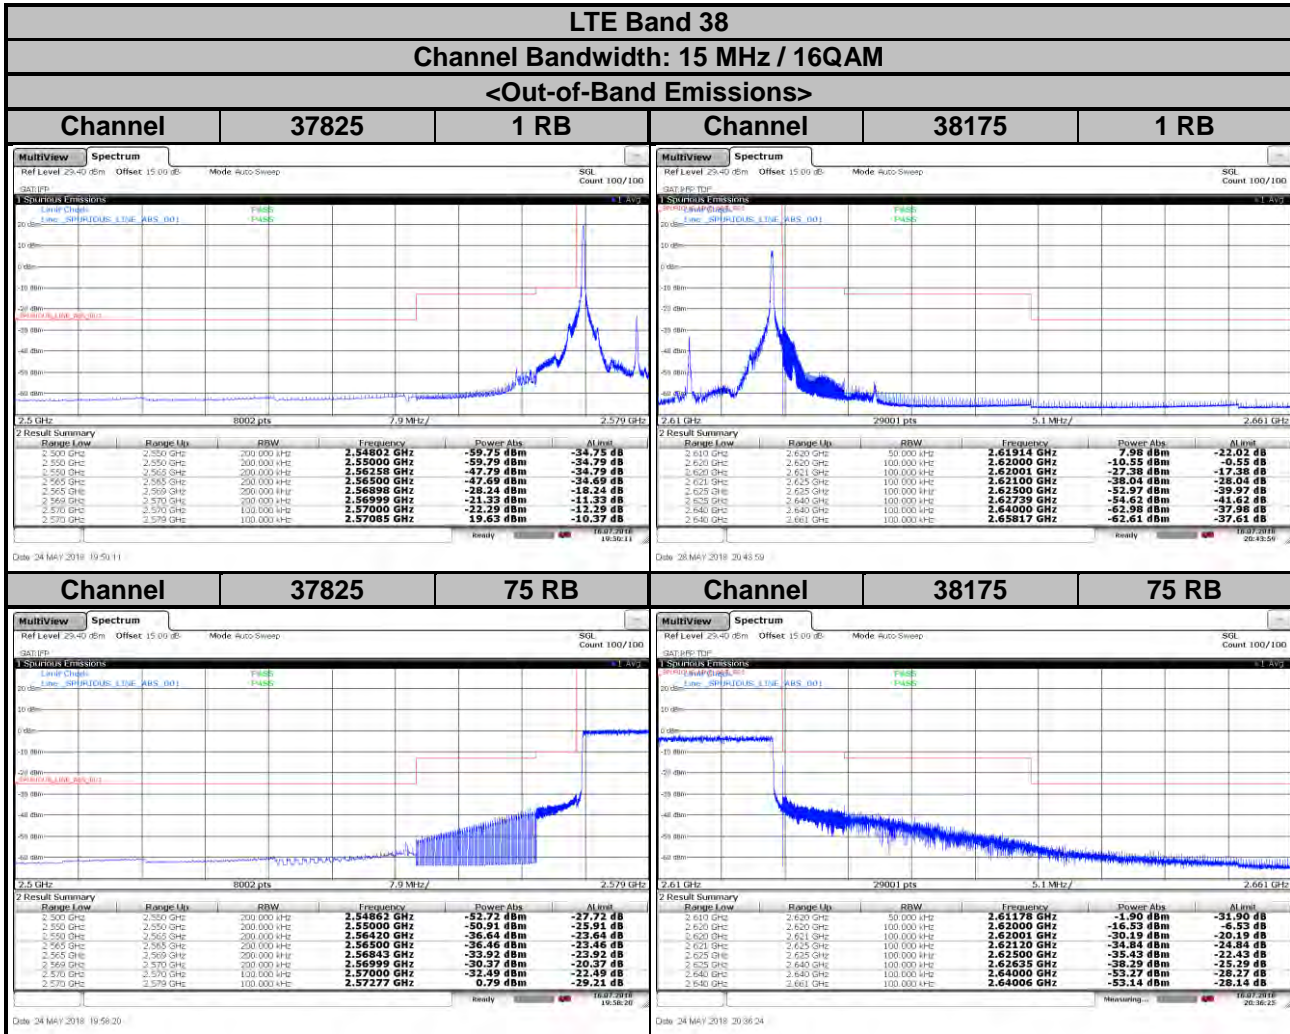


LTE Band 38
Channel Bandwidth: 20 MHz / QPSK


<Out-of-Band Emissions>

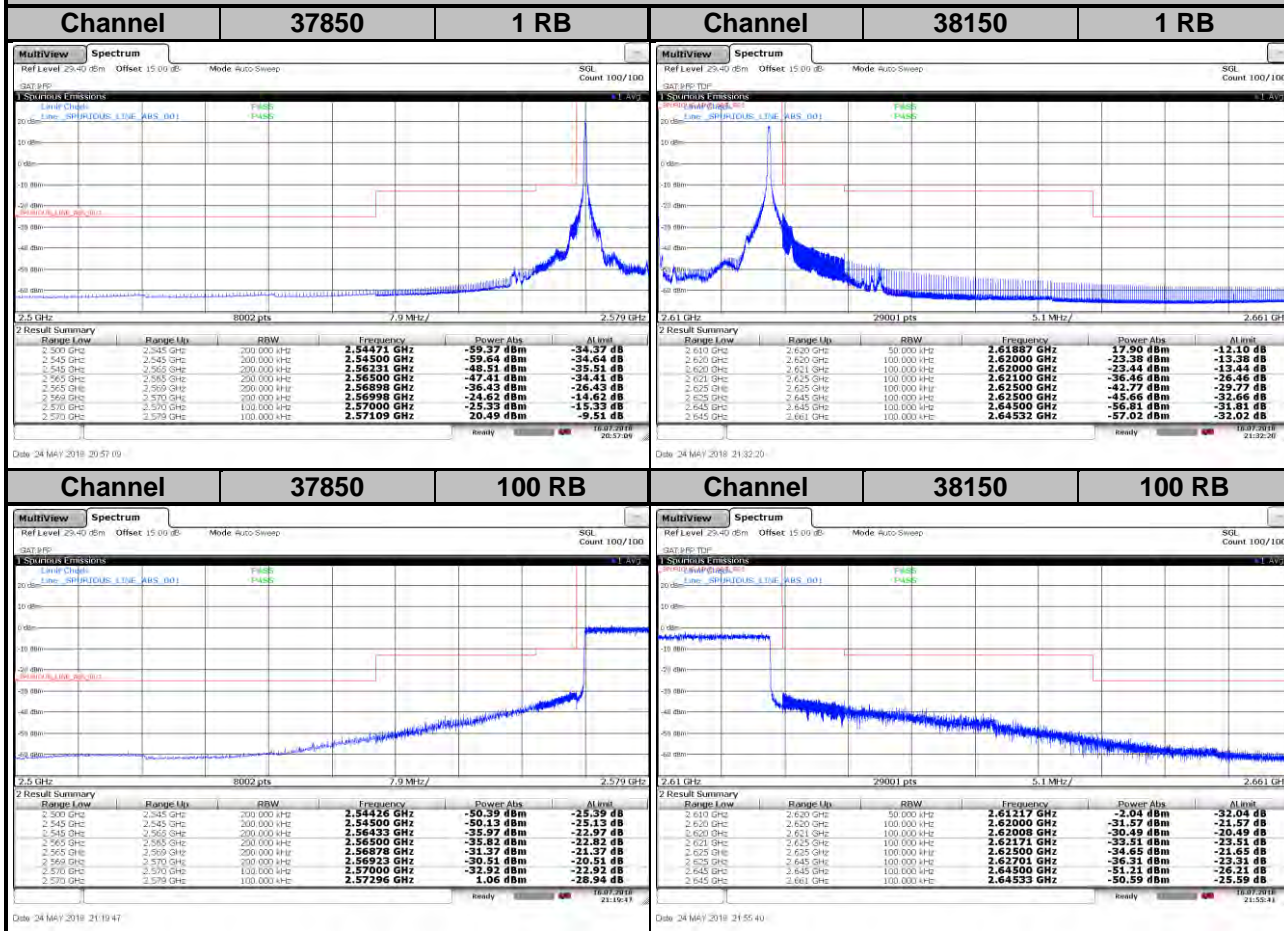


LTE Band 38
Channel Bandwidth: 20 MHz / 16QAM
<Out-of-Band Emissions>

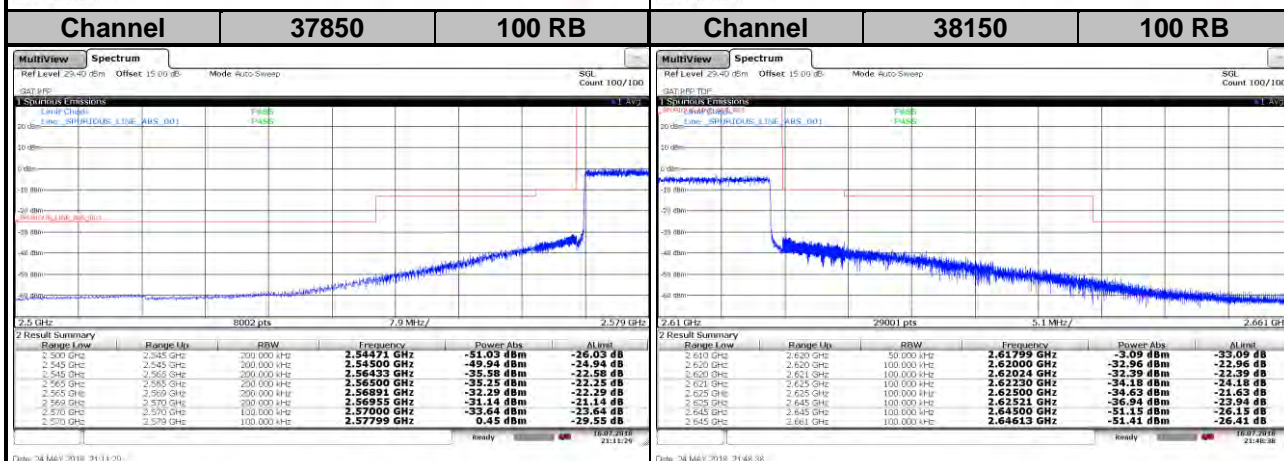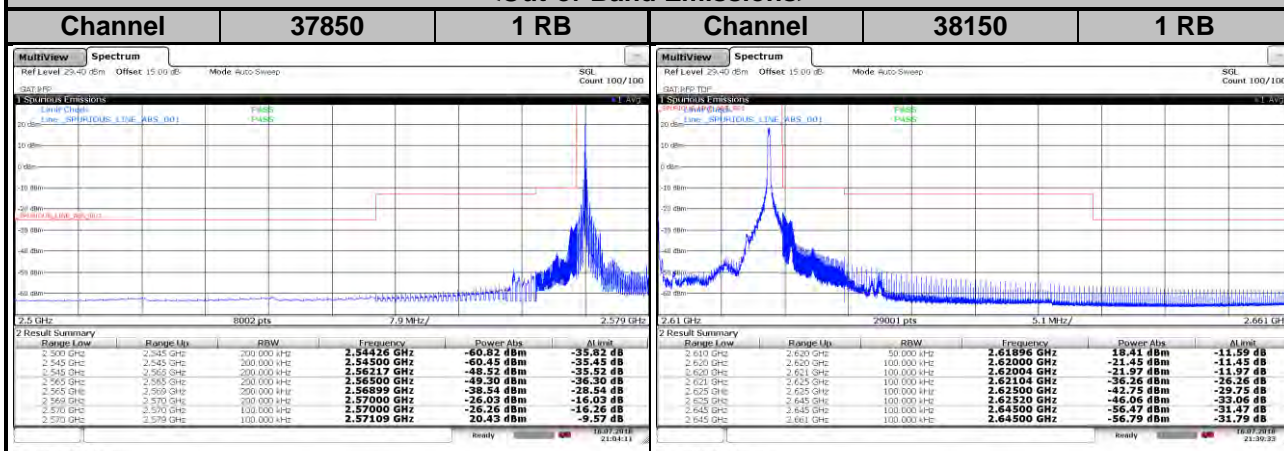


LTE Band 41
Channel Bandwidth: 5 MHz / QPSK
<Out-of-Band Emissions>

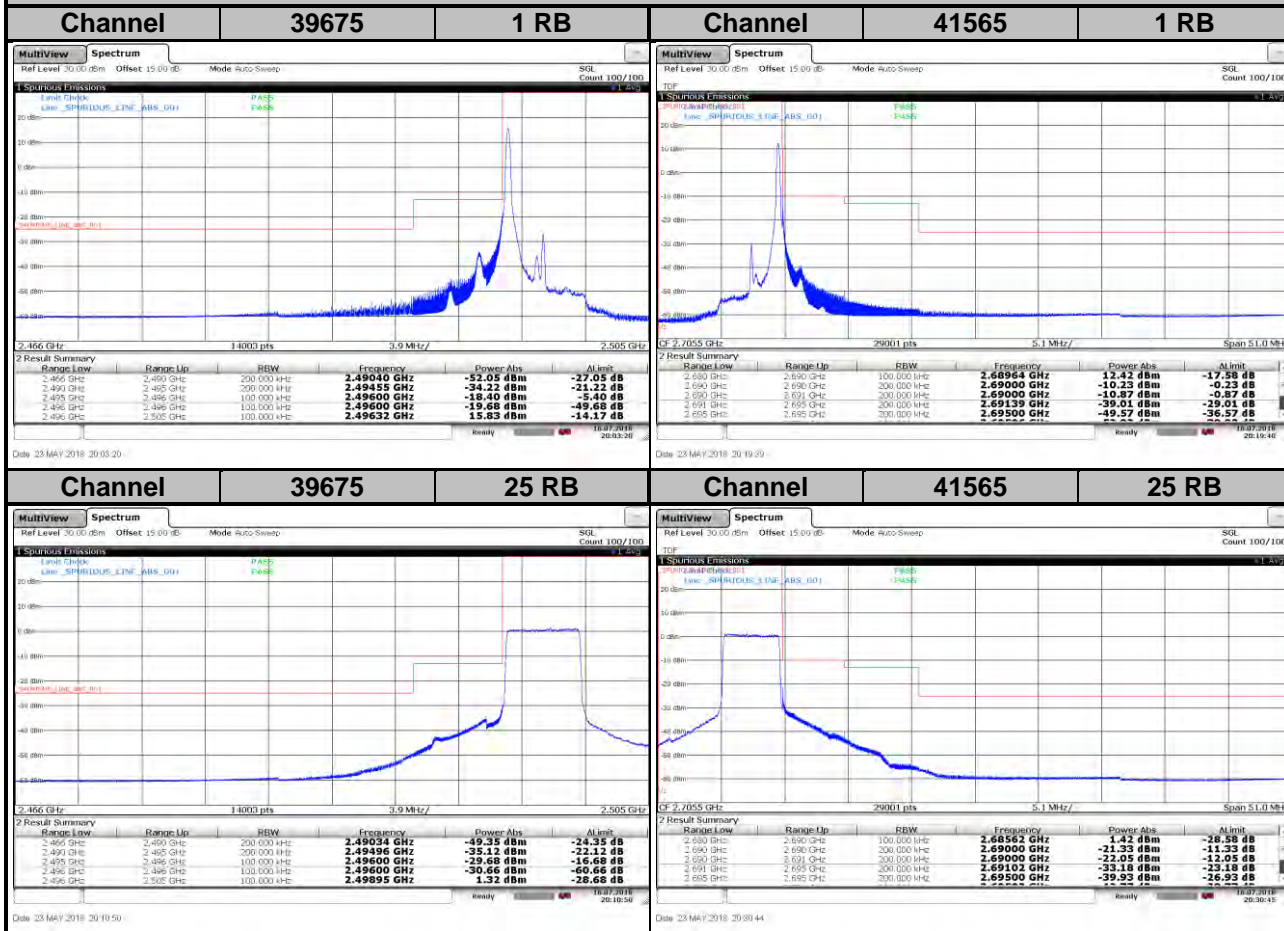

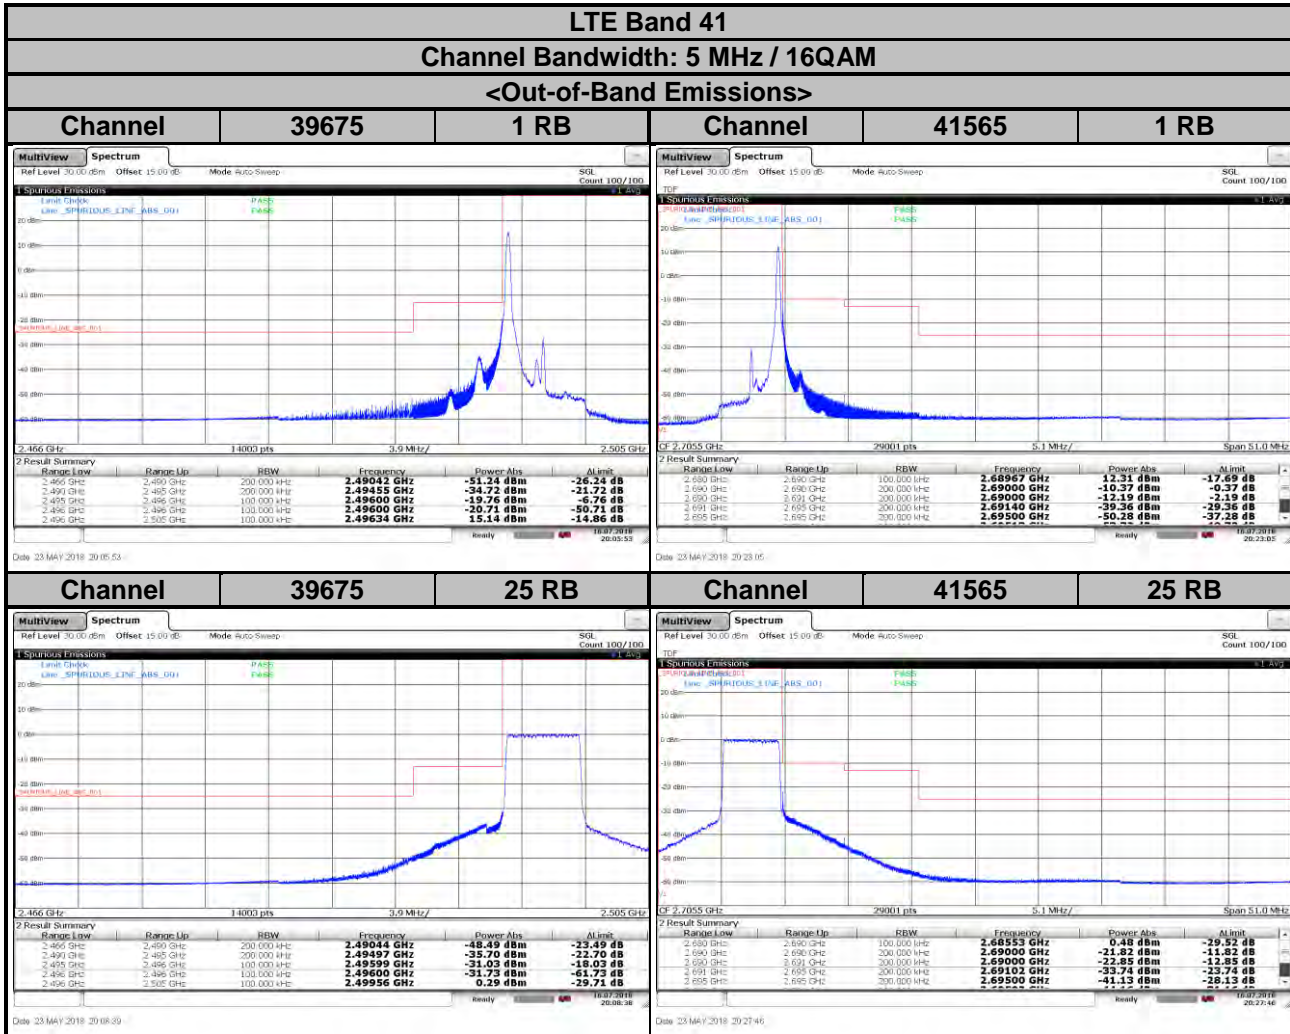


LTE Band 41
Channel Bandwidth: 10 MHz / QPSK

<Out-of-Band Emissions>

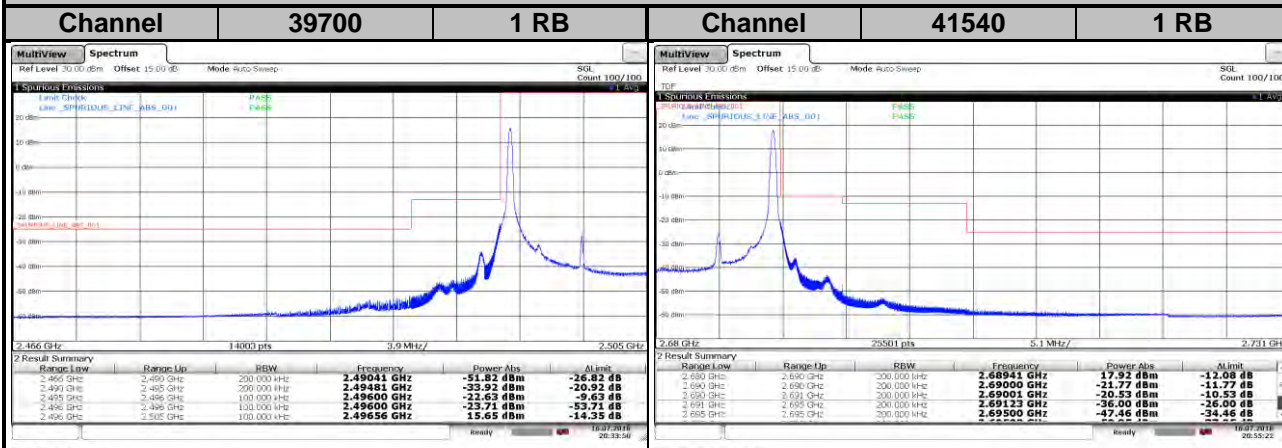


Date: 23 MAY 2018 20:35:50 (left) | Date: 23 MAY 2018 20:55:22 (right)

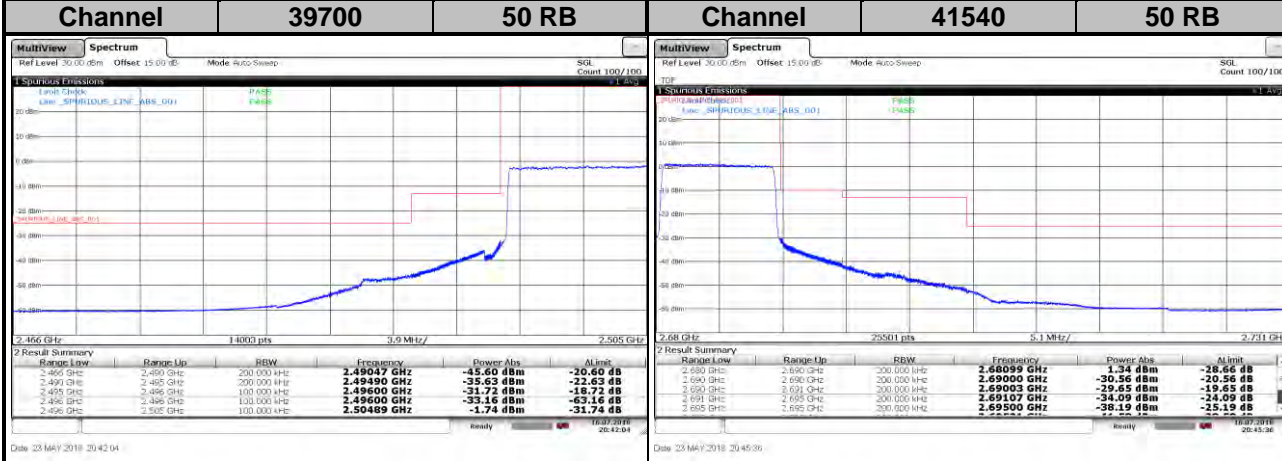

Date: 23 MAY 2018 20:42:04 (left) | Date: 23 MAY 2018 20:45:36 (right)



LTE Band 41
Channel Bandwidth: 10 MHz / 16QAM

<Out-of-Band Emissions>

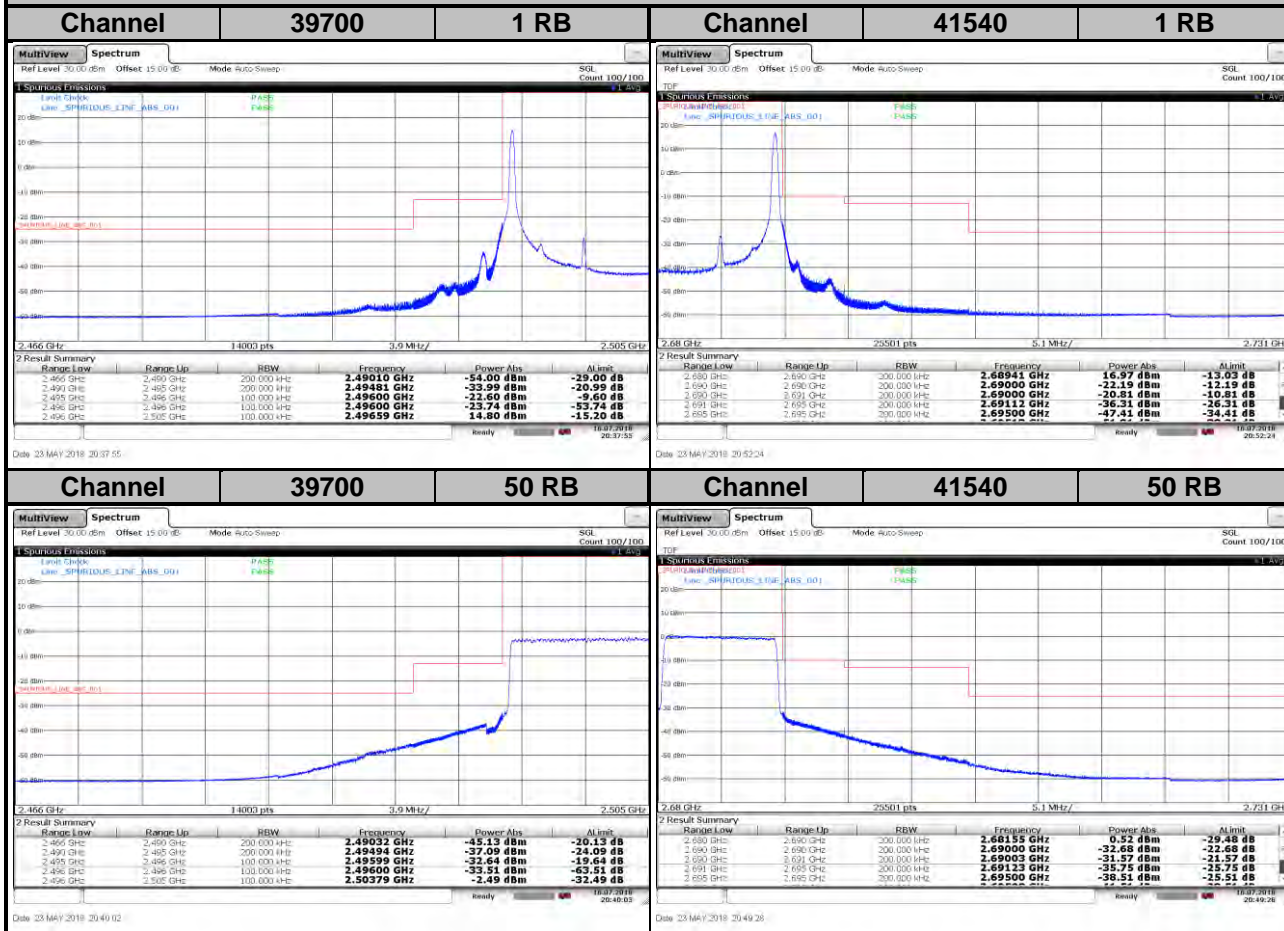


LTE Band 41
Channel Bandwidth: 15 MHz / QPSK

<Out-of-Band Emissions>

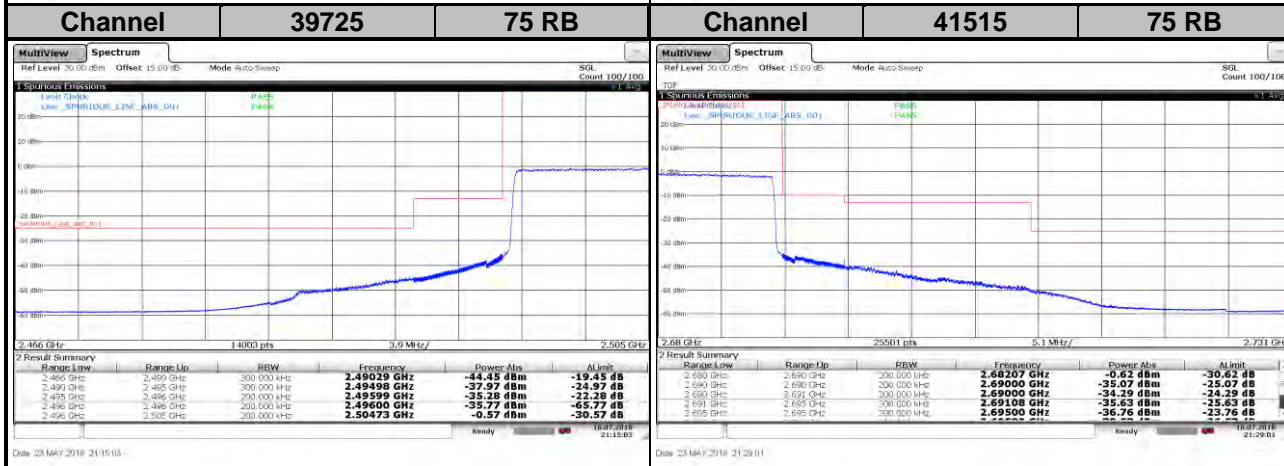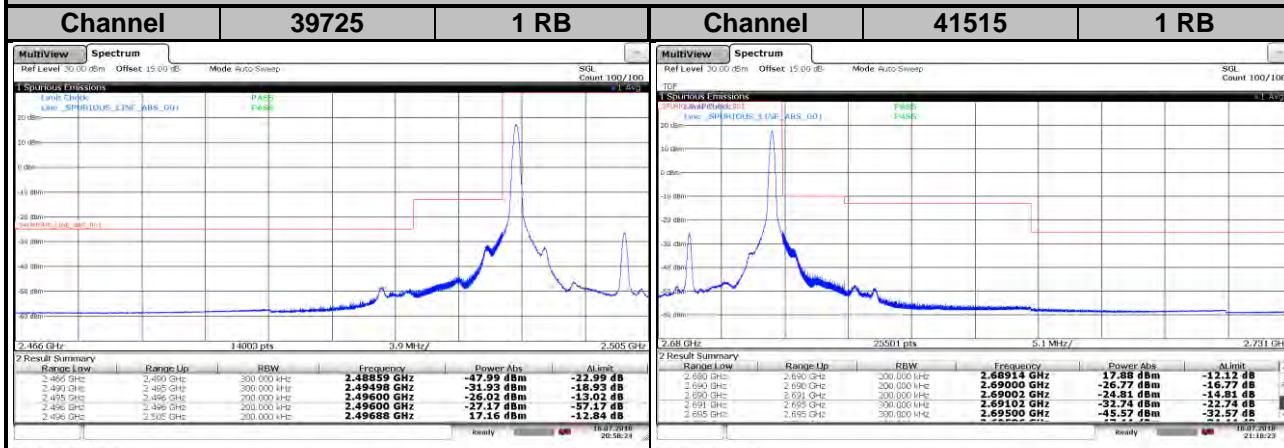


LTE Band 41
Channel Bandwidth: 15 MHz / 16QAM

<Out-of-Band Emissions>

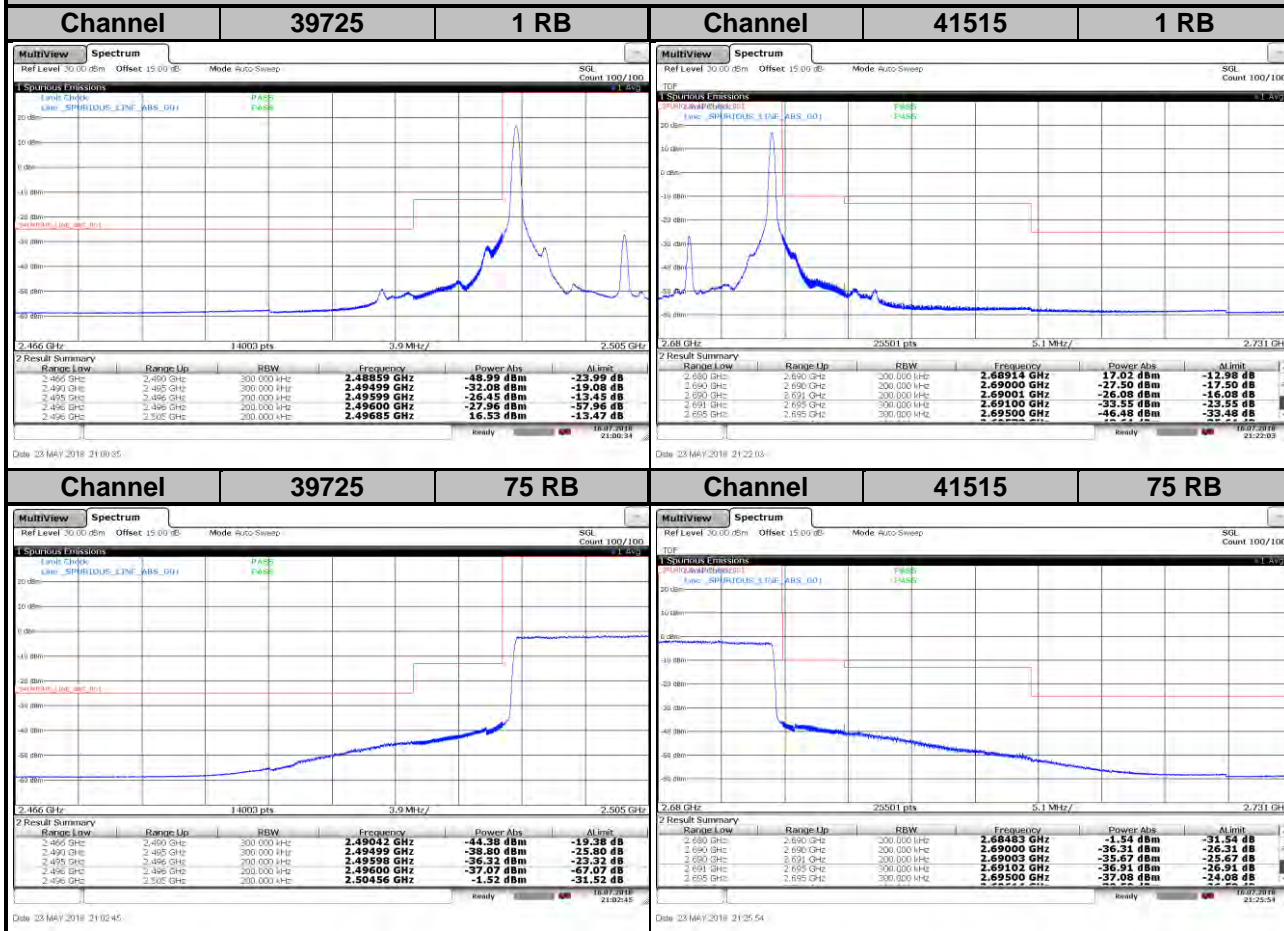


LTE Band 41
Channel Bandwidth: 20 MHz / QPSK

<Out-of-Band Emissions>

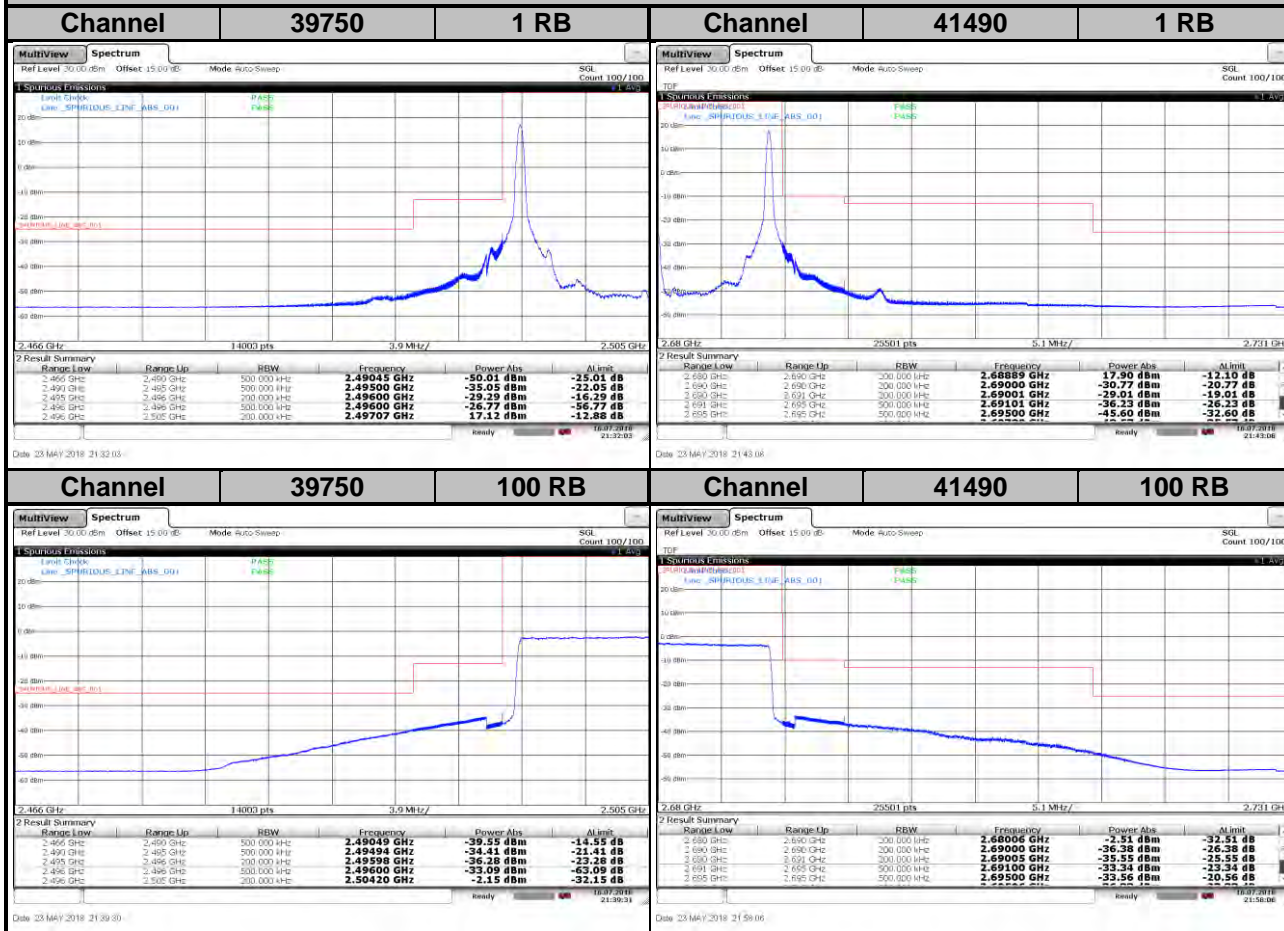

LTE Band 41
Channel Bandwidth: 20 MHz / 16QAM

<Out-of-Band Emissions>

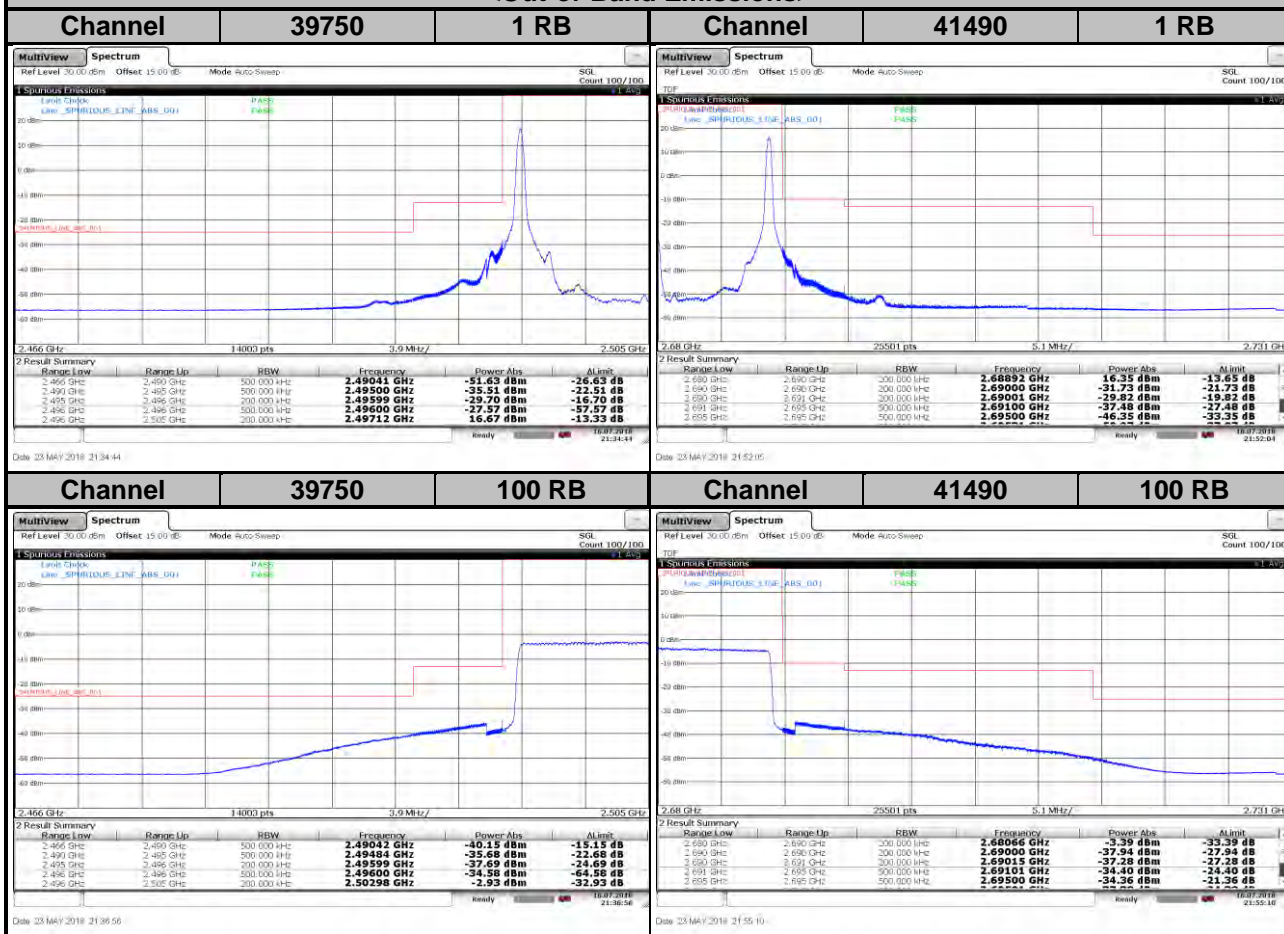


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

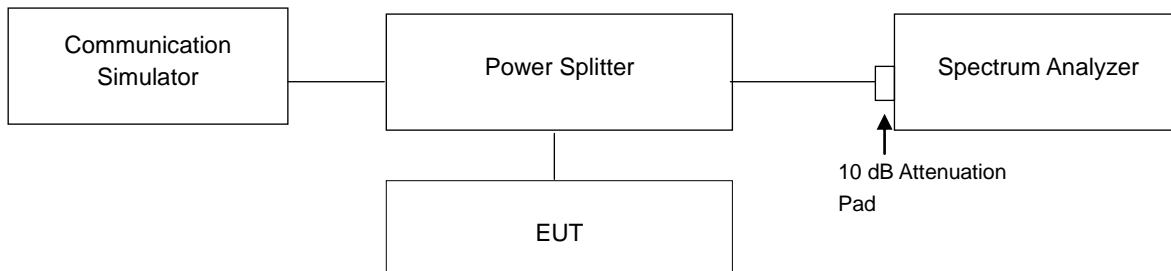


4.6.3 Test Procedures

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


LTE Band 7							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20775	2502.5	4.40	5.23	20800	2505.0	4.38	5.26
21100	2535.0	4.70	5.45	21100	2535.0	4.69	5.38
21425	2567.5	4.52	5.35	21400	2565.0	4.35	5.15

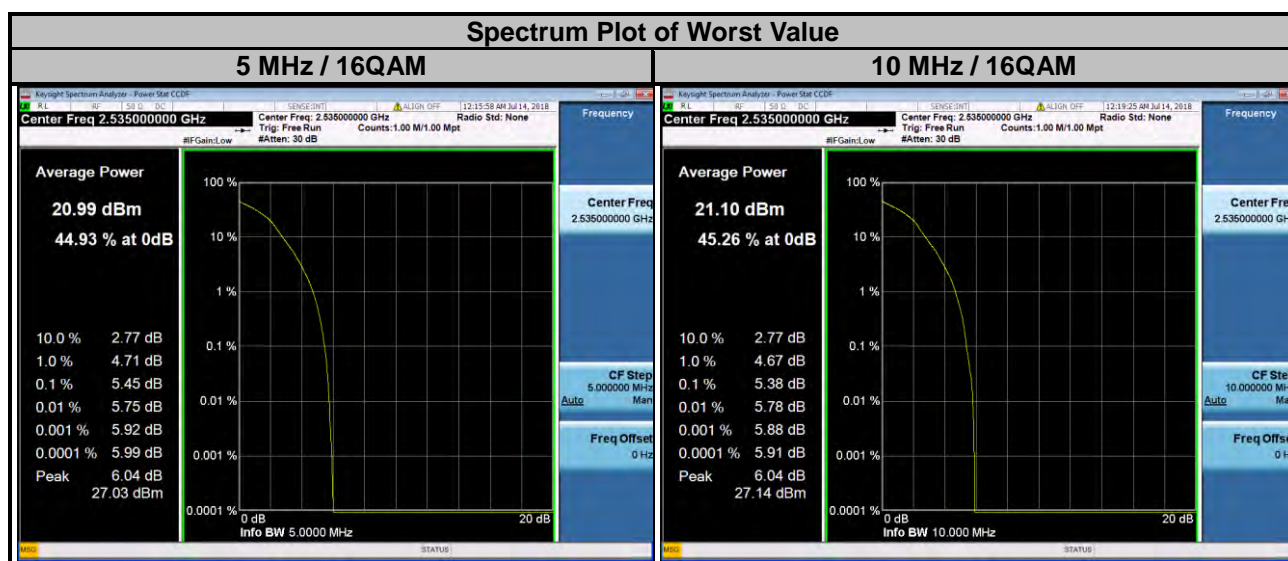


LTE Band 7

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20825	2507.5	4.46	5.21	20850	2510.0	4.44	5.23
21100	2535.0	4.51	5.26	21100	2535.0	4.66	5.31
21375	2562.5	4.39	5.02	21350	2560.0	4.31	5.11

Spectrum Plot of Worst Value

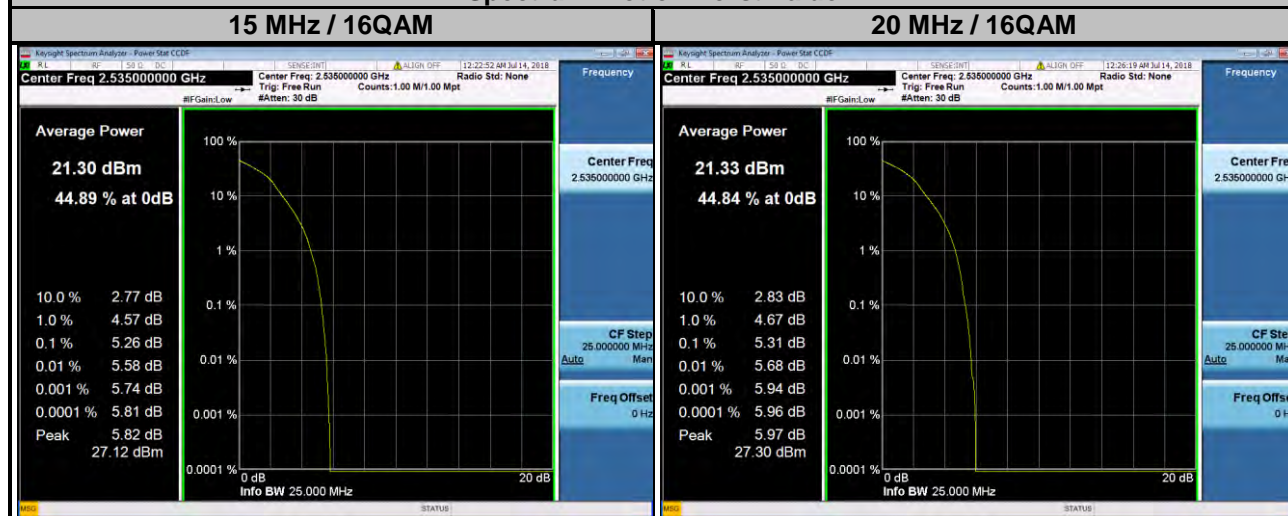


LTE Band 38							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
37775	2572.5	5.14	6.77	37800	2575.0	5.14	6.56
38000	2595.0	5.27	5.90	38000	2595.0	5.46	6.17
38225	2617.5	5.10	5.67	38200	2615.0	5.00	5.67

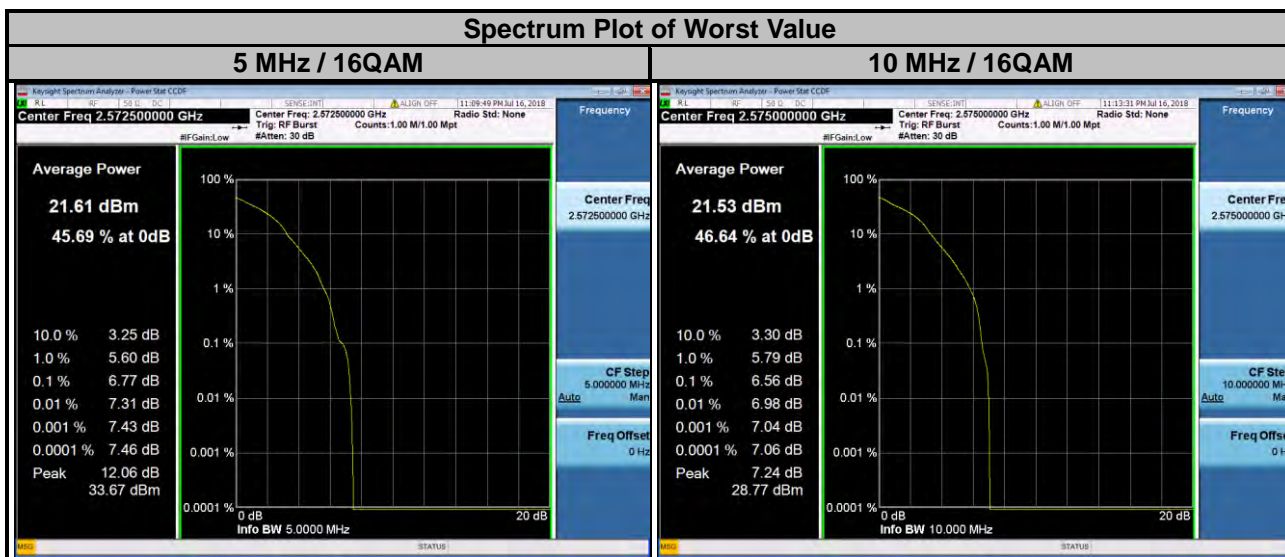

LTE Band 38

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
37825	2577.5	5.59	6.42	37850	2580.0	5.70	6.44
38000	2595.0	6.01	6.55	38000	2595.0	6.19	6.58
38175	2612.5	4.89	6.01	38150	2610.0	4.89	5.60


Spectrum Plot of Worst Value

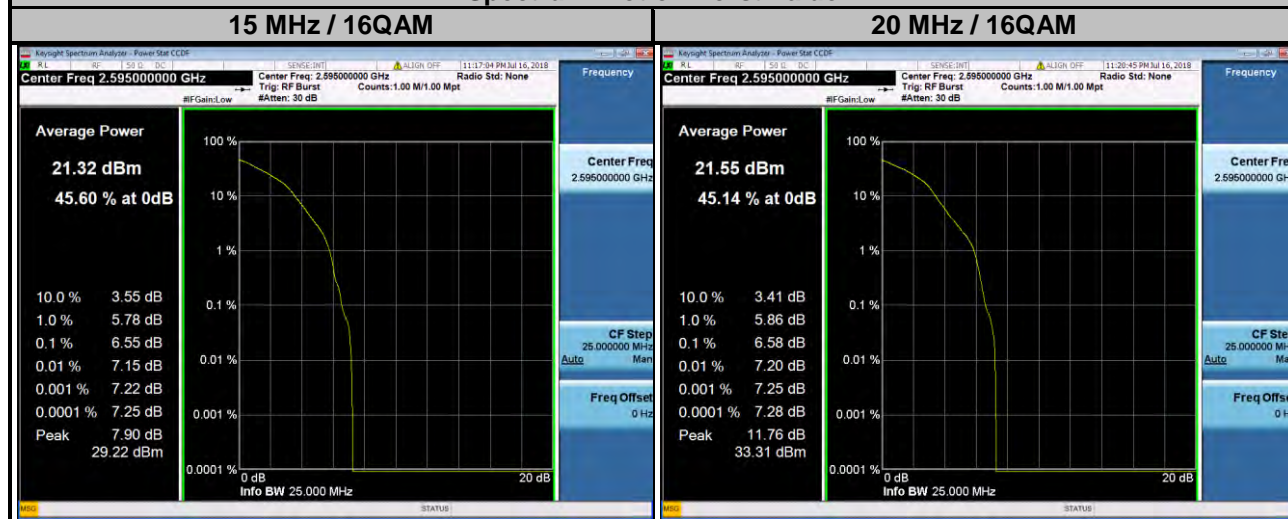

LTE Band 41

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
39675	2498.5	4.34	4.94	39700	2501.0	4.29	5.81
40620	2593.0	4.98	6.41	40620	2593.0	4.83	6.25
41565	2687.5	3.78	4.58	41540	2685.0	3.78	4.39


Spectrum Plot of Worst Value

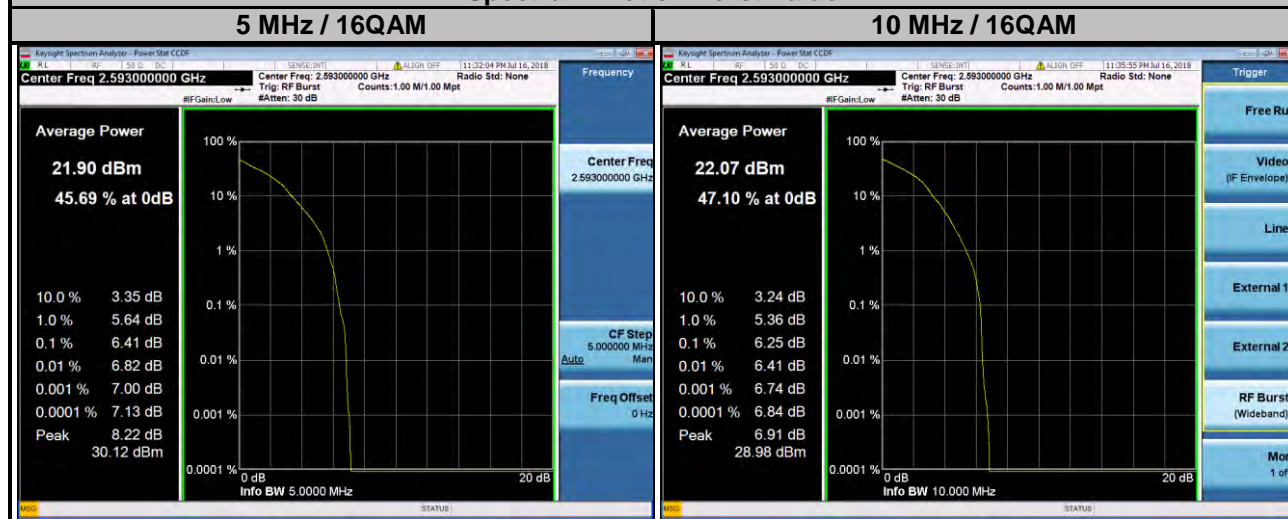

LTE Band 41

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
39725	2503.5	4.33	5.95	39750	2506.0	4.56	6.45
40620	2593.0	5.51	6.21	40620	2593.0	5.12	6.40
41515	2682.5	4.00	5.02	41490	2680.0	4.15	5.22

Spectrum Plot of Worst Value

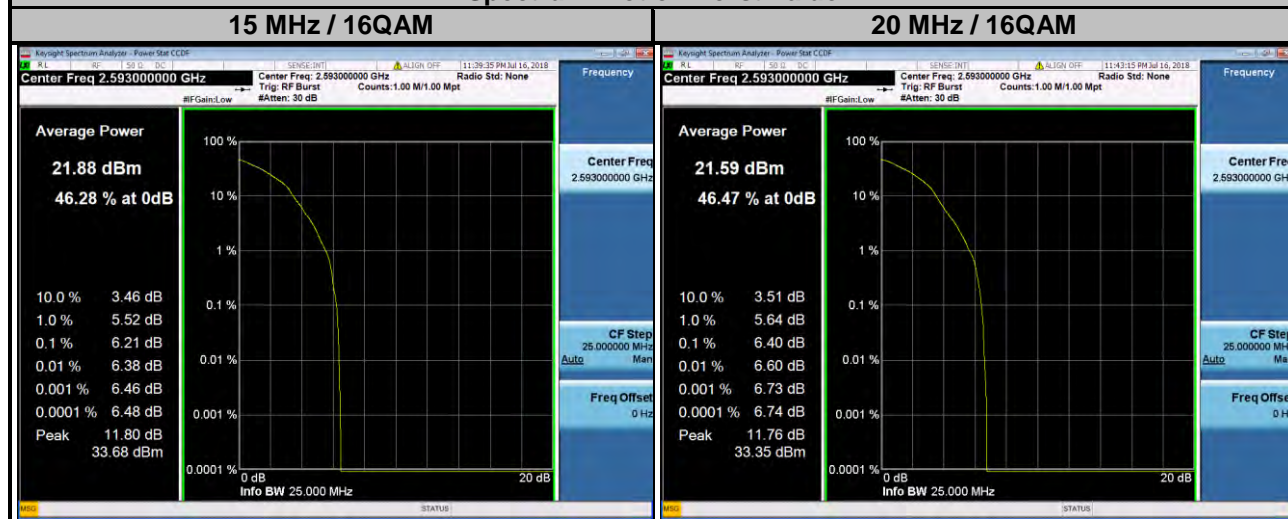


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25 dBm.


4.7.2 Test Setup

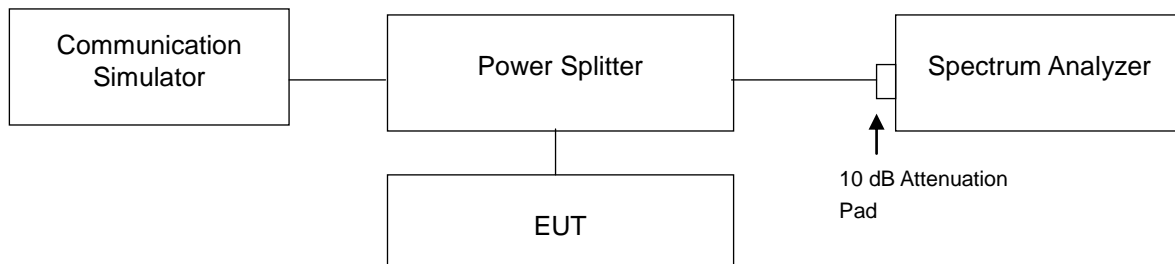




4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz for 9 kHz to 1 GHz and RBW = 1 MHz and VBW = 3 MHz for 1 GHz to 27 GHz is used for conducted emission measurement.




4.7.4 Test Results

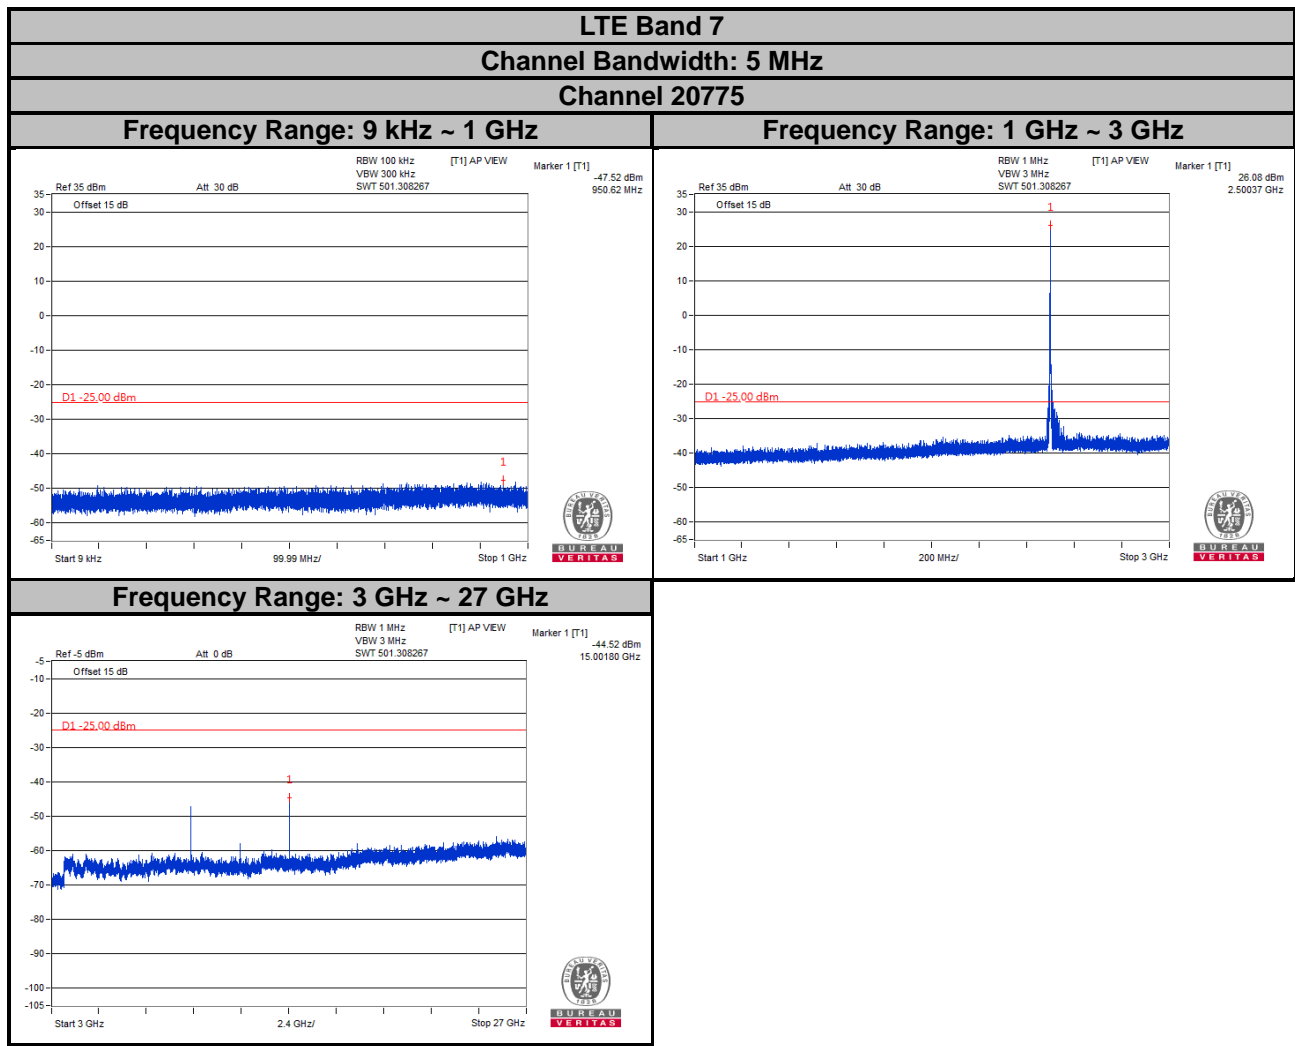




LTE Band 7
Channel Bandwidth: 5 MHz
Channel 21100

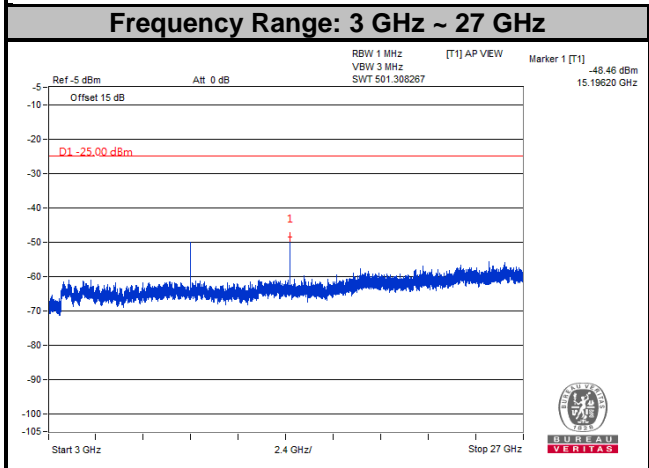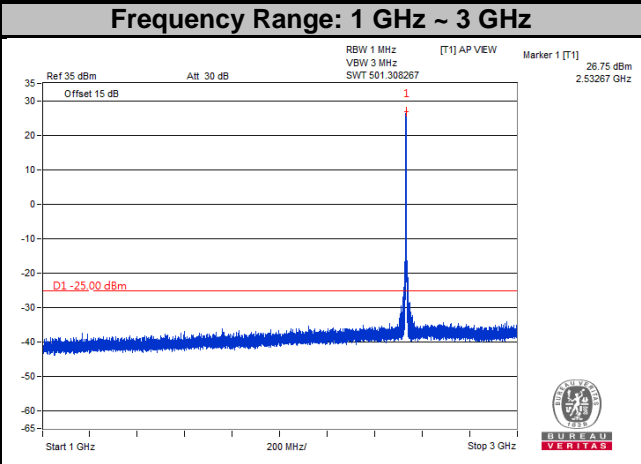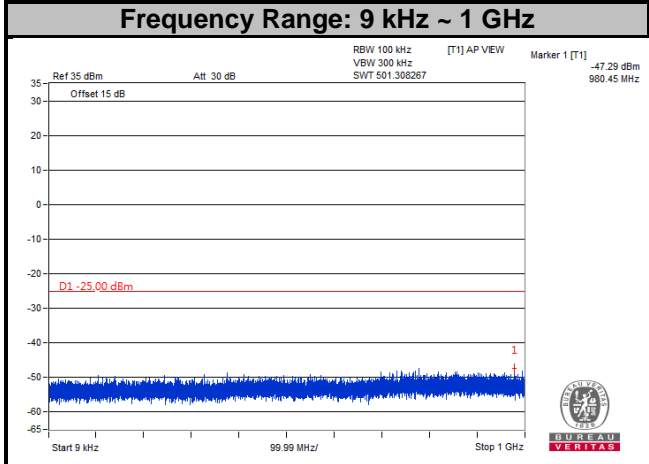




LTE Band 7
Channel Bandwidth: 5 MHz
Channel 21425

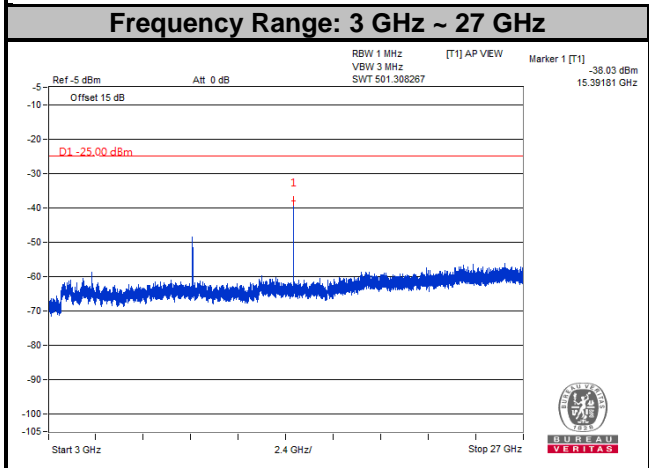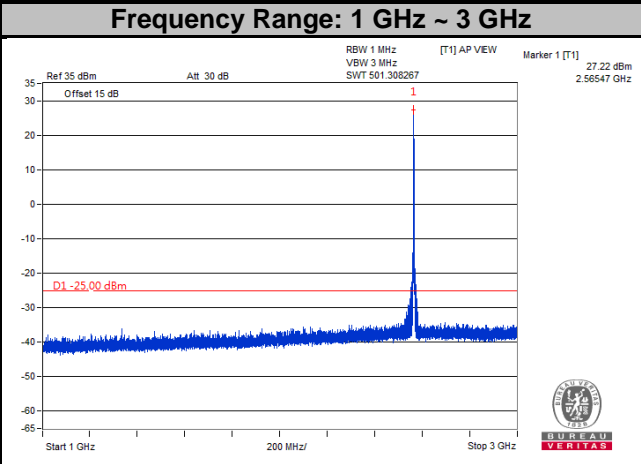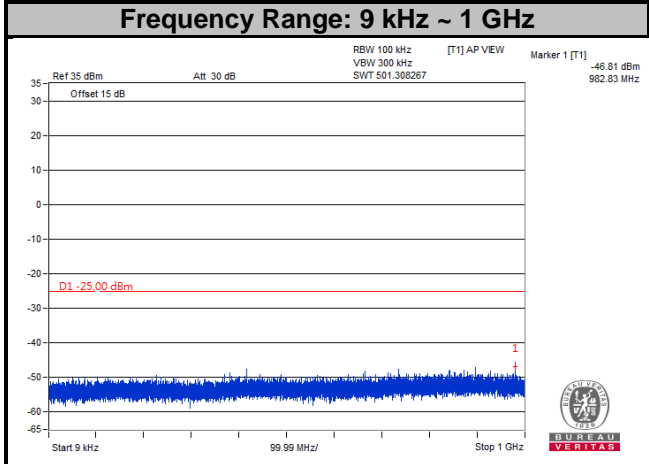




LTE Band 7
Channel Bandwidth: 10 MHz
Channel 20800

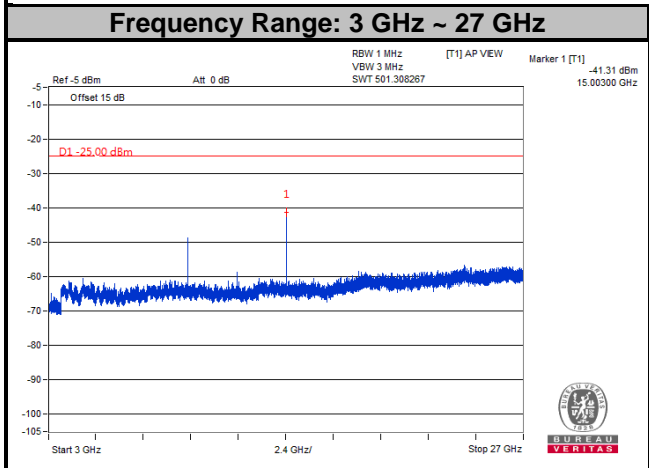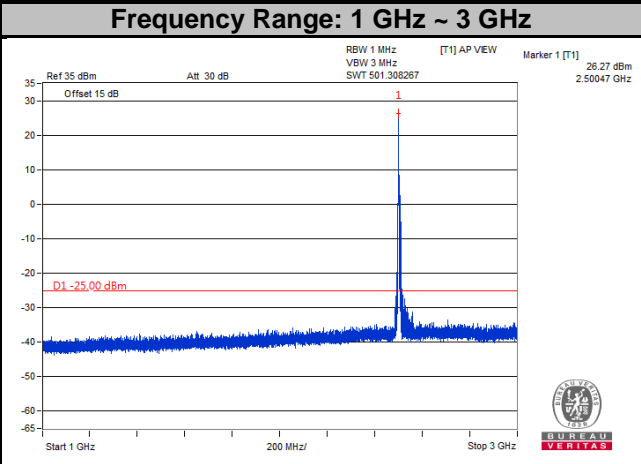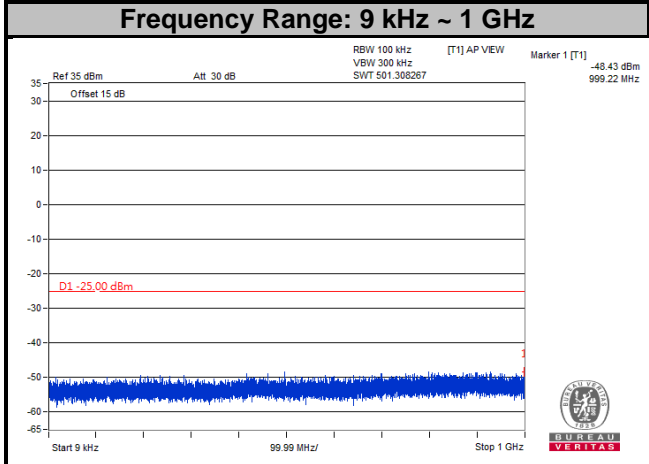




LTE Band 7
Channel Bandwidth: 10 MHz
Channel 21100

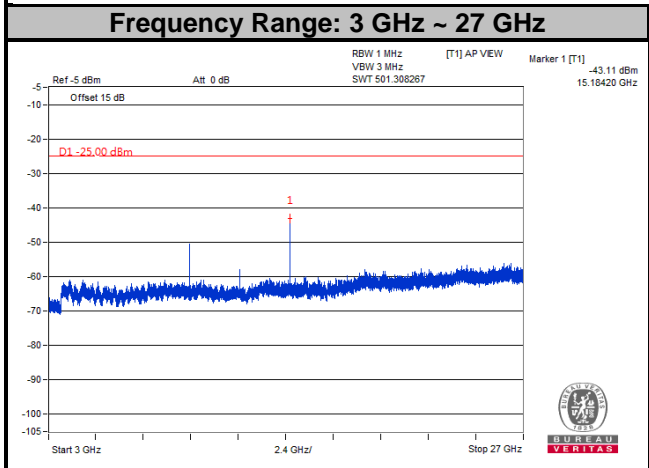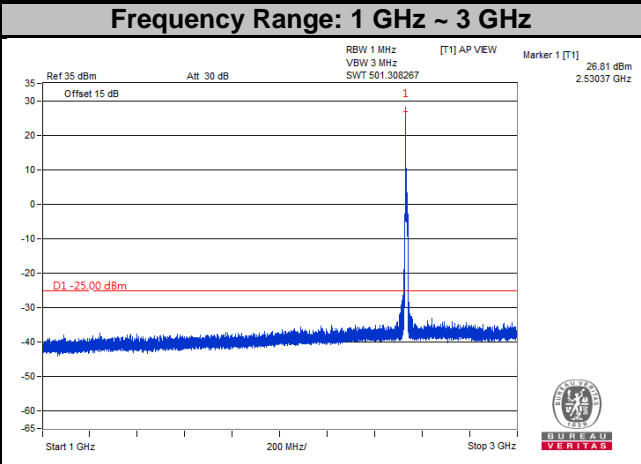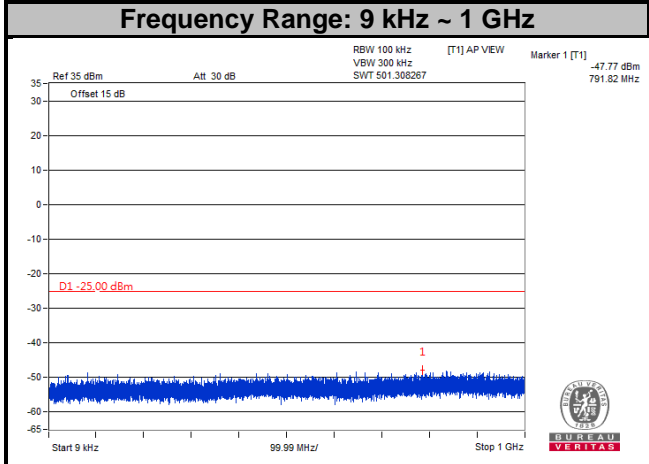




LTE Band 7
Channel Bandwidth: 10 MHz
Channel 21400

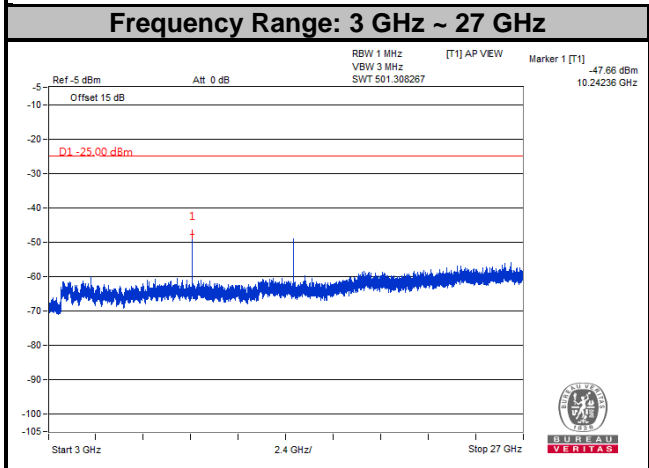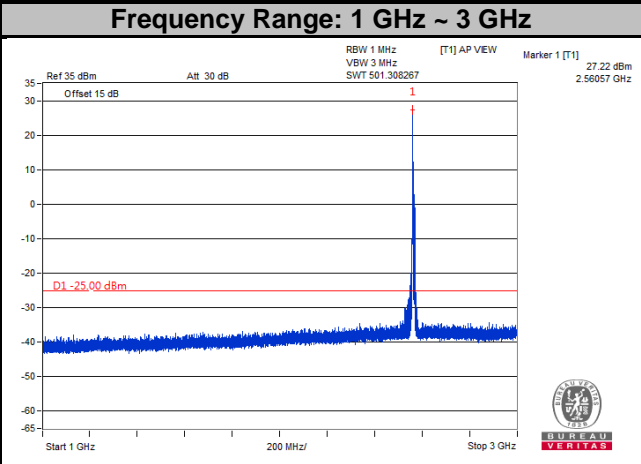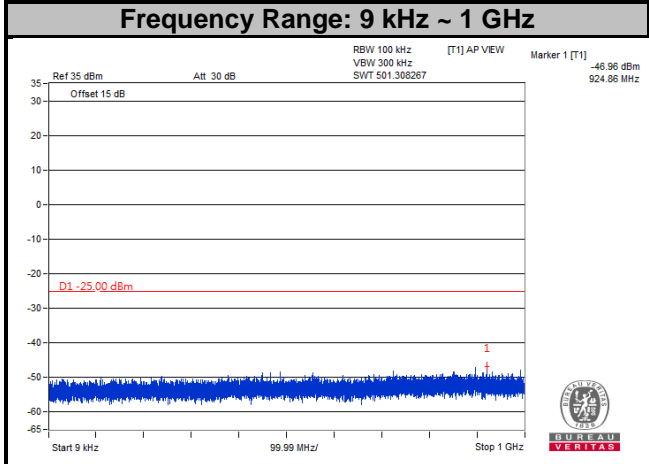




LTE Band 7
Channel Bandwidth: 15 MHz
Channel 20825

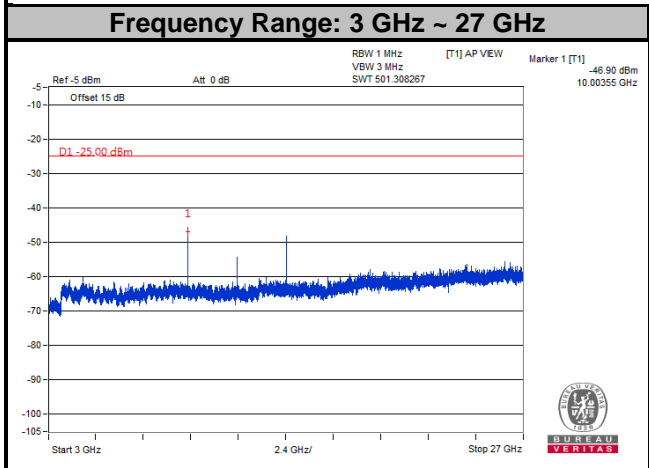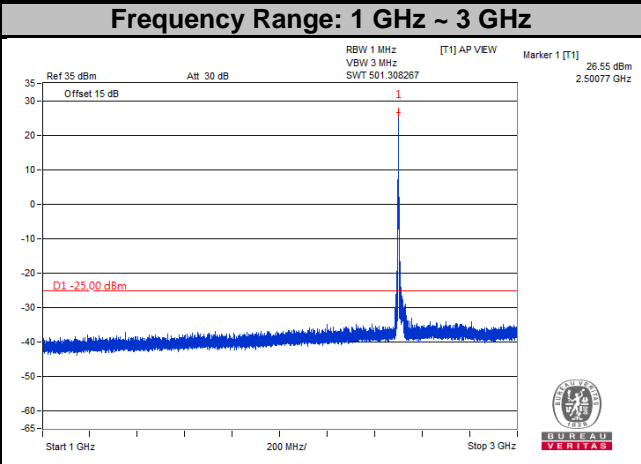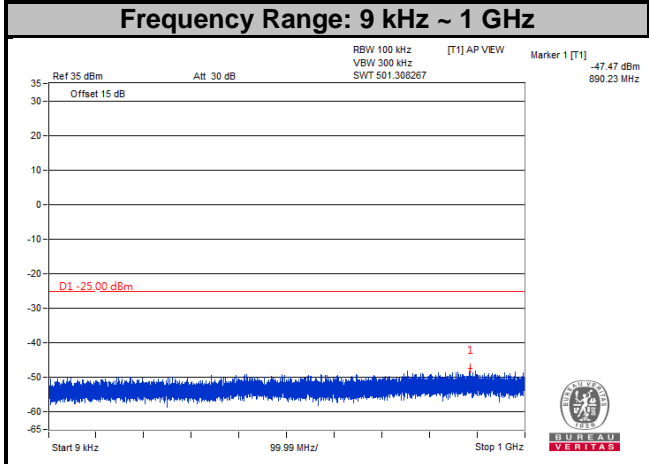




LTE Band 7
Channel Bandwidth: 15 MHz
Channel 21100

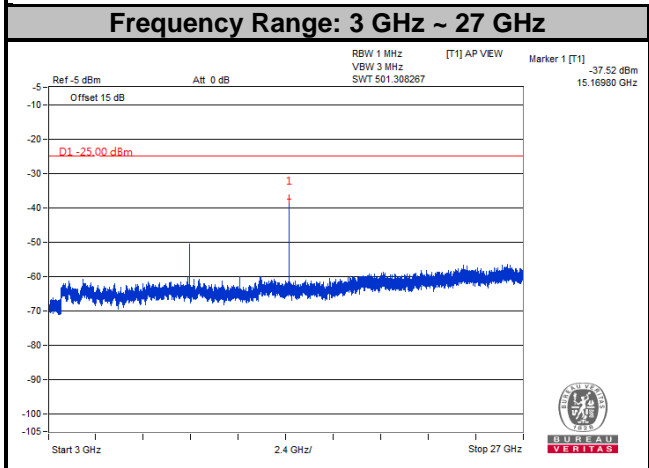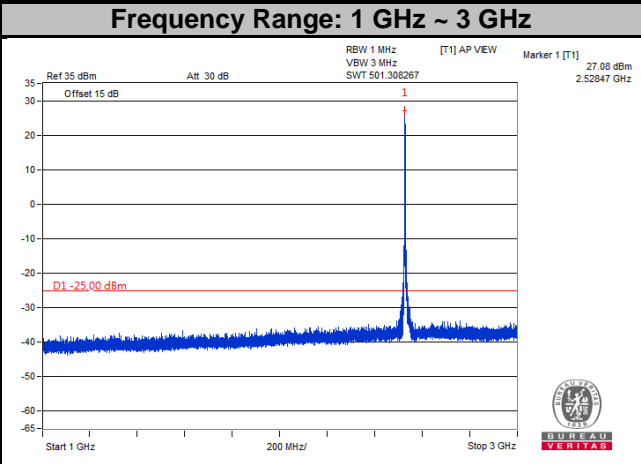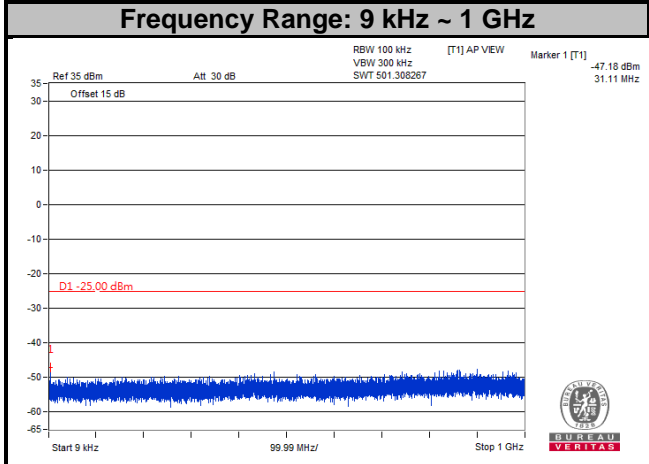




LTE Band 7
Channel Bandwidth: 15 MHz
Channel 21375

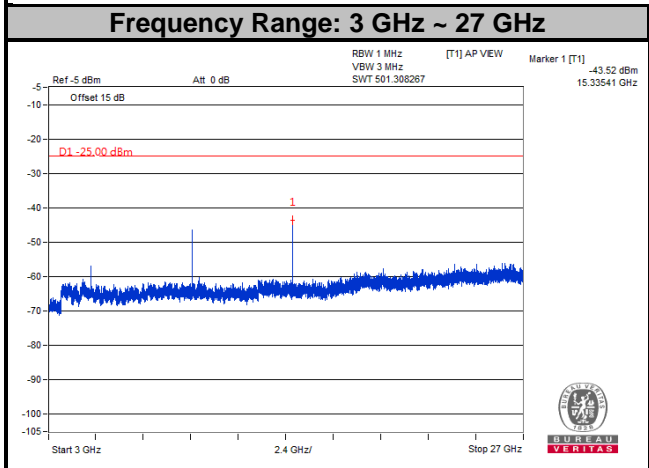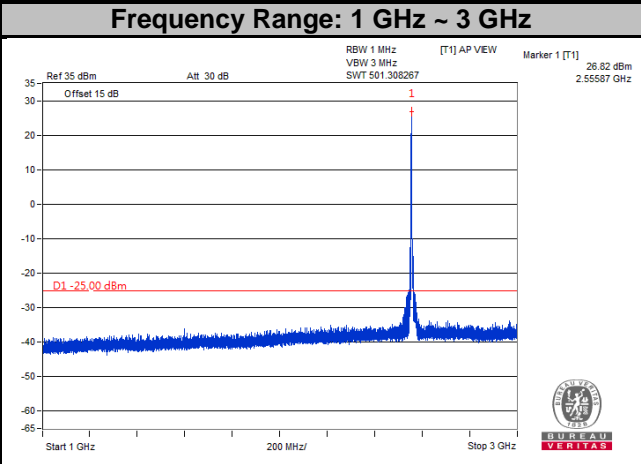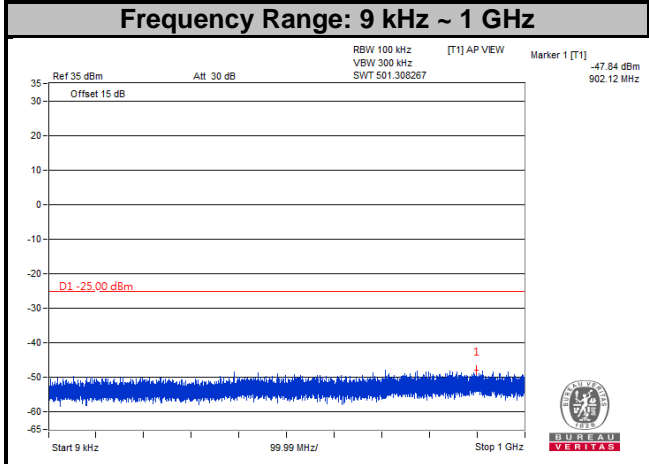




LTE Band 7
Channel Bandwidth: 20 MHz
Channel 20850

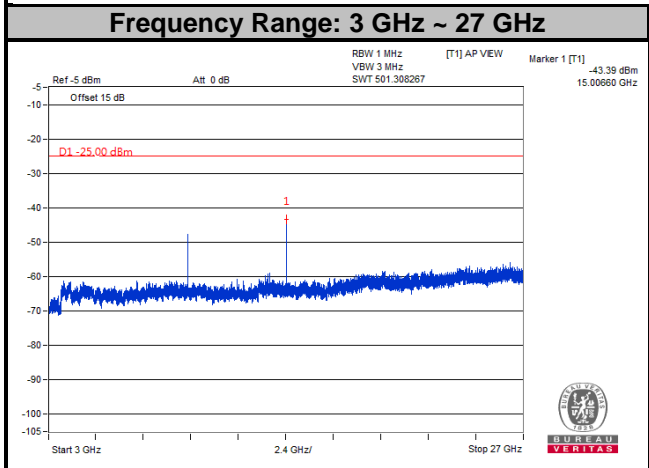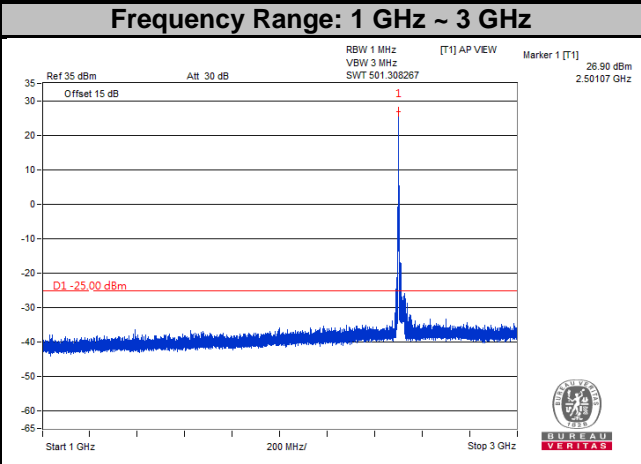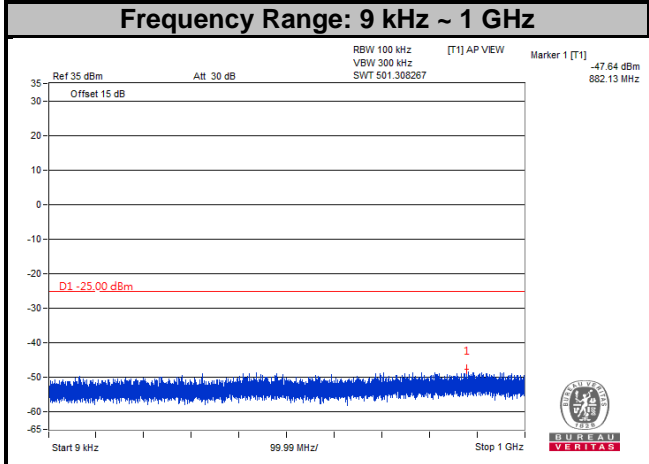




LTE Band 7
Channel Bandwidth: 20 MHz
Channel 21100

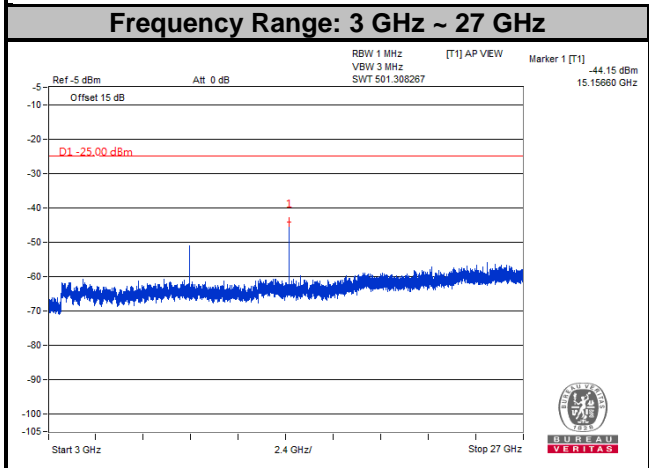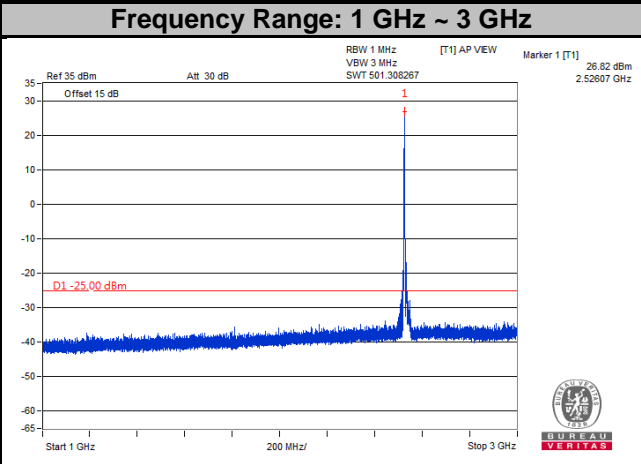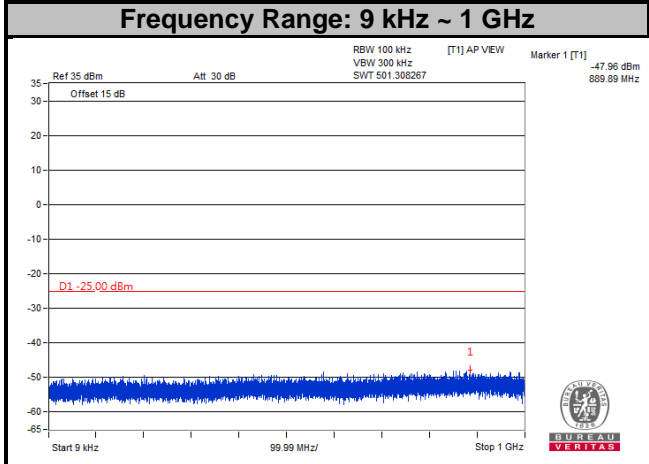




LTE Band 7
Channel Bandwidth: 20 MHz
Channel 21350

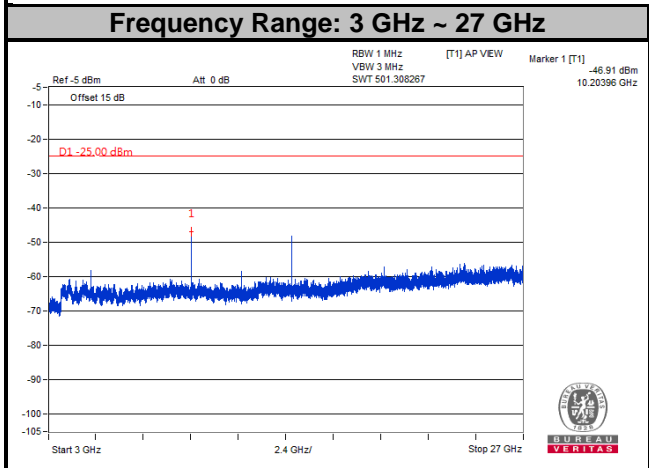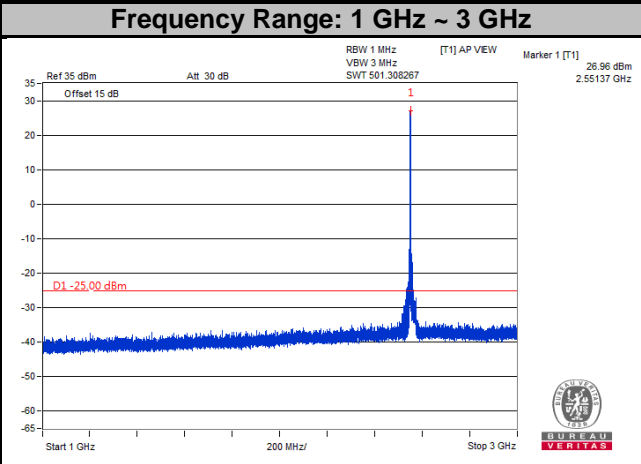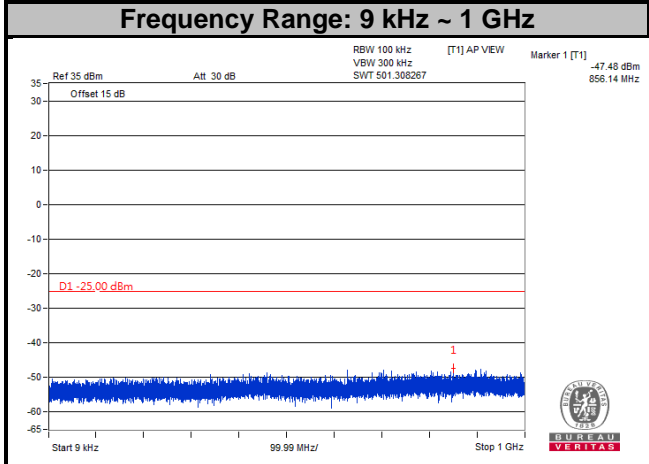




LTE Band 38
Channel Bandwidth: 5 MHz
Channel 37775

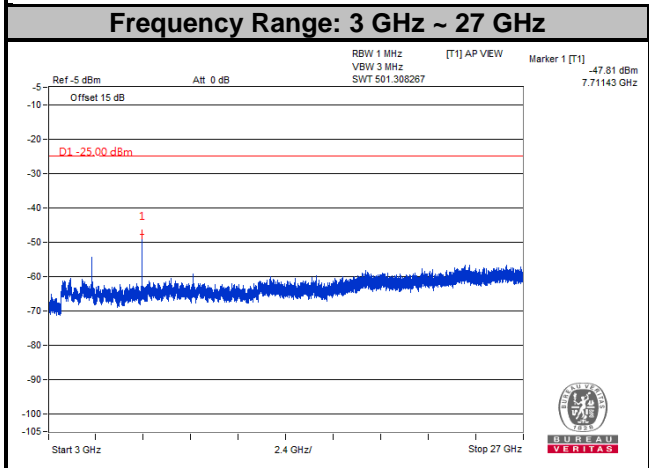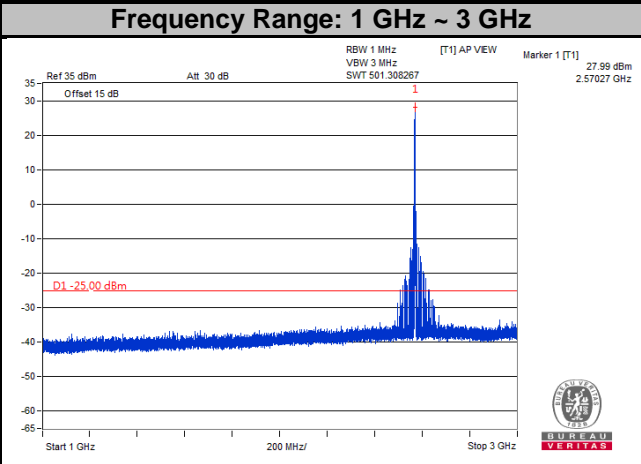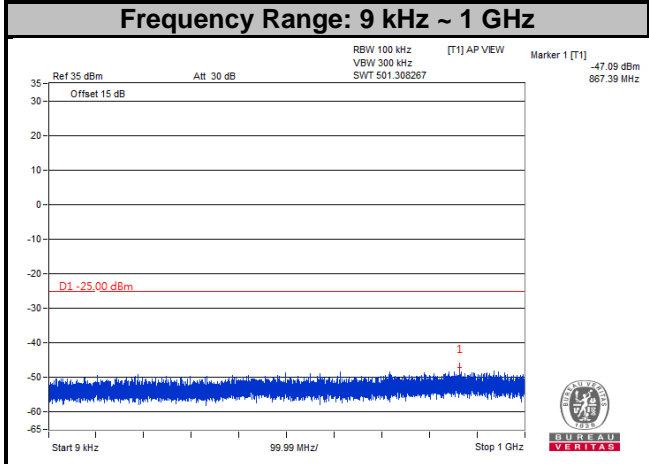




LTE Band 38
Channel Bandwidth: 5 MHz
Channel 38000

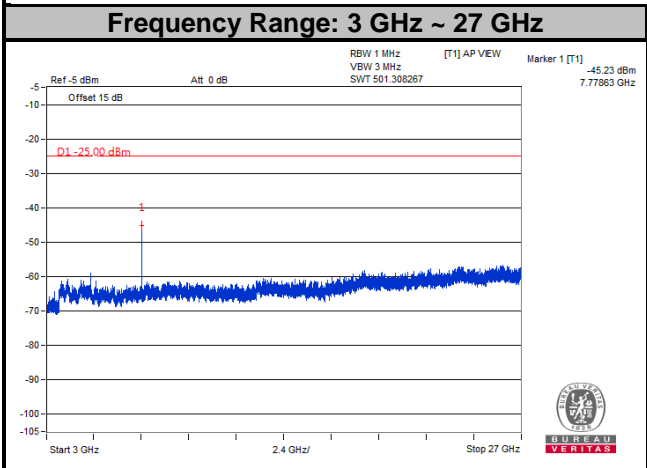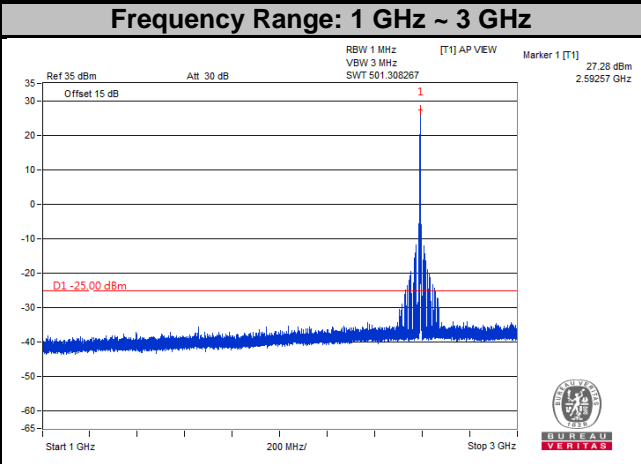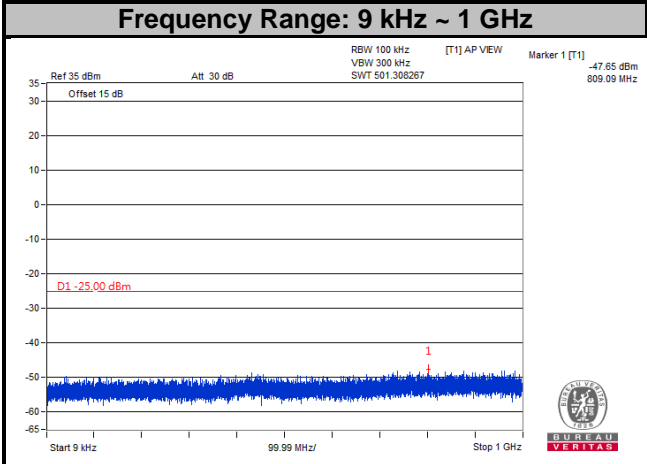




LTE Band 38
Channel Bandwidth: 5 MHz
Channel 38225

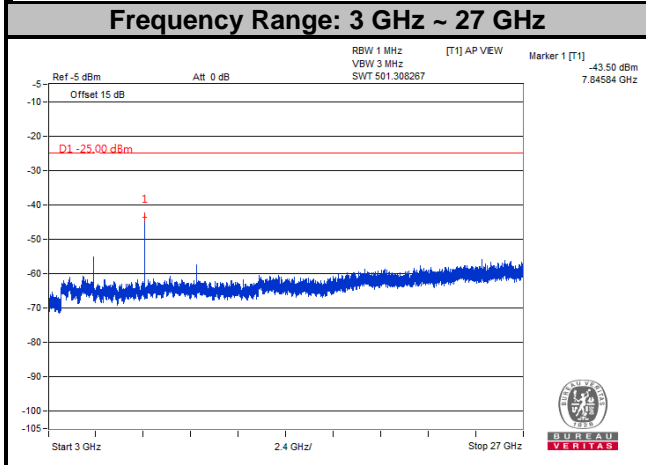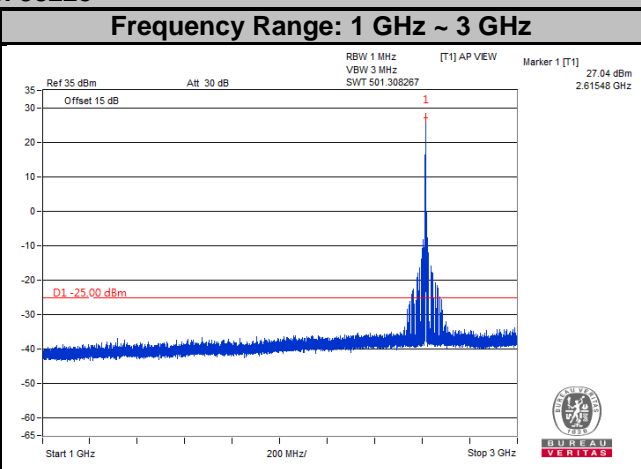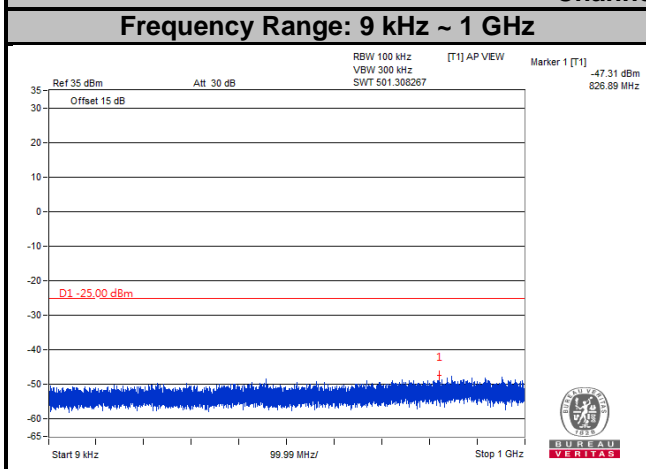




LTE Band 38
Channel Bandwidth: 10 MHz
Channel 37800

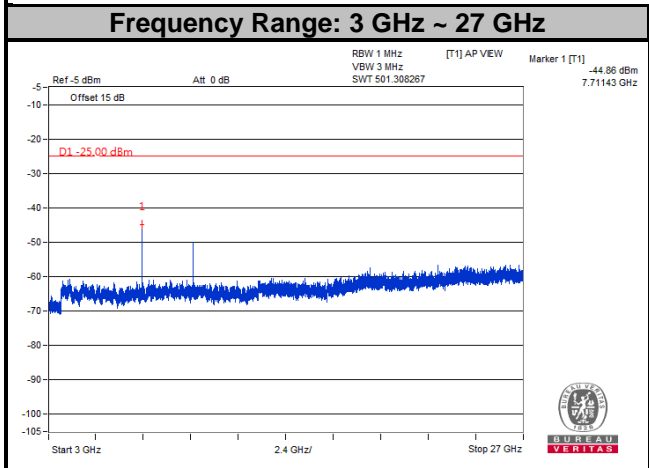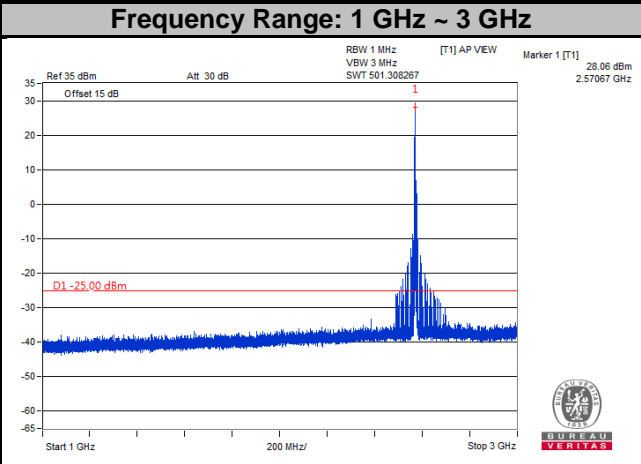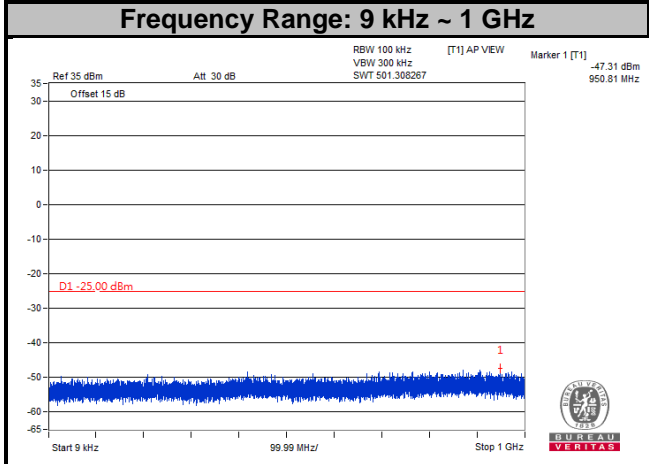




LTE Band 38
Channel Bandwidth: 10 MHz
Channel 38000

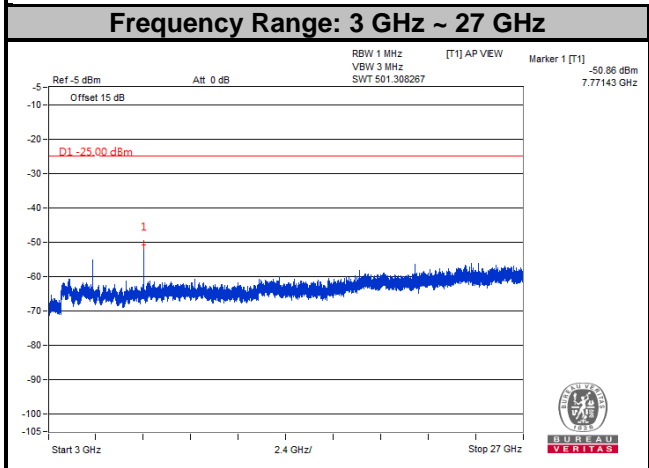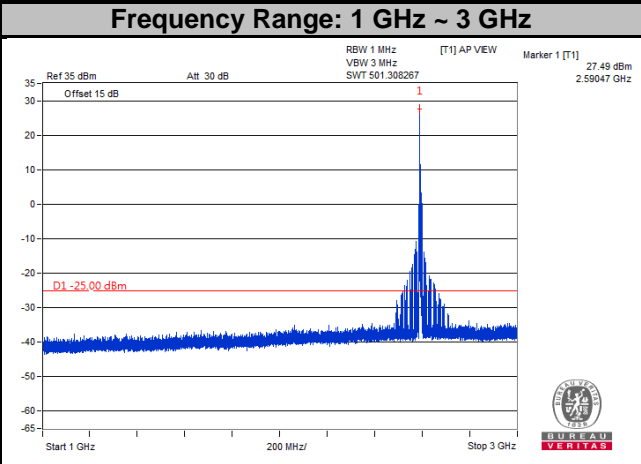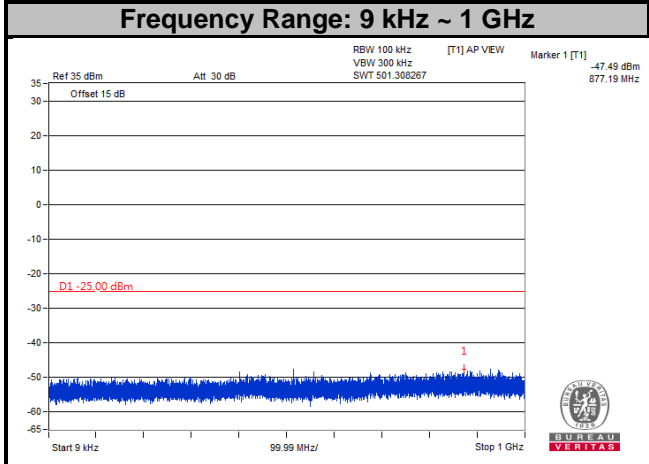




LTE Band 38
Channel Bandwidth: 10 MHz
Channel 38200

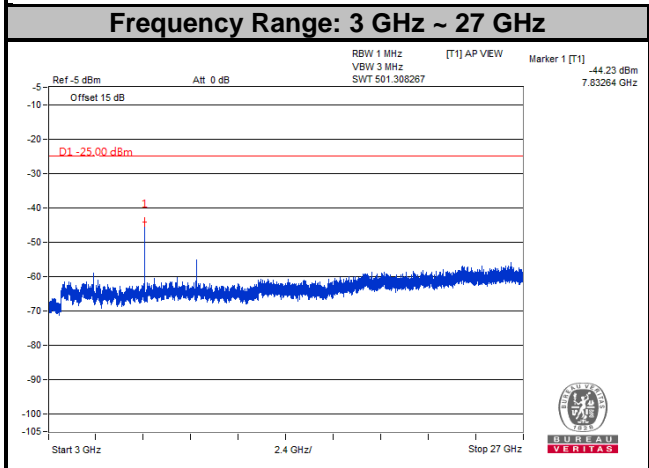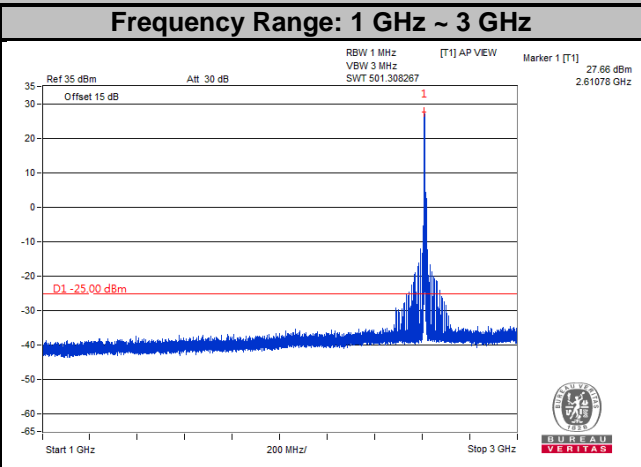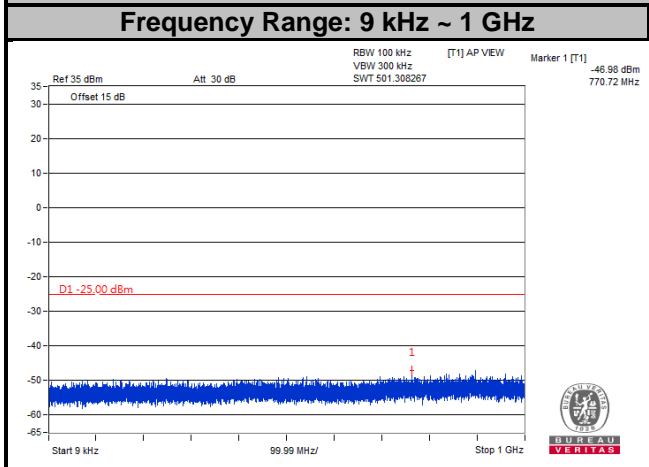




LTE Band 38
Channel Bandwidth: 15 MHz
Channel 37825

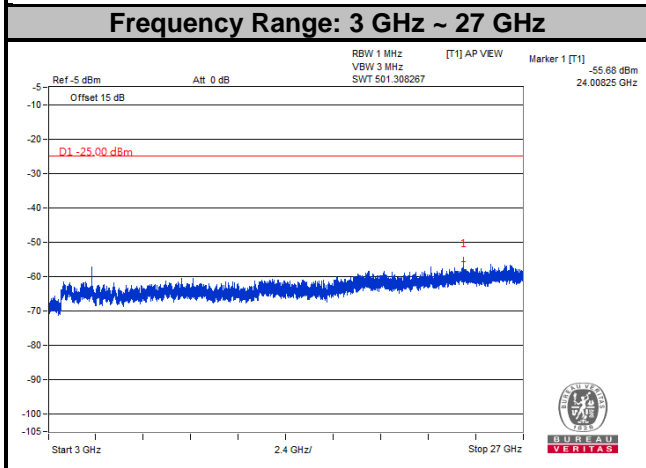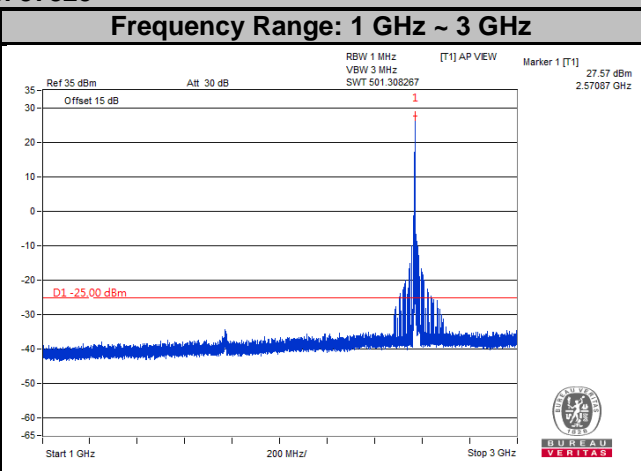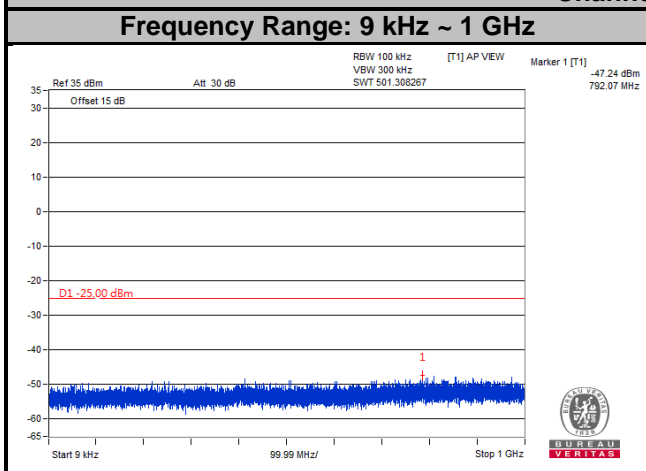




LTE Band 38
Channel Bandwidth: 15 MHz
Channel 38000

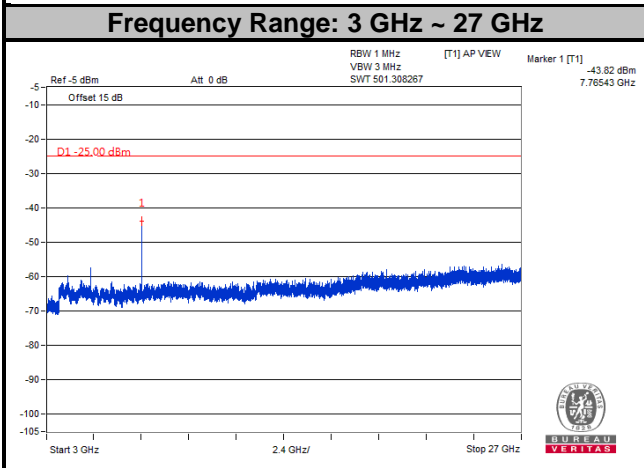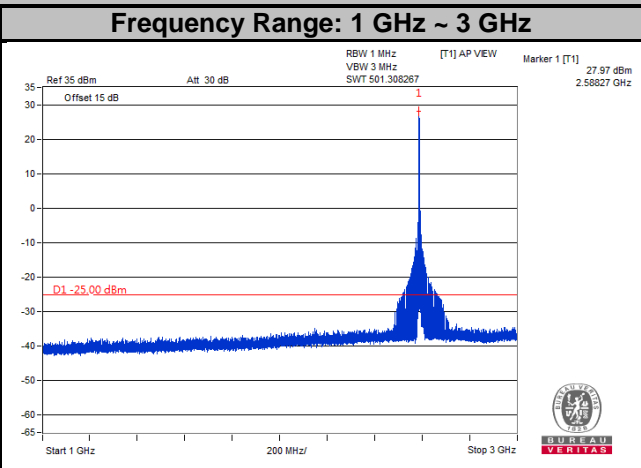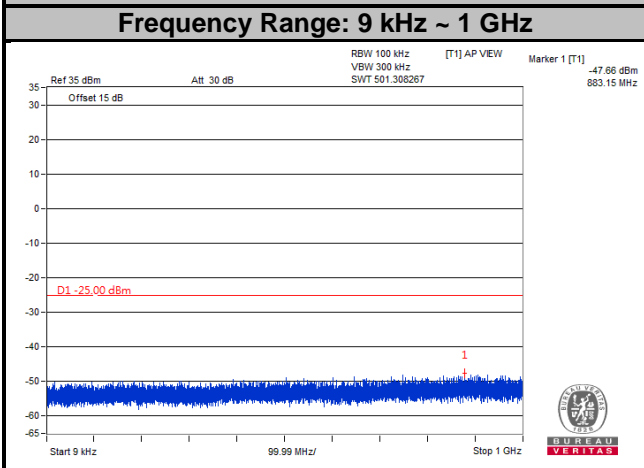




LTE Band 38
Channel Bandwidth: 15 MHz
Channel 38175

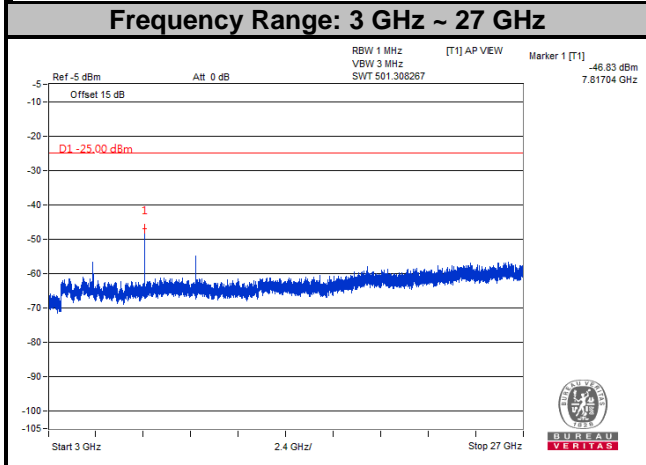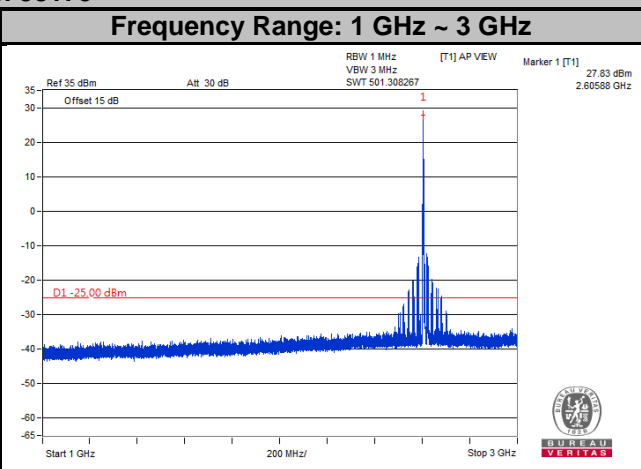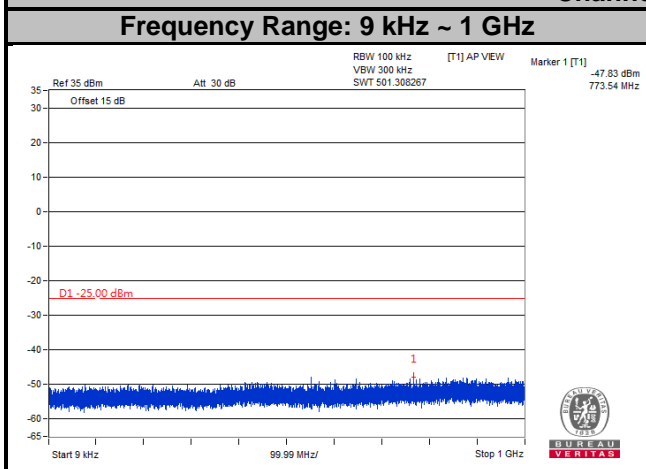




LTE Band 38
Channel Bandwidth: 20 MHz
Channel 37850

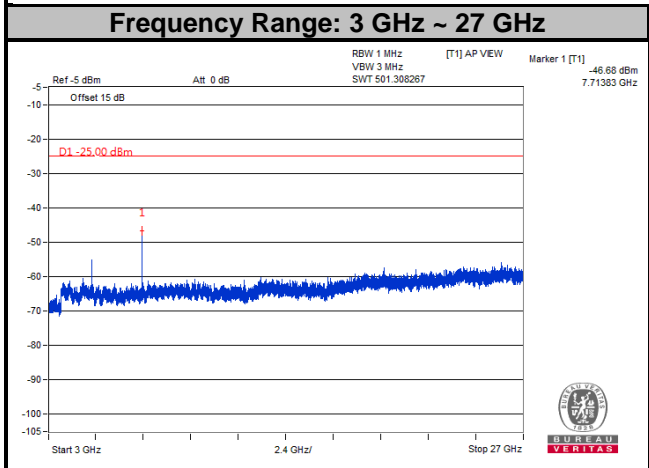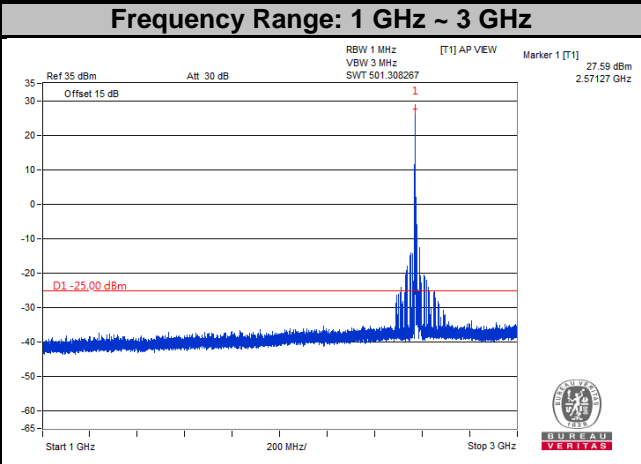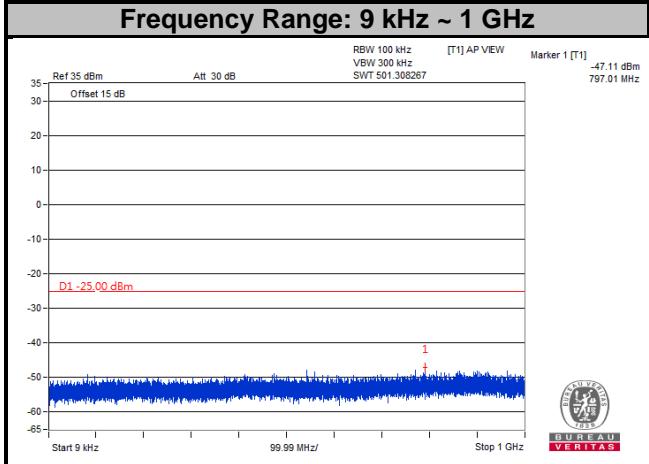




LTE Band 38
Channel Bandwidth: 20 MHz
Channel 38000

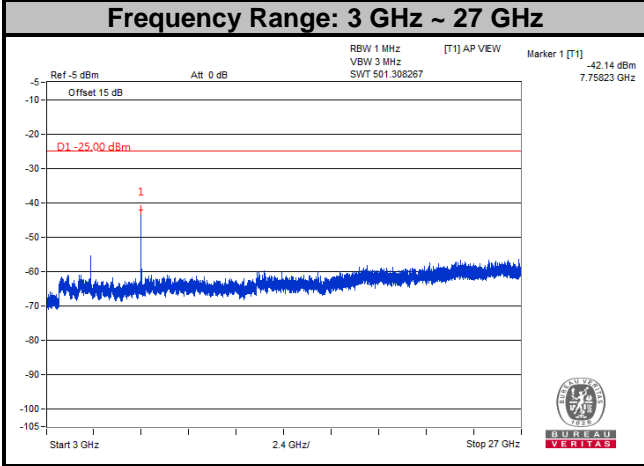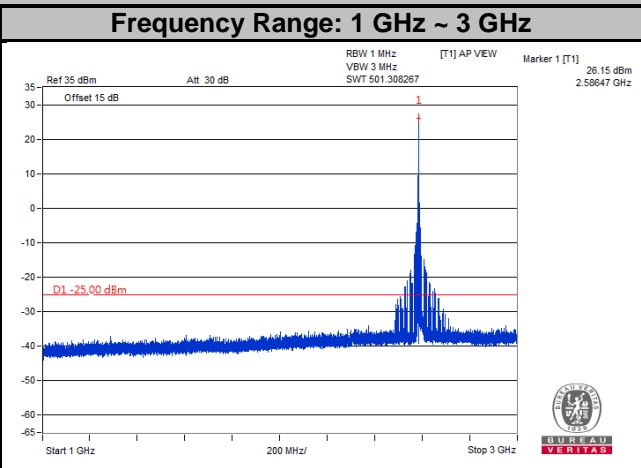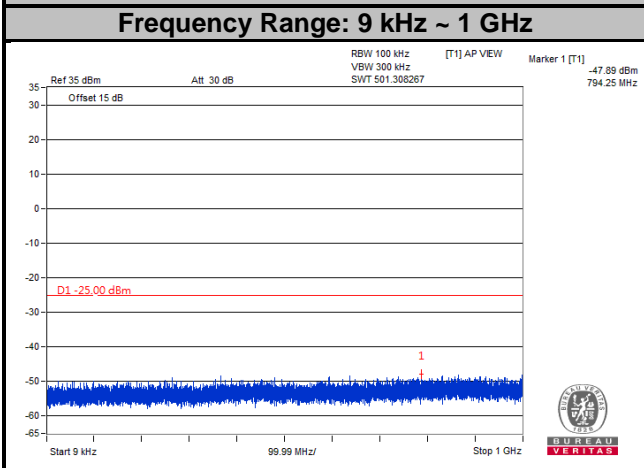




LTE Band 38
Channel Bandwidth: 20 MHz
Channel 38150

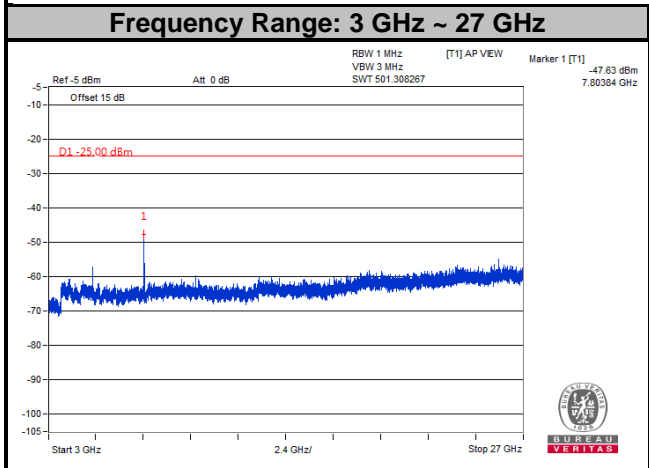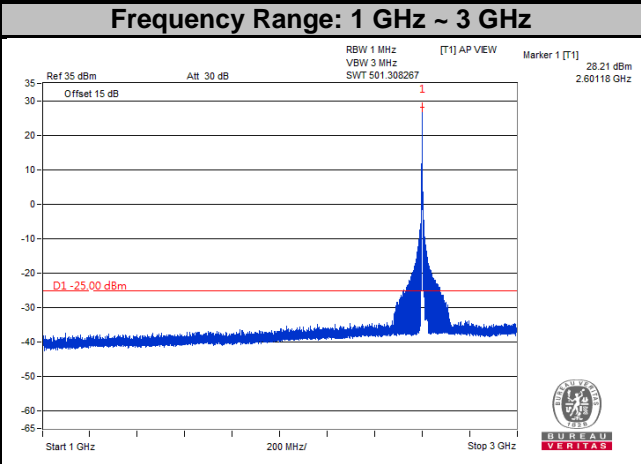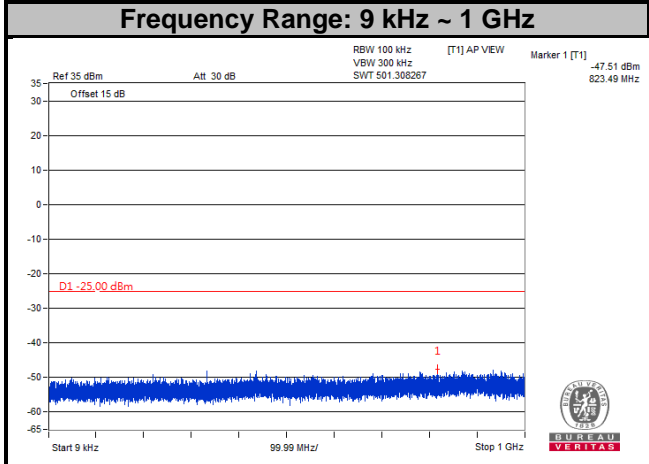

LTE Band 41
Channel Bandwidth: 5 MHz
Channel 39675

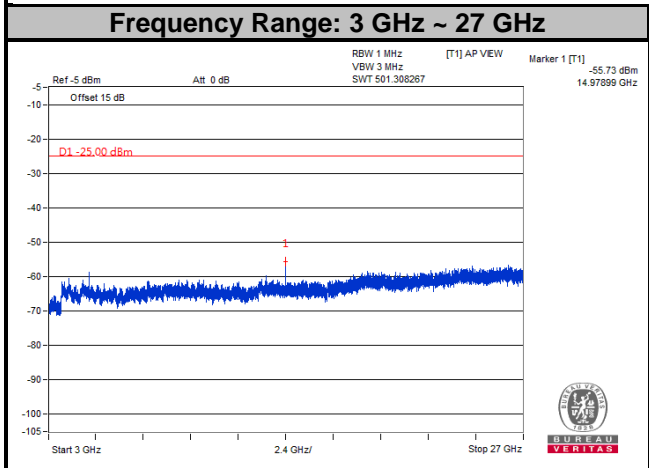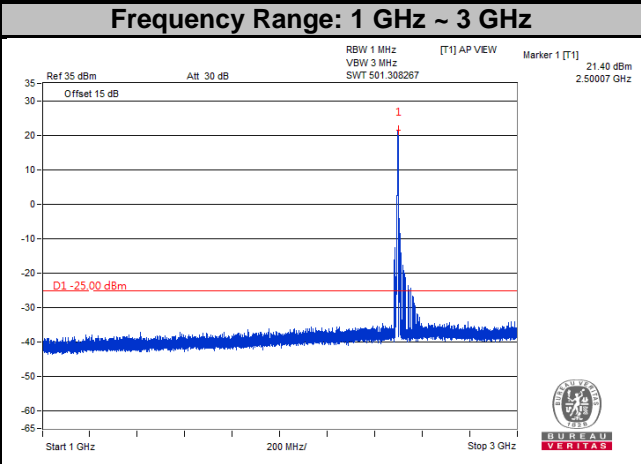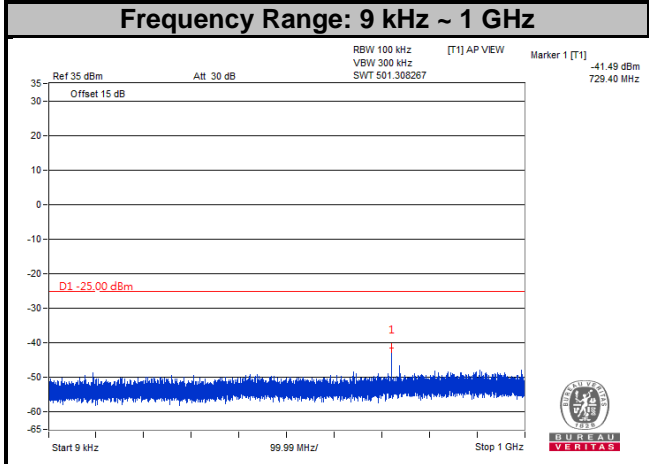


LTE Band 41
Channel Bandwidth: 5 MHz
Channel 40620

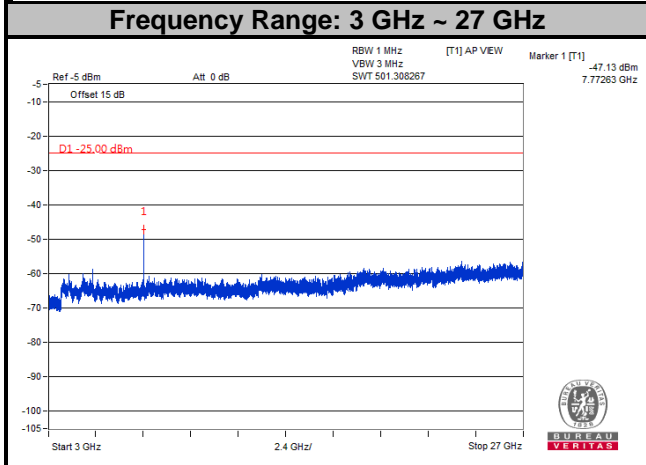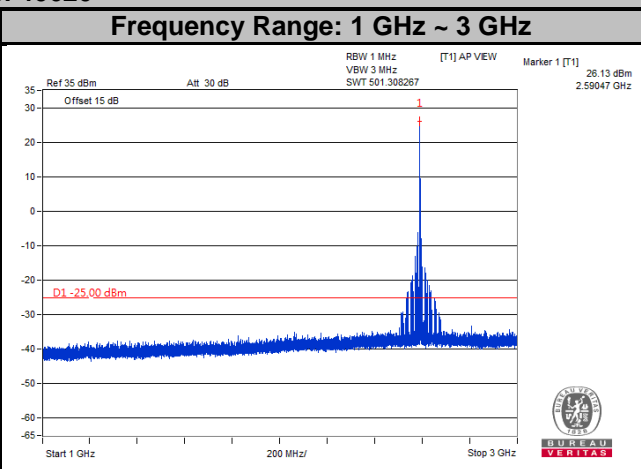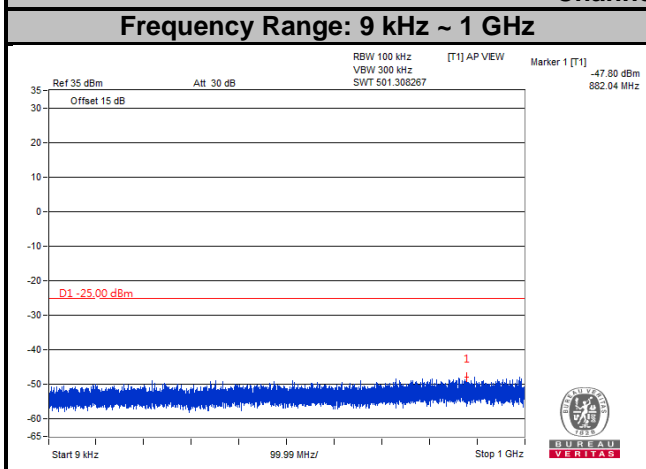


LTE Band 41
Channel Bandwidth: 5 MHz

Channel 41565


Frequency Range: 9 kHz ~ 1 GHz

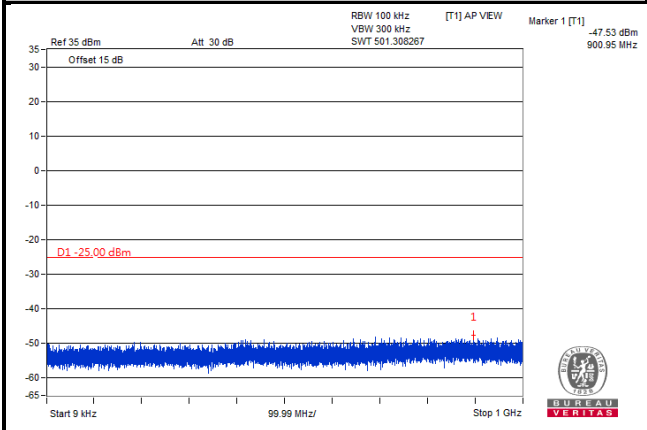

Frequency Range: 1 GHz ~ 3 GHz

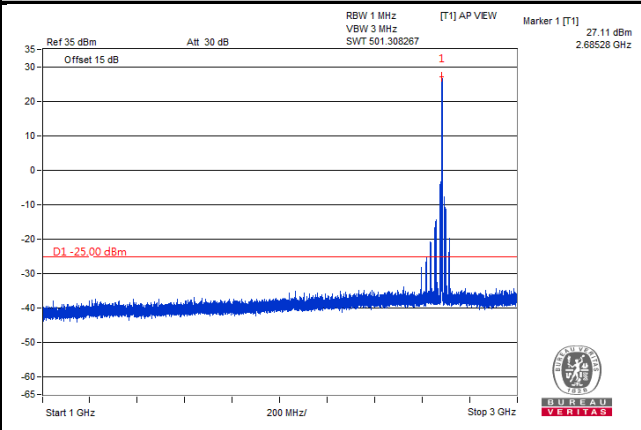

Frequency Range: 3 GHz ~ 27 GHz

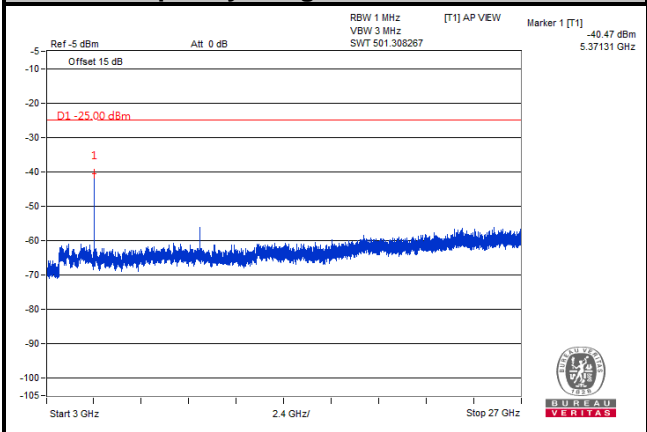


LTE Band 41


Channel Bandwidth: 10 MHz

Channel 39700


Frequency Range: 9 kHz ~ 1 GHz

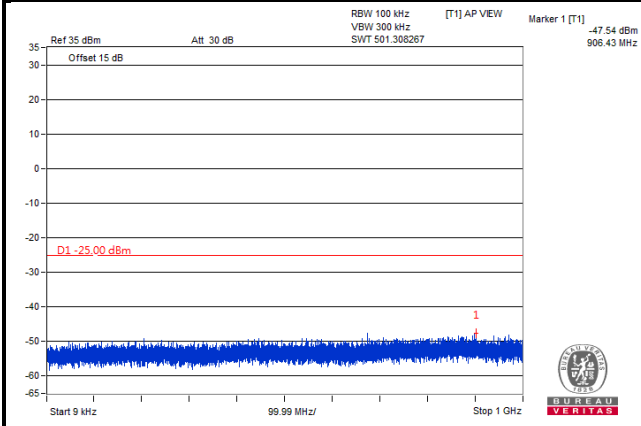

Frequency Range: 1 GHz ~ 3 GHz

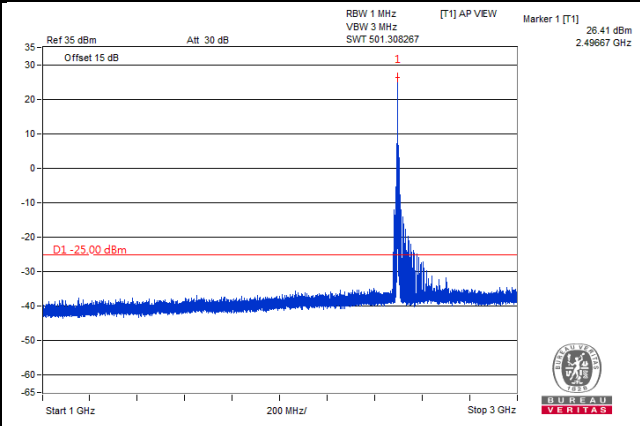


Frequency Range: 3 GHz ~ 27 GHz

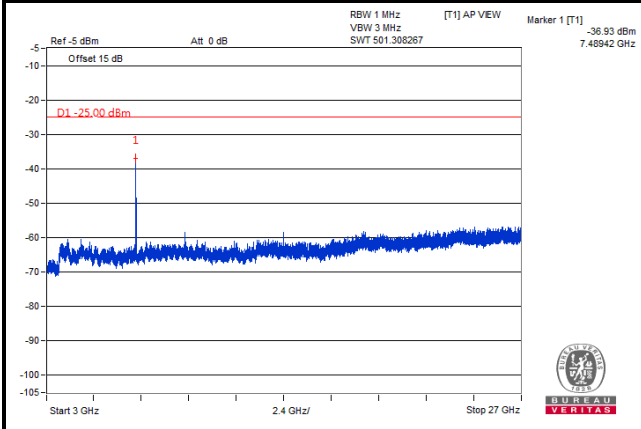


LTE Band 41
Channel Bandwidth: 10 MHz

Channel 40620


Frequency Range: 9 kHz ~ 1 GHz

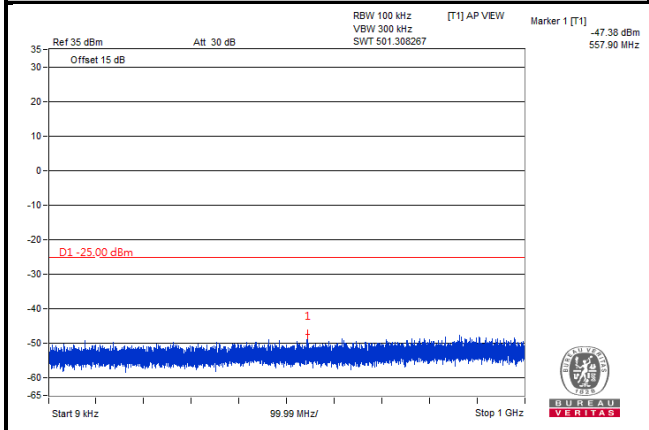

Frequency Range: 1 GHz ~ 3 GHz

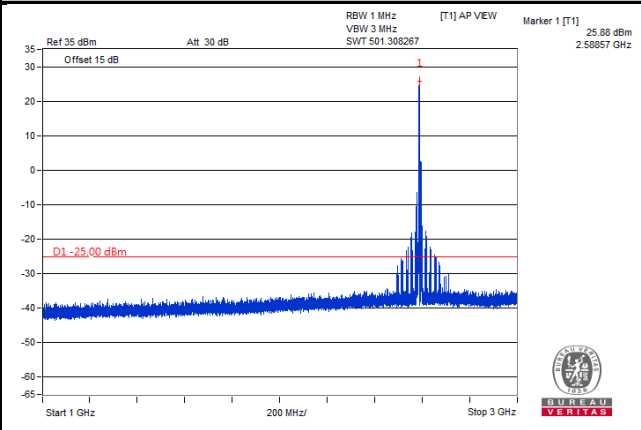


Frequency Range: 3 GHz ~ 27 GHz

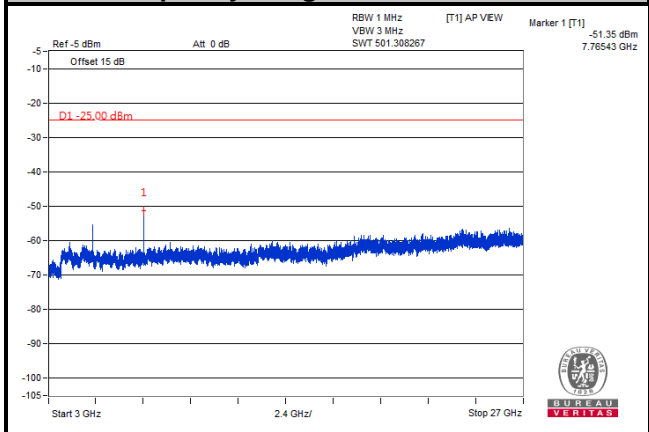


LTE Band 41
Channel Bandwidth: 10 MHz

Channel 41540


Frequency Range: 9 kHz ~ 1 GHz

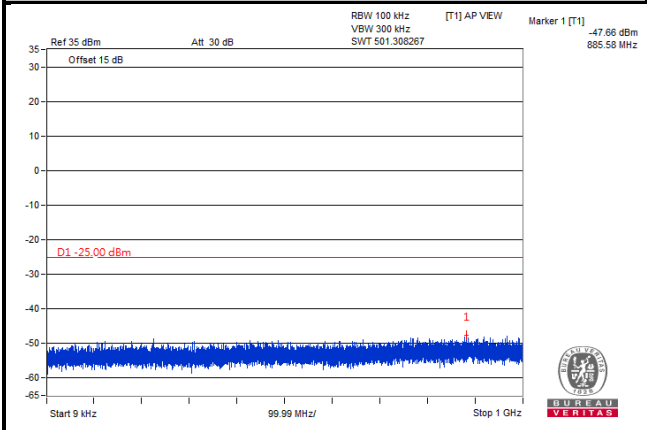




Frequency Range: 1 GHz ~ 3 GHz

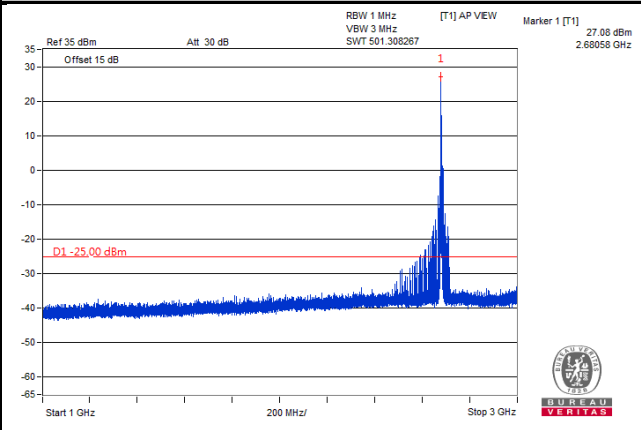

Frequency Range: 3 GHz ~ 27 GHz

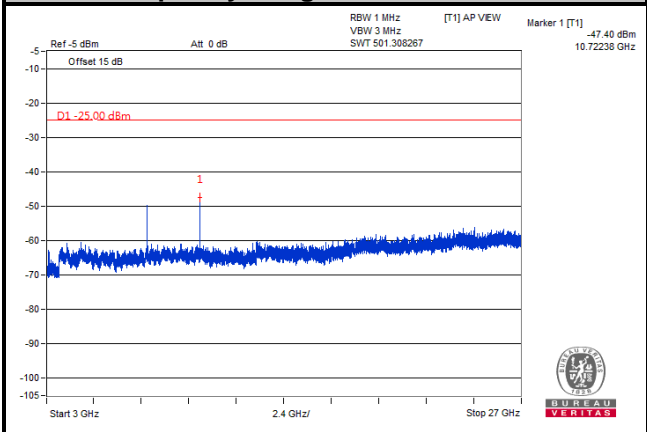


LTE Band 41
Channel Bandwidth: 15 MHz
Channel 39725

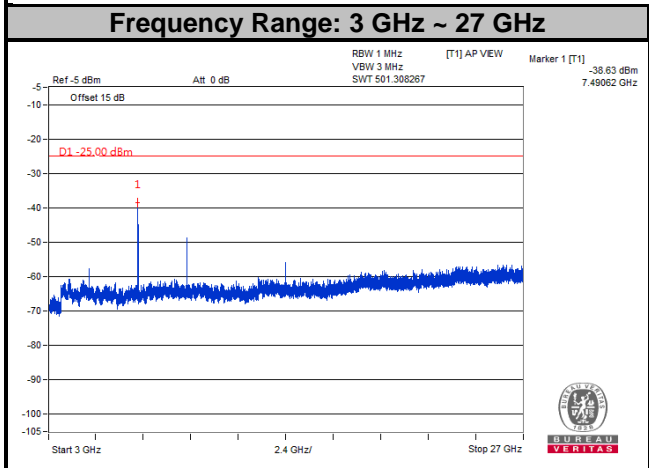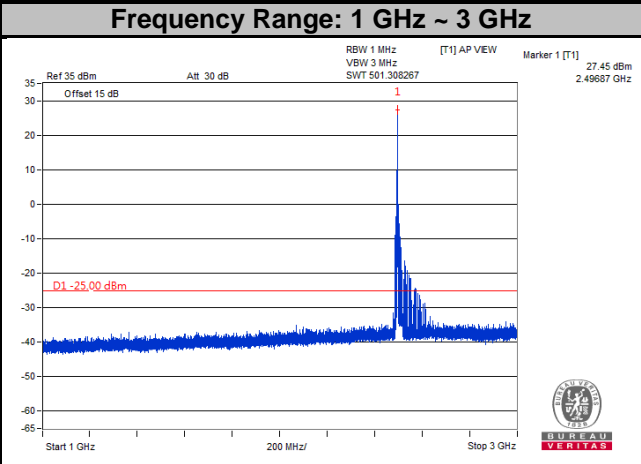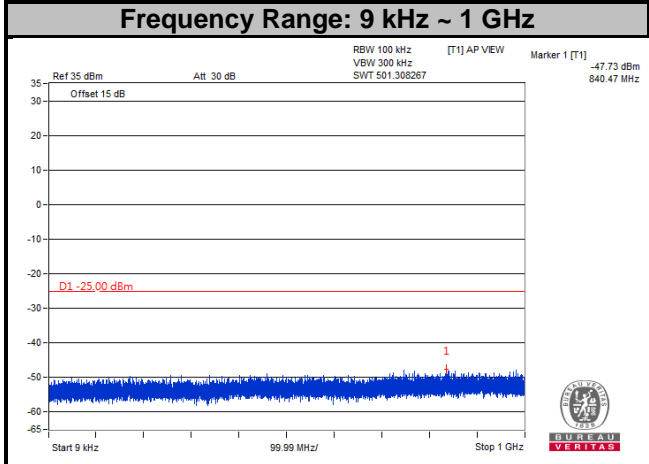


LTE Band 41
Channel Bandwidth: 15 MHz

Channel 40620


Frequency Range: 9 kHz ~ 1 GHz

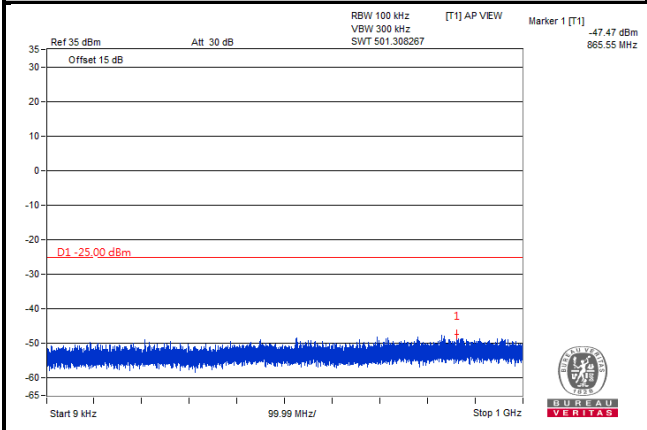




Frequency Range: 1 GHz ~ 3 GHz

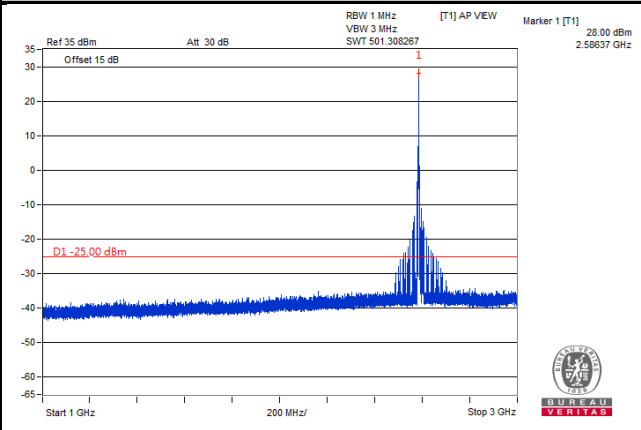

Frequency Range: 3 GHz ~ 27 GHz

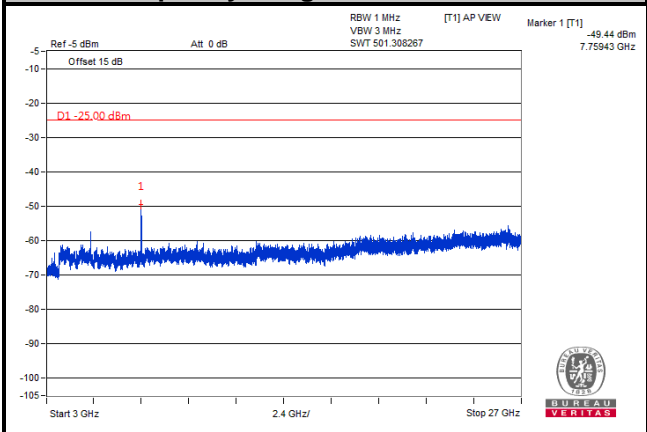


LTE Band 41
Channel Bandwidth: 15 MHz
Channel 41515

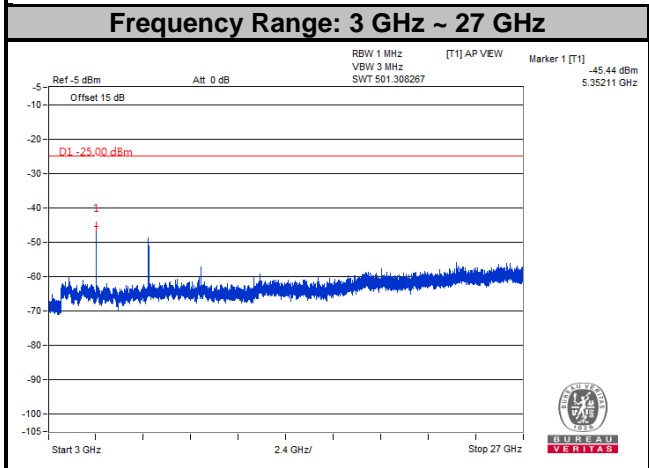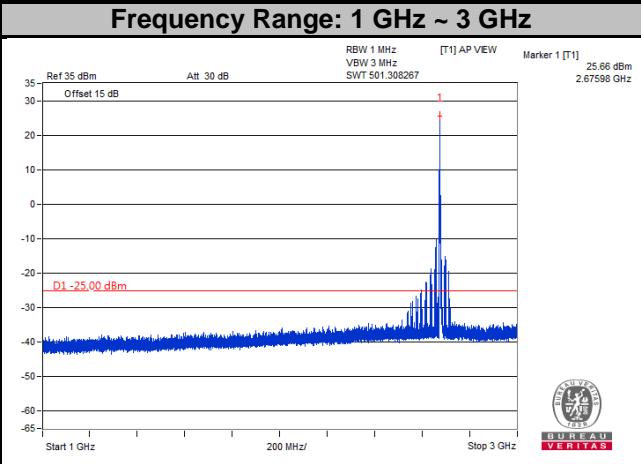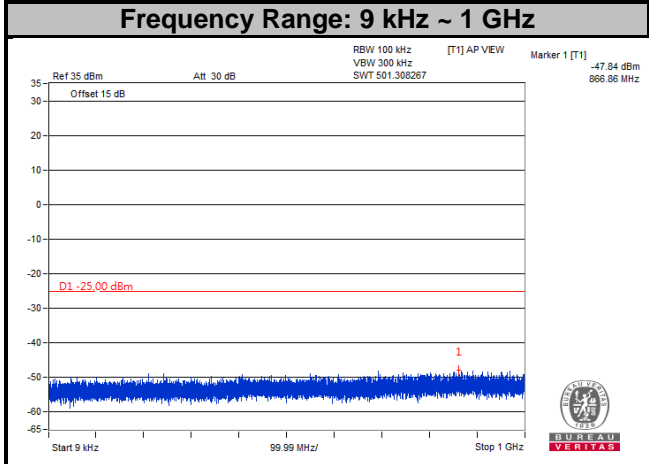


LTE Band 41
Channel Bandwidth: 20 MHz

Channel 39750


Frequency Range: 9 kHz ~ 1 GHz

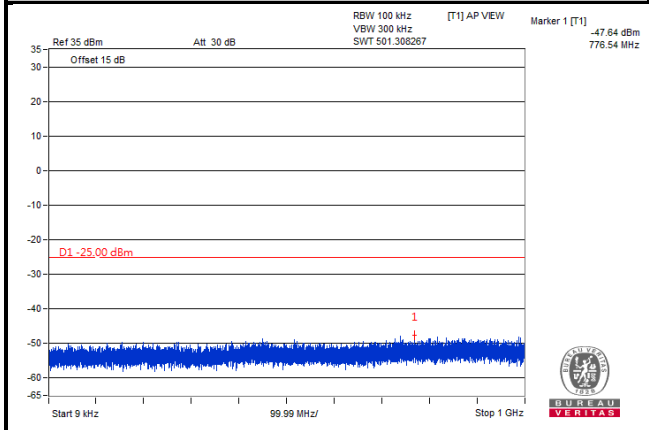

Frequency Range: 1 GHz ~ 3 GHz



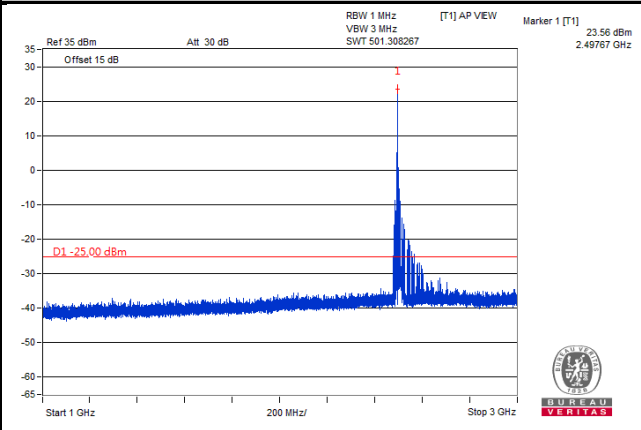


Frequency Range: 3 GHz ~ 27 GHz

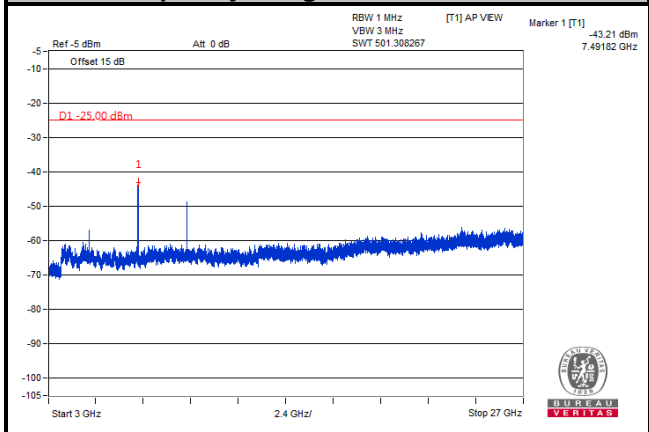

LTE Band 41
Channel Bandwidth: 20 MHz


Channel 40620

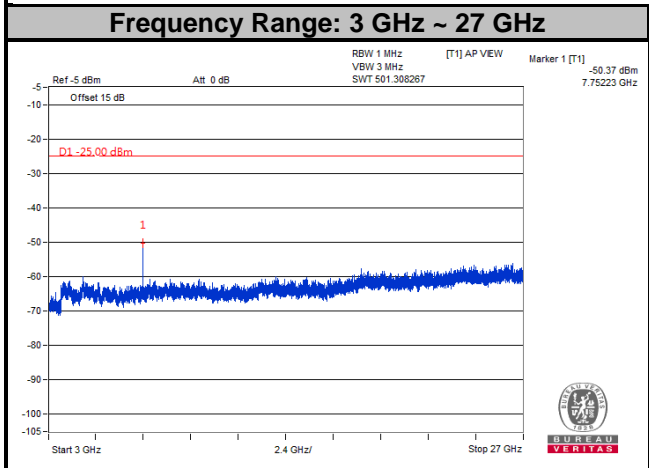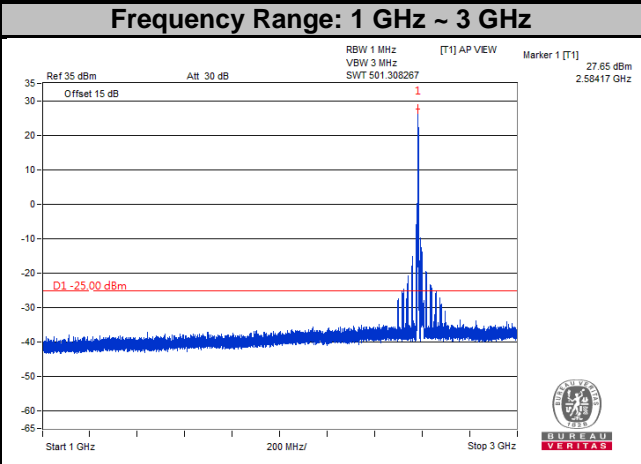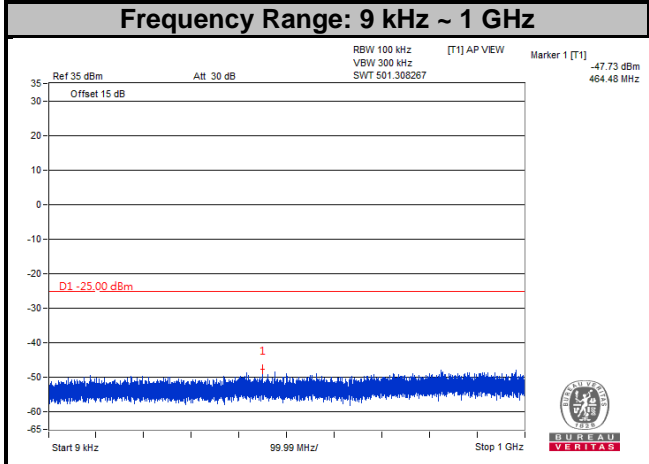


LTE Band 41
Channel Bandwidth: 20 MHz

Channel 41490


Frequency Range: 9 kHz ~ 1 GHz

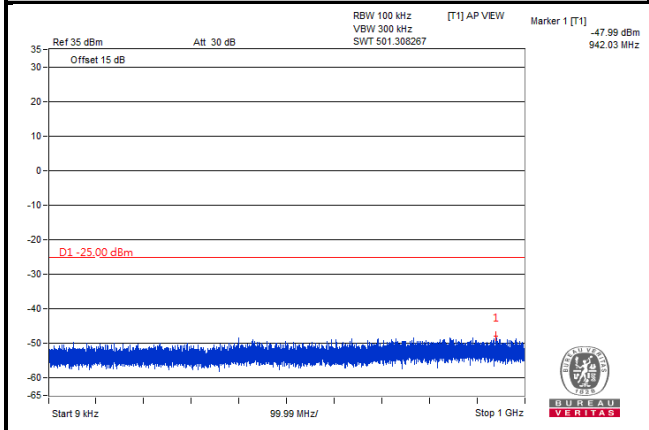

Frequency Range: 1 GHz ~ 3 GHz

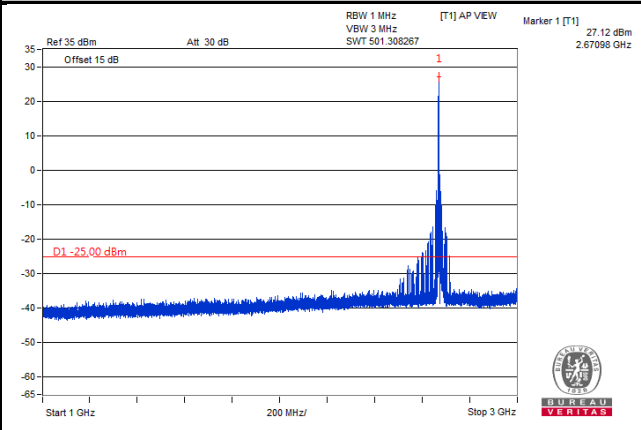

Frequency Range: 3 GHz ~ 27 GHz

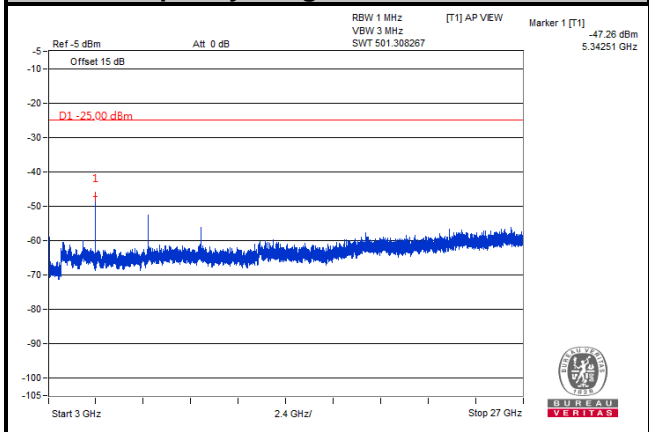

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

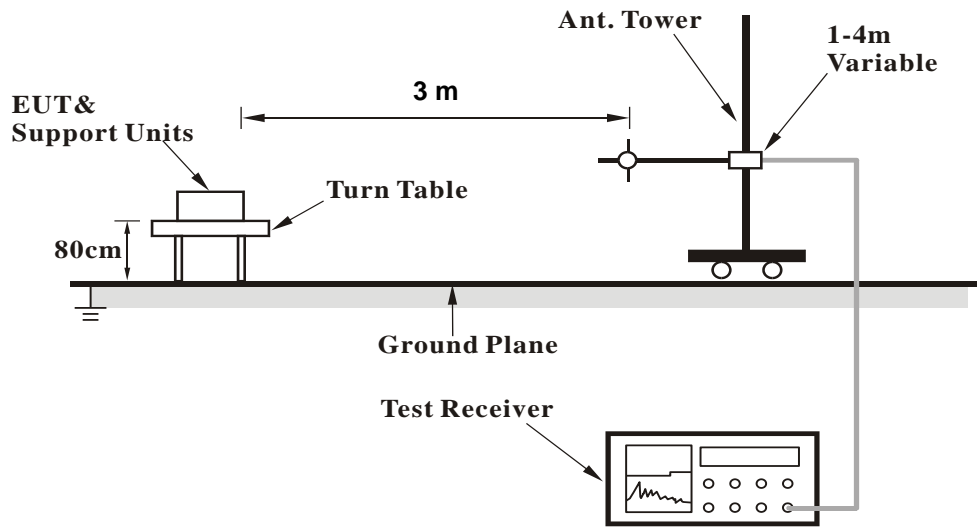

<Radiated Emission above 1 GHz>

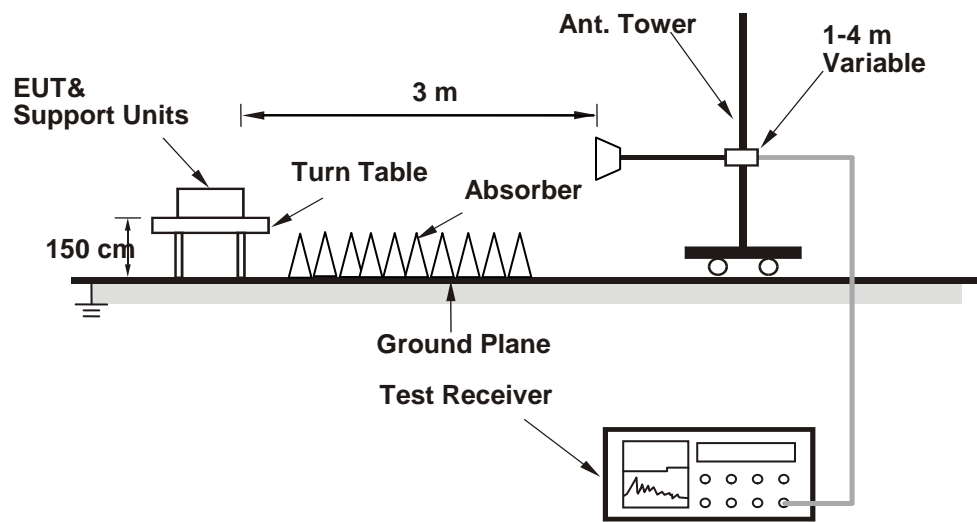

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

LTE Band 7

Channel Bandwidth: 20 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

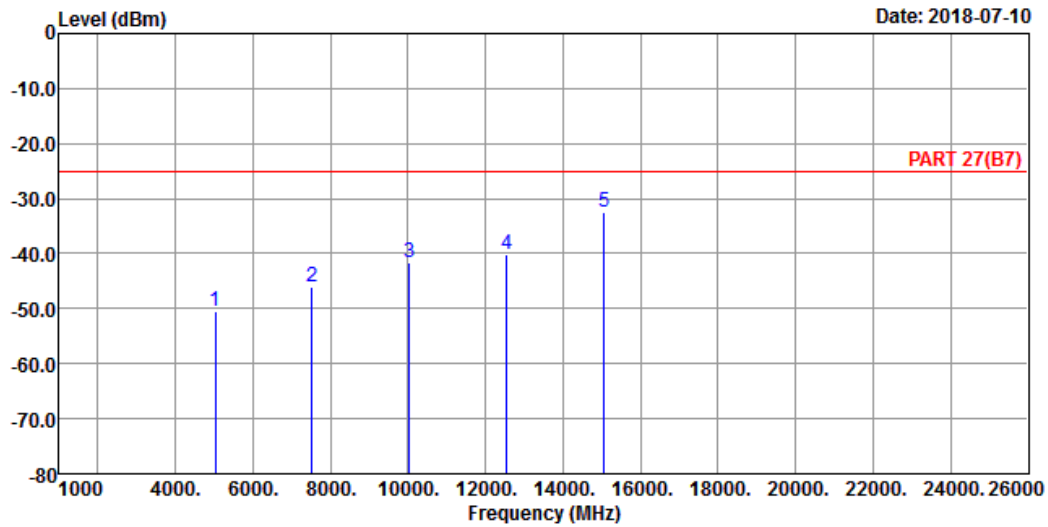

Site : 966 Chamber 5
 Condition: PART 27(B7) HORIZONTAL
 Remak : LTE Band 7 QPSK_20M Link_L-CH
 Tested by: Thomas Wei


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5020.00	-50.34	-48.02	-25.00	-25.34	-2.32	Peak
2	7530.00	-46.02	-50.30	-25.00	-21.02	4.28	Peak
3	10040.00	-41.56	-47.57	-25.00	-16.56	6.01	Peak
4	12550.00	-40.09	-48.36	-25.00	-15.09	8.27	Peak
5	15060.00	-32.56	-43.60	-25.00	-7.56	11.04	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

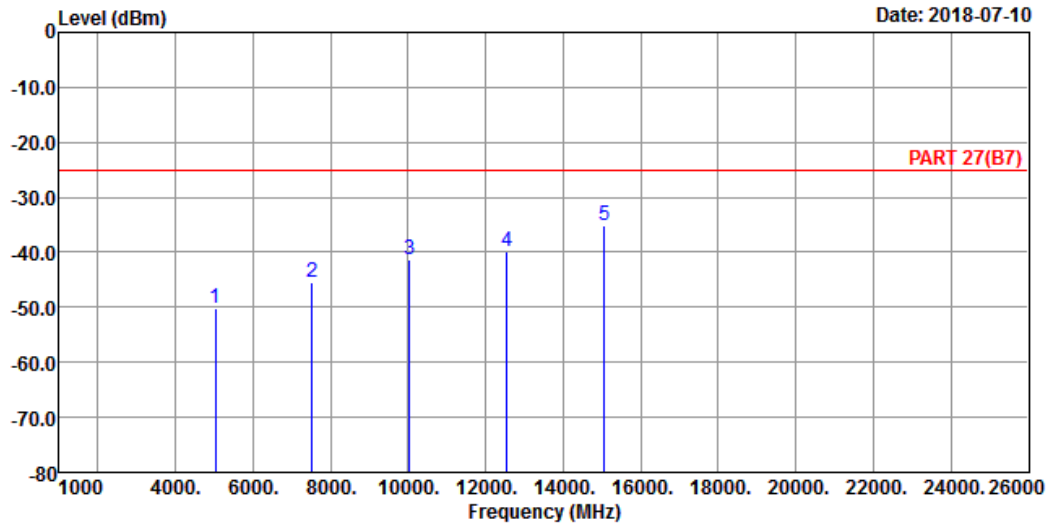

Site : 966 Chamber 5
 Condition: PART 27(B7) VERTICAL
 Remak : LTE Band 7 QPSK_20M Link_L-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5020.00	-50.13	-47.81	-25.00	-25.13	-2.32	Peak
2	7530.00	-45.35	-49.63	-25.00	-20.35	4.28	Peak
3	10040.00	-41.24	-47.25	-25.00	-16.24	6.01	Peak
4	12550.00	-39.79	-48.06	-25.00	-14.79	8.27	Peak
5 pp	15060.00	-35.26	-46.30	-25.00	-10.26	11.04	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

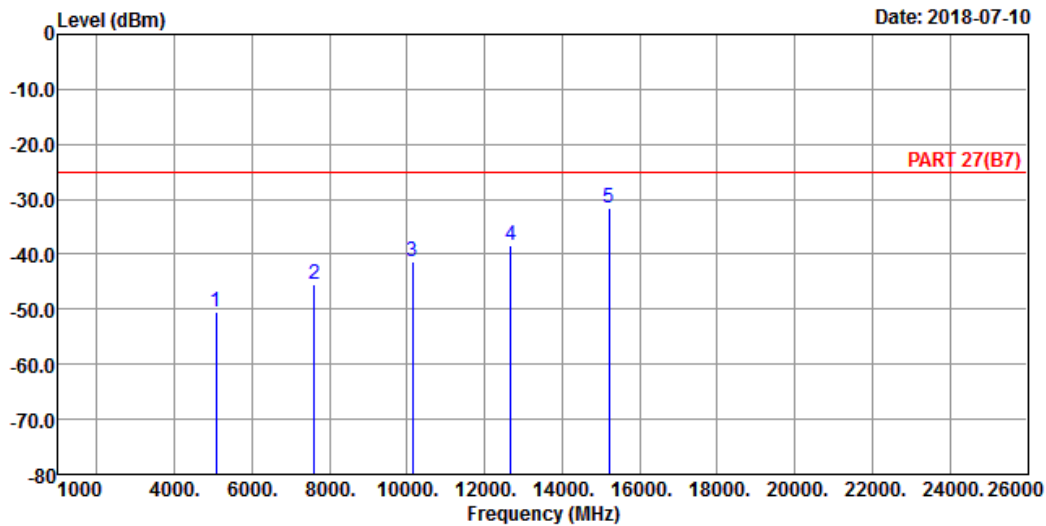

Site : 966 Chamber 5
 Condition: PART 27(B7) HORIZONTAL
 Remak : LTE Band 7 QPSK_20M Link_M-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5070.00	-50.34	-48.47	-25.00	-25.34	-1.87	Peak
2	7605.00	-45.48	-49.95	-25.00	-20.48	4.47	Peak
3	10140.00	-41.19	-47.17	-25.00	-16.19	5.98	Peak
4	12675.00	-38.26	-46.81	-25.00	-13.26	8.55	Peak
5 pp	15210.00	-31.52	-42.17	-25.00	-6.52	10.65	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 2018-07-10

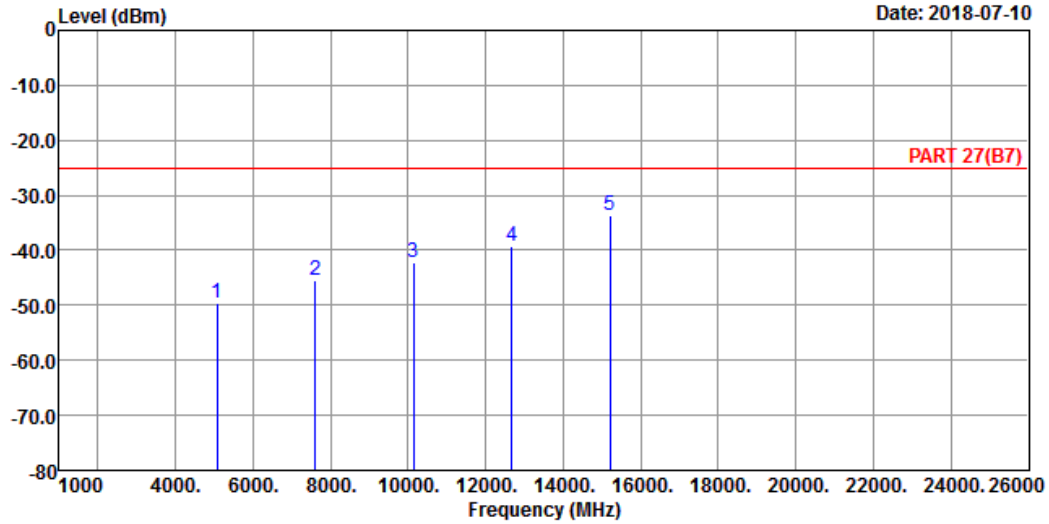

Site : 966 Chamber 5
 Condition: PART 27(B7) VERTICAL
 Remak : LTE Band 7 QPSK_20M Link_M-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5070.00	-49.63	-47.76	-25.00	-24.63	-1.87	Peak
2	7605.00	-45.43	-49.90	-25.00	-20.43	4.47	Peak
3	10140.00	-42.28	-48.26	-25.00	-17.28	5.98	Peak
4	12675.00	-39.18	-47.73	-25.00	-14.18	8.55	Peak
5 pp	15210.00	-33.67	-44.32	-25.00	-8.67	10.65	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

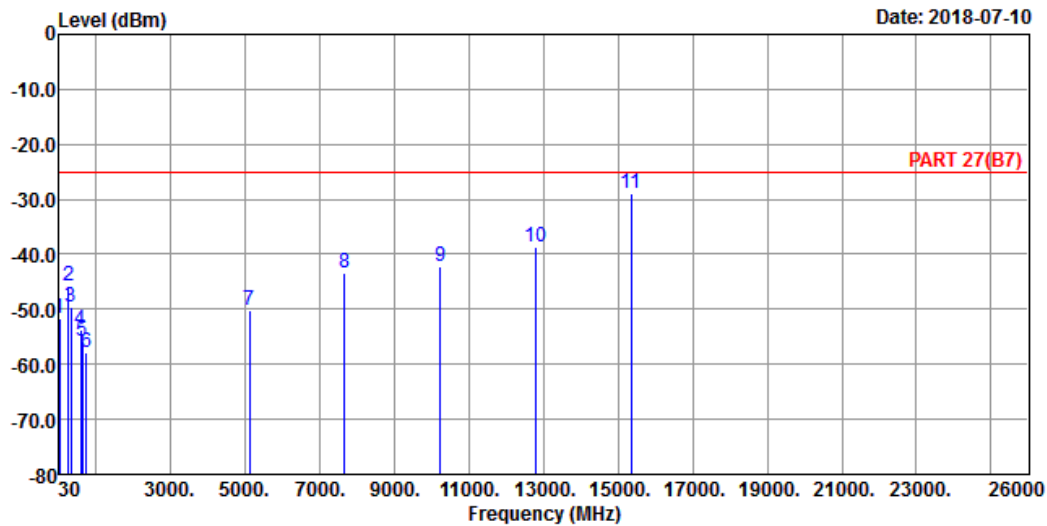

Site : 966 Chamber 5
 Condition: PART 27(B7) HORIZONTAL
 Remak : LTE Band 7 QPSK_20M Link_H-CH
 Tested by: Thomas Wei


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-51.67	-49.68	-25.00	-26.67	-1.99	Peak
2	286.08	-45.64	-38.91	-25.00	-20.64	-6.73	Peak
3	338.46	-49.60	-43.18	-25.00	-24.60	-6.42	Peak
4	598.42	-53.73	-52.90	-25.00	-28.73	-0.83	Peak
5	649.83	-55.87	-54.99	-25.00	-30.87	-0.88	Peak
6	754.59	-57.76	-58.63	-25.00	-32.76	0.87	Peak
7	5120.00	-50.33	-48.67	-25.00	-25.33	-1.66	Peak
8	7680.00	-43.47	-48.09	-25.00	-18.47	4.62	Peak
9	10240.00	-42.19	-48.13	-25.00	-17.19	5.94	Peak
10	12800.00	-38.77	-47.53	-25.00	-13.77	8.76	Peak
11 pp	15360.00	-28.88	-39.23	-25.00	-3.88	10.35	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

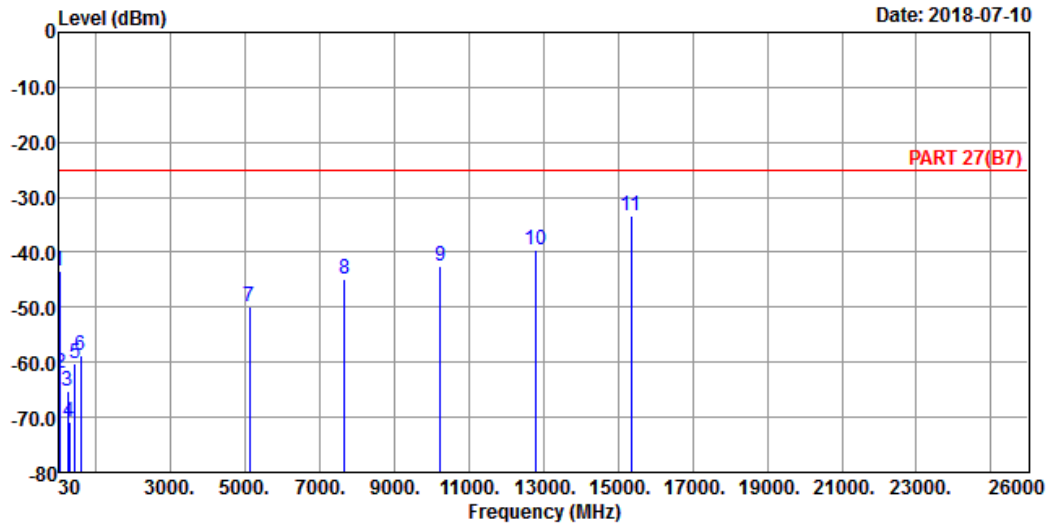

Site : 966 Chamber 5
 Condition: PART 27(B7) VERTICAL
 Remak : LTE Band 7 QPSK_20M Link_H-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	42.61	-43.54	-42.60	-25.00	-18.54	-0.94	Peak
2	64.92	-61.99	-53.96	-25.00	-36.99	-8.03	Peak
3	252.13	-65.21	-59.18	-25.00	-40.21	-6.03	Peak
4	301.60	-70.79	-63.81	-25.00	-45.79	-6.98	Peak
5	442.25	-60.21	-54.60	-25.00	-35.21	-5.61	Peak
6	598.42	-58.77	-57.94	-25.00	-33.77	-0.83	Peak
7	5120.00	-49.97	-48.31	-25.00	-24.97	-1.66	Peak
8	7680.00	-44.80	-49.42	-25.00	-19.80	4.62	Peak
9	10240.00	-42.37	-48.31	-25.00	-17.37	5.94	Peak
10	12800.00	-39.48	-48.24	-25.00	-14.48	8.76	Peak
11	15360.00	-33.42	-43.77	-25.00	-8.42	10.35	Peak


LTE Band 38
Channel Bandwidth: 20 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

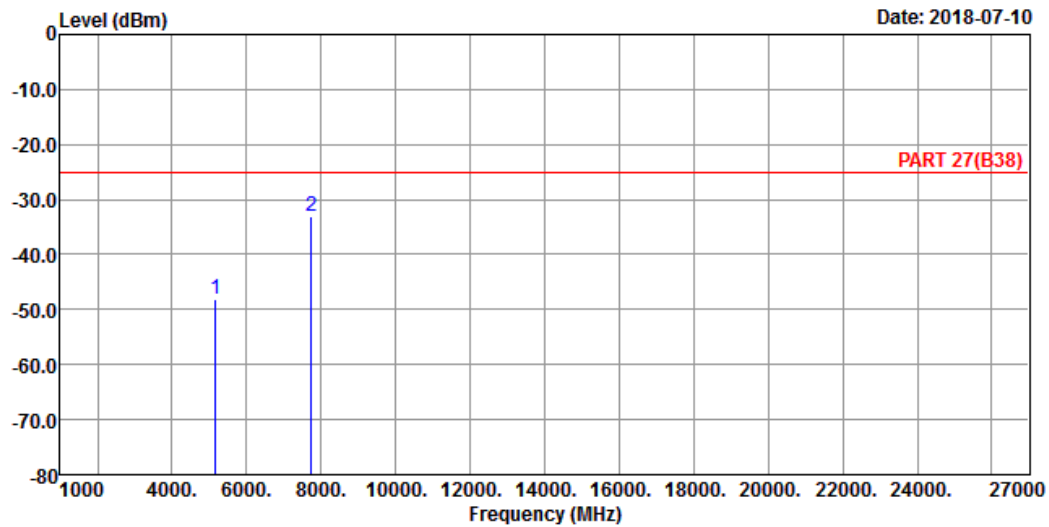

Site : 966 Chamber 5
Condition: PART 27(B38) HORIZONTAL
Remak : LTE Band 38 QPSK_20M Link_L-CH
Tested by: Thomas Wei


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5160.00	-48.15	-46.24	-25.00	-23.15	-1.91	Peak
2 pp	7740.00	-32.92	-37.60	-25.00	-7.92	4.68	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

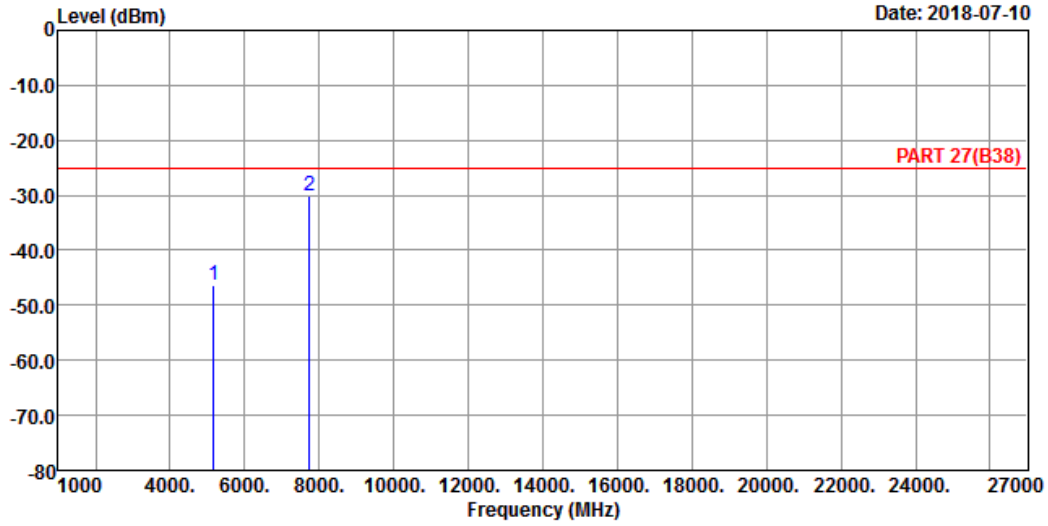

Site : 966 Chamber 5
 Condition: PART 27(B38) VERTICAL
 Remak : LTE Band 38 QPSK_20M Link_L-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5160.00	-46.34	-44.43	-25.00	-21.34	-1.91	Peak
2	7740.00	-30.14	-34.82	-25.00	-5.14	4.68	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

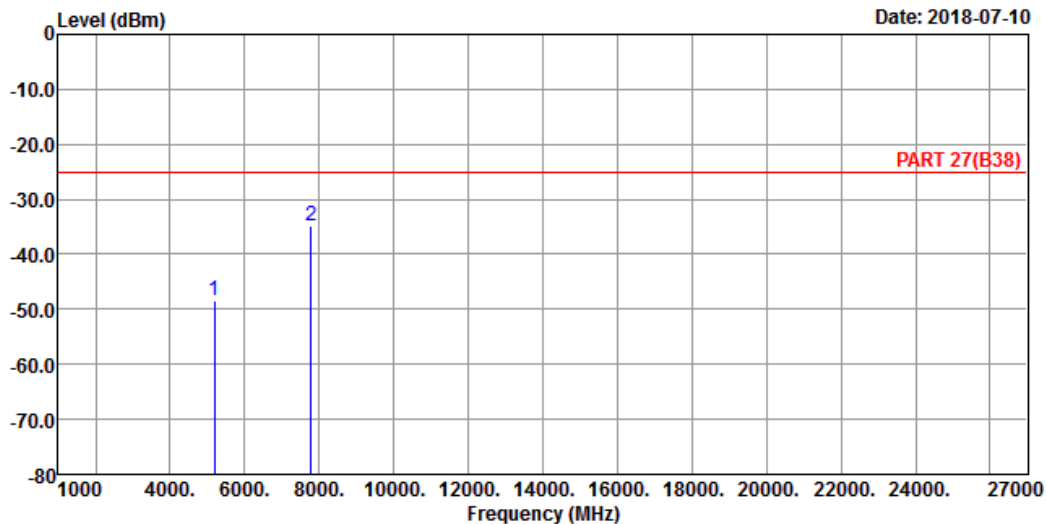

Site : 966 Chamber 5
 Condition: PART 27(B38) HORIZONTAL
 Remak : LTE Band 38 QPSK_20M Link_M-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5190.00	-48.37	-46.30	-25.00	-23.37	-2.07	Peak
2 pp	7785.00	-34.88	-39.62	-25.00	-9.88	4.74	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 2018-07-10

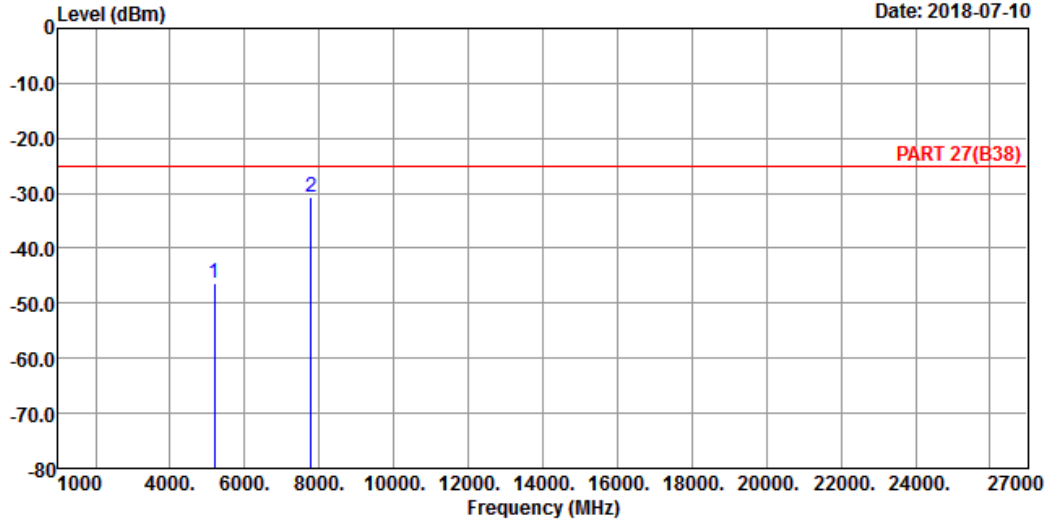

Site : 966 Chamber 5
 Condition: PART 27(B38) VERTICAL
 Remak : LTE Band 38 QPSK_20M Link_M-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5190.00	-46.29	-44.22	-25.00	-21.29	-2.07	Peak
2 pp	7785.00	-30.77	-35.51	-25.00	-5.77	4.74	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-07-10

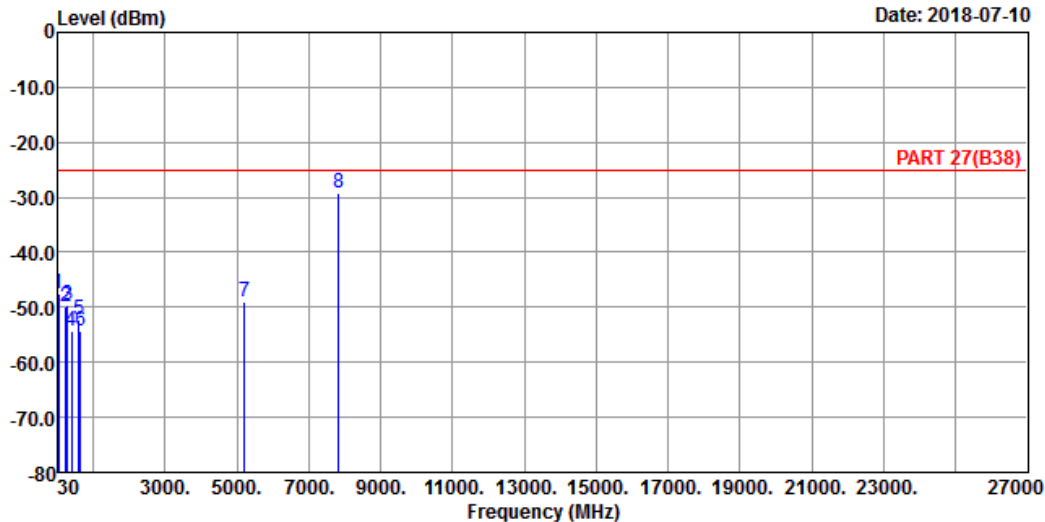

Site : 966 Chamber 5
 Condition: PART 27(B38) HORIZONTAL
 Remak : LTE Band 38 QPSK_20M Link_H-CH
 Tested by: Thomas Wei


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-47.43	-45.44	-25.00	-22.43	-1.99	Peak
2	234.67	-49.78	-43.16	-25.00	-24.78	-6.62	Peak
3	286.08	-49.69	-42.96	-25.00	-24.69	-6.73	Peak
4	389.87	-54.35	-48.35	-25.00	-29.35	-6.00	Peak
5	598.42	-52.29	-51.46	-25.00	-27.29	-0.83	Peak
6	650.80	-54.26	-53.39	-25.00	-29.26	-0.87	Peak
7	5220.00	-49.12	-46.82	-25.00	-24.12	-2.30	Peak
8 pp	7830.00	-29.26	-34.13	-25.00	-4.26	4.87	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

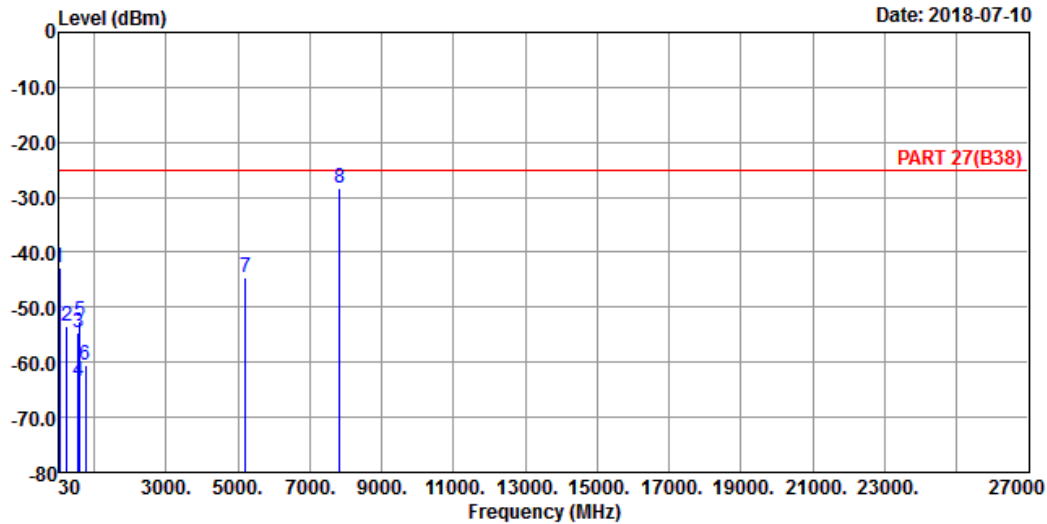

Site : 966 Chamber 5
 Condition: PART 27(B38) VERTICAL
 Remak : LTE Band 38 QPSK_20M Link_H-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	42.61	-42.74	-41.80	-25.00	-17.74	-0.94	Peak
2	234.67	-53.46	-46.84	-25.00	-28.46	-6.62	Peak
3	546.04	-54.71	-51.72	-25.00	-29.71	-2.99	Peak
4	587.75	-63.51	-62.23	-25.00	-38.51	-1.28	Peak
5	598.42	-52.46	-51.63	-25.00	-27.46	-0.83	Peak
6	754.59	-60.52	-61.39	-25.00	-35.52	0.87	Peak
7	5220.00	-44.53	-42.23	-25.00	-19.53	-2.30	Peak
8 pp	7830.00	-28.45	-33.32	-25.00	-3.45	4.87	Peak


LTE Band 41
Channel Bandwidth: 20 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

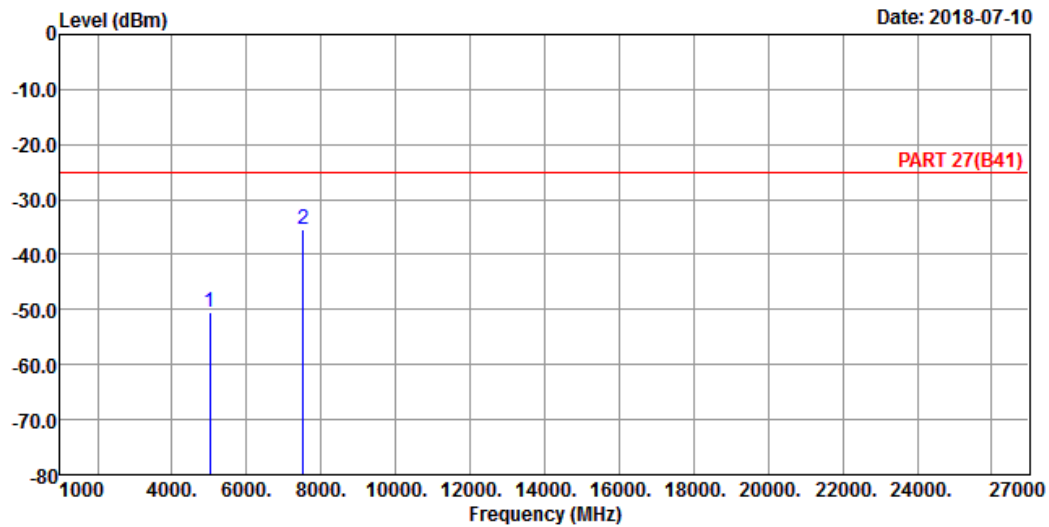

Site : 966 Chamber 5
Condition: PART 27(B41) HORIZONTAL
Remak : LTE Band 41 QPSK_20M Link_L-CH
Tested by: Thomas Wei


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5012.00	-50.37	-47.91	-25.00	-25.37	-2.46	Peak
2 pp	7518.00	-35.40	-39.61	-25.00	-10.40	4.21	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

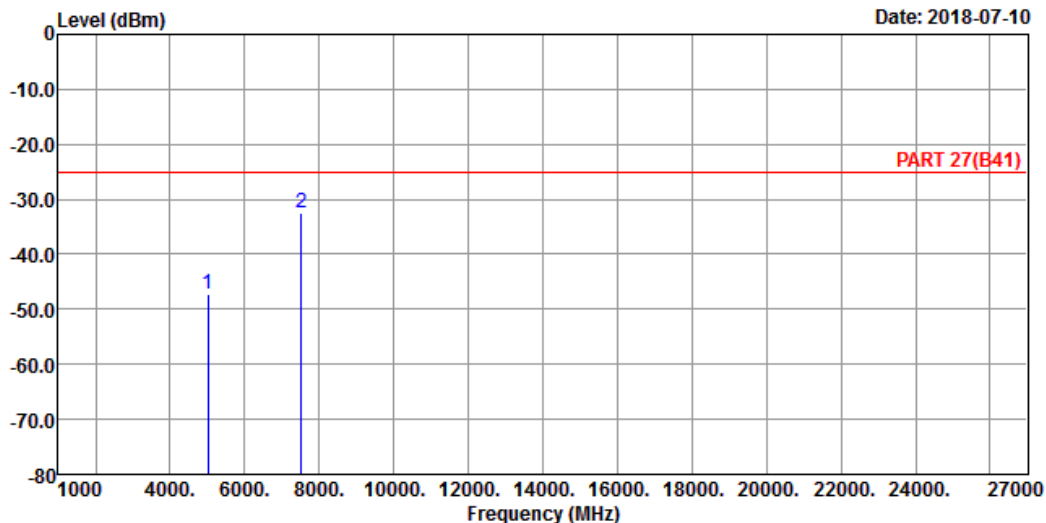

Site : 966 Chamber 5
 Condition: PART 27(B41) VERTICAL
 Remak : LTE Band 41 QPSK_20M Link_L-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5012.00	-47.20	-44.74	-25.00	-22.20	-2.46	Peak
2	pp 7518.00	-32.38	-36.59	-25.00	-7.38	4.21	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2018-07-10

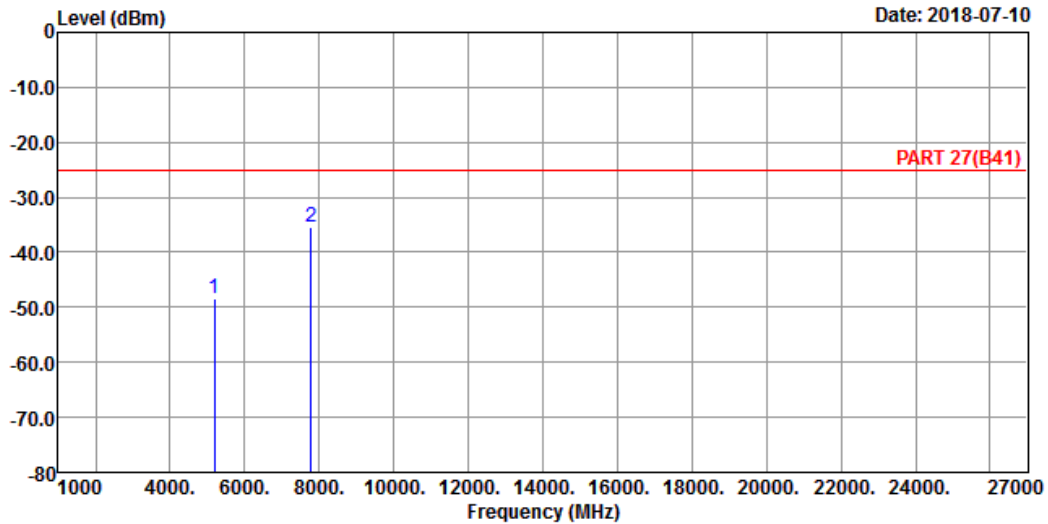

Site : 966 Chamber 5
 Condition: PART 27(B41) HORIZONTAL
 Remak : LTE Band 41 QPSK_20M Link_M-CH
 Tested by: Thomas Wei


	Freq	Level	Read	Limit	Over	Factor	Remark
			Level	Line	Limit		
	MHz	dBm	dBm	dBm	dB	dB	
1	5186.00	-48.43	-46.44	-25.00	-23.43	-1.99	Peak
2	7779.00	-35.32	-40.06	-25.00	-10.32	4.74	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

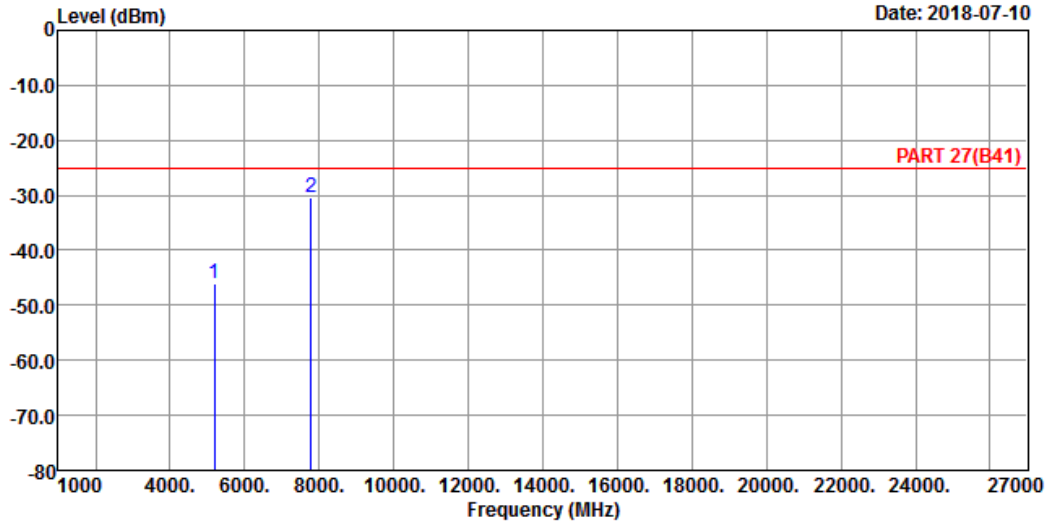

Site : 966 Chamber 5
 Condition: PART 27(B41) VERTICAL
 Remak : LTE Band 41 QPSK_20M Link_M-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	5186.00	-45.95	-43.96	-25.00	-20.95	-1.99	Peak
2	pp 7779.00	-30.38	-35.12	-25.00	-5.38	4.74	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-07-10

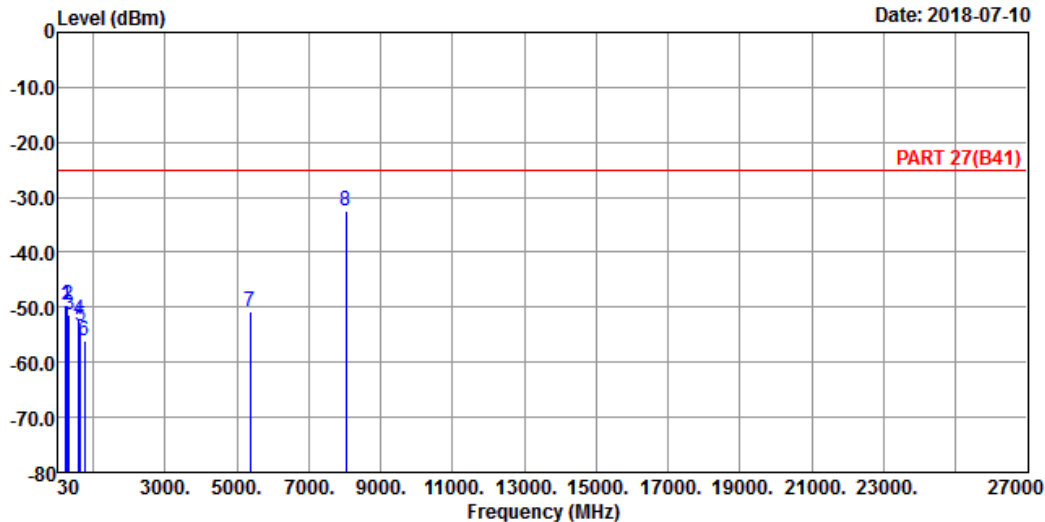

Site : 966 Chamber 5
 Condition: PART 27(B41) HORIZONTAL
 Remak : LTE Band 41 QPSK_20M Link_H-CH
 Tested by: Thomas Wei


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	234.67	-49.56	-42.94	-25.00	-24.56	-6.62	Peak
2	286.08	-49.56	-42.83	-25.00	-24.56	-6.73	Peak
3	338.46	-51.51	-45.09	-25.00	-26.51	-6.42	Peak
4	598.42	-52.36	-51.53	-25.00	-27.36	-0.83	Peak
5	650.80	-53.34	-52.47	-25.00	-28.34	-0.87	Peak
6	753.62	-55.96	-56.83	-25.00	-30.96	0.87	Peak
7	5360.00	-50.66	-48.15	-25.00	-25.66	-2.51	Peak
8	8040.00	-32.37	-37.65	-25.00	-7.37	5.28	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

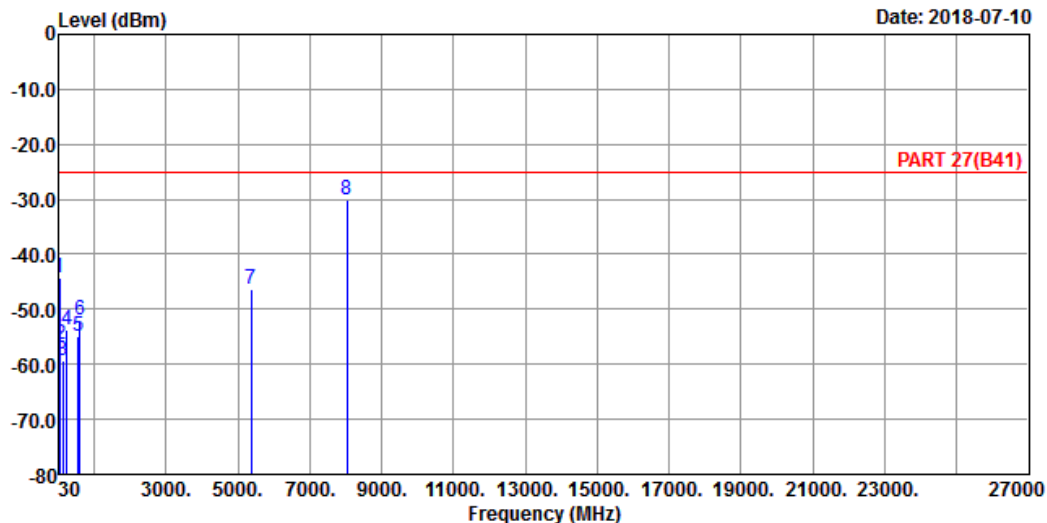

Site : 966 Chamber 5
 Condition: PART 27(B41) VERTICAL
 Remak : LTE Band 41 QPSK_20M Link_H-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-44.31	-42.84	-25.00	-19.31	-1.47	Peak
2	52.31	-56.43	-50.89	-25.00	-31.43	-5.54	Peak
3	121.18	-59.32	-49.59	-25.00	-34.32	-9.73	Peak
4	234.67	-53.64	-47.02	-25.00	-28.64	-6.62	Peak
5	546.04	-54.88	-51.89	-25.00	-29.88	-2.99	Peak
6	598.42	-52.03	-51.20	-25.00	-27.03	-0.83	Peak
7	5360.00	-46.23	-43.72	-25.00	-21.23	-2.51	Peak
8 pp	8040.00	-29.97	-35.25	-25.00	-4.97	5.28	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---