

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 51.646$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Body/Rear/Rel.99/0mm/Ch9400/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.201 mW/g


Body/Rear/Rel.99/0mm/Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.577 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.2460

SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.197 mW/g

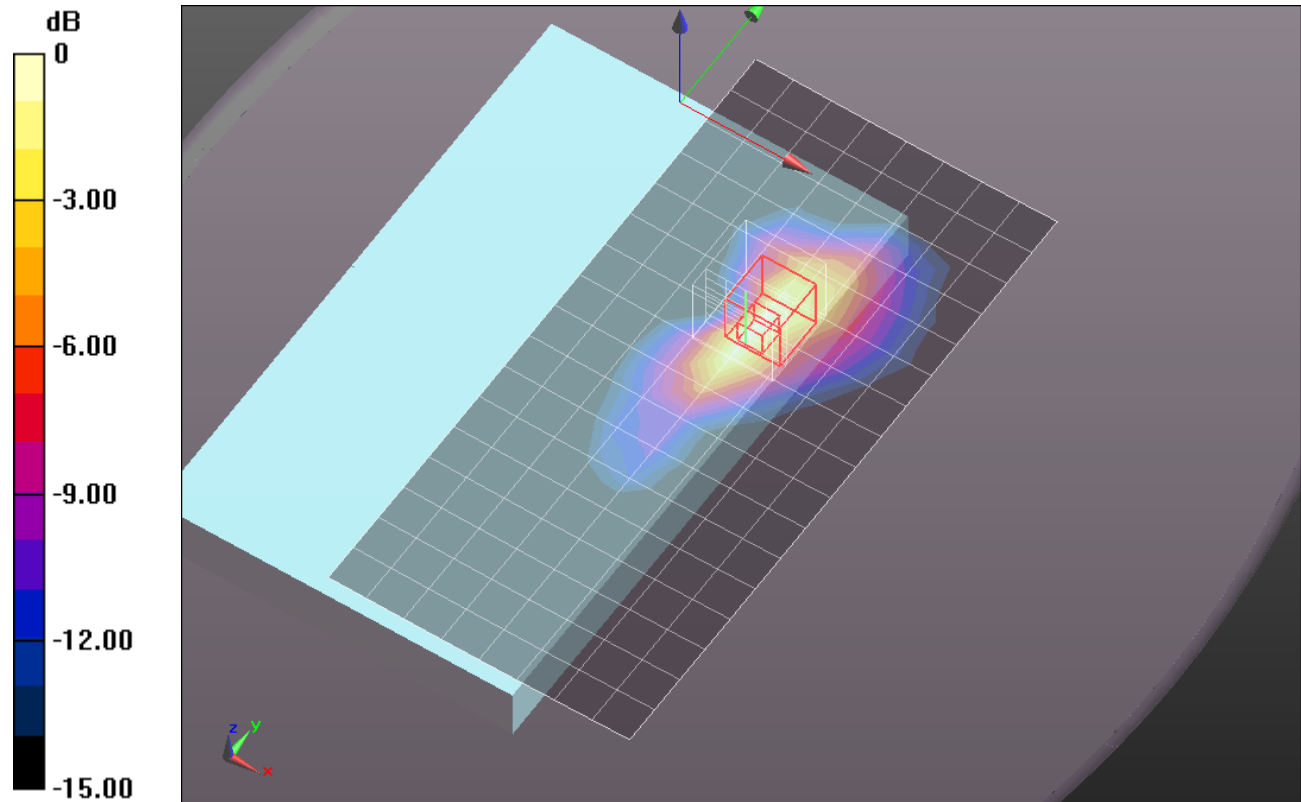

0 dB = 0.200mW/g = -13.98 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 51.646$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Body/Edge 1/Rel.99/0mm/Ch9400/Area Scan (9x20x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.256 mW/g


Body/Edge 1/Rel.99/0mm/Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.115 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.3640

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

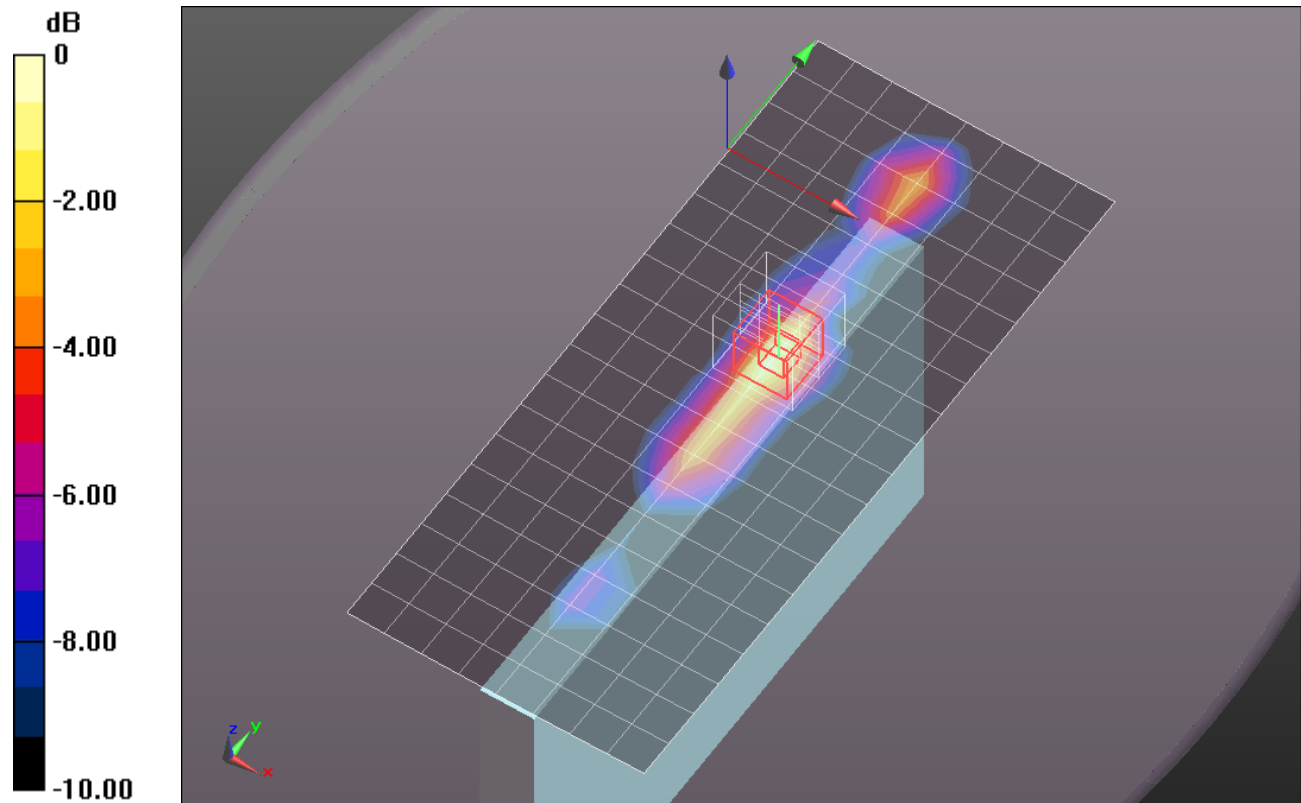


0 dB = 0.280mW/g = -11.06 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1

Body/Edge 1/Rel.99/0mm/Ch9400/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.259 mW/g

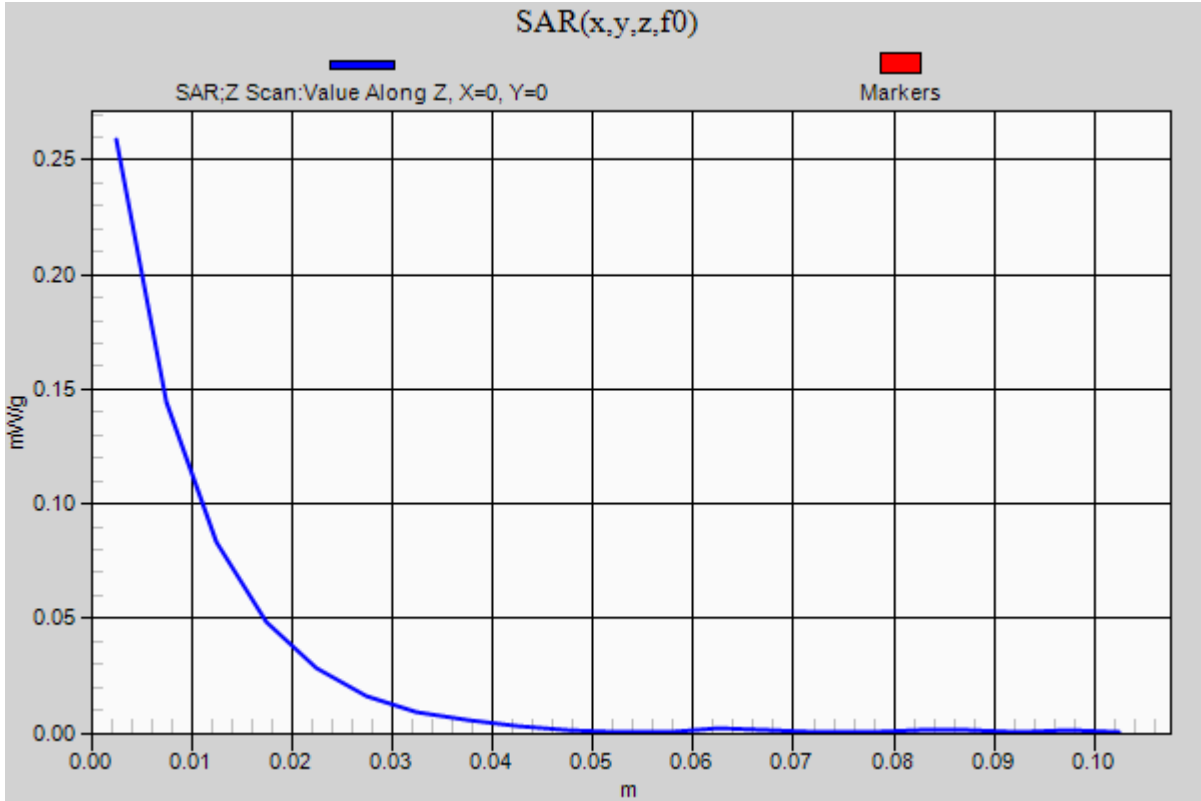

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.503$ mho/m; $\epsilon_r = 51.833$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Body/Rear/Rel.99/10mm/Ch9400/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.060 mW/g


Body/Rear/Rel.99/10mm/Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.427 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0980

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.076 mW/g

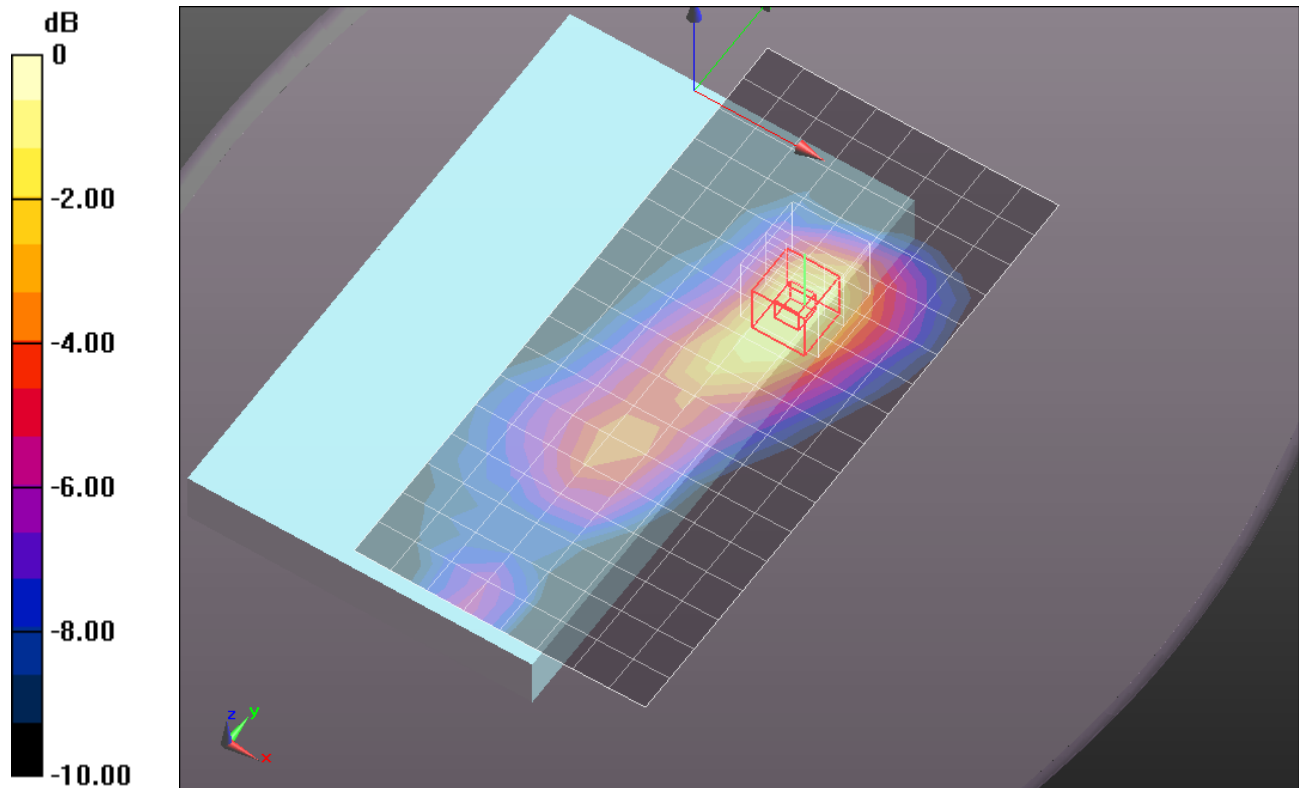

0 dB = 0.080mW/g = -21.94 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 51.646$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Body/Edge 1 @ 15 degree tilt/Rel.99/0mm/Ch9400/Area Scan (9x18x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.189 mW/g

Body/Edge 1 @ 15 degree tilt/Rel.99/0mm/Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.251 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.3100

SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.106 mW/g

Maximum value of SAR (measured) = 0.241 mW/g

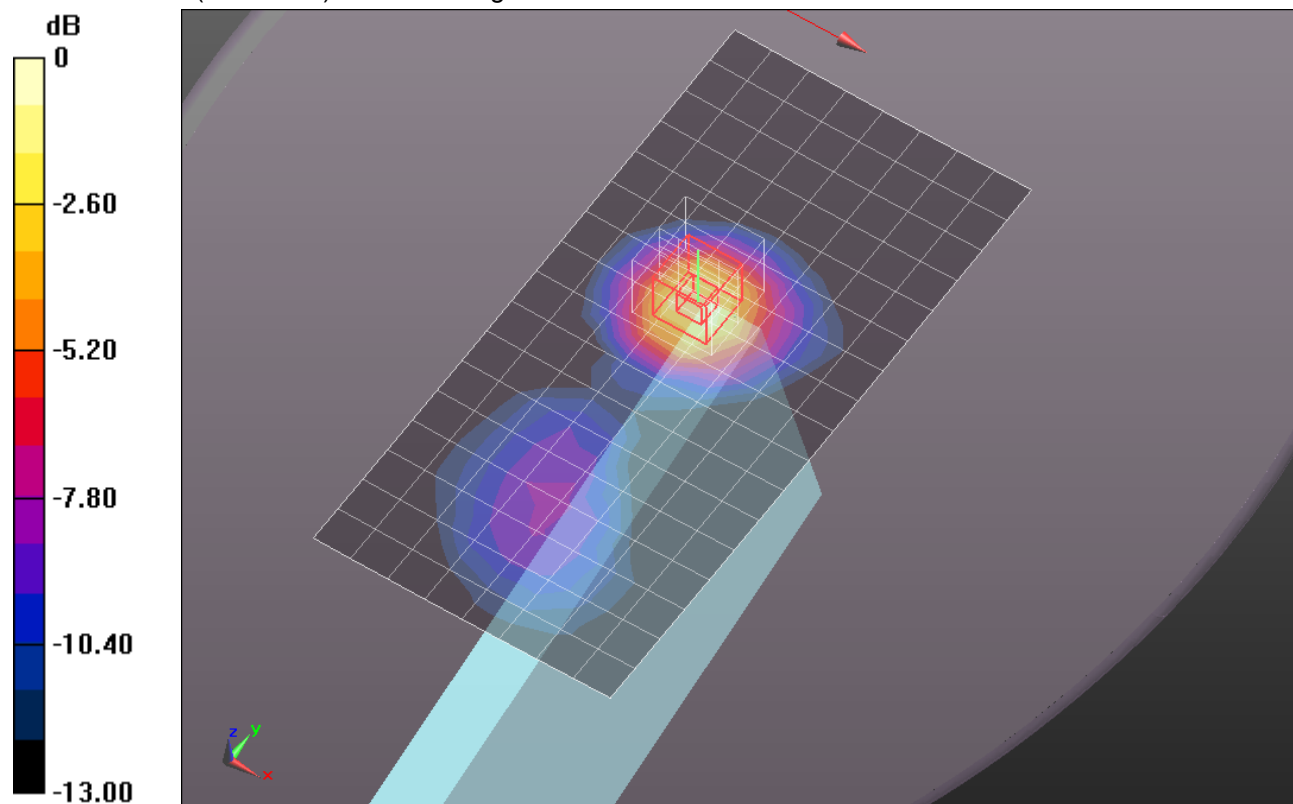

0 dB = 0.240mW/g = -12.40 dB mW/g

WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.503$ mho/m; $\epsilon_r = 51.833$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1120

Body/Edge 1/Rel.99/10mm/Ch9400/Area Scan (9x20x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.146 mW/g

Body/Edge 1/Rel.99/10mm/Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.002 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.1920

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.155 mW/g


Body/Edge 1/Rel.99/10mm/Ch9400/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.002 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.1390

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.110 mW/g

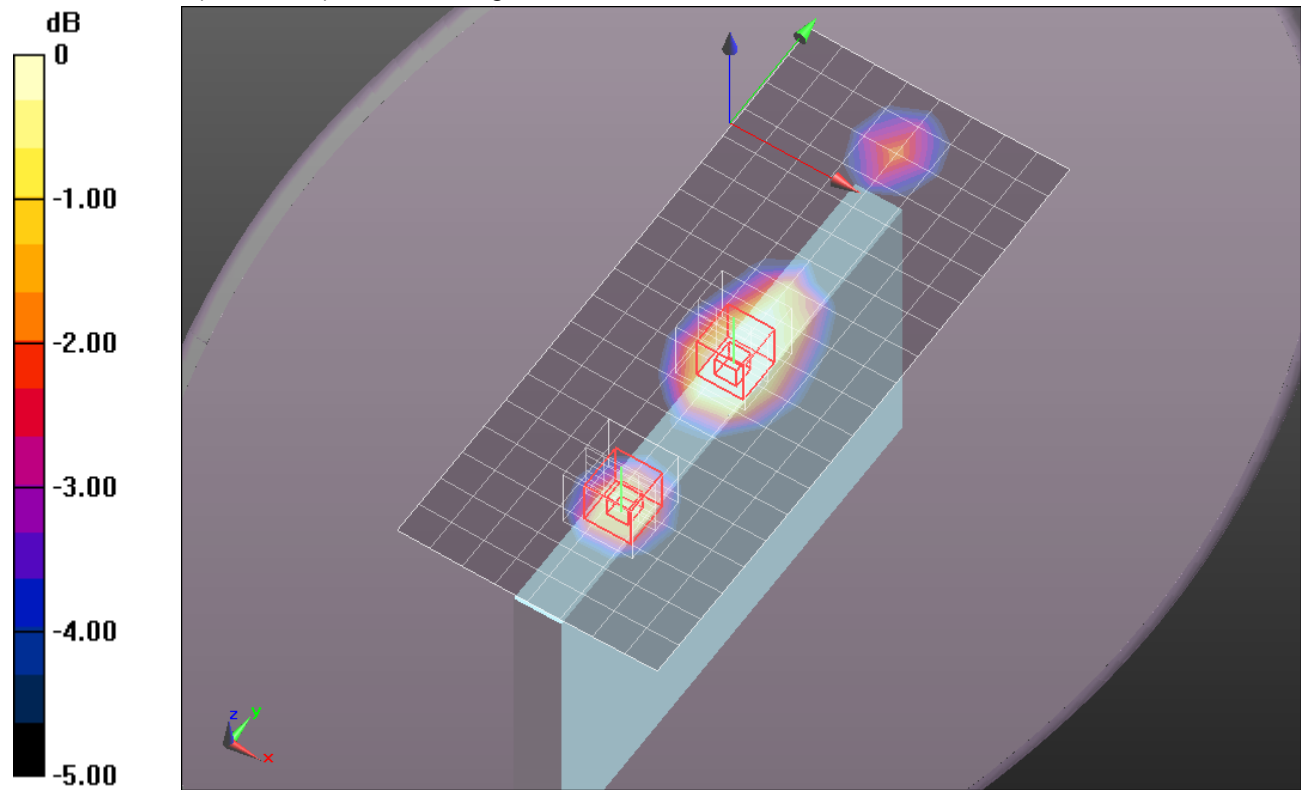

0 dB = 0.110mW/g = -19.17 dB mW/g

