

# FCC Test Report

## (PART 24)

**Report No.:** RF160104C15-1

**FCC ID:** GKR-TP00078ASI

**Test Model:** TP00078A

**Received Date:** Jan. 04, 2016

**Test Date:** Feb. 03, 2016

**Issued Date:** Feb. 18, 2016

**Applicant:** Compal Electronics Inc.

**Address:** No.581, Ruiguang Rd., Neihu District, Taipei City, Taiwan 11492, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan ( R.O.C )

**Test Location:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Test Site and Instruments .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Configuration of System under Test.....	8
3.2.1 Description of Support Units .....	8
3.3 Test Mode Applicability and Tested Channel Detail .....	9
3.4 EUT Operating Conditions .....	10
3.5 General Description of Applied Standards.....	10
<b>4 Test Types and Results</b> .....	<b>11</b>
4.1 Output Power Measurement .....	11
4.1.1 Limits of Output Power Measurement .....	11
4.1.2 Test Procedures.....	11
4.1.3 Test Results .....	12
4.2 Radiated Emission Measurement.....	20
4.2.1 Limits of Radiated Emission Measurement .....	20
4.2.2 Test Procedure .....	20
4.2.3 Deviation from Test Standard .....	20
4.2.4 Test Setup.....	20
4.2.5 Test Results .....	21
<b>5 Pictures of Test Arrangements</b> .....	<b>23</b>
<b>Appendix – Information on the Testing Laboratories</b> .....	<b>24</b>



A D T

### Release Control Record

Issue No.	Description	Date Issued
RF160104C15-1	Original Release	Feb. 18, 2016



**1 Certificate of Conformity**

**Product:** Tablet Computer  
**Brand:** Lenovo  
**Test Model:** TP00078A  
**Sample Status:** Production Unit  
**Applicant:** Compal Electronics Inc.  
**Test Date:** Feb. 03, 2016  
**Standards:** FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Evonne Liu , **Date:** Feb. 18, 2016  
Evonne Liu / Specialist

**Approved by :** Stanley Wu , **Date:** Feb. 18, 2016  
Stanley Wu / Assistant Manager

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -21.06 dB at 5647.50 MHz.

Note: Only test item of Conducted power, EIRP, and RSE tests were performed for this report. Other testing data is referring to China Telecommunication Technology Labs module report (Test Report No.: B15W50341-FCC-RF\_Rev1, Issue Date: Jul, 10, 2015).

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Jan. 21, 2016	Jan. 20, 2017
Spectrum Analyzer Agilent	N9010A	MY52220314	Sep. 03, 2015	Sep. 02, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2015	Dec. 16, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Feb. 05, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Feb. 09, 2015	Feb. 08, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Feb. 05, 2015	Feb. 04, 2016
Loop Antenna	EM-6879	269	Jul. 31, 2015	Jul. 30, 2016
Preamplifier EMCI	EMC 012645	980115	Dec. 21, 2015	Dec. 20, 2016
Preamplifier EMCI	EMC 184045	980116	Dec. 21, 2015	Dec. 20, 2016
Preamplifier EMCI	EMC 330H	980112	Dec. 28, 2015	Dec. 27, 2016
Power Meter Anritsu	ML2495A	1232002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor Anritsu	MA2411B	1207325	Sep. 21, 2015	Sep. 20, 2016
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 12, 2015	Oct. 11, 2016
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 12, 2015	Oct. 11, 2016
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 12, 2015	Oct. 11, 2016
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer	MT8820C	6201300640	Aug. 10, 2015	Aug. 09, 2017

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 10.

3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.

4. The FCC Site Registration No. is 690701.

5. The IC Site Registration No. is IC7450F-10.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Tablet Computer	
<b>Brand</b>	Lenovo	
<b>Test Model</b>	TP00078A	
<b>Status of EUT</b>	Production Unit	
<b>Power Supply Rating</b>	20.0 Vdc (adapter) 15.2 Vdc (Li-ion battery)	
<b>Modulation Type</b>	WCDMA	BPSK
	LTE	QPSK, 16QAM
<b>Frequency Range</b>	WCDMA	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1914.3 MHz
	LTE Band 25 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1913.5 MHz
	LTE Band 25 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1912.5 MHz
	LTE Band 25 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1910.0 MHz
	LTE Band 25 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1907.5 MHz
	LTE Band 25 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1905.0 MHz
	<b>Max. EIRP Power</b>	WCDMA
LTE Band 2 (Channel Bandwidth: 1.4 MHz)		0.21 W
LTE Band 2 (Channel Bandwidth: 3 MHz)		0.21 W
LTE Band 2 (Channel Bandwidth: 5 MHz)		0.22 W
LTE Band 2 (Channel Bandwidth: 10 MHz)		0.23 W
LTE Band 2 (Channel Bandwidth: 15 MHz)		0.19 W
LTE Band 2 (Channel Bandwidth: 20 MHz)		0.25 W
LTE Band 25 (Channel Bandwidth: 1.4 MHz)		0.20 W
LTE Band 25 (Channel Bandwidth: 3 MHz)		0.21 W
LTE Band 25 (Channel Bandwidth: 5 MHz)		0.21 W
LTE Band 25 (Channel Bandwidth: 10 MHz)		0.21 W
LTE Band 25 (Channel Bandwidth: 15 MHz)		0.21 W
LTE Band 25 (Channel Bandwidth: 20 MHz)		0.21 W
<b>Accessory Device</b>		Refer to Note as below
<b>Data Cable Supplied</b>	Refer to Note as below	

Note:

1. The antenna information is listed as below.


Antenna Type	Brand Name	Parts Number	Antenna Gain
PIFA	Ethertronics Inc.	WWAN Main Antenna: 5001997 WWAN Aux. Antenna: 5002014 (RX only)	WCDMA II: 0.06 dBi LTE Band 2/ 25: 0.06 dBi

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter 1	Lenovo	ADLX45NCC2A	I/P: 100-240Vac, 50-60Hz, 1.3A O/P: 20Vdc, 2.25A
Adapter 2	Lenovo	ADLX45NDC2A	I/P: 100-240Vac, 50-60Hz, 1.3A O/P: 20Vdc, 2.25A
Battery	Lenovo	SB10F46465	15.2Vdc, 2.895Ah
WLAN Module	Intel	8260NGW	--
WWAN Module	Sierra	EM7455	--

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

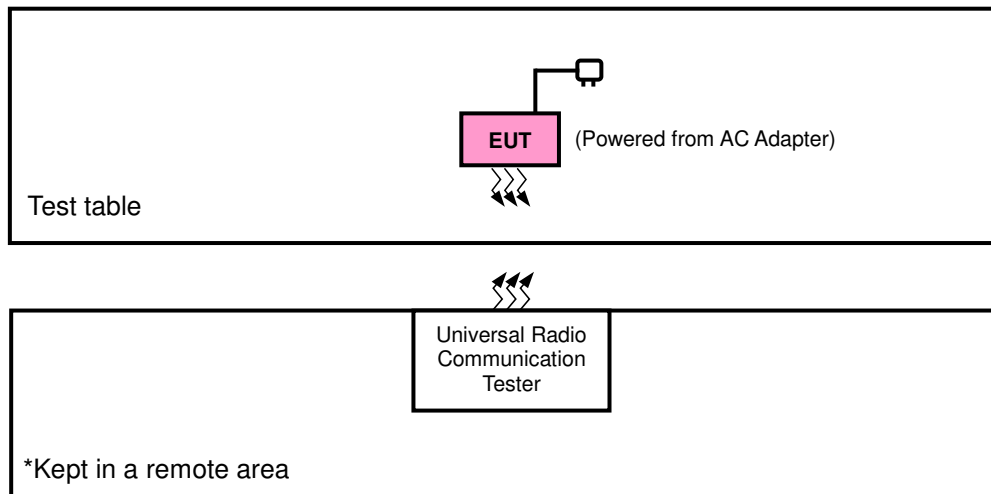

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.



### 3.3 Test Mode Applicability and Tested Channel Detail

#### WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA

#### LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset

#### LTE Band 25

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK / 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	26140 to 26590	26365	20 MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	15.2 Vdc	Luke Chen
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Anson Lin

### 3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v02r02**

**KDB 412172 D01 Determining ERP and EIRP v01r01**

**KDB 996369 D01 Module Certification Guide v02**

**ANSI/TIA/EIA-603-D 2010**

**NOTE:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement


Mobile / Portable station are limited to 2 watts e.i.r.p.

#### 4.1.2 Test Procedures

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

#### Conducted Power Measurement:

- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

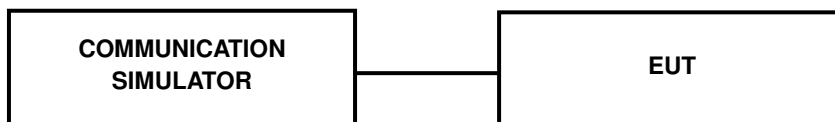

#### EIRP / ERP Measurement:

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 4.1.3 Test Results

#### Conducted Output Power (dBm)

Band	WCDMA II		
	9262	9400	9538
Channel	1852.4	1880.0	1907.6
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.01	23.09	22.99
HSDPA Subtest-1	21.86	21.88	21.91
HSDPA Subtest-2	21.88	21.90	21.96
HSDPA Subtest-3	21.36	21.39	21.45
HSDPA Subtest-4	21.32	21.02	21.44
HSUPA Subtest-1	21.54	21.60	21.65
HSUPA Subtest-2	20.00	20.52	19.97
HSUPA Subtest-3	20.53	20.51	20.48
HSUPA Subtest-4	19.79	19.83	19.88
HSUPA Subtest-5	22.00	21.90	22.00

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18607	Mid Ch 18900	High Ch 19193		Low Ch 18607	Mid Ch 18900	High Ch 19193	
			1850.7 MHz	1880.0 MHz	1909.3 MHz		1850.7 MHz	1880.0 MHz	1909.3 MHz	
2 / 1.4M	1	0	23.08	23.09	22.97	0	22.53	22.54	22.42	1
	1	2	22.10	22.05	22.37	0	21.55	21.50	21.82	1
	1	5	22.04	22.10	22.20	0	21.49	21.55	21.65	1
	3	0	22.42	22.55	22.37	0	21.87	22.00	21.82	1
	3	1	22.12	22.19	22.16	0	21.57	21.64	21.61	1
	3	3	22.14	22.06	22.08	0	21.59	21.51	21.53	1
	6	0	21.36	21.20	21.34	1	20.81	20.65	20.79	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18615	Mid Ch 18900	High Ch 19185		Low Ch 18615	Mid Ch 18900	High Ch 19185	
			1851.5 MHz	1880.0 MHz	1908.5 MHz		1851.5 MHz	1880.0 MHz	1908.5 MHz	
2 / 3M	1	0	23.22	23.23	23.11	0	22.59	22.60	22.48	1
	1	7	22.24	22.19	22.51	0	21.61	21.56	21.88	1
	1	14	22.18	22.24	22.34	0	21.55	21.61	21.71	1
	8	0	21.56	21.69	21.51	1	20.93	21.06	20.88	2
	8	3	21.26	21.33	21.30	1	20.63	20.70	20.67	2
	8	7	21.28	21.20	21.22	1	20.65	20.57	20.59	2
	15	0	21.50	21.34	21.48	1	20.87	20.71	20.85	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18625	Mid Ch 18900	High Ch 19175		Low Ch 18625	Mid Ch 18900	High Ch 19175	
			1852.5 MHz	1880.0 MHz	1907.5 MHz		1852.5 MHz	1880.0 MHz	1907.5 MHz	
2 / 5M	1	0	23.38	23.39	23.27	0	22.66	22.67	22.55	1
	1	12	22.40	22.35	22.67	0	21.68	21.63	21.95	1
	1	24	22.34	22.40	22.50	0	21.62	21.68	21.78	1
	12	0	21.72	21.85	21.67	1	21.00	21.13	20.95	2
	12	6	21.42	21.49	21.46	1	20.70	20.77	20.74	2
	12	13	21.44	21.36	21.38	1	20.72	20.64	20.66	2
	25	0	21.66	21.50	21.64	1	20.94	20.78	20.92	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18650	Mid Ch 18900	High Ch 19150		Low Ch 18650	Mid Ch 18900	High Ch 19150	
			1855.0 MHz	1880.0 MHz	1905.0 MHz		1855.0 MHz	1880.0 MHz	1905.0 MHz	
2 / 10M	1	0	23.57	23.58	23.46	0	22.71	22.72	22.60	1
	1	24	22.59	22.54	22.86	0	21.73	21.68	22.00	1
	1	49	22.53	22.59	22.69	0	21.67	21.73	21.83	1
	25	0	21.91	22.04	21.86	1	21.05	21.18	21.00	2
	25	12	21.61	21.68	21.65	1	20.75	20.82	20.79	2
	25	25	21.63	21.55	21.57	1	20.77	20.69	20.71	2
	50	0	21.85	21.69	21.83	1	20.99	20.83	20.97	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18675	Mid Ch 18900	High Ch 19125		Low Ch 18675	Mid Ch 18900	High Ch 19125	
			1857.5 MHz	1880.0 MHz	1902.5 MHz		1857.5 MHz	1880.0 MHz	1902.5 MHz	
2 / 15M	1	0	23.69	23.70	23.58	0	22.74	22.75	22.63	1
	1	37	22.71	22.66	22.98	0	21.76	21.71	22.03	1
	1	74	22.65	22.71	22.81	0	21.70	21.76	21.86	1
	36	0	22.03	22.16	21.98	1	21.08	21.21	21.03	2
	36	19	21.73	21.80	21.77	1	20.78	20.85	20.82	2
	36	39	21.75	21.67	21.69	1	20.80	20.72	20.74	2
	75	0	21.97	21.81	21.95	1	21.02	20.86	21.00	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18700	Mid Ch 18900	High Ch 19100		Low Ch 18700	Mid Ch 18900	High Ch 19100	
			1860.0 MHz	1880.0 MHz	1900.0 MHz		1860.0 MHz	1880.0 MHz	1900.0 MHz	
2 / 20M	1	0	23.85	23.86	23.74	0	22.77	22.78	22.66	1
	1	50	22.87	22.82	23.14	0	21.79	21.74	22.06	1
	1	99	22.81	22.87	22.97	0	21.73	21.79	21.89	1
	50	0	22.19	22.32	22.14	1	21.11	21.24	21.06	2
	50	25	21.89	21.96	21.93	1	20.81	20.88	20.85	2
	50	50	21.91	21.83	21.85	1	20.83	20.75	20.77	2
	100	0	22.13	21.97	22.11	1	21.05	20.89	21.03	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26047	Mid Ch 26365	High Ch 26683		Low Ch 26047	Mid Ch 26365	High Ch 26683	
			1850.7 MHz	1882.5 MHz	1914.3 MHz		1850.7 MHz	1882.5 MHz	1914.3 MHz	
25 / 1.4M	1	0	22.98	22.84	22.95	0	22.06	21.95	22.04	1
	1	2	22.31	22.15	22.25	0	21.45	21.21	21.31	1
	1	5	22.49	22.34	22.44	0	21.57	21.40	21.54	1
	3	0	22.23	22.11	22.19	0	21.36	21.18	21.26	1
	3	1	21.80	21.70	21.75	0	20.96	20.73	20.80	1
	3	3	21.64	21.51	21.58	0	20.69	20.51	20.57	1
	6	0	21.17	21.05	21.13	1	20.19	20.00	20.14	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26055	Mid Ch 26365	High Ch 26675		Low Ch 26055	Mid Ch 26365	High Ch 26675	
			1851.5 MHz	1882.5 MHz	1913.5 MHz		1851.5 MHz	1882.5 MHz	1913.5 MHz	
25 / 3M	1	0	23.06	22.97	23.04	0	22.09	21.95	22.04	1
	1	7	22.44	22.32	22.39	0	21.42	21.28	21.34	1
	1	14	22.61	22.50	22.55	0	21.58	21.46	21.53	1
	8	0	21.58	21.46	21.52	1	20.56	20.47	20.54	2
	8	3	21.23	21.06	21.14	1	20.17	20.02	20.11	2
	8	7	21.01	20.85	20.91	1	19.95	19.81	19.90	2
	15	0	21.35	21.20	21.29	1	20.34	20.19	20.30	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26065	Mid Ch 26365	High Ch 26665		Low Ch 26065	Mid Ch 26365	High Ch 26665	
			1852.5 MHz	1882.5 MHz	1912.5 MHz		1852.5 MHz	1882.5 MHz	1912.5 MHz	
25 / 5M	1	0	23.11	23.02	23.09	0	22.16	22.04	22.12	1
	1	12	22.53	22.42	22.49	0	21.54	21.39	21.45	1
	1	24	22.68	22.58	22.64	0	21.65	21.57	21.61	1
	12	0	21.73	21.56	21.65	1	20.68	20.58	20.63	2
	12	6	21.38	21.20	21.26	1	20.28	20.16	20.21	2
	12	13	21.15	21.00	21.05	1	20.09	19.96	20.03	2
	25	0	21.44	21.35	21.40	1	20.44	20.32	20.41	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26090	Mid Ch 26365	High Ch 26640		Low Ch 26090	Mid Ch 26365	High Ch 26640	
			1855.0 MHz	1882.5 MHz	1910.0 MHz		1855.0 MHz	1882.5 MHz	1910.0 MHz	
25 / 10M	1	0	23.16	23.05	23.14	0	22.20	22.11	22.17	1
	1	24	22.62	22.48	22.53	0	21.63	21.50	21.59	1
	1	49	22.70	22.62	22.66	0	21.75	21.67	21.74	1
	25	0	21.74	21.66	21.73	1	20.82	20.66	20.72	2
	25	12	21.53	21.35	21.40	1	20.45	20.29	20.34	2
	25	25	21.26	21.15	21.22	1	20.24	20.10	20.17	2
	50	0	21.54	21.45	21.49	1	20.54	20.40	20.48	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26115	Mid Ch 26365	High Ch 26615		Low Ch 26115	Mid Ch 26365	High Ch 26615	
			1857.5 MHz	1882.5 MHz	1907.5 MHz		1857.5 MHz	1882.5 MHz	1907.5 MHz	
25 / 15M	1	0	23.21	23.14	23.20	0	22.26	22.16	22.23	1
	1	37	22.69	22.57	22.63	0	21.68	21.59	21.65	1
	1	74	22.79	22.70	22.74	0	21.81	21.72	21.78	1
	36	0	21.86	21.77	21.81	1	20.91	20.76	20.83	2
	36	19	21.55	21.47	21.54	1	20.60	20.46	20.52	2
	36	39	21.40	21.30	21.37	1	20.41	20.26	20.32	2
	75	0	21.67	21.59	21.65	1	20.65	20.57	20.63	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26140	Mid Ch 26365	High Ch 26590		Low Ch 26140	Mid Ch 26365	High Ch 26590	
			1860.0 MHz	1882.5 MHz	1905.0 MHz		1860.0 MHz	1882.5 MHz	1905.0 MHz	
25 / 20M	1	0	23.26	23.19	23.25	0	22.31	22.23	22.30	1
	1	50	22.79	22.66	22.72	0	21.81	21.67	21.72	1
	1	99	22.85	22.78	22.83	0	21.89	21.81	21.86	1
	50	0	21.97	21.87	21.93	1	20.99	20.86	20.90	2
	50	25	21.67	21.60	21.66	1	20.64	20.56	20.60	2
	50	50	21.57	21.45	21.51	1	20.55	20.40	20.46	2
	100	0	21.77	21.70	21.76	1	20.76	20.68	20.72	2

**EIRP Power (dBm)**

Band	WCDMA II		
Channel	9262	9400	9538
Rx Channel	9662	9800	9938
Frequency	1852.4	1880	1907.6
Conducted power(dBm)	23.01	23.09	22.99
Conducted power (Watts)	0.20	0.20	0.20
E.I.R.P (dBm)	23.07	23.15	23.05
E.I.R.P (Watts)	0.20	0.21	0.20

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		18607	18900	19193	18607	18900	19193
	Frequency	1850.7	1880	1909.3	1850.7	1880	1909.3
MHz		MHz	MHz	MHz	MHz	MHz	
2 / 1.4M	Conducted power(dBm)	23.08	23.09	22.97	22.53	22.54	22.42
	Conducted power (Watts)	0.20	0.20	0.20	0.18	0.18	0.17
	E.I.R.P (dBm)	23.14	23.15	23.03	22.59	22.6	22.48
	E.I.R.P (Watts)	0.21	0.21	0.20	0.18	0.18	0.18

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		18615	18900	19185	18615	18900	19185
	Frequency	1851.5	1880	1908.5	1851.5	1880	1908.5
MHz		MHz	MHz	MHz	MHz	MHz	
2 / 3M	Conducted power(dBm)	23.22	23.23	23.11	22.59	22.6	22.48
	Conducted power (Watts)	0.21	0.21	0.20	0.18	0.18	0.18
	E.I.R.P (dBm)	23.28	23.29	23.17	22.65	22.66	22.54
	E.I.R.P (Watts)	0.21	0.21	0.21	0.18	0.18	0.18



Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		18625	18900	19175	18625	18900	19175
	Frequency	1852.5	1880	1907.5	1852.5	1880	1907.5
MHz		MHz	MHz	MHz	MHz	MHz	
2 / 5M	Conducted power(dBm)	23.38	23.39	23.27	22.66	22.67	22.55
	Conducted power (Watts)	0.22	0.22	0.21	0.18	0.18	0.18
	E.I.R.P (dBm)	23.44	23.45	23.33	22.72	22.73	22.61
	E.I.R.P (Watts)	0.22	0.22	0.22	0.19	0.19	0.18

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		18650	18900	19150	18650	18900	19150
	Frequency	1855	1880	1905	1855	1880	1905
MHz		MHz	MHz	MHz	MHz	MHz	
2 / 10M	Conducted power(dBm)	23.57	23.58	23.46	22.71	22.72	22.6
	Conducted power (Watts)	0.23	0.23	0.22	0.19	0.19	0.18
	E.I.R.P (dBm)	23.63	23.64	23.52	22.77	22.78	22.66
	E.I.R.P (Watts)	0.23	0.23	0.22	0.19	0.19	0.18

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		18675	18900	19125	18675	18900	19125
	Frequency	1857.5	1880	1902.5	1857.5	1880	1902.5
MHz		MHz	MHz	MHz	MHz	MHz	
2 / 15M	Conducted power(dBm)	21.97	21.81	21.95	22.74	22.75	22.63
	Conducted power (Watts)	0.16	0.15	0.16	0.19	0.19	0.18
	E.I.R.P (dBm)	22.03	21.87	22.01	22.8	22.81	22.69
	E.I.R.P (Watts)	0.16	0.15	0.16	0.19	0.19	0.19

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		18700	18900	19100	18700	18900	19100
	Frequency	1860	1880	1900	1860	1880	1900
MHz		MHz	MHz	MHz	MHz	MHz	
2 / 20M	Conducted power(dBm)	23.85	23.86	23.74	22.77	22.78	22.66
	Conducted power (Watts)	0.24	0.24	0.24	0.19	0.19	0.18
	E.I.R.P (dBm)	23.91	23.92	23.8	22.83	22.84	22.72
	E.I.R.P (Watts)	0.25	0.25	0.24	0.19	0.19	0.19

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		26047	26365	26683	26047	26365	26683
	Frequency	1850.7	1882.5	1914.3	1850.7	1882.5	1914.3
MHz		MHz	MHz	MHz	MHz	MHz	
25 / 1.4M	Conducted power(dBm)	22.98	22.84	22.95	22.06	21.95	22.04
	Conducted power (Watts)	0.20	0.19	0.20	0.16	0.16	0.16
	E.I.R.P (dBm)	23.04	22.9	23.01	22.12	22.01	22.1
	E.I.R.P (Watts)	0.20	0.19	0.20	0.16	0.16	0.16

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		26055	26365	26675	26055	26365	26675
	Frequency	1851.5	1882.5	1913.5	1851.5	1882.5	1913.5
MHz		MHz	MHz	MHz	MHz	MHz	
25 / 3M	Conducted power(dBm)	23.06	22.97	23.04	22.09	21.95	22.04
	Conducted power (Watts)	0.20	0.20	0.20	0.16	0.16	0.16
	E.I.R.P (dBm)	23.12	23.03	23.1	22.15	22.01	22.1
	E.I.R.P (Watts)	0.21	0.20	0.20	0.16	0.16	0.16

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		26065	26365	26665	26065	26365	26665
	Frequency	1852.5	1882.5	1912.5	1852.5	1882.5	1912.5
MHz		MHz	MHz	MHz	MHz	MHz	
25 / 5M	Conducted power(dBm)	23.11	23.02	23.09	22.16	22.04	22.12
	Conducted power (Watts)	0.20	0.20	0.20	0.16	0.16	0.16
	E.I.R.P (dBm)	23.17	23.08	23.15	22.22	22.1	22.18
	E.I.R.P (Watts)	0.21	0.20	0.21	0.17	0.16	0.17

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		26090	26365	26640	26090	26365	26640
	Frequency	1855	1882.5	1910	1855	1882.5	1910
MHz		MHz	MHz	MHz	MHz	MHz	
25 / 10M	Conducted power(dBm)	23.16	23.05	23.14	22.2	22.11	22.17
	Conducted power (Watts)	0.21	0.20	0.21	0.17	0.16	0.16
	E.I.R.P (dBm)	23.22	23.11	23.2	22.26	22.17	22.23
	E.I.R.P (Watts)	0.21	0.20	0.21	0.17	0.16	0.17

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		26115	26365	26615	26115	26365	26615
	Frequency	1857.5	1882.5	1907.5	1857.5	1882.5	1907.5
MHz		MHz	MHz	MHz	MHz	MHz	
25 / 15M	Conducted power(dBm)	23.21	23.14	23.2	22.26	22.16	22.23
	Conducted power (Watts)	0.21	0.21	0.21	0.17	0.16	0.17
	E.I.R.P (dBm)	23.27	23.2	23.26	22.32	22.22	22.29
	E.I.R.P (Watts)	0.21	0.21	0.21	0.17	0.17	0.17

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		26140	26365	26590	26140	26365	26590
	Frequency	1860	1882.5	1905	1860	1882.5	1905
MHz		MHz	MHz	MHz	MHz	MHz	
25 / 20M	Conducted power(dBm)	23.26	23.19	23.25	22.31	22.23	22.3
	Conducted power (Watts)	0.21	0.21	0.21	0.17	0.17	0.17
	E.I.R.P (dBm)	23.32	23.25	23.31	22.37	22.29	22.36
	E.I.R.P (Watts)	0.21	0.21	0.21	0.17	0.17	0.17

## 4.2 Radiated Emission Measurement

### 4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit is equal to  $-13$  dBm.

### 4.2.2 Test Procedure


- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi}$ .

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

### 4.2.3 Deviation from Test Standard

No deviation.

### 4.2.4 Test Setup

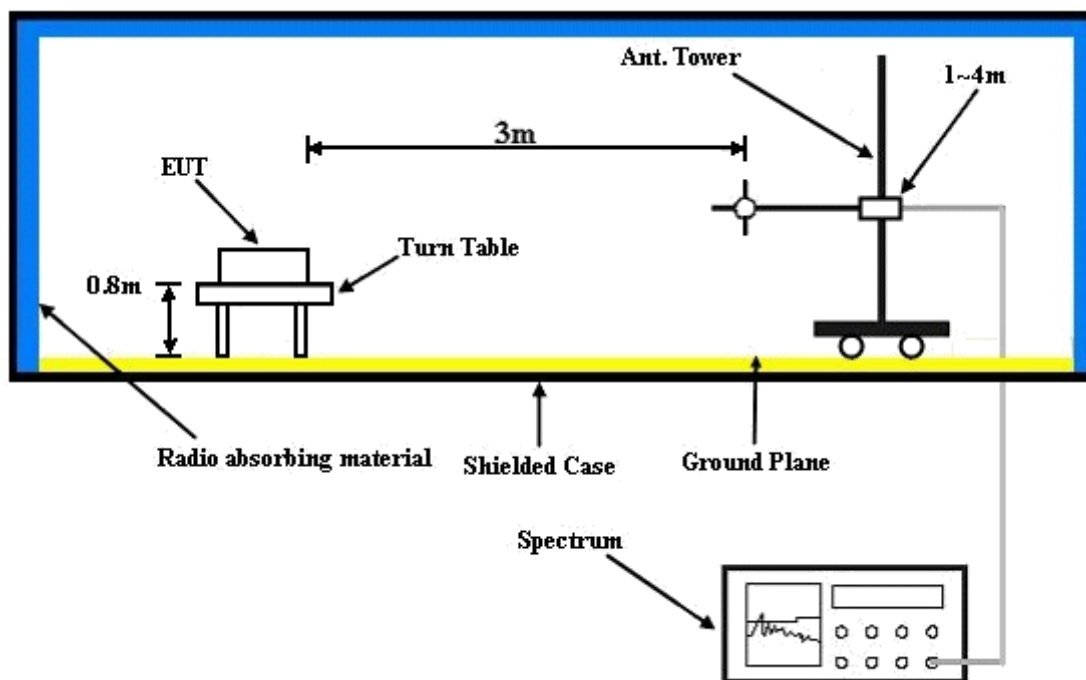

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

LTE Band 25


Channel Bandwidth: 20 MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

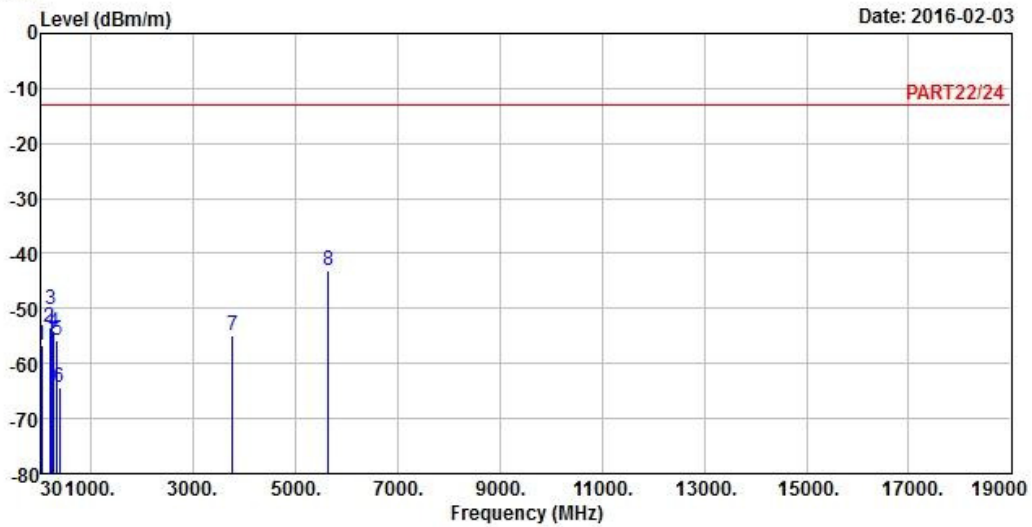

Site : 966 Chamber 5  
 Condition: PART22/24 3m HORIZONTAL  
 Remak : LTE Band 25 QPSK\_20M(1,0) Link  
 Tested by: Anson Lin  
 Plane : NB


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-56.69	-57.07	-13.00	-43.69	0.38	Peak
2	195.87	-53.44	-45.79	-13.00	-40.44	-7.65	Peak
3	230.79	-50.27	-43.50	-13.00	-37.27	-6.77	Peak
4	266.68	-54.25	-47.92	-13.00	-41.25	-6.33	Peak
5	329.73	-55.81	-49.26	-13.00	-42.81	-6.55	Peak
6	388.90	-64.22	-58.21	-13.00	-51.22	-6.01	Peak
7	3765.00	-54.94	-46.97	-13.00	-41.94	-7.97	Peak
8 pp	5647.50	-43.22	-41.28	-13.00	-30.22	-1.94	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

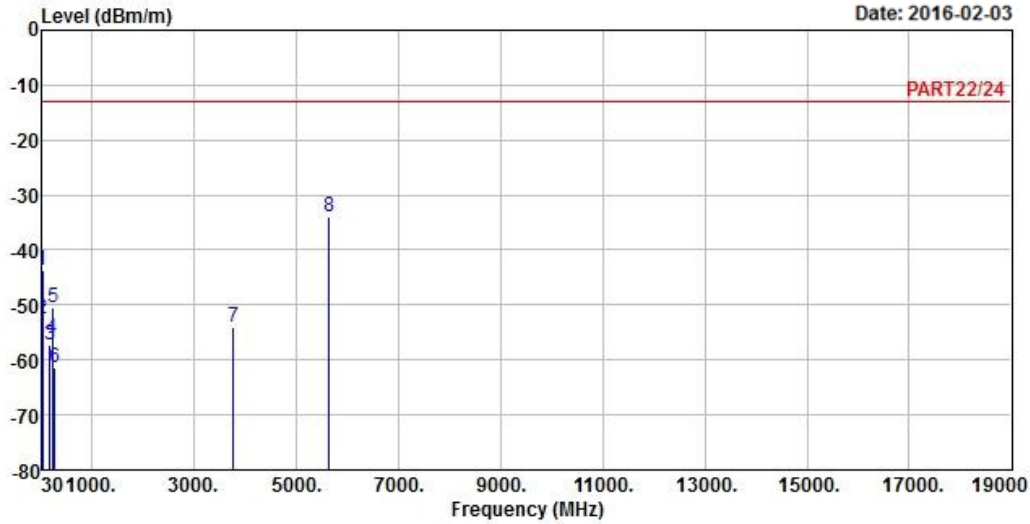

Site : 966 Chamber 5  
 Condition: PART22/24 3m VERTICAL  
 Remak : LTE Band 25 QPSK\_20M(1,0) Link  
 Tested by: Anson Lin  
 Plane : NB

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-43.69	-44.07	-13.00	-30.69	0.38	Peak
2	36.79	-52.55	-51.56	-13.00	-39.55	-0.99	Peak
3	185.20	-57.23	-49.99	-13.00	-44.23	-7.24	Peak
4	219.15	-56.07	-48.83	-13.00	-43.07	-7.24	Peak
5	243.40	-50.55	-44.28	-13.00	-37.55	-6.27	Peak
6	274.44	-61.30	-54.81	-13.00	-48.30	-6.49	Peak
7	3765.00	-53.94	-45.97	-13.00	-40.94	-7.97	Peak
8 pp	5647.50	-34.06	-32.12	-13.00	-21.06	-1.94	Peak



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---