

FCC Test Report

(PART 27)

Report No.: RF160104C15-2

FCC ID: GKR-TP00078ASI

Test Model: TP00078A

Received Date: Jan. 04, 2016

Test Date: Jan. 16, 2016 ~ Feb. 03, 2016

Issued Date: Feb. 18, 2016

Applicant: Compal Electronics Inc.

Address: No.581, Ruiguang Rd., Neihu District, Taipei City, Taiwan 11492, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agency



Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site and Instruments	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test.....	8
3.2.1 Description of Support Units	8
3.3 Test Mode Applicability and Tested Channel Detail	9
3.4 EUT Operating Conditions	10
3.5 General Description of Applied Standards.....	10
4 Test Types and Results	11
4.1 Output Power Measurement	11
4.1.1 Limits of Output Power Measurement	11
4.1.2 Test Procedures.....	11
4.1.3 Test Results	12
4.2 Radiated Emission Measurement.....	20
4.2.1 Limits of Radiated Emission Measurement	20
4.2.2 Test Procedure	20
4.2.3 Deviation from Test Standard	20
4.2.4 Test Setup.....	20
4.2.5 Test Results	21
5 Pictures of Test Arrangements	27
Appendix – Information on the Testing Laboratories	28



A D T

Release Control Record

Issue No.	Description	Date Issued
RF160104C15-2	Original Release	Feb. 18, 2016



1 Certificate of Conformity

Product: Tablet Computer
Brand: Lenovo
Test Model: TP00078A
Sample Status: Production Unit
Applicant: Compal Electronics Inc.
Test Date: Jan. 16, 2016 ~ Feb. 03, 2016
Standards: FCC Part 27, Subpart C, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Evonne Liu , **Date:** Feb. 18, 2016
Evonne Liu / Specialist

Approved by : Stanley Wu , **Date:** Feb. 18, 2016
Stanley Wu / Assistant Manager

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (WCDMA)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -26.35 dB at 5197.50 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 12)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(C)(10)	Effective Radiated Power	Pass	Meet the requirement of limit.

Applied Standard: FCC Part 27 & Part 2 (LTE 13)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(b)(10)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -10.50 dB at 1564.00 MHz.

Note: Only test item of Conducted power, ERP, EIRP, and RSE tests were performed for this report. Other testing data is referring to China Telecommunication Technology Labs module report (Test Report No.: B15W50341-FCC-RF_Rev1, Issue Date: Jul, 10, 2015).

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB



2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Jan. 21, 2015	Jan. 20, 2016
			Jan. 21, 2016	Jan. 20, 2017
Spectrum Analyzer Agilent	N9010A	MY52220314	Sep. 03, 2015	Sep. 02, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2015	Dec. 16, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Feb. 05, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Feb. 09, 2015	Feb. 08, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Feb. 05, 2015	Feb. 04, 2016
Loop Antenna	EM-6879	269	Jul. 31, 2015	Jul. 30, 2016
Preamplifier EMCI	EMC 012645	980115	Dec. 21, 2015	Dec. 20, 2016
Preamplifier EMCI	EMC 184045	980116	Dec. 21, 2015	Dec. 20, 2016
Preamplifier EMCI	EMC 330H	980112	Dec. 28, 2015	Dec. 27, 2016
Power Meter Anritsu	ML2495A	1232002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor Anritsu	MA2411B	1207325	Sep. 21, 2015	Sep. 20, 2016
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 12, 2015	Oct. 11, 2016
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 12, 2015	Oct. 11, 2016
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 12, 2015	Oct. 11, 2016
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer	MT8820C	6201300640	Aug. 10, 2015	Aug. 09, 2017

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The FCC Site Registration No. is 690701.
5. The IC Site Registration No. is IC7450F-10.

3 General Information

3.1 General Description of EUT

Product	Tablet Computer	
Brand	Lenovo	
Test Model	TP00078A	
Status of EUT	Production Unit	
Power Supply Rating	20.0 Vdc (adapter) 15.2 Vdc (Li-ion battery)	
Modulation Type	WCDMA	QPSK, BPSK
	LTE	QPSK, 16QAM
Frequency Range	WCDMA	1712.4 ~ 1752.6 MHz
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
	LTE Band 13 (Channel Bandwidth: 5 MHz)	779.5 ~ 784.5 MHz
	LTE Band 13 (Channel Bandwidth: 10 MHz)	782.0 MHz
Max. ERP Power	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	0.05 W
	LTE Band 12 (Channel Bandwidth: 3 MHz)	0.05 W
	LTE Band 12 (Channel Bandwidth: 5 MHz)	0.05 W
	LTE Band 12 (Channel Bandwidth: 10 MHz)	0.05 W
	LTE Band 13 (Channel Bandwidth: 5 MHz)	0.10 W
	LTE Band 13 (Channel Bandwidth: 10 MHz)	0.10 W
Max. EIRP Power	WCDMA	0.19 W
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	0.21 W
	LTE Band 4 (Channel Bandwidth: 3 MHz)	0.21 W
	LTE Band 4 (Channel Bandwidth: 5 MHz)	0.22 W
	LTE Band 4 (Channel Bandwidth: 10 MHz)	0.23 W
	LTE Band 4 (Channel Bandwidth: 15 MHz)	0.23 W
	LTE Band 4 (Channel Bandwidth: 20 MHz)	0.24 W
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

- The antenna information is listed as below.


Antenna Type	Brand Name	Parts Number	Antenna Gain
PIFA	Ethertronics Inc.	WWAN Main Antenna: 5001997 WWAN Aux. Antenna: 5002014 (RX only)	WCDMA IV: 0.02 dBi LTE Band 4: -0.12 dBi LTE Band 12: -3.62 dBi LTE Band 13: -0.61 dBi

- The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter 1	Lenovo	ADLX45NCC2A	I/P: 100-240Vac, 50-60Hz, 1.3A O/P: 20Vdc, 2.25A
Adapter 2	Lenovo	ADLX45NDC2A	I/P: 100-240Vac, 50-60Hz, 1.3A O/P: 20Vdc, 2.25A
Battery	Lenovo	SB10F46465	15.2Vdc, 2.895Ah
WLAN Module	Intel	8260NGW	--
WWAN Module	Sierra	EM7455	--

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

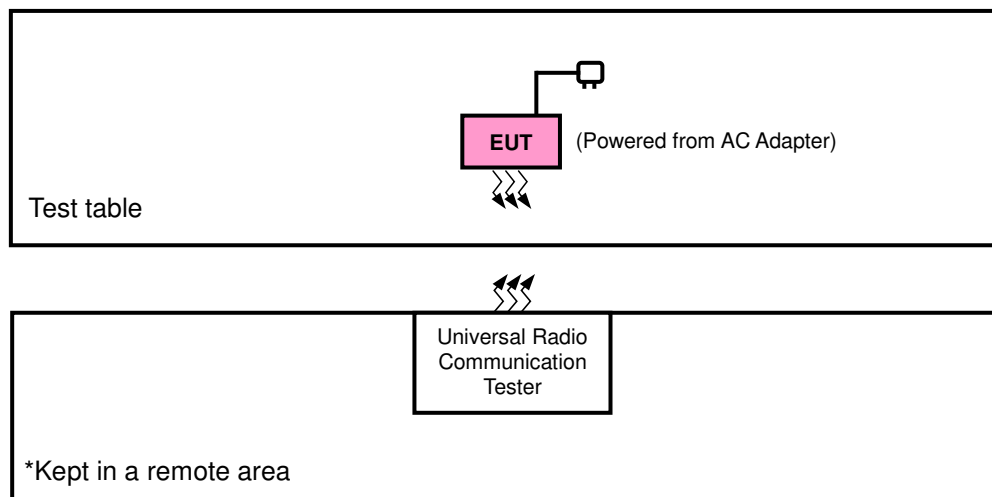

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	1312 to 1513	1312, 1413, 1513	WCDMA
-	Radiated Emission	1312 to 1513	1413	WCDMA

LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 5 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 14 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 49 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 99 RB Offset
-	Radiated Emission	20050 to 20300	20175	20 MHz	QPSK	1 RB / 99 RB Offset

LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset

LTE Band 13

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
-	Radiated Emission	23230	23230	10 MHz	QPSK	1 RB / 24 RB Offset 1 RB / 50 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	15.2 Vdc	Luke Chen
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Anson Lin

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v02r02

KDB 412172 D01 Determining ERP and EIRP v01r01

KDB 996369 D01 Module Certification Guide v02

ANSI/TIA/EIA-603-D 2010

NOTE: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.


Portable stations (hand-held devices) operating in the 699-787 MHz band are limited to 3 watts ERP

4.1.2 Test Procedures

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Conducted Power Measurement:

- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



EIRP / ERP Measurement:

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

4.1.3 Test Results

Conducted Output Power (dBm)

Band	WCDMA IV			
	Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6	
RMC 12.2K	22.92	23.02	22.98	
HSDPA Subtest-1	21.75	21.80	21.74	
HSDPA Subtest-2	21.79	21.84	21.78	
HSDPA Subtest-3	21.27	21.33	21.27	
HSDPA Subtest-4	21.27	20.95	21.26	
HSUPA Subtest-1	21.52	21.51	21.58	
HSUPA Subtest-2	19.80	19.85	19.89	
HSUPA Subtest-3	20.47	20.45	20.48	
HSUPA Subtest-4	20.05	20.35	20.08	
HSUPA Subtest-5	21.80	21.90	21.80	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19957	Mid Ch 20175	High Ch 20393		Low Ch 19957	Mid Ch 20175	High Ch 20393	
			1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz	
4 / 1.4M	1	0	23.14	23.09	23.25	0	22.47	22.42	22.58	1
	1	2	22.03	22.10	22.03	0	21.15	21.43	21.24	1
	1	5	22.44	22.16	22.24	0	21.77	21.49	21.57	1
	3	0	22.41	22.57	22.58	0	21.74	21.90	21.91	1
	3	1	22.32	22.28	22.25	0	21.65	21.61	21.58	1
	3	3	22.22	22.12	22.29	0	21.55	21.45	21.62	1
	6	0	21.27	21.30	21.40	1	20.60	20.63	20.73	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19965	Mid Ch 20175	High Ch 20385		Low Ch 19965	Mid Ch 20175	High Ch 20385	
			1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz	
4 / 3M	1	0	23.29	23.24	23.40	0	22.52	22.47	22.63	1
	1	7	22.13	22.25	22.06	0	21.20	21.48	21.29	1
	1	14	22.59	22.31	22.39	0	21.82	21.54	21.62	1
	8	0	21.56	21.72	21.73	1	20.79	20.95	20.96	2
	8	3	21.47	21.43	21.40	1	20.70	20.66	20.63	2
	8	7	21.37	21.27	21.44	1	20.60	20.50	20.67	2
	15	0	21.42	21.45	21.55	1	20.65	20.68	20.78	2



Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19975	Mid Ch 20175	High Ch 20375		Low Ch 19975	Mid Ch 20175	High Ch 20375	
			1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz	
4 / 5M	1	0	23.41	23.36	23.52	0	22.55	22.50	22.66	1
	1	12	22.09	22.37	22.18	0	21.23	21.51	21.32	1
	1	24	22.71	22.43	22.51	0	21.85	21.57	21.65	1
	12	0	21.68	21.84	21.85	1	20.82	20.98	20.99	2
	12	6	21.59	21.55	21.52	1	20.73	20.69	20.66	2
	12	13	21.49	21.39	21.56	1	20.63	20.53	20.70	2
	25	0	21.54	21.57	21.67	1	20.68	20.71	20.81	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20000	Mid Ch 20175	High Ch 20350		Low Ch 20000	Mid Ch 20175	High Ch 20350	
			1715.0 MHz	1732.5 MHz	1750.0 MHz		1715.0 MHz	1732.5 MHz	1750.0 MHz	
4 / 10M	1	0	23.54	23.49	23.65	0	22.62	22.57	22.73	1
	1	24	22.22	22.50	22.31	0	21.30	21.58	21.39	1
	1	49	22.84	22.56	22.64	0	21.92	21.64	21.72	1
	25	0	21.81	21.97	21.98	1	20.89	21.05	21.06	2
	25	12	21.72	21.68	21.65	1	20.80	20.76	20.73	2
	25	25	21.62	21.52	21.69	1	20.70	20.60	20.77	2
	50	0	21.67	21.70	21.80	1	20.75	20.78	20.88	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20025	Mid Ch 20175	High Ch 20325		Low Ch 20025	Mid Ch 20175	High Ch 20325	
			1717.5 MHz	1732.5 MHz	1747.5 MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz	
4 / 15M	1	0	23.65	23.60	23.76	0	22.70	22.65	22.81	1
	1	37	22.33	22.61	22.42	0	21.38	21.66	21.47	1
	1	74	22.95	22.67	22.75	0	22.00	21.72	21.80	1
	36	0	21.92	22.08	22.09	1	20.97	21.13	21.14	2
	36	19	21.83	21.79	21.76	1	20.88	20.84	20.81	2
	36	39	21.73	21.63	21.80	1	20.78	20.68	20.85	2
	75	0	21.78	21.81	21.91	1	20.83	20.86	20.96	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20050	Mid Ch 20175	High Ch 20300		Low Ch 20050	Mid Ch 20175	High Ch 20300	
			1720.0 MHz	1732.5 MHz	1745.0 MHz		1720.0 MHz	1732.5 MHz	1745.0 MHz	
4 / 20M	1	0	23.79	23.74	23.90	0	22.76	22.71	22.87	1
	1	50	22.47	22.75	22.56	0	21.44	21.72	21.53	1
	1	99	23.09	22.81	22.89	0	22.06	21.78	21.86	1
	50	0	22.06	22.22	22.23	1	21.03	21.19	21.20	2
	50	25	21.97	21.93	21.90	1	20.94	20.90	20.87	2
	50	50	21.87	21.77	21.94	1	20.84	20.74	20.91	2
	100	0	21.92	21.95	22.05	1	20.89	20.92	21.02	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23017	Mid Ch 23095	High Ch 23173		Low Ch 23017	Mid Ch 23095	High Ch 23173	
			699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz	
12 / 1.4M	1	0	22.16	22.21	22.33	0	21.29	21.34	21.46	1
	1	2	22.12	22.30	22.31	0	21.25	21.43	21.44	1
	1	5	22.04	22.25	22.28	0	21.17	21.38	21.41	1
	3	0	22.20	22.22	22.23	0	21.33	21.35	21.36	1
	3	1	22.21	22.12	22.12	0	21.34	21.25	21.25	1
	3	3	22.14	22.08	22.18	0	21.27	21.21	21.31	1
	6	0	21.13	21.12	21.04	1	20.26	20.25	20.17	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23025	Mid Ch 23095	High Ch 23165		Low Ch 23025	Mid Ch 23095	High Ch 23165	
			700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz	
12 / 3M	1	0	22.31	22.36	22.48	0	21.36	21.41	21.53	1
	1	7	22.27	22.45	22.46	0	21.32	21.50	21.51	1
	1	14	22.19	22.40	22.43	0	21.24	21.45	21.48	1
	8	0	21.35	21.37	21.38	1	20.40	20.42	20.43	2
	8	3	21.36	21.27	21.27	1	20.41	20.32	20.32	2
	8	7	21.29	21.23	21.33	1	20.34	20.28	20.38	2
	15	0	21.28	21.27	21.19	1	20.33	20.32	20.24	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23035	Mid Ch 23095	High Ch 23155		Low Ch 23035	Mid Ch 23095	High Ch 23155	
			701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz	
12 / 5M	1	0	22.42	22.47	22.59	0	21.45	21.50	21.62	1
	1	12	22.38	22.56	22.57	0	21.41	21.59	21.60	1
	1	24	22.30	22.51	22.54	0	21.33	21.54	21.57	1
	12	0	21.46	21.48	21.49	1	20.49	20.51	20.52	2
	12	6	21.47	21.38	21.38	1	20.50	20.41	20.41	2
	12	13	21.40	21.34	21.44	1	20.43	20.37	20.47	2
	25	0	21.39	21.38	21.30	1	20.42	20.41	20.33	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23060	Mid Ch 23095	High Ch 23130		Low Ch 23060	Mid Ch 23095	High Ch 23130	
			704.0 MHz	707.5 MHz	711.0 MHz		704.0 MHz	707.5 MHz	711.0 MHz	
12 / 10M	1	0	22.58	22.63	22.75	0	21.49	21.54	21.66	1
	1	24	22.54	22.72	22.73	0	21.45	21.63	21.64	1
	1	49	22.46	22.67	22.70	0	21.37	21.58	21.61	1
	25	0	21.62	21.64	21.65	1	20.53	20.55	20.56	2
	25	12	21.63	21.54	21.54	1	20.54	20.45	20.45	2
	25	25	21.56	21.50	21.60	1	20.47	20.41	20.51	2
	50	0	21.55	21.54	21.46	1	20.46	20.45	20.37	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23205	Mid Ch 23230	High Ch 23255		Low Ch 23205	Mid Ch 23230	High Ch 23255	
			779.5 MHz	782.0 MHz	784.5 MHz		779.5 MHz	782.0 MHz	784.5 MHz	
13 / 5M	1	0	22.65	22.60	22.72	0	21.56	21.51	21.69	1
	1	12	21.95	22.66	22.15	0	20.86	21.57	21.12	1
	1	24	22.55	22.58	22.68	0	21.46	21.49	21.65	1
	12	0	21.59	21.60	21.59	1	20.50	20.51	20.56	2
	12	6	21.50	21.60	21.58	1	20.41	20.51	20.55	2
	12	13	21.63	21.62	21.54	1	20.54	20.53	20.51	2
	25	0	21.48	21.61	21.65	1	20.39	20.52	20.62	2

Band / BW	RB Size	RB Offset	QPSK		3GPP MPR (dB)	16QAM		3GPP MPR (dB)
			Mid Ch 23230			Mid Ch 23230		
			782.0 MHz			782.0 MHz		
13 / 10M	1	0	22.83		0	21.74		1
	1	24	22.59		0	21.50		1
	1	49	22.59		0	21.50		1
	25	0	21.64		1	20.55		2
	25	12	21.50		1	20.41		2
	25	25	21.54		1	20.45		2
	50	0	21.65		1	20.56		2

ERP Power (dBm)

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		23017	23095	23173	23017	23095	23173
	Frequency	699.7	707.5	715.3	699.7	707.5	715.3
MHz		MHz	MHz	MHz	MHz	MHz	
12 / 1.4M	Conducted power(dBm)	22.21	22.3	22.33	21.34	21.43	21.46
	Conducted power (Watts)	0.17	0.17	0.17	0.14	0.14	0.14
	ERP (dBm)	16.44	16.53	16.56	15.57	15.66	15.69
	ERP (Watts)	0.04	0.04	0.05	0.04	0.04	0.04

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		23025	23095	23165	23025	23095	23165
	Frequency	700.5	707.5	714.5	700.5	707.5	714.5
MHz		MHz	MHz	MHz	MHz	MHz	
12 / 3M	Conducted power(dBm)	22.31	22.45	22.48	21.36	21.5	21.53
	Conducted power (Watts)	0.17	0.18	0.18	0.14	0.14	0.14
	ERP (dBm)	16.54	16.68	16.71	15.59	15.73	15.76
	ERP (Watts)	0.05	0.05	0.05	0.04	0.04	0.04

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		23035	23095	23155	23035	23095	23155
	Frequency	701.5	707.5	713.5	701.5	707.5	713.5
MHz		MHz	MHz	MHz	MHz	MHz	
12 / 5M	Conducted power(dBm)	22.42	22.56	22.59	21.45	21.59	21.62
	Conducted power (Watts)	0.17	0.18	0.18	0.14	0.14	0.15
	ERP (dBm)	16.65	16.79	16.82	15.68	15.82	15.85
	ERP (Watts)	0.05	0.05	0.05	0.04	0.04	0.04

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		23060	23095	23130	23060	23095	23130
	Frequency	704	707.5	711	704	707.5	711
MHz		MHz	MHz	MHz	MHz	MHz	
12 / 10M	Conducted power(dBm)	22.58	22.72	22.75	21.49	21.63	21.66
	Conducted power (Watts)	0.18	0.19	0.19	0.14	0.15	0.15
	ERP (dBm)	16.81	16.95	16.98	15.72	15.86	15.89
	ERP (Watts)	0.05	0.05	0.05	0.04	0.04	0.04

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		23205	23230	23255	23205	23230	23255
	Frequency	779.5	782	784.5	779.5	782	784.5
MHz		MHz	MHz	MHz	MHz	MHz	
13 / 5M	Conducted power(dBm)	22.65	22.66	22.72	21.56	21.57	21.69
	Conducted power (Watts)	0.18	0.18	0.19	0.14	0.14	0.15
	ERP (dBm)	19.89	19.9	19.96	18.8	18.81	18.93
	ERP (Watts)	0.10	0.10	0.10	0.08	0.08	0.08

Band / BW	Mode	QPSK	16QAM
	Channel	Mid CH	Mid CH
		23230	23230
	Frequency	782	782
MHz		MHz	
13 / 10M	Conducted power(dBm)	22.83	21.74
	Conducted power (Watts)	0.19	0.15
	ERP (dBm)	20.07	18.98
	ERP (Watts)	0.10	0.08

EIRP Power (dBm)

Band	WCDMA IV		
Channel	1312	1413	1513
Rx Channel	1537	1638	1738
Frequency	1712.4	1732.6	1752.6
Conducted power(dBm)	22.92	23.02	22.98
Conducted power (Watts)	0.20	0.20	0.20
E.I.R.P (dBm)	22.8	22.9	22.86
E.I.R.P (Watts)	0.19	0.19	0.19

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		19957	20175	20393	19957	20175	20393
Frequency	1710.7	1732.5	1754.3	1710.7	1732.5	1754.3	
	MHz	MHz	MHz	MHz	MHz	MHz	
4 / 1.4M	Conducted power(dBm)	23.14	23.09	23.25	22.47	22.42	22.58
	Conducted power (Watts)	0.21	0.20	0.21	0.18	0.17	0.18
	E.I.R.P (dBm)	23.02	22.97	23.13	22.35	22.3	22.46
	E.I.R.P (Watts)	0.20	0.20	0.21	0.17	0.17	0.18

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		19965	20175	20385	19965	20175	20385
Frequency	1711.5	1732.5	1753.5	1711.5	1732.5	1753.5	
	MHz	MHz	MHz	MHz	MHz	MHz	
4 / 3M	Conducted power(dBm)	23.29	23.24	23.4	22.52	22.47	22.63
	Conducted power (Watts)	0.21	0.21	0.22	0.18	0.18	0.18
	E.I.R.P (dBm)	23.17	23.12	23.28	22.4	22.35	22.51
	E.I.R.P (Watts)	0.21	0.21	0.21	0.17	0.17	0.18

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		19975	20175	20375	19975	20175	20375
Frequency	1712.5	1732.5	1752.5	1712.5	1732.5	1752.5	
	MHz	MHz	MHz	MHz	MHz	MHz	
4 / 5M	Conducted power(dBm)	23.41	23.36	23.52	22.55	22.5	22.66
	Conducted power (Watts)	0.22	0.22	0.22	0.18	0.18	0.18
	E.I.R.P (dBm)	23.29	23.24	23.4	22.43	22.38	22.54
	E.I.R.P (Watts)	0.21	0.21	0.22	0.17	0.17	0.18

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		20000	20175	20350	20000	20175	20350
	Frequency	1715	1732.5	1750	1715	1732.5	1750
MHz		MHz	MHz	MHz	MHz	MHz	
4 / 10M	Conducted power(dBm)	23.54	23.49	23.65	22.62	22.57	22.73
	Conducted power (Watts)	0.23	0.22	0.23	0.18	0.18	0.19
	E.I.R.P (dBm)	23.42	23.37	23.53	22.5	22.45	22.61
	E.I.R.P (Watts)	0.22	0.22	0.23	0.18	0.18	0.18

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		20025	20175	20325	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5	1717.5	1732.5	1747.5
MHz		MHz	MHz	MHz	MHz	MHz	
4 / 15M	Conducted power(dBm)	23.65	23.6	23.76	22.7	22.65	22.81
	Conducted power (Watts)	0.23	0.23	0.24	0.19	0.18	0.19
	E.I.R.P (dBm)	23.53	23.48	23.64	22.58	22.53	22.69
	E.I.R.P (Watts)	0.23	0.22	0.23	0.18	0.18	0.19

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		20050	20175	20300	20050	20175	20300
	Frequency	1720	1732.5	1745	1720	1732.5	1745
MHz		MHz	MHz	MHz	MHz	MHz	
4 / 20M	Conducted power(dBm)	23.79	23.74	23.9	22.76	22.71	22.87
	Conducted power (Watts)	0.24	0.24	0.25	0.19	0.19	0.19
	E.I.R.P (dBm)	23.67	23.62	23.78	22.64	22.59	22.75
	E.I.R.P (Watts)	0.23	0.23	0.24	0.18	0.18	0.19

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13 dBm.

4.2.2 Test Procedure


- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi}$.

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.2.3 Deviation from Test Standard

No deviation.

4.2.4 Test Setup

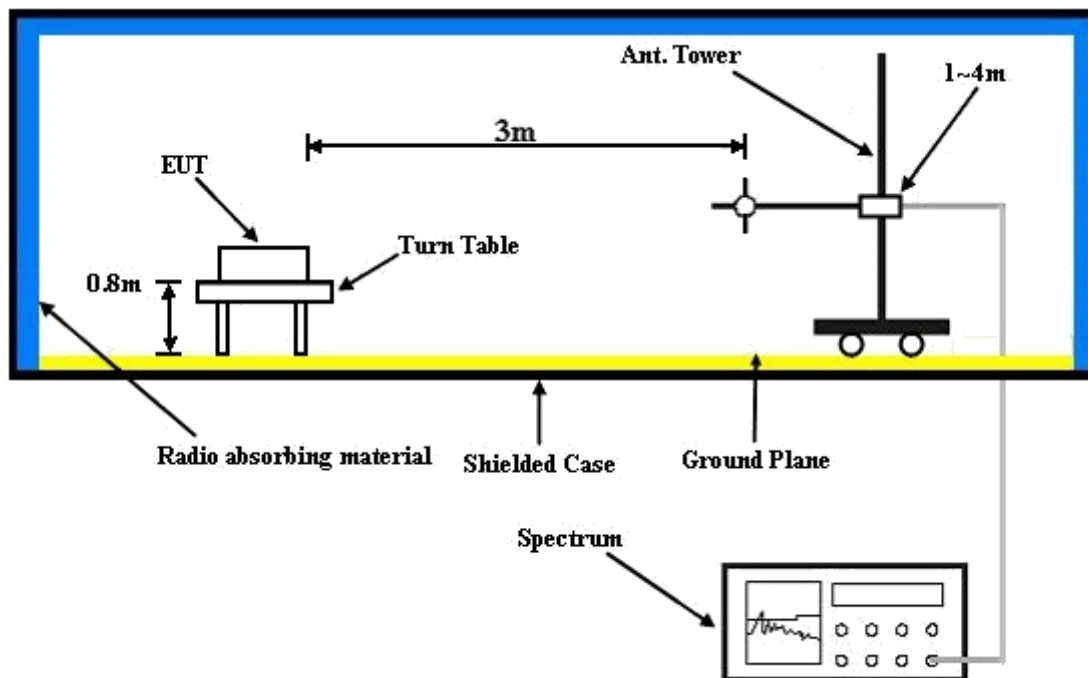

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

LTE Band 4

Channel Bandwidth: 20 MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

Date: 2016-01-16

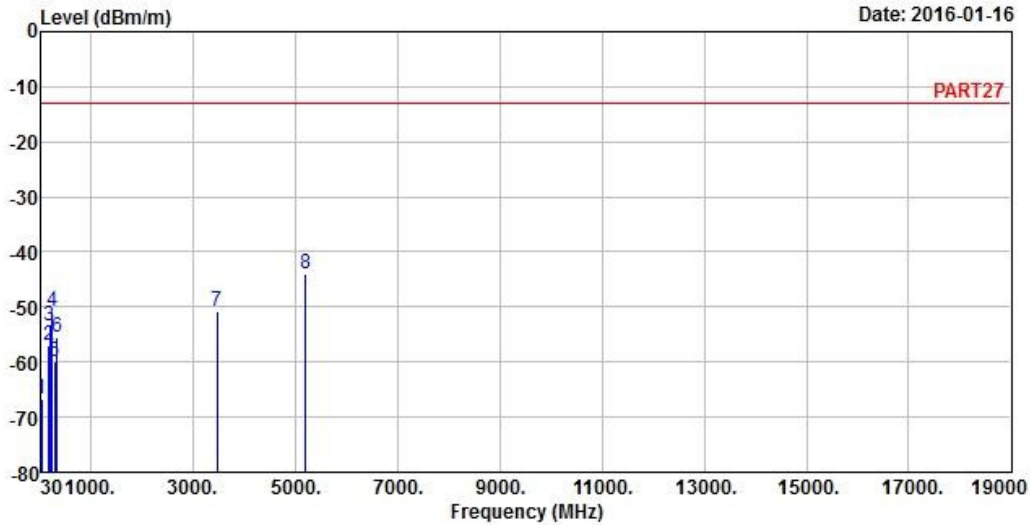

Site : 966 Chamber 5
 Condition: PART27 3m HORIZONTAL
 Remak : LTE Band IV QPSK_20M(1,0) Link
 Tested by: Anson Lin
 Plane : NB


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	38.73	-66.62	-66.72	-13.00	-53.62	0.10	Peak
2	182.29	-56.85	-49.51	-13.00	-43.85	-7.34	Peak
3	200.72	-53.34	-45.36	-13.00	-40.34	-7.98	Peak
4	240.49	-50.81	-44.43	-13.00	-37.81	-6.38	Peak
5	285.11	-59.82	-53.11	-13.00	-46.82	-6.71	Peak
6	330.70	-55.58	-49.04	-13.00	-42.58	-6.54	Peak
7	3465.00	-50.67	-41.76	-13.00	-37.67	-8.91	Peak
8 pp	5197.50	-43.86	-41.00	-13.00	-30.86	-2.86	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

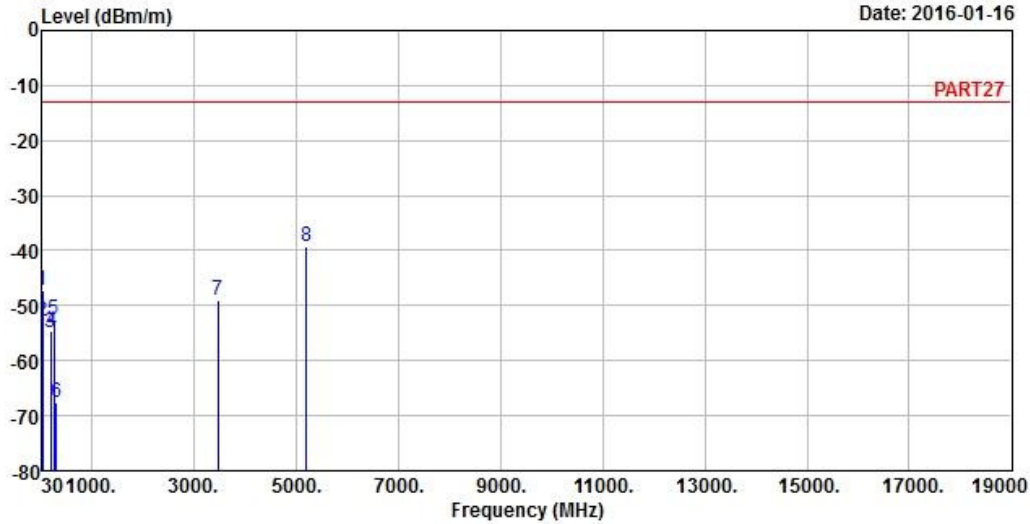

Site : 966 Chamber 5
 Condition: PART27 3m VERTICAL
 Remak : LTE Band IV QPSK_20M(1,0) Link
 Tested by: Anson Lin
 Plane : NB

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	32.91	-47.15	-46.06	-13.00	-34.15	-1.09	Peak
2	36.79	-52.72	-51.73	-13.00	-39.72	-0.99	Peak
3	193.93	-55.00	-47.54	-13.00	-42.00	-7.46	Peak
4	216.24	-54.60	-47.24	-13.00	-41.60	-7.36	Peak
5	255.04	-52.59	-46.50	-13.00	-39.59	-6.09	Peak
6	310.33	-67.54	-60.69	-13.00	-54.54	-6.85	Peak
7	3465.00	-48.92	-40.01	-13.00	-35.92	-8.91	Peak
8 pp	5197.50	-39.35	-36.49	-13.00	-26.35	-2.86	Peak

LTE Band 13
Channel Bandwidth: 10 MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

Date: 2016-01-18

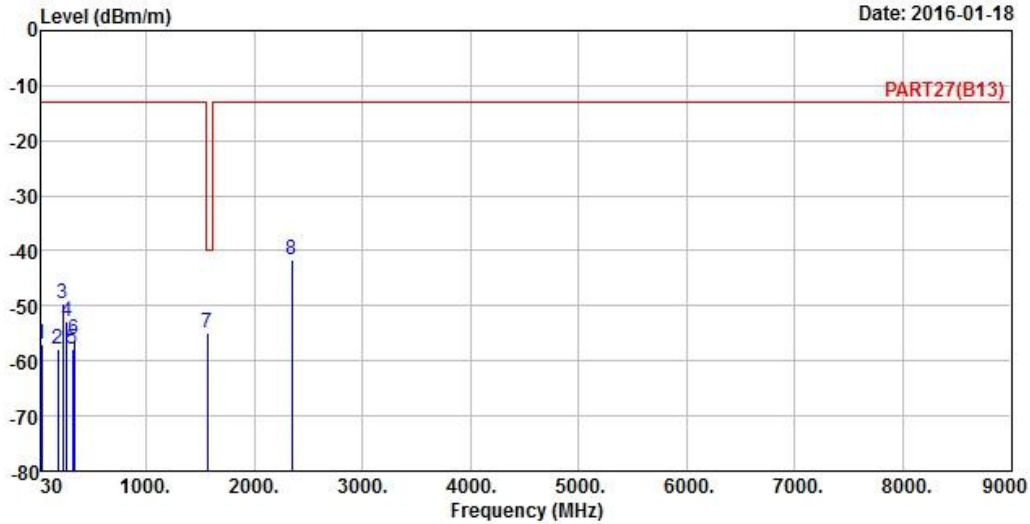

Site : 966 Chamber 5
 Condition: PART27(B13) 3m HORIZONTAL
 Remak : LTE Band 13_QPSK_10M(1,0) Link
 Tested by: Anson Lin
 Plane : NB

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-56.97	-57.35	-13.00	-43.97	0.38	Peak
2	181.32	-57.76	-50.39	-13.00	-44.76	-7.37	Peak
3	229.82	-49.72	-42.91	-13.00	-36.72	-6.81	Peak
4	264.74	-52.80	-46.51	-13.00	-39.80	-6.29	Peak
5	319.06	-57.88	-51.16	-13.00	-44.88	-6.72	Peak
6	336.52	-56.07	-49.62	-13.00	-43.07	-6.45	Peak
7 pp	1564.00	-54.92	-39.90	-40.00	-14.92	-15.02	Peak
8	2346.00	-41.61	-31.17	-13.00	-28.61	-10.44	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

Date: 2016-01-18

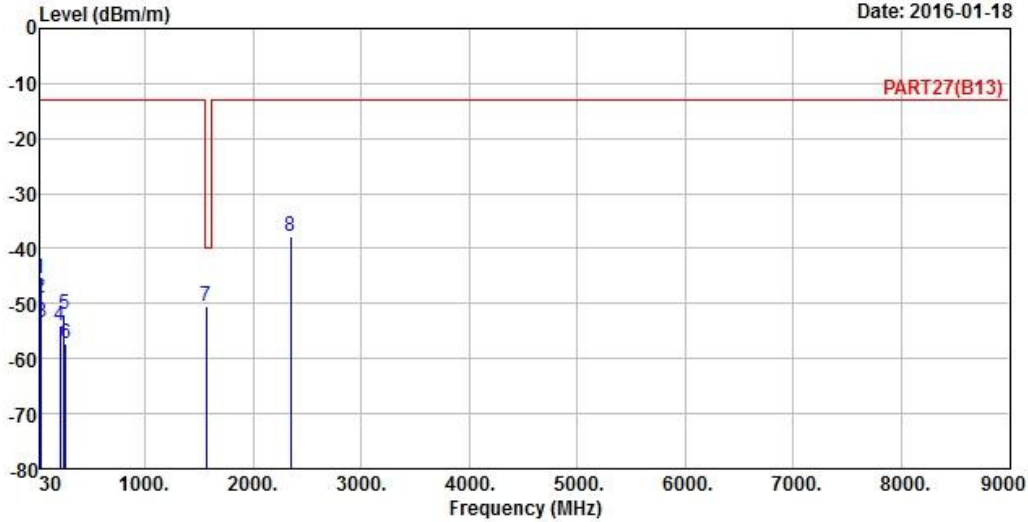

Site : 966 Chamber 5
 Condition: PART27(B13) 3m VERTICAL
 Remak : LTE Band 13_QPSK_10M(1,0) Link
 Tested by: Anson Lin
 Plane : NB

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	31.94	-45.52	-44.92	-13.00	-32.52	-0.60	Peak
2	33.88	-49.11	-47.53	-13.00	-36.11	-1.58	Peak
3	41.64	-53.40	-52.99	-13.00	-40.40	-0.41	Peak
4	212.36	-54.11	-46.60	-13.00	-41.11	-7.51	Peak
5	251.16	-51.90	-45.89	-13.00	-38.90	-6.01	Peak
6	263.77	-57.14	-50.87	-13.00	-44.14	-6.27	Peak
7 pp	1564.00	-50.50	-35.48	-40.00	-10.50	-15.02	Peak
8	2346.00	-37.91	-27.47	-13.00	-24.91	-10.44	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

Date: 2016-01-25

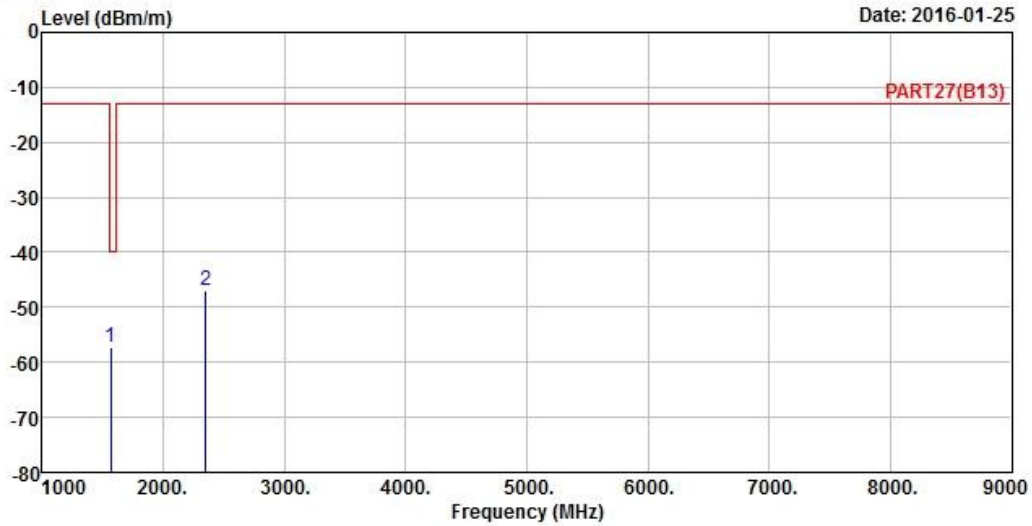

Site : 966 Chamber 5
 Condition: PART27(B13) 3m HORIZONTAL
 Remak : LTE Band 13_QPSK_10M(50,0) Link
 Tested by: Anson Lin
 Plane : NB


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	pp 1564.00	-57.19	-42.17	-40.00	-17.19	-15.02	Peak
2	2346.00	-46.99	-36.55	-13.00	-33.99	-10.44	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

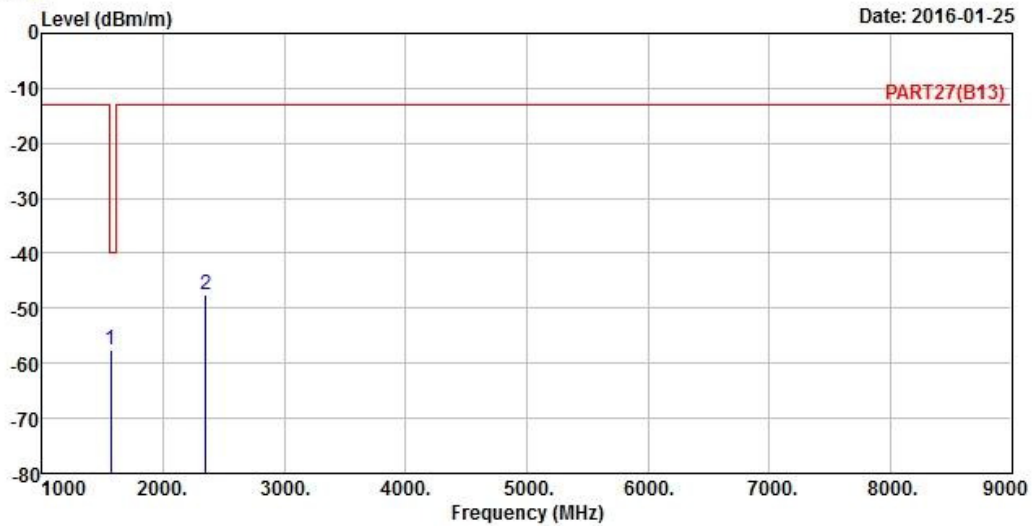

Site : 966 Chamber 5
 Condition: PART27(B13) 3m VERTICAL
 Remak : LTE Band 13_QPSK_10M(50,0) Link
 Tested by: Anson Lin
 Plane : NB

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 pp	1564.00	-57.65	-42.63	-40.00	-17.65	-15.02	Peak
2	2346.00	-47.58	-37.14	-13.00	-34.58	-10.44	Peak



5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



A D T

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---