

# FCC SAR TEST REPORT

**FCC ID** : GKRGWT9R  
**Equipment** : Wireless Device  
**Model Name** : GWT9R  
**Applicant** : Compal Electronics, Inc  
No. 581-1 & 581, Ruiguang Rd., Nei-hu  
District, Taipei City 114, TAIWAN (R.O.C.)  
**Standard** : FCC 47 CFR Part 2 (2.1093)

The product was received on May 27, 2021 and testing was started from Jun. 01, 2021 and completed on Nov. 03, 2021. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



**Sporton International Inc. EMC & Wireless Communications Laboratory**  
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. Statement of Compliance ..... 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information..... 5
3.1 General Information ..... 5
3.2 General LTE SAR Test and Reporting Considerations ..... 6
4. RF Exposure Limits..... 8
4.1 Uncontrolled Environment..... 8
4.2 Controlled Environment..... 8
5. Specific Absorption Rate (SAR)..... 9
5.1 Introduction ..... 9
5.2 SAR Definition..... 9
6. System Description and Setup .....10
6.1 Test Site Location.....10
6.2 E-Field Probe .....11
6.3 Data Acquisition Electronics (DAE) .....11
6.4 Phantom.....12
6.5 Device Holder.....13
7. Measurement Procedures .....14
7.1 Spatial Peak SAR Evaluation.....14
7.2 Power Reference Measurement.....15
7.3 Area Scan .....15
7.4 Zoom Scan.....16
7.5 Volume Scan Procedures.....17
7.6 Power Drift Monitoring.....17
8. Test Equipment List.....18
9. System Verification .....19
9.1 Tissue Verification .....19
9.2 System Performance Check Results.....20
10. RF Exposure Positions .....21
10.1 Hand Exposure .....21
11. UMTS/LTE Output Power (Unit: dBm) .....22
12. WiFi/Bluetooth Output Power (Unit: dBm) .....50
13. SAR Test Results .....52
13.1 Head SAR .....54
13.2 Hand SAR .....58
14. Simultaneous Transmission Analysis .....62
14.1 Head Exposure Conditions .....62
14.2 Hand Exposure Conditions .....62
15. Uncertainty Assessment .....63
16. References.....63
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASY Calibration Certificate
Appendix D. Test Setup Photos & Antenna Location



**History of this test report**

<b>Report No.</b>	<b>Version</b>	<b>Description</b>	<b>Issued Date</b>
FA142875	01	Initial issue of report	Nov. 05, 2021
FA142875	02	1. Add NFC Rx only in section 3.1 2. Update antenna name in section 11, 13 and Appendix D 3. Update 3.2	Dec. 14, 2021



**1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for **Compal Electronics, Inc, Wireless Device, GWT9R**, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
			Head SAR (Separation 10mm)	Hand SAR (Separation 0mm)		
			1g SAR (W/kg)	10g SAR (W/kg)		
Licensed	WCDMA	WCDMA II	0.16	0.13	0.36	0.51
		WCDMA IV	0.18	0.13		
		WCDMA V	0.11	0.17		
	LTE	LTE Band 12/17	0.06	0.26		
		LTE Band 13	0.08	0.45		
		LTE Band 2/25	0.28	0.13		
		LTE Band 5/26	0.06	0.19		
		LTE Band 4/66	0.14	0.18		
	LTE Band 71	0.04	0.15			
DTS	WLAN	2.4GHz WLAN	0.07	0.06	0.36	0.51
DSS	2.4GHz Band	Bluetooth	0.06	0.05	0.35	0.50
Date of Testing:			2021/6/1 ~ 2021/11/3			

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Head 1g SAR, 4.0 W/kg for Hand 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

**Reviewed by: Jason Wang**  
**Report Producer: Daisy Peng**

**2. Guidance Applied**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05



### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Product Feature & Specification	
Equipment Name	Wireless Device
Model Name	GWT9R
FCC ID	GKRGWT9R
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz (Rx only) WPT: 165KHz ~ 205KHz (Rx only)
Mode	RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM WLAN: 802.11b/g/n HT20 Bluetooth BR/EDR/LE NFC/WPC: ASK
<b>Remark:</b> 1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.	



3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID	GKRGWT9R																																																																									
Equipment Name	Wireless Device																																																																									
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																																									
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																																									
uplink modulations used	QPSK / 16QAM																																																																									
LTE Voice / Data requirements	Voice and Data																																																																									
LTE MPR permanently built-in by design	<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>												Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																									
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																									
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																																										
LTE Band 2																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860																																																														
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880																																																														
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900																																																														
LTE Band 4																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720																																																														
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5																																																														
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745																																																														
LTE Band 5																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz																																																																			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																																
L	20407	824.7	20415	825.5	20425	826.5	20450	829																																																																		
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5																																																																		
H	20643	848.3	20635	847.5	20625	846.5	20600	844																																																																		



LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5				
H	133447	695.5	133422	693	133397	690.5	133372	688				



**4. RF Exposure Limits**

**4.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**4.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

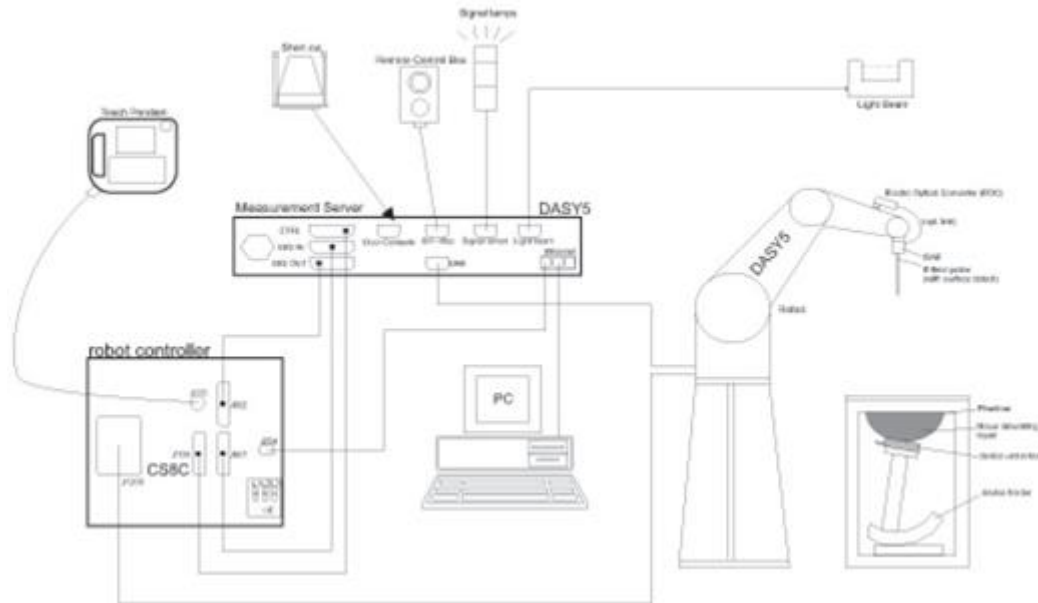

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 6.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. In system validation list test site number, if the test site number is include in the Wensan Laboratory, that's mean the test data are subcontracted to Sporton International Inc. Wensan Laboratory.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	


**6.2 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.3 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**6.4 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**
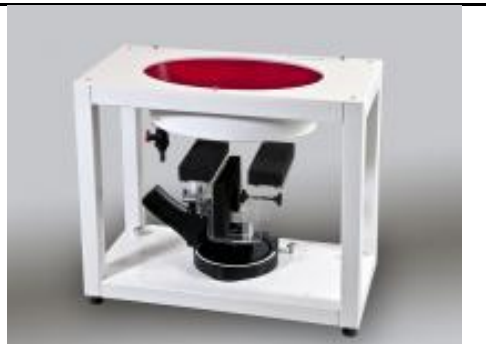
<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				





### **7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### **7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit <sup>(2)</sup>	D750V3	1107	Mar. 08, 2019	Mar. 05, 2022
SPEAG	835MHz System Validation Kit <sup>(2)</sup>	D835V2	4d167	Nov. 25, 2019	Nov. 23, 2021
SPEAG	1750MHz System Validation Kit <sup>(2)</sup>	D1750V2	1112	Mar. 07, 2019	Mar. 04, 2022
SPEAG	1900MHz System Validation Kit <sup>(2)</sup>	D1900V2	5d041	Sep. 11, 2018	Sep. 08, 2021
SPEAG	1900MHz System Validation Kit <sup>(2)</sup>	D1900V2	5d185	Mar. 07, 2019	Mar. 04, 2022
SPEAG	2450MHz System Validation Kit <sup>(2)</sup>	D2450V2	736	Aug. 31, 2018	Aug. 28, 2021
SPEAG	2450MHz System Validation Kit <sup>(2)</sup>	D2450V2	929	Nov. 21, 2019	Nov. 19, 2021
SPEAG	Data Acquisition Electronics	DAE4	376	Nov. 23, 2020	Nov. 22, 2021
SPEAG	Data Acquisition Electronics	DAE4	778	May. 21, 2021	May. 20, 2022
SPEAG	Data Acquisition Electronics	DAE4	1399	Feb. 16, 2021	Feb. 15, 2022
SPEAG	Data Acquisition Electronics	DAE4	1424	Jan. 19, 2021	Jan. 18, 2022
SPEAG	Data Acquisition Electronics	DAE4	1512	Feb. 11, 2021	Feb. 10, 2022
SPEAG	Data Acquisition Electronics	DAE4	1647	Jan. 07, 2021	Jan. 06, 2022
SPEAG	Dosimetric E-Field Probe	ES3DV3	3184	Sep. 23, 2020	Sep. 22, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Feb. 23, 2021	Feb. 22, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 22, 2020	Oct. 21, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7439	Feb. 23, 2021	Feb. 22, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	7590	Mar. 25, 2021	Mar. 24, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	7625	Jan. 19, 2021	Jan. 18, 2022
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 10, 2020	Nov. 09, 2021
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 10, 2020	Nov. 09, 2021
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 10, 2020	Nov. 09, 2021
Keysight	Wireless Communication Test Set	E5515C	MY50267236	Mar. 21, 2021	Mar. 20, 2022
R&S	BT Base Station	CBT	100815	Feb. 19, 2021	Feb. 18, 2022
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 11, 2020	Nov. 10, 2021
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 03, 2020	Sep. 02, 2021
Keysight	ENA Network Analyzer	E5071C	MY46316648	Jul. 22, 2021	Jul. 21, 2022
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 16, 2020	Sep. 15, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 14, 2021	Jul. 13, 2022
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 06, 2020	Nov. 05, 2021
Anritsu	Power Meter	ML2495A	1804003	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Power Meter	ML2496A	2119003	Jun. 09, 2021	Jun. 08, 2022
Anritsu	Power Meter	ML2495A	1419002	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Sensor	MA2411B	1726150	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Power Sensor	MA2411B	1911334	Jun. 01, 2021	May. 31, 2022
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2021	Aug. 17, 2022
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2020	Aug. 26, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 15, 2021	Jan. 14, 2022
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 16, 2021	Jul. 15, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 21, 2020	Oct. 20, 2021
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 11, 2021	May. 10, 2022
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Sep. 06, 2021	Sep. 05, 2022
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.



### 9. System Verification

#### 9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing


#### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
750	22.5	0.884	42.230	0.89	41.90	-0.67	0.79	±5	2021/6/2
750	22.2	0.886	42.356	0.89	41.90	-0.45	1.09	±5	2021/6/4
750	22.5	0.890	42.144	0.89	41.90	0.00	0.58	±5	2021/6/7
750	22.3	0.894	41.186	0.89	41.90	0.45	-1.70	±5	2021/8/4
750	22.6	0.885	42.251	0.89	41.90	-0.56	0.84	±5	2021/9/9
750	22.5	0.889	42.326	0.89	41.90	-0.11	1.02	±5	2021/9/10
835	22.3	0.883	41.438	0.90	41.50	-1.89	-0.15	±5	2021/7/21
835	22.5	0.927	41.609	0.90	41.50	3.00	0.26	±5	2021/7/21
835	22.2	0.909	40.593	0.90	41.50	1.00	-2.19	±5	2021/7/22
835	22.4	0.890	41.265	0.90	41.50	-1.11	-0.57	±5	2021/7/27
835	22.3	0.905	41.420	0.90	41.50	0.56	-0.19	±5	2021/8/4
835	22.5	0.916	40.919	0.90	41.50	1.78	-1.40	±5	2021/8/6
835	22.6	0.926	42.620	0.90	41.50	2.89	2.70	±5	2021/11/3
1750	22.3	1.367	40.611	1.37	40.10	-0.22	1.27	±5	2021/6/3
1750	22.2	1.330	39.406	1.37	40.10	-2.92	-1.73	±5	2021/6/4
1750	22.3	1.375	39.426	1.37	40.10	0.36	-1.68	±5	2021/6/8
1750	22.2	1.381	41.532	1.37	40.10	0.80	3.57	±5	2021/7/22
1750	22.5	1.379	39.120	1.37	40.10	0.66	-2.44	±5	2021/8/6
1900	22.3	1.413	39.445	1.40	40.00	0.93	-1.39	±5	2021/6/3
1900	22.2	1.436	39.663	1.40	40.00	2.57	-0.84	±5	2021/6/4
1900	22.3	1.403	39.250	1.40	40.00	0.21	-1.88	±5	2021/6/8
1900	22.2	1.407	40.622	1.40	40.00	0.50	1.56	±5	2021/7/22
1900	22.5	1.430	40.517	1.40	40.00	2.14	1.29	±5	2021/8/6
2450	22.1	1.815	39.190	1.80	39.20	0.83	-0.03	±5	2021/6/1
2450	22.3	1.819	39.734	1.80	39.20	1.06	1.36	±5	2021/6/3
2450	22.6	1.798	39.720	1.80	39.20	-0.11	1.33	±5	2021/6/9
2450	22.3	1.767	38.872	1.80	39.20	-1.83	-0.84	±5	2021/8/7
2450	22.3	1.767	38.872	1.80	39.20	-1.83	-0.84	±5	2021/8/7

**9.2 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
SAR12-HY	2021/6/2	750	50	D750V3-1107	EX3DV4 - SN3931	DAE4 Sn1399	0.405	8.32	8.1	-2.64	0.268	5.61	5.36	-4.46
SAR12-HY	2021/6/4	750	50	D750V3-1107	EX3DV4 - SN3931	DAE4 Sn1399	0.424	8.32	8.48	1.92	0.278	5.61	5.56	-0.89
SAR12-HY	2021/6/7	750	50	D750V3-1107	EX3DV4 - SN3931	DAE4 Sn1399	0.426	8.32	8.52	2.40	0.280	5.61	5.6	-0.18
SAR12-HY	2021/8/4	750	50	D750V3-1107	EX3DV4 - SN3931	DAE4 Sn1399	0.428	8.32	8.56	2.88	0.281	5.61	5.62	0.18
SAR05-HY	2021/9/9	750	250	D750V3-1107	EX3DV4 - SN7590	DAE4 Sn1424	2.03	8.32	8.12	-2.40	1.31	5.61	5.24	-6.60
SAR08-HY	2021/9/10	750	50	D750V3-1107	EX3DV4 - SN3728	DAE4 Sn778	0.395	8.32	7.9	-5.05	0.26	5.61	5.2	-7.31
SAR05-HY	2021/7/21	835	250	D835V2-4d167	EX3DV4 - SN7590	DAE4 Sn1424	2.33	9.55	9.32	-2.41	1.49	6.21	5.96	-4.03
SAR09-HY	2021/7/21	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn1647	2.52	9.55	10.08	5.55	1.70	6.21	6.8	9.50
SAR09-HY	2021/7/22	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn1647	2.29	9.55	9.16	-4.08	1.55	6.21	6.2	-0.16
SAR09-HY	2021/7/27	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn1647	2.24	9.55	8.96	-6.18	1.46	6.21	5.84	-5.96
SAR12-HY	2021/8/4	835	250	D835V2-4d167	EX3DV4 - SN3931	DAE4 Sn1399	2.55	9.55	10.2	6.81	1.64	6.21	6.56	5.64
SAR12-HY	2021/8/6	835	50	D835V2-4d167	EX3DV4 - SN3931	DAE4 Sn1399	0.499	9.55	9.98	4.50	0.320	6.21	6.4	3.06
SAR15-HY	2021/11/3	835	250	D835V2-4d167	EX3DV4 - SN7625	DAE4 Sn1512	2.43	9.55	9.72	1.78	1.57	6.21	6.28	1.13
SAR12-HY	2021/6/3	1750	250	D1750V2-1112	EX3DV4 - SN3931	DAE4 Sn1399	8.90	36.70	35.6	-3.00	4.67	19.40	18.68	-3.71
SAR12-HY	2021/6/4	1750	250	D1750V2-1112	EX3DV4 - SN3931	DAE4 Sn1399	8.66	36.70	34.64	-5.61	4.55	19.40	18.2	-6.19
SAR12-HY	2021/6/8	1750	50	D1750V2-1112	EX3DV4 - SN3931	DAE4 Sn1399	1.92	36.70	38.4	4.63	0.995	19.40	19.9	2.58
SAR09-HY	2021/7/22	1750	250	D1750V2-1112	ES3DV3 - SN3184	DAE4 Sn1647	8.63	36.70	34.52	-5.94	4.80	19.40	19.2	-1.03
SAR12-HY	2021/8/6	1750	250	D1750V2-1112	EX3DV4 - SN3931	DAE4 Sn1399	8.98	36.70	35.92	-2.13	4.71	19.40	18.84	-2.89
SAR12-HY	2021/6/3	1900	250	D1900V2-5d185	EX3DV4 - SN3931	DAE4 Sn1399	10.10	39.40	40.4	2.54	5.21	20.50	20.84	1.66
SAR12-HY	2021/6/4	1900	250	D1900V2-5d185	EX3DV4 - SN3931	DAE4 Sn1399	10.30	39.40	41.2	4.57	5.29	20.50	21.16	3.22
SAR12-HY	2021/6/8	1900	50	D1900V2-5d041	EX3DV4 - SN3931	DAE4 Sn1399	2.15	40.20	43	6.97	1.10	21.20	22	3.77
SAR09-HY	2021/7/22	1900	250	D1900V2-5d185	ES3DV3 - SN3184	DAE4 Sn1647	9.96	39.40	39.84	1.12	5.49	20.50	21.96	7.12
SAR12-HY	2021/8/6	1900	250	D1900V2-5d185	EX3DV4 - SN3931	DAE4 Sn1399	10.30	39.40	41.2	4.57	5.31	20.50	21.24	3.61
SAR06-HY	2021/6/1	2450	50	D2450V2-736	EX3DV4 - SN7439	DAE4 Sn376	2.59	52.70	51.8	-1.71	1.20	24.60	24	-2.44
SAR12-HY	2021/6/3	2450	50	D2450V2-929	EX3DV4 - SN3931	DAE4 Sn1399	2.71	53.10	54.2	2.07	1.30	24.70	26	5.26
SAR12-HY	2021/6/9	2450	50	D2450V2-929	EX3DV4 - SN3931	DAE4 Sn1399	2.56	53.10	51.2	-3.58	1.20	24.70	24	-2.83
SAR12-HY	2021/8/7	2450	250	D2450V2-929	EX3DV4 - SN3931	DAE4 Sn1399	13.10	53.10	52.4	-1.32	6.17	24.70	24.68	-0.08
SAR06-HY	2021/8/7	2450	50	D2450V2-929	EX3DV4 - SN7439	DAE4 Sn1647	2.54	53.10	50.8	-4.33	1.18	24.70	23.6	-4.45

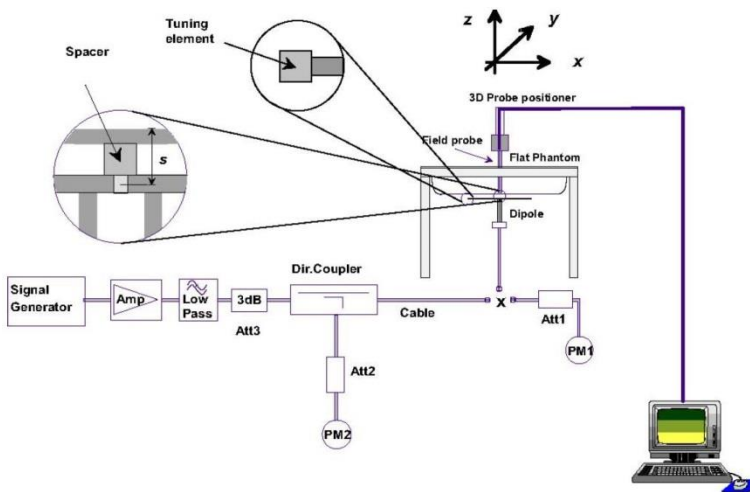

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**



## **10. RF Exposure Positions**

### **10.1 Hand Exposure**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.<sup>6</sup> The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

**11. UMTS/LTE Output Power (Unit: dBm)**

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**





**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

**Top antenna**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	RMC 12.2Kbps	23.40	23.42	23.25	24.50	23.39	23.36	23.16	24.50	23.43	23.47	23.41	25.00
3GPP Rel 6	HSDPA Subtest-1	21.82	21.76	21.54	23.00	21.83	21.84	21.66	23.00	21.49	21.44	21.43	23.00
3GPP Rel 6	HSDPA Subtest-2	21.81	21.80	21.60	23.00	21.85	21.90	21.75	23.00	21.52	21.49	21.47	23.00
3GPP Rel 6	HSDPA Subtest-3	20.94	20.92	20.69	22.00	20.81	20.87	20.75	22.00	20.52	20.49	20.44	22.00
3GPP Rel 6	HSDPA Subtest-4	19.94	19.86	19.69	21.00	19.88	19.95	19.80	21.00	19.26	19.31	19.17	21.00
3GPP Rel 6	HSUPA Subtest-1	19.93	19.86	19.67	21.00	19.87	19.88	19.71	21.00	19.93	19.96	19.88	21.00
3GPP Rel 6	HSUPA Subtest-2	17.73	17.66	17.43	19.00	17.66	17.65	17.58	19.00	17.25	17.24	17.17	19.00
3GPP Rel 6	HSUPA Subtest-3	19.97	19.92	19.72	21.00	19.94	19.89	19.78	21.00	19.30	19.31	19.25	21.00
3GPP Rel 6	HSUPA Subtest-4	17.72	17.71	17.47	19.00	17.66	17.68	17.55	19.00	17.22	17.21	17.16	19.00
3GPP Rel 6	HSUPA Subtest-5	21.60	21.60	21.40	22.50	21.60	21.70	21.50	22.50	21.12	21.30	21.20	22.50

**Bottom antenna**

Band		WCDMA V			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	24.25	24.28	24.30	25.00
3GPP Rel 6	HSDPA Subtest-1	22.38	22.44	22.47	23.30
3GPP Rel 6	HSDPA Subtest-2	22.43	22.47	22.51	23.30
3GPP Rel 6	HSDPA Subtest-3	21.39	21.50	21.47	22.30
3GPP Rel 6	HSDPA Subtest-4	20.18	20.28	20.26	21.30
3GPP Rel 6	HSUPA Subtest-1	20.83	20.89	20.92	21.30
3GPP Rel 6	HSUPA Subtest-2	18.18	18.21	18.19	19.30
3GPP Rel 6	HSUPA Subtest-3	20.23	20.23	20.22	21.30
3GPP Rel 6	HSUPA Subtest-4	18.17	18.19	18.23	19.30
3GPP Rel 6	HSUPA Subtest-5	20.80	20.81	20.30	22.80



**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B17/B26/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/5/17 SAR test was covered by Band 25/66/26/12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



Top antenna

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.42	23.35	23.45		
20	QPSK	1	49	23.40	23.34	23.38	24.5	0
20	QPSK	1	99	23.37	23.30	23.44		
20	QPSK	50	0	22.50	22.44	22.54		
20	QPSK	50	24	22.51	22.43	22.52	23.5	1
20	QPSK	50	50	22.53	22.45	22.55		
20	QPSK	100	0	22.49	22.42	22.51		
20	16QAM	1	0	22.43	22.31	22.46	23.5	1
20	16QAM	1	49	22.41	22.26	22.41		
20	16QAM	1	99	22.36	22.31	22.42		
20	16QAM	50	0	21.50	21.47	21.53	22.5	2
20	16QAM	50	24	21.49	21.45	21.53		
20	16QAM	50	50	21.49	21.43	21.54		
20	16QAM	100	0	21.48	21.44	21.52		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.31	23.32	23.38		
15	QPSK	1	37	23.31	23.32	23.35	24.5	0
15	QPSK	1	74	23.33	23.29	23.39		
15	QPSK	36	0	22.43	22.42	22.45		
15	QPSK	36	20	22.43	22.43	22.45	23.5	1
15	QPSK	36	39	22.41	22.42	22.46		
15	QPSK	75	0	22.43	22.42	22.46		
15	16QAM	1	0	22.34	22.23	22.35	23.5	1
15	16QAM	1	37	22.34	22.24	22.33		
15	16QAM	1	74	22.32	22.27	22.34		
15	16QAM	36	0	21.36	21.41	21.45	22.5	2
15	16QAM	36	20	21.37	21.39	21.42		
15	16QAM	36	39	21.35	21.40	21.45		
15	16QAM	75	0	21.41	21.44	21.48		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.17	23.18	23.22		
10	QPSK	1	25	23.17	23.17	23.23	24.5	0
10	QPSK	1	49	23.16	23.16	23.24		
10	QPSK	25	0	22.24	22.22	22.28		
10	QPSK	25	12	22.24	22.24	22.30	23.5	1
10	QPSK	25	25	22.23	22.22	22.30		
10	QPSK	50	0	22.25	22.23	22.30		
10	16QAM	1	0	22.09	22.22	22.26	23.5	1
10	16QAM	1	25	22.13	22.20	22.22		
10	16QAM	1	49	21.99	22.13	22.14		
10	16QAM	25	0	21.19	21.20	21.24	22.5	2
10	16QAM	25	12	21.19	21.21	21.28		
10	16QAM	25	25	21.18	21.17	21.28		
10	16QAM	50	0	21.25	21.22	21.32		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.34	23.36	23.35		
5	QPSK	1	12	23.31	23.33	23.41	24.5	0



5	QPSK	1	24	23.32	23.36	23.40		
5	QPSK	12	0	22.41	22.41	22.44	23.5	1
5	QPSK	12	7	22.42	22.41	22.45		
5	QPSK	12	13	22.41	22.42	22.45		
5	QPSK	25	0	22.42	22.42	22.45		
5	16QAM	1	0	22.29	22.25	22.16	23.5	1
5	16QAM	1	12	22.30	22.28	22.19		
5	16QAM	1	24	22.29	22.28	22.31		
5	16QAM	12	0	21.38	21.41	21.44	22.5	2
5	16QAM	12	7	21.40	21.41	21.47		
5	16QAM	12	13	21.37	21.41	21.46		
5	16QAM	25	0	21.39	21.42	21.47		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.29	23.21	23.26	24.5	0
3	QPSK	1	8	23.28	23.22	23.24		
3	QPSK	1	14	23.29	23.22	23.26		
3	QPSK	8	0	22.31	22.24	22.29	23.5	1
3	QPSK	8	4	22.32	22.25	22.29		
3	QPSK	8	7	22.31	22.25	22.30		
3	QPSK	15	0	22.32	22.26	22.31		
3	16QAM	1	0	22.27	22.12	22.26	23.5	1
3	16QAM	1	8	22.20	22.16	22.20		
3	16QAM	1	14	22.21	22.21	22.23		
3	16QAM	8	0	21.26	21.24	21.27	22.5	2
3	16QAM	8	4	21.26	21.27	21.29		
3	16QAM	8	7	21.26	21.26	21.32		
3	16QAM	15	0	21.26	21.26	21.30		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.19	23.10	23.21	24.5	0
1.4	QPSK	1	3	23.16	23.13	23.22		
1.4	QPSK	1	5	23.18	23.10	23.21		
1.4	QPSK	3	0	23.26	23.20	23.28		
1.4	QPSK	3	1	23.25	23.21	23.29		
1.4	QPSK	3	3	23.24	23.20	23.30		
1.4	QPSK	6	0	22.24	22.19	22.29	23.5	1
1.4	16QAM	1	0	22.13	22.14	22.21	23.5	1
1.4	16QAM	1	3	22.20	22.17	22.18		
1.4	16QAM	1	5	22.17	22.14	22.08		
1.4	16QAM	3	0	22.04	21.98	22.09		
1.4	16QAM	3	1	22.05	21.94	22.13		
1.4	16QAM	3	3	22.02	21.97	22.14		
1.4	16QAM	6	0	21.17	21.20	21.22		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	24.5	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.43	23.50	23.51		
20	QPSK	1	49	23.46	23.49	23.47	24.5	0
20	QPSK	1	99	23.46	23.48	23.43		
20	QPSK	50	0	22.57	22.59	22.60		
20	QPSK	50	24	22.56	22.59	22.58	23.5	1
20	QPSK	50	50	22.55	22.58	22.56		
20	QPSK	100	0	22.56	22.57	22.56		
20	16QAM	1	0	22.44	22.51	22.47	23.5	1
20	16QAM	1	49	22.41	22.46	22.40		
20	16QAM	1	99	22.42	22.45	22.33		
20	16QAM	50	0	21.55	21.61	21.60	22.5	2
20	16QAM	50	24	21.57	21.60	21.59		
20	16QAM	50	50	21.56	21.59	21.56		
20	16QAM	100	0	21.55	21.56	21.57		
Channel				20025	20175	20325	24.5	0
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.43	23.50	23.50		
15	QPSK	1	37	23.46	23.48	23.50	24.5	0
15	QPSK	1	74	23.45	23.50	23.45		
15	QPSK	36	0	22.55	22.58	22.58		
15	QPSK	36	20	22.55	22.57	22.57	23.5	1
15	QPSK	36	39	22.56	22.56	22.54		
15	QPSK	75	0	22.55	22.57	22.56		
15	16QAM	1	0	22.35	22.43	22.42	23.5	1
15	16QAM	1	37	22.44	22.45	22.41		
15	16QAM	1	74	22.41	22.41	22.29		
15	16QAM	36	0	21.49	21.53	21.54	22.5	2
15	16QAM	36	20	21.49	21.53	21.50		
15	16QAM	36	39	21.49	21.51	21.49		
15	16QAM	75	0	21.56	21.57	21.55		
Channel				20000	20175	20350	24.5	0
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.23	23.28	23.30		
10	QPSK	1	25	23.25	23.28	23.28	24.5	0
10	QPSK	1	49	23.28	23.27	23.25		
10	QPSK	25	0	22.31	22.32	22.34		
10	QPSK	25	12	22.31	22.34	22.32	23.5	1
10	QPSK	25	25	22.33	22.34	22.30		
10	QPSK	50	0	22.33	22.34	22.33		
10	16QAM	1	0	22.29	22.29	22.33	23.5	1
10	16QAM	1	25	22.24	22.22	22.28		
10	16QAM	1	49	22.23	22.21	22.16		
10	16QAM	25	0	21.31	21.31	21.29	22.5	2
10	16QAM	25	12	21.33	21.31	21.29		
10	16QAM	25	25	21.32	21.31	21.28		
10	16QAM	50	0	21.34	21.34	21.32		
Channel				19975	20175	20375	24.5	0
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.48	23.50	23.49		
5	QPSK	1	12	23.48	23.50	23.45	24.5	0
5	QPSK	1	24	23.50	23.49	23.45		



**FCC SAR TEST REPORT**

**Report No. : FA142875**

5	QPSK	12	0	22.52	22.56	22.52	23.5	1
5	QPSK	12	7	22.56	22.55	22.52		
5	QPSK	12	13	22.55	22.55	22.52		
5	QPSK	25	0	22.55	22.56	22.54	23.5	1
5	16QAM	1	0	22.35	22.46	22.40		
5	16QAM	1	12	22.47	22.38	22.40		
5	16QAM	1	24	22.31	22.22	22.36	22.5	2
5	16QAM	12	0	21.53	21.58	21.52		
5	16QAM	12	7	21.54	21.55	21.50		
5	16QAM	12	13	21.53	21.53	21.51		
5	16QAM	25	0	21.49	21.54	21.53	Tune-up limit (dBm)	MPR (dB)
Channel				19965	20175	20385		
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.33	23.38	23.31	24.5	0
3	QPSK	1	8	23.34	23.35	23.30		
3	QPSK	1	14	23.36	23.37	23.30		
3	QPSK	8	0	22.36	22.36	22.30	23.5	1
3	QPSK	8	4	22.36	22.36	22.33		
3	QPSK	8	7	22.36	22.34	22.30		
3	QPSK	15	0	22.36	22.36	22.29		
3	16QAM	1	0	22.27	22.30	22.23	23.5	1
3	16QAM	1	8	22.21	22.25	22.18		
3	16QAM	1	14	22.24	22.22	22.19		
3	16QAM	8	0	21.31	21.35	21.28	22.5	2
3	16QAM	8	4	21.33	21.36	21.27		
3	16QAM	8	7	21.31	21.31	21.24		
3	16QAM	15	0	21.32	21.35	21.27		
Channel				19957	20175	20393		
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.19	23.22	23.22	24.5	0
1.4	QPSK	1	3	23.20	23.23	23.20		
1.4	QPSK	1	5	23.20	23.23	23.19		
1.4	QPSK	3	0	23.27	23.31	23.23		
1.4	QPSK	3	1	23.29	23.30	23.25		
1.4	QPSK	3	3	23.30	23.30	23.26		
1.4	QPSK	6	0	22.29	22.31	22.24	23.5	1
1.4	16QAM	1	0	22.15	22.27	22.21	23.5	1
1.4	16QAM	1	3	22.17	22.17	22.28		
1.4	16QAM	1	5	22.21	22.17	22.26		
1.4	16QAM	3	0	22.06	22.13	22.03		
1.4	16QAM	3	1	22.10	22.16	22.06		
1.4	16QAM	3	3	22.09	22.13	22.06		
1.4	16QAM	6	0	21.32	21.26	21.21		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)		
Channel				20450	20525	20600				
Frequency (MHz)				829	836.5	844				
10	QPSK	1	0	23.25	23.27	23.23	24.5	0		
10	QPSK	1	25	23.21	23.15	23.10				
10	QPSK	1	49	23.19	23.13	23.03				
10	QPSK	25	0	22.28	22.21	22.21	23.5	1		
10	QPSK	25	12	22.28	22.20	22.17				
10	QPSK	25	25	22.27	22.19	22.15				
10	QPSK	50	0	22.27	22.20	22.19	23.5	1		
10	16QAM	1	0	22.03	21.95	22.03				
10	16QAM	1	25	22.02	21.88	21.83				
10	16QAM	1	49	22.00	21.92	21.90	22.5	2		
10	16QAM	25	0	21.23	21.17	21.15				
10	16QAM	25	12	21.21	21.14	21.11				
10	16QAM	25	25	21.19	21.14	21.09	22.5	2		
10	16QAM	50	0	21.24	21.19	21.16				
Channel				20425	20525	20625			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5				
5	QPSK	1	0	23.22	23.25	23.26				
5	QPSK	1	12	23.19	23.23	23.20	24.5	0		
5	QPSK	1	24	23.17	23.20	23.16				
5	QPSK	12	0	22.36	22.30	22.27				
5	QPSK	12	7	22.34	22.28	22.25	23.5	1		
5	QPSK	12	13	22.32	22.27	22.23				
5	QPSK	25	0	22.33	22.29	22.25				
5	16QAM	1	0	22.15	22.02	22.14	23.5	1		
5	16QAM	1	12	22.11	22.05	22.17				
5	16QAM	1	24	22.15	22.07	22.12				
5	16QAM	12	0	21.29	21.26	21.22	22.5	2		
5	16QAM	12	7	21.27	21.27	21.18				
5	16QAM	12	13	21.28	21.26	21.18				
5	16QAM	25	0	21.30	21.26	21.21	22.5	2		
Channel				20415	20525	20635			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5				
3	QPSK	1	0	23.13	23.13	23.01				
3	QPSK	1	8	23.10	23.12	22.97	24.5	0		
3	QPSK	1	14	23.07	23.12	22.95				
3	QPSK	8	0	22.12	22.12	21.99				
3	QPSK	8	4	22.14	22.12	21.97	23.5	1		
3	QPSK	8	7	22.13	22.10	21.97				
3	QPSK	15	0	22.13	22.09	21.98				
3	16QAM	1	0	22.06	22.09	22.01	23.5	1		
3	16QAM	1	8	22.06	22.00	21.99				
3	16QAM	1	14	22.10	22.04	21.90				
3	16QAM	8	0	21.10	21.08	20.95	22.5	2		
3	16QAM	8	4	21.10	21.10	20.96				
3	16QAM	8	7	21.13	21.09	20.94				
3	16QAM	15	0	21.10	21.07	20.94	22.5	2		
Channel				20407	20525	20643			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3				
1.4	QPSK	1	0	23.11	23.03	22.93				
1.4	QPSK	1	3	23.15	23.06	22.93	24.5	0		
1.4	QPSK	1	5	23.15	23.04	22.89				



1.4	QPSK	3	0	23.19	23.09	22.97		
1.4	QPSK	3	1	23.19	23.11	22.97		
1.4	QPSK	3	3	23.21	23.11	22.97		
1.4	QPSK	6	0	22.18	22.08	21.93	23.5	1
1.4	16QAM	1	0	22.16	22.04	21.97	23.5	1
1.4	16QAM	1	3	22.18	21.98	21.92		
1.4	16QAM	1	5	22.15	21.97	21.91		
1.4	16QAM	3	0	22.03	21.91	21.89		
1.4	16QAM	3	1	21.99	21.95	21.84		
1.4	16QAM	3	3	22.01	21.98	21.79		
1.4	16QAM	6	0	21.15	21.12	20.86	22.5	2

**<LTE Band 12>**

Channel	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.67	23.72	23.57	24.8	0
10	QPSK	1	25	23.53	23.60	23.47		
10	QPSK	1	49	23.55	23.62	23.53		
10	QPSK	25	0	22.60	22.66	22.55	23.8	1
10	QPSK	25	12	22.57	22.66	22.57		
10	QPSK	25	25	22.54	22.67	22.58		
10	QPSK	50	0	22.58	22.67	22.59	23.8	1
10	16QAM	1	0	22.31	22.38	22.33		
10	16QAM	1	25	22.36	22.32	22.33		
10	16QAM	1	49	22.33	22.29	22.39	22.8	2
10	16QAM	25	0	21.58	21.63	21.52		
10	16QAM	25	12	21.55	21.63	21.52		
10	16QAM	25	25	21.57	21.63	21.54	22.8	2
10	16QAM	50	0	21.59	21.67	21.58		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.63	23.67	23.60	24.8	0
5	QPSK	1	12	23.61	23.70	23.62		
5	QPSK	1	24	23.60	23.71	23.63		
5	QPSK	12	0	22.64	22.72	22.63	23.8	1
5	QPSK	12	7	22.60	22.74	22.64		
5	QPSK	12	13	22.62	22.74	22.65		
5	QPSK	25	0	22.63	22.74	22.65	23.8	1
5	16QAM	1	0	22.43	22.67	22.49		
5	16QAM	1	12	22.27	22.64	22.57		
5	16QAM	1	24	22.31	22.61	22.54	22.8	2
5	16QAM	12	0	21.63	21.72	21.61		
5	16QAM	12	7	21.63	21.71	21.63		
5	16QAM	12	13	21.61	21.71	21.62	22.8	2
5	16QAM	25	0	21.64	21.73	21.64		
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.44	23.48	23.51	24.8	0
3	QPSK	1	8	23.45	23.45	23.51		
3	QPSK	1	14	23.46	23.48	23.55		
3	QPSK	8	0	22.45	22.47	22.52	23.8	1
3	QPSK	8	4	22.45	22.47	22.54		



3	QPSK	8	7	22.44	22.45	22.53		
3	QPSK	15	0	22.42	22.45	22.53		
3	16QAM	1	0	22.44	22.43	22.48	23.8	1
3	16QAM	1	8	22.38	22.34	22.47		
3	16QAM	1	14	22.40	22.30	22.49		
3	16QAM	8	0	21.36	21.45	21.50	22.8	2
3	16QAM	8	4	21.37	21.45	21.51		
3	16QAM	8	7	21.39	21.42	21.53		
3	16QAM	15	0	21.38	21.42	21.48		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.40	23.36	23.46	24.8	0
1.4	QPSK	1	3	23.41	23.37	23.46		
1.4	QPSK	1	5	23.41	23.38	23.47		
1.4	QPSK	3	0	23.42	23.43	23.50		
1.4	QPSK	3	1	23.43	23.44	23.51		
1.4	QPSK	3	3	23.45	23.46	23.51		
1.4	QPSK	6	0	22.44	22.46	22.50	23.8	1
1.4	16QAM	1	0	22.37	22.36	22.40	23.8	1
1.4	16QAM	1	3	22.36	22.24	22.40		
1.4	16QAM	1	5	22.46	22.31	22.42		
1.4	16QAM	3	0	22.39	22.31	22.33		
1.4	16QAM	3	1	22.30	22.28	22.35		
1.4	16QAM	3	3	22.29	22.32	22.34		
1.4	16QAM	6	0	21.30	21.41	21.41	22.8	2

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Middle Ch. / Freq.			Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	23.65			24.8	0
10	QPSK	1	25	23.44				
10	QPSK	1	49	23.42				
10	QPSK	25	0	22.53			23.8	1
10	QPSK	25	12	22.51				
10	QPSK	25	25	22.50				
10	QPSK	50	0	22.53				
10	16QAM	1	0	22.39			23.8	1
10	16QAM	1	25	22.26				
10	16QAM	1	49	22.26				
10	16QAM	25	0	21.55			22.8	2
10	16QAM	25	12	21.52				
10	16QAM	25	25	21.49				
10	16QAM	50	0	21.58				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.63			24.8	0
5	QPSK	1	12	23.62				
5	QPSK	1	24	23.61				
5	QPSK	12	0	22.69			23.8	1
5	QPSK	12	7	22.65				
5	QPSK	12	13	22.64				
5	QPSK	25	0	22.65				





5	16QAM	1	0	22.51	22.40	22.50	23.8	1
5	16QAM	1	12	22.48	22.40	22.32		
5	16QAM	1	24	22.41	22.33	22.30		
5	16QAM	12	0	21.71	21.61	21.69	22.8	2
5	16QAM	12	7	21.68	21.60	21.68		
5	16QAM	12	13	21.65	21.58	21.68		
5	16QAM	25	0	21.68	21.60	21.67		

**<LTE Band 17>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.50	23.62	23.48	24.8	0
10	QPSK	1	25	23.46	23.50	23.51		
10	QPSK	1	49	23.50	23.52	23.55		
10	QPSK	25	0	22.48	22.57	22.53	23.8	1
10	QPSK	25	12	22.50	22.57	22.54		
10	QPSK	25	25	22.51	22.58	22.55		
10	QPSK	50	0	22.52	22.57	22.53		
10	16QAM	1	0	22.17	22.39	22.39	23.8	1
10	16QAM	1	25	22.27	22.37	22.36		
10	16QAM	1	49	22.26	22.39	22.36		
10	16QAM	25	0	21.47	21.52	21.50	22.8	2
10	16QAM	25	12	21.46	21.51	21.51		
10	16QAM	25	25	21.46	21.54	21.53		
10	16QAM	50	0	21.50	21.53	21.52		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.52	23.43	23.48	24.8	0
5	QPSK	1	12	23.50	23.44	23.50		
5	QPSK	1	24	23.50	23.47	23.51		
5	QPSK	12	0	22.50	22.43	22.50	23.8	1
5	QPSK	12	7	22.50	22.43	22.49		
5	QPSK	12	13	22.50	22.47	22.53		
5	QPSK	25	0	22.51	22.45	22.51		
5	16QAM	1	0	22.35	22.36	22.36	23.8	1
5	16QAM	1	12	22.35	22.36	22.38		
5	16QAM	1	24	22.36	22.36	22.40		
5	16QAM	12	0	21.51	21.44	21.46	22.8	2
5	16QAM	12	7	21.49	21.46	21.46		
5	16QAM	12	13	21.50	21.47	21.46		
5	16QAM	12	13	21.50	21.47	21.46		
5	16QAM	25	0	21.53	21.45	21.45		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.30	23.35	23.36		
20	QPSK	1	49	23.32	23.35	23.34	24.5	0
20	QPSK	1	99	23.31	23.30	22.86		
20	QPSK	50	0	22.45	22.47	22.48		
20	QPSK	50	24	22.44	22.47	22.49	23.5	1
20	QPSK	50	50	22.46	22.48	22.52		
20	QPSK	100	0	22.45	22.45	22.51		
20	16QAM	1	0	22.38	22.40	22.31	23.5	1
20	16QAM	1	49	22.32	22.37	22.36		
20	16QAM	1	99	22.41	22.34	22.34		
20	16QAM	50	0	21.43	21.47	21.49	22.5	2
20	16QAM	50	24	21.41	21.46	21.51		
20	16QAM	50	50	21.43	21.45	21.53		
20	16QAM	100	0	21.44	21.45	21.50		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	23.24	23.33	23.33		
15	QPSK	1	37	23.21	23.32	23.33	24.5	0
15	QPSK	1	74	23.20	23.29	22.79		
15	QPSK	36	0	22.31	22.46	22.43		
15	QPSK	36	20	22.33	22.44	22.46	23.5	1
15	QPSK	36	39	22.32	22.42	22.48		
15	QPSK	75	0	22.32	22.44	22.43		
15	16QAM	1	0	22.17	22.27	22.37	23.5	1
15	16QAM	1	37	22.17	22.33	22.30		
15	16QAM	1	74	22.25	22.32	22.23		
15	16QAM	36	0	21.28	21.41	21.40	22.5	2
15	16QAM	36	20	21.27	21.42	21.40		
15	16QAM	36	39	21.29	21.42	21.41		
15	16QAM	75	0	21.32	21.44	21.44		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	23.13	23.17	23.17		
10	QPSK	1	25	23.11	23.19	23.19	24.5	0
10	QPSK	1	49	23.09	23.18	22.72		
10	QPSK	25	0	22.20	22.27	22.24		
10	QPSK	25	12	22.20	22.27	22.25	23.5	1
10	QPSK	25	25	22.19	22.25	22.28		
10	QPSK	50	0	22.20	22.27	22.28		
10	16QAM	1	0	22.16	22.22	22.14	23.5	1
10	16QAM	1	25	22.05	22.17	22.09		
10	16QAM	1	49	22.01	22.11	22.02		
10	16QAM	25	0	21.15	21.24	21.22	22.5	2
10	16QAM	25	12	21.14	21.24	21.23		
10	16QAM	25	25	21.14	21.23	21.23		
10	16QAM	50	0	21.19	21.28	21.26		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	23.20	23.24	23.31		
5	QPSK	1	12	23.19	23.24	23.05	24.5	0
5	QPSK	1	24	23.17	23.25	22.80		



5	QPSK	12	0	22.27	22.36	22.40	23.5	1
5	QPSK	12	7	22.28	22.37	22.39		
5	QPSK	12	13	22.26	22.34	22.21		
5	QPSK	25	0	22.28	22.37	22.41		
5	16QAM	1	0	22.14	22.28	22.18	23.5	1
5	16QAM	1	12	22.15	22.26	22.22		
5	16QAM	1	24	22.13	22.22	21.82		
5	16QAM	12	0	21.22	21.31	21.34	22.5	2
5	16QAM	12	7	21.22	21.33	21.34		
5	16QAM	12	13	21.22	21.33	21.34		
5	16QAM	25	0	21.21	21.33	21.36		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	23.19	23.28	23.25	24.5	0
3	QPSK	1	8	23.18	23.25	23.23		
3	QPSK	1	14	23.18	23.28	23.08		
3	QPSK	8	0	22.21	22.29	22.27	23.5	1
3	QPSK	8	4	22.23	22.29	22.26		
3	QPSK	8	7	22.21	22.29	22.25		
3	QPSK	15	0	22.21	22.29	22.28		
3	16QAM	1	0	22.10	22.29	22.21	23.5	1
3	16QAM	1	8	22.08	22.24	22.17		
3	16QAM	1	14	22.14	22.20	22.09		
3	16QAM	8	0	21.15	21.28	21.23	22.5	2
3	16QAM	8	4	21.19	21.30	21.24		
3	16QAM	8	7	21.16	21.27	21.24		
3	16QAM	15	0	21.19	21.31	21.24		
Channel				26047	26340	26683		
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	23.02	23.11	22.88	24.5	0
1.4	QPSK	1	3	23.06	23.12	22.76		
1.4	QPSK	1	5	23.04	23.14	22.71		
1.4	QPSK	3	0	23.11	23.23	22.76		
1.4	QPSK	3	1	23.14	23.26	22.70		
1.4	QPSK	3	3	23.12	23.25	22.81		
1.4	QPSK	6	0	22.16	22.23	22.10	23.5	1
1.4	16QAM	1	0	22.01	22.10	22.10	23.5	1
1.4	16QAM	1	3	22.06	22.09	22.11		
1.4	16QAM	1	5	22.07	22.10	22.00		
1.4	16QAM	3	0	21.97	22.09	22.06		
1.4	16QAM	3	1	22.02	22.11	22.05		
1.4	16QAM	3	3	22.04	22.09	21.98		
1.4	16QAM	6	0	21.07	21.19	21.13		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.17	23.20	23.18	24.5	0
15	QPSK	1	37	23.18	23.13	23.13		
15	QPSK	1	74	23.13	23.09	23.04		
15	QPSK	36	0	22.26	22.22	22.26	23.5	1
15	QPSK	36	20	22.24	22.23	22.23		
15	QPSK	36	39	22.21	22.22	22.21		
15	QPSK	75	0	22.22	22.22	22.24	23.5	1
15	16QAM	1	0	22.03	22.04	22.01		
15	16QAM	1	37	21.94	22.01	21.98		
15	16QAM	1	74	21.88	21.98	21.92	22.5	2
15	16QAM	36	0	21.18	21.19	21.19		
15	16QAM	36	20	21.16	21.18	21.16		
15	16QAM	36	39	21.15	21.17	21.16	22.5	2
15	16QAM	75	0	21.18	21.19	21.21		
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844		
Channel				26715	26865	27015		
Frequency (MHz)				816.5	831.5	846.5		
10	QPSK	1	0	23.10	23.02	22.95		
10	QPSK	1	25	23.09	23.01	22.94		
10	QPSK	1	49	23.03	22.97	22.85		
10	QPSK	25	0	22.15	22.06	22.00	23.5	1
10	QPSK	25	12	22.12	22.06	21.98		
10	QPSK	25	25	22.10	22.05	21.94		
10	QPSK	50	0	22.13	22.06	21.98	23.5	1
10	16QAM	1	0	22.07	21.91	21.96		
10	16QAM	1	25	21.90	21.82	21.76		
10	16QAM	1	49	21.88	21.81	21.78	22.5	2
10	16QAM	25	0	21.06	21.02	20.97		
10	16QAM	25	12	21.05	21.00	20.94		
10	16QAM	25	25	21.06	20.99	20.90	22.5	2
10	16QAM	50	0	21.08	21.05	20.98		
Channel				26715	26865	27015		
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.14	23.19	23.14		
5	QPSK	1	12	23.13	23.18	23.11		
5	QPSK	1	24	23.11	23.17	23.06		
5	QPSK	12	0	22.18	22.22	22.18	23.5	1
5	QPSK	12	7	22.18	22.21	22.16		
5	QPSK	12	13	22.17	22.20	22.14		
5	QPSK	25	0	22.19	22.22	22.18	23.5	1
5	16QAM	1	0	22.09	22.10	22.05		
5	16QAM	1	12	21.91	22.09	22.03		
5	16QAM	1	24	21.88	22.11	22.00	22.5	2
5	16QAM	12	0	21.13	21.11	21.12		
5	16QAM	12	7	21.13	21.13	21.10		
5	16QAM	12	13	21.12	21.17	21.09	22.5	2
5	16QAM	12	13	21.12	21.17	21.09		
5	16QAM	25	0	21.14	21.16	21.11		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.09	23.07	23.02		
3	QPSK	1	8	23.10	23.04	22.96		
3	QPSK	1	14	23.10	23.04	22.97		



3	QPSK	8	0	22.11	22.07	21.99	23.5	1
3	QPSK	8	4	22.09	22.08	21.98		
3	QPSK	8	7	22.09	22.07	21.96		
3	QPSK	15	0	22.11	22.09	21.98		
3	16QAM	1	0	22.12	22.01	21.93	23.5	1
3	16QAM	1	8	22.00	21.98	21.91		
3	16QAM	1	14	22.05	21.98	21.89		
3	16QAM	8	0	21.07	21.03	20.94	22.5	2
3	16QAM	8	4	21.07	21.04	20.91		
3	16QAM	8	7	21.07	21.01	20.90		
3	16QAM	15	0	21.06	21.01	20.93		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.03	23.02	22.90	24.5	0
1.4	QPSK	1	3	23.05	23.04	22.89		
1.4	QPSK	1	5	23.06	23.04	22.89		
1.4	QPSK	3	0	23.11	23.08	22.96		
1.4	QPSK	3	1	23.11	23.09	22.98		
1.4	QPSK	3	3	23.12	23.08	22.97		
1.4	QPSK	6	0	22.12	22.07	21.95	23.5	1
1.4	16QAM	1	0	21.94	21.92	22.03	23.5	1
1.4	16QAM	1	3	21.85	21.96	22.02		
1.4	16QAM	1	5	21.90	21.92	21.97		
1.4	16QAM	3	0	21.96	21.96	21.84		
1.4	16QAM	3	1	21.96	21.94	21.83		
1.4	16QAM	3	3	21.99	21.91	21.77		
1.4	16QAM	6	0	21.04	21.00	20.94		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.50	23.56	23.53	24.5	0
20	QPSK	1	49	23.50	23.46	23.44		
20	QPSK	1	99	23.49	23.40	23.41		
20	QPSK	50	0	22.61	22.59	22.59	23.5	1
20	QPSK	50	24	22.59	22.58	22.56		
20	QPSK	50	50	22.60	22.55	22.52		
20	QPSK	100	0	22.60	22.55	22.55	23.5	1
20	16QAM	1	0	22.43	22.48	22.51		
20	16QAM	1	49	22.44	22.46	22.36		
20	16QAM	1	99	22.42	22.37	22.30	22.5	2
20	16QAM	50	0	21.62	21.61	21.62		
20	16QAM	50	24	21.63	21.58	21.60		
20	16QAM	50	50	21.64	21.57	21.59	22.5	2
20	16QAM	100	0	21.61	21.58	21.59		
Channel				132047	132322	132597		
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	23.41	23.44	23.38	24.5	0
15	QPSK	1	37	23.43	23.38	23.32		
15	QPSK	1	74	23.43	23.36	23.30		
15	QPSK	36	0	22.48	22.45	22.43	23.5	1
15	QPSK	36	20	22.49	22.44	22.42		
15	QPSK	36	39	22.49	22.43	22.39		
15	QPSK	75	0	22.49	22.44	22.43	23.5	1
15	16QAM	1	0	22.24	22.33	22.28		
15	16QAM	1	37	22.24	22.27	22.26		
15	16QAM	1	74	22.33	22.27	22.18	22.5	2
15	16QAM	36	0	21.48	21.48	21.44		
15	16QAM	36	20	21.45	21.46	21.40		
15	16QAM	36	39	21.47	21.44	21.40	22.5	2
15	16QAM	75	0	21.50	21.49	21.44		
Channel				132022	132322	132622		
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	23.30	23.29	23.28	24.5	0
10	QPSK	1	25	23.32	23.28	23.25		
10	QPSK	1	49	23.35	23.28	23.24		
10	QPSK	25	0	22.36	22.34	22.31	23.5	1
10	QPSK	25	12	22.37	22.32	22.31		
10	QPSK	25	25	22.36	22.31	22.28		
10	QPSK	50	0	22.38	22.34	22.33	23.5	1
10	16QAM	1	0	22.25	22.21	22.24		
10	16QAM	1	25	22.28	22.14	22.21		
10	16QAM	1	49	22.25	22.08	22.12	22.5	2
10	16QAM	25	0	21.35	21.35	21.31		
10	16QAM	25	12	21.32	21.32	21.31		
10	16QAM	25	25	21.35	21.31	21.27	22.5	2
10	16QAM	50	0	21.39	21.36	21.33		
Channel				131997	132322	132647		
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	23.39	23.44	23.36	24.5	0
5	QPSK	1	12	23.39	23.39	23.34		
5	QPSK	1	24	23.39	23.38	23.34		



**FCC SAR TEST REPORT**

**Report No. : FA142875**

5	QPSK	12	0	22.44	22.44	22.39	23.5	1
5	QPSK	12	7	22.45	22.43	22.40		
5	QPSK	12	13	22.45	22.44	22.37		
5	QPSK	25	0	22.45	22.46	22.40		
5	16QAM	1	0	22.37	22.28	22.24	23.5	1
5	16QAM	1	12	22.33	22.24	22.12		
5	16QAM	1	24	22.35	22.15	22.10		
5	16QAM	12	0	21.43	21.44	21.36	22.5	2
5	16QAM	12	7	21.43	21.43	21.36		
5	16QAM	12	13	21.44	21.43	21.35		
5	16QAM	25	0	21.45	21.42	21.41		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	23.35	23.38	23.36	24.5	0
3	QPSK	1	8	23.36	23.36	23.34		
3	QPSK	1	14	23.38	23.34	23.35		
3	QPSK	8	0	22.37	22.34	22.32	23.5	1
3	QPSK	8	4	22.37	22.34	22.32		
3	QPSK	8	7	22.36	22.33	22.30		
3	QPSK	15	0	22.38	22.35	22.35		
3	16QAM	1	0	22.36	22.32	22.23	23.5	1
3	16QAM	1	8	22.34	22.28	22.24		
3	16QAM	1	14	22.38	22.28	22.21		
3	16QAM	8	0	21.34	21.36	21.30	22.5	2
3	16QAM	8	4	21.37	21.37	21.32		
3	16QAM	8	7	21.36	21.36	21.31		
3	16QAM	15	0	21.34	21.34	21.32		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	23.28	23.23	23.30	24.5	0
1.4	QPSK	1	3	23.26	23.24	23.28		
1.4	QPSK	1	5	23.28	23.23	23.27		
1.4	QPSK	3	0	23.38	23.31	23.32		
1.4	QPSK	3	1	23.38	23.33	23.33		
1.4	QPSK	3	3	23.37	23.35	23.34		
1.4	QPSK	6	0	22.35	22.31	22.30	23.5	1
1.4	16QAM	1	0	22.29	22.24	22.16	23.5	1
1.4	16QAM	1	3	22.27	22.27	22.16		
1.4	16QAM	1	5	22.24	22.23	22.25		
1.4	16QAM	3	0	22.15	22.08	22.12		
1.4	16QAM	3	1	22.19	22.14	22.13		
1.4	16QAM	3	3	22.23	22.17	22.13		
1.4	16QAM	6	0	21.32	21.26	21.32		



<LTE Band 71>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133322	133372		
Frequency (MHz)				673	683	688		
20	QPSK	1	0	23.39	23.41	23.40	24.5	0
20	QPSK	1	49	23.32	23.24	23.30		
20	QPSK	1	99	23.19	23.17	23.28		
20	QPSK	50	0	22.45	22.36	22.44	23.5	1
20	QPSK	50	24	22.38	22.30	22.38		
20	QPSK	50	50	22.32	22.24	22.36		
20	QPSK	100	0	22.37	22.32	22.39	23.5	1
20	16QAM	1	0	22.36	22.28	22.35		
20	16QAM	1	49	22.25	22.14	22.21		
20	16QAM	1	99	22.09	22.04	22.19	22.5	2
20	16QAM	50	0	21.38	21.33	21.38		
20	16QAM	50	24	21.32	21.27	21.38		
20	16QAM	50	50	21.28	21.26	21.35	22.5	2
20	16QAM	100	0	21.31	21.28	21.36		
Channel				133197	133297	133397		
Frequency (MHz)				670.5	680.5	690.5	24.5	0
15	QPSK	1	0	23.34	23.30	23.25		
15	QPSK	1	37	23.30	23.19	23.21		
15	QPSK	1	74	23.20	23.11	23.18	23.5	1
15	QPSK	36	0	22.41	22.33	22.31		
15	QPSK	36	20	22.39	22.30	22.26		
15	QPSK	36	39	22.34	22.27	22.24	23.5	1
15	QPSK	75	0	22.37	22.31	22.25		
15	16QAM	1	0	22.24	22.22	22.09		
15	16QAM	1	37	22.17	22.09	22.05	23.5	1
15	16QAM	1	74	22.06	21.96	21.97		
15	16QAM	36	0	21.35	21.28	21.23		
15	16QAM	36	20	21.30	21.25	21.22	22.5	2
15	16QAM	36	39	21.26	21.18	21.22		
15	16QAM	75	0	21.35	21.25	21.28		
Channel				133172	133272	133422	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				668	678	693	24.5	0
10	QPSK	1	0	23.22	23.21	23.19		
10	QPSK	1	25	23.18	23.15	23.20		
10	QPSK	1	49	23.15	23.11	23.20	23.5	1
10	QPSK	25	0	22.27	22.23	22.21		
10	QPSK	25	12	22.24	22.20	22.19		
10	QPSK	25	25	22.22	22.17	22.22	23.5	1
10	QPSK	50	0	22.26	22.21	22.22		
10	16QAM	1	0	22.17	22.07	22.04		
10	16QAM	1	25	22.11	21.91	22.12	23.5	1
10	16QAM	1	49	22.00	21.94	21.92		
10	16QAM	25	0	21.21	21.17	21.15		
10	16QAM	25	12	21.17	21.10	21.14	22.5	2
10	16QAM	25	25	21.18	21.10	21.12		
10	16QAM	50	0	21.22	21.17	21.17		
Channel				133147	133247	133447	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				665.5	675.5	695.5	24.5	0
5	QPSK	1	0	23.32	23.35	23.30		
5	QPSK	1	12	23.35	23.31	23.30		
5	QPSK	1	24	23.33	23.28	23.30	24.5	0





5	QPSK	12	0	22.46	22.33	22.32	23.5	1
5	QPSK	12	7	22.45	22.32	22.30		
5	QPSK	12	13	22.44	22.30	22.31		
5	QPSK	25	0	22.44	22.31	22.31		
5	16QAM	1	0	22.33	22.03	21.99	23.5	1
5	16QAM	1	12	22.36	22.03	22.19		
5	16QAM	1	24	22.21	22.19	22.17		
5	16QAM	12	0	21.36	21.24	21.25	22.5	2
5	16QAM	12	7	21.36	21.24	21.23		
5	16QAM	12	13	21.36	21.23	21.28		
5	16QAM	25	0	21.39	21.30	21.27		



**Bottom antenna**

**<LTE Band 5>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.96	23.93	23.95	25	0
10	QPSK	1	25	23.97	23.94	23.91		
10	QPSK	1	49	23.52	23.72	23.05		
10	QPSK	25	0	23.03	23.00	23.01	24	1
10	QPSK	25	12	23.04	22.98	22.99		
10	QPSK	25	25	23.01	22.97	22.97		
10	QPSK	50	0	23.03	23.00	23.00	24	1
10	16QAM	1	0	22.87	22.80	22.88		
10	16QAM	1	25	22.83	22.82	22.78		
10	16QAM	1	49	22.84	22.79	22.33	23	2
10	16QAM	25	0	21.95	21.94	21.97		
10	16QAM	25	12	21.95	21.94	21.94		
10	16QAM	25	25	21.93	21.95	21.89	23	2
10	16QAM	50	0	21.96	21.97	21.97		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.96	23.91	23.93	25	0
5	QPSK	1	12	23.88	23.90	23.87		
5	QPSK	1	24	23.94	23.89	23.61		
5	QPSK	12	0	23.03	22.98	22.96	24	1
5	QPSK	12	7	23.02	22.97	22.98		
5	QPSK	12	13	23.00	22.97	22.94		
5	QPSK	25	0	23.02	22.96	22.97	24	1
5	16QAM	1	0	22.70	22.83	22.87		
5	16QAM	1	12	22.74	22.85	22.84		
5	16QAM	1	24	22.70	22.83	22.86	23	2
5	16QAM	12	0	21.97	21.88	21.91		
5	16QAM	12	7	21.96	21.90	21.90		
5	16QAM	12	13	21.96	21.89	21.89	23	2
5	16QAM	25	0	21.92	21.90	21.88		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.91	23.94	23.96	25	0
3	QPSK	1	8	23.91	23.96	23.92		
3	QPSK	1	14	23.91	23.96	23.88		
3	QPSK	8	0	23.03	23.00	23.06	24	1
3	QPSK	8	4	23.03	22.98	23.04		
3	QPSK	8	7	23.01	22.98	23.01		
3	QPSK	15	0	23.02	22.97	23.02	24	1
3	16QAM	1	0	22.96	22.98	23.01		
3	16QAM	1	8	22.93	22.93	22.99		
3	16QAM	1	14	22.85	22.91	22.97	23	2
3	16QAM	8	0	21.97	21.93	21.98		
3	16QAM	8	4	21.96	21.95	21.98		
3	16QAM	8	7	21.97	21.96	21.92	23	2
3	16QAM	15	0	21.97	21.91	21.94		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.88	23.91	23.88	25	0
1.4	QPSK	1	3	23.88	23.92	23.87		



1.4	QPSK	1	5	23.90	23.89	23.89		
1.4	QPSK	3	0	23.94	23.95	23.92		
1.4	QPSK	3	1	23.95	23.91	23.88		
1.4	QPSK	3	3	23.94	23.96	23.96		
1.4	QPSK	6	0	23.03	22.98	22.97	24	1
1.4	16QAM	1	0	22.99	23.01	22.91	24	1
1.4	16QAM	1	3	23.00	23.09	22.87		
1.4	16QAM	1	5	22.96	23.11	22.89		
1.4	16QAM	3	0	22.84	22.86	22.86		
1.4	16QAM	3	1	22.84	22.83	22.86		
1.4	16QAM	3	3	22.81	22.80	22.82		
1.4	16QAM	6	0	22.01	21.92	21.91	23	2

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.84	24.12	24.10	25	0
10	QPSK	1	25	24.14	24.25	24.12		
10	QPSK	1	49	24.12	23.82	23.85		
10	QPSK	25	0	23.18	23.28	23.14	24	1
10	QPSK	25	12	23.17	23.28	23.17		
10	QPSK	25	25	23.18	23.31	23.20		
10	QPSK	50	0	23.17	23.31	23.19		
10	16QAM	1	0	23.10	23.13	23.02	24	1
10	16QAM	1	25	23.05	23.04	22.90		
10	16QAM	1	49	23.01	23.08	23.08		
10	16QAM	25	0	22.18	22.26	22.16	23	2
10	16QAM	25	12	22.15	22.25	22.13		
10	16QAM	25	25	22.12	22.27	22.18		
10	16QAM	50	0	22.16	22.31	22.21		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	24.12	24.21	24.11	25	0
5	QPSK	1	12	24.13	24.19	24.14		
5	QPSK	1	24	24.13	24.21	24.18		
5	QPSK	12	0	23.16	23.25	23.19	24	1
5	QPSK	12	7	23.17	23.25	23.18		
5	QPSK	12	13	23.15	23.23	23.21		
5	QPSK	25	0	23.15	23.24	23.20		
5	16QAM	1	0	23.03	23.17	22.99	24	1
5	16QAM	1	12	23.03	23.12	23.05		
5	16QAM	1	24	23.08	23.09	23.11		
5	16QAM	12	0	22.14	22.19	22.17	23	2
5	16QAM	12	7	22.17	22.22	22.16		
5	16QAM	12	13	22.15	22.22	22.20		
5	16QAM	25	0	22.13	22.22	22.19		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	24.18	24.21	24.21	25	0
3	QPSK	1	8	24.20	24.20	24.21		
3	QPSK	1	14	24.22	24.18	24.23		
3	QPSK	8	0	23.20	23.28	23.22	24	1
3	QPSK	8	4	23.20	23.29	23.24		
3	QPSK	8	7	23.19	23.28	23.24		



3	QPSK	15	0	23.19	23.27	23.23		
3	16QAM	1	0	23.12	23.30	23.19	24	1
3	16QAM	1	8	23.16	23.22	23.20		
3	16QAM	1	14	23.15	23.25	23.20		
3	16QAM	8	0	22.17	22.25	22.19	23	2
3	16QAM	8	4	22.16	22.26	22.21		
3	16QAM	8	7	22.16	22.22	22.23		
3	16QAM	15	0	22.16	22.25	22.24		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.98	24.20	24.18	25	0
1.4	QPSK	1	3	24.07	24.21	24.17		
1.4	QPSK	1	5	24.11	24.19	24.18		
1.4	QPSK	3	0	23.74	24.15	24.15		
1.4	QPSK	3	1	24.18	24.17	24.24		
1.4	QPSK	3	3	24.19	24.21	24.16		
1.4	QPSK	6	0	23.17	23.29	23.26	24	1
1.4	16QAM	1	0	23.00	23.26	23.25	24	1
1.4	16QAM	1	3	23.12	23.25	23.23		
1.4	16QAM	1	5	22.97	23.25	23.19		
1.4	16QAM	3	0	23.08	23.11	23.09		
1.4	16QAM	3	1	23.04	23.12	23.05		
1.4	16QAM	3	3	23.03	23.10	23.04		
1.4	16QAM	6	0	22.18	22.27	22.25	23	2

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Middle Ch. / Freq.			Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	24.14			25	0
10	QPSK	1	25	24.19				
10	QPSK	1	49	24.22				
10	QPSK	25	0	23.30			24	1
10	QPSK	25	12	23.27				
10	QPSK	25	25	23.27				
10	QPSK	50	0	23.30				
10	16QAM	1	0	23.17			24	1
10	16QAM	1	25	23.06				
10	16QAM	1	49	23.12				
10	16QAM	25	0	22.31			23	2
10	16QAM	25	12	22.28				
10	16QAM	25	25	22.28				
10	16QAM	50	0	22.33				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.57	24.18	24.05	25	0
5	QPSK	1	12	24.15	24.15	24.20		
5	QPSK	1	24	23.87	24.17	24.21		
5	QPSK	12	0	23.33	23.24	23.33	24	1
5	QPSK	12	7	23.31	23.22	23.32		
5	QPSK	12	13	23.30	23.23	23.32		
5	QPSK	25	0	23.34	23.26	23.33		
5	16QAM	1	0	22.80	23.05	23.16	24	1
5	16QAM	1	12	23.12	23.04	23.16		
5	16QAM	1	24	23.08	23.04	23.16		



5	16QAM	12	0	22.29	22.21	22.31	23	2
5	16QAM	12	7	22.29	22.23	22.32		
5	16QAM	12	13	22.29	22.24	22.35		
5	16QAM	25	0	22.34	22.26	22.34		

<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	24.13	24.12	24.11	25	0
10	QPSK	1	25	24.14	24.19	24.12		
10	QPSK	1	49	23.71	23.81	23.74		
10	QPSK	25	0	23.16	23.17	23.16	24	1
10	QPSK	25	12	23.17	23.20	23.20		
10	QPSK	25	25	23.18	23.21	23.23		
10	QPSK	50	0	23.17	23.22	23.24	24	1
10	16QAM	1	0	22.99	23.03	22.98		
10	16QAM	1	25	22.91	22.89	23.03		
10	16QAM	1	49	23.00	22.88	23.03	24	1
10	16QAM	25	0	22.14	22.17	22.15		
10	16QAM	25	12	22.12	22.15	22.17		
10	16QAM	25	25	22.15	22.21	22.21	23	2
10	16QAM	50	0	22.16	22.17	22.18		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	24.07	24.14	24.09	25	0
5	QPSK	1	12	24.07	24.14	24.09		
5	QPSK	1	24	24.07	24.18	24.14		
5	QPSK	12	0	23.10	23.15	23.10	24	1
5	QPSK	12	7	23.10	23.16	23.13		
5	QPSK	12	13	23.09	23.15	23.12		
5	QPSK	25	0	23.10	23.16	23.11	24	1
5	16QAM	1	0	22.96	23.04	22.91		
5	16QAM	1	12	22.92	23.03	22.96		
5	16QAM	1	24	22.93	23.07	23.00	24	1
5	16QAM	12	0	22.07	22.10	22.07		
5	16QAM	12	7	22.08	22.13	22.08		
5	16QAM	12	13	22.07	22.13	22.11	23	2
5	16QAM	25	0	22.09	22.13	22.05		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	25	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.98	23.95	23.89		
15	QPSK	1	37	23.94	23.92	23.88	24	1
15	QPSK	1	74	23.92	23.90	23.85		
15	QPSK	36	0	23.05	23.02	22.99		
15	QPSK	36	20	23.04	23.02	22.98	24	1
15	QPSK	36	39	23.02	23.01	22.97		
15	QPSK	75	0	23.05	23.05	22.98		
15	16QAM	1	0	22.82	22.82	22.76	24	1
15	16QAM	1	37	22.80	22.86	22.77		
15	16QAM	1	74	22.81	22.79	22.76		
15	16QAM	36	0	22.00	21.98	21.95	23	2
15	16QAM	36	20	21.98	21.97	21.94		
15	16QAM	36	39	21.98	21.96	21.93		
15	16QAM	75	0	22.03	22.02	21.97		
Channel				26740	26865	26990	25	0
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.92	23.88	23.95		
10	QPSK	1	25	23.93	23.92	23.89	24	1
10	QPSK	1	49	23.92	23.90	23.03		
10	QPSK	25	0	23.00	22.94	22.99		
10	QPSK	25	12	22.98	22.97	22.97	24	1
10	QPSK	25	25	22.97	22.96	22.93		
10	QPSK	50	0	22.98	22.99	22.96		
10	16QAM	1	0	22.76	22.88	22.84	24	1
10	16QAM	1	25	22.70	22.79	22.70		
10	16QAM	1	49	22.71	22.79	22.32		
10	16QAM	25	0	21.97	21.92	21.92	23	2
10	16QAM	25	12	21.95	21.90	21.90		
10	16QAM	25	25	21.95	21.90	21.88		
10	16QAM	50	0	21.96	21.94	21.90		
Channel				26715	26865	27015	25	0
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.90	23.91	23.93		
5	QPSK	1	12	23.86	23.89	23.89	24	1
5	QPSK	1	24	23.89	23.89	23.39		
5	QPSK	12	0	22.98	22.96	22.96		
5	QPSK	12	7	22.96	22.96	22.96	24	1
5	QPSK	12	13	22.95	22.94	22.94		
5	QPSK	25	0	22.95	22.97	22.97		
5	16QAM	1	0	22.79	22.76	22.84	24	1
5	16QAM	1	12	22.81	22.73	22.80		
5	16QAM	1	24	22.81	22.75	22.71		
5	16QAM	12	0	21.88	21.88	21.88	23	2
5	16QAM	12	7	21.90	21.88	21.84		
5	16QAM	12	13	21.89	21.86	21.83		
5	16QAM	25	0	21.91	21.89	21.89		
Channel				26705	26865	27025	25	0
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.92	23.90	23.96		
3	QPSK	1	8	23.95	23.97	23.92	25	0
3	QPSK	1	14	23.97	23.92	23.30		



3	QPSK	8	0	23.01	22.99	22.97	24	1
3	QPSK	8	4	22.99	23.01	22.95		
3	QPSK	8	7	22.99	23.00	22.95		
3	QPSK	15	0	23.00	23.01	22.95		
3	16QAM	1	0	22.95	23.01	22.92	24	1
3	16QAM	1	8	22.93	22.90	22.84		
3	16QAM	1	14	22.91	22.86	22.69		
3	16QAM	8	0	21.91	21.91	21.87	23	2
3	16QAM	8	4	21.93	21.92	21.86		
3	16QAM	8	7	21.93	21.90	21.86		
3	16QAM	15	0	21.93	21.88	21.90		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.95	23.90	23.86	25	0
1.4	QPSK	1	3	23.97	23.90	23.84		
1.4	QPSK	1	5	23.97	23.89	23.70		
1.4	QPSK	3	0	23.94	23.95	23.90		
1.4	QPSK	3	1	23.94	23.96	23.91		
1.4	QPSK	3	3	23.94	23.97	23.74		
1.4	QPSK	6	0	23.05	22.96	22.93	24	1
1.4	16QAM	1	0	23.02	22.98	22.92	24	1
1.4	16QAM	1	3	22.97	22.98	22.83		
1.4	16QAM	1	5	22.97	22.93	22.82		
1.4	16QAM	3	0	22.85	22.75	22.80		
1.4	16QAM	3	1	22.80	22.74	22.83		
1.4	16QAM	3	3	22.83	22.74	22.78		
1.4	16QAM	6	0	22.01	21.95	21.91		



<LTE Band 71>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133322	133372	24.7	0
Frequency (MHz)				673	683	688		
20	QPSK	1	0	22.71	23.89	23.99		
20	QPSK	1	49	23.88	23.77	23.88	23.7	1
20	QPSK	1	99	23.79	23.76	23.89		
20	QPSK	50	0	23.02	22.92	22.99		
20	QPSK	50	24	22.98	22.88	22.95	23.7	1
20	QPSK	50	50	22.89	22.84	22.95		
20	QPSK	100	0	22.95	22.90	22.97		
20	16QAM	1	0	22.12	22.81	22.80	23.7	1
20	16QAM	1	49	22.74	22.73	22.66		
20	16QAM	1	99	22.65	22.71	22.76		
20	16QAM	50	0	21.98	21.92	21.98	22.7	2
20	16QAM	50	24	21.91	21.88	21.96		
20	16QAM	50	50	21.88	21.85	21.94		
20	16QAM	100	0	21.90	21.86	21.93		
Channel				133197	133297	133397	24.7	0
Frequency (MHz)				670.5	680.5	690.5		
15	QPSK	1	0	23.90	23.93	23.91		
15	QPSK	1	37	23.90	23.82	23.83	23.7	1
15	QPSK	1	74	23.83	23.80	23.82		
15	QPSK	36	0	23.02	22.98	22.91		
15	QPSK	36	20	22.99	22.94	22.90	23.7	1
15	QPSK	36	39	22.95	22.88	22.90		
15	QPSK	75	0	22.98	22.94	22.92		
15	16QAM	1	0	22.87	22.81	22.70	23.7	1
15	16QAM	1	37	22.77	22.70	22.68		
15	16QAM	1	74	22.68	22.62	22.71		
15	16QAM	36	0	21.98	21.91	21.89	22.7	2
15	16QAM	36	20	21.96	21.88	21.87		
15	16QAM	36	39	21.90	21.83	21.87		
15	16QAM	75	0	21.97	21.93	21.90		
Channel				133172	133272	133422	24.7	0
Frequency (MHz)				668	678	693		
10	QPSK	1	0	23.52	23.85	23.90		
10	QPSK	1	25	23.93	23.77	23.89	23.7	1
10	QPSK	1	49	23.86	23.75	23.90		
10	QPSK	25	0	22.97	22.87	22.91		
10	QPSK	25	12	22.96	22.86	22.90	23.7	1
10	QPSK	25	25	22.93	22.84	22.90		
10	QPSK	50	0	22.94	22.84	22.92		
10	16QAM	1	0	22.83	22.79	22.82	23.7	1
10	16QAM	1	25	22.84	22.70	22.84		
10	16QAM	1	49	22.70	22.61	22.80		
10	16QAM	25	0	21.92	21.80	21.88	22.7	2
10	16QAM	25	12	21.94	21.81	21.90		
10	16QAM	25	25	21.89	21.81	21.86		
10	16QAM	50	0	21.94	21.84	21.94		
Channel				133147	133247	133447	24.7	0
Frequency (MHz)				665.5	675.5	695.5		
5	QPSK	1	0	23.98	23.78	23.88		
5	QPSK	1	12	23.90	23.76	23.86	24.7	0
5	QPSK	1	24	23.96	23.73	23.88		





**FCC SAR TEST REPORT**

**Report No. : FA142875**

5	QPSK	12	0	23.00	22.83	22.92	23.7	1
5	QPSK	12	7	23.00	22.83	22.91		
5	QPSK	12	13	23.00	22.80	22.91		
5	QPSK	25	0	22.99	22.81	22.91		
5	16QAM	1	0	22.85	22.69	22.74	23.7	1
5	16QAM	1	12	22.78	22.67	22.74		
5	16QAM	1	24	22.77	22.68	22.79		
5	16QAM	12	0	21.88	21.76	21.87	22.7	2
5	16QAM	12	7	21.91	21.75	21.88		
5	16QAM	12	13	21.89	21.71	21.88		
5	16QAM	25	0	21.95	21.78	21.87		



## 12. WiFi/Bluetooth Output Power (Unit: dBm)

**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

### <2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.40	18.50	98.90
		6	2437	18.40	18.50	
		11	2462	18.30	18.50	
	802.11g 6Mbps	1	2412	18.30	18.50	93.10
		6	2437	18.40	18.50	
		11	2462	18.40	18.50	
	802.11n-HT20 MCS0	1	2412	17.50	17.50	92.60
		6	2437	17.20	17.50	
		11	2462	17.30	17.50	




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	20.28	17.00	16.98
	CH 39	2441	20.06	16.98	16.87
	CH 78	2480	20.18	16.90	16.86
Tune-up Limit			20.50	17.00	17.00

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	20.50	20.40
	CH 19	2440	20.40	20.40
	CH 39	2480	20.30	20.00
Tune-up Limit			20.50	20.50

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 77.26% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

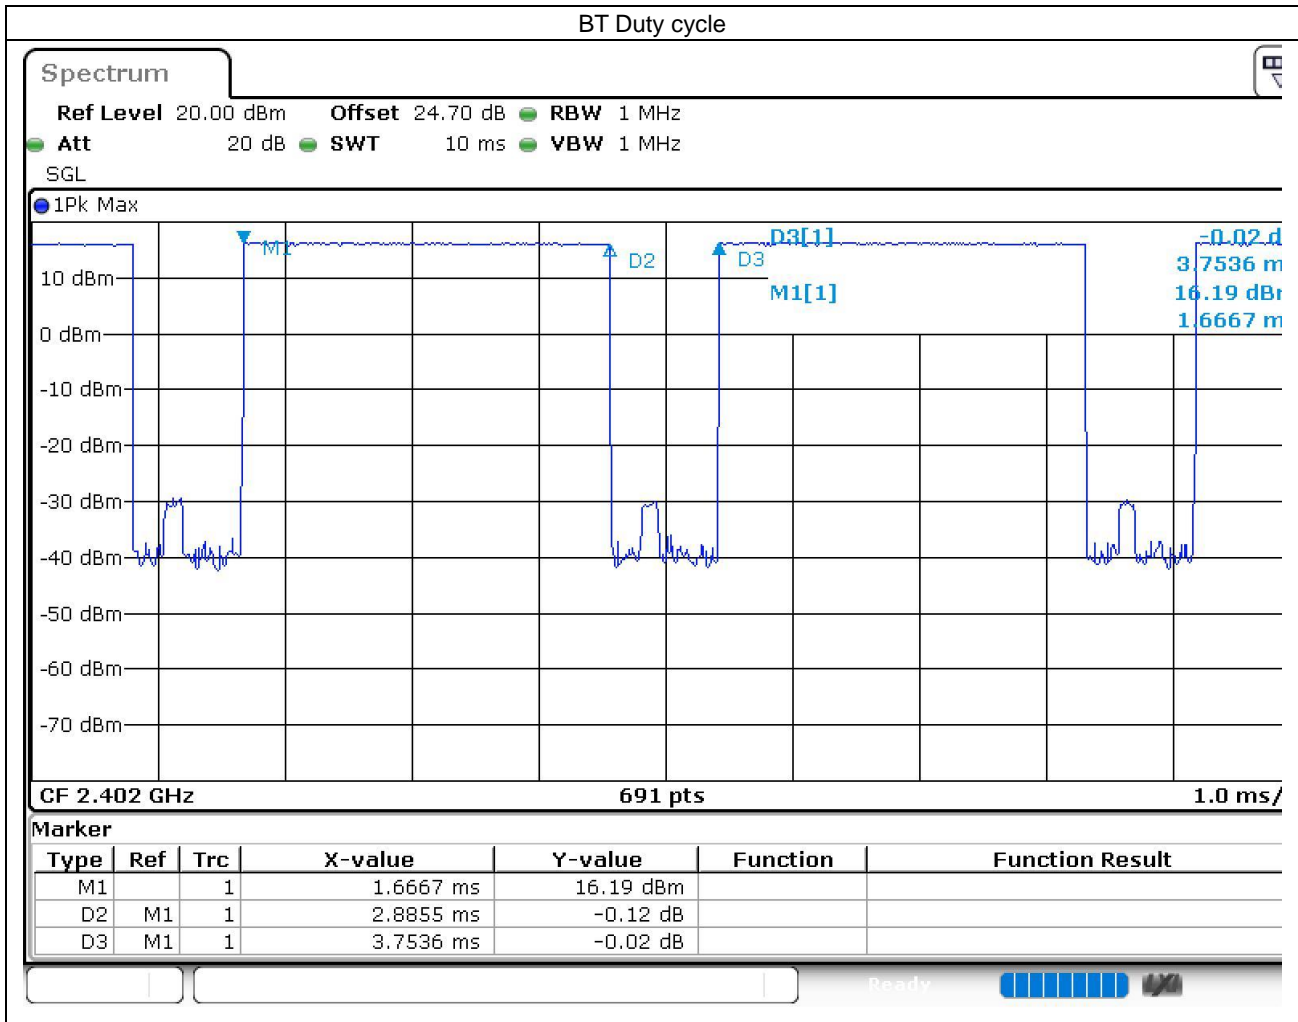



## 13. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.

### UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

### LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B17/B26/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/5/17 SAR test was covered by Band 25/66/26/12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. The maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.



**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



13.1 Head SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Strap	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	Top	Strap 2	9400	1880	23.42	24.50	1.282	0.01	0.113	0.145
	WCDMA II	RMC 12.2Kbps	Front	10mm	Top	Strap 2	9262	1852.4	23.40	24.50	1.288	0.19	0.111	0.143
01	WCDMA II	RMC 12.2Kbps	Front	10mm	Top	Strap 2	9538	1907.6	23.25	24.50	1.334	-0.16	0.123	0.164
	WCDMA II	RMC 12.2Kbps	Front	10mm	Top	Strap 1	9400	1880	23.42	24.50	1.282	-0.05	0.086	0.110
	WCDMA II	RMC 12.2Kbps	Front	10mm	Top	Strap 1	9262	1852.4	23.40	24.50	1.288	0.13	0.088	0.113
	WCDMA II	RMC 12.2Kbps	Front	10mm	Top	Strap 1	9538	1907.6	23.25	24.50	1.334	-0.12	0.089	0.119
	WCDMA II	RMC 12.2Kbps	Front	10mm	Top	Strap 3	9400	1880	23.42	24.50	1.282	0.1	0.089	0.114
	WCDMA II	RMC 12.2Kbps	Front	10mm	Top	Strap 3	9262	1852.4	23.40	24.50	1.288	0.08	0.073	0.094
	WCDMA II	RMC 12.2Kbps	Front	10mm	Top	Strap 3	9538	1907.6	23.25	24.50	1.334	-0.13	0.075	0.100
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Top	Strap 2	1312	1712.4	23.39	24.50	1.291	0.13	0.139	0.179
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Top	Strap 2	1413	1732.6	23.36	24.50	1.300	-0.05	0.132	0.172
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Top	Strap 2	1513	1752.6	23.16	24.50	1.361	-0.12	0.133	0.181
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Top	Strap 1	1312	1712.4	23.39	24.50	1.291	0.07	0.126	0.163
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Top	Strap 1	1413	1732.6	23.36	24.50	1.300	0.19	0.123	0.160
02	WCDMA IV	RMC 12.2Kbps	Front	10mm	Top	Strap 1	1513	1752.6	23.16	24.50	1.361	-0.06	0.135	0.184
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Top	Strap 3	1312	1712.4	23.39	24.50	1.291	-0.04	0.124	0.160
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Top	Strap 3	1413	1732.6	23.36	24.50	1.300	0.03	0.118	0.153
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Top	Strap 3	1513	1752.6	23.16	24.50	1.361	0.02	0.114	0.155
03	WCDMA V	RMC 12.2Kbps	Front	10mm	Top	Strap 2	4233	846.6	23.41	25.00	1.442	-0.01	0.076	0.110
	WCDMA V	RMC 12.2Kbps	Front	10mm	Top	Strap 2	4182	836.4	23.47	25.00	1.422	-0.08	0.060	0.085
	WCDMA V	RMC 12.2Kbps	Front	10mm	Top	Strap 2	4132	826.4	23.43	25.00	1.435	0.05	0.058	0.083
	WCDMA V	RMC 12.2Kbps	Front	10mm	Top	Strap 1	4233	846.6	23.41	25.00	1.442	-0.02	0.065	0.094
	WCDMA V	RMC 12.2Kbps	Front	10mm	Top	Strap 1	4182	836.4	23.47	25.00	1.422	0.1	0.061	0.086
	WCDMA V	RMC 12.2Kbps	Front	10mm	Top	Strap 1	4132	826.4	23.43	25.00	1.435	-0.15	0.051	0.074
	WCDMA V	RMC 12.2Kbps	Front	10mm	Top	Strap 3	4233	846.6	23.41	25.00	1.442	-0.03	0.057	0.082
	WCDMA V	RMC 12.2Kbps	Front	10mm	Top	Strap 3	4182	836.4	23.47	25.00	1.422	-0.05	0.054	0.077
	WCDMA V	RMC 12.2Kbps	Front	10mm	Top	Strap 3	4132	826.4	23.43	25.00	1.435	0.01	0.047	0.067
	WCDMA V	RMC 12.2Kbps	Front	10mm	Bottom	Strap 2	4233	846.6	24.30	25.00	1.175	-0.08	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Front	10mm	Bottom	Strap 2	4132	826.4	24.25	25.00	1.189	-0.02	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Front	10mm	Bottom	Strap 2	4182	836.4	24.28	25.00	1.180	-0.08	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Front	10mm	Bottom	Strap 1	4233	846.6	24.30	25.00	1.175	0.17	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Front	10mm	Bottom	Strap 1	4132	826.4	24.25	25.00	1.189	-0.08	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Front	10mm	Bottom	Strap 1	4182	836.4	24.28	25.00	1.180	-0.15	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Front	10mm	Bottom	Strap 3	4233	846.6	24.30	25.00	1.175	-0.04	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Front	10mm	Bottom	Strap 3	4132	826.4	24.25	25.00	1.189	-0.18	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Front	10mm	Bottom	Strap 3	4182	836.4	24.28	25.00	1.180	0.09	0.001	0.001



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Strap	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	10mm	Top	Strap 2	23095	707.5	23.72	24.80	1.282	-0.03	0.042	0.054
	LTE Band 12	10M	QPSK	25	25	Front	10mm	Top	Strap 2	23095	707.5	22.67	23.80	1.297	-0.05	0.031	0.040
04	LTE Band 12	10M	QPSK	1	0	Front	10mm	Top	Strap 1	23095	707.5	23.72	24.80	1.282	-0.01	0.048	0.062
	LTE Band 12	10M	QPSK	25	25	Front	10mm	Top	Strap 1	23095	707.5	22.67	23.80	1.297	0.02	0.033	0.043
	LTE Band 12	10M	QPSK	1	0	Front	10mm	Top	Strap 3	23095	707.5	23.72	24.80	1.282	0	0.046	0.059
	LTE Band 12	10M	QPSK	25	25	Front	10mm	Top	Strap 3	23095	707.5	22.67	23.80	1.297	0.01	0.032	0.042
	LTE Band 12	10M	QPSK	1	25	Front	10mm	Bottom	Strap 2	23095	707.5	24.25	25.00	1.189	0.11	0.005	0.006
	LTE Band 12	10M	QPSK	25	25	Front	10mm	Bottom	Strap 2	23095	707.5	23.31	24.00	1.172	-0.06	0.004	0.005
	LTE Band 12	10M	QPSK	1	25	Front	10mm	Bottom	Strap 1	23095	707.5	24.25	25.00	1.189	-0.01	0.006	0.007
	LTE Band 12	10M	QPSK	25	25	Front	10mm	Bottom	Strap 1	23095	707.5	23.31	24.00	1.172	-0.12	0.005	0.006
	LTE Band 12	10M	QPSK	1	25	Front	10mm	Bottom	Strap 3	23095	707.5	24.25	25.00	1.189	0.01	0.009	0.011
	LTE Band 12	10M	QPSK	25	25	Front	10mm	Bottom	Strap 3	23095	707.5	23.31	24.00	1.172	0.05	0.007	0.008
	LTE Band 13	10M	QPSK	1	0	Front	10mm	Top	Strap 2	23230	782	23.65	24.80	1.303	0.02	0.058	0.076
	LTE Band 13	10M	QPSK	25	0	Front	10mm	Top	Strap 2	23230	782	22.53	23.80	1.340	0.01	0.043	0.058
05	LTE Band 13	10M	QPSK	1	0	Front	10mm	Top	Strap 1	23230	782	23.65	24.80	1.303	0.02	0.061	0.079
	LTE Band 13	10M	QPSK	25	0	Front	10mm	Top	Strap 1	23230	782	22.53	23.80	1.340	0.03	0.044	0.059
	LTE Band 13	10M	QPSK	1	0	Front	10mm	Top	Strap 3	23230	782	23.65	24.80	1.303	0.03	0.055	0.072
	LTE Band 13	10M	QPSK	25	0	Front	10mm	Top	Strap 3	23230	782	22.53	23.80	1.340	0.01	0.040	0.054
	LTE Band 13	10M	QPSK	1	49	Front	10mm	Bottom	Strap 2	23230	782	24.22	25.00	1.197	0	0.011	0.013
	LTE Band 13	10M	QPSK	25	0	Front	10mm	Bottom	Strap 2	23230	782	23.30	24.00	1.175	0.02	0.010	0.012
	LTE Band 13	10M	QPSK	1	49	Front	10mm	Bottom	Strap 1	23230	782	24.22	25.00	1.197	0.1	0.010	0.012
	LTE Band 13	10M	QPSK	25	0	Front	10mm	Bottom	Strap 1	23230	782	23.30	24.00	1.175	0.04	0.009	0.011
	LTE Band 13	10M	QPSK	1	49	Front	10mm	Bottom	Strap 3	23230	782	24.22	25.00	1.197	-0.16	0.010	0.012
	LTE Band 13	10M	QPSK	25	0	Front	10mm	Bottom	Strap 3	23230	782	23.30	24.00	1.175	-0.08	0.008	0.009
	LTE Band 25	20M	QPSK	1	0	Front	10mm	Top	Strap 2	26590	1905	23.36	24.50	1.300	0	0.216	0.281
06	LTE Band 25	20M	QPSK	1	49	Front	10mm	Top	Strap 2	26140	1860	23.32	24.50	1.312	-0.09	0.216	0.283
	LTE Band 25	20M	QPSK	1	0	Front	10mm	Top	Strap 2	26340	1880	23.35	24.50	1.303	-0.04	0.194	0.253
	LTE Band 25	20M	QPSK	50	50	Front	10mm	Top	Strap 2	26590	1905	22.52	23.50	1.253	-0.1	0.182	0.228
	LTE Band 25	20M	QPSK	1	0	Front	10mm	Top	Strap 1	26590	1905	23.36	24.50	1.300	-0.19	0.105	0.137
	LTE Band 25	20M	QPSK	1	49	Front	10mm	Top	Strap 1	26140	1860	23.32	24.50	1.312	-0.02	0.099	0.130
	LTE Band 25	20M	QPSK	1	0	Front	10mm	Top	Strap 1	26340	1880	23.35	24.50	1.303	0.04	0.092	0.120
	LTE Band 25	20M	QPSK	50	50	Front	10mm	Top	Strap 1	26590	1905	22.52	23.50	1.253	0.04	0.076	0.095
	LTE Band 25	20M	QPSK	1	0	Front	10mm	Top	Strap 3	26590	1905	23.36	24.50	1.300	0.01	0.065	0.085
	LTE Band 25	20M	QPSK	1	49	Front	10mm	Top	Strap 3	26140	1860	23.32	24.50	1.312	-0.05	0.064	0.084
	LTE Band 25	20M	QPSK	1	0	Front	10mm	Top	Strap 3	26340	1880	23.35	24.50	1.303	-0.12	0.067	0.087
	LTE Band 25	20M	QPSK	50	50	Front	10mm	Top	Strap 3	26590	1905	22.52	23.50	1.253	0.11	0.058	0.073
07	LTE Band 26	15M	QPSK	1	0	Front	10mm	Top	Strap 2	26865	831.5	23.20	24.50	1.349	-0.15	0.046	0.062
	LTE Band 26	15M	QPSK	36	20	Front	10mm	Top	Strap 2	26865	831.5	22.23	23.50	1.340	-0.18	0.040	0.054
	LTE Band 26	15M	QPSK	1	0	Front	10mm	Top	Strap 1	26865	831.5	23.20	24.50	1.349	0.05	0.045	0.061
	LTE Band 26	15M	QPSK	36	20	Front	10mm	Top	Strap 1	26865	831.5	22.23	23.50	1.340	0.11	0.040	0.054
	LTE Band 26	15M	QPSK	1	0	Front	10mm	Top	Strap 3	26865	831.5	23.20	24.50	1.349	-0.14	0.045	0.061
	LTE Band 26	15M	QPSK	36	20	Front	10mm	Top	Strap 3	26865	831.5	22.23	23.50	1.340	-0.01	0.039	0.052
	LTE Band 26	15M	QPSK	1	0	Front	10mm	Bottom	Strap 2	26865	831.5	23.95	25.00	1.274	-0.16	0.001	0.001
	LTE Band 26	15M	QPSK	36	20	Front	10mm	Bottom	Strap 2	26865	831.5	23.02	24.00	1.253	0.03	0.001	0.001
	LTE Band 26	15M	QPSK	1	0	Front	10mm	Bottom	Strap 1	26865	831.5	23.95	25.00	1.274	-0.04	0.001	0.001
	LTE Band 26	15M	QPSK	36	20	Front	10mm	Bottom	Strap 1	26865	831.5	23.02	24.00	1.253	-0.17	0.001	0.001
	LTE Band 26	15M	QPSK	1	0	Front	10mm	Bottom	Strap 3	26865	831.5	23.95	25.00	1.274	-0.16	0.001	0.001
	LTE Band 26	15M	QPSK	36	20	Front	10mm	Bottom	Strap 3	26865	831.5	23.02	24.00	1.253	0.06	0.001	0.001



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Strap	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66	20M	QPSK	1	0	Front	10mm	Top	Strap 2	132322	1745	23.56	24.50	1.242	0.07	0.09	0.112
	LTE Band 66	20M	QPSK	1	0	Front	10mm	Top	Strap 2	132072	1720	23.50	24.50	1.259	-0.18	0.106	0.133
	LTE Band 66	20M	QPSK	1	0	Front	10mm	Top	Strap 2	132572	1770	23.53	24.50	1.250	-0.05	0.091	0.114
	LTE Band 66	20M	QPSK	50	0	Front	10mm	Top	Strap 2	132072	1720	22.61	23.50	1.227	-0.19	0.072	0.088
	LTE Band 66	20M	QPSK	1	0	Front	10mm	Top	Strap 1	132322	1745	23.56	24.50	1.242	0.16	0.097	0.120
	LTE Band 66	20M	QPSK	1	0	Front	10mm	Top	Strap 1	132072	1720	23.50	24.50	1.259	-0.11	0.105	0.132
	LTE Band 66	20M	QPSK	1	0	Front	10mm	Top	Strap 1	132572	1770	23.53	24.50	1.250	-0.11	0.102	0.128
	LTE Band 66	20M	QPSK	50	0	Front	10mm	Top	Strap 1	132072	1720	22.61	23.50	1.227	-0.02	0.079	0.097
	LTE Band 66	20M	QPSK	1	0	Front	10mm	Top	Strap 3	132322	1745	23.56	24.50	1.242	0.05	0.099	0.123
08	LTE Band 66	20M	QPSK	1	0	Front	10mm	Top	Strap 3	132072	1720	23.50	24.50	1.259	-0.01	0.108	0.136
	LTE Band 66	20M	QPSK	1	0	Front	10mm	Top	Strap 3	132572	1770	23.53	24.50	1.250	0.08	0.095	0.119
	LTE Band 66	20M	QPSK	50	0	Front	10mm	Top	Strap 3	132072	1720	22.61	23.50	1.227	0.12	0.093	0.114
	LTE Band 71	20M	QPSK	1	0	Front	10mm	Top	Strap 2	133322	683	23.41	24.50	1.285	-0.09	0.030	0.039
	LTE Band 71	20M	QPSK	50	0	Front	10mm	Top	Strap 2	133322	683	22.36	23.50	1.300	-0.02	0.018	0.023
09	LTE Band 71	20M	QPSK	1	0	Front	10mm	Top	Strap 1	133322	683	23.41	24.50	1.285	-0.01	0.032	0.041
	LTE Band 71	20M	QPSK	50	0	Front	10mm	Top	Strap 1	133322	683	22.36	23.50	1.300	0.02	0.020	0.026
	LTE Band 71	20M	QPSK	1	0	Front	10mm	Top	Strap 3	133322	683	23.41	24.50	1.285	-0.02	0.032	0.041
	LTE Band 71	20M	QPSK	50	0	Front	10mm	Top	Strap 3	133322	683	22.36	23.50	1.300	-0.04	0.019	0.025
	LTE Band 71	20M	QPSK	1	0	Front	10mm	Bottom	Strap 2	133322	683	23.89	24.70	1.205	-0.03	0.004	0.005
	LTE Band 71	20M	QPSK	50	0	Front	10mm	Bottom	Strap 2	133322	683	22.92	23.70	1.197	0.02	0.001	0.001
	LTE Band 71	20M	QPSK	1	0	Front	10mm	Bottom	Strap 1	133322	683	23.89	24.70	1.205	-0.07	0.004	0.005
	LTE Band 71	20M	QPSK	50	0	Front	10mm	Bottom	Strap 1	133322	683	22.92	23.70	1.197	0.08	0.001	0.001
	LTE Band 71	20M	QPSK	1	0	Front	10mm	Bottom	Strap 3	133322	683	23.89	24.70	1.205	-0.19	0.004	0.005
	LTE Band 71	20M	QPSK	50	0	Front	10mm	Bottom	Strap 3	133322	683	22.92	23.70	1.197	0.05	0.001	0.001





<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Strap	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Strap 2	1	2412	18.40	18.50	1.023	98.9	1.011	-0.07	0.052	0.054
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Strap 2	6	2437	18.40	18.50	1.023	98.9	1.011	0.13	0.060	0.062
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Strap 2	11	2462	18.30	18.50	1.047	98.9	1.011	-0.18	0.055	0.058
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Strap 1	1	2412	18.40	18.50	1.023	98.9	1.011	0.02	0.049	0.051
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Strap 1	6	2437	18.40	18.50	1.023	98.9	1.011	0.1	0.069	0.071
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Strap 1	11	2462	18.30	18.50	1.047	98.9	1.011	0.12	0.051	0.054
10	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Strap 3	1	2412	18.40	18.50	1.023	98.9	1.011	-0.04	0.071	0.073
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Strap 3	6	2437	18.40	18.50	1.023	98.9	1.011	-0.03	0.042	0.044
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Strap 3	11	2462	18.30	18.50	1.047	98.9	1.011	-0.11	0.042	0.045

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Strap	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Strap 2	0	2402	20.28	20.50	1.052	77.26	1.078	0.02	0.041	0.047
11	Bluetooth	1Mbps	Front	10mm	Strap 2	39	2441	20.06	20.50	1.107	77.26	1.078	-0.08	0.054	0.064
	Bluetooth	1Mbps	Front	10mm	Strap 2	78	2480	20.18	20.50	1.077	77.26	1.078	0.1	0.042	0.049
	Bluetooth	1Mbps	Front	10mm	Strap 1	0	2402	20.28	20.50	1.052	77.26	1.078	-0.11	0.042	0.048
	Bluetooth	1Mbps	Front	10mm	Strap 1	39	2441	20.06	20.50	1.107	77.26	1.078	-0.12	0.038	0.045
	Bluetooth	1Mbps	Front	10mm	Strap 1	78	2480	20.18	20.50	1.077	77.26	1.078	0.09	0.036	0.042
	Bluetooth	1Mbps	Front	10mm	Strap 3	0	2402	20.28	20.50	1.052	77.26	1.078	-0.08	0.038	0.043
	Bluetooth	1Mbps	Front	10mm	Strap 3	39	2441	20.06	20.50	1.107	77.26	1.078	-0.13	0.044	0.053
	Bluetooth	1Mbps	Front	10mm	Strap 3	78	2480	20.18	20.50	1.077	77.26	1.078	-0.18	0.043	0.050



13.2 Hand SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Strap	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Back	0mm	Top	Strap 2	9400	1880	23.42	24.50	1.282	0.15	0.095	0.122
12	WCDMA II	RMC 12.2Kbps	Back	0mm	Top	Strap 2	9262	1852.4	23.40	24.50	1.288	-0.14	0.104	0.134
	WCDMA II	RMC 12.2Kbps	Back	0mm	Top	Strap 2	9538	1907.6	23.25	24.50	1.334	-0.12	0.087	0.116
	WCDMA II	RMC 12.2Kbps	Back	0mm	Top	Strap 1	9400	1880	23.42	24.50	1.282	-0.07	0.097	0.124
	WCDMA II	RMC 12.2Kbps	Back	0mm	Top	Strap 1	9262	1852.4	23.40	24.50	1.288	-0.15	0.083	0.107
	WCDMA II	RMC 12.2Kbps	Back	0mm	Top	Strap 1	9538	1907.6	23.25	24.50	1.334	-0.03	0.071	0.095
	WCDMA II	RMC 12.2Kbps	Back	0mm	Top	Strap 3	9400	1880	23.42	24.50	1.282	-0.17	0.086	0.110
	WCDMA II	RMC 12.2Kbps	Back	0mm	Top	Strap 3	9262	1852.4	23.40	24.50	1.288	-0.15	0.093	0.120
	WCDMA II	RMC 12.2Kbps	Back	0mm	Top	Strap 3	9538	1907.6	23.25	24.50	1.334	-0.19	0.091	0.121
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Top	Strap 2	1312	1712.4	23.39	24.50	1.291	0.16	0.089	0.115
13	WCDMA IV	RMC 12.2Kbps	Back	0mm	Top	Strap 2	1413	1732.6	23.36	24.50	1.300	-0.17	0.096	0.125
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Top	Strap 2	1513	1752.6	23.16	24.50	1.361	-0.1	0.084	0.114
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Top	Strap 1	1312	1712.4	23.39	24.50	1.291	0.06	0.061	0.079
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Top	Strap 1	1413	1732.6	23.36	24.50	1.300	-0.12	0.055	0.072
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Top	Strap 1	1513	1752.6	23.16	24.50	1.361	-0.07	0.05	0.068
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Top	Strap 3	1312	1712.4	23.39	24.50	1.291	0.11	0.09	0.116
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Top	Strap 3	1413	1732.6	23.36	24.50	1.300	0	0.093	0.121
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Top	Strap 3	1513	1752.6	23.16	24.50	1.361	-0.14	0.092	0.125
	WCDMA V	RMC 12.2Kbps	Back	0mm	Top	Strap 2	4182	836.4	23.47	25.00	1.422	0.12	0.019	0.027
	WCDMA V	RMC 12.2Kbps	Back	0mm	Top	Strap 2	4233	846.6	23.41	25.00	1.442	-0.03	0.021	0.030
	WCDMA V	RMC 12.2Kbps	Back	0mm	Top	Strap 2	4132	826.4	23.43	25.00	1.435	-0.11	0.019	0.027
	WCDMA V	RMC 12.2Kbps	Back	0mm	Top	Strap 1	4182	836.4	23.47	25.00	1.422	0.09	0.041	0.058
	WCDMA V	RMC 12.2Kbps	Back	0mm	Top	Strap 1	4233	846.6	23.41	25.00	1.442	-0.05	0.046	0.066
	WCDMA V	RMC 12.2Kbps	Back	0mm	Top	Strap 1	4132	826.4	23.43	25.00	1.435	0.15	0.039	0.056
	WCDMA V	RMC 12.2Kbps	Back	0mm	Top	Strap 3	4182	836.4	23.47	25.00	1.422	-0.07	0.023	0.033
	WCDMA V	RMC 12.2Kbps	Back	0mm	Top	Strap 3	4233	846.6	23.41	25.00	1.442	-0.03	0.025	0.036
	WCDMA V	RMC 12.2Kbps	Back	0mm	Top	Strap 3	4132	826.4	23.43	25.00	1.435	0.16	0.021	0.030
	WCDMA V	RMC 12.2Kbps	Back	0mm	Bottom	Strap 2	4233	846.6	24.30	25.00	1.175	-0.08	0.115	0.135
	WCDMA V	RMC 12.2Kbps	Back	0mm	Bottom	Strap 2	4132	826.4	24.25	25.00	1.189	-0.11	0.123	0.146
	WCDMA V	RMC 12.2Kbps	Back	0mm	Bottom	Strap 2	4182	836.4	24.28	25.00	1.180	-0.07	0.112	0.132
	WCDMA V	RMC 12.2Kbps	Back	0mm	Bottom	Strap 1	4233	846.6	24.30	25.00	1.175	-0.11	0.140	0.164
	WCDMA V	RMC 12.2Kbps	Back	0mm	Bottom	Strap 1	4132	826.4	24.25	25.00	1.189	-0.13	0.145	0.172
14	WCDMA V	RMC 12.2Kbps	Back	0mm	Bottom	Strap 1	4182	836.4	24.28	25.00	1.180	-0.05	0.147	0.174
	WCDMA V	RMC 12.2Kbps	Back	0mm	Bottom	Strap 3	4233	846.6	24.30	25.00	1.175	0.06	0.144	0.169
	WCDMA V	RMC 12.2Kbps	Back	0mm	Bottom	Strap 3	4132	826.4	24.25	25.00	1.189	0.04	0.123	0.146
	WCDMA V	RMC 12.2Kbps	Back	0mm	Bottom	Strap 3	4182	836.4	24.28	25.00	1.180	0	0.103	0.122



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Strap	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Back	0mm	Top	Strap 2	23095	707.5	23.72	24.80	1.282	-0.05	0.012	0.015
	LTE Band 12	10M	QPSK	25	25	Back	0mm	Top	Strap 2	23095	707.5	22.67	23.80	1.297	-0.17	0.006	0.008
	LTE Band 12	10M	QPSK	1	0	Back	0mm	Top	Strap 1	23095	707.5	23.72	24.80	1.282	-0.12	0.011	0.014
	LTE Band 12	10M	QPSK	25	25	Back	0mm	Top	Strap 1	23095	707.5	22.67	23.80	1.297	-0.04	0.009	0.012
	LTE Band 12	10M	QPSK	1	0	Back	0mm	Top	Strap 3	23095	707.5	23.72	24.80	1.282	-0.05	0.009	0.012
	LTE Band 12	10M	QPSK	25	25	Back	0mm	Top	Strap 3	23095	707.5	22.67	23.80	1.297	-0.11	0.008	0.010
	LTE Band 12	10M	QPSK	1	25	Back	0mm	Bottom	Strap 2	23095	707.5	24.25	25.00	1.189	0.09	0.175	0.208
	LTE Band 12	10M	QPSK	25	25	Back	0mm	Bottom	Strap 2	23095	707.5	23.31	24.00	1.172	0.01	0.14	0.164
15	LTE Band 12	10M	QPSK	1	25	Back	0mm	Bottom	Strap 1	23095	707.5	24.25	25.00	1.189	-0.16	0.217	0.258
	LTE Band 12	10M	QPSK	25	25	Back	0mm	Bottom	Strap 1	23095	707.5	23.31	24.00	1.172	-0.11	0.178	0.209
	LTE Band 12	10M	QPSK	1	25	Back	0mm	Bottom	Strap 3	23095	707.5	24.25	25.00	1.189	0.12	0.066	0.078
	LTE Band 12	10M	QPSK	25	25	Back	0mm	Bottom	Strap 3	23095	707.5	23.31	24.00	1.172	0.14	0.06	0.070
	LTE Band 13	10M	QPSK	1	0	Back	0mm	Top	Strap 2	23230	782	23.65	24.80	1.303	-0.09	0.124	0.162
	LTE Band 13	10M	QPSK	25	0	Back	0mm	Top	Strap 2	23230	782	22.53	23.80	1.340	-0.1	0.105	0.141
16	LTE Band 13	10M	QPSK	1	0	Back	0mm	Top	Strap 1	23230	782	23.65	24.80	1.303	-0.05	0.347	0.452
	LTE Band 13	10M	QPSK	25	0	Back	0mm	Top	Strap 1	23230	782	22.53	23.80	1.340	0.09	0.235	0.315
	LTE Band 13	10M	QPSK	1	0	Back	0mm	Top	Strap 3	23230	782	23.65	24.80	1.303	0.19	0.091	0.119
	LTE Band 13	10M	QPSK	25	0	Back	0mm	Top	Strap 3	23230	782	22.53	23.80	1.340	-0.05	0.071	0.095
	LTE Band 13	10M	QPSK	1	49	Back	0mm	Bottom	Strap 2	23230	782	24.22	25.00	1.197	-0.05	0.229	0.274
	LTE Band 13	10M	QPSK	25	0	Back	0mm	Bottom	Strap 2	23230	782	23.30	24.00	1.175	0.11	0.194	0.228
	LTE Band 13	10M	QPSK	1	49	Back	0mm	Bottom	Strap 1	23230	782	24.22	25.00	1.197	0.02	0.328	0.393
	LTE Band 13	10M	QPSK	25	0	Back	0mm	Bottom	Strap 1	23230	782	23.30	24.00	1.175	-0.05	0.277	0.325
	LTE Band 13	10M	QPSK	1	49	Back	0mm	Bottom	Strap 3	23230	782	24.22	25.00	1.197	-0.15	0.101	0.121
	LTE Band 13	10M	QPSK	25	0	Back	0mm	Bottom	Strap 3	23230	782	23.30	24.00	1.175	0.07	0.065	0.076
	LTE Band 25	20M	QPSK	1	0	Back	0mm	Top	Strap 2	26590	1905	23.36	24.50	1.300	-0.18	0.056	0.073
	LTE Band 25	20M	QPSK	1	49	Back	0mm	Top	Strap 2	26140	1860	23.32	24.50	1.312	0.06	0.050	0.066
	LTE Band 25	20M	QPSK	1	0	Back	0mm	Top	Strap 2	26340	1880	23.35	24.50	1.303	-0.1	0.042	0.055
	LTE Band 25	20M	QPSK	50	50	Back	0mm	Top	Strap 2	26590	1905	22.52	23.50	1.253	0	0.037	0.046
	LTE Band 25	20M	QPSK	1	0	Back	0mm	Top	Strap 1	26590	1905	23.36	24.50	1.300	0.09	0.090	0.117
	LTE Band 25	20M	QPSK	1	49	Back	0mm	Top	Strap 1	26140	1860	23.32	24.50	1.312	0.05	0.073	0.096
	LTE Band 25	20M	QPSK	1	0	Back	0mm	Top	Strap 1	26340	1880	23.35	24.50	1.303	-0.15	0.071	0.093
	LTE Band 25	20M	QPSK	50	50	Back	0mm	Top	Strap 1	26590	1905	22.52	23.50	1.253	0.06	0.067	0.084
	LTE Band 25	20M	QPSK	1	0	Back	0mm	Top	Strap 3	26590	1905	23.36	24.50	1.300	-0.09	0.087	0.113
17	LTE Band 25	20M	QPSK	1	49	Back	0mm	Top	Strap 3	26140	1860	23.32	24.50	1.312	-0.15	0.096	0.126
	LTE Band 25	20M	QPSK	1	0	Back	0mm	Top	Strap 3	26340	1880	23.35	24.50	1.303	0.03	0.073	0.095
	LTE Band 25	20M	QPSK	50	50	Back	0mm	Top	Strap 3	26590	1905	22.52	23.50	1.253	-0.13	0.079	0.099
	LTE Band 26	15M	QPSK	1	0	Back	0mm	Top	Strap 2	26865	831.5	23.20	24.50	1.349	-0.15	0.017	0.023
	LTE Band 26	15M	QPSK	36	20	Back	0mm	Top	Strap 2	26865	831.5	22.23	23.50	1.340	0.04	0.016	0.021
	LTE Band 26	15M	QPSK	1	0	Back	0mm	Top	Strap 1	26865	831.5	23.20	24.50	1.349	-0.01	0.014	0.019
	LTE Band 26	15M	QPSK	36	20	Back	0mm	Top	Strap 1	26865	831.5	22.23	23.50	1.340	-0.04	0.011	0.015
	LTE Band 26	15M	QPSK	1	0	Back	0mm	Top	Strap 3	26865	831.5	23.20	24.50	1.349	-0.11	0.008	0.011
	LTE Band 26	15M	QPSK	36	20	Back	0mm	Top	Strap 3	26865	831.5	22.23	23.50	1.340	-0.15	0.007	0.009
	LTE Band 26	15M	QPSK	1	0	Back	0mm	Bottom	Strap 2	26865	831.5	23.95	25.00	1.274	-0.05	0.100	0.127
	LTE Band 26	15M	QPSK	36	20	Back	0mm	Bottom	Strap 2	26865	831.5	23.02	24.00	1.253	0.15	0.079	0.099
18	LTE Band 26	15M	QPSK	1	0	Back	0mm	Bottom	Strap 1	26865	831.5	23.95	25.00	1.274	-0.11	0.146	0.186
	LTE Band 26	15M	QPSK	36	20	Back	0mm	Bottom	Strap 1	26865	831.5	23.02	24.00	1.253	-0.12	0.118	0.148
	LTE Band 26	15M	QPSK	1	0	Back	0mm	Bottom	Strap 3	26865	831.5	23.95	25.00	1.274	0.02	0.068	0.087
	LTE Band 26	15M	QPSK	36	20	Back	0mm	Bottom	Strap 3	26865	831.5	23.02	24.00	1.253	-0.11	0.056	0.070



**FCC SAR TEST REPORT**

**Report No. : FA142875**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Strap	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Top	Strap 2	132322	1745	23.56	24.50	1.242	-0.07	0.067	0.083
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Top	Strap 2	132072	1720	23.50	24.50	1.259	0.13	0.059	0.074
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Top	Strap 2	132572	1770	23.53	24.50	1.250	0.05	0.063	0.079
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Top	Strap 2	132072	1720	22.61	23.50	1.227	-0.11	0.049	0.060
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Top	Strap 1	132322	1745	23.56	24.50	1.242	0.01	0.135	0.168
19	LTE Band 66	20M	QPSK	1	0	Back	0mm	Top	Strap 1	132072	1720	23.50	24.50	1.259	-0.04	0.139	0.175
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Top	Strap 1	132572	1770	23.53	24.50	1.250	0	0.127	0.159
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Top	Strap 1	132072	1720	22.61	23.50	1.227	-0.03	0.117	0.144
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Top	Strap 3	132322	1745	23.56	24.50	1.242	-0.04	0.085	0.106
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Top	Strap 3	132072	1720	23.50	24.50	1.259	0.05	0.078	0.098
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Top	Strap 3	132572	1770	23.53	24.50	1.250	-0.01	0.093	0.116
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Top	Strap 3	132072	1720	22.61	23.50	1.227	0.03	0.063	0.077
	LTE Band 71	10M	QPSK	1	0	Back	0mm	Top	Strap 2	133322	683	23.41	24.50	1.285	-0.06	0.007	0.009
	LTE Band 71	20M	QPSK	50	0	Back	0mm	Top	Strap 2	133322	683	22.36	23.50	1.300	-0.1	0.006	0.008
	LTE Band 71	10M	QPSK	1	0	Back	0mm	Top	Strap 1	133322	683	23.41	24.50	1.285	-0.05	0.010	0.013
	LTE Band 71	20M	QPSK	50	0	Back	0mm	Top	Strap 1	133322	683	22.36	23.50	1.300	-0.15	0.009	0.012
	LTE Band 71	10M	QPSK	1	0	Back	0mm	Top	Strap 3	133322	683	23.41	24.50	1.285	-0.1	0.007	0.009
	LTE Band 71	20M	QPSK	50	0	Back	0mm	Top	Strap 3	133322	683	22.36	23.50	1.300	0.12	0.005	0.007
	LTE Band 71	20M	QPSK	1	0	Back	0mm	Bottom	Strap 2	133322	683	23.89	24.70	1.205	-0.02	0.069	0.083
	LTE Band 71	20M	QPSK	50	0	Back	0mm	Bottom	Strap 2	133322	683	22.92	23.70	1.197	-0.1	0.058	0.069
20	LTE Band 71	20M	QPSK	1	0	Back	0mm	Bottom	Strap 1	133322	683	23.89	24.70	1.205	-0.17	0.128	0.154
	LTE Band 71	20M	QPSK	50	0	Back	0mm	Bottom	Strap 1	133322	683	22.92	23.70	1.197	0.06	0.109	0.130
	LTE Band 71	20M	QPSK	1	0	Back	0mm	Bottom	Strap 3	133322	683	23.89	24.70	1.205	0.01	0.035	0.042
	LTE Band 71	20M	QPSK	50	0	Back	0mm	Bottom	Strap 3	133322	683	22.92	23.70	1.197	-0.12	0.025	0.030



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Strap	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Strap 2	1	2412	18.40	18.50	1.023	98.9	1.011	0.11	0.010	0.010
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Strap 2	6	2437	18.40	18.50	1.023	98.9	1.011	-0.01	0.010	0.010
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Strap 2	11	2462	18.30	18.50	1.047	98.9	1.011	-0.08	0.011	0.012
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Strap 1	1	2412	18.40	18.50	1.023	98.9	1.011	-0.11	0.023	0.024
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Strap 1	6	2437	18.40	18.50	1.023	98.9	1.011	-0.15	0.019	0.020
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Strap 1	11	2462	18.30	18.50	1.047	98.9	1.011	0.09	0.017	0.018
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Strap 3	1	2412	18.40	18.50	1.023	98.9	1.011	0.1	0.040	0.041
21	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Strap 3	6	2437	18.40	18.50	1.023	98.9	1.011	-0.06	0.054	0.056
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Strap 3	11	2462	18.30	18.50	1.047	98.9	1.011	-0.01	0.043	0.046

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Strap	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	Bluetooth	1Mbps	Back	0mm	Strap 2	0	2402	20.28	20.50	1.052	77.26	1.078	-0.02	0.017	0.019
	Bluetooth	1Mbps	Back	0mm	Strap 2	39	2441	20.06	20.50	1.107	77.26	1.078	0.06	0.008	0.010
	Bluetooth	1Mbps	Back	0mm	Strap 2	78	2480	20.18	20.50	1.077	77.26	1.078	0.01	0.01	0.012
	Bluetooth	1Mbps	Back	0mm	Strap 1	0	2402	20.28	20.50	1.052	77.26	1.078	-0.18	0.015	0.017
	Bluetooth	1Mbps	Back	0mm	Strap 1	39	2441	20.06	20.50	1.107	77.26	1.078	-0.05	0.008	0.010
	Bluetooth	1Mbps	Back	0mm	Strap 1	78	2480	20.18	20.50	1.077	77.26	1.078	0.1	0.009	0.010
22	Bluetooth	1Mbps	Back	0mm	Strap 3	0	2402	20.28	20.50	1.052	77.26	1.078	-0.14	0.045	0.051
	Bluetooth	1Mbps	Back	0mm	Strap 3	39	2441	20.06	20.50	1.107	77.26	1.078	0.08	0.016	0.019
	Bluetooth	1Mbps	Back	0mm	Strap 3	78	2480	20.18	20.50	1.077	77.26	1.078	-0.04	0.017	0.020



14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Head	Hand
1.	WWAN + WLAN2.4GHz	Yes	Yes
2.	WWAN + Bluetooth	Yes	Yes

General Note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

14.1 Head Exposure Conditions

Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
	Maximum WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
Front	0.283	0.073	0.064	0.356	0.347

14.2 Hand Exposure Conditions

Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)
	Maximum WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	Bluetooth 10g SAR (W/kg)		
Back	0.452	0.056	0.051	0.508	0.503

Test Engineer : Kells Chen, Kevin Guo and Shane Song



## **15. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## **16. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [8] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [9] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [10] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.