




Appendix B

Peak Output Power


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 0.04dBm, RBW: 5MHz

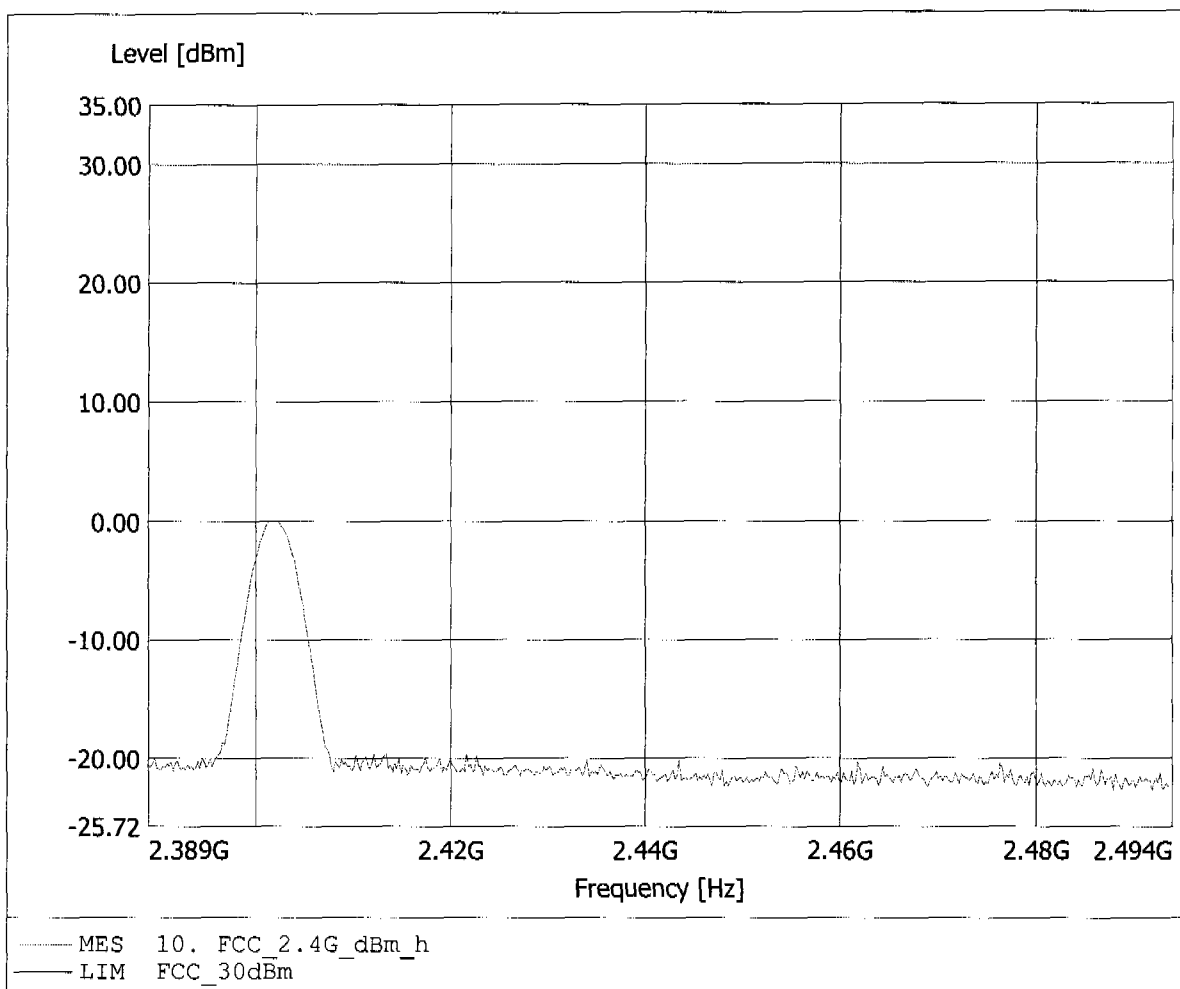


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -3.95dBm, RBW: 5MHz

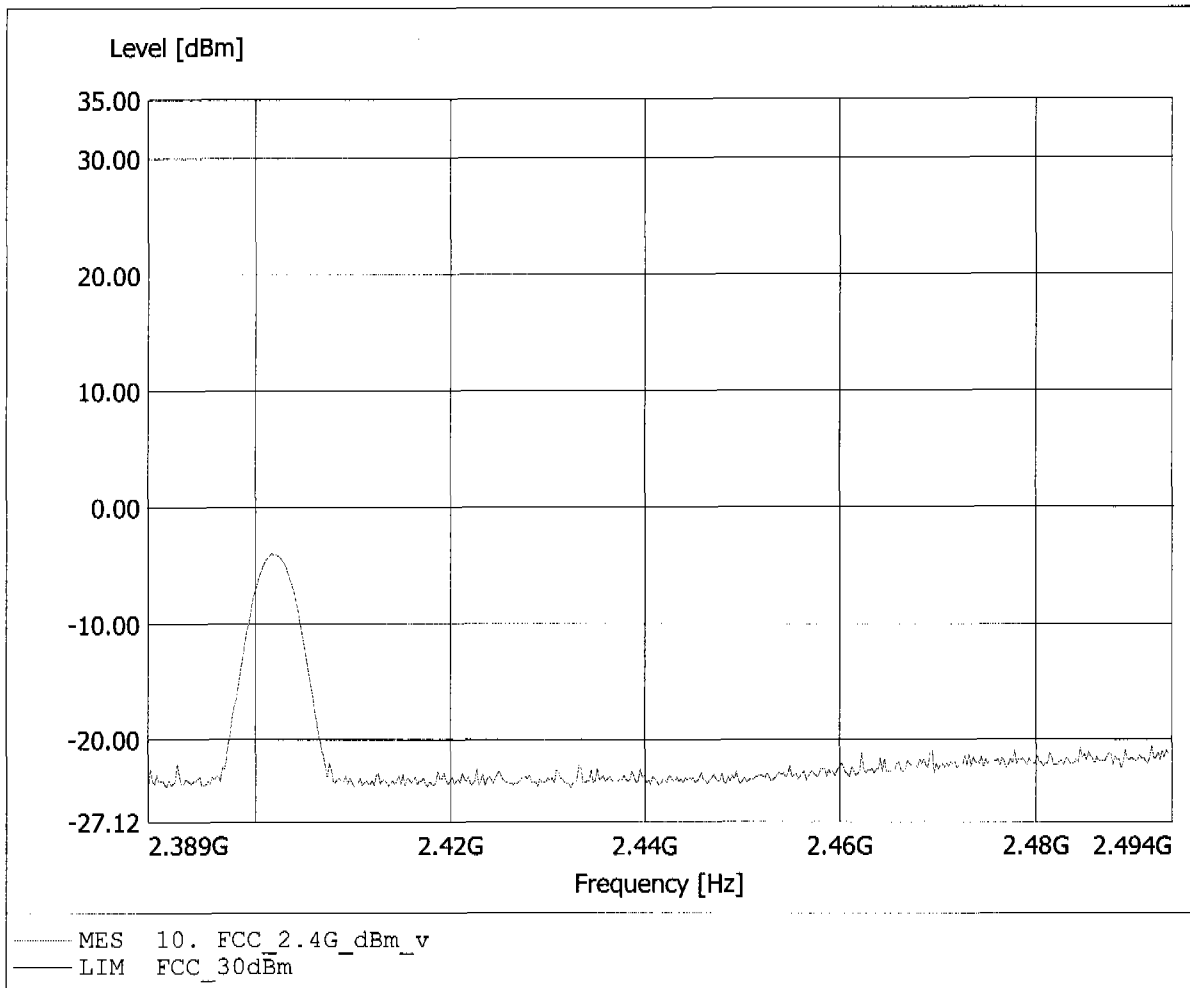


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.39dBm, RBW: 5MHz

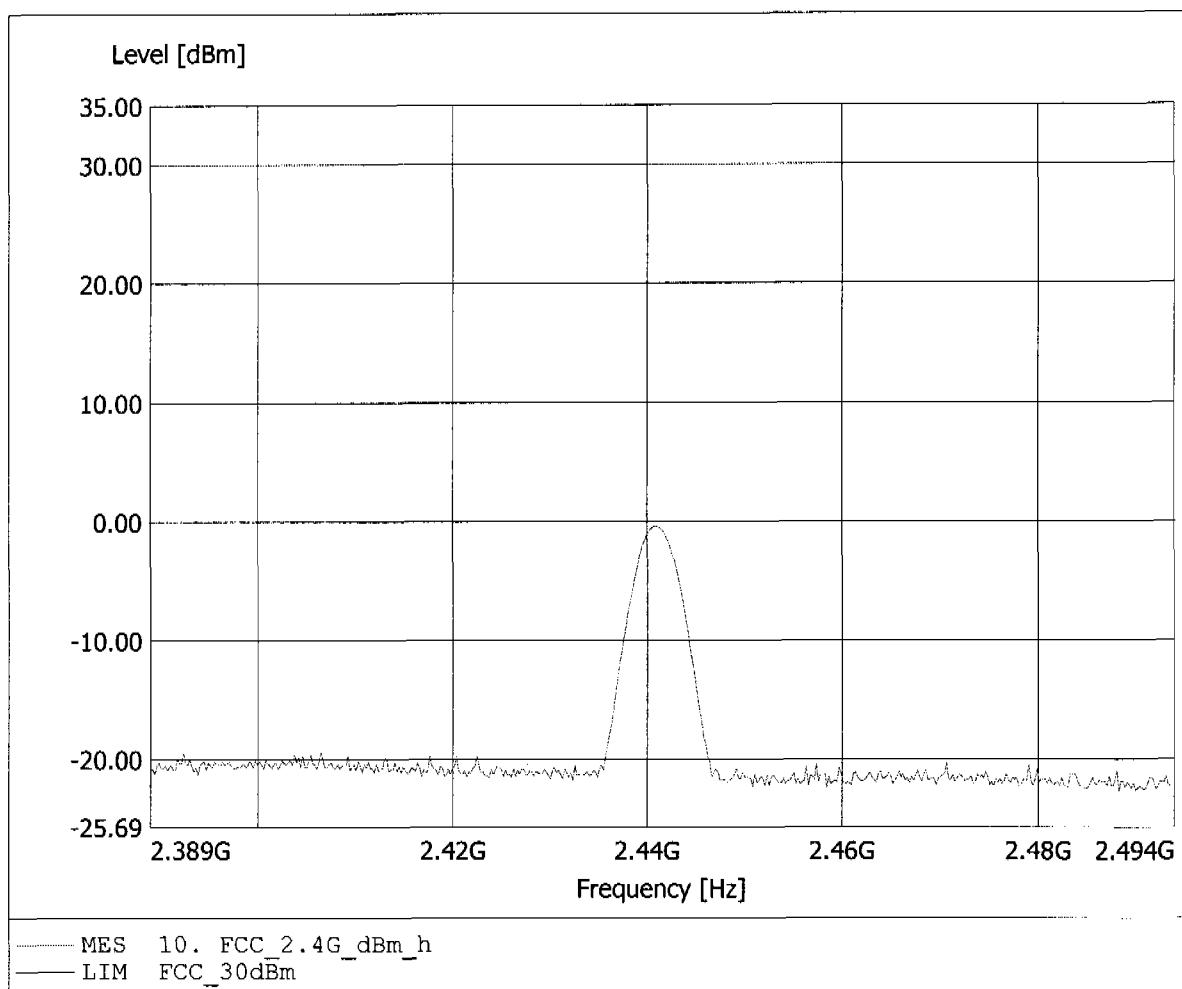


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: TX 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -4.50dBm, RBW: 5MHz

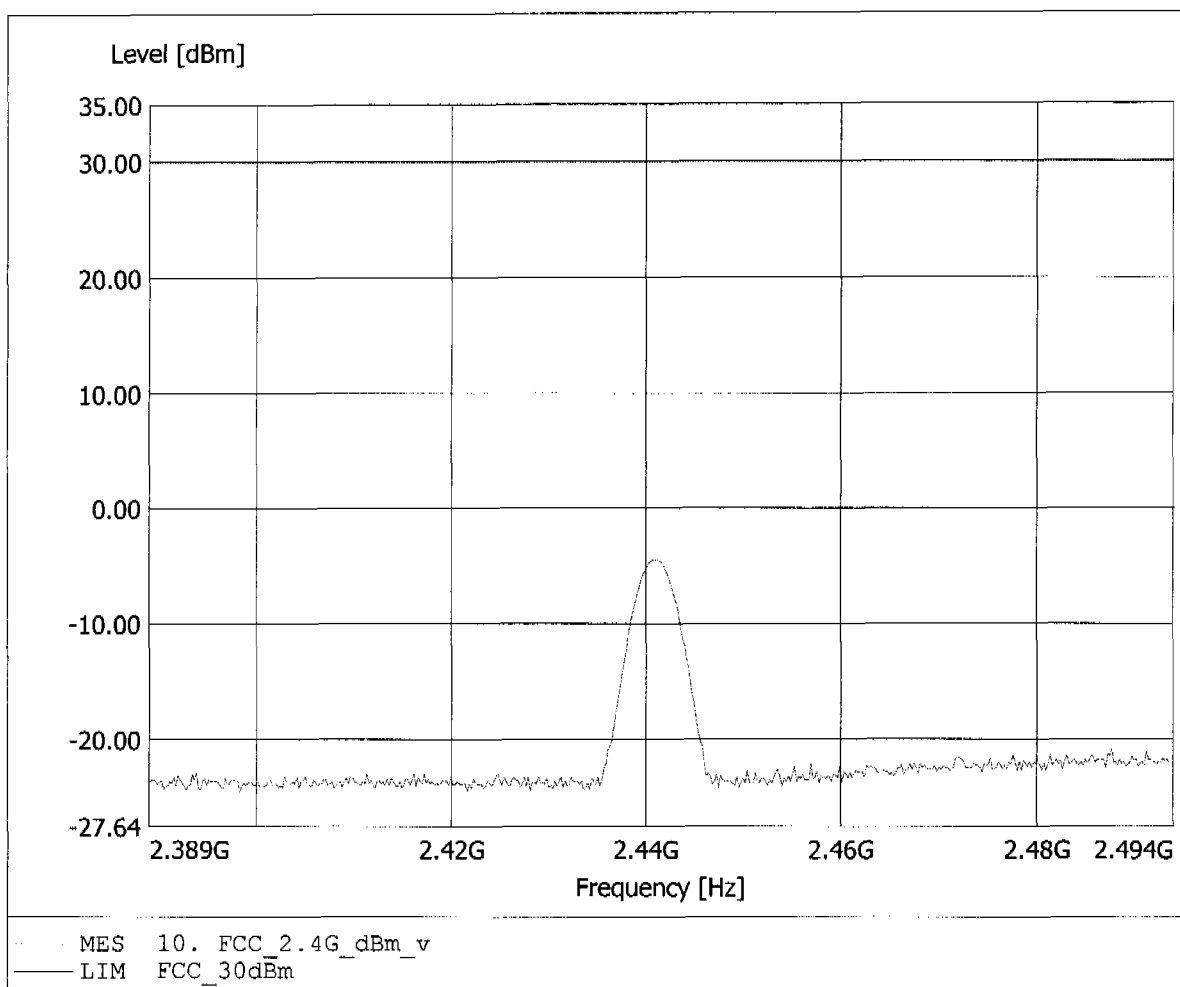


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -3.40dBm, RBW: 5MHz

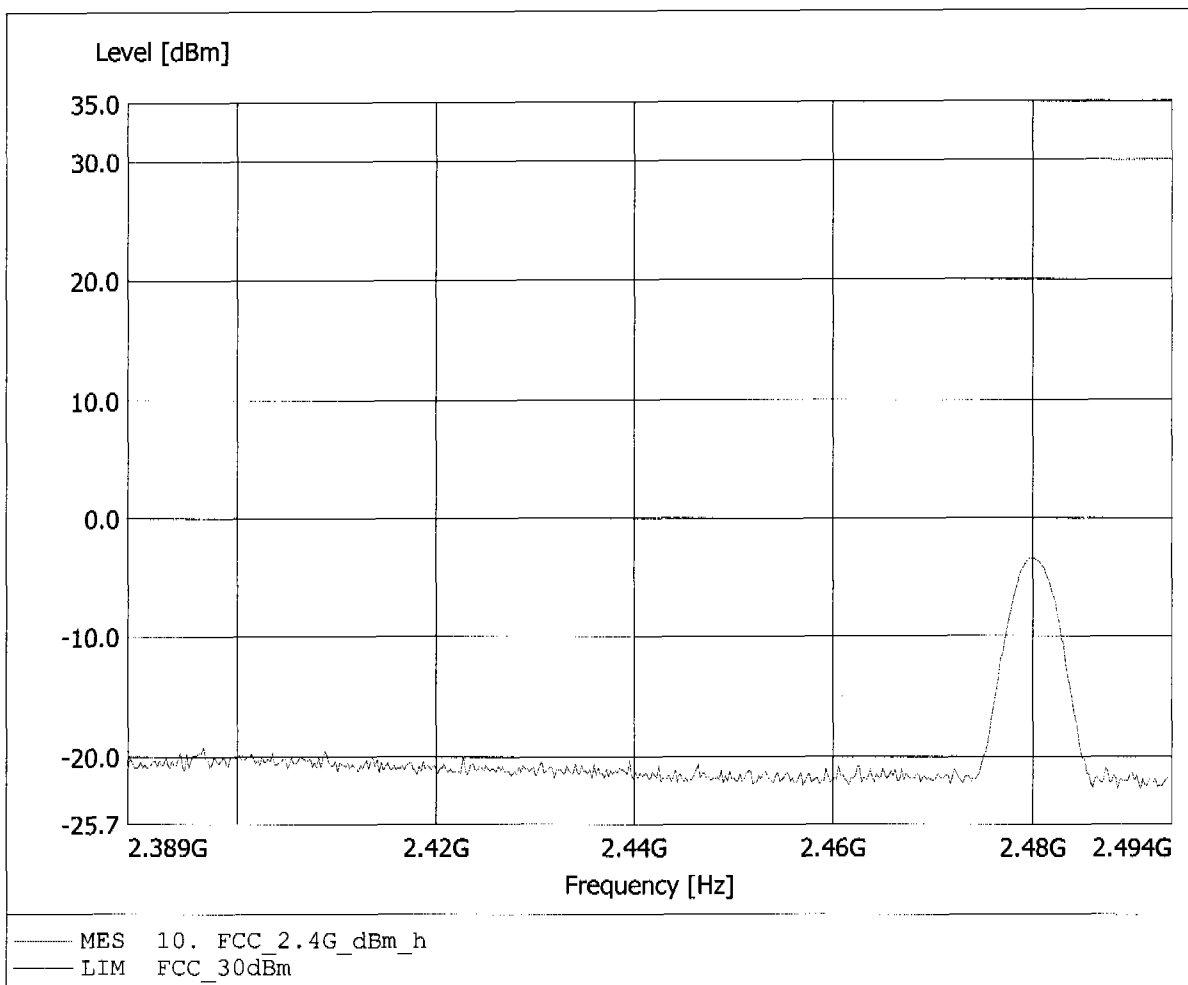

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: TX 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -2.89dBm, RBW: 5MHz

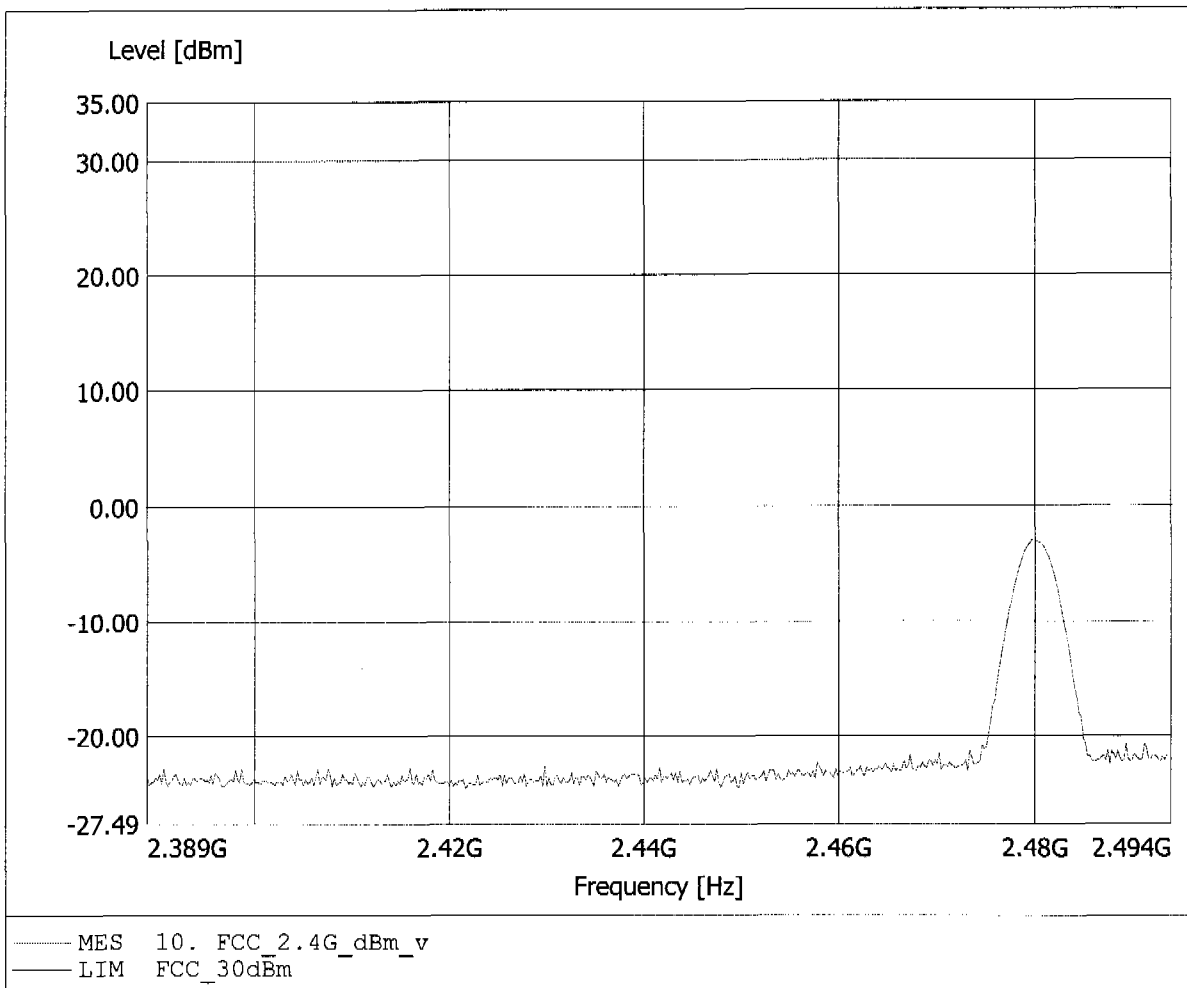




Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 91.49dBµV/m, RBW: 100kHz

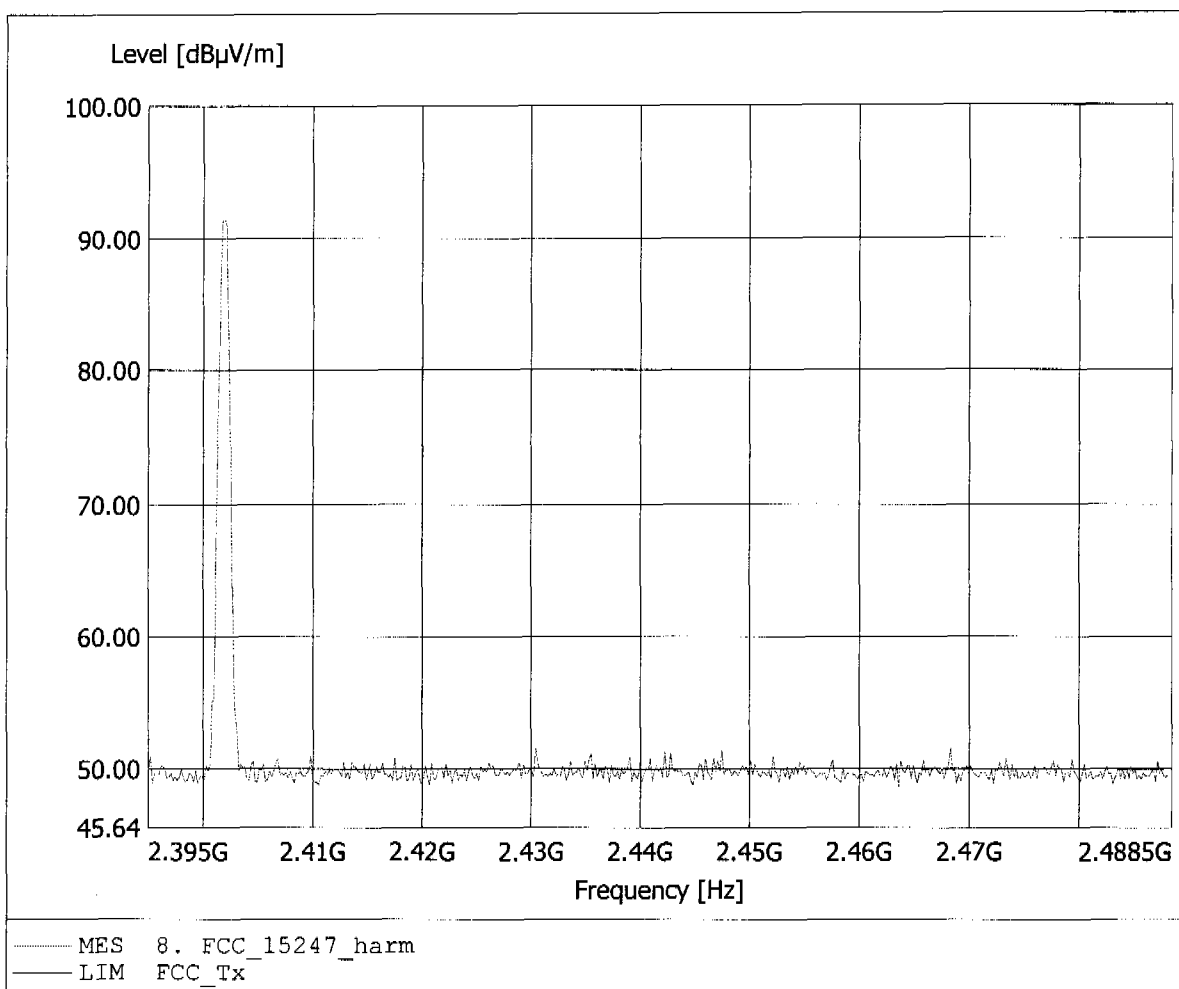


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 188.417MHz, Emax: 32.60dBµV/m, RBW: 100kHz

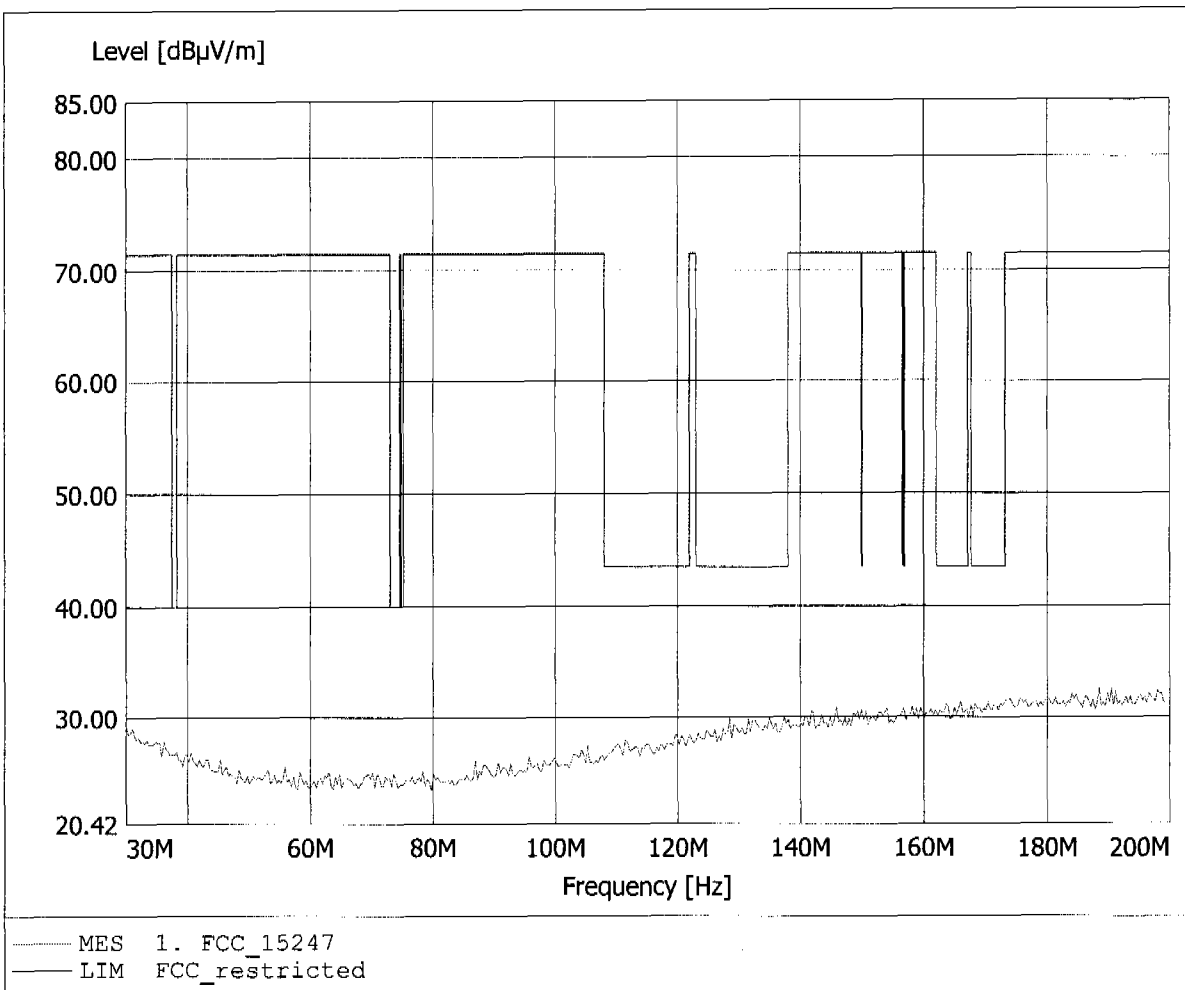


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.000MHz, Emax: 33.22dBµV/m, RBW: 100kHz

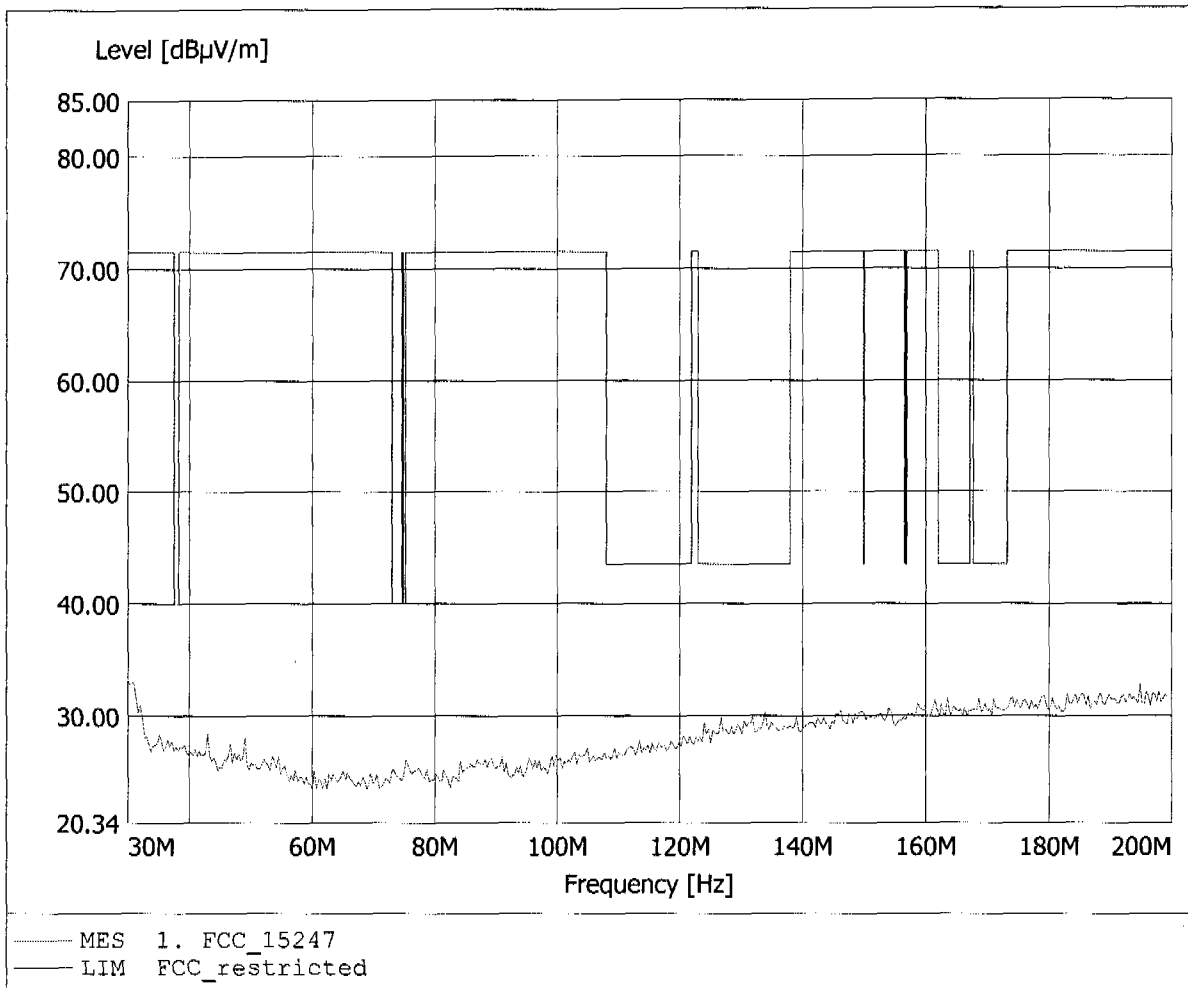


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.373MHz, Emax: 32.62dBµV/m, RBW: 100kHz

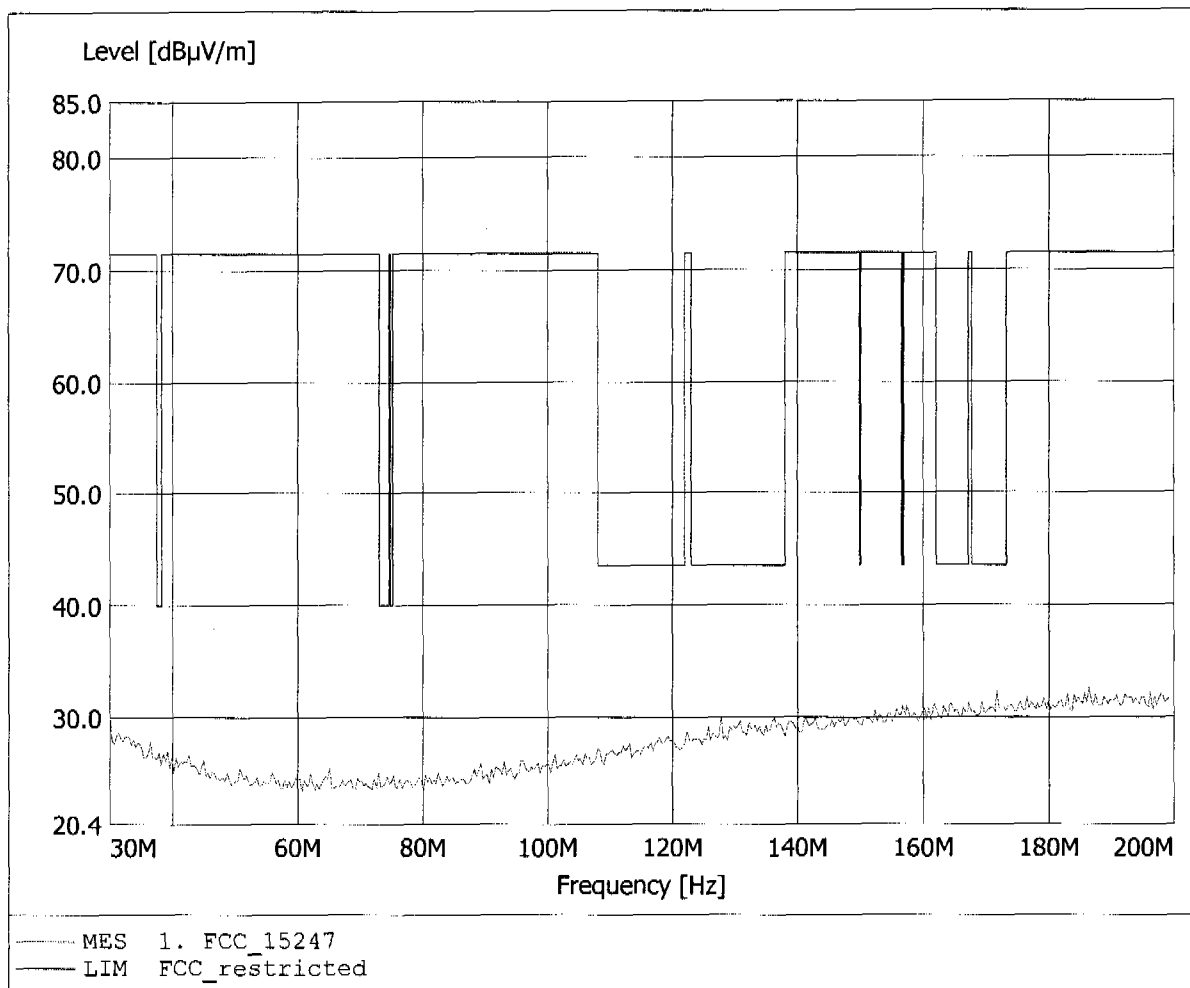


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.439MHz, Emax: 33.34dBµV/m, RBW: 100kHz

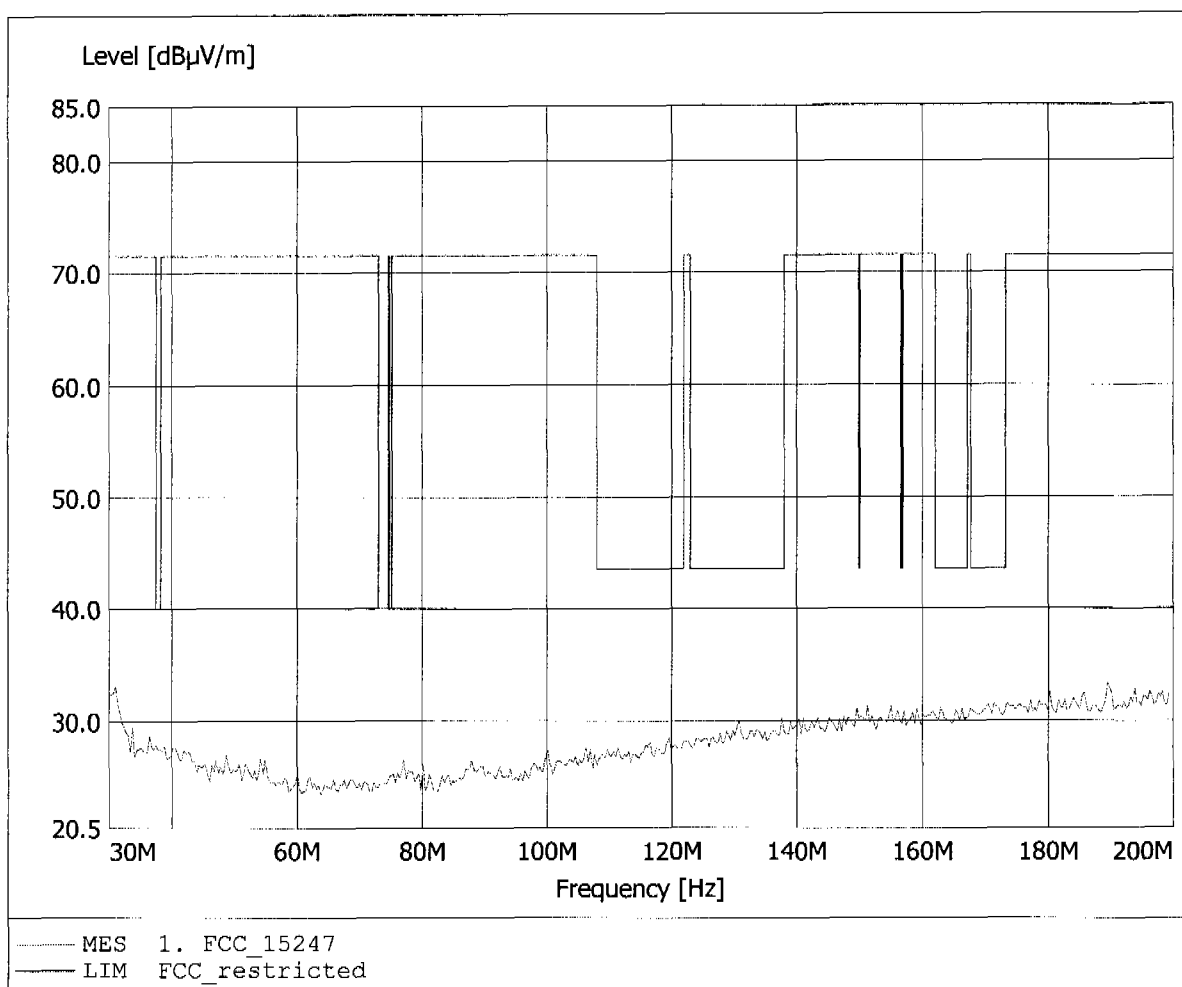


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 181.263MHz, Emax: 32.56dBµV/m, RBW: 100kHz

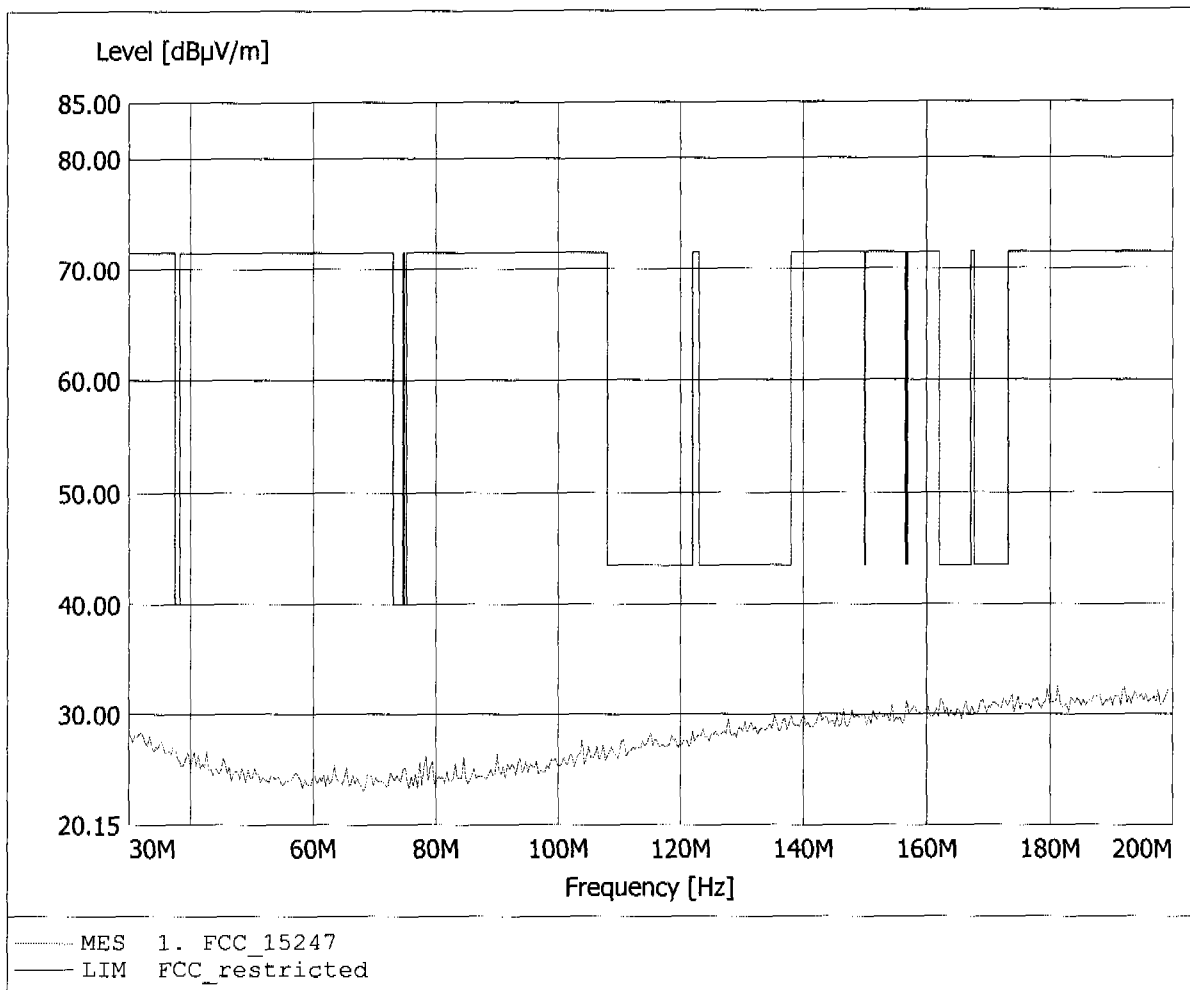


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 31.022MHz, Emax: 33.37dBµV/m, RBW: 100kHz

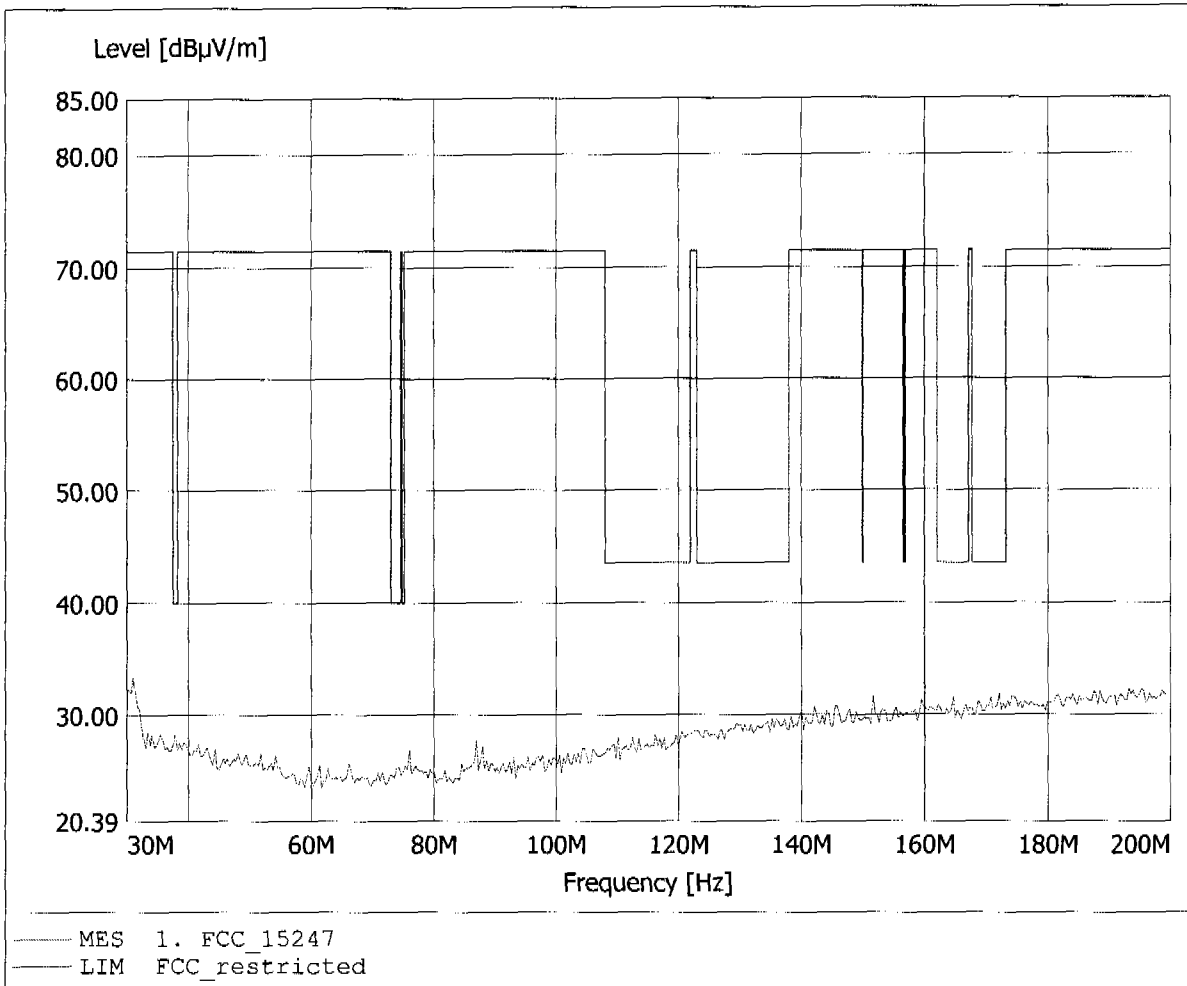


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 732.265MHz, Emax: 24.78dBµV/m, RBW: 100kHz

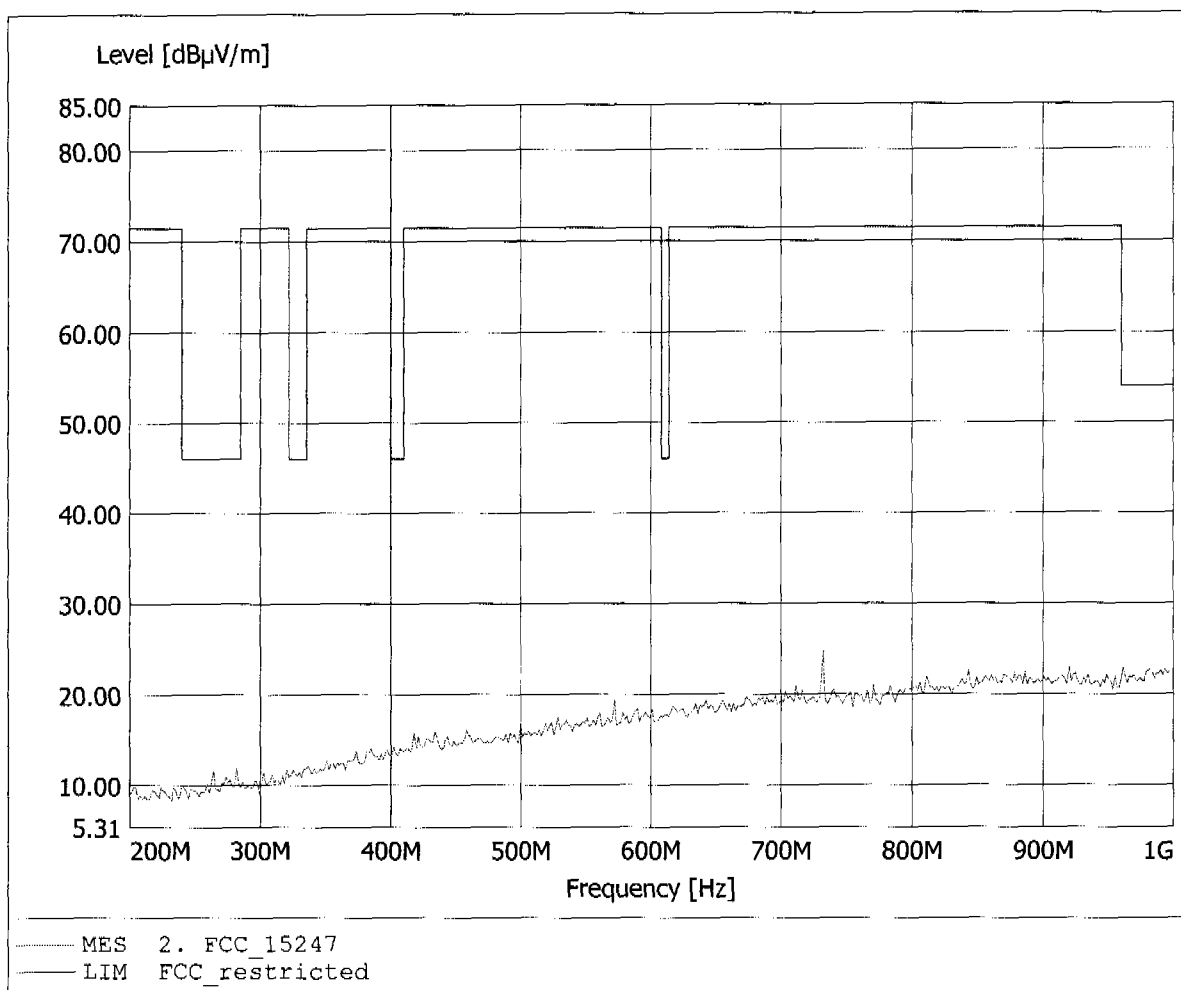


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 860.521MHz, Emax: 23.14dBµV/m, RBW: 100kHz

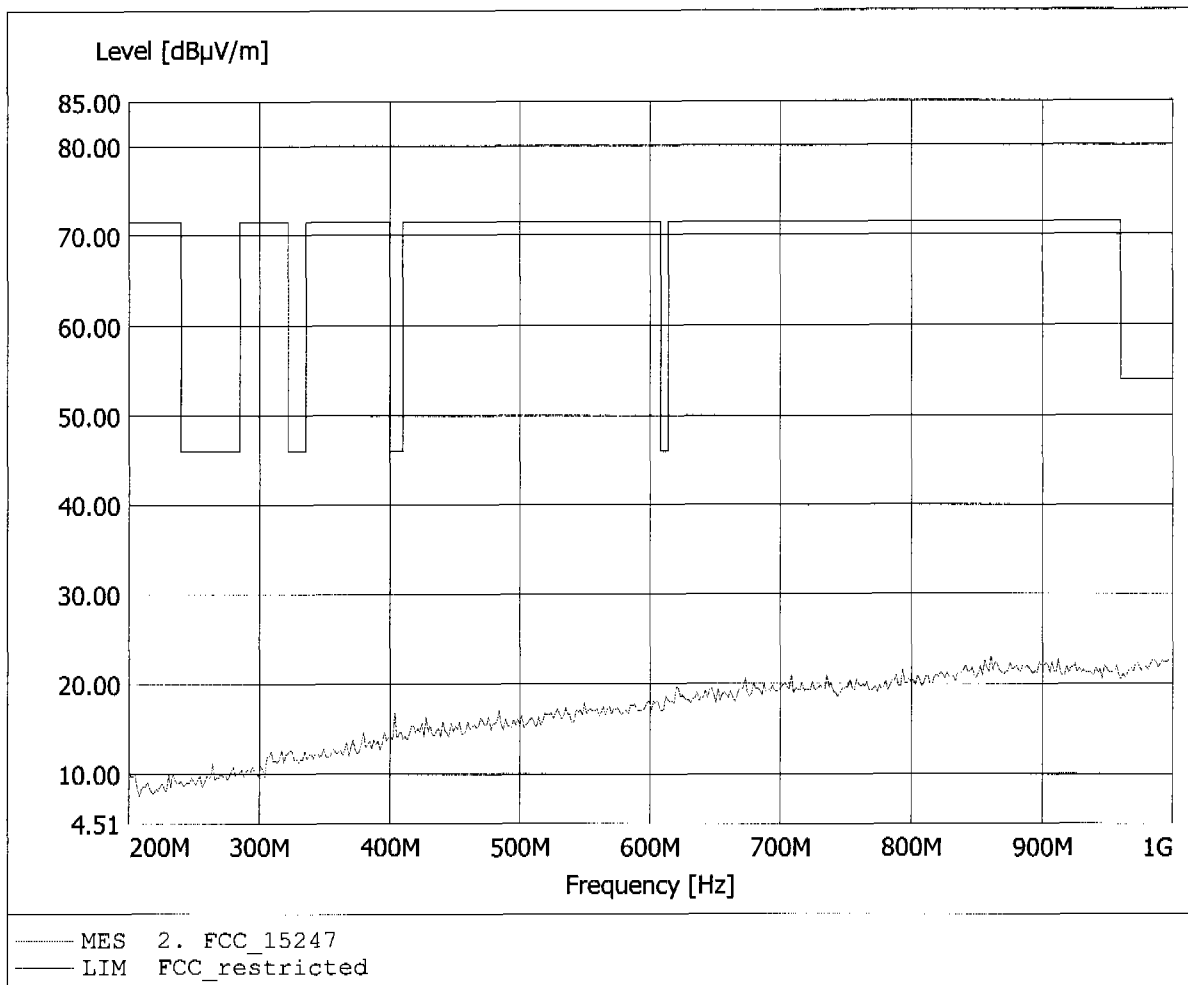


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 956.713MHz, Emax: 25.03dBµV/m, RBW: 100kHz

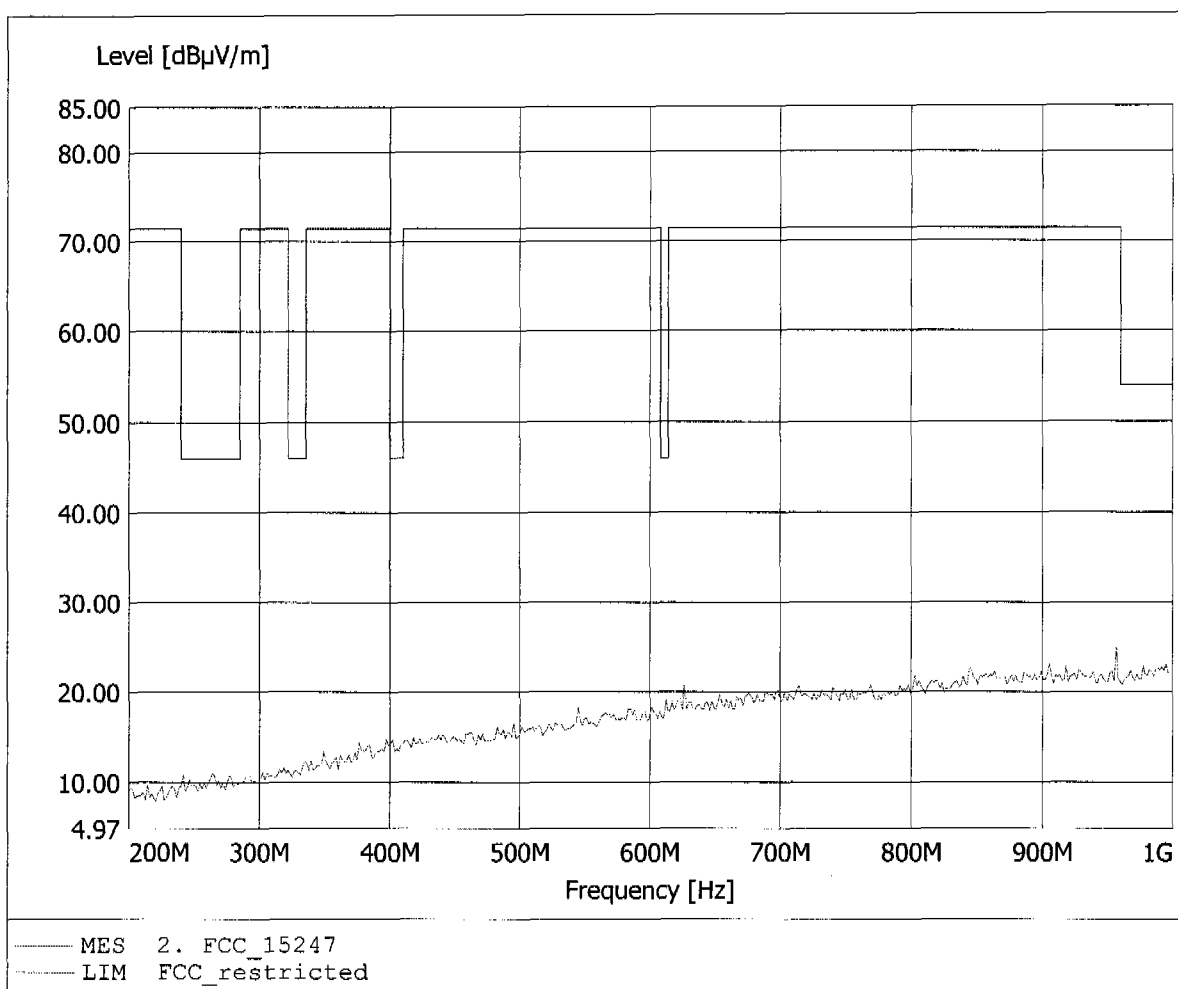


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 921.443MHz, Emax: 23.60dBµV/m, RBW: 100kHz

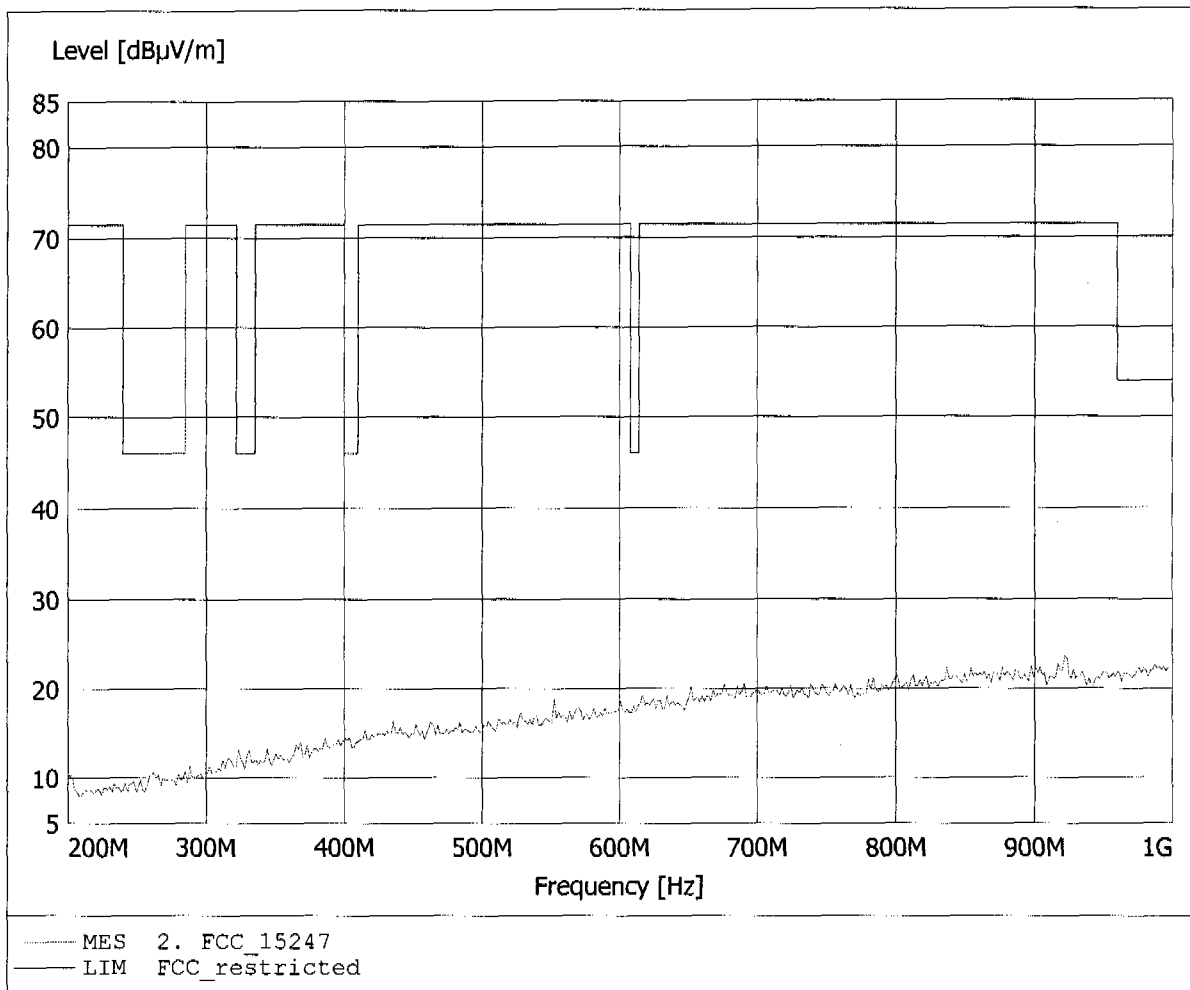


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 993.587MHz, Emax: 22.60dBµV/m, RBW: 100kHz

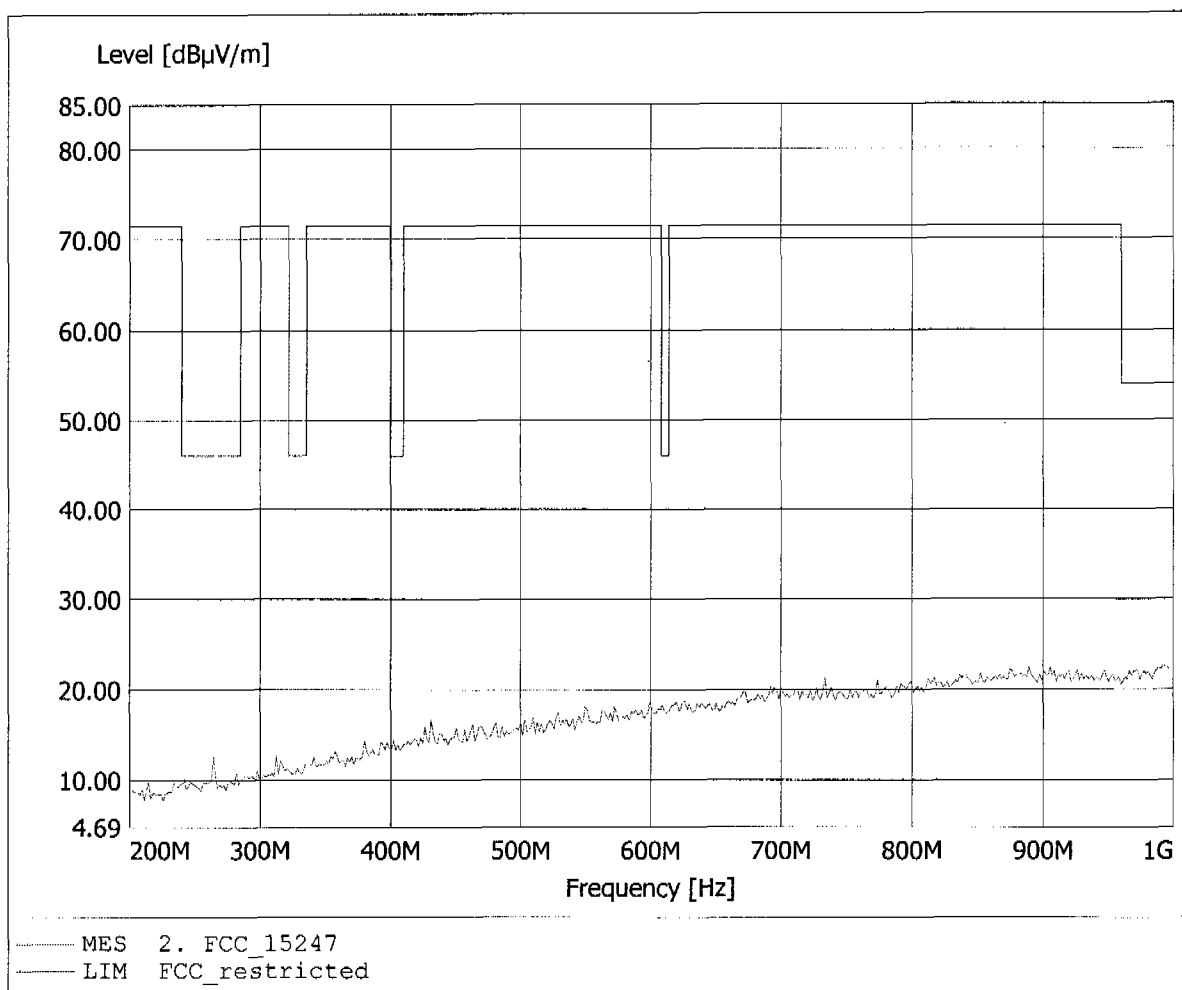


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 926.253MHz, Emax: 23.90dBµV/m, RBW: 100kHz

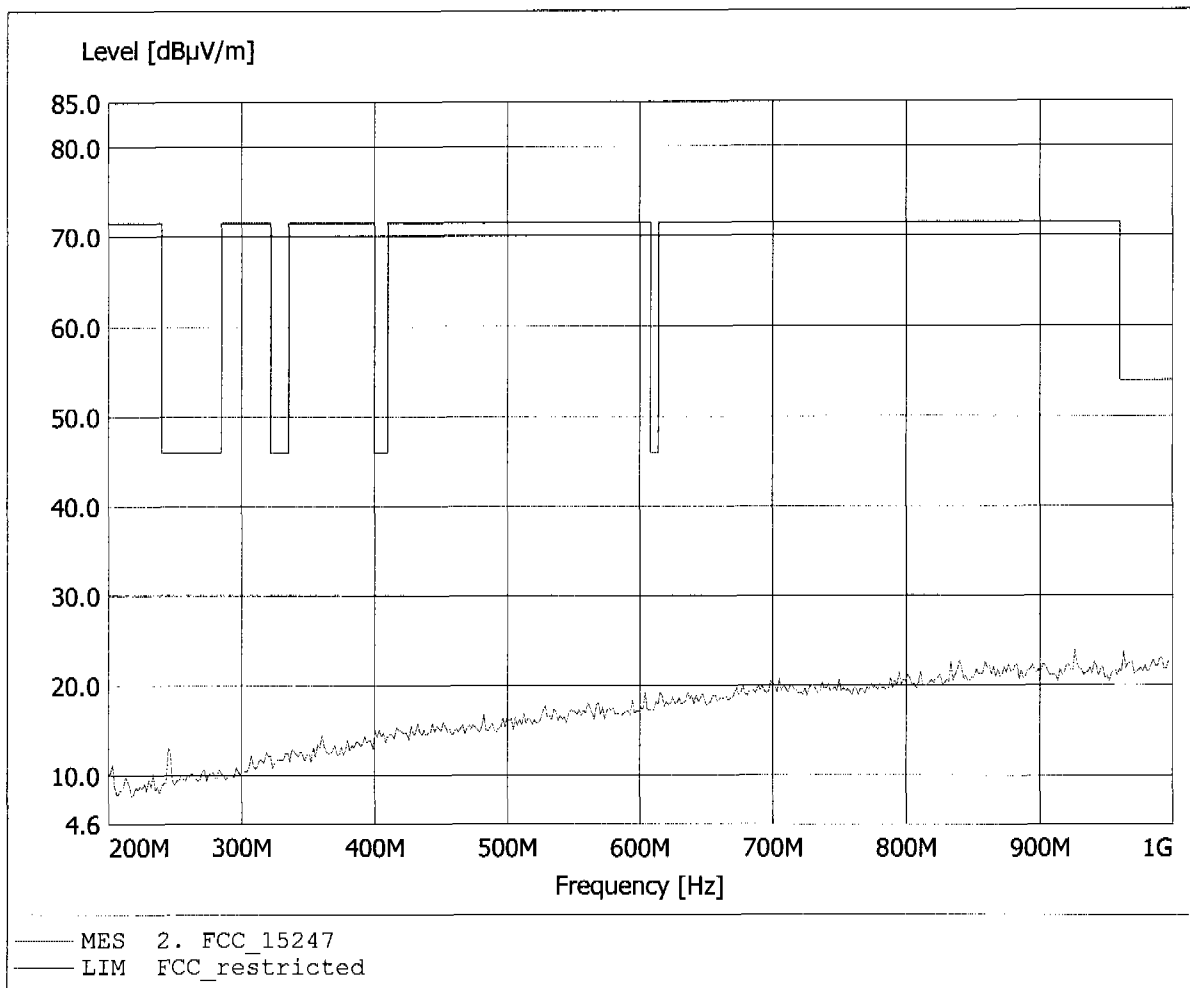


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.951GHz, Emax: 43.33dBµV/m, RBW: 1MHz

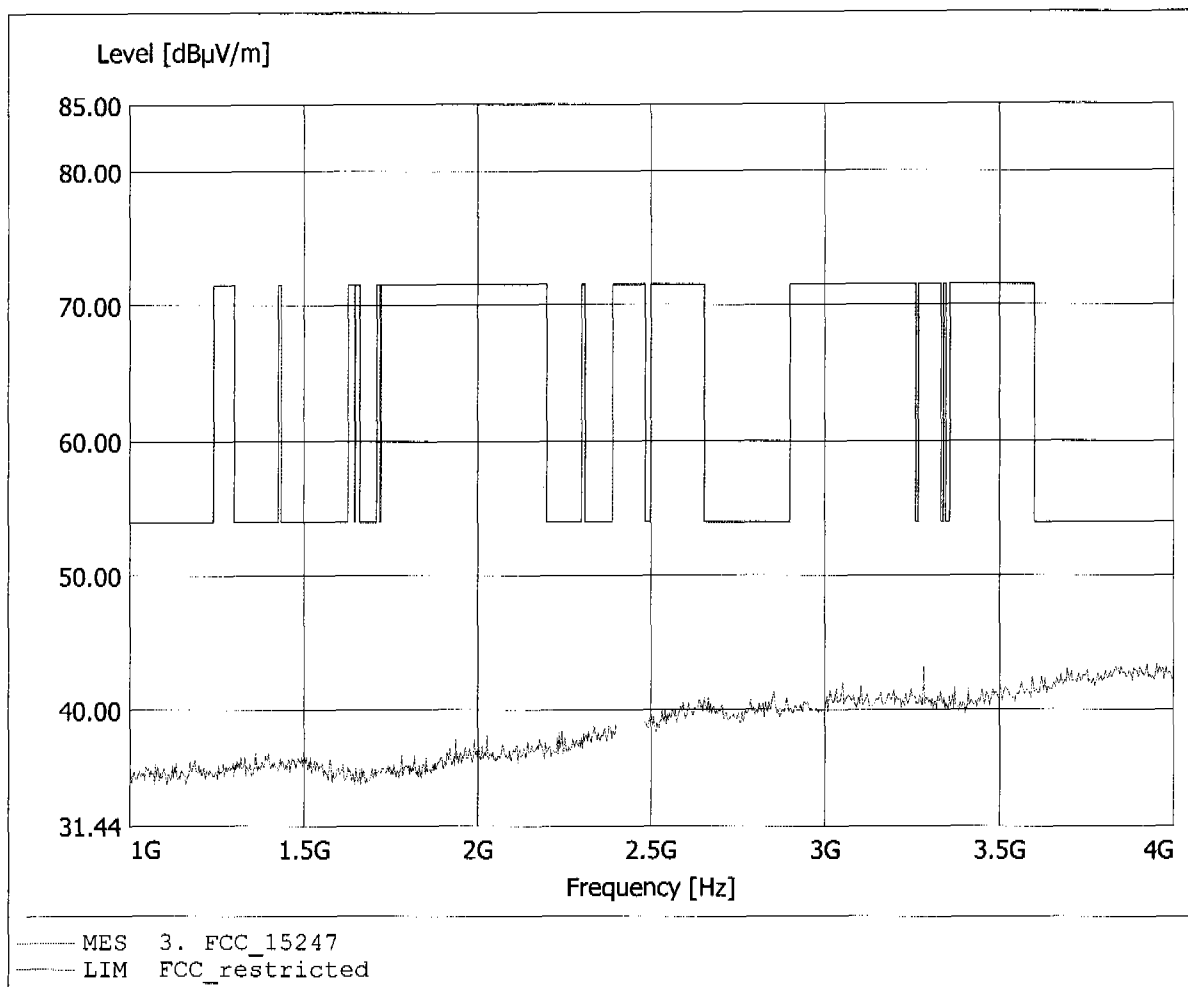


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.872GHz, Emax: 43.64dBµV/m, RBW: 1MHz

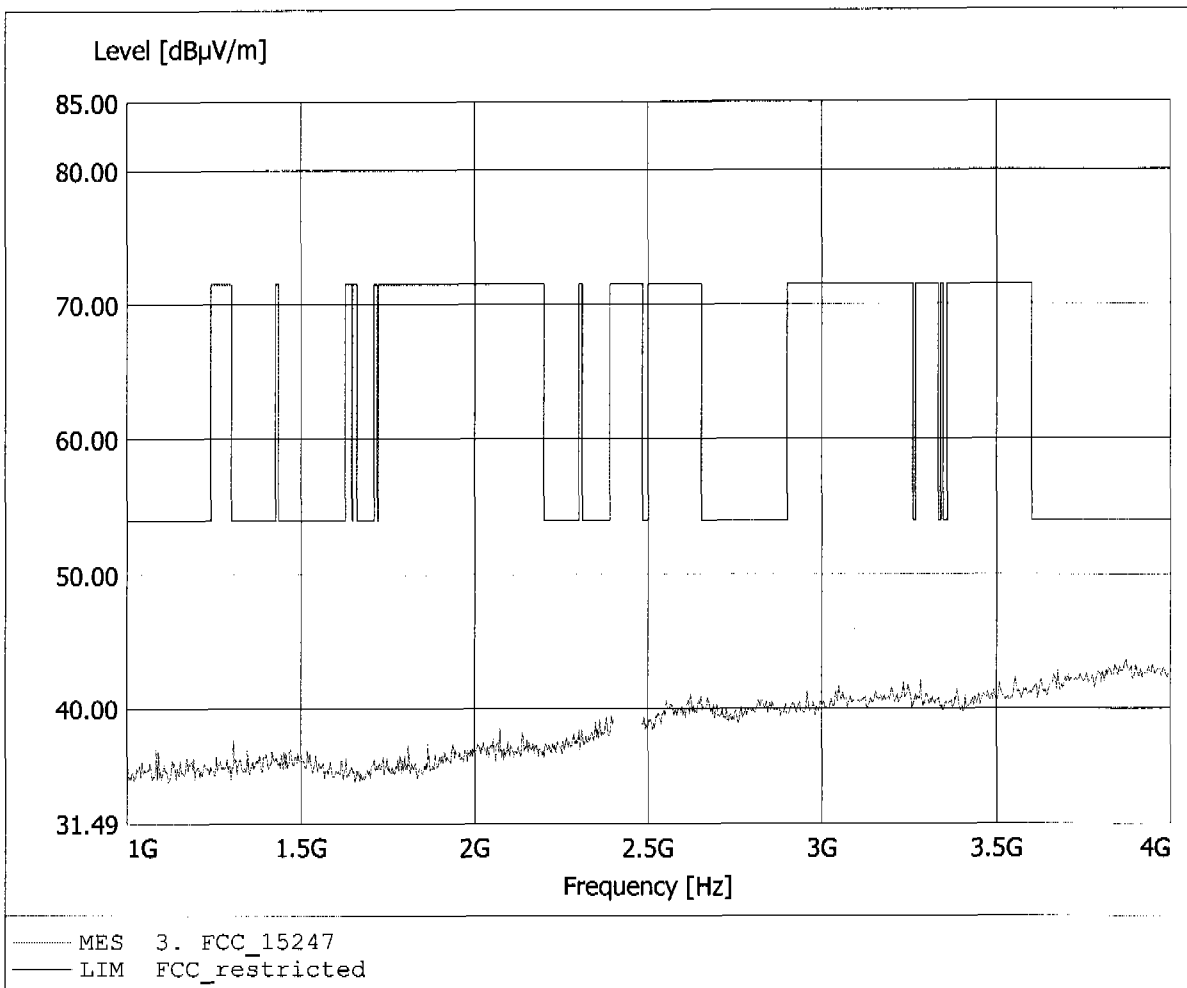


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 46.48dBµV/m, RBW: 1MHz

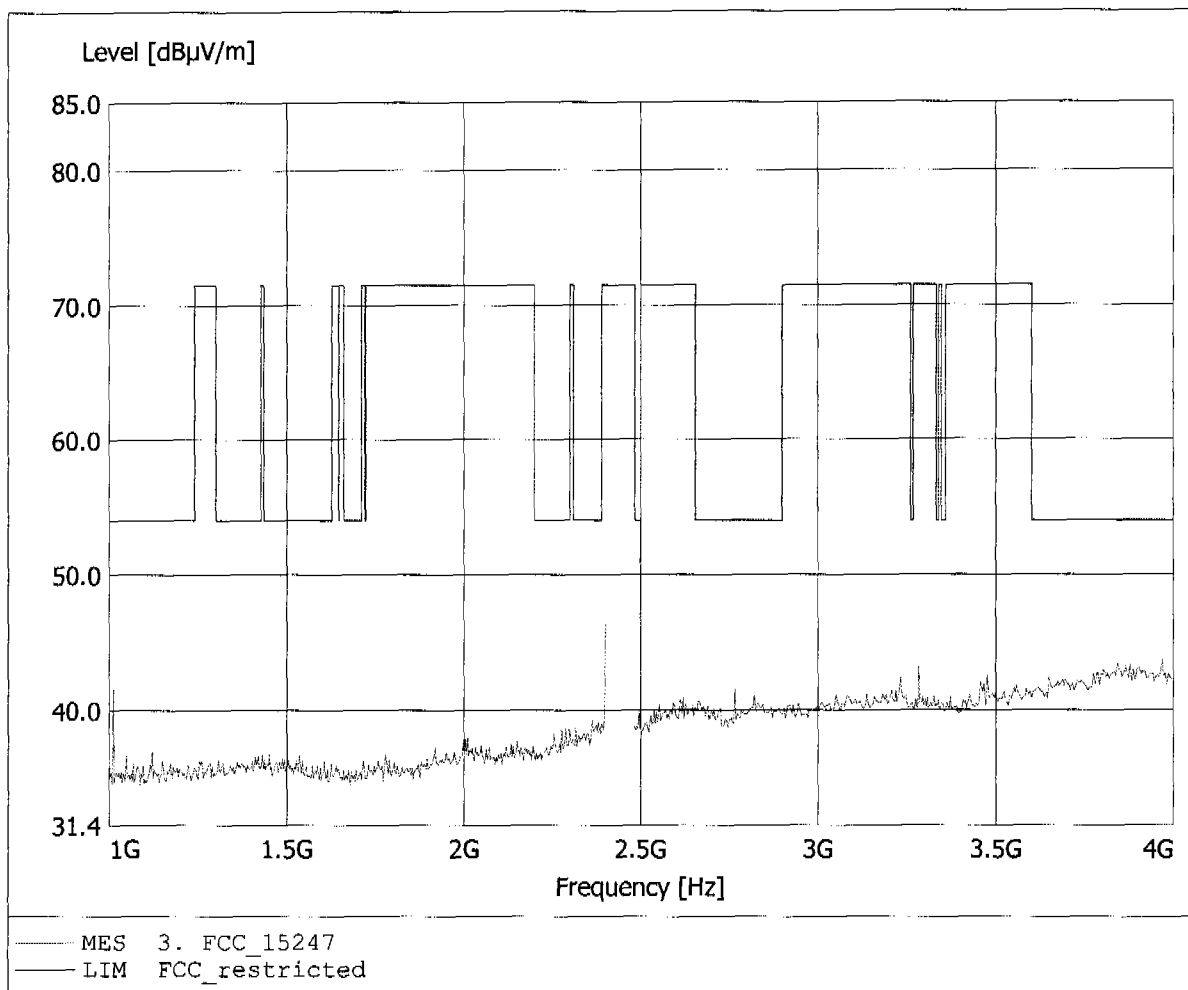


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 44.24dBµV/m, RBW: 1MHz

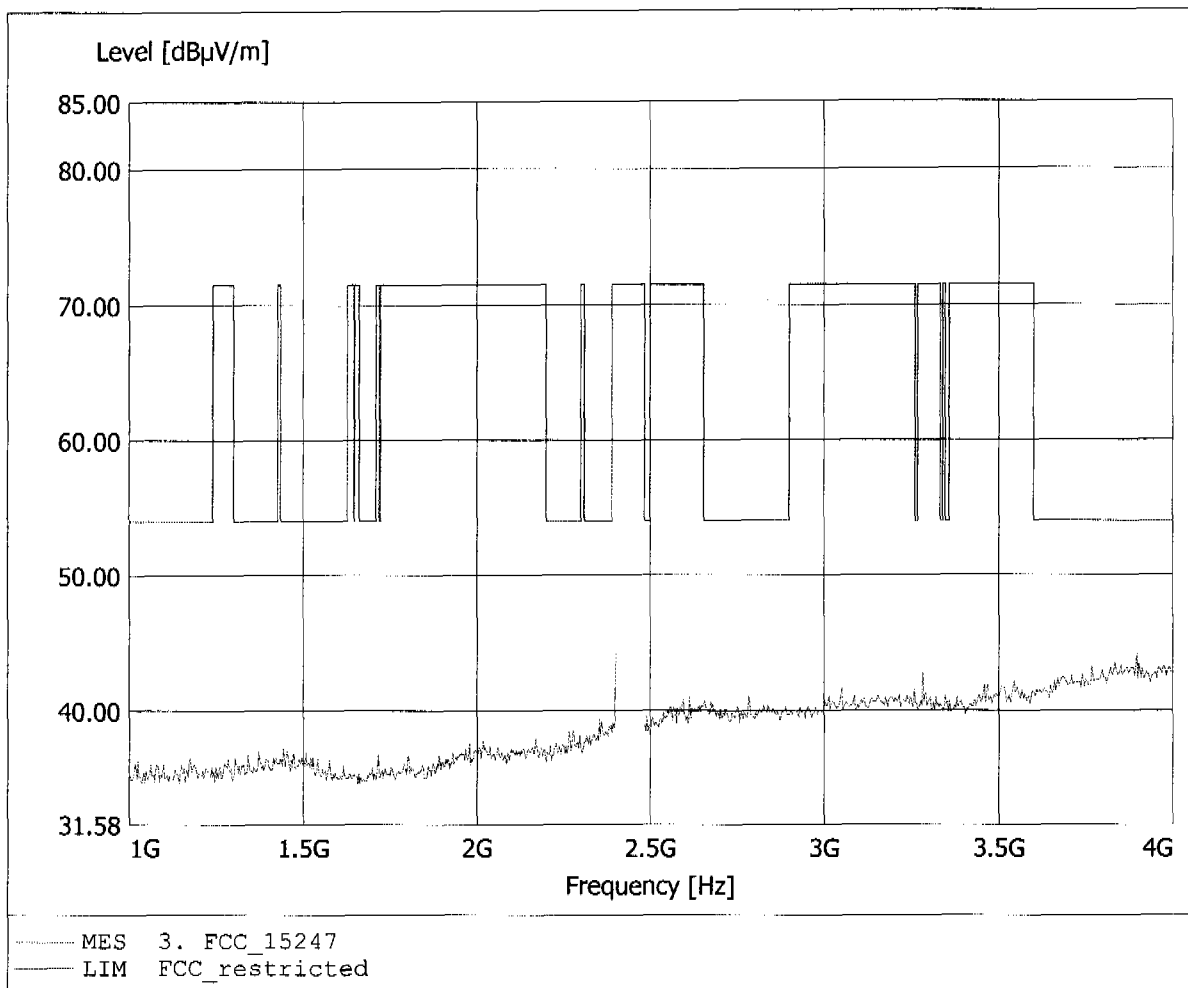


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.951GHz, Emax: 43.75dBuV/m, RBW: 1MHz

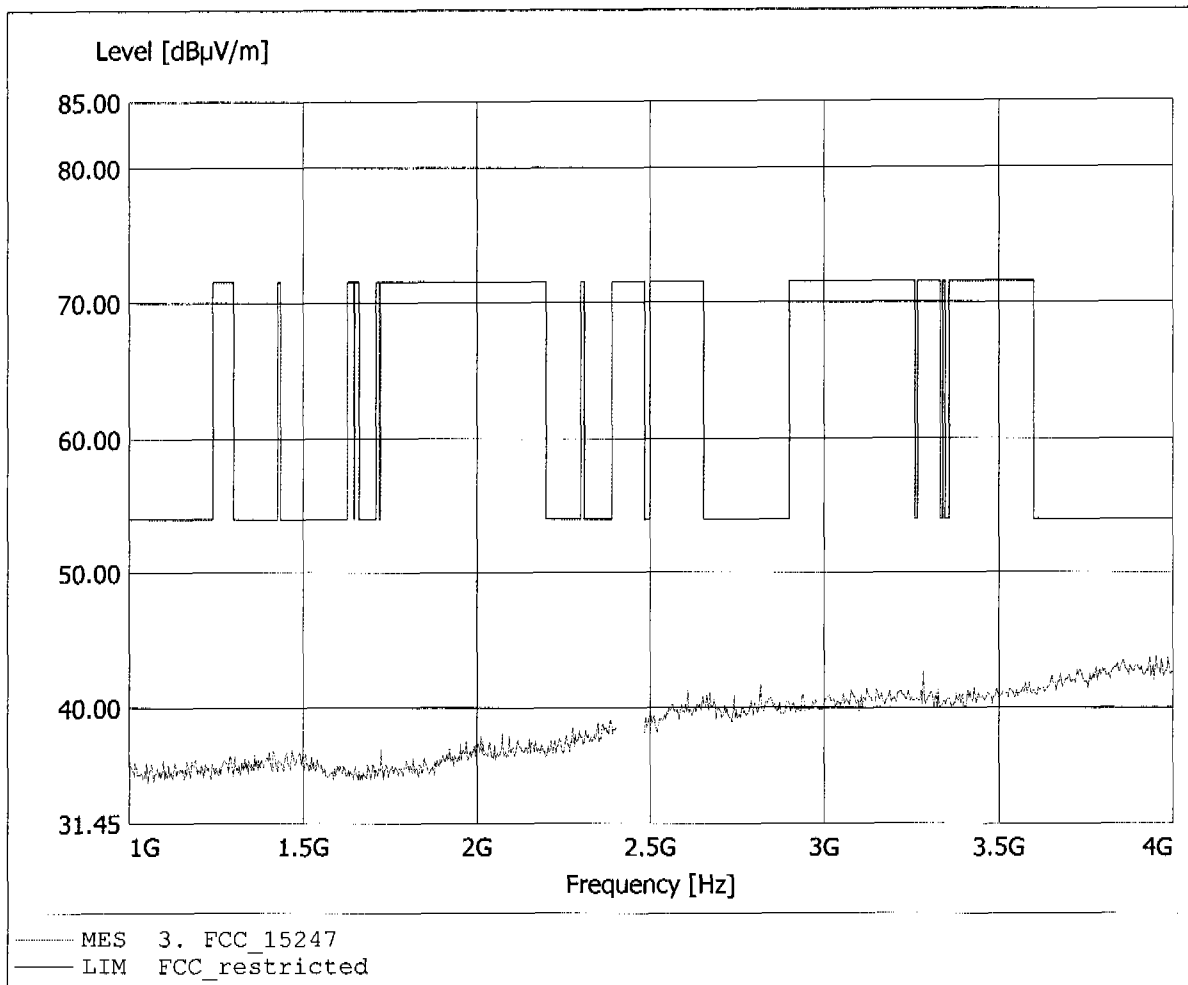


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.836GHz, Emax: 44.38dBµV/m, RBW: 1MHz

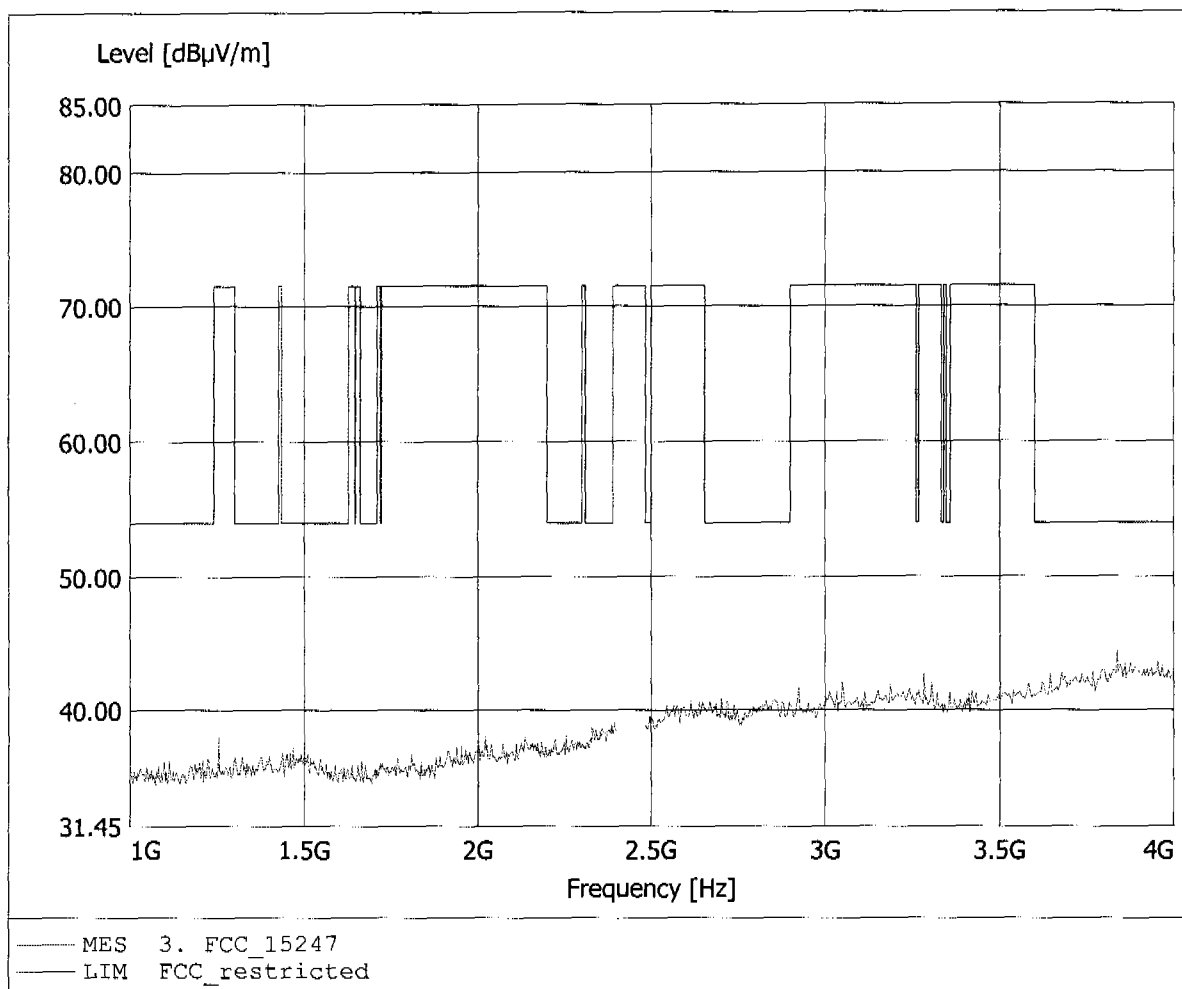


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 42.25dBµV/m, RBW: 1MHz

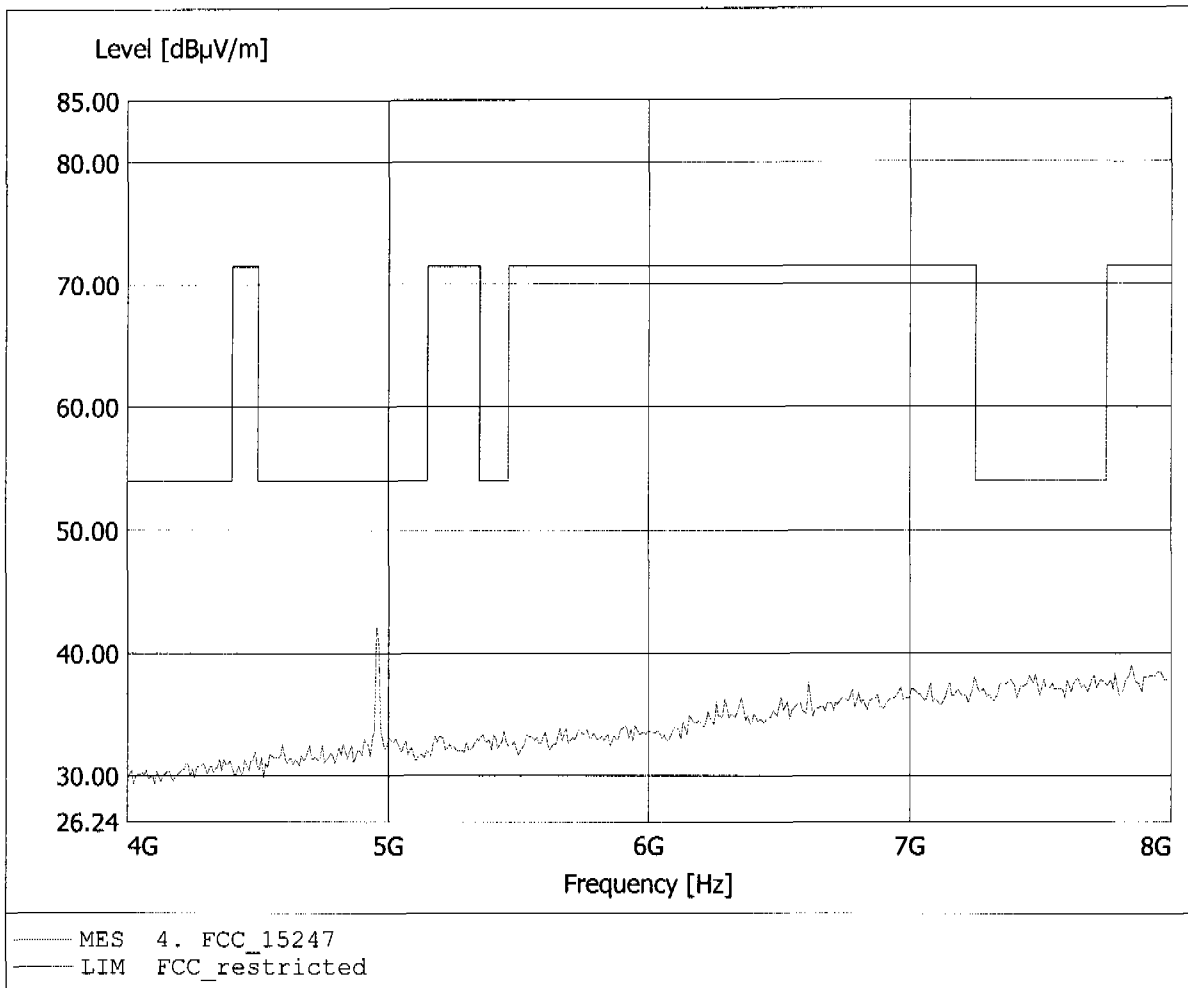


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.984GHz, Emax: 38.28dBµV/m, RBW: 1MHz

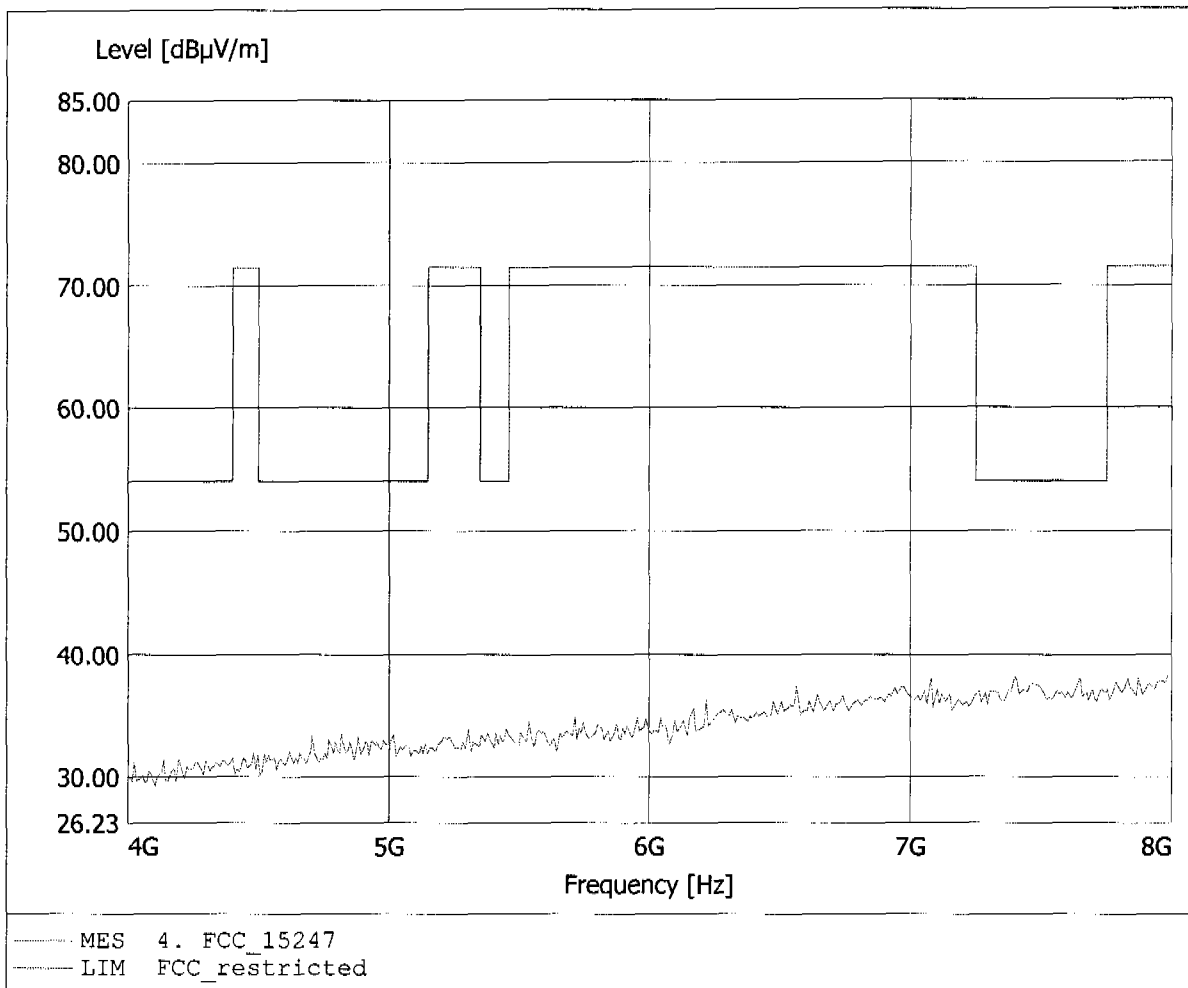


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 39.99dBµV/m, RBW: 1MHz

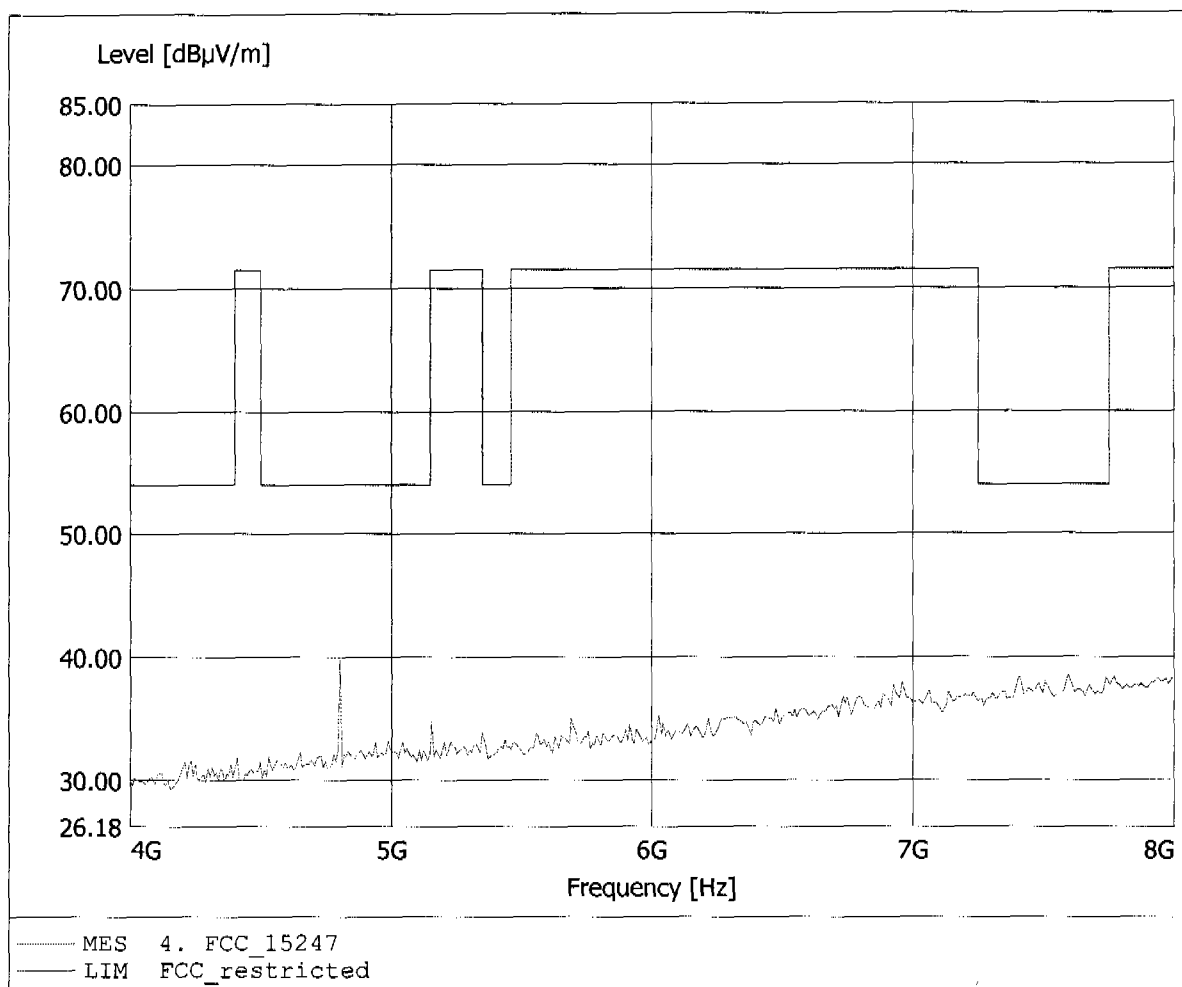


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 40.76dBuV/m, RBW: 1MHz

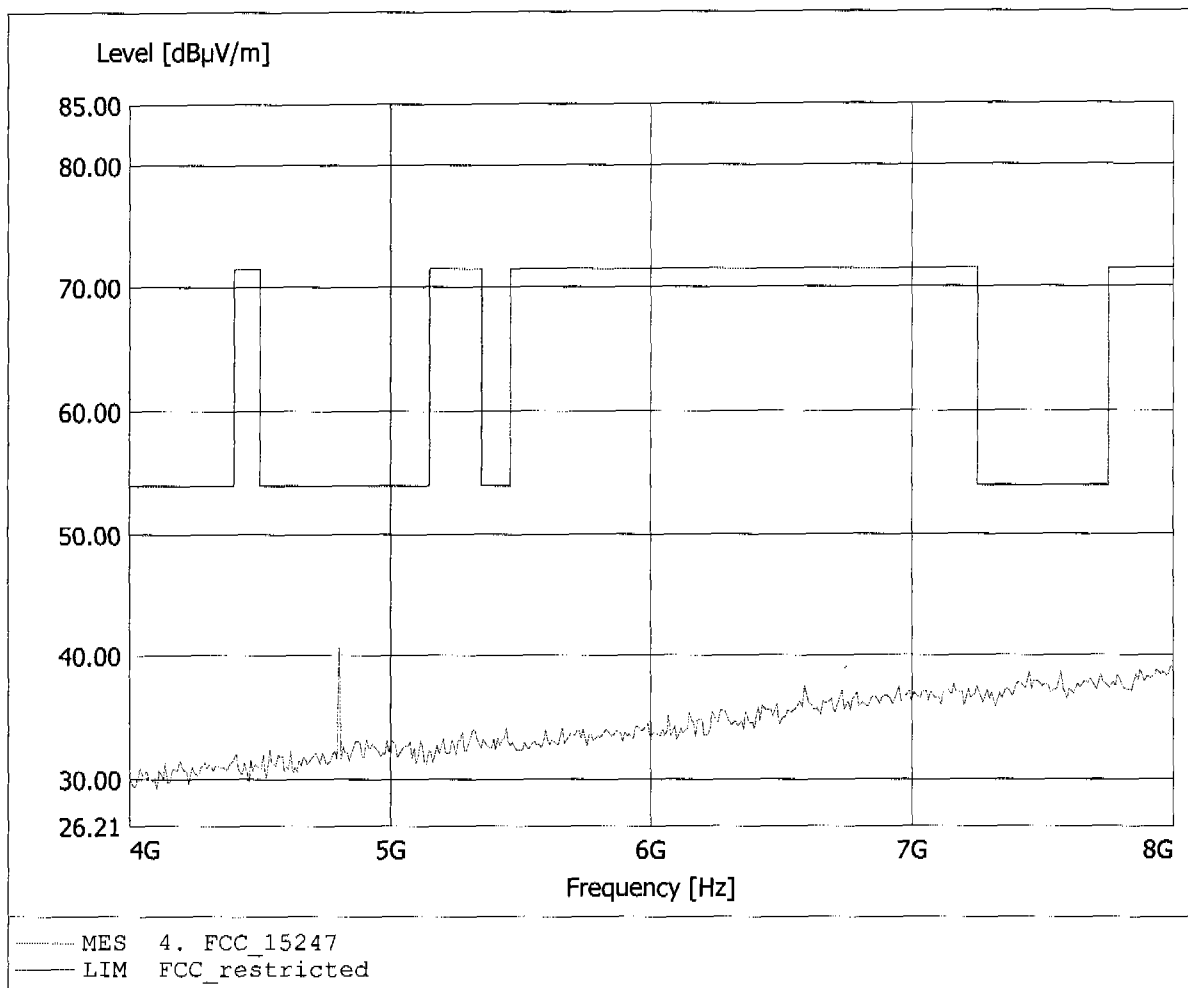


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.952GHz, Emax: 39.15dBµV/m, RBW: 1MHz

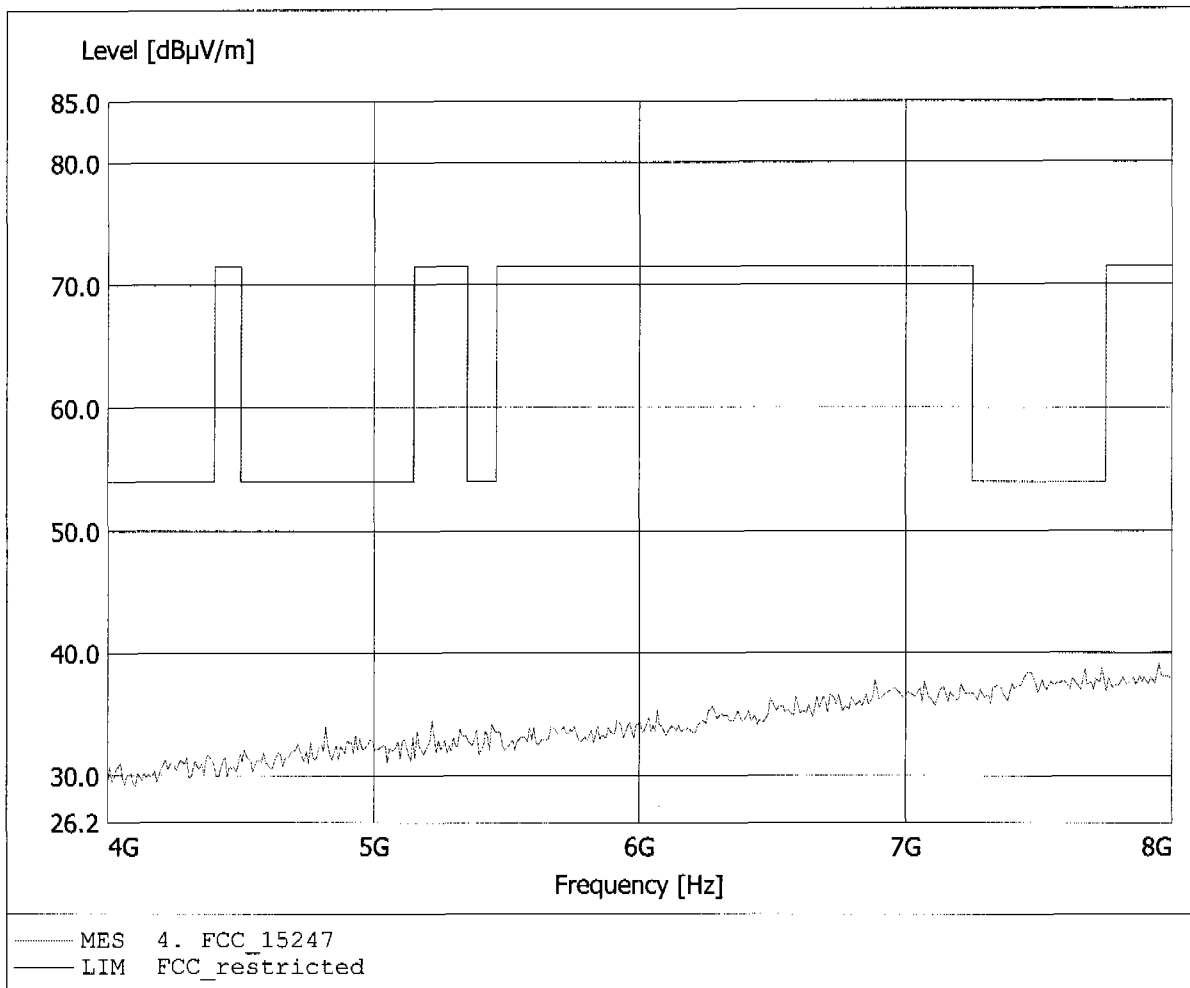


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 39.40dBµV/m, RBW: 1MHz

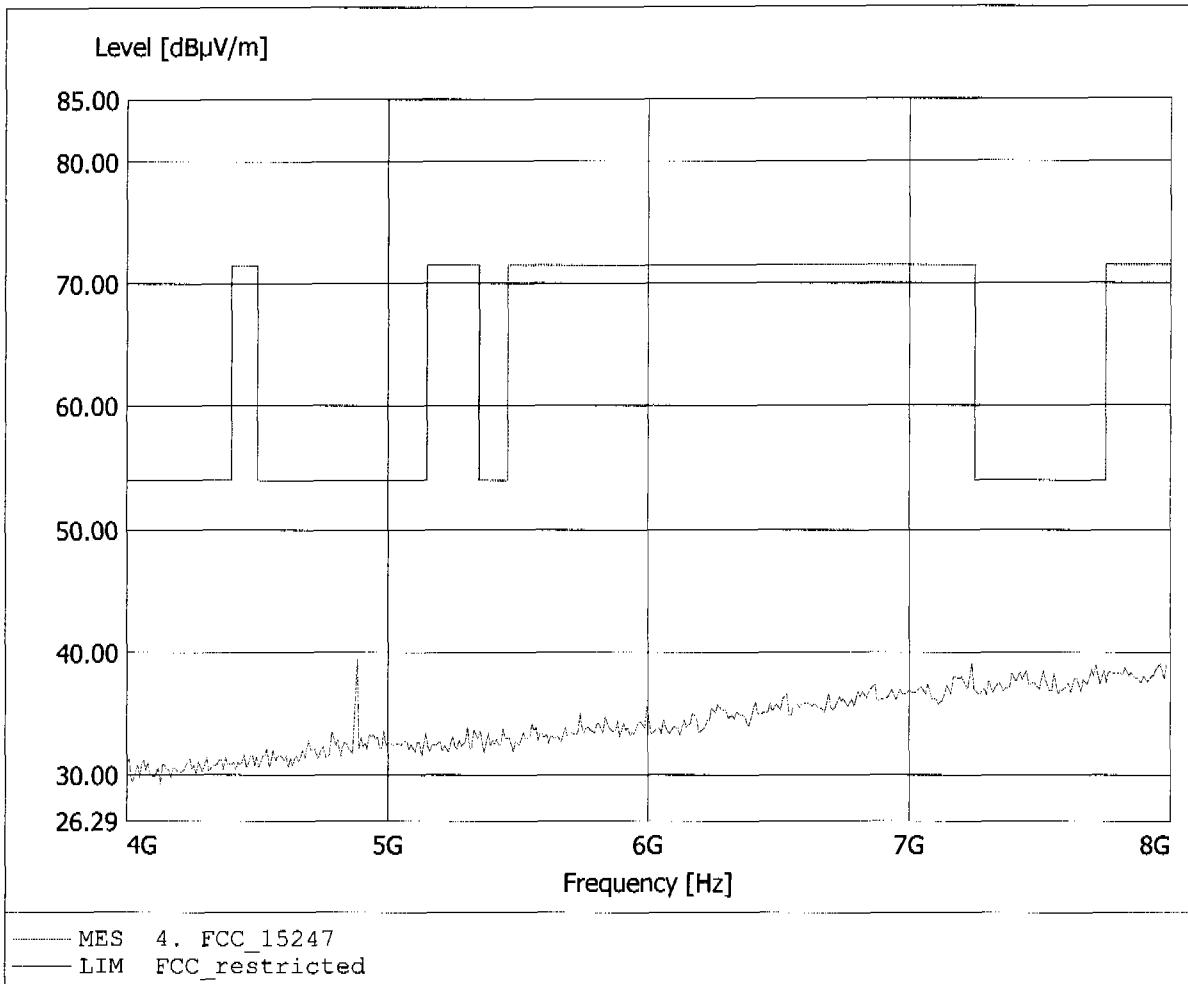


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.118GHz, Emax: 42.94dBuV/m, RBW: 1MHz

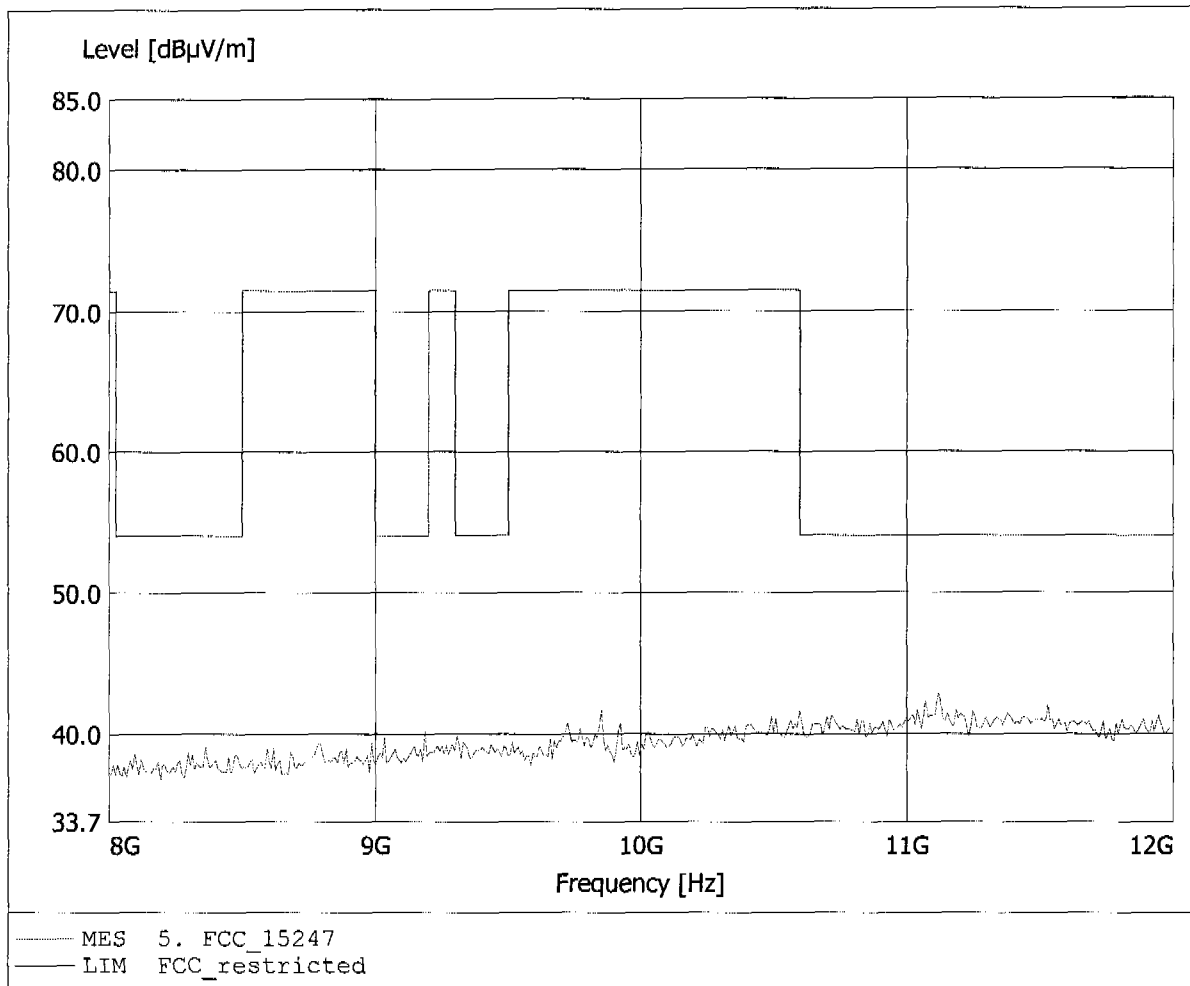


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2480 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.086GHz, Emax: 42.96dBµV/m, RBW: 1MHz

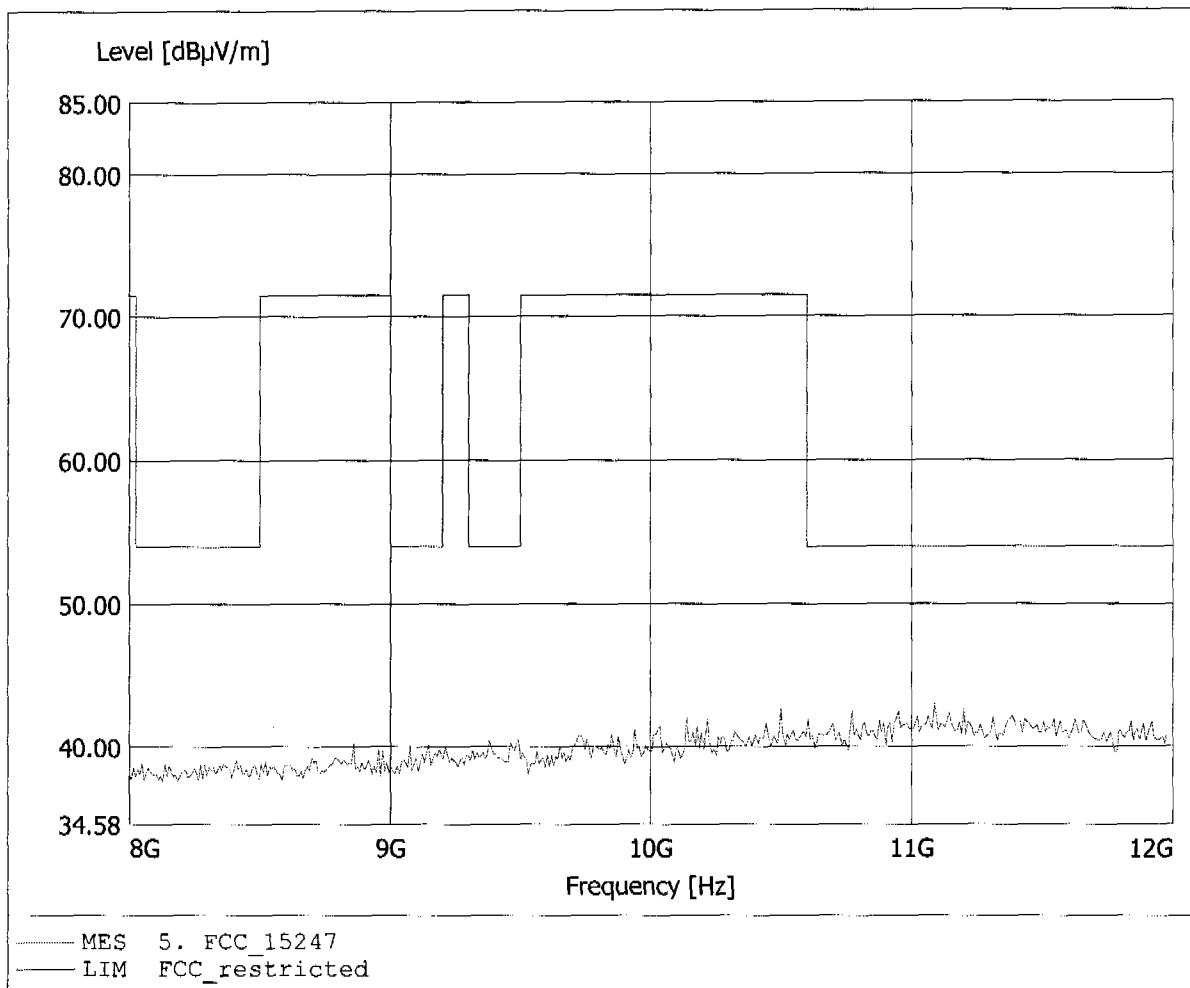


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.852GHz, Emax: 42.37dBµV/m, RBW: 1MHz

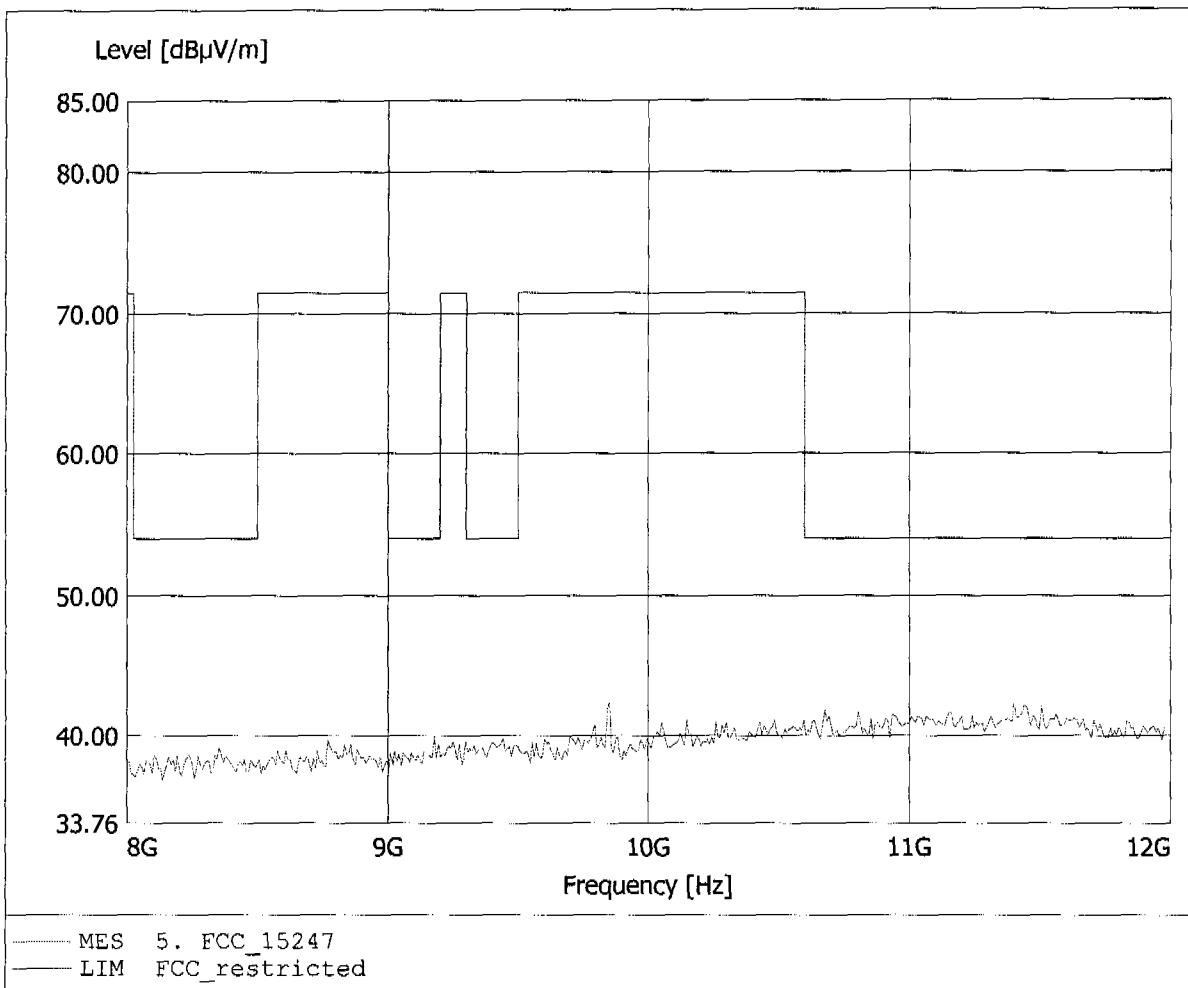


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2402 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.142GHz, Emax: 42.38dBµV/m, RBW: 1MHz

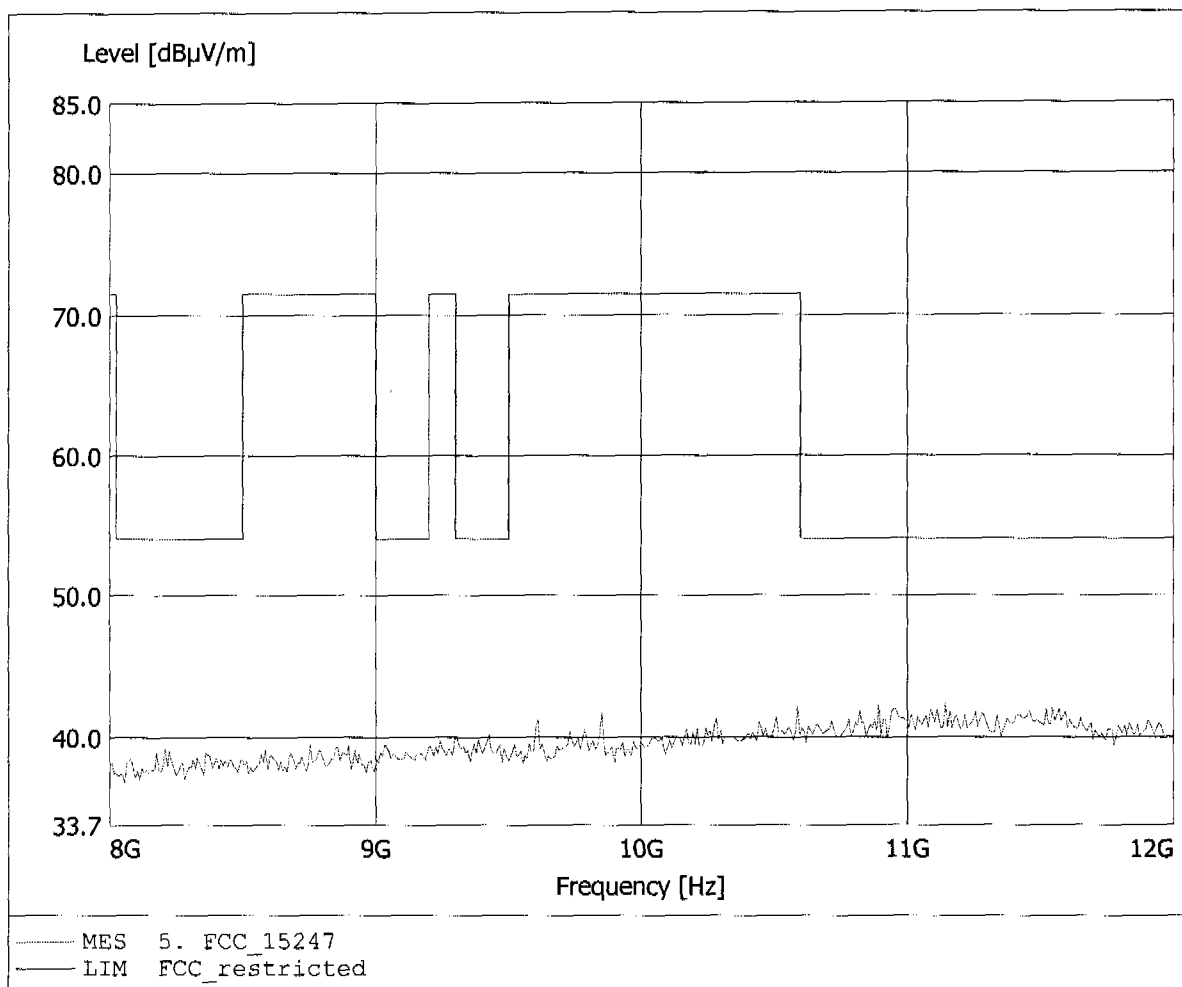


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.852GHz, Emax: 43.47dBµV/m, RBW: 1MHz

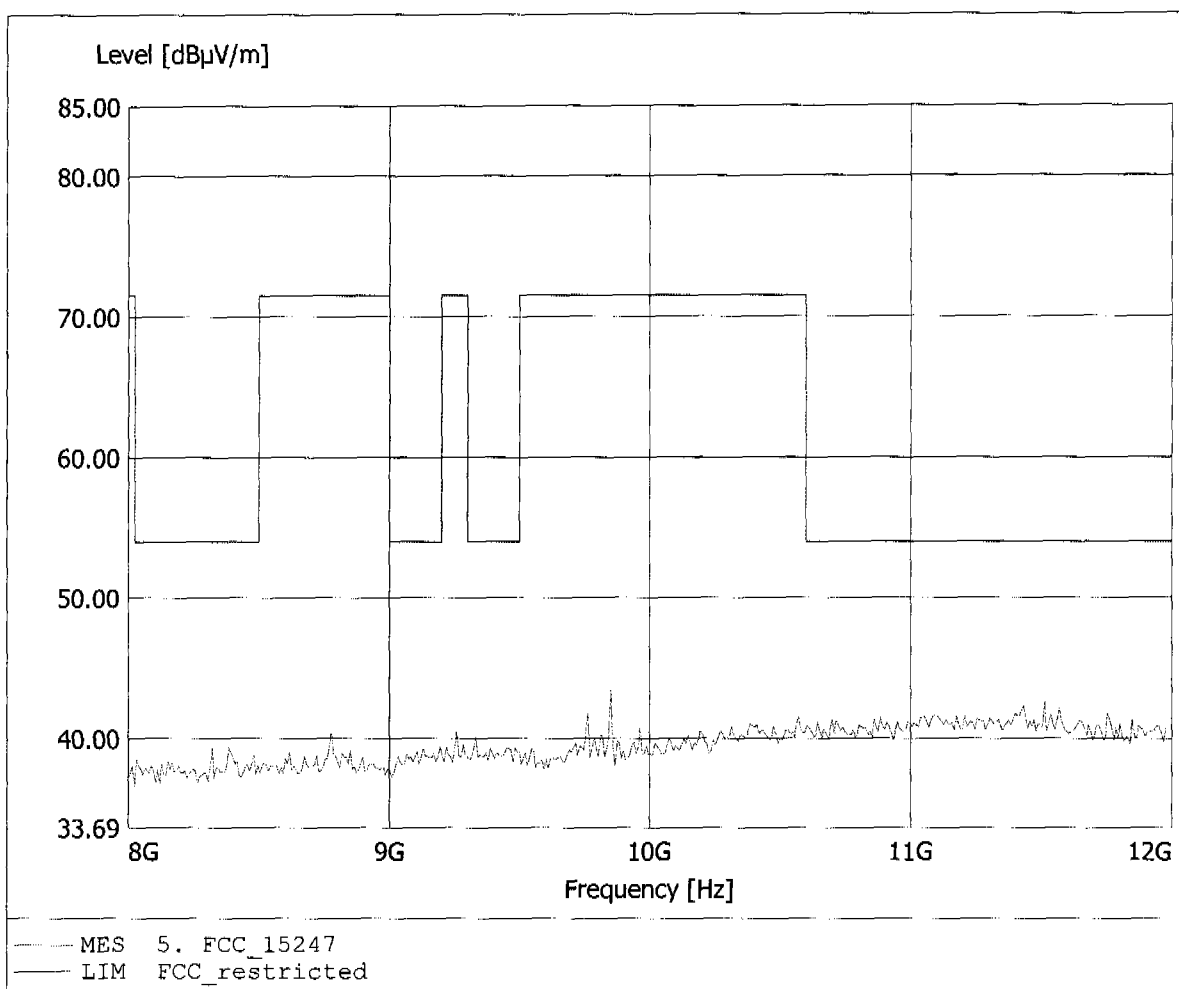

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: Compal Electronics
EUT / Model: PDA 850/900/1800/1900/WLAN/BT / HSTN-C01C
Mode: Tx 2441 MHz
Test Site / Operator: ETS / Mr. Marquardt
Temperature/ Voltage: 25°C / Unom: 4.2 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 43.02dBµV/m, RBW: 1MHz

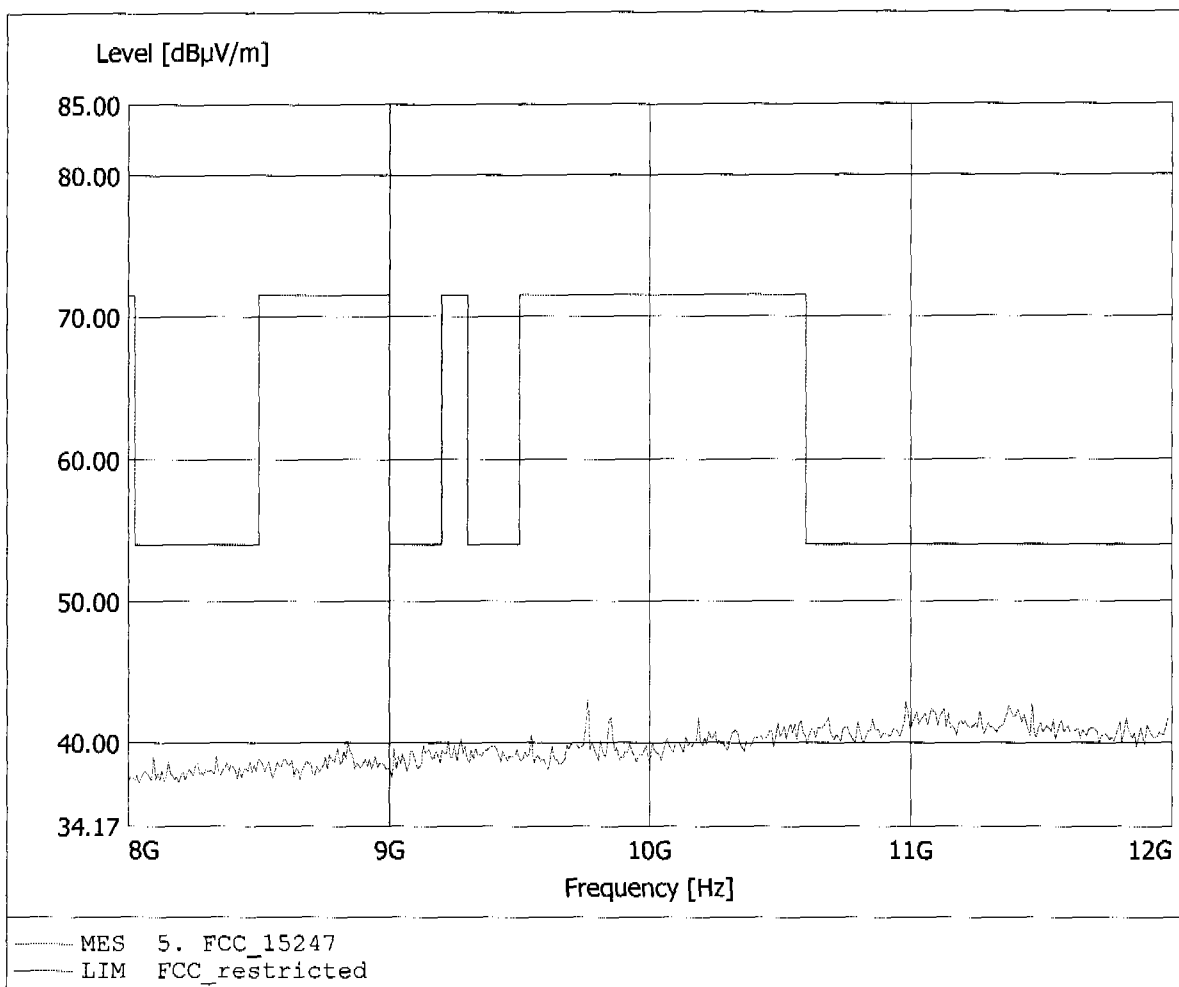



Appendix D

Spurious Emissions conducted - Transmitter operating



Appendix E

Carrier Frequency Separation



Appendix F

Number of Hopping Frequencies



Appendix G

Time of Occupancy (Dwell Time)



Appendix H

20dB Bandwidth



Appendix I

Band-edge Compliance of RF Emissions




Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: PDA 850/ 900/ 1800/ 1900/ WLAN/ BT
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Unom: 120 V AC (AC / DC -adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Jahn
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: HSTNH-C01C mode: link

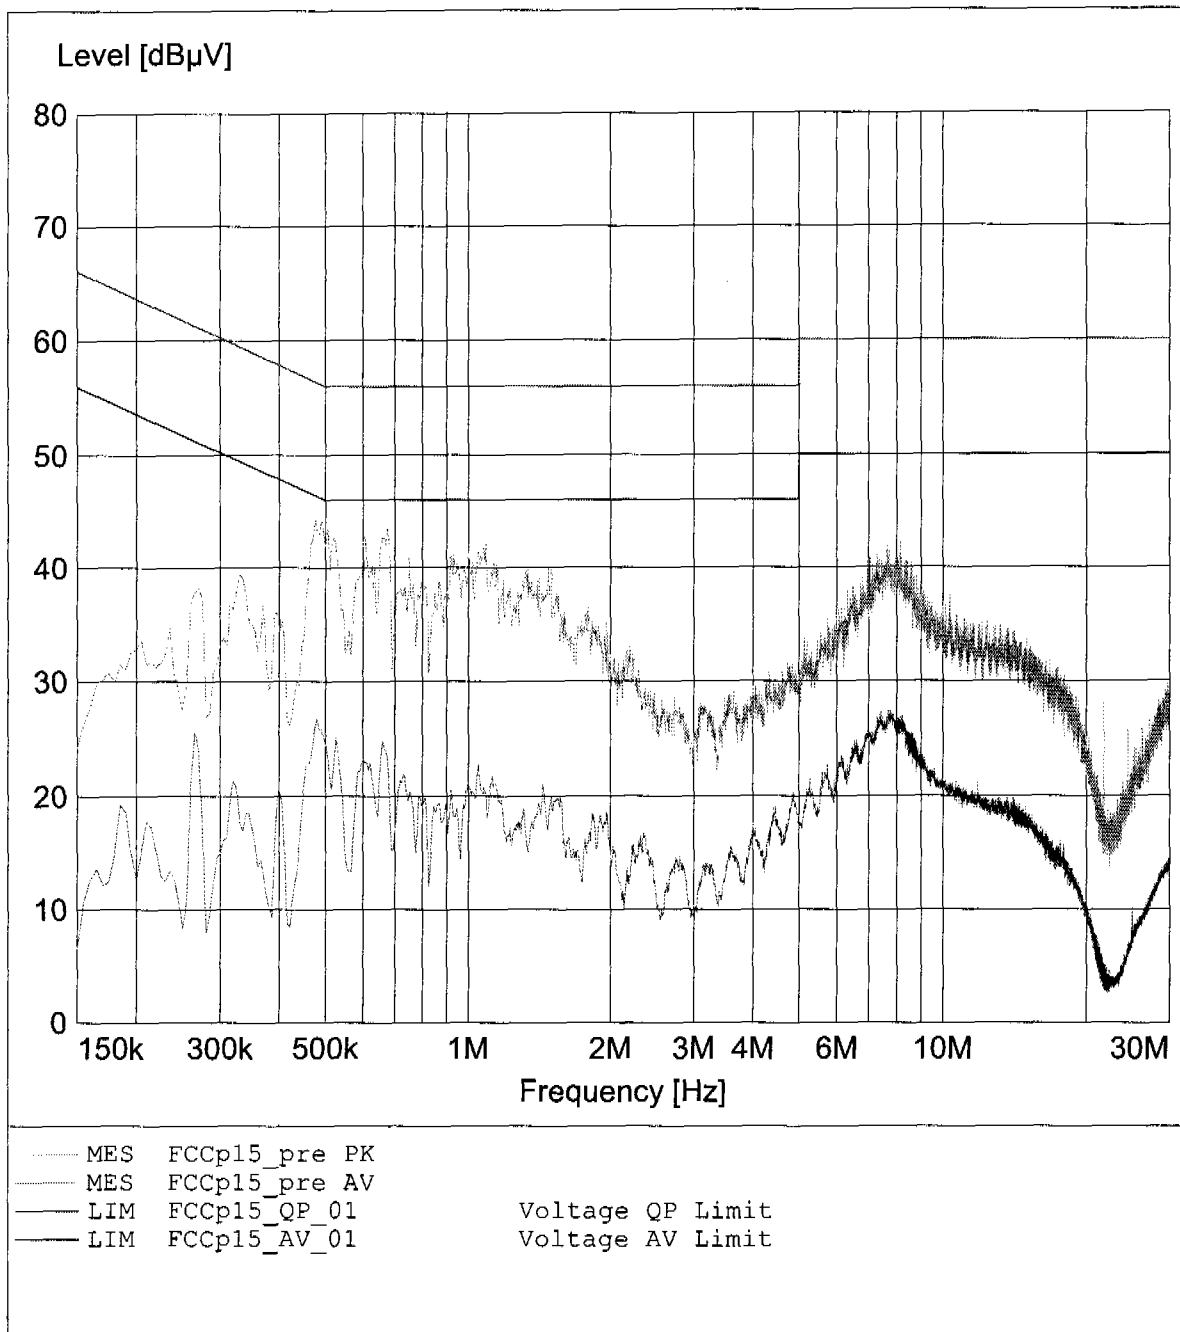

EMI voltage test in the ac-mains according to FCC part 15

EUT: PDA 850/ 900/ 1800/ 1900/ WLAN/ BT
Manufacturer: COMPAL ELECTRONICS, INC.
Operating Condition: Unom: 120 V AC (AC / DC -adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Jahn
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: HSTNH-C01C mode: link

