



Appendix B

Measurement Plots

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

Dipol Valid.900(h)_250mW_17.05.2004

DUT: Dipole 900 MHz; Type: D900V2; Serial: 164

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Head 900 MHz Medium parameters used (interpolated): $f = 900$ MHz; $\sigma = 0.958$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Dipol 900 (250mW)/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 58.2 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 3.09 mW/g


Dipol 900 (250mW)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.2 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 3.01 mW/g

Peak SAR (extrapolated) = 4.06 W/kg

SAR(1 g) = 2.57 mW/g; SAR(10 g) = 1.65 mW/g

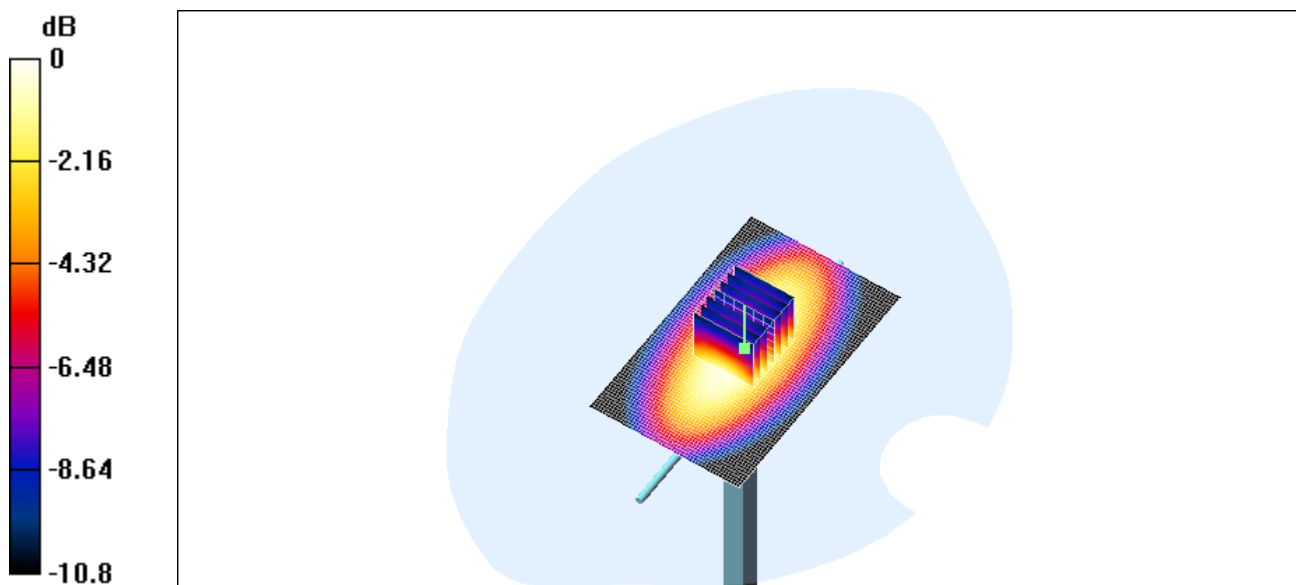

0 dB = 3.01mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

Dipol Valid.900(h)_250mW_18.05.2004

DUT: Dipole 900 MHz; Type: D900V2; Serial: 164

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Head 900 MHz Medium parameters used (interpolated): $f = 900$ MHz; $\sigma = 0.958$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Dipol 900 (250mW)/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 57.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 2.92 mW/g


Dipol 900 (250mW)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 2.89 mW/g

Peak SAR (extrapolated) = 3.98 W/kg

SAR(1 g) = 2.65 mW/g; SAR(10 g) = 1.69 mW/g

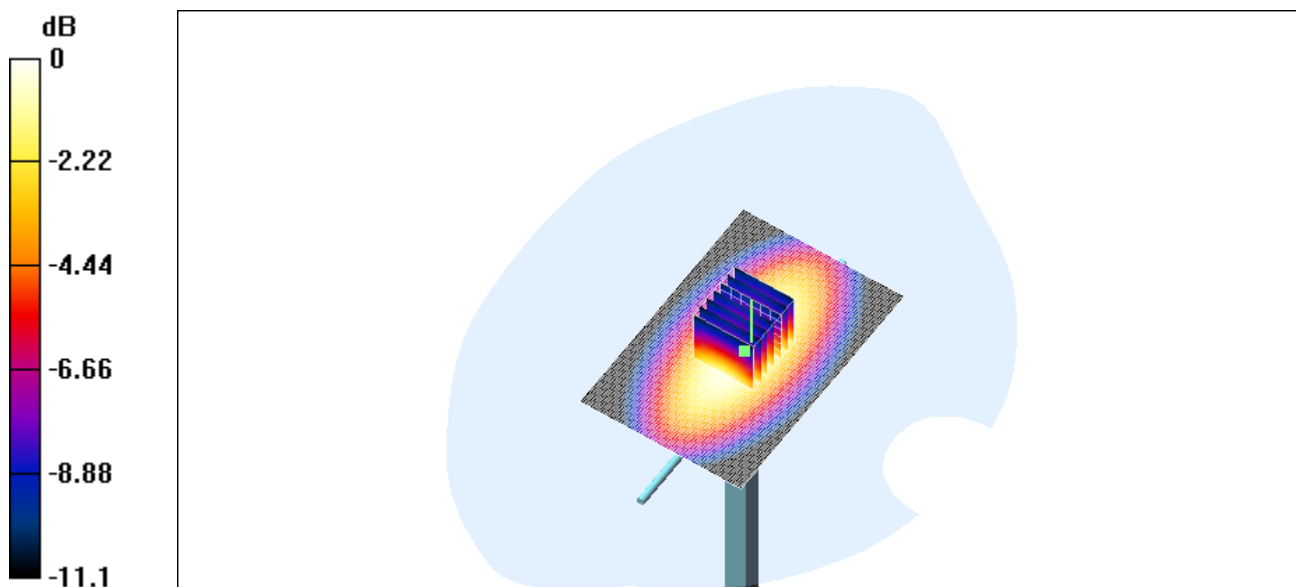

0 dB = 2.89mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_right_ch128_cheek

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.892$ mho/m;

$\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 22.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.748 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.1 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.733 mW/g

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.682 mW/g; SAR(10 g) = 0.469 mW/g

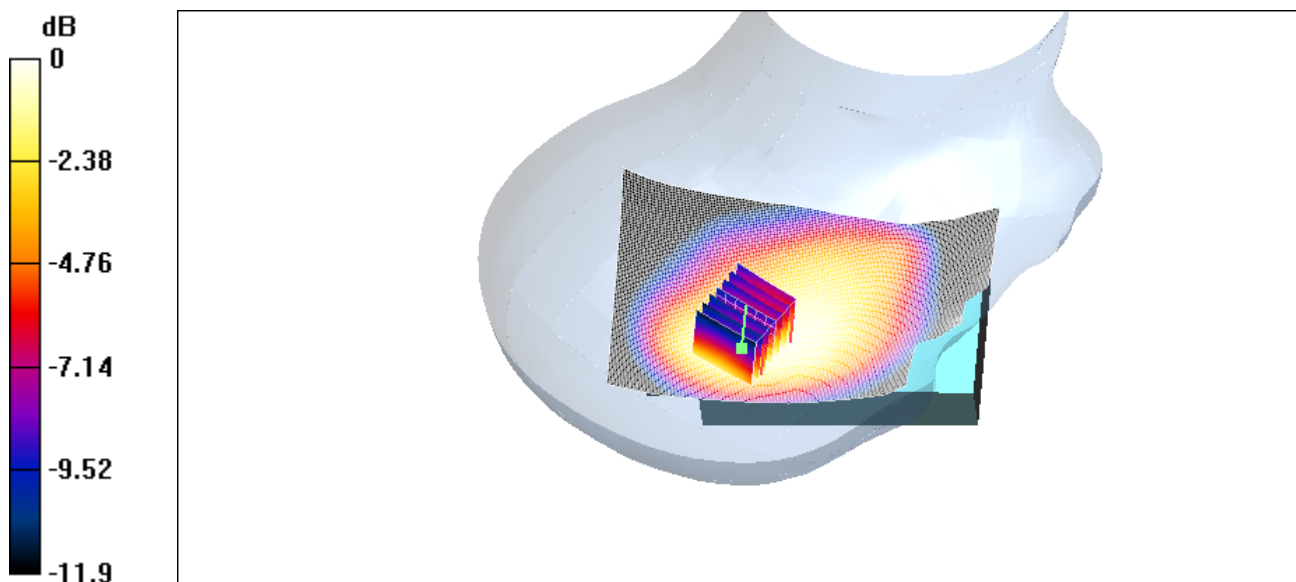

0 dB = 0.733mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_right_ch128_tilted

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.892$ mho/m;

$\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 26.3 V/m; Power Drift = -0.007 dB

Maximum value of SAR (interpolated) = 1.03 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.3 V/m; Power Drift = -0.007 dB

Maximum value of SAR (measured) = 1.06 mW/g

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.972 mW/g; SAR(10 g) = 0.614 mW/g

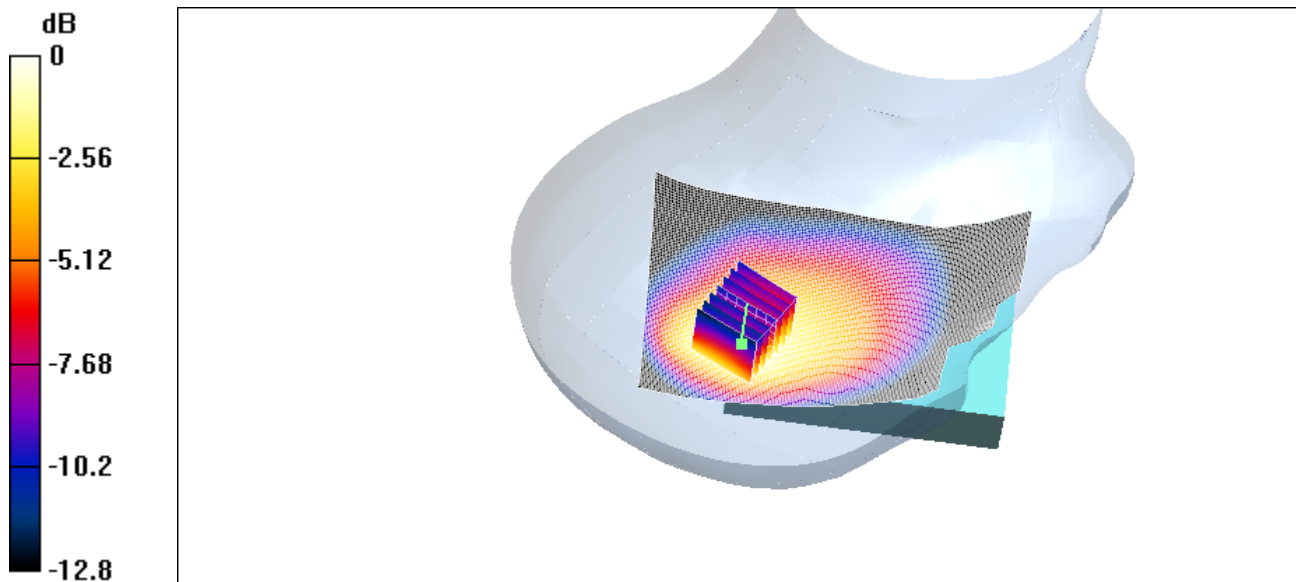

0 dB = 1.06mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_right_ch189_cheek

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.883$ mho/m;

$\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 25.9 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.954 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.9 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.931 mW/g

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.878 mW/g; SAR(10 g) = 0.601 mW/g

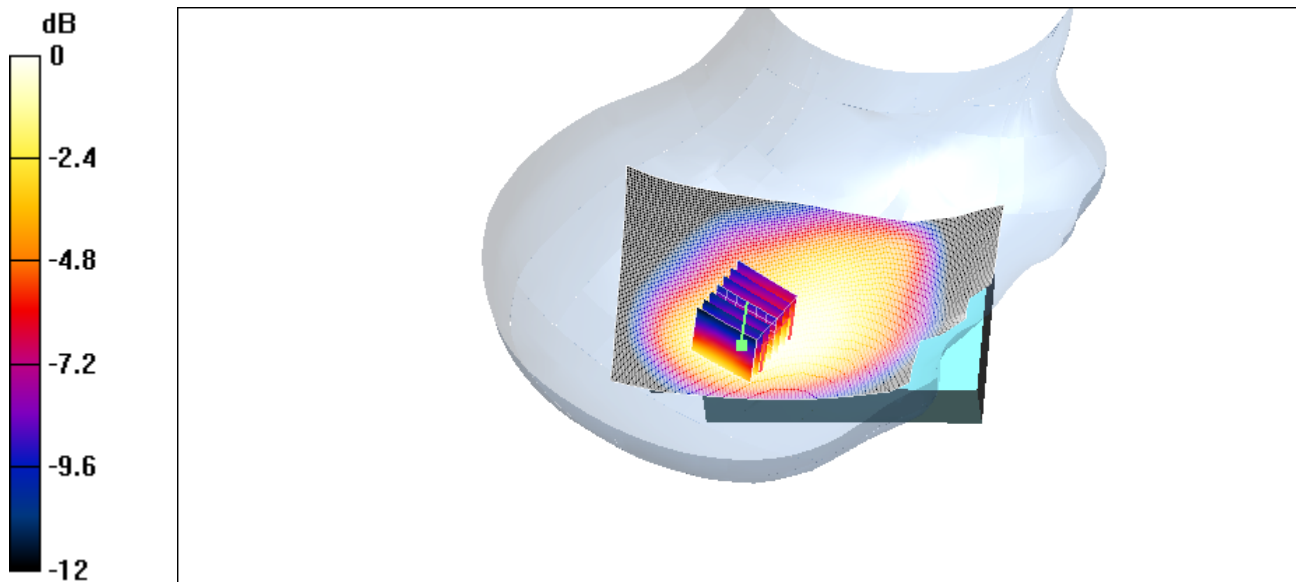

0 dB = 0.931mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_right_ch189_tilted

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.883$ mho/m;

$\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 31.5 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.44 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.5 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.48 mW/g

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.864 mW/g

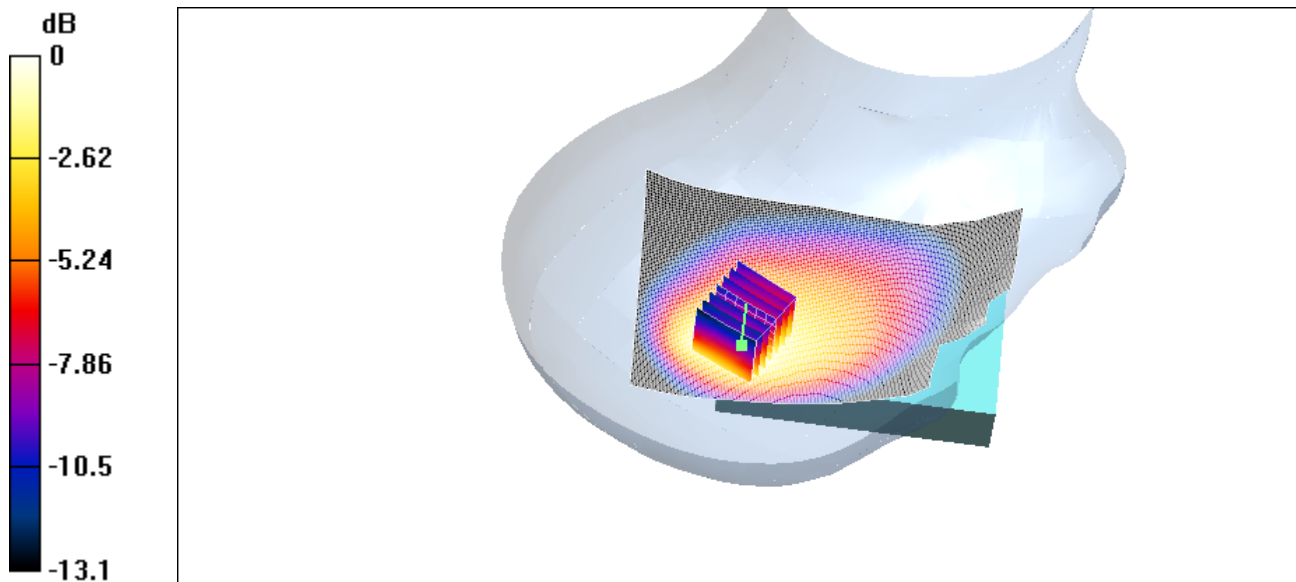

0 dB = 1.48mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_right_ch251_cheek

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.927$ mho/m;

$\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 27.7 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 1.2 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.24 mW/g

Peak SAR (extrapolated) = 1.7 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.774 mW/g

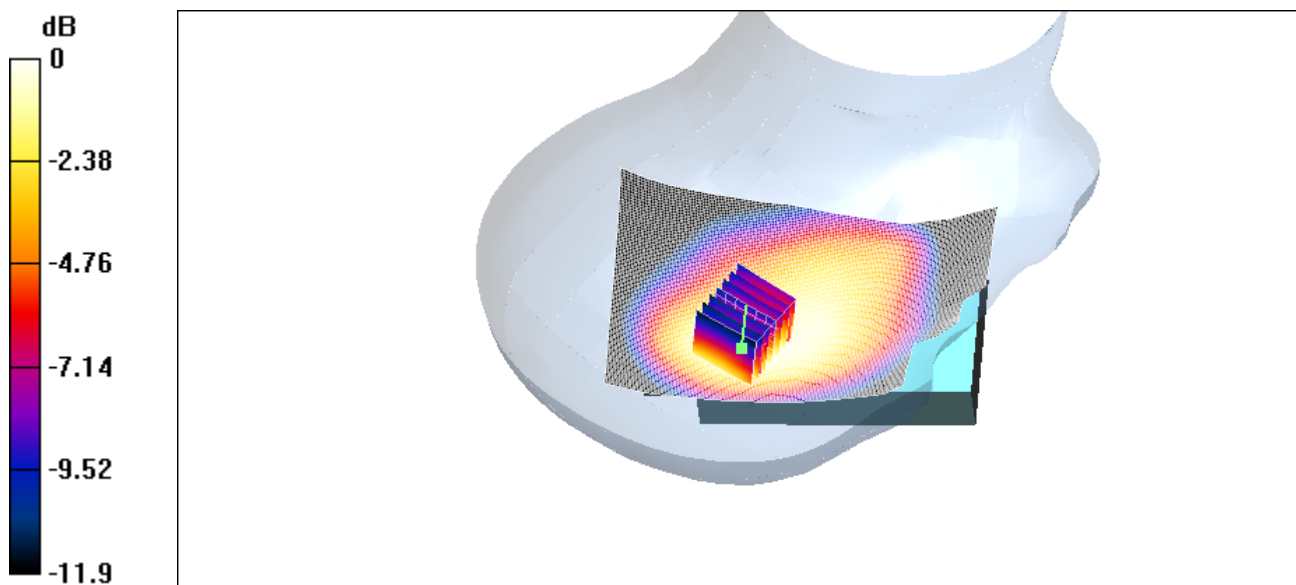

0 dB = 1.24mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_right_ch251_tilted

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.927$ mho/m;

$\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 32.1 V/m; Power Drift = 0.008 dB

Maximum value of SAR (interpolated) = 1.6 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.1 V/m; Power Drift = 0.008 dB

Maximum value of SAR (measured) = 1.62 mW/g

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 1.46 mW/g; SAR(10 g) = 0.952 mW/g

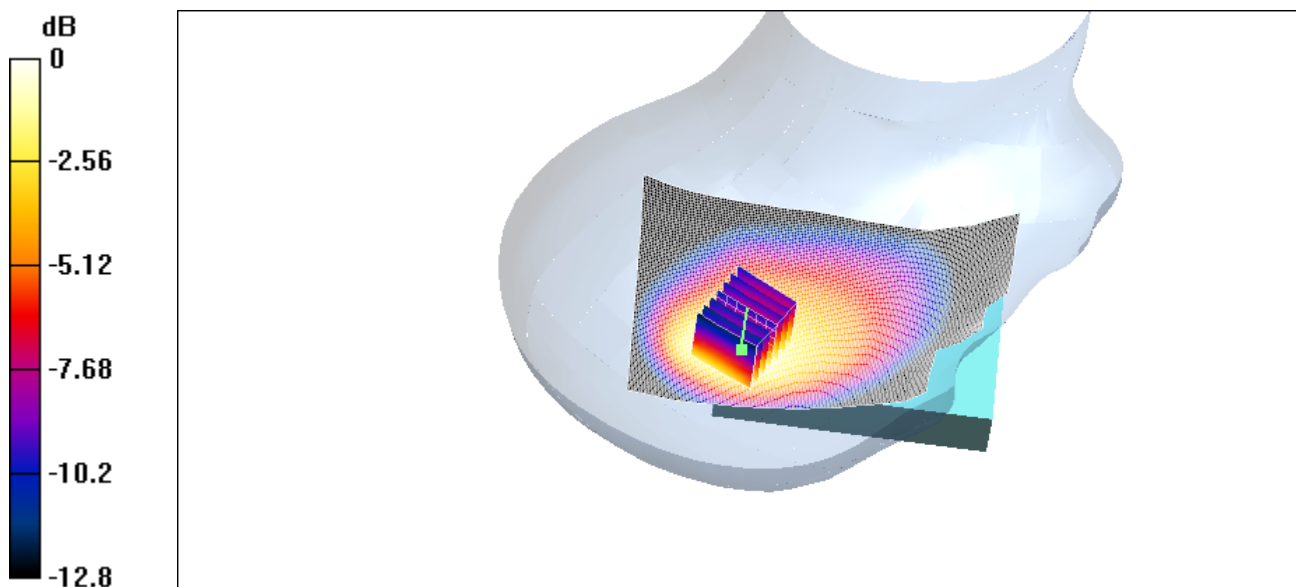

0 dB = 1.62mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_left_ch128_cheek

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.892$ mho/m;

$\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 27.8 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.650 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.8 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.674 mW/g

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.439 mW/g

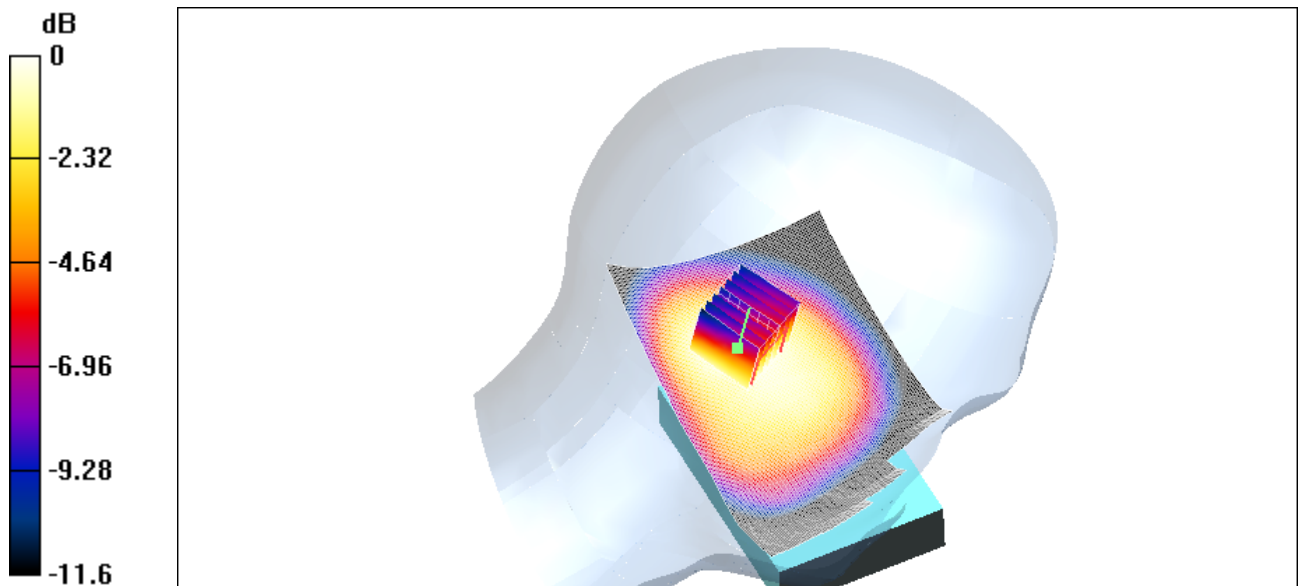

0 dB = 0.674mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_left_ch128_tilted

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.892$ mho/m;

$\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 29.2 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.755 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.2 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.761 mW/g

Peak SAR (extrapolated) = 1 W/kg

SAR(1 g) = 0.711 mW/g; SAR(10 g) = 0.486 mW/g

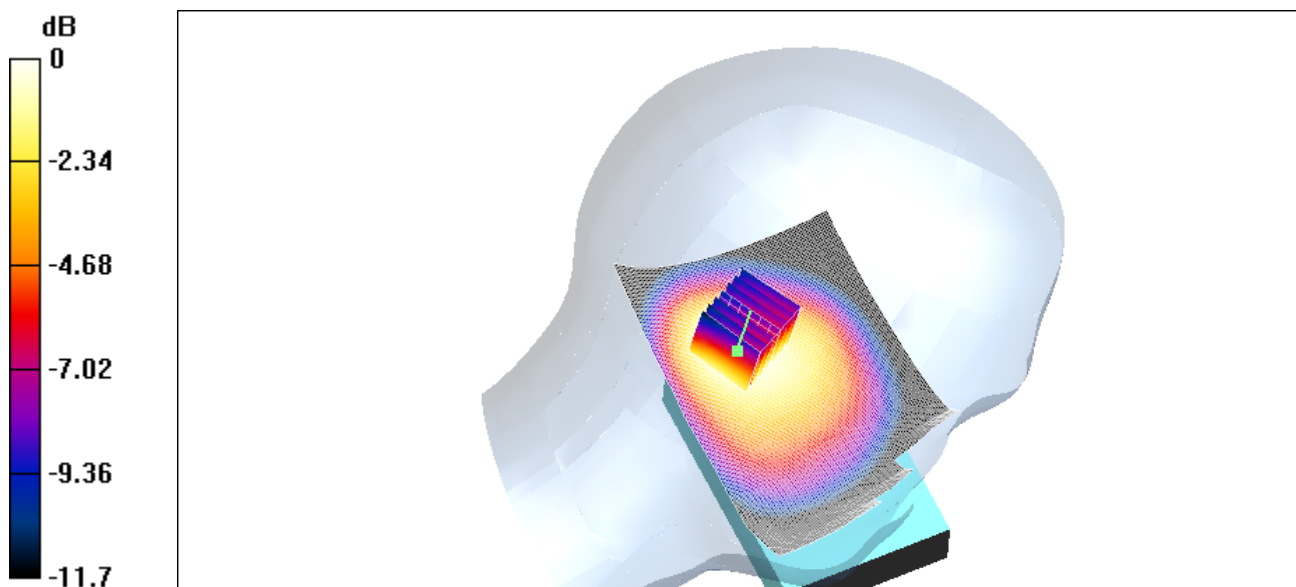

0 dB = 0.761mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_left_ch189_cheek

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.883$ mho/m;

$\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 32.3 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.867 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.3 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.882 mW/g

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.826 mW/g; SAR(10 g) = 0.585 mW/g

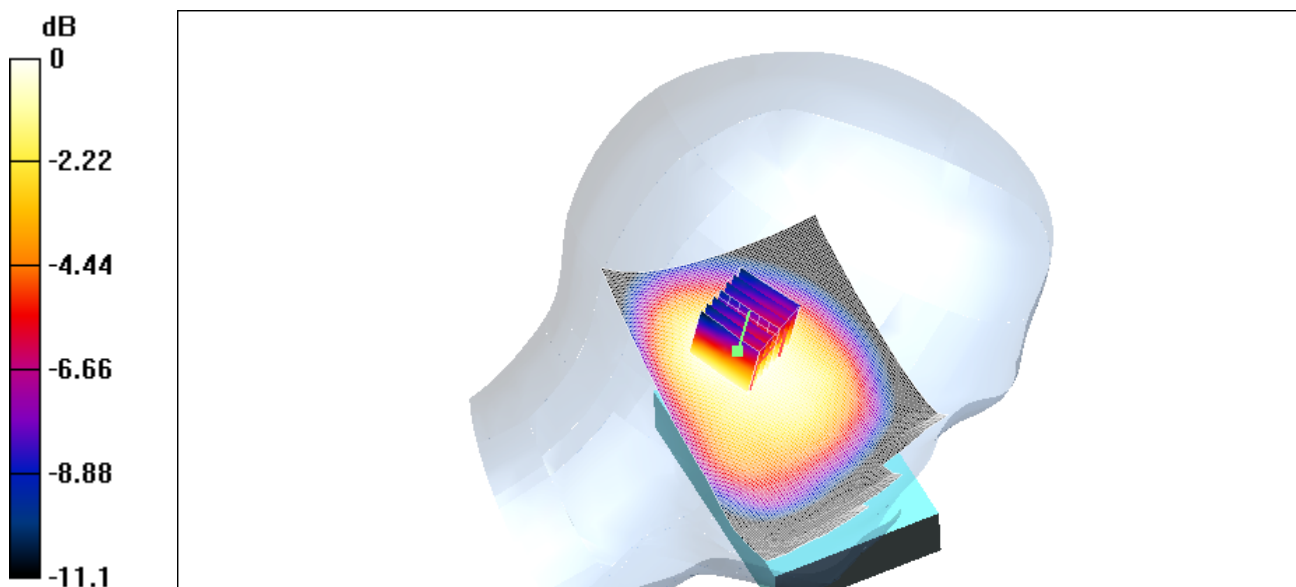

0 dB = 0.882mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_left_ch189_tilted

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.883$ mho/m;

$\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 33.5 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.969 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.5 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.974 mW/g

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.904 mW/g; SAR(10 g) = 0.621 mW/g

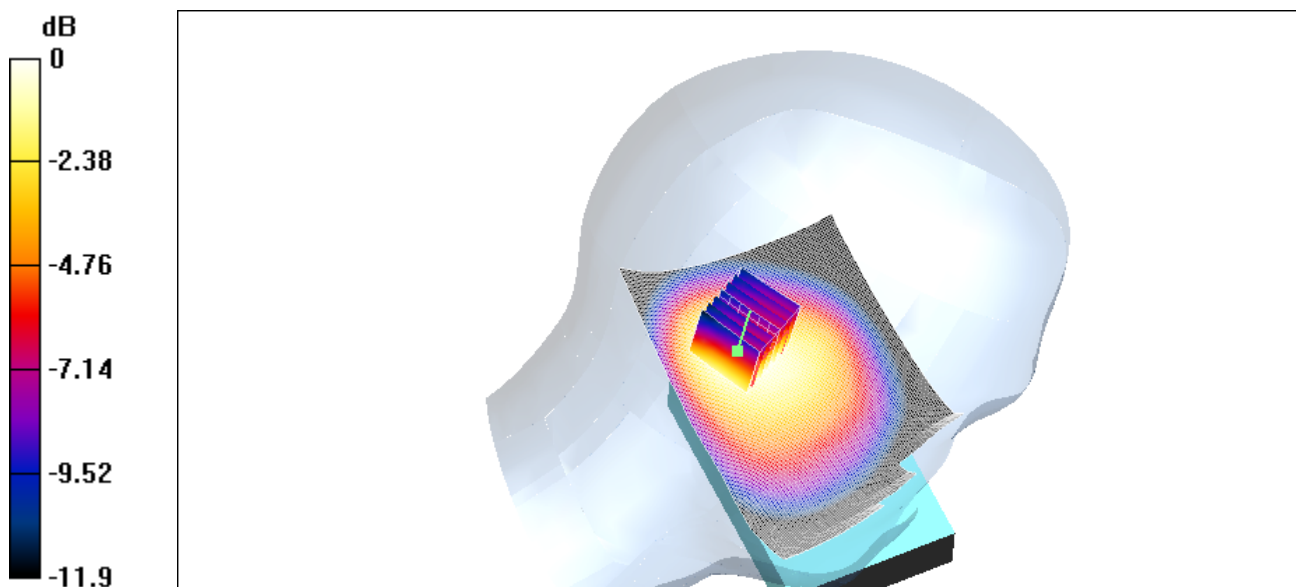

0 dB = 0.974mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_left_ch251_cheek

DUT: PDA with Quad-Band GPRS/GSM+WLAN+BT; Type: ---; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.927$ mho/m;

$\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 35 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 1.08 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.09 mW/g

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.722 mW/g

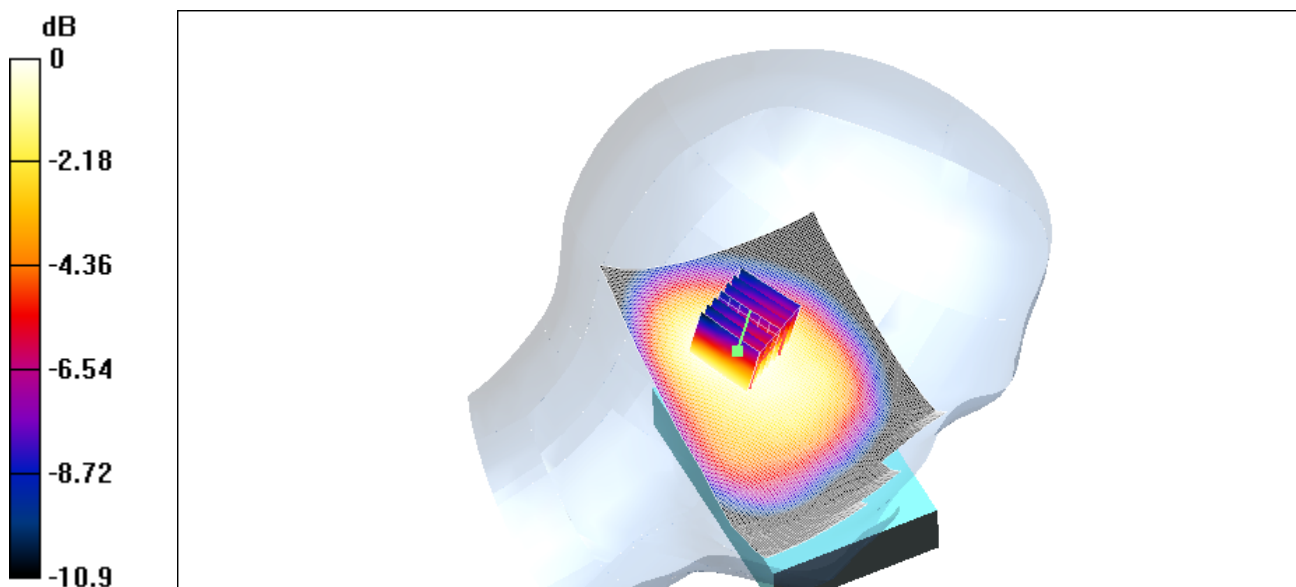

0 dB = 1.09mW/g

Test Laboratory: ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH

850_left_ch251_tilted

DUT: PDA 850/900/1800/1900/WLAN/BT; Type: -; Serial: HSTN H-C01C

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.927$ mho/m;

$\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.2, 6.2, 6.2); Calibrated: 12/16/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 1/12/2004
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

HSTN H-C01C/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 36.5 V/m; Power Drift = 0.006 dB

Maximum value of SAR (interpolated) = 1.23 mW/g


HSTN H-C01C/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.5 V/m; Power Drift = 0.006 dB

Maximum value of SAR (measured) = 1.25 mW/g

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.786 mW/g

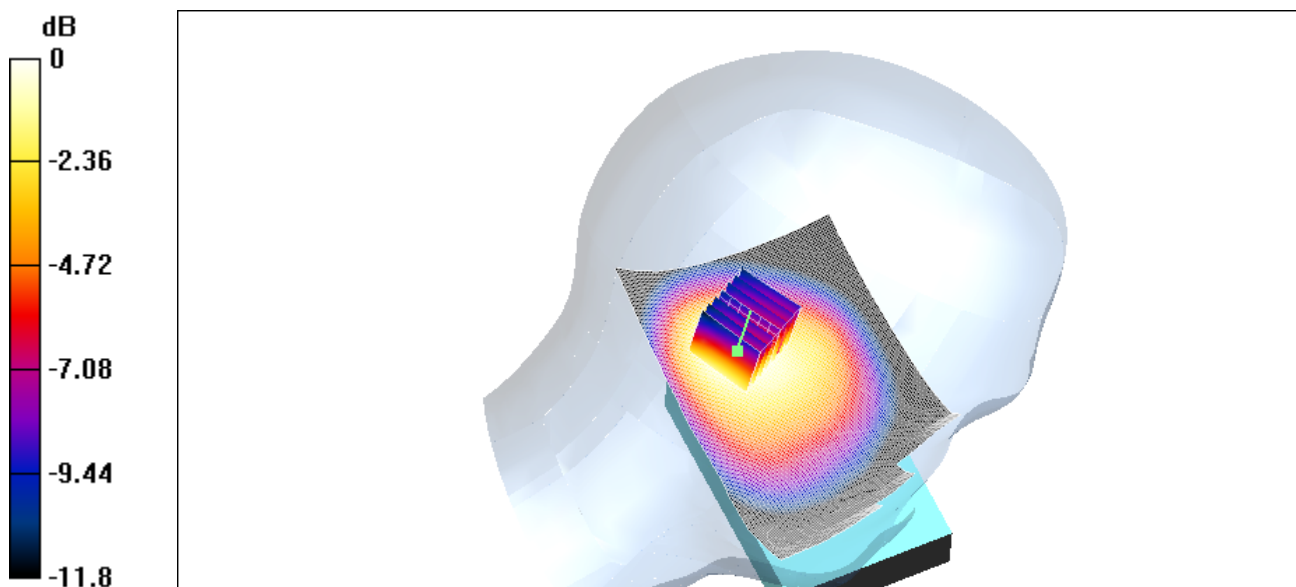

0 dB = 1.25mW/g