

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT
OF**

PDA built-in 2.4GHz Wireless module

MODEL No.: e750, e755

FCC ID: GKRPA3274U-1ETC

REPORT NO: 030006-RF-ID

ISSUE DATE: Jan. 21, 2003

Prepared for

**Compal Electronics, Inc.
NO. 581, Juikuang Rd., Neihu,
Taipei (114) Taiwan, R.O.C**

Prepared by

**C&C LABORATORY, CO., LTD.
#B1, 1st Fl., Universal Center,
No. 183, Sec. 1, Tatung Rd., Hsi Chih,
Taipei Hsien, Taiwan, R.O.C.**



TEL: (02)8642-2071~3

FAX: (02)8642-2256

VERIFICATION OF COMPLIANCE

Applicant: Compal Electronics, Inc.
NO. 581, Juikuang Rd., Neihu,
Taipei (114)Taiwan, R.O.C

Product Description: PDA built-in 2.4GHz Wireless module

Model No.: e750, e755

Model Difference The models are same except the model designed

Serial Number: N/A

File Number: 030006-RF-ID

Date of test: January 15, 2003 ~January 21, 2003

We hereby certify that:

The above equipment was tested by C&C Laboratory Co., Ltd. The test data , data evaluation , test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Approved By



Vincent Su / Vice Manager
C&C Laboratory Co., Ltd..

Table of Contents

| | | |
|-----------|--|-----------|
| 1. | GENERAL INFORMATION | 5 |
| 1.1 | PRODUCT DESCRIPTION | 5 |
| 1.2 | RELATED SUBMITTAL(S) / GRANT (S) | 5 |
| 1.3 | TEST METHODOLOGY | 5 |
| 1.4 | TEST FACILITY | 5 |
| 1.5 | SPECIAL ACCESSORIES | 5 |
| 1.6 | EQUIPMENT MODIFICATIONS..... | 5 |
| 2. | SYSTEM TEST CONFIGURATION | 6 |
| 2.1 | EUT CONFIGURATION | 6 |
| 2.2 | EUT EXERCISE | 6 |
| 2.3 | TEST PROCEDURE | 6 |
| 2.4 | CONFIGURATION OF TESTED SYSTEM | 7 |
| 3. | SUMMARY OF TEST RESULTS | 8 |
| 4. | DESCRIPTION OF TEST MODES | 8 |
| 5. | SPURIOUS EMISSION TEST | 9 |
| 5.1 | STANDARD APPLICABLE | 9 |
| 5.2 | EUT SETUP | 9 |
| 5.3 | MEASUREMENT PROCEDURE | 9 |
| 5.4 | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 10 |
| 5.5 | MEASUREMENT EQUIPMENT USED:..... | 11 |
| 5.6 | MEASUREMENT RESULT | 11 |
| 6. | AC POWER LINE CONDUCTED EMISSION TEST | 42 |
| 6.1 | STANDARD APPLICABLE | 42 |
| 6.2 | EUT SETUP | 42 |
| 6.3 | MEASUREMENT PROCEDURE | 42 |
| 6.4 | MEASUREMENT EQUIPMENT USED:..... | 43 |
| 6.5 | MEASUREMENT RESULT | 43 |
| 7. | 6 DB BANDWIDTH MEASUREMENT..... | 46 |
| 7.1 | STANDARD APPLICABLE | 46 |
| 7.2 | MEASUREMENT EQUIPMENT USED:..... | 46 |
| 7.3 | TEST SET-UP: | 46 |
| 7.4 | MEASUREMENT PROCEDURE | 47 |
| 7.5 | MEASUREMENT RESULT | 47 |
| 8. | PEAK OUTPUT POWER MEASUREMENT..... | 50 |
| 8.1 | STANDARD APPLICABLE | 50 |
| 8.2 | MEASUREMENT PROCEDURE | 50 |
| 8.3 | MEASUREMENT EQUIPMENT USED:..... | 50 |
| 8.4 | TEST RESULTS: | 50 |



| | | |
|------------|---|-----------|
| 9. | 100KHZ BANDWIDTH OF BAND EDGES MEASUREMENT | 53 |
| 9.1 | STANDARD APPLICABLE | 53 |
| 9.2 | MEASUREMENT PROCEDURE | 53 |
| 9.3 | MEASUREMENT RESULT | 53 |
| 9.4 | MEASUREMENT EQUIPMENT USED:..... | 53 |
| 10. | PEAK POWER SPECTRAL DENSITY | 55 |
| 10.1 | STANDARD APPLICABLE | 55 |
| 10.2 | MEASUREMENT PROCEDURE | 55 |
| 10.3 | MEASUREMENT RESULT | 55 |
| 10.4 | MEASUREMENT EQUIPMENT USED:..... | 55 |
| 11. | ANTENNA REQUIREMENT | 58 |
| 11.1 | STANDARD APPLICABLE | 58 |
| 11.2 | ANTENNA CONNECTED CONSTRUCTION | 58 |
| 12. | SAR MEASUREMENT | 59 |
| 12.1 | STANDARD APPLICABLE | 59 |
| 12.2 | MEASUREMENT RESULT: | 59 |

1. GENERAL INFORMATION

1.1 Product Description

Compal Electronics, Inc. Model: e750, e755 (referred to as the EUT in this report) is a PDA built-in 2.4G wireless module. The EUT is compliance with IEEE802.11b Standard.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2.412GHz – 2.462GHz; 11 channels;
- B). Transmit Power: 17dBm
- C). Modulation type: Direct Sequence Spread Spectrum, (CCK; DQPSK; DBPSK)
- D). Transition Speed: 1/2/5.5/11Mbps
- E). Antenna Designation: Metal Antenna, +2dBi; Non-User Replaceable (Fixed)
- F). Power Supply: MODEL: UP01221050A
Input: 100~240Vac 50-60Hz 0.5A; Output: 5V, 2.0A

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: GKRPA3274U-1ETC filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a DoC procedure.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (1992). Radiated testing was performed at an antenna to EUT distance 3 meters..

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of C&C Laboratory, Co., Ltd. No. 81-1, 210 Lane, Pa-de 2nd Road, Lu-Chu Hsiang, Taoyuan, Taiwan, R.O.C.. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 1992 and CISPR 22/EN 55022 requirements.

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-1992. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak / Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-1992.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

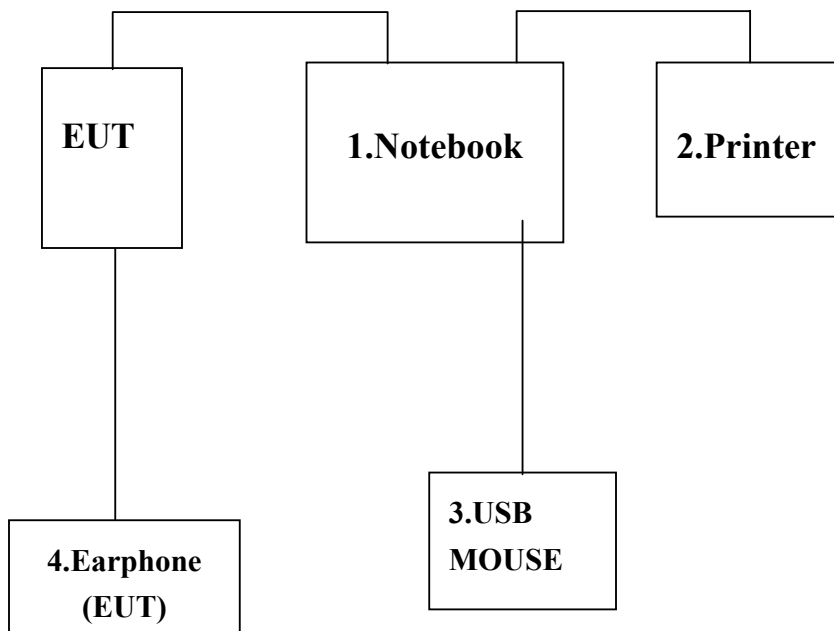


Table 2-2 Equipment Used in Tested System

| Item | Equipment | Mfr/Brand | Model/ Type No. | FCC ID | Series No. | Data Cable | Power Cord |
|------|-----------|-----------|--------------------|--------|-------------|------------------------|------------------------|
| 1 | Notebook | IBM | 2656 | N/A | AK-VF0HT | <i>Unshielded,1.0m</i> | <i>Unshielded,1.8m</i> |
| 2 | Printer | EPSON | P1114A | N/A | CAQY004717 | <i>Shielded,1.8m</i> | <i>UnShielded,1.8m</i> |
| 3 | USB/Mouse | Logitech | M-BB48 | N/A | LZE01450987 | <i>Shielded,1.8m</i> | N/A |

3. SUMMARY OF TEST RESULTS

| FCC Rules | Description Of Test | Result |
|---------------------|---|-----------|
| §15.209(a) (f) | Spurious Emission | Compliant |
| §15.207(a) | AC Power Port Conducted Emission | Compliant |
| §15.247(a)(2) | 6dB Bandwidth | Compliant |
| §15.247(b) | Peak Output Power | Compliant |
| §15.247(c) | 100 KHz Bandwidth Of Frequency Band Edges | Compliant |
| §15.247(d) | Power Density | Compliant |
| §15.203 | Antenna Requirement | Compliant |
| §1.1310 and §2.1093 | RF exposures | Compliant |

4. DESCRIPTION OF TEST MODES

The EUT (PDA built-in 2.4G wireless module) has been tested under operating condition. Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel 1(2412MHz) 、6(2437MHz) and 11(2462MHz) with 11Mbps highest data rate are chosen for full testing.

The Radiated Spurious Emission was measured as EUT (PDA)stand-up position (Y mode) lie down position(X mode) and PDA with docking, three modes.

5. SPURIOUS EMISSION TEST

5.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

5.2 EUT Setup


1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-1992.
2. The EUT was put in the front of the test table. The host PC system was placed on the center of the back edge on the test table. The peripherals like modem, monitor printer, K/B, and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The mouse was placed next to the Keyboard, flushed with the back of keyboard.
4. The spacing between the peripherals was 10 centimeters.
5. External I/O cables were draped along the edge of the test table and bundle when necessary.
6. The host PC system was connected with 110Vac/60Hz power source.

5.3 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until all frequency measured were complete.

5.4 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

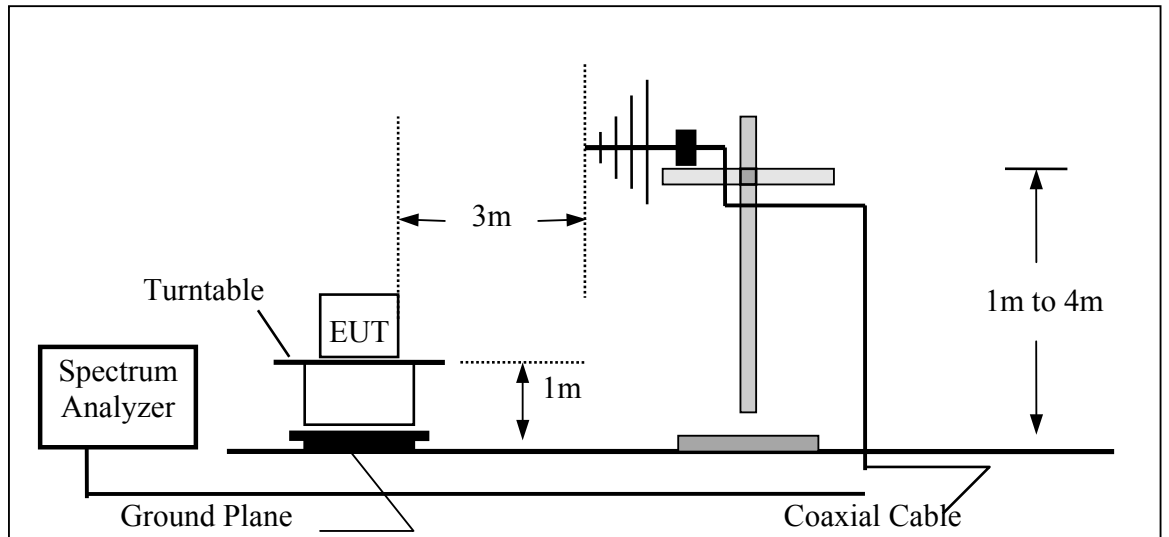

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

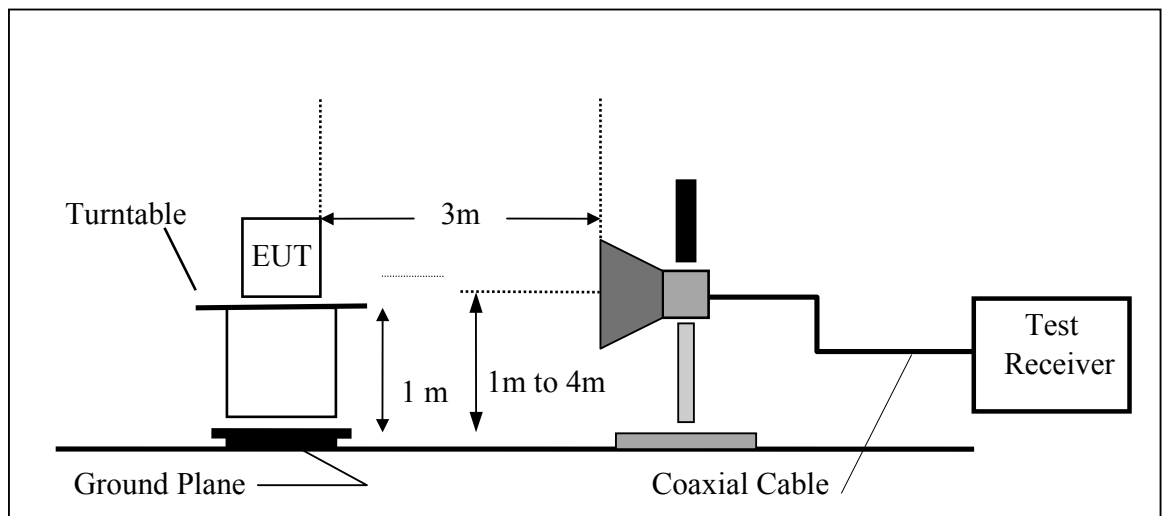

5.5 Measurement Equipment Used:

| Open Area Test Site # 3 | | | | | |
|-------------------------|-----------------|--------------|---------------|------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| Spectrum Analyzer | ADVANTEST | R3261A | N/A | 03/19/2002 | 03/18/2003 |
| Spectrum Analyzer | Advantest | R3182 | 110600647 | 11/16/2002 | 11/15/2003 |
| Spectrum Analyzer | ROHDE & SCHWARZ | FSP30 | 100112 | 06/29/2002 | 06/28/2003 |
| EMI Test Receiver | R&S | ESVS20 | 838804/004 | 01/05/2002 | 01/04/2003 |
| Pre-Amplifier | HP | 8447D | 2944A09173 | 03/04/2002 | 03/03/2003 |
| Bilog Antenna | SCHWAZBECK | VULB9163 | 145 | 07/06/2002 | 07/05/2003 |
| Turn Table | EMCO | 2081-1.21 | 9709-1885 | N.C.R | N.C.R |
| Antenna Tower | EMCO | 2075-2 | 9707-2060 | N.C.R | N.C.R |
| Controller | EMCO | 2090 | 9709-1256 | N.C.R | N.C.R |
| RF Switch | ANRITSU | MP59B | M53867 | N.C.R | N.C.R |
| Site NSA | C&C | N/A | N/A | 11/17/2002 | 11/16/2003 |
| Horn antenna | Schwarzbeck | BBHA 9120 | D210 | 2/24/2002 | 2/23/2003 |
| Pre-Amplifier | HP | 8449B | 3008B00965 | 10/01/2002 | 10/02/2003 |

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

| | | |
|-------|------------------------|--|
| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |


5.6 Measurement Result

Refer to attach tabular data sheets.

NOTE:


The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 100kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.

Conducted Spurious Emission Measurement Result CH Low 30MHz – 13GHz

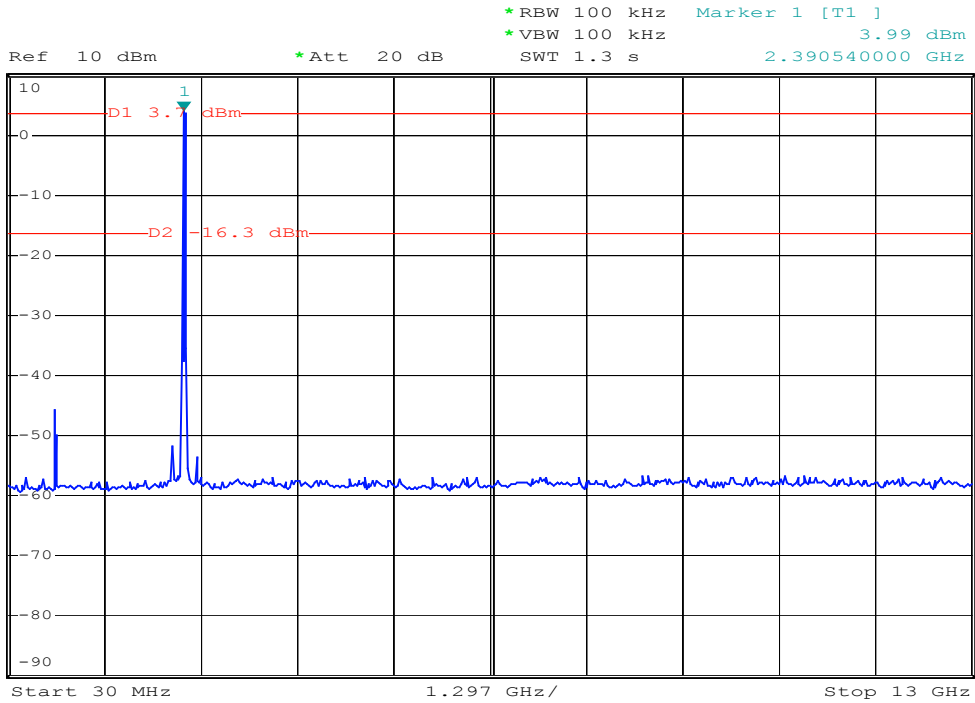

Date: 10.JAN.2003 08:59:41


CH LOW 13GHz – 26GHz

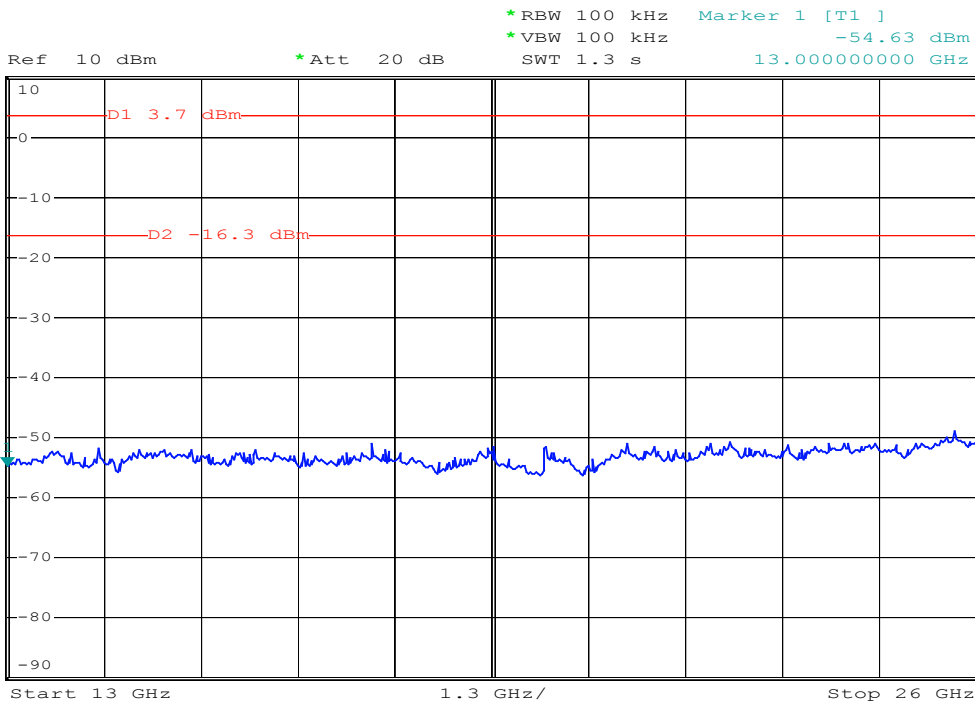

Date: 10.JAN.2003 09:01:32


Conducted Spurious Emission Measurement Result

CH MID 30MHz – 13GHz

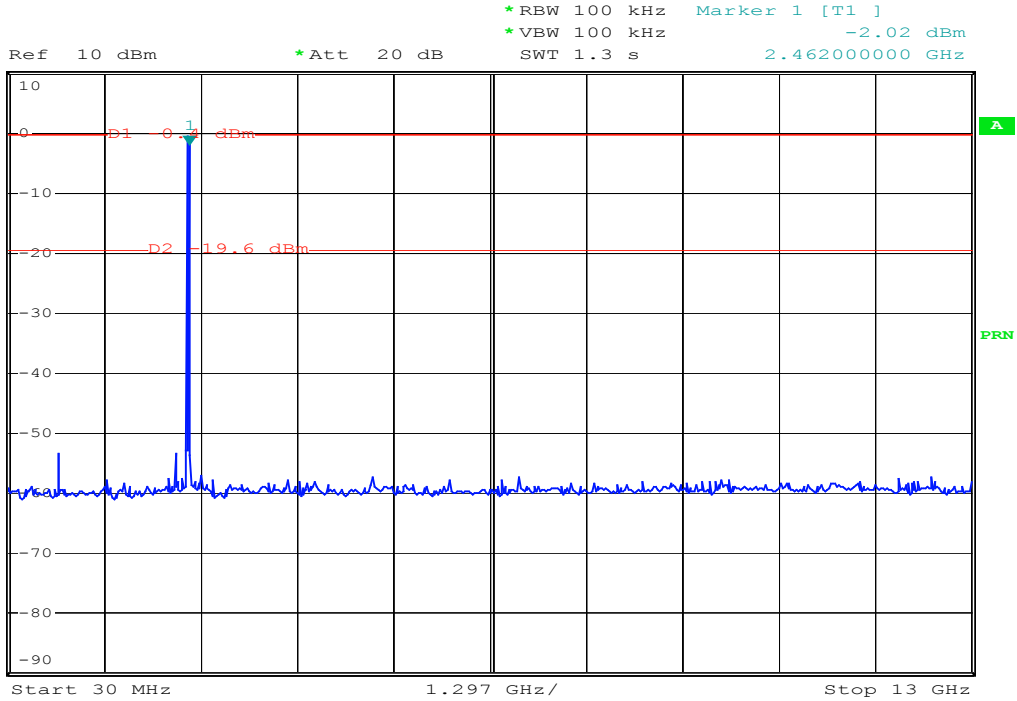

Date: 10.JAN.2003 09:15:07


CH MID 13GHz – 26GHz

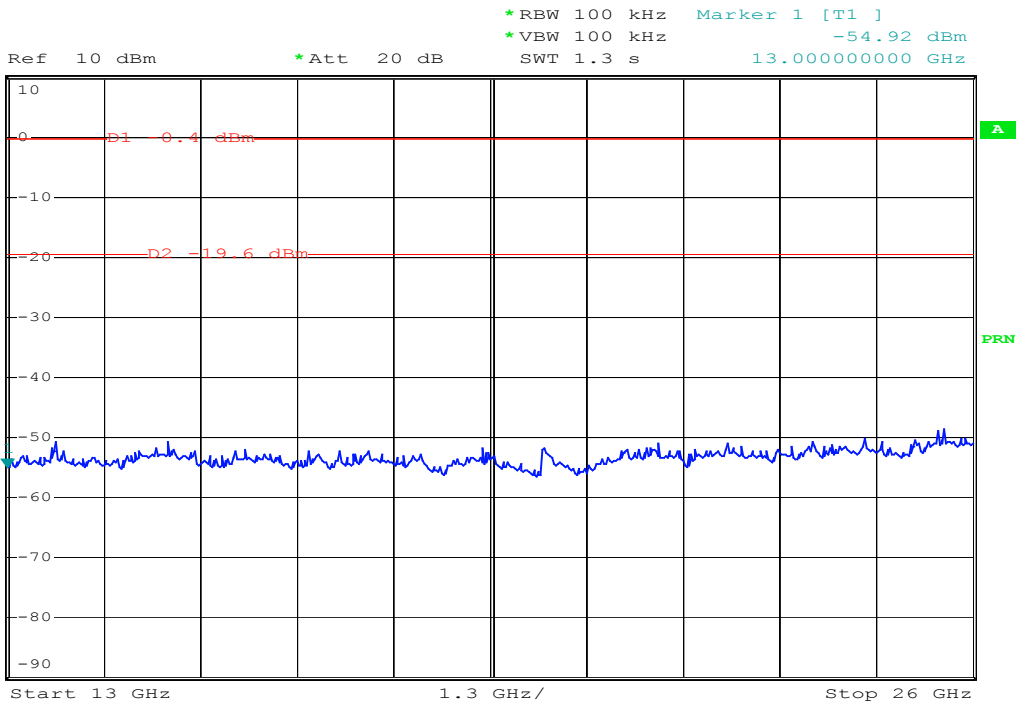

Date: 10.JAN.2003 09:15:47


Conducted Spurious Emission Measurement Result

CH HIGH 30MHz – 13GHz

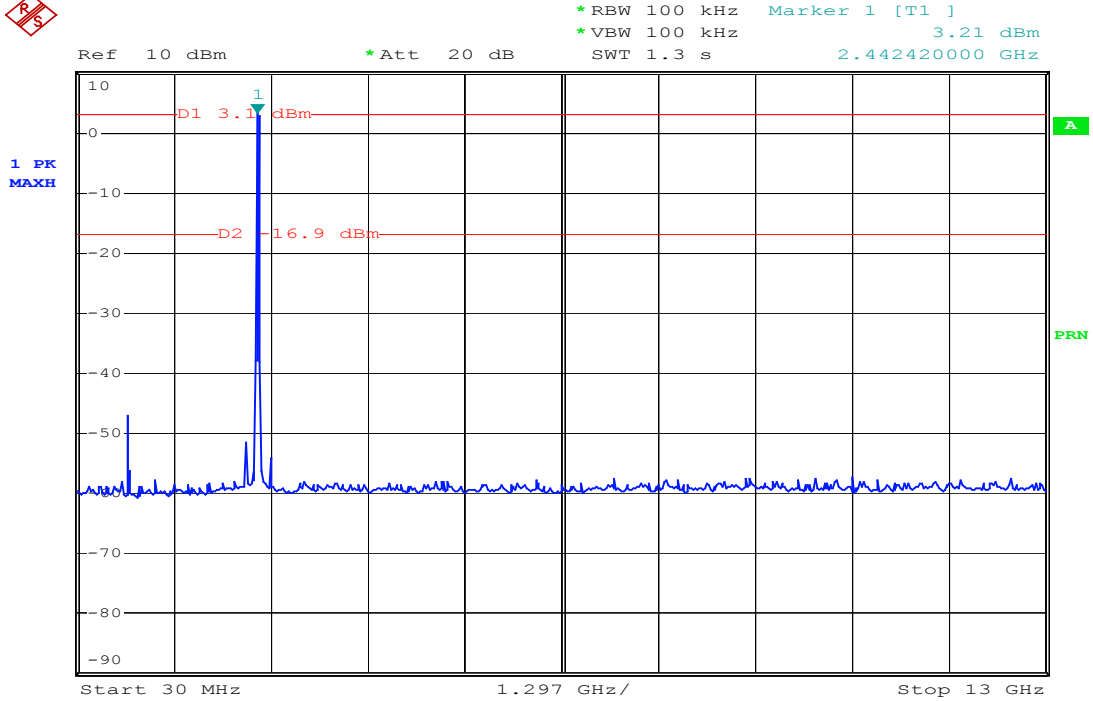

Date: 10.JAN.2003 09:06:36

CH HIGH 13GHz – 26GHz

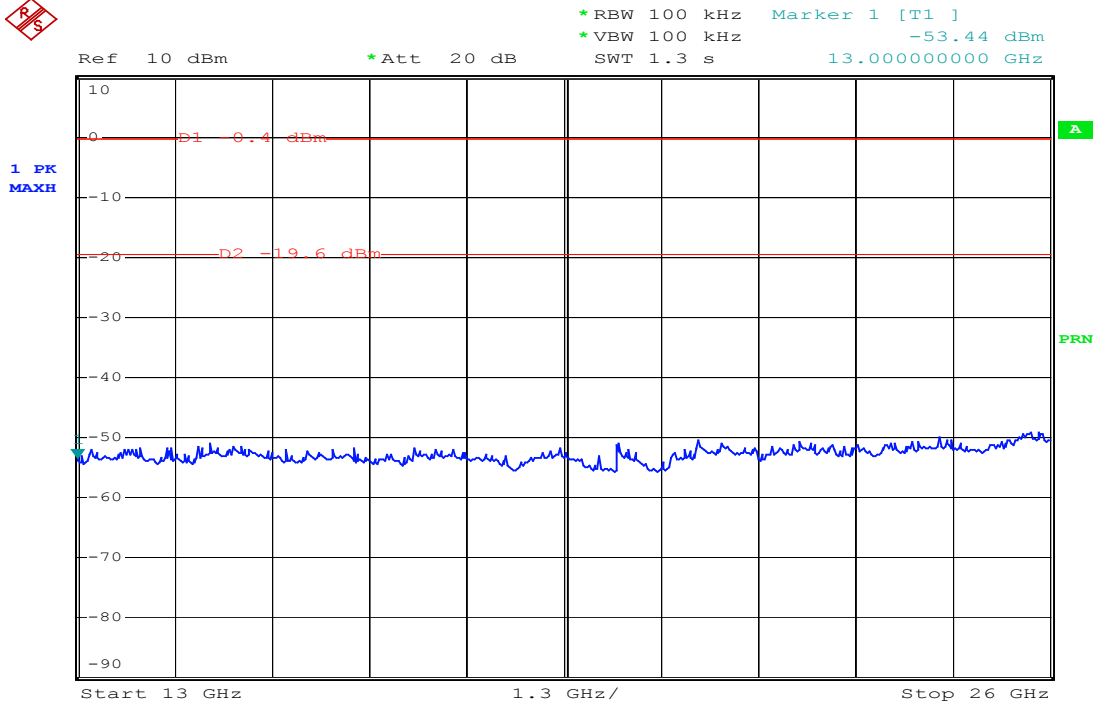

Date: 10.JAN.2003 09:19:02

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------|------------------|-------------|--------------|
| Operation Mode: | TX CH Low X Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 23 °C | Test By: | Robin |
| Humidity : | 65 % | Pol: | Ver./Hor |

| (MHz) | H/V | (PK/QP) | (dBUV) | Amp. CF(dB) | (dBUV/m) | (dBUV/m) | (dB) |
|---------|-----|---------|--------|-------------|----------|----------|--------|
| 220.350 | V | Peak | 23.51 | 15.25 | 38.76 | 46.00 | -7.24 |
| 226.200 | V | Peak | 23.96 | 15.37 | 39.33 | 46.00 | -6.67 |
| 231.600 | V | Peak | 24.04 | 15.58 | 39.62 | 46.00 | -6.38 |
| 237.450 | V | Peak | 22.71 | 15.81 | 38.52 | 46.00 | -7.48 |
| 745.660 | V | Peak | 12.38 | 25.87 | 38.25 | 46.00 | -7.75 |
| 210.900 | H | Peak | 18.26 | 15.09 | 33.35 | 43.50 | -10.15 |
| 220.350 | H | Peak | 20.18 | 15.25 | 35.43 | 46.00 | -10.57 |
| 226.650 | H | Peak | 20.45 | 15.39 | 35.84 | 46.00 | -10.16 |
| 231.600 | H | Peak | 18.87 | 15.58 | 34.45 | 46.00 | -11.55 |
| 745.660 | H | Peak | 5.05 | 25.87 | 30.92 | 46.00 | -15.08 |

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/ QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode: TX CH Mid XMode Test Date : Jan. 15 2003
 Temperature : 23 °C Test By: Robin
 Humidity : 65 % Pol: Ver./Hor

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Ant./CL/ Amp. CF(dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|-------------------------|-----------------------|---------------------|---------------------|
| 226.200 | V | Peak | 23.96 | 15.37 | 39.33 | 46.00 | -6.67 |
| 231.600 | V | Peak | 23.97 | 15.58 | 39.55 | 46.00 | -6.45 |
| 236.500 | V | Peak | 22.54 | 15.78 | 38.32 | 46.00 | -7.68 |
| 723.500 | V | Peak | 9.17 | 25.82 | 34.99 | 46.00 | -11.01 |
| 757.370 | V | Peak | 10.78 | 25.92 | 36.70 | 46.00 | -9.30 |
| 215.400 | H | Peak | 17.64 | 15.17 | 32.81 | 43.50 | -10.69 |
| 226.200 | H | Peak | 21.13 | 15.37 | 36.50 | 46.00 | -9.50 |
| 232.500 | H | Peak | 19.86 | 15.62 | 35.48 | 46.00 | -10.52 |
| 605.660 | H | Peak | 3.23 | 25.31 | 28.54 | 46.00 | -17.46 |
| 746.830 | H | Peak | 2.88 | 25.87 | 28.75 | 46.00 | -17.25 |

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/ QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------|-------------------|-------------|--------------|
| Operation Mode: | TX CH High X Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 23 °C | Test By: | Robin |
| Humidity : | 65 % | Pol: | Ver./ Hor. |

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Ant./CL/ Amp. CF(dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|-------------------------|-----------------------|---------------------|---------------------|
| 220.350 | V | Peak | 21.51 | 15.25 | 36.76 | 46.00 | -9.24 |
| 226.650 | V | Peak | 24.12 | 15.39 | 39.51 | 46.00 | -6.49 |
| 238.350 | V | Peak | 22.04 | 15.85 | 37.89 | 46.00 | -8.11 |
| 711.833 | V | Peak | 8.16 | 25.80 | 33.96 | 46.00 | -12.04 |
| 757.330 | V | Peak | 9.04 | 25.92 | 34.96 | 46.00 | -11.04 |
| 220.800 | H | Peak | 19.69 | 15.25 | 34.94 | 46.00 | -11.06 |
| 226.200 | H | Peak | 20.29 | 15.37 | 35.66 | 46.00 | -10.34 |
| 629.000 | H | Peak | 1.00 | 25.09 | 26.09 | 46.00 | -19.91 |
| 745.660 | H | Peak | 4.22 | 25.87 | 30.09 | 46.00 | -15.91 |
| 773.660 | H | Peak | 3.25 | 26.00 | 29.25 | 46.00 | -16.75 |

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/ QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------|------------------|-------------|--------------|
| Operation Mode: | TX CH Low Y Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 23 °C | Test By: | Robin |
| Humidity : | 65 % | Pol: | Ver./Hor |

| (MHz) | H/V | (PK/QP) | (dBuV) | Amp. CF(dB) | (dBuV/m) | (dBuV/m) | (dB) |
|---------|-----|---------|--------|-------------|----------|----------|--------|
| 220.350 | V | Peak | 23.51 | 15.25 | 38.76 | 46.00 | -7.24 |
| 226.200 | V | Peak | 23.96 | 15.37 | 39.33 | 46.00 | -6.67 |
| 231.600 | V | Peak | 24.04 | 15.58 | 39.62 | 46.00 | -6.38 |
| 237.450 | V | Peak | 22.71 | 15.81 | 38.52 | 46.00 | -7.48 |
| 745.660 | V | Peak | 12.38 | 25.87 | 38.25 | 46.00 | -7.75 |
| 210.900 | H | Peak | 18.26 | 15.09 | 33.35 | 43.50 | -10.15 |
| 220.350 | H | Peak | 20.18 | 15.25 | 35.43 | 46.00 | -10.57 |
| 226.650 | H | Peak | 20.45 | 15.39 | 35.84 | 46.00 | -10.16 |
| 231.600 | H | Peak | 18.87 | 15.58 | 34.45 | 46.00 | -11.55 |
| 745.660 | H | Peak | 5.05 | 25.87 | 30.92 | 46.00 | -15.08 |

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/ QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode: TX CH Mid Y Mode Test Date : Jan. 15 2003
 Temperature : 23 °C Test By: Robin
 Humidity : 65 % Pol: Ver./Hor

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Ant./CL/ Amp. CF(dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|-------------------------|-----------------------|---------------------|---------------------|
| 226.200 | V | Peak | 23.96 | 15.37 | 39.33 | 46.00 | -6.67 |
| 231.600 | V | Peak | 23.97 | 15.58 | 39.55 | 46.00 | -6.45 |
| 236.500 | V | Peak | 22.54 | 15.78 | 38.32 | 46.00 | -7.68 |
| 723.500 | V | Peak | 9.17 | 25.82 | 34.99 | 46.00 | -11.01 |
| 757.370 | V | Peak | 10.78 | 25.92 | 36.70 | 46.00 | -9.30 |
| 215.400 | H | Peak | 17.64 | 15.17 | 32.81 | 43.50 | -10.69 |
| 226.200 | H | Peak | 21.13 | 15.37 | 36.50 | 46.00 | -9.50 |
| 232.500 | H | Peak | 19.86 | 15.62 | 35.48 | 46.00 | -10.52 |
| 605.660 | H | Peak | 3.23 | 25.31 | 28.54 | 46.00 | -17.46 |
| 746.830 | H | Peak | 2.88 | 25.87 | 28.75 | 46.00 | -17.25 |

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/ QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------|-------------------|-------------|--------------|
| Operation Mode: | TX CH High Y Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 23 °C | Test By: | Robin |
| Humidity : | 65 % | Pol: | Ver./Hor. |

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Ant./CL/ Amp. CF(dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|-------------------------|-----------------------|---------------------|---------------------|
| 220.350 | V | Peak | 21.51 | 15.25 | 36.76 | 46.00 | -9.24 |
| 226.650 | V | Peak | 24.12 | 15.39 | 39.51 | 46.00 | -6.49 |
| 238.350 | V | Peak | 22.04 | 15.85 | 37.89 | 46.00 | -8.11 |
| 711.833 | V | Peak | 8.16 | 25.80 | 33.96 | 46.00 | -12.04 |
| 757.330 | V | Peak | 9.04 | 25.92 | 34.96 | 46.00 | -11.04 |
| 220.800 | H | Peak | 19.69 | 15.25 | 34.94 | 46.00 | -11.06 |
| 226.200 | H | Peak | 20.29 | 15.37 | 35.66 | 46.00 | -10.34 |
| 629.000 | H | Peak | 1.00 | 25.09 | 26.09 | 46.00 | -19.91 |
| 745.660 | H | Peak | 4.22 | 25.87 | 30.09 | 46.00 | -15.91 |
| 773.660 | H | Peak | 3.25 | 26.00 | 29.25 | 46.00 | -16.75 |

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/ QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode: TX CH Low Docking Mode Test Date : Jan. 15 2003
 Temperature : 23 °C Test By: Robin
 Humidity : 65 % Pol: Ver./Hor

| (MHz) | H/V | (PK/QP) | (dBUV) | Amp. CF(dB) | (dBUV/m) | (dBUV/m) | (dB) |
|---------|-----|---------|--------|-------------|----------|----------|-------|
| 115.500 | V | Peak | 25.13 | 12.15 | 37.28 | 43.50 | -6.22 |
| 132.150 | V | Peak | 26.38 | 11.14 | 37.52 | 43.50 | -5.98 |
| 540.330 | V | Peak | 17.45 | 23.94 | 41.39 | 46.00 | -4.61 |
| 578.833 | V | Peak | 12.81 | 24.91 | 37.72 | 46.00 | -8.28 |
| 802.833 | V | Peak | 14.73 | 26.20 | 40.93 | 46.00 | -5.07 |
| 115.500 | H | Peak | 23.31 | 12.15 | 35.46 | 43.50 | -8.04 |
| 168.150 | H | Peak | 26.49 | 12.01 | 38.50 | 43.50 | -5.00 |
| 179.850 | H | Peak | 25.42 | 12.92 | 38.34 | 43.50 | -5.16 |
| 240.380 | H | Peak | 22.37 | 15.93 | 38.30 | 46.00 | -7.70 |
| 431.833 | H | Peak | 16.56 | 20.37 | 36.93 | 46.00 | -9.07 |

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/ QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode: TX CH Mid Docking Mode Test Date : Jan. 15 2003
 Temperature : 23 °C Test By: Robin
 Humidity : 65 % Pol: Ver./Hor

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Ant./CL/ Amp. CF(dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|-------------------------|-----------------------|---------------------|---------------------|
| 115.500 | V | Peak | 23.97 | 12.15 | 36.12 | 43.50 | -7.38 |
| 132.150 | V | Peak | 26.11 | 11.14 | 37.25 | 43.50 | -6.25 |
| 240.150 | V | Peak | 22.97 | 15.92 | 38.89 | 46.00 | -7.11 |
| 399.167 | V | Peak | 18.89 | 20.68 | 39.57 | 46.00 | -6.43 |
| 802.833 | V | Peak | 15.17 | 26.20 | 41.37 | 46.00 | -4.63 |
| 132.150 | H | Peak | 23.75 | 11.14 | 34.89 | 43.50 | -8.61 |
| 168.150 | H | Peak | 21.13 | 12.01 | 33.14 | 43.50 | -10.36 |
| 179.850 | H | Peak | 23.65 | 12.92 | 36.57 | 43.50 | -6.93 |
| 240.150 | H | Peak | 22.01 | 22.01 | 44.02 | 46.00 | -1.98 |
| 541.500 | H | Peak | 12.91 | 23.98 | 36.89 | 46.00 | -9.11 |
| 801.666 | H | Peak | 12.29 | 26.18 | 38.47 | 46.00 | -7.53 |

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/ QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|-----------------|-------------------------|-------------|--------------|
| Operation Mode: | TX CH High Docking Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 23 °C | Test By: | Robin |
| Humidity : | 65 % | Pol: | Ver./ Hor. |

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Ant./CL/ Amp. CF(dB) | Actual FS (dBuV/m) | Limit3m (dBuV/m) | Safe Margin (dB) |
|----------------|-----------------|-----------------------------|-------------------|-------------------------|-----------------------|---------------------|---------------------|
| 115.500 | V | Peak | 23.03 | 12.15 | 35.18 | 43.50 | -8.32 |
| 168.150 | V | Peak | 26.13 | 12.01 | 38.14 | 43.50 | -5.36 |
| 179.850 | V | Peak | 26.26 | 12.92 | 39.18 | 43.50 | -4.32 |
| 240.150 | V | Peak | 22.96 | 15.92 | 38.88 | 46.00 | -7.12 |
| 541.500 | V | Peak | 12.81 | 23.98 | 36.79 | 46.00 | -9.21 |
| 115.500 | H | Peak | 23.37 | 12.15 | 35.52 | 43.50 | -7.98 |
| 168.380 | H | Peak | 24.38 | 12.03 | 36.41 | 43.50 | -7.09 |
| 179.850 | H | Peak | 25.99 | 12.92 | 38.91 | 43.50 | -4.59 |
| 240.150 | H | Peak | 21.71 | 15.92 | 37.63 | 46.00 | -8.37 |
| 801.660 | H | Peak | 12.58 | 26.18 | 38.76 | 46.00 | -7.24 |

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz °
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/ QP detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX CH Low X Mode Test Date : Jan. 15 2003
 Temperature : 23 °C Test By: Robin
 Humidity : 65 % Pol: Vertical

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 4820 | -- | | | | | 74.00 | 54.00 | |
| 7236 | -- | | | | | 74.00 | 54.00 | |
| 9648 | -- | | | | | 74.00 | 54.00 | |
| 12060 | -- | | | | | 74.00 | 54.00 | |
| 14472 | -- | | | | | 74.00 | 54.00 | |
| 16884 | -- | | | | | 74.00 | 54.00 | |
| 19296 | -- | | | | | 74.00 | 54.00 | |
| 21708 | -- | | | | | 74.00 | 54.00 | |
| 24120 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX CH Low X Mode Test Date : Jan. 15 2003
 Temperature : 22 °C Test By: Robin
 Humidity : 65% Pol: Horizontal

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 4820 | -- | | | | | 74.00 | 54.00 | |
| 7236 | -- | | | | | 74.00 | 54.00 | |
| 9648 | -- | | | | | 74.00 | 54.00 | |
| 12060 | -- | | | | | 74.00 | 54.00 | |
| 14472 | -- | | | | | 74.00 | 54.00 | |
| 16884 | -- | | | | | 74.00 | 54.00 | |
| 19296 | -- | | | | | 74.00 | 54.00 | |
| 21708 | -- | | | | | 74.00 | 54.00 | |
| 24120 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|------------------|-------------|--------------|
| Operation Mode: | TX CH Mid X Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Vertical |

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 4866 | -- | | | | | 74.00 | 54.00 | |
| 7332 | -- | | | | | 74.00 | 54.00 | |
| 9776 | -- | | | | | 74.00 | 54.00 | |
| 12220 | -- | | | | | 74.00 | 54.00 | |
| 14664 | -- | | | | | 74.00 | 54.00 | |
| 17108 | -- | | | | | 74.00 | 54.00 | |
| 19552 | -- | | | | | 74.00 | 54.00 | |
| 21996 | -- | | | | | 74.00 | 54.00 | |
| 24440 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|------------------|-------------|--------------|
| Operation Mode: | TX CH Mid X Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Horizontal |

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 4866 | -- | | | | | 74.00 | 54.00 | |
| 7332 | -- | | | | | 74.00 | 54.00 | |
| 9776 | -- | | | | | 74.00 | 54.00 | |
| 12220 | -- | | | | | 74.00 | 54.00 | |
| 14664 | -- | | | | | 74.00 | 54.00 | |
| 17108 | -- | | | | | 74.00 | 54.00 | |
| 19552 | -- | | | | | 74.00 | 54.00 | |
| 21996 | -- | | | | | 74.00 | 54.00 | |
| 24440 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|-------------------|-------------|--------------|
| Operation Mode: | TX CH High X Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Vertital |

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 4920 | -- | | | | | 74.00 | 54.00 | |
| 7386 | -- | | | | | 74.00 | 54.00 | |
| 9848 | -- | | | | | 74.00 | 54.00 | |
| 12310 | -- | | | | | 74.00 | 54.00 | |
| 14772 | -- | | | | | 74.00 | 54.00 | |
| 17234 | -- | | | | | 74.00 | 54.00 | |
| 19696 | -- | | | | | 74.00 | 54.00 | |
| 22158 | -- | | | | | 74.00 | 54.00 | |
| 24620 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|----------------|-------------|--------------|
| Operation Mode: | TX High X Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Horizontal |

| Freq. (MHz) | Peak Reading (dBuV) | AV Reading (dBuV) | Ant./CL CF(dB) | Actual FS | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) |
|----------------|---------------------------|-------------------------|-------------------|------------------|----------------|---------------------------|-------------------------|----------------|
| | | | | Peak (dBuV/m) | AV (dBuV/m) | | | |
| 4920 | -- | | | | | 74.00 | 54.00 | |
| 7386 | -- | | | | | 74.00 | 54.00 | |
| 9848 | -- | | | | | 74.00 | 54.00 | |
| 12310 | -- | | | | | 74.00 | 54.00 | |
| 14772 | -- | | | | | 74.00 | 54.00 | |
| 17234 | -- | | | | | 74.00 | 54.00 | |
| 19696 | -- | | | | | 74.00 | 54.00 | |
| 22158 | -- | | | | | 74.00 | 54.00 | |
| 24620 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|------------------|-------------|--------------|
| Operation Mode: | TX CH Low Y Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 23 °C | Test By: | Robin |
| Humidity : | 65 % | Pol: | Vertical |

| Freq. (MHz) | Peak Reading (dBuV) | AV Reading (dBuV) | Ant./CL CF(dB) | Actual FS | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) |
|----------------|---------------------------|-------------------------|-------------------|------------------|----------------|---------------------------|-------------------------|----------------|
| | | | | Peak (dBuV/m) | AV (dBuV/m) | | | |
| 4820 | -- | | | | | 74.00 | 54.00 | |
| 7236 | -- | | | | | 74.00 | 54.00 | |
| 9648 | -- | | | | | 74.00 | 54.00 | |
| 12060 | -- | | | | | 74.00 | 54.00 | |
| 14472 | -- | | | | | 74.00 | 54.00 | |
| 16884 | -- | | | | | 74.00 | 54.00 | |
| 19296 | -- | | | | | 74.00 | 54.00 | |
| 21708 | -- | | | | | 74.00 | 54.00 | |
| 24120 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX CH Low Y Mode Test Date : Jan. 15 2003
 Temperature : 22 °C Test By: Robin
 Humidity : 65% Pol: Horizontal

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 4820 | -- | | | | | 74.00 | 54.00 | |
| 7236 | -- | | | | | 74.00 | 54.00 | |
| 9648 | -- | | | | | 74.00 | 54.00 | |
| 12060 | -- | | | | | 74.00 | 54.00 | |
| 14472 | -- | | | | | 74.00 | 54.00 | |
| 16884 | -- | | | | | 74.00 | 54.00 | |
| 19296 | -- | | | | | 74.00 | 54.00 | |
| 21708 | -- | | | | | 74.00 | 54.00 | |
| 24120 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|------------------|-------------|--------------|
| Operation Mode: | TX CH Mid Y Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Vertical |

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 4866 | -- | | | | | 74.00 | 54.00 | |
| 7332 | -- | | | | | 74.00 | 54.00 | |
| 9776 | -- | | | | | 74.00 | 54.00 | |
| 12220 | -- | | | | | 74.00 | 54.00 | |
| 14664 | -- | | | | | 74.00 | 54.00 | |
| 17108 | -- | | | | | 74.00 | 54.00 | |
| 19552 | -- | | | | | 74.00 | 54.00 | |
| 21996 | -- | | | | | 74.00 | 54.00 | |
| 24440 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|------------------|-------------|--------------|
| Operation Mode: | TX CH Mid Y Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Horizontal |

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 4866 | -- | | | | | 74.00 | 54.00 | |
| 7332 | -- | | | | | 74.00 | 54.00 | |
| 9776 | -- | | | | | 74.00 | 54.00 | |
| 12220 | -- | | | | | 74.00 | 54.00 | |
| 14664 | -- | | | | | 74.00 | 54.00 | |
| 17108 | -- | | | | | 74.00 | 54.00 | |
| 19552 | -- | | | | | 74.00 | 54.00 | |
| 21996 | -- | | | | | 74.00 | 54.00 | |
| 24440 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|-------------------|-------------|--------------|
| Operation Mode: | TX CH High Y Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Vertical |

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 4920 | -- | | | | | 74.00 | 54.00 | |
| 7386 | -- | | | | | 74.00 | 54.00 | |
| 9848 | -- | | | | | 74.00 | 54.00 | |
| 12310 | -- | | | | | 74.00 | 54.00 | |
| 14772 | -- | | | | | 74.00 | 54.00 | |
| 17234 | -- | | | | | 74.00 | 54.00 | |
| 19696 | -- | | | | | 74.00 | 54.00 | |
| 22158 | -- | | | | | 74.00 | 54.00 | |
| 24620 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|-------------------|-------------|--------------|
| Operation Mode: | TX CH High Y Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Horizontal |

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 4920 | -- | | | | | 74.00 | 54.00 | |
| 7386 | -- | | | | | 74.00 | 54.00 | |
| 9848 | -- | | | | | 74.00 | 54.00 | |
| 12310 | -- | | | | | 74.00 | 54.00 | |
| 14772 | -- | | | | | 74.00 | 54.00 | |
| 17234 | -- | | | | | 74.00 | 54.00 | |
| 19696 | -- | | | | | 74.00 | 54.00 | |
| 22158 | -- | | | | | 74.00 | 54.00 | |
| 24620 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX CH Low Docking Mode Test Date : Jan. 15 2003
 Temperature : 23 °C Test By: Robin
 Humidity : 65 % Pol: Vertical

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 1063.0 | 49.84 | | -11.53 | 38.31 | | 74.00 | 54.00 | -15.69 Peak |
| 1126.0 | 50.00 | | -11.10 | 38.90 | | 74.00 | 54.00 | -15.10 Peak |
| 1196.0 | 57.29 | | -10.65 | 46.64 | | 74.00 | 54.00 | -7.36 Peak |
| 1460.0 | 52.00 | | -9.64 | 42.36 | | 74.00 | 54.00 | -11.64 Peak |
| 1590.0 | 52.17 | | -9.00 | 43.17 | | 74.00 | 54.00 | -10.83 Peak |
| 4820 | -- | | | | | 74.00 | 54.00 | |
| 7236 | -- | | | | | 74.00 | 54.00 | |
| 9648 | -- | | | | | 74.00 | 54.00 | |
| 12060 | -- | | | | | 74.00 | 54.00 | |
| 14472 | -- | | | | | 74.00 | 54.00 | |
| 16884 | -- | | | | | 74.00 | 54.00 | |
| 19296 | -- | | | | | 74.00 | 54.00 | |
| 21708 | -- | | | | | 74.00 | 54.00 | |
| 24120 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX CH Low Docking Mode Test Date : Jan. 15 2003
 Temperature : 22 °C Test By: Robin
 Humidity : 65% Pol: Horizontal

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 1063.0 | 51.63 | | -11.53 | 40.10 | | 74.00 | 54.00 | -13.90 Peak |
| 1196.0 | 57.29 | | -10.65 | 46.64 | | 74.00 | 54.00 | -7.36 Peak |
| 1460.0 | 56.47 | | -9.64 | 46.83 | | 74.00 | 54.00 | -7.17 Peak |
| 4820 | -- | | | | | 74.00 | 54.00 | |
| 7236 | -- | | | | | 74.00 | 54.00 | |
| 9648 | -- | | | | | 74.00 | 54.00 | |
| 12060 | -- | | | | | 74.00 | 54.00 | |
| 14472 | -- | | | | | 74.00 | 54.00 | |
| 16884 | -- | | | | | 74.00 | 54.00 | |
| 19296 | -- | | | | | 74.00 | 54.00 | |
| 21708 | -- | | | | | 74.00 | 54.00 | |
| 24120 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|------------------------|-------------|--------------|
| Operation Mode: | TX CH Mid Docking Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Vertical |

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) | |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | | |
| 1063.0 | 48.57 | | -11.53 | 37.04 | | 74.00 | 54.00 | -16.96 | Peak |
| 1126.0 | 51.24 | | -11.10 | 40.14 | | 74.00 | 54.00 | -13.86 | Peak |
| 1196.0 | 56.15 | | -10.65 | 45.50 | | 74.00 | 54.00 | -8.50 | Peak |
| 1460.0 | 51.28 | | -9.64 | 41.64 | | 74.00 | 54.00 | -12.36 | Peak |
| 1590.0 | 53.14 | | -9.00 | 44.14 | | 74.00 | 54.00 | -9.86 | Peak |
| 4866 | -- | | | | | 74.00 | 54.00 | | |
| 7332 | -- | | | | | 74.00 | 54.00 | | |
| 9776 | -- | | | | | 74.00 | 54.00 | | |
| 12220 | -- | | | | | 74.00 | 54.00 | | |
| 14664 | -- | | | | | 74.00 | 54.00 | | |
| 17108 | -- | | | | | 74.00 | 54.00 | | |
| 19552 | -- | | | | | 74.00 | 54.00 | | |
| 21996 | -- | | | | | 74.00 | 54.00 | | |
| 24440 | -- | | | | | 74.00 | 54.00 | | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|------------------------|-------------|--------------|
| Operation Mode: | TX CH Mid Docking Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Horizontal |

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) | |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | | |
| 1063.0 | 54.98 | | -11.53 | 43.45 | | 74.00 | 54.00 | -10.55 | Peak |
| 1196.0 | 57.15 | | -10.65 | 46.50 | | 74.00 | 54.00 | -7.50 | Peak |
| 1460.0 | 56.43 | | -9.64 | 46.79 | | 74.00 | 54.00 | -7.21 | Peak |
| 4866 | -- | | | | | 74.00 | 54.00 | | |
| 7332 | -- | | | | | 74.00 | 54.00 | | |
| 9776 | -- | | | | | 74.00 | 54.00 | | |
| 12220 | -- | | | | | 74.00 | 54.00 | | |
| 14664 | -- | | | | | 74.00 | 54.00 | | |
| 17108 | -- | | | | | 74.00 | 54.00 | | |
| 19552 | -- | | | | | 74.00 | 54.00 | | |
| 21996 | -- | | | | | 74.00 | 54.00 | | |
| 24440 | -- | | | | | 74.00 | 54.00 | | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX CH High Docking Mode Test Date : Jan. 15 2003
 Temperature : 22 °C Test By: Robin
 Humidity : 65% Pol: Vertital

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 1063.0 | 47.89 | | -11.53 | 36.36 | | 74.00 | 54.00 | -17.64 Peak |
| 1126.0 | 49.58 | | -11.10 | 38.48 | | 74.00 | 54.00 | -15.52 Peak |
| 1196.0 | 58.21 | | -10.65 | 47.56 | | 74.00 | 54.00 | -6.44 Peak |
| 1460.0 | 43.52 | | -9.64 | 33.88 | | 74.00 | 54.00 | -20.12 Peak |
| 1590.0 | 52.87 | | -9.00 | 43.87 | | 74.00 | 54.00 | -10.13 Peak |
| 4920 | -- | | | | | 74.00 | 54.00 | |
| 7386 | -- | | | | | 74.00 | 54.00 | |
| 9848 | -- | | | | | 74.00 | 54.00 | |
| 12310 | -- | | | | | 74.00 | 54.00 | |
| 14772 | -- | | | | | 74.00 | 54.00 | |
| 17234 | -- | | | | | 74.00 | 54.00 | |
| 19696 | -- | | | | | 74.00 | 54.00 | |
| 22158 | -- | | | | | 74.00 | 54.00 | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

Radiated Spurious Emission Measurement Result (Above 1GHz)

| | | | |
|-----------------|-------------------------|-------------|--------------|
| Operation Mode: | TX CH High Docking Mode | Test Date : | Jan. 15 2003 |
| Temperature : | 22 °C | Test By: | Robin |
| Humidity : | 65% | Pol: | Horizontal |

| Freq. (MHz) | Peak | AV | Ant./CL CF(dB) | Actual FS | | Peak | AV | Margin (dB) | |
|----------------|-------------------|-------------------|-------------------|------------------|----------------|-------------------|-------------------|----------------|------|
| | Reading (dBuV) | Reading (dBuV) | | Peak (dBuV/m) | AV (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | | |
| 1063.0 | 53.28 | | -11.53 | 41.75 | | 74.00 | 54.00 | -12.25 | Peak |
| 1196.0 | 56.79 | | -10.65 | 46.14 | | 74.00 | 54.00 | -7.86 | Peak |
| 1460.0 | 55.67 | | -9.64 | 46.03 | | 74.00 | 54.00 | -7.97 | Peak |
| 4920 | -- | | | | | 74.00 | 54.00 | | |
| 7332 | -- | | | | | 74.00 | 54.00 | | |
| 9776 | -- | | | | | 74.00 | 54.00 | | |
| 12220 | -- | | | | | 74.00 | 54.00 | | |
| 14664 | -- | | | | | 74.00 | 54.00 | | |
| 17108 | -- | | | | | 74.00 | 54.00 | | |
| 19552 | -- | | | | | 74.00 | 54.00 | | |
| 21996 | -- | | | | | 74.00 | 54.00 | | |
| 24440 | -- | | | | | 74.00 | 54.00 | | |

Remark :

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency °
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
- (5) X Mode means the EUT in stand-up position; Y Mode means the EUT in lie-on position

6. AC POWER LINE CONDUCTED EMISSION TEST

6.1 Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed

| Frequency range MHz | Limits dB(uV) | |
|------------------------|------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-1992.
2. The EUT was plug-in the host PC via USB port. The host PC system was placed on the center of the back edge on the test table. The peripherals like modem, monitor printer, K/B, and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The mouse was placed next to the Keyboard, flushed with the back of keyboard.
4. The spacing between the peripherals was 10 centimeters.
5. External I/O cables were draped along the edge of the test table and bundle when necessary.
6. The host PC system was connected with 110Vac/60Hz power source.

6.3 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

6.4 Measurement Equipment Used:

| Conducted Emission Test Site # 3 | | | | | |
|----------------------------------|-----------|--------------|---------------|------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| EMI Test Receiver | R&S | ESHS30 | 828144/003 | 08/08/2002 | 08/07/2003 |
| LISN | R&S | ESH2-Z5 | 843285/010 | 10/17/2002 | 10/16/2003 |
| LISN | EMCO | 3825/2 | 9003-1628 | 07/26/2002 | 07/25/2003 |
| Spectrum Analyzer | ADVANTEST | R3261A | 91720031 | N/A | N/A |
| 2X2 WIRE ISN | R&S | ENY22 | 100020 | 06/20/2002 | 06/19/2003 |
| FOUR WIRE ISN | R&S | ENY41 | 100006 | 06/20/2002 | 06/19/2003 |

6.5 Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Operation Mode: TX + RX Mode
 Temperature : 24 °C
 Power Adaptor UP01221050A

Test Date : Jan. 21 2003
 Test By: Robin
 Humidity : 62%

| FREQ MHz | Q.P. Raw dBuV | AVG Raw dBuV | Q.P. Limit dBuV | AVG Limit dBuV | Q.P. Margin dB | AVG Margin dB | NOTE |
|----------|---------------|--------------|-----------------|----------------|----------------|---------------|------|
| 0.236 | 42.80 | --- | 62.24 | 52.24 | -19.44 | --- | L1 |
| 0.494 | 38.40 | --- | 56.10 | 46.10 | -17.70 | --- | L1 |
| 0.633 | 39.80 | --- | 56.00 | 46.00 | -16.20 | --- | L1 |
| 0.983 | 40.20 | --- | 56.00 | 46.00 | -15.80 | --- | L1 |
| 1.456 | 39.80 | --- | 56.00 | 46.00 | -16.20 | --- | L1 |
| 6.261 | 48.00 | --- | 60.00 | 50.00 | -12.00 | --- | L1 |
| 0.236 | 44.80 | --- | 62.24 | 52.24 | -17.44 | --- | L2 |
| 0.486 | 41.80 | --- | 56.24 | 46.24 | -14.44 | --- | L2 |
| 0.499 | 40.60 | --- | 56.02 | 46.02 | -15.42 | --- | L2 |
| 0.267 | 41.00 | --- | 61.21 | 51.21 | -20.21 | --- | L2 |
| 0.989 | 40.80 | --- | 56.00 | 46.00 | -15.20 | --- | L2 |
| 6.179 | 49.80 | 37.95 | 60.00 | 50.00 | -10.20 | -12.05 | L2 |


Remark :

- (1) Measuring frequencies from 0.15 MHz to 30MHz °
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)




Conducted Test Data

C&C Lab. Co. Shielded Room4
EN 55022 - Class B QP/AU Limit

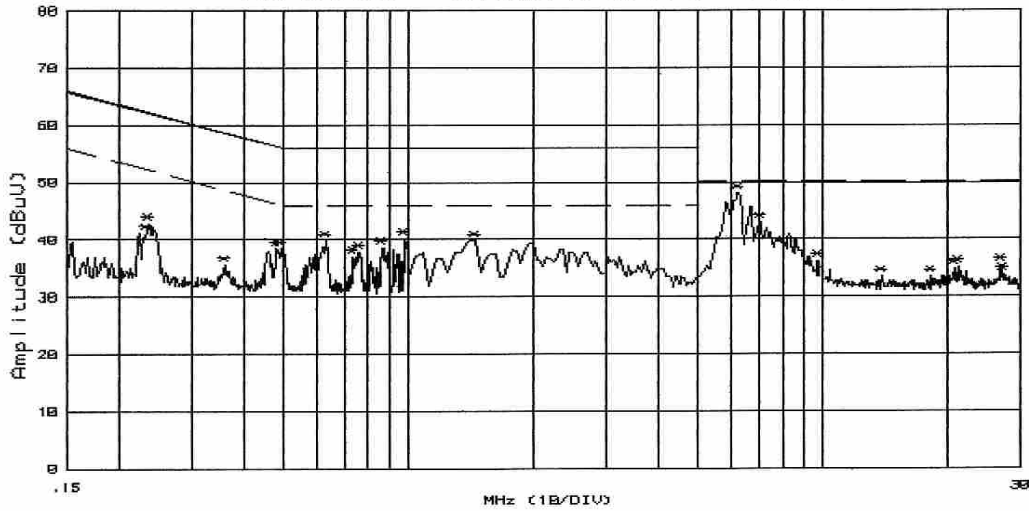

Customer:PDA
Model :PDA-WIRELESS
Mode :
Reading :Peak(R3261C SPA)
Remark :110 V
File#: 1572
Humd.:58 (%)
Port :L1
Date :21 Jan 2003 19:57:59
Temp. :22 (C)
Tested by:ROBIN

C&C Lab. Co. Shielded Room4
EN 55022 - Class B QP/AU Limit

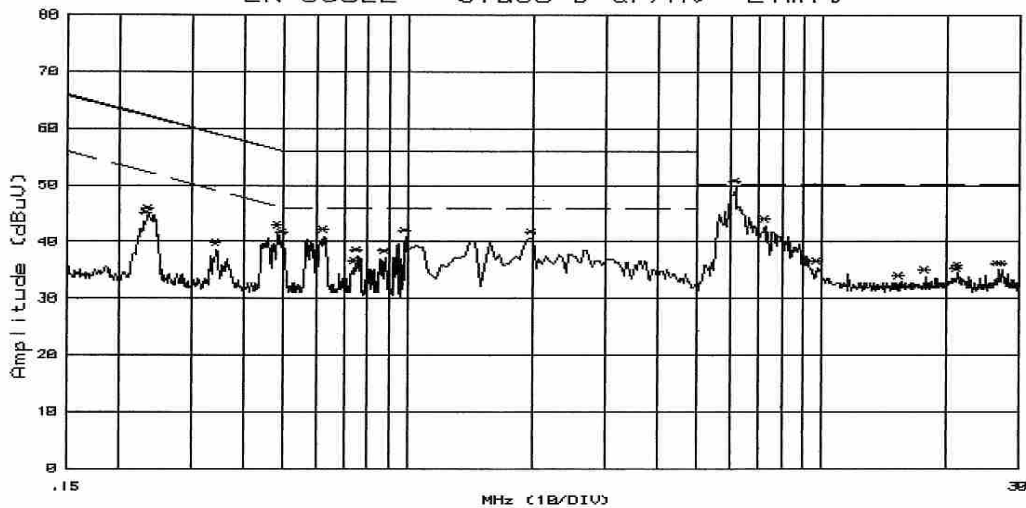

Customer:PDA
Model :PDA-WIRELESS
Mode :
Reading :Peak(R3261C SPA)
Remark :110 V
File#: 1573
Humd.:58 (%)
Port :L2
Date :21 Jan 2003 20:00:10
Temp. :22 (C)
Tested by:ROBIN

7. 6 dB Bandwidth Measurement

7.1 Standard Applicable

According to § 15.247(a)(2), DSSS Systems operating in the 2400MHz-2483.5 MHz and 5725MHz – 5850MHz bands. The Minimum 6dB bandwidth shall be at least 500KHz.

7.2 Measurement Equipment Used:

| EQUIPMENT TYPE | MFR | Model No. | Serial No. | LAST CAL. | Cal. Due. |
|-------------------|----------------|--------------|--------------|------------|------------|
| Spectrum Analyzer | Advantest | R3182 | 110600647 | 11/16/2002 | 11/15/2003 |
| Spectrum Analyzer | R&S | FSP30 | 1093.4495.30 | 07/23/2002 | 07/22/2003 |
| low loss cable | Huber + Suhner | Sucoflex 104 | N/A | N/A | N/A |

7.3 Test Set-up:

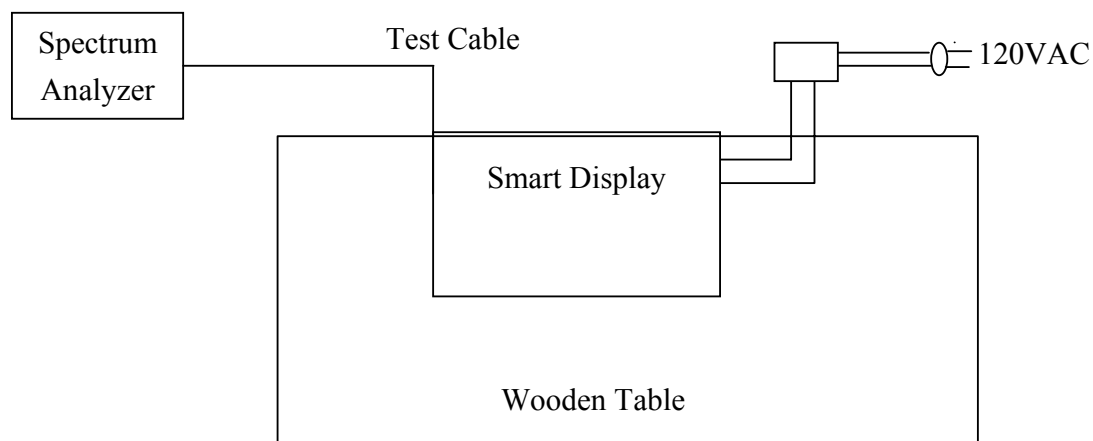


Fig. 4

Fig. 4 : Measurement setup for testing on Antenna connector


7.4 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100KHz, VBW = RBW, Span= 50MHz, Sweep=auto
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.

7.5 Measurement Result


| CH | Bandwidth (MHz) | Bandwidth (KHz) | Result |
|--------|--------------------|--------------------|--------|
| Lower | 12.1 | > 500 | PASS |
| Mid | 12.2 | > 500 | PASS |
| Higher | 11.2 | > 500 | PASS |

6dB Band Width Test Data CH-LOW

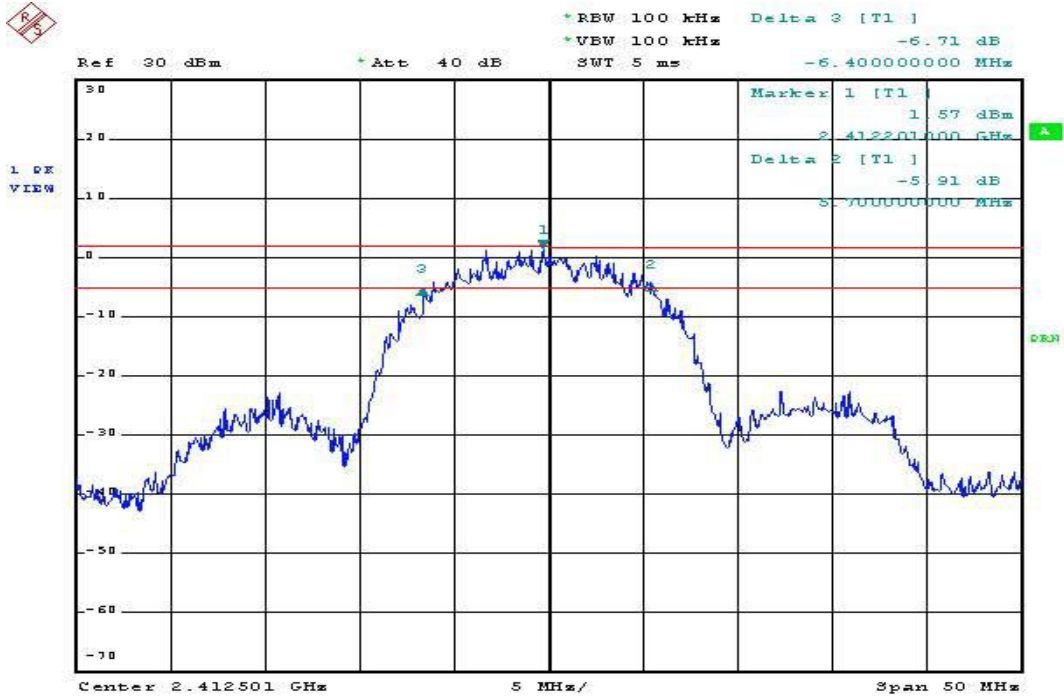


Date: 10. JAN. 2003 07:14:46

6dB Band Width Test Data CH-MID

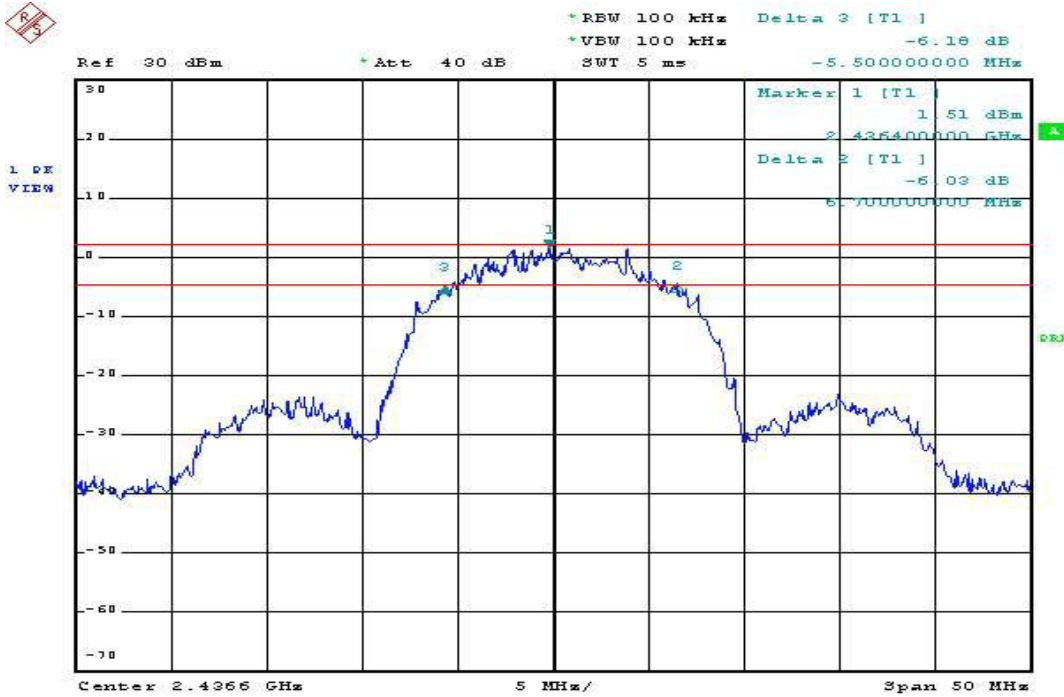

Date: 10. JAN. 2003 07:19:04

6dB Band Width Test Data CH-HIGH

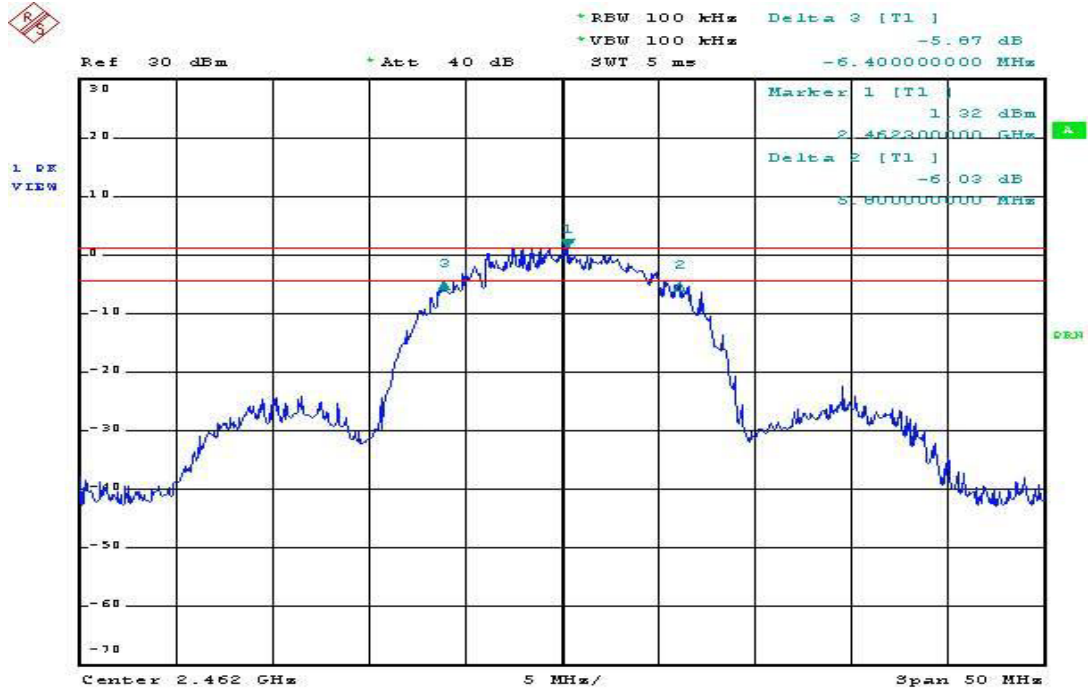

Date: 10.JAN.2003 07:36:26

8. PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

According to §15.247(b)(2), for direct sequence systems, the maximum peak output power of the intentional radiator shall not exceed 1 Watt.

8.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz, Bandwidth=26dB occupied Bandwidth)
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.


8.3 Measurement Equipment Used:

| EQUIPMENT TYPE | MFR | Model No. | Serial No. | LAST CAL. | Cal. Due. |
|-------------------|----------------|--------------|--------------|------------|------------|
| Spectrum Analyzer | Advantest | R3182 | 110600647 | 11/16/2002 | 11/15/2003 |
| Spectrum Analyzer | R&S | FSP30 | 1093.4495.30 | 07/23/2002 | 07/22/2003 |
| low loss cable | Huber + Suhner | Sucoflex 104 | N/A | N/A | N/A |

8.4 Test Results:


| CH | Reading Power dBm | Cable Loss dB | Output Power dBm | Output Power W | Limit (W) | Result |
|--------|-------------------|---------------|------------------|----------------|-----------|--------|
| LOWER | 17.25 | 0.50 | 17.75 | 0.05957 | 1 | PASS |
| MID | 17.03 | 0.50 | 17.53 | 0.05662 | 1 | PASS |
| HIGHER | 17.01 | 0.50 | 17.51 | 0.05636 | 1 | PASS |

Peak Power Output Data Plot (CH Low)

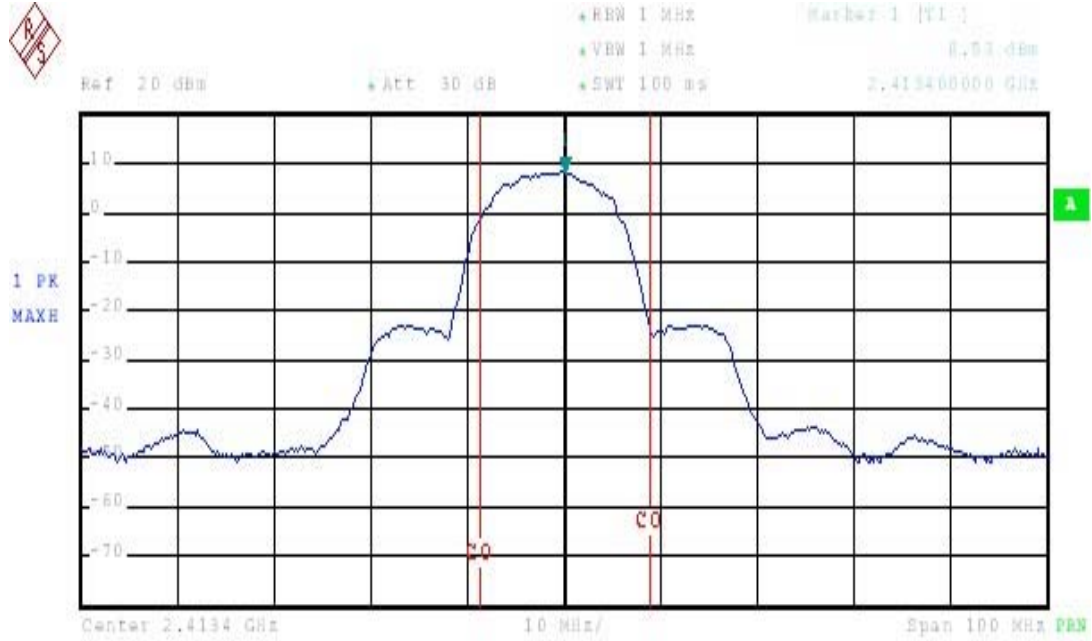


17 Channel
Bandwidth 17.6 MHz Power 17.25 dBm

Peak Power Output Data Plot (CH Mid)

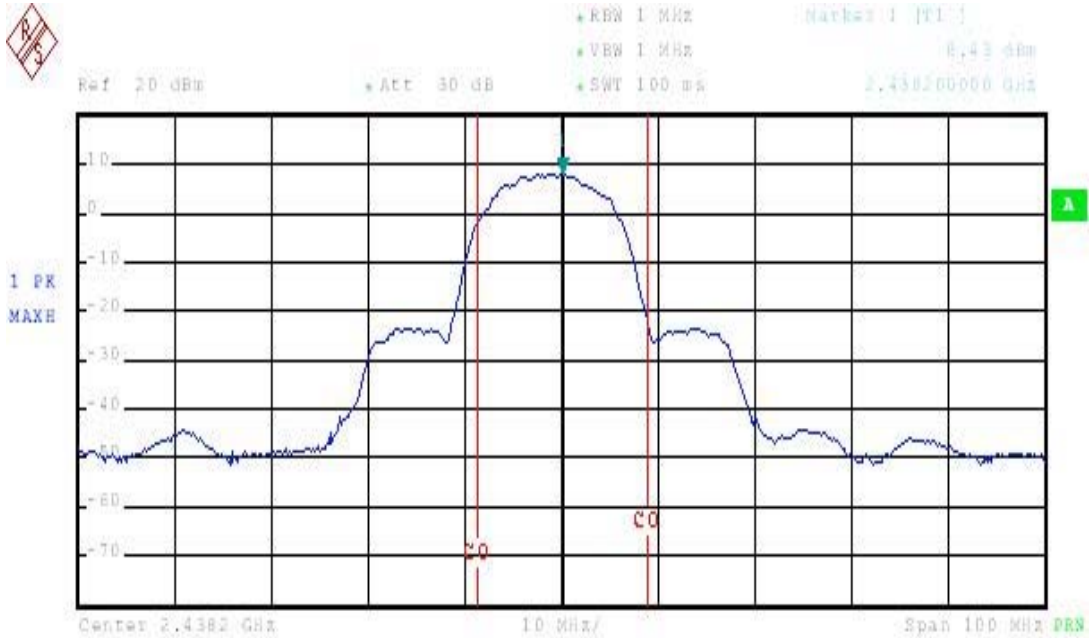

17 Channel
Bandwidth 17.6 MHz Power 17.03 dBm

Peak Power Output Data Plot (CH High)

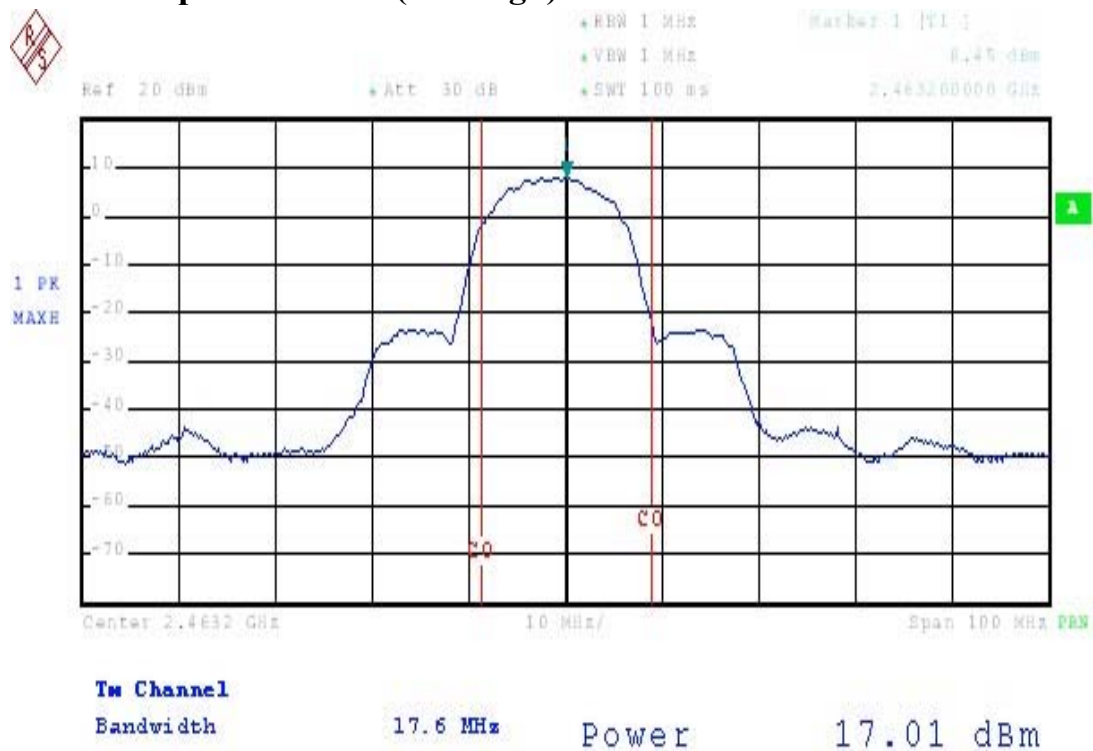

9. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

9.1 Standard Applicable

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

9.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Center Freq. 2.39GHz, 2.4835GHz, Span=50MHz, Sweep = auto.
5. Mark Peak 2.4GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.


9.3 Measurement Result

Refer to attach spectrum analyzer data chart.

9.4 Measurement Equipment Used:


| EQUIPMENT TYPE | MFR | Model No. | Serial No. | LAST CAL. | Cal. Due. |
|-------------------|----------------|--------------|--------------|------------|------------|
| Spectrum Analyzer | Advantest | R3182 | 110600647 | 11/16/2002 | 11/15/2003 |
| Spectrum Analyzer | R&S | FSP30 | 1093.4495.30 | 07/23/2002 | 07/22/2003 |
| low loss cable | Huber + Suhner | Sucoflex 104 | N/A | N/A | N/A |

Out of Band Test Data CH-LOW

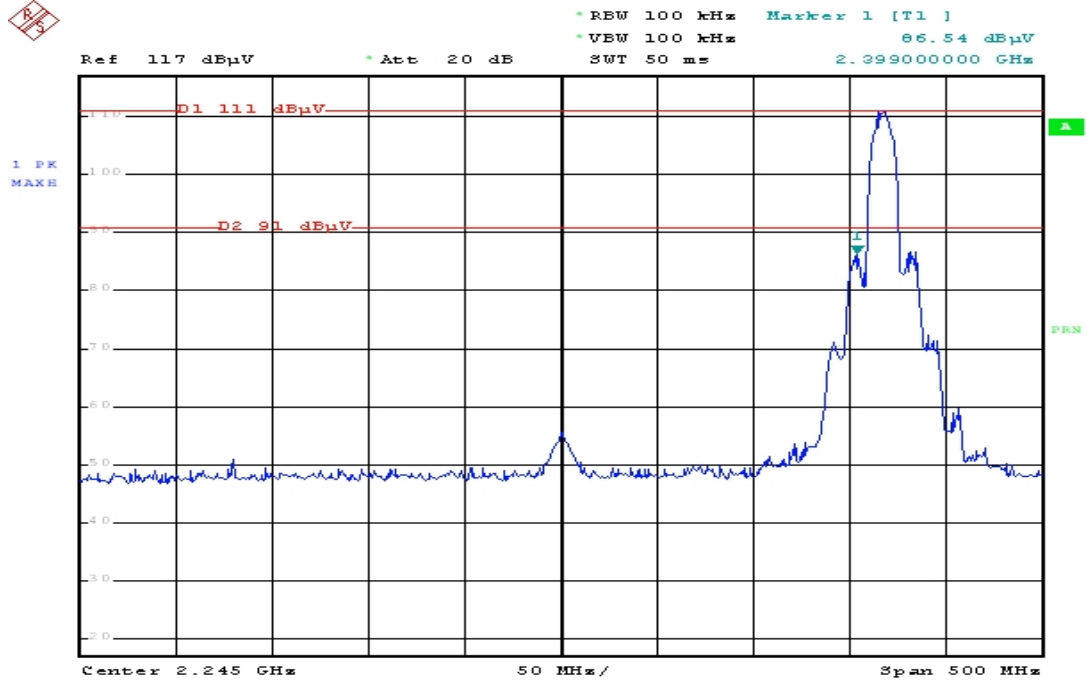

Date: 10.JAN.2003 10:21:00

Out of Band Test Data CH-HIGH

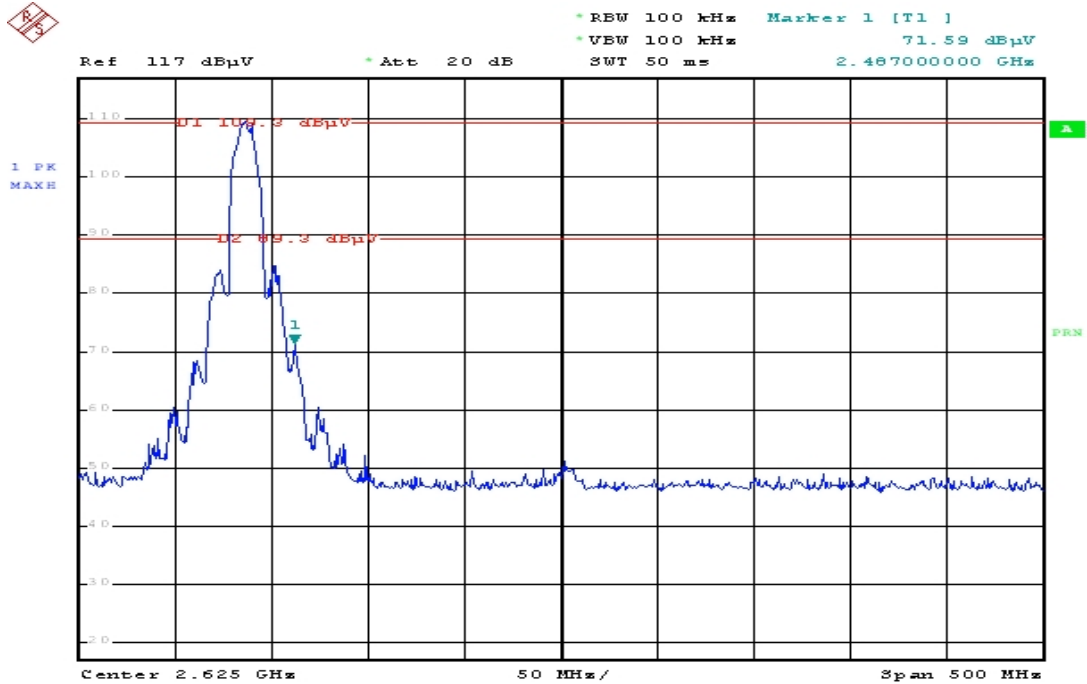

Date: 10.JAN.2003 10:18:19

10. Peak Power Spectral Density

10.1 Standard Applicable

According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

10.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3KHz, VBW = 3KHz, Span = 300KHz, Sweep=100s
4. Record the max. reading.
5. Repeat above procedures until all frequency measured were complete.


10.3 Measurement Result

| | Reading dBm | Cable Loss dB | Density dBm | Limint dBm | Result |
|---------|----------------|------------------|----------------|---------------|--------|
| CH-LOW | -10.60 | 0.50 | -10.10 | 8 | PASS |
| CH-MID | -12.12 | 0.50 | -11.62 | 8 | PASS |
| CH-HIGH | -13.99 | 0.50 | -13.49 | 8 | PASS |

10.4 Measurement Equipment Used:


| EQUIPMENT TYPE | MFR | Model No. | Serial No. | LAST CAL. | Cal. Due. |
|-------------------|----------------|--------------|--------------|------------|------------|
| Spectrum Analyzer | Advantest | R3182 | 110600647 | 11/16/2002 | 11/15/2003 |
| Spectrum Analyzer | R&S | FSP30 | 1093.4495.30 | 07/23/2002 | 07/22/2003 |
| low loss cable | Huber + Suhner | Sucoflex 104 | N/A | N/A | N/A |

Power Density Test Data CH-LOW

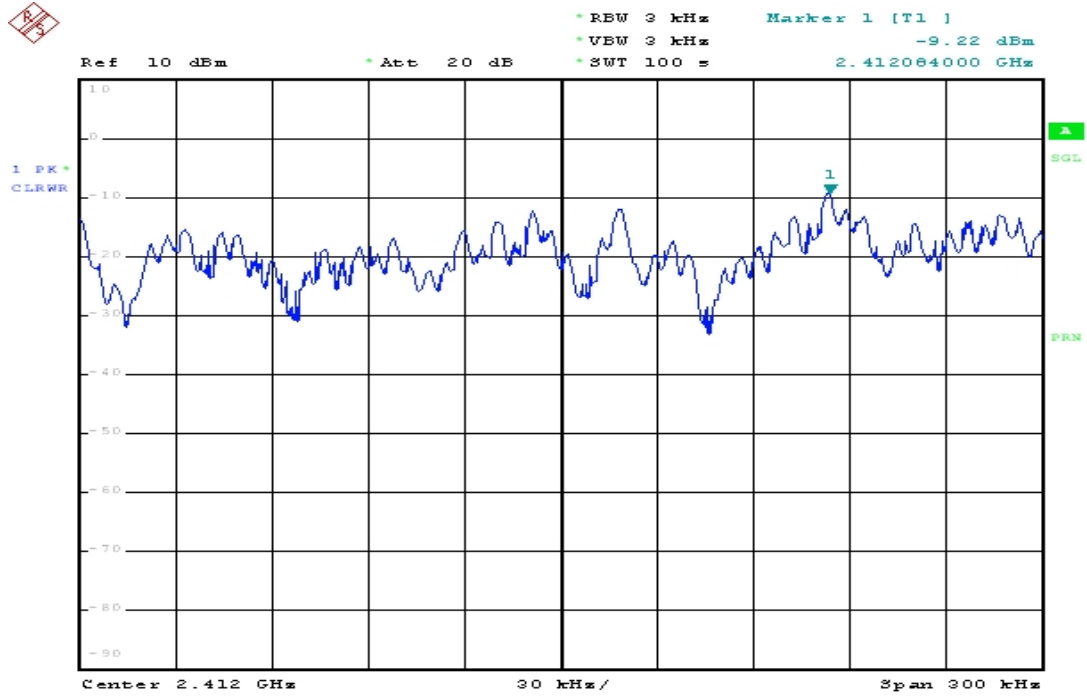


Date: 10.JAN.2003 08:17:56

Power Density Test Data CH-MID

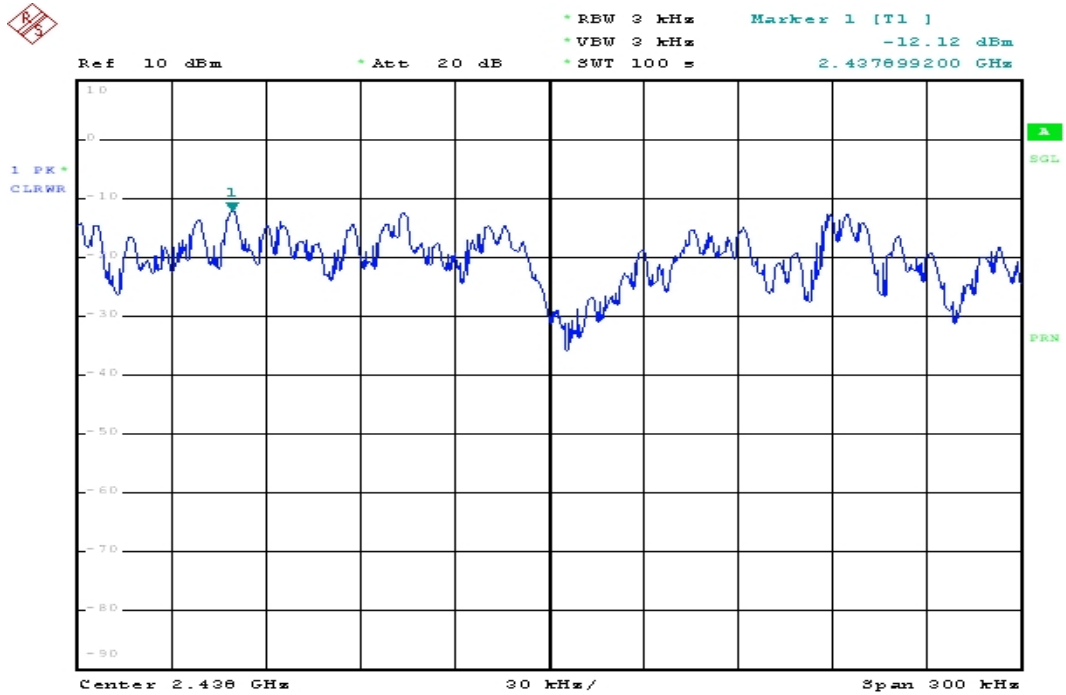

Date: 10.JAN.2003 08:14:38

Power Density Test Data CH-HIGH

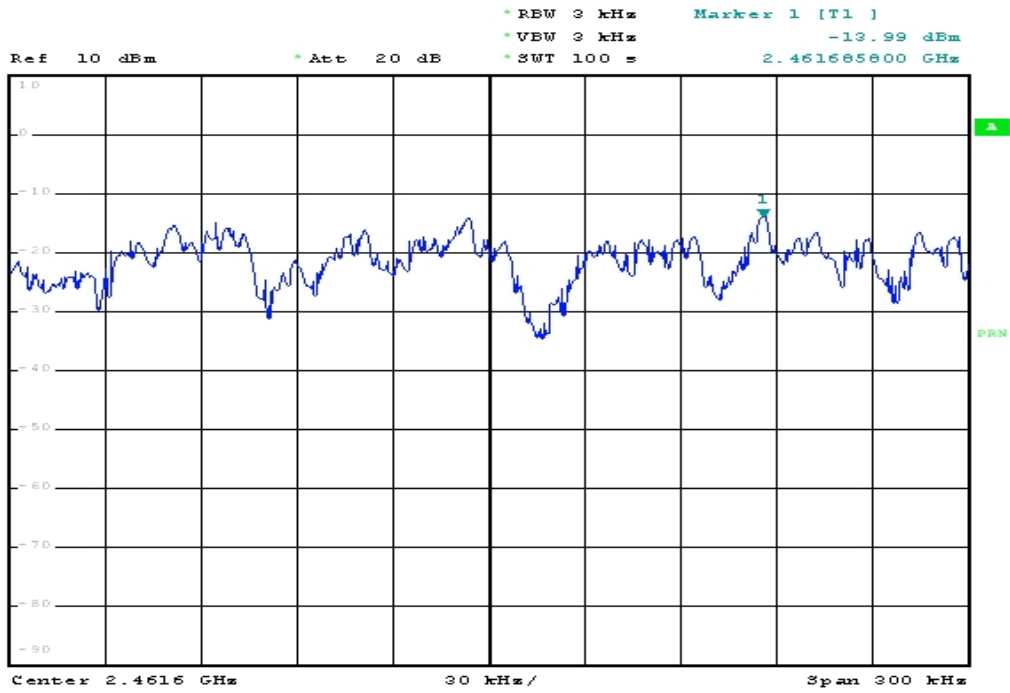

Date: 10.JAN.2003 08:00:16

11. ANTENNA REQUIREMENT

11.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.247(i), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in 1dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is +2 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

12. SAR Measurement

12.1 Standard Applicable

According to §15.247(b)(4) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

12.2 Measurement Result:

The test was under processed and the test report will be attachment.