


Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.565mW.da4

EUT Configuration 1

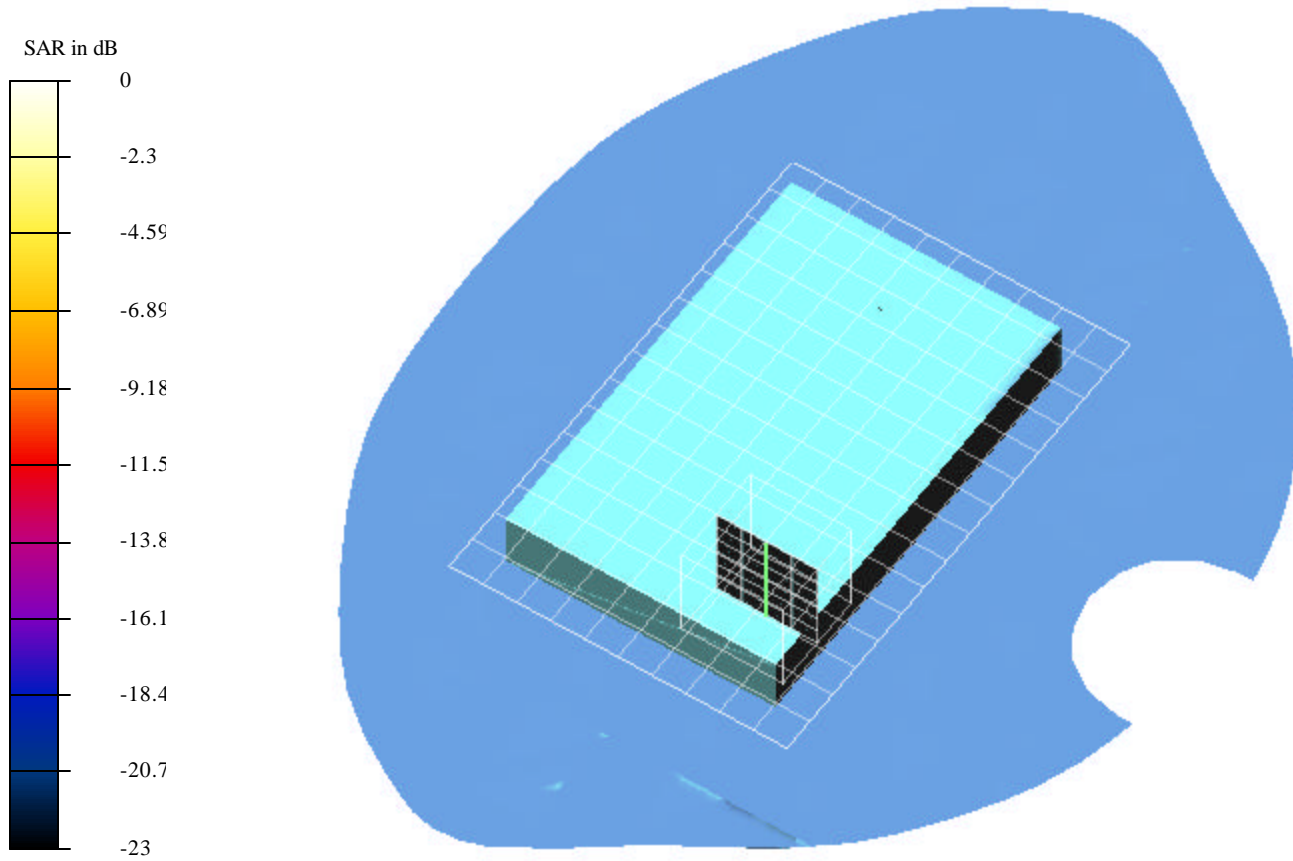

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.565mW.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 1; Low channel, 2412MHz

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9736$ mho/m, $\epsilon = 51.45$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.1, 4.1, 4.1); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 3.86 V/m

Peak SAR = 1.78 mW/g

SAR(1 g) = 0.565 mW/g; SAR(10 g) = 0.241 mW/g

Power Drift = -0.06 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

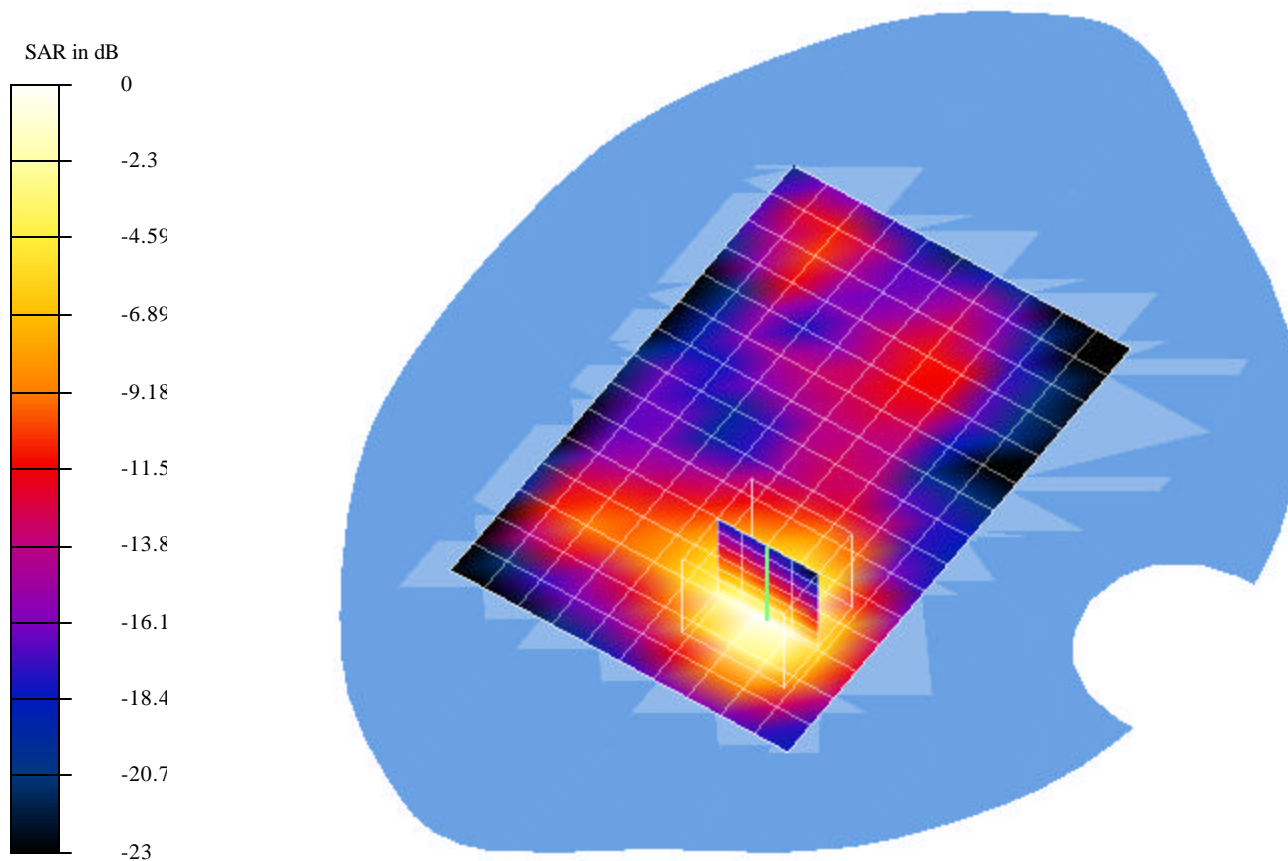

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_0.518mW.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 1; Middle channel, 2437MHz

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9736$ mho/m, $\epsilon = 51.45$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.1, 4.1, 4.1); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 3.39 V/m

Peak SAR = 1.63 mW/g

SAR(1 g) = 0.518 mW/g; SAR(10 g) = 0.223 mW/g

Power Drift = -0.08 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

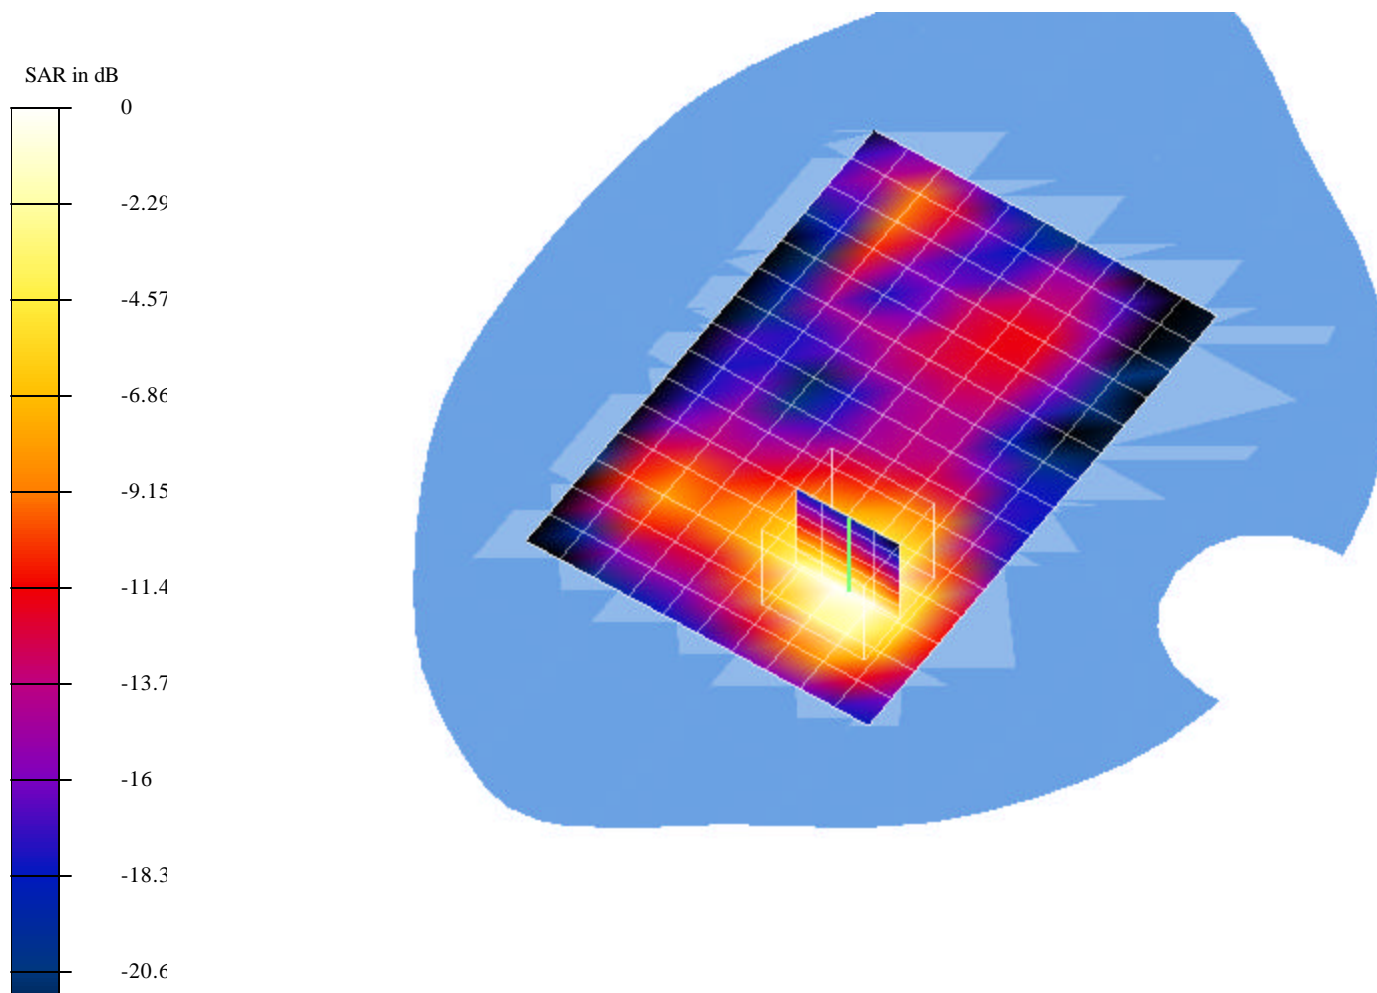

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.499mW.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 1; High channel, 2462MHz

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9736$ mho/m, $\epsilon = 51.45$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.1, 4.1, 4.1); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 3.19 V/m

Peak SAR = 1.59 mW/g

SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.213 mW/g


Power Drift = 0.06 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

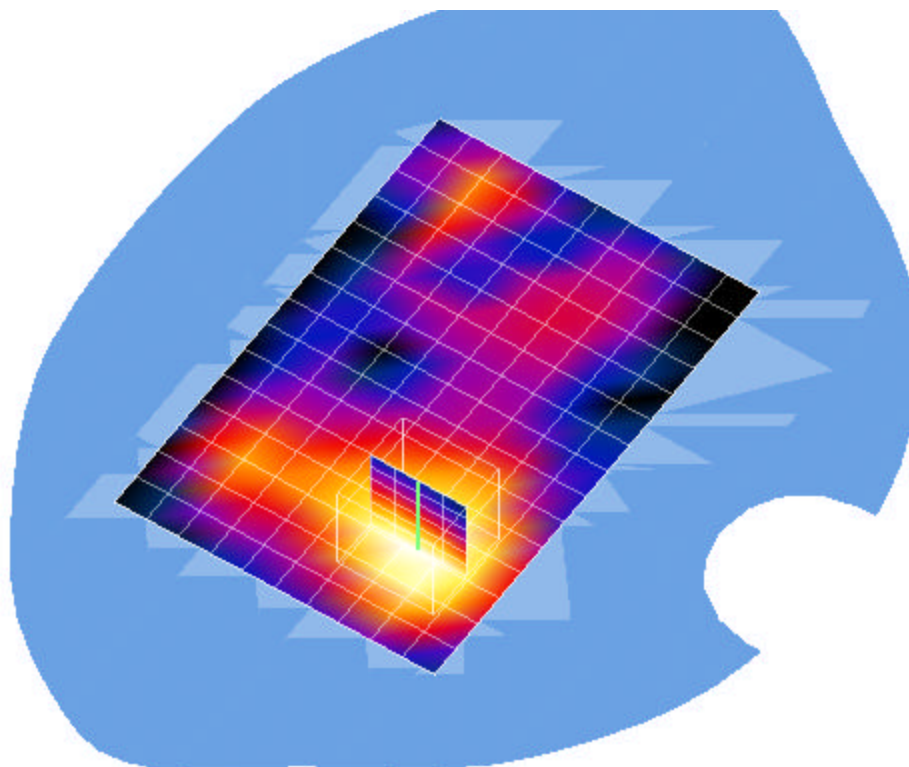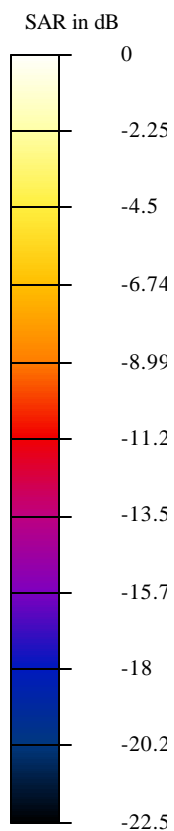

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0231mW.da4

EUT Configuration 2

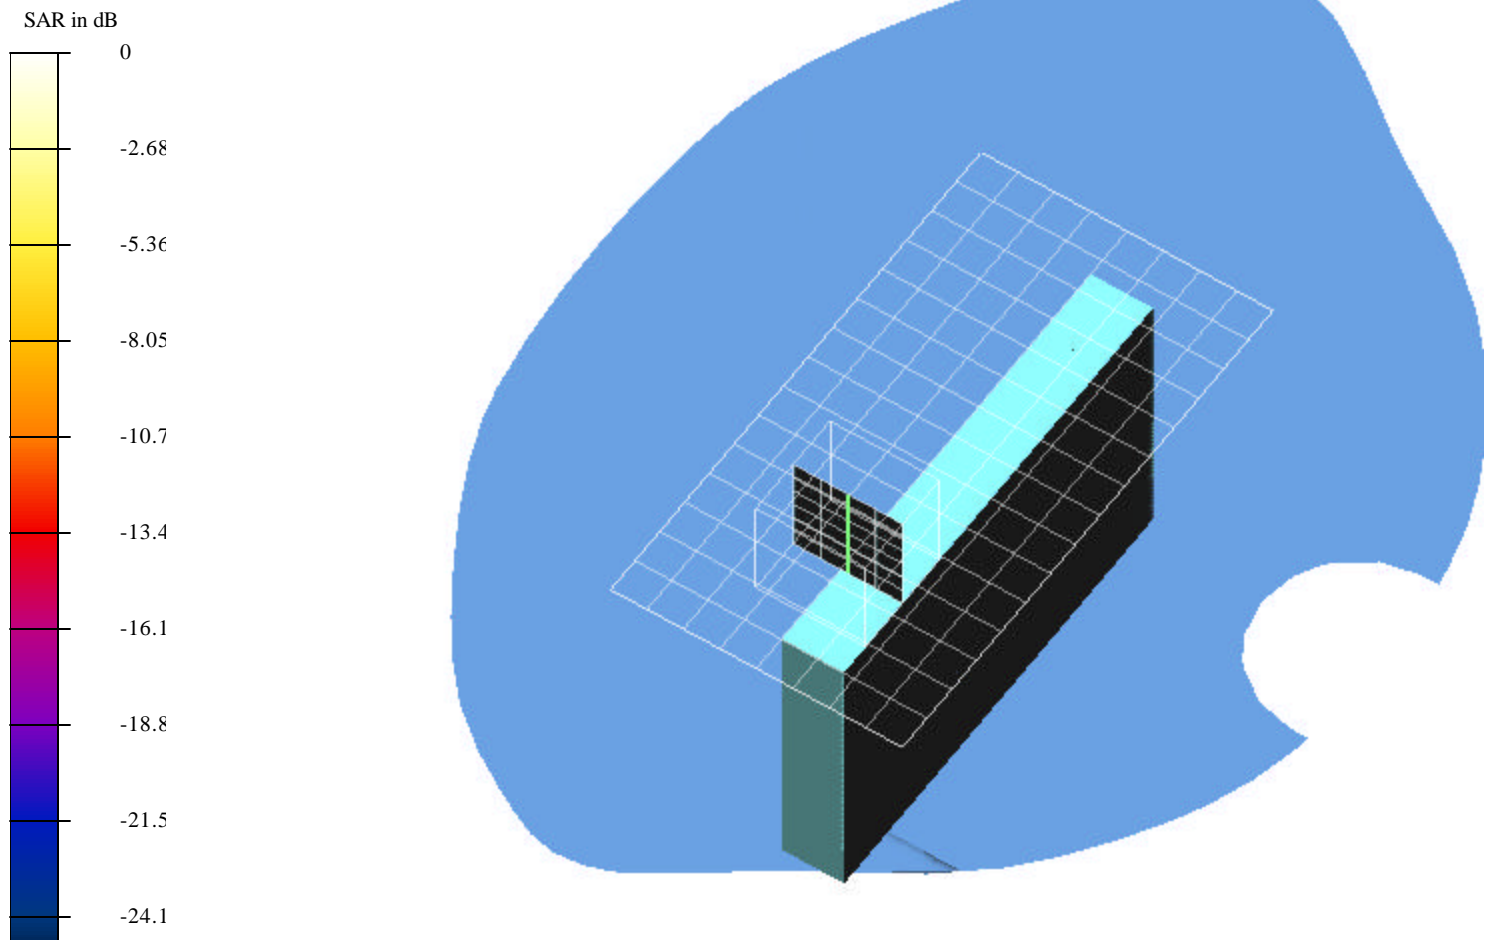

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0231mW.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 2; Low channel, 2412MHz

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9736$ mho/m, $\epsilon = 51.45$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.1, 4.1, 4.1); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 1.87 V/m

Peak SAR = 0.0579 mW/g

SAR(1 g) = 0.0231 mW/g; SAR(10 g) = 0.0115 mW/g

Power Drift = 0.07 dB

Area Scan (9x16x1): Measurement grid: dx=10mm, dy=10mm

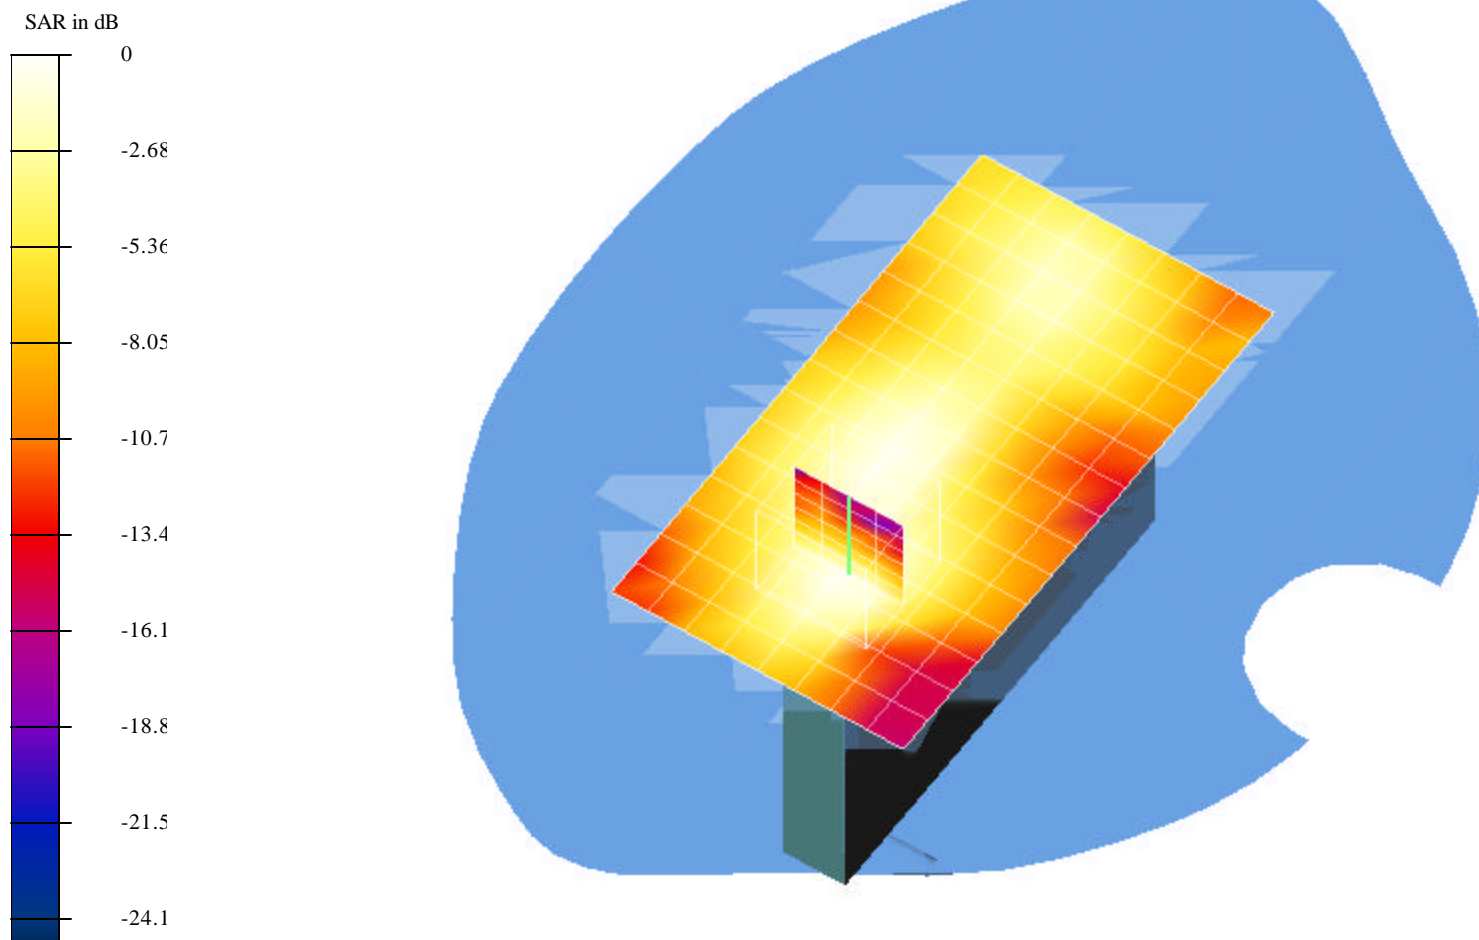

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_0.0206mW.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 2; Middle channel, 2437MHz

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9736$ mho/m, $\epsilon = 51.45$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.1, 4.1, 4.1); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 1.61 V/m

Peak SAR = 0.0553 mW/g

SAR(1 g) = 0.0206 mW/g; SAR(10 g) = 0.0102 mW/g

Power Drift = -0.05 dB

Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm

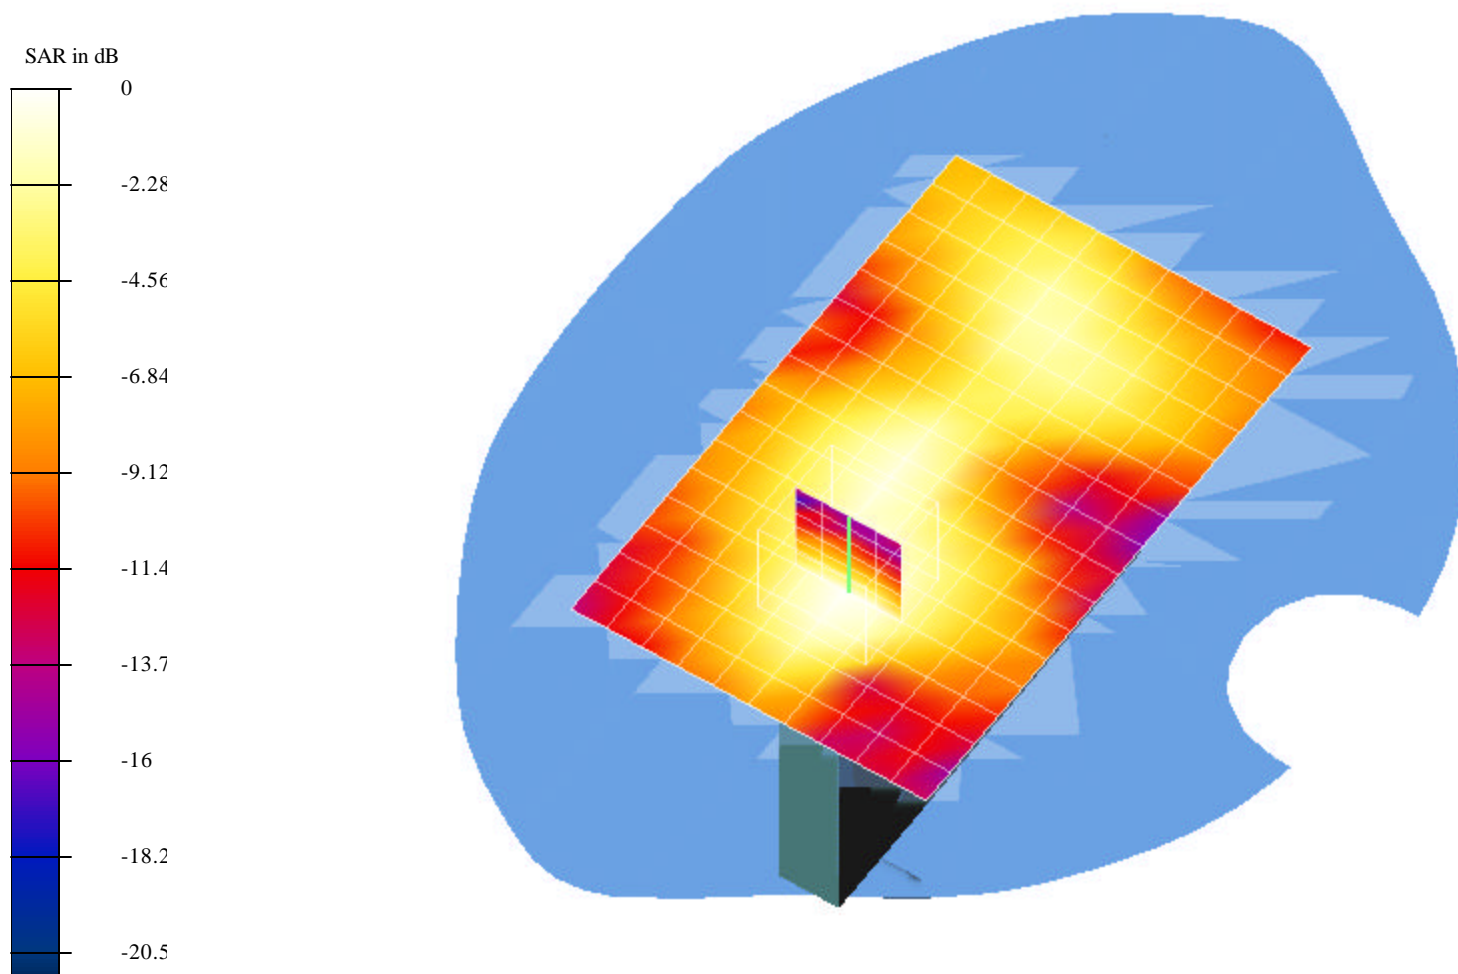

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.0153mW.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 2; High channel, 2462MHz

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9736$ mho/m, $\epsilon = 51.45$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.1, 4.1, 4.1); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 1.27 V/m

Peak SAR = 0.0401 mW/g

SAR(1 g) = 0.0153 mW/g; SAR(10 g) = 0.00768 mW/g


Power Drift = -0.12 dB

Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm

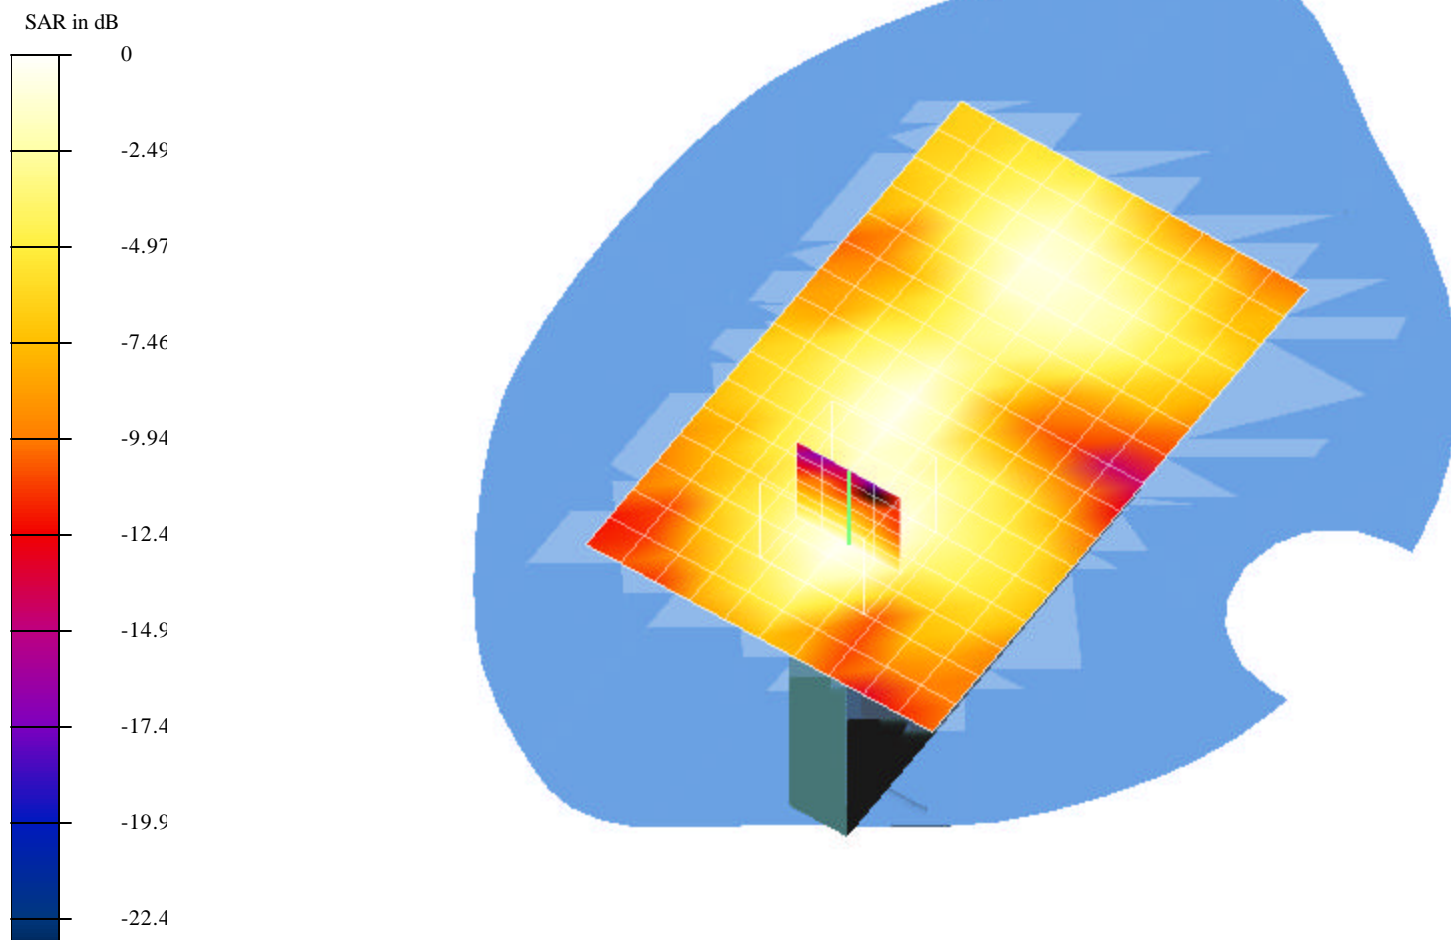

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0897mW.da4

EUT Configuration 3

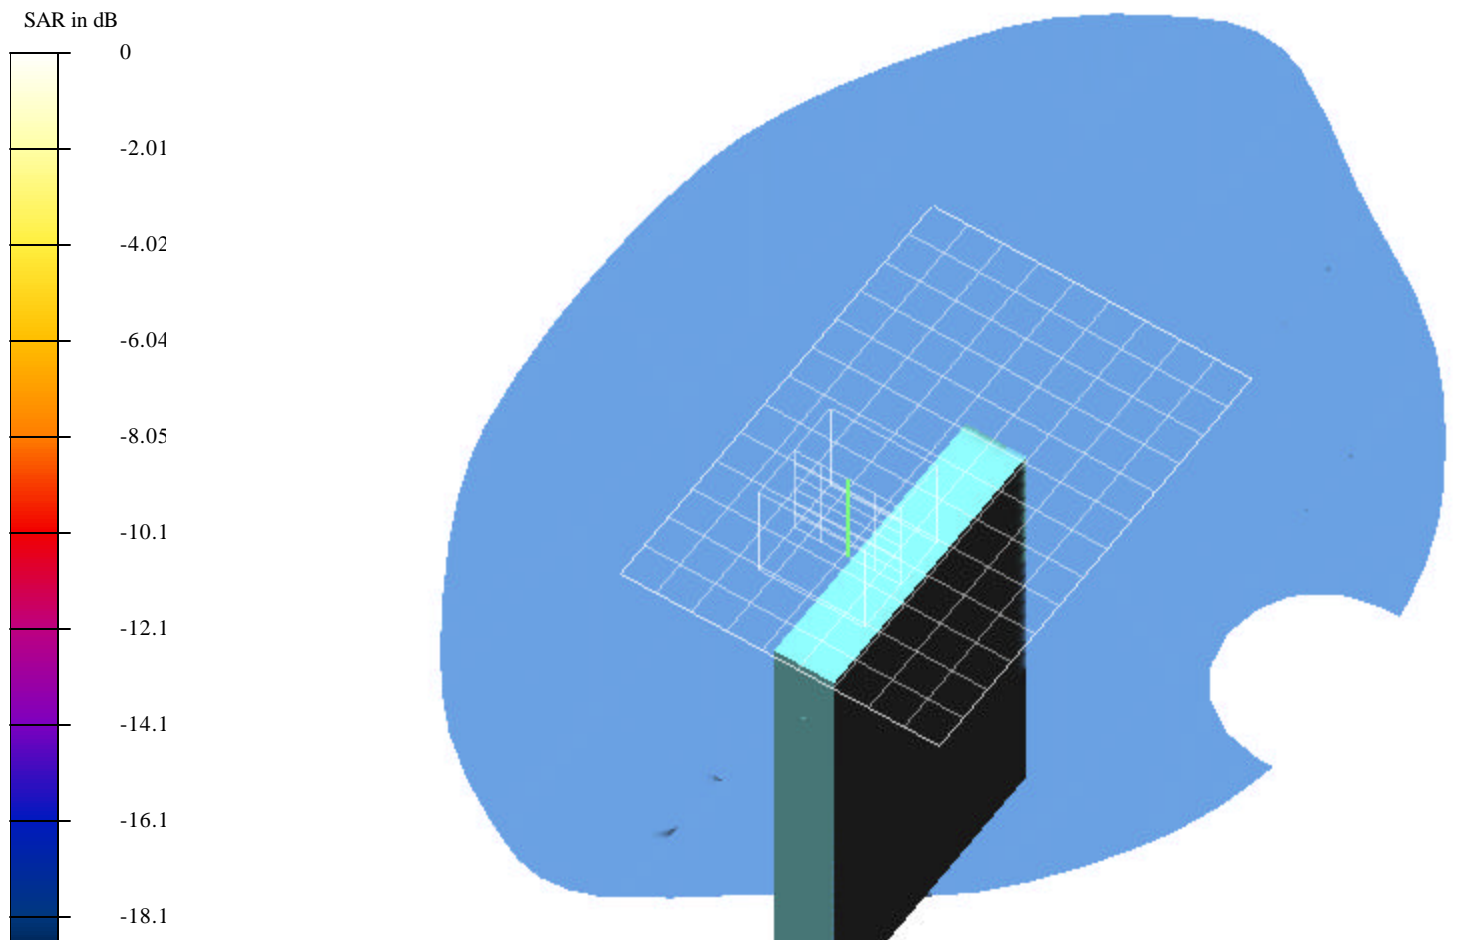

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.0897mW.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 3; Low channel, 2412MHz

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9736$ mho/m, $\epsilon = 51.45$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.1, 4.1, 4.1); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 4.33 V/m

Peak SAR = 0.226 mW/g

SAR(1 g) = 0.0897 mW/g; SAR(10 g) = 0.0445 mW/g

Power Drift = 0.01 dB

Area Scan (10x14x1): Measurement grid: dx=10mm, dy=10mm

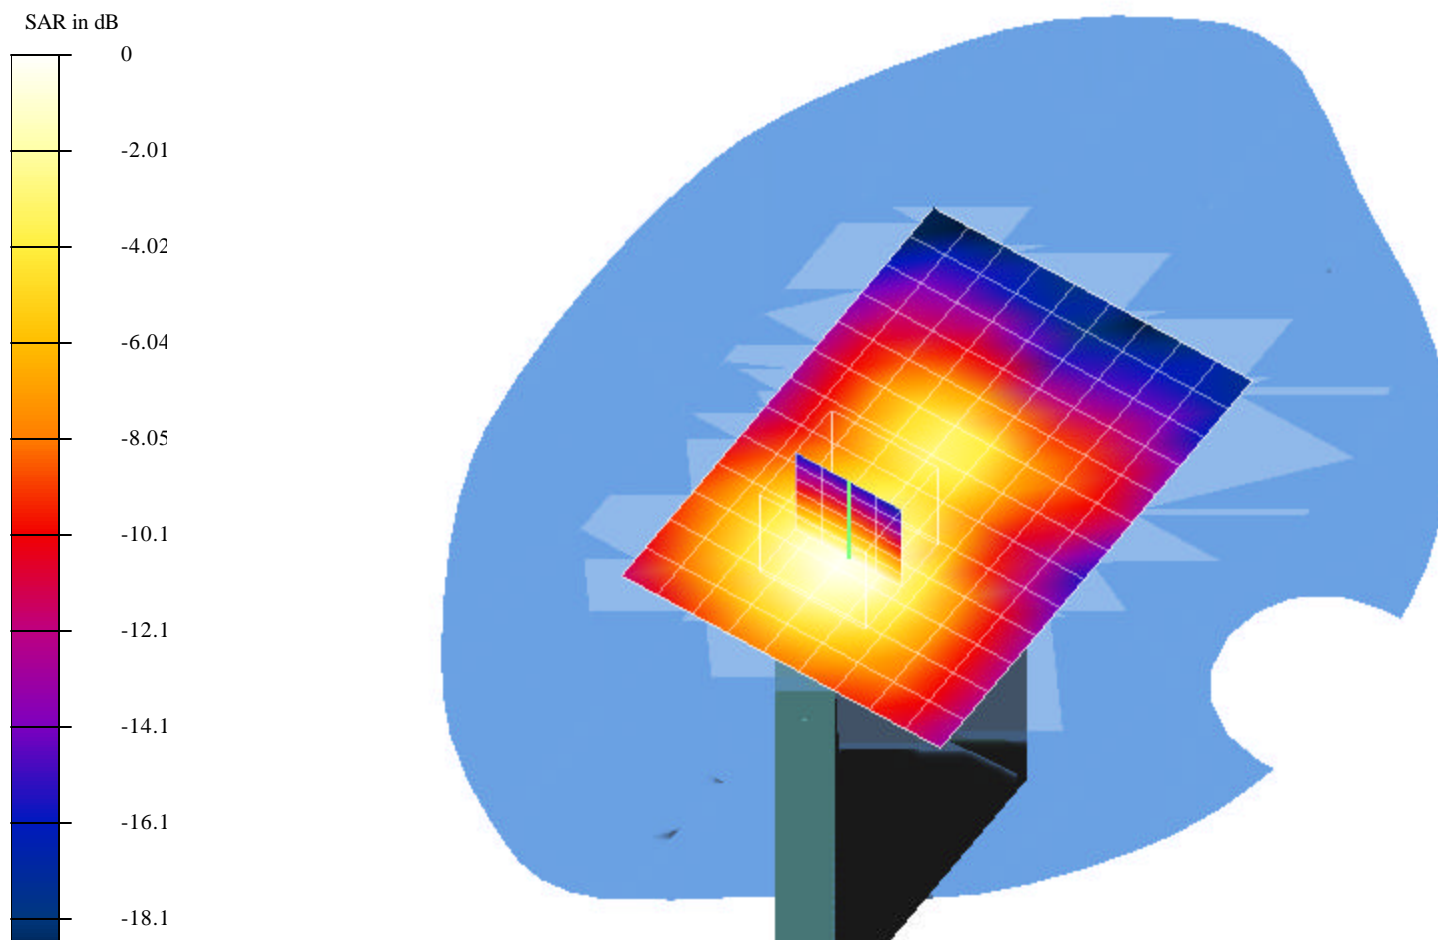

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_0.0846mW.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 3; Middle channel, 2437MHz

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9736$ mho/m, $\epsilon = 51.45$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.1, 4.1, 4.1); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 3.92 V/m

Peak SAR = 0.209 mW/g

SAR(1 g) = 0.0846 mW/g; SAR(10 g) = 0.0428 mW/g

Power Drift = -0.02 dB

Area Scan (10x14x1): Measurement grid: dx=10mm, dy=10mm

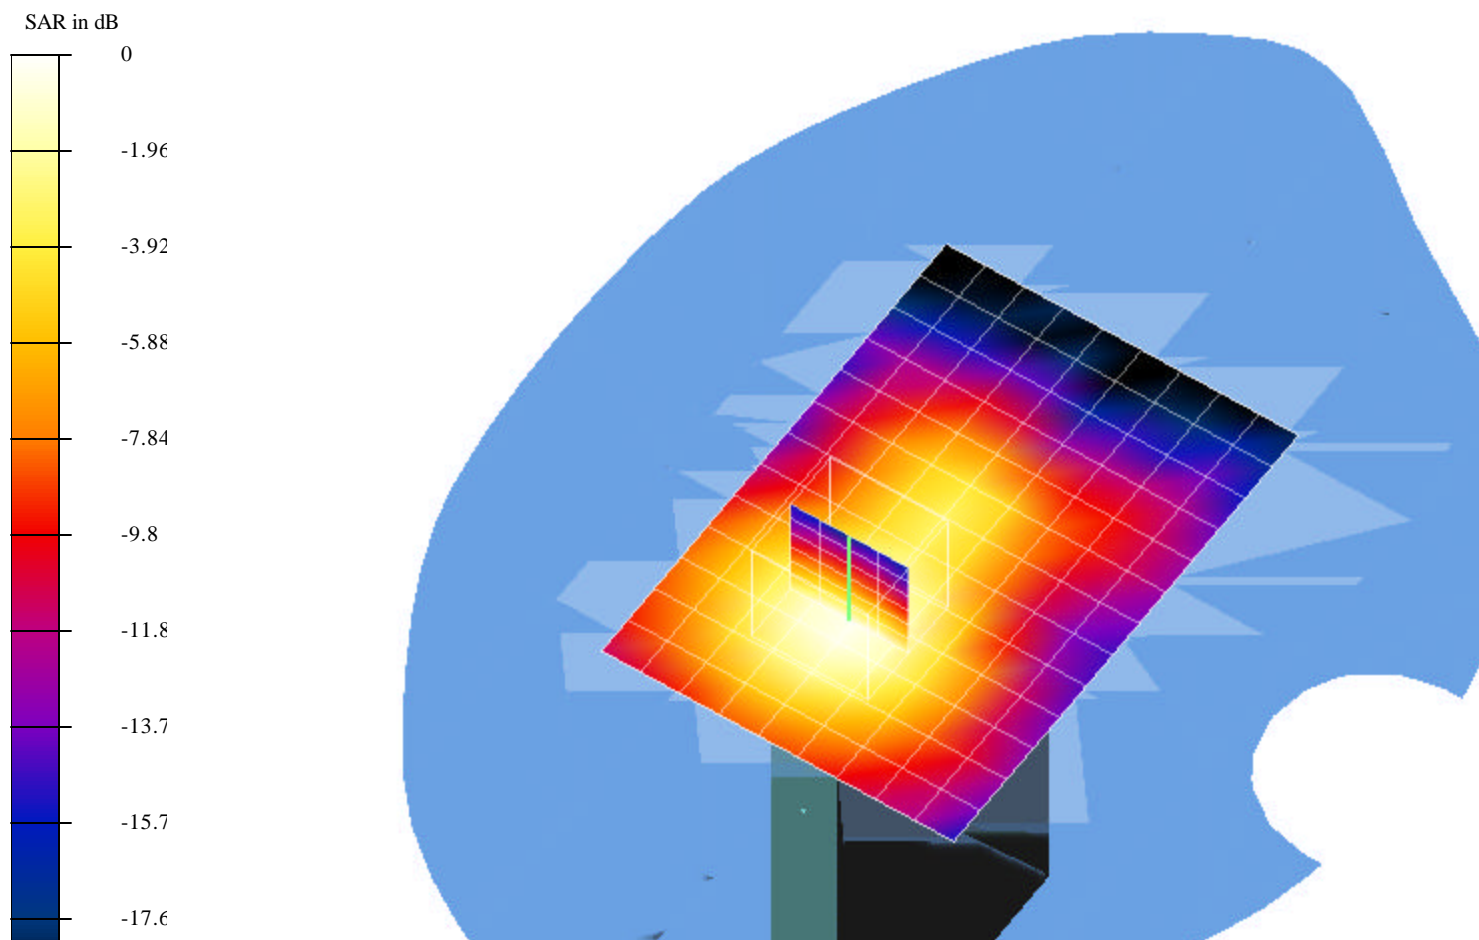

Test Laboratory: Compliance Certification Services
File Name: 2H-CH_0.0776mW.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 3; High channel, 2462MHz

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9736$ mho/m, $\epsilon = 51.45$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.1, 4.1, 4.1); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 4.09 V/m

Peak SAR = 0.185 mW/g

SAR(1 g) = 0.0776 mW/g; SAR(10 g) = 0.0395 mW/g


Power Drift = -0.04 dB

Area Scan (10x14x1): Measurement grid: dx=10mm, dy=10mm

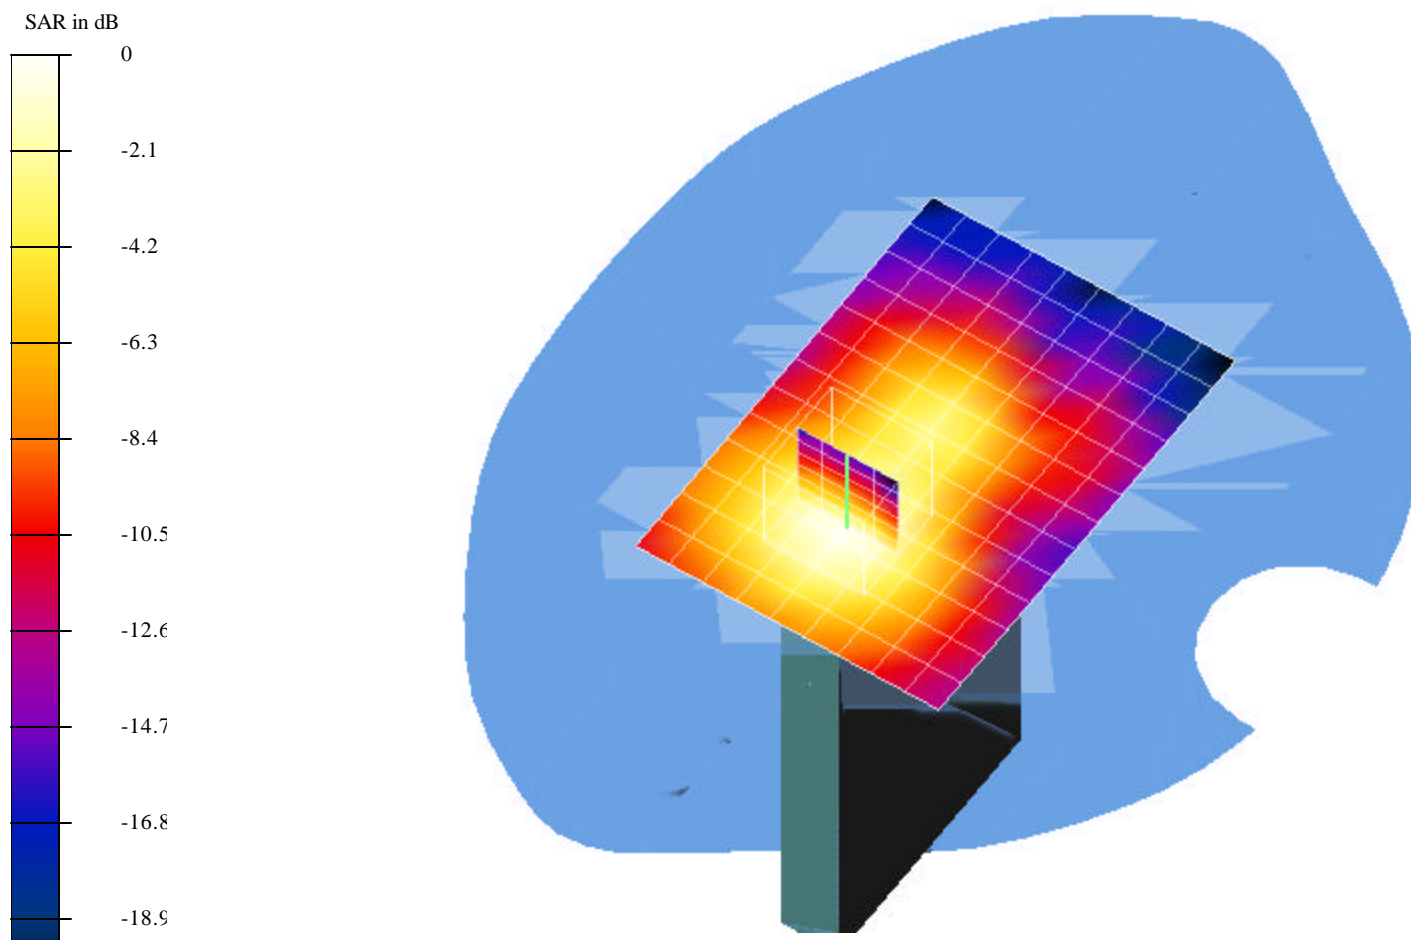

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0198mW_2.5mm.da4

EUT Configuration 4 (Face Held)

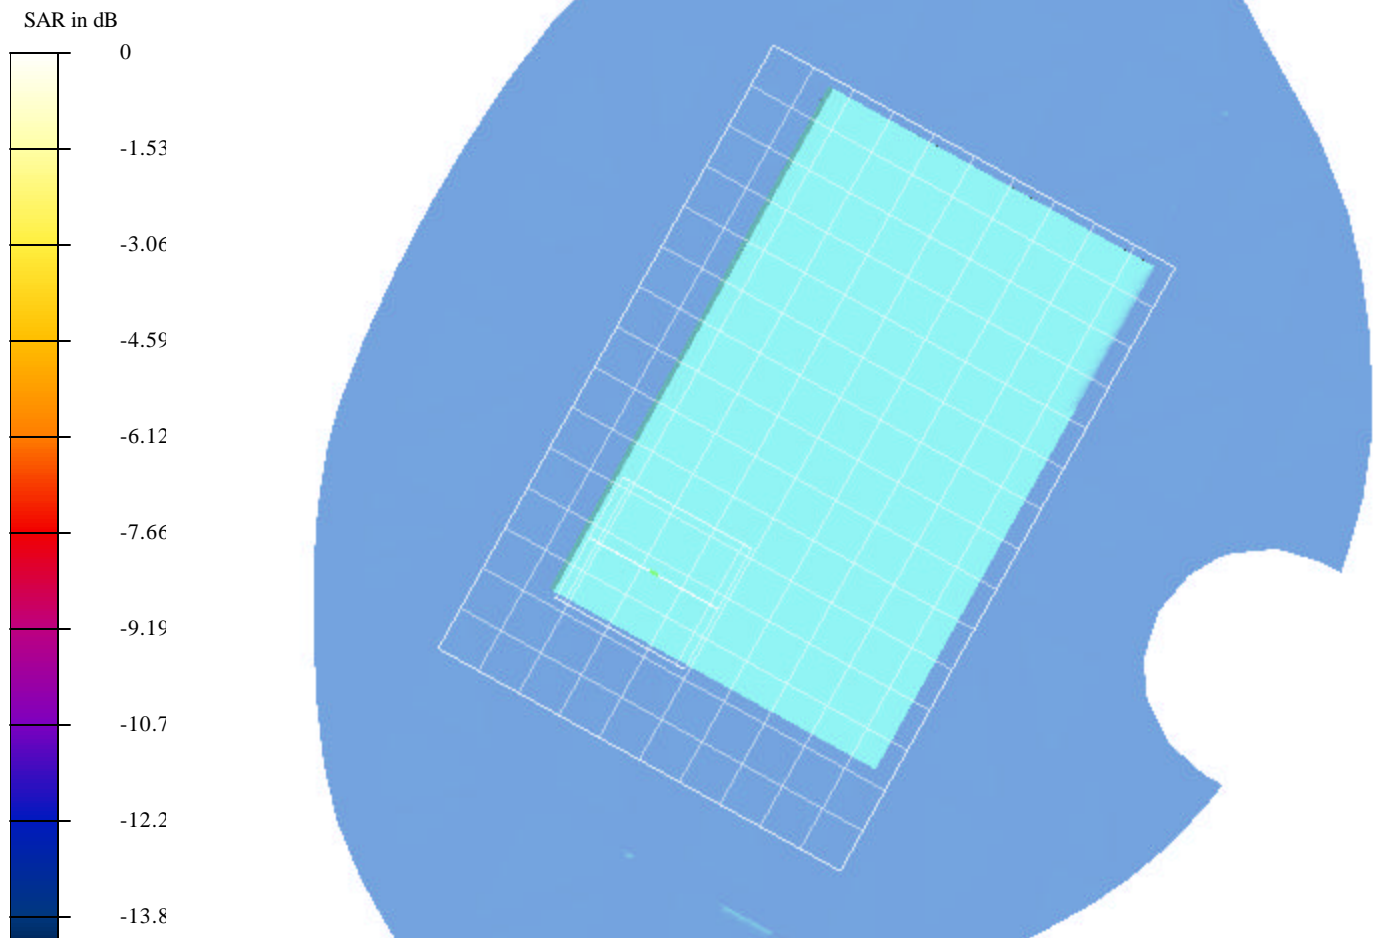

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0198mW_2.5mm.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 4 (Face Held); Low channel, 2412MHz

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Head 2450 MHz ($\sigma = 1.8864$ mho/m, $\epsilon = 39.74$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.5, 4.5, 4.5); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP: 1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.04 V/m

Peak SAR = 0.044 mW/g

SAR(1 g) = 0.0198 mW/g; SAR(10 g) = 0.0106 mW/g

Power Drift = -0.1 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

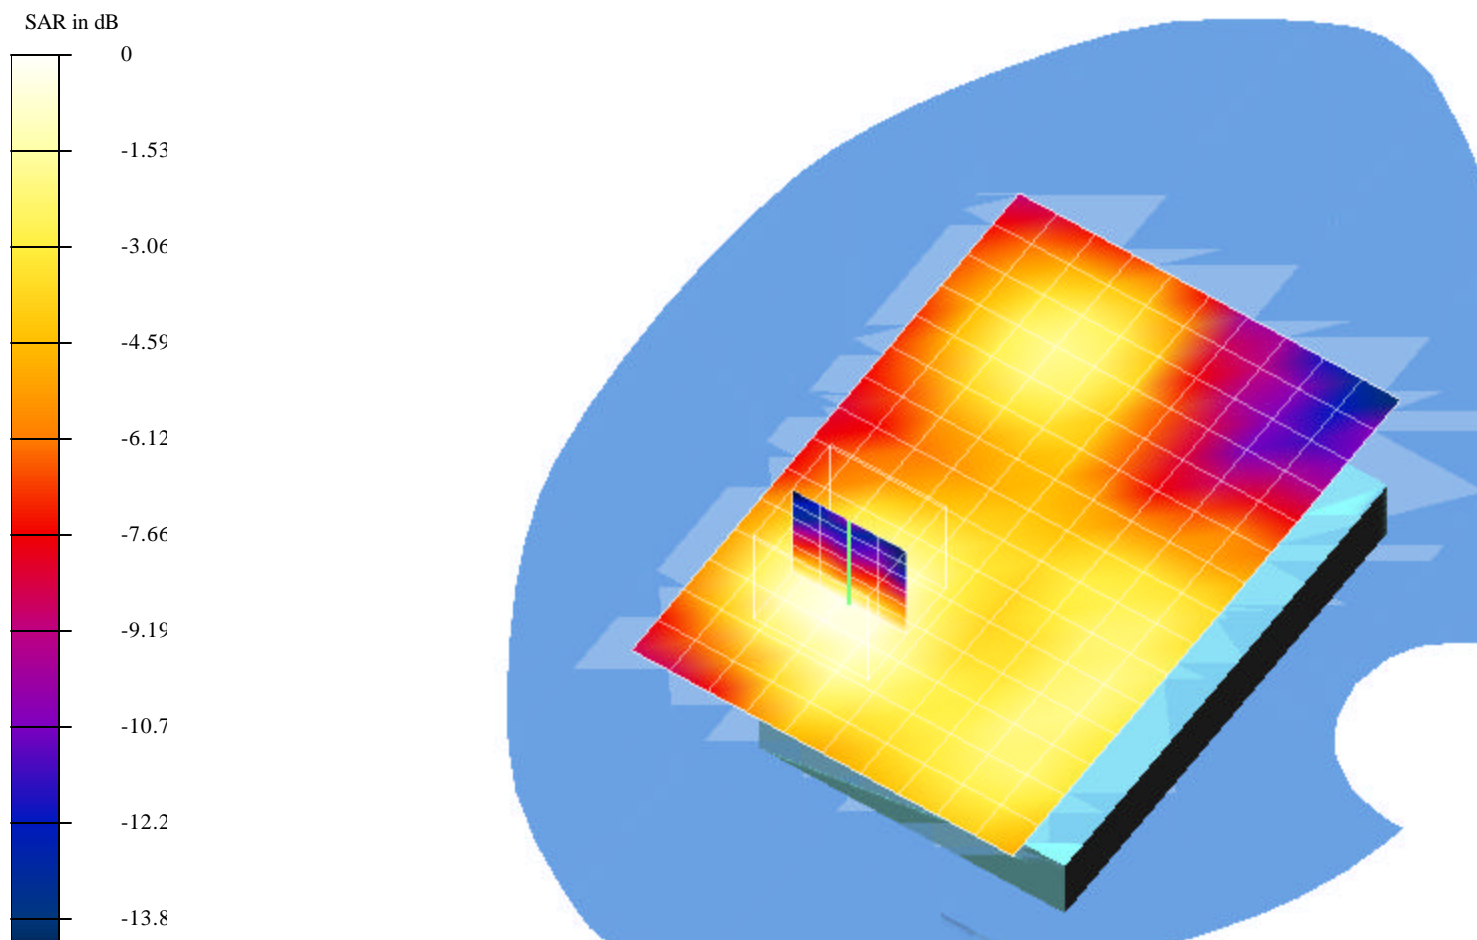

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_0.0226mW_2.5mm.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 4 (Face Held); Middle channel, 2437MHz

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Head 2450 MHz ($\sigma = 1.8864$ mho/m, $\epsilon = 39.74$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.5, 4.5, 4.5); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.04 V/m

Peak SAR = 0.0552 mW/g

SAR(1 g) = 0.0226 mW/g; SAR(10 g) = 0.0121 mW/g

Power Drift = -0.08 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

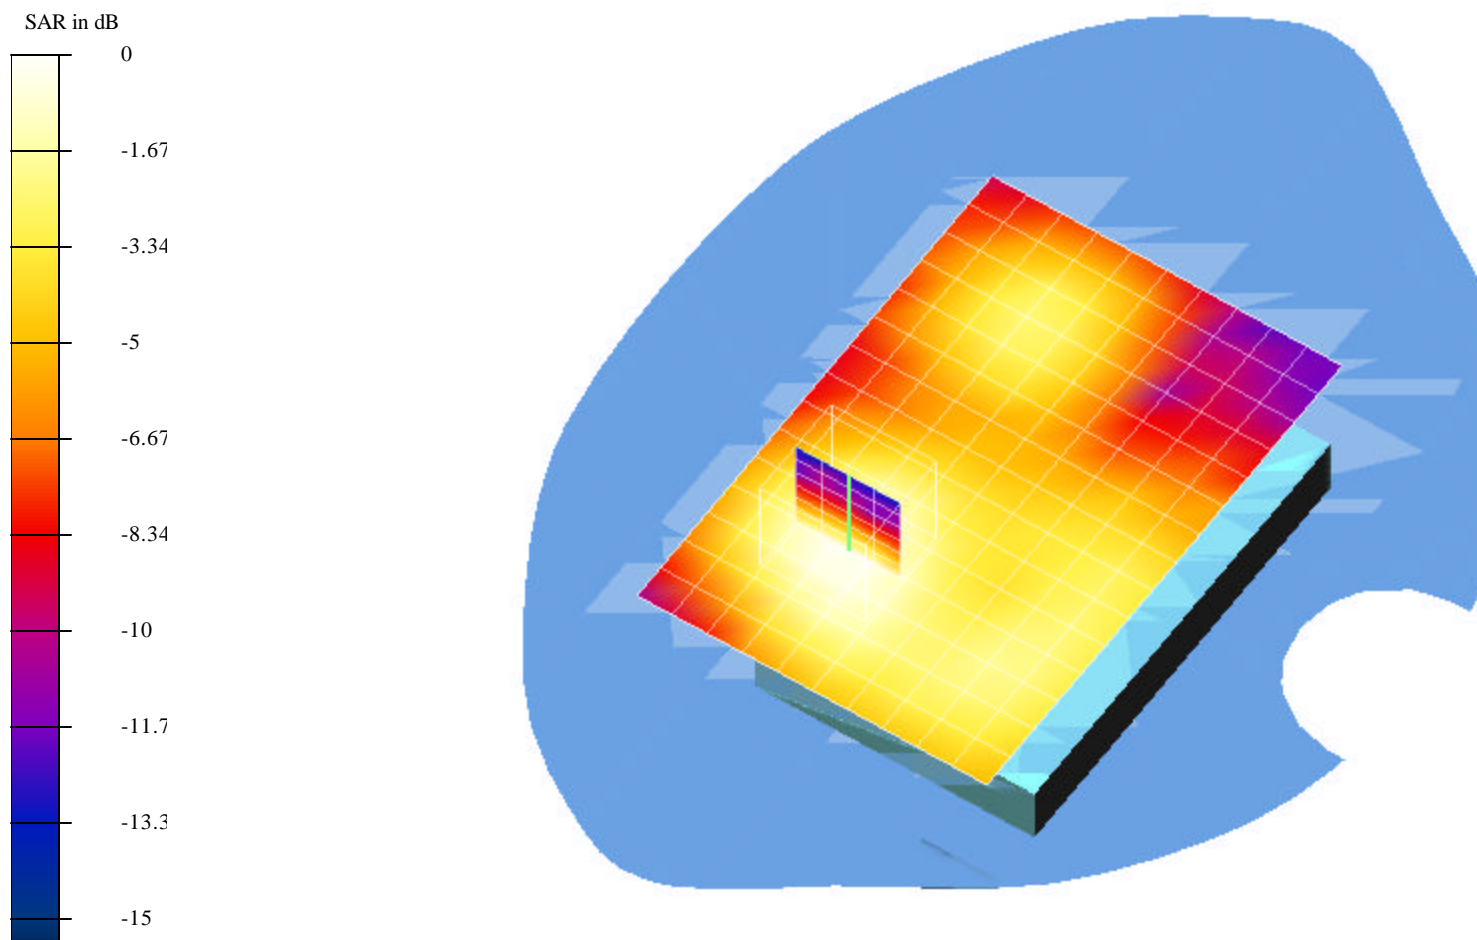

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.0241mW_2.5mm.da4

DUT: Compal Type & Serial Number: e750
Program: EUT Configuration 4 (Face Held); High channel, 2462MHz

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: Head 2450 MHz ($\sigma = 1.8864$ mho/m, $\epsilon = 39.74$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1578; ConvF(4.5, 4.5, 4.5); Calibrated: 2/22/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/26/2002
- Phantom: SAM 2 - TP: 1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm

Reference Value = 2.02 V/m

Peak SAR = 0.057 mW/g

SAR(1 g) = 0.0241 mW/g; SAR(10 g) = 0.013 mW/g

Power Drift = -0.1 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

