

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 96
47 CFR FCC Part 2
Report No.: RFBEDW-WTW-P24070638-3
FCC ID: GKRRXLN3
Product: LGA Module
Brand: COMPAL
Model No.: RXL-N3
Received Date: 2024/7/29
Test Date: 2024/8/5 ~ 2024/10/6
Issued Date: 2024/11/22

Applicant: Compal Electronics, Inc.

Address: No.581 & 581-1, Ruiguang Rd., Neihu District, Taipei, (114) Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location(1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

Test Location(2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

FCC Registration / 788550 / TW0003 for Test Location(1)

Designation Number: 281270 / TW0032 for Test Location(2)

Approved by: Jeremy Lin, **Date:** 2024/11/22
Jeremy Lin / Project Engineer

This test report consists of 82 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Pettie Chen / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Test Mode Applicability and Tested Channel Detail.....	9
3.3.1 LTE Band 48	9
3.4 Test Program Used and Operation Descriptions	11
3.5 Connection Diagram of EUT and Peripheral Devices	11
3.6 Configuration of Peripheral Devices and Cable Connections	11
4 Test Instruments	12
4.1 Maximum EIRP	12
4.2 Modulation Characteristics	12
4.3 Peak to Average Ratio	12
4.4 Bandwidth	12
4.5 Conducted Spurious Emissions	12
4.6 Radiated Spurious Emissions below 1GHz	13
4.7 Radiated Spurious Emissions above 1GHz	14
4.8 Frequency Stability	14
5 Limits of Test Items.....	15
5.1 Maximum EIRP	15
5.2 Modulation Characteristics	15
5.3 Peak to Average Ratio	15
5.4 Bandwidth	15
5.5 Conducted Spurious Emissions	15
5.6 Radiated Spurious Emissions below 1GHz	15
5.7 Radiated Spurious Emissions above 1GHz	15
5.8 Frequency Stability	15
6 Test Arrangements.....	16
6.1 Maximum EIRP	16
6.1.1 Test Setup	16
6.1.2 Test Procedure	16
6.2 Modulation Characteristics	17
6.2.1 Test Setup	17
6.2.2 Test Procedure	17
6.3 Peak to Average Ratio	17
6.3.1 Test Setup	17
6.3.2 Test Procedure	17
6.4 Bandwidth	18
6.4.1 Test Setup	18
6.4.2 Test Procedure	18
6.5 Conducted Spurious Emissions	20
6.5.1 Test Setup	20
6.5.2 Test Procedure	20
6.6 Radiated Spurious Emissions below 1GHz	20
6.6.1 Test Setup	20
6.6.2 Test Procedure	21
6.7 Radiated Spurious Emissions above 1GHz	22
6.7.1 Test Setup	22
6.7.2 Test Procedure	22
6.8 Frequency Stability	23

6.8.1	Test Setup	23
6.8.2	Test Procedure	23
7	Test Results of Test Item	24
7.1	Maximum EIRP	24
7.1.1	LTE Band 48	24
7.2	Modulation Characteristics	36
7.2.1	LTE Band 48	36
7.3	Peak to Average Ratio	37
7.3.1	LTE Band 48	37
7.4	Bandwidth	41
7.4.1	LTE Band 48	41
7.5	Conducted Spurious Emissions	45
7.5.1	LTE Band 48	45
7.6	Radiated Spurious Emissions below 1GHz	69
7.6.1	LTE Band 48	69
7.7	Radiated Spurious Emissions above 1GHz	71
7.7.1	LTE Band 48	71
7.8	Frequency Stability	77
7.8.1	LTE Band 48	77
8	Pictures of Test Arrangements	81
9	Information of the Testing Laboratories	82

Release Control Record

Issue No.	Description	Date Issued
RFBEDW-WTW-P24070638-3	Original release.	2024/11/22

1 Certificate

Product: LGA Module

Brand: COMPAL

Test Model: RXL-N3

Sample Status: Engineering sample

Applicant: Compal Electronics, Inc.

Test Date: 2024/8/5 ~ 2024/10/6

Standard: 47 CFR FCC Part 96
47 CFR FCC Part 2

Measurement Procedure: ANSI/TIA/EIA-603-E 2016
ANSI C63.26-2015
KDB 971168 D01 Power Meas License Digital Systems v03r01
KDB 940660 D01 Part 96 CBRS Eqpt v03

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

Standard / Clause	Test Item	Result	Remark
Part 2.1046 Part 96.41(b)	Maximum EIRP	Pass	Meet the requirement of limit.
Part 2.1047	Modulation Characteristics	Pass	Meet the requirement of limit.
Part 2.1046 Part 96.41(b)	Maximum Power Spectral Density	N/A	This device is End User Device.
Part 96.41(g)	Peak to Average Ratio	Pass	Meet the requirement of limit.
Part 2.1049	Bandwidth	Pass	Meet the requirement of limit.
Part 2.1051 Part 96.41(e)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
Part 2.1053 Part 96.41(e)	Radiated Spurious Emissions below 1GHz	Pass	Minimum passing margin is -7.58 dB at 368.53 MHz
Part 2.1053 Part 96.41(e)	Radiated Spurious Emissions above 1GHz	Pass	Minimum passing margin is -5.95 dB at 14500.00 MHz
Part 2.1055	Frequency Stability	Pass	Meet the requirement of limit.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
Effective Radiated Power and Equivalent Isotropically Radiated Power	-	1.371 dB
Peak to Average Ratio	-	0.920 dB
Bandwidth	-	960 Hz
Conducted Spurious Emissions	-	2.12 dB
Radiated Spurious Emissions below 1GHz	9 kHz ~ 30 MHz	3 dB
	30 MHz ~ 1 GHz	2.93 dB
Radiated Spurious Emissions above 1GHz	1 GHz ~ 18 GHz	1.76 dB
	18 GHz ~ 40 GHz	1.77 dB
Frequency Stability	-	0.176 ppm

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	LGA Module
Brand	COMPAL
Test Model	RXL-N3
Status of EUT	Engineering sample
Power Supply Rating	3.8Vdc
EUT Category	End User Device

Note:

1. EUT Overview

LTE Band 48

Bandwidth	TX Frequency Range (MHz)	Modulation	Max. EIRP (W)	Max. EIRP (dBm)	Emission Designator
5 MHz	3552.5 ~ 3697.5	QPSK	0.171	22.33	4M49G7D
		16QAM	0.137	21.38	4M49D7W
		64QAM	0.11	20.43	4M50D7W
		256QAM	0.051	17.1	4M50D7W
10 MHz	3555 ~ 3695	QPSK	0.17	22.31	8M97G7D
		16QAM	0.134	21.28	8M99D7W
		64QAM	0.109	20.38	8M98D7W
		256QAM	0.051	17.08	8M97D7W
15 MHz (Full Power)	3557.5 ~ 3692.5	QPSK	0.167	22.23	13M5G7D
		16QAM	0.132	21.22	13M5D7W
		64QAM	0.107	20.31	13M5D7W
		256QAM	0.05	17	13M5D7W
20 MHz (Full Power)	3560 ~ 3690	QPSK	0.177	22.48	18M0G7D
		16QAM	0.144	21.58	18M0D7W
		64QAM	0.113	20.53	17M9D7W
		256QAM	0.053	17.25	18M0D7W
15 MHz (dBm/10 MHz)	3557.5 ~ 3692.5	QPSK	0.162	22.1	13M5G7D
		16QAM	0.129	21.09	13M5D7W
		64QAM	0.104	20.19	13M5D7W
		256QAM	0.049	16.88	13M5D7W
20 MHz (dBm/10 MHz)	3560 ~ 3690	QPSK	0.171	22.34	18M0G7D
		16QAM	0.139	21.44	18M0D7W
		64QAM	0.110	20.4	17M9D7W
		256QAM	0.052	17.12	18M0D7W

2. The EUT uses following accessories.

Item	Brand	Model
Ant	INPAQ	ANT0/1/2/3 GNSS

3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

4. LTE Band 48 overlaps the entire frequency range of LTE Band 42 (3550 – 3600 MHz) and LTE Band 43 (3600 – 3700 MHz). Therefore, test data provided in this report covers LTE Band 48 as well as LTE Band 42 and LTE Band 43.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

LTE Band					
Type	External				
Brand	INPAQ				
Band	Freq. Range (MHz)	Peak Gain without cable loss (dBi)			
		Ant. 0 (Main)	Ant. 1 (DRx)	Ant. 2 (DRx)	Ant. 3 (Aux)
LTE B48 (Ant 0)	3550 ~3700	0	0	0	0

Ant. No.	Cable Loss (dB)	Cable Length (mm)
Ant. 0	1.5	141.1
Ant. 1	1.3	120.3
Ant. 2	1	78.2
Ant. 3	1.3	121.2

*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. The antenna of EUT can be used in the following ways: 0 degree/90 degrees. Pre-scan these ways and find the worst case as a representative test condition. 2. Pre-Scan has been conducted to determine the worst-case from all possible combinations of EUT configure mode (1TX or 2TX if available), channel, bandwidth, modulation and RB mode. See below table(s) for details.
Worst Case:	1. 0 degree/90 degrees Worst Condition: 90 degrees

3.3.1 LTE Band 48


Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
Maximum EIRP	55265(3552.50 MHz) 55990(3625.00 MHz) 56715(3697.50 MHz)	5 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB Half RB Full RB
	55290(3555.00 MHz) 55990(3625.00 MHz) 56690(3695.00 MHz)	10 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB Half RB Full RB
	55315(3557.50 MHz) 55990(3625.00 MHz) 56665(3692.50 MHz)	15 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB Half RB Full RB
	55340(3560.00 MHz) 55990(3625.00 MHz) 56640(3690.00 MHz)	20 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB Half RB Full RB
Modulation Characteristics	55990(3625.00 MHz)	20 MHz	QPSK / 16QAM / 64QAM / 256QAM	Full RB
Peak to Average Ratio	55265(3552.50 MHz) 55990(3625.00 MHz) 56715(3697.50 MHz)	5 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB
	55290(3555.00 MHz) 55990(3625.00 MHz) 56690(3695.00 MHz)	10 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB
	55315(3557.50 MHz) 55990(3625.00 MHz) 56665(3692.50 MHz)	15 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB
	55340(3560.00 MHz) 55990(3625.00 MHz) 56640(3690.00 MHz)	20 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB
Bandwidth	55265(3552.50 MHz) 55990(3625.00 MHz) 56715(3697.50 MHz)	5 MHz	QPSK / 16QAM / 64QAM / 256QAM	Full RB
	55290(3555.00 MHz) 55990(3625.00 MHz) 56690(3695.00 MHz)	10 MHz	QPSK / 16QAM / 64QAM / 256QAM	Full RB
	55315(3557.50 MHz) 55990(3625.00 MHz) 56665(3692.50 MHz)	15 MHz	QPSK / 16QAM / 64QAM / 256QAM	Full RB
	55340(3560.00 MHz) 55990(3625.00 MHz) 56640(3690.00 MHz)	20 MHz	QPSK / 16QAM / 64QAM / 256QAM	Full RB

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
Conducted Spurious Emissions	55265(3552.50 MHz) 55990(3625.00 MHz) 56715(3697.50 MHz)	5 MHz	QPSK	1 RB Full RB
	55290(3555.00 MHz) 55990(3625.00 MHz) 56690(3695.00 MHz)	10 MHz	QPSK	1 RB Full RB
	55315(3557.50 MHz) 55990(3625.00 MHz) 56665(3692.50 MHz)	15 MHz	QPSK	1 RB Full RB
	55340(3560.00 MHz) 55990(3625.00 MHz) 56640(3690.00 MHz)	20 MHz	QPSK	1 RB Full RB
Radiated Spurious Emissions below 1GHz	55990(3625.00 MHz)	20 MHz	QPSK	1 RB
Radiated Spurious Emissions above 1GHz	55265(3552.50 MHz) 55990(3625.00 MHz) 56715(3697.50 MHz)	5 MHz	QPSK	1 RB
	55340(3560.00 MHz) 55990(3625.00 MHz) 56640(3690.00 MHz)	20 MHz	QPSK	1 RB
Frequency Stability (3550MHz to 3700MHz)	55265(3552.50 MHz) 56715(3697.50 MHz)	5 MHz	QPSK	Full RB
	55290(3555.00 MHz) 56690(3695.00 MHz)	10 MHz	QPSK	Full RB
	55315(3557.50 MHz) 56665(3692.50 MHz)	15 MHz	QPSK	Full RB
	55340(3560.00 MHz) 56640(3690.00 MHz)	20 MHz	QPSK	Full RB

3.4 Test Program Used and Operation Descriptions

There is no need to controlling software during the test, and the EUT can be paired with the Simulator to test the connection when it is powered on.

3.5 Connection Diagram of EUT and Peripheral Devices

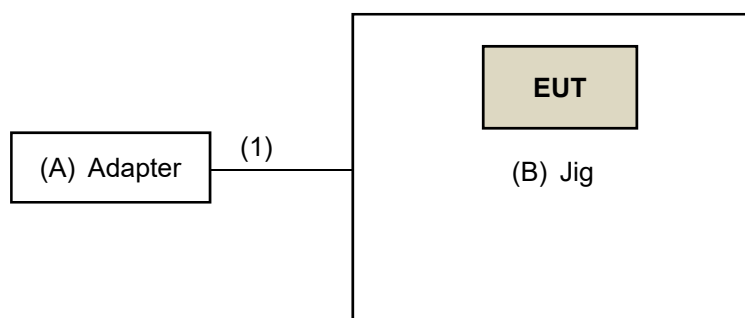

Under Table

Remote Site



(C) Radio
Communication
Analyzer

3.6 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	ChenzhouFrecom Electronics Co. Ltd	F24L5-120200SOPAU	NA	NA	Supplied by applicant
B	Jig	Compal	ZYN1	NA	NA	Supplied by applicant
C	Radio Communication Analyzer	Anritsu	MT8821C	6201462755	NA	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	AC Cable	1	1	No	0	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Maximum EIRP

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030B	MY57140938	2024/3/20	2025/3/19
Radio Communication Analyzer Anritsu	MT8821C	6201462755	2024/3/13	2025/3/12
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/8/14 ~ 2024/10/6

4.2 Modulation Characteristics

Refer to section 4.1 to get the tested date and information of the instruments.

4.3 Peak to Average Ratio

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Conducted Spurious Emissions

Refer to section 4.1 to get the tested date and information of the instruments.

4.6 Radiated Spurious Emissions below 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-1213	2023/10/13	2024/10/12
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Loop Antenna Electro-Metrics	EM-6879	269	2023/9/23	2024/9/22
MXA Signal Analyzer Keysight	N9020B	MY60110513	2023/12/22	2024/12/21
Preamplifier EMCI	EMC330N	980782	2024/1/15	2025/1/14
	EMC001340	980201	2023/9/27	2024/9/26
RF Coaxial Cable EMCI	EMCCFD400-NM-NM-500	201233	2024/1/15	2025/1/14
	EMCCFD400-NM-NM-3000	201235	2024/1/15	2025/1/14
	EMCCFD400-NM-NM-9000	201236(with PAD)	2024/1/15	2025/1/14
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MF-7802BS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208674	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 8.
2. Tested Date: 2024/8/12

4.7 Radiated Spurious Emissions above 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Horn Antenna RFSPIN	DRH18-E	210103A18E	2023/11/12	2024/11/11
Horn Antenna Schwarzbeck	BBHA 9170	9170-1049	2023/11/12	2024/11/11
MXA Signal Analyzer Keysight	N9020B	MY60110513	2023/12/22	2024/12/21
Preamplifier EMCI	EMC118A45SE	980808	2023/12/28	2024/12/27
	EMC184045SE	980788	2024/1/15	2025/1/14
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2024/1/15	2025/1/14
	EMC101G-KM-KM-3000	201258	2024/1/15	2025/1/14
	EMC101G-KM-KM-5000	201261	2024/1/15	2025/1/14
	EMC104-SM-SM-1000	210102	2024/1/15	2025/1/14
	EMC104-SM-SM-3000	201231	2024/1/15	2025/1/14
	EMC104-SM-SM-9000	201243	2024/1/15	2025/1/14
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MF-7802BS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208674	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 8.
2. Tested Date: 2024/8/5 ~ 2024/8/6

4.8 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
3-channel DC power supply JIN YIH Technology	ODP3033	ODP30332128138	N/A	N/A
Digital Multimeter Fluke	8050A	4660081	2024/6/14	2025/6/13
PXA Signal Analyzer Keysight	N9030B	MY57140938	2024/3/20	2025/3/19
Radio Communication Analyzer Anritsu	MT8821C	6201462755	2024/3/13	2025/3/12
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Temperature & Humidity Chamber Terchy	HRM-120RF	931022	2023/12/19	2024/12/18

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/8/20

5 Limits of Test Items

5.1 Maximum EIRP

For LTE Band 48:

Device Category	Maximum EIRP (dBm/10 MHz)
End User Device	23
Category A CBSD	30
Category B CBSD	47

5.2 Modulation Characteristics

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

5.3 Peak to Average Ratio

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.4 Bandwidth

According to FCC 47 CFR part 2.1049, the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

5.5 Conducted Spurious Emissions

For LTE Band 48:

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B MHz (where B is the bandwidth in MHz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B MHz below the lower CBSD-assigned channel edge. At all frequencies greater than B MHz above the upper CBSD assigned channel edge and less than B MHz below the lower CBSD-assigned channel edge, the conducted power of any end user device emission shall not exceed -25 dBm/MHz.

Additional protection levels: The conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

5.6 Radiated Spurious Emissions below 1GHz

For LTE Band 48:

The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

5.7 Radiated Spurious Emissions above 1GHz

For LTE Band 48:

The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

5.8 Frequency Stability

For LTE Band 48:


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation (authorized frequency block).

6 Test Arrangements

6.1 Maximum EIRP

6.1.1 Test Setup

Conducted Power Measurement:

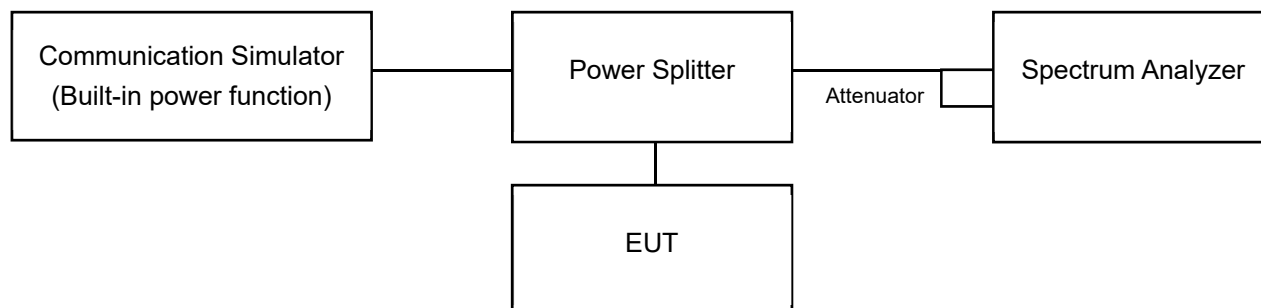

6.1.2 Test Procedure

Channel Power Measurement:

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology. The average (rms) power measurement was performed on emulator and power value was measured from power function on emulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Power 10 MHz Measurement:

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology and link to spectrum analyzer measurements. Set the EUT to transmit under low, middle and high channel and record the power level shown on spectrum analyzer. Power measurements use detector average (rms).

Measurement method refers to ANSI C63.26 section 5.2.4.4.

- a. Set span to $2 \times$ to $3 \times$ the OBW.
- b. Set RBW = 1% to 5% of the OBW.
- c. Set VBW $\geq 3 \times$ RBW.
- d. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
- e. Set Sweep time = auto-couple.
- f. Detector = power averaging (rms).
- g. Set sweep trigger to "free run."
- h. Trace average at least 100 traces in power averaging (rms) mode.
- i. Use the Band/Channel Power function to determine the integrated power per 10 MHz bandwidth, according to the 47 CFR FCC Part 96 standard.
- j. If Duty cycle < 98%, Add $10 \log (1/\text{duty cycle})$ to the measured power level to compute the average power during continuous transmission.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively


(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

6.2 Modulation Characteristics

6.2.1 Test Setup

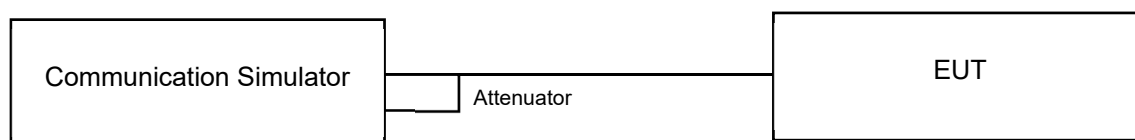


6.2.2 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector, the frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

6.3 Peak to Average Ratio

6.3.1 Test Setup

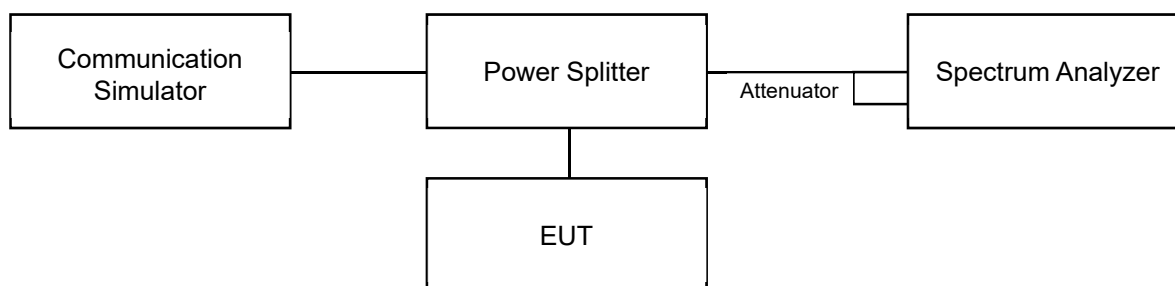


6.3.2 Test Procedure

- Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

6.4 Bandwidth

6.4.1 Test Setup

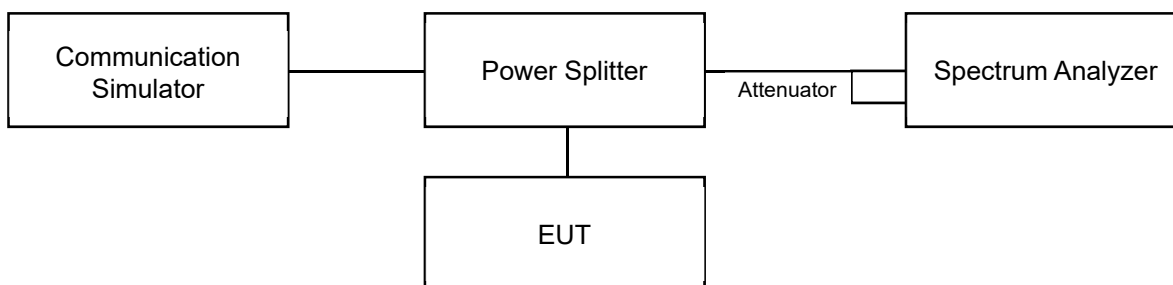

6.4.2 Test Procedure

For the 26 dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.


- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- Determine the following reference values: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

For the occupied bandwidth measurement method, please refer to section 5.4.4 of ANSI C63.26.

- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b. The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d. The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e. Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- f. Determine the reference value by either of the following:
 - g. 1) Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - h. 2) Set the EUT to transmit an unmodulated carrier. Set the spectrum analyzer marker to the level of the carrier.
- i. Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- j. If the reference value was determined using an unmodulated carrier, turn the EUT modulation on, then either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise the trace from step f) shall be used for step i).
- k. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers. The spectral envelope can cross the “-X dB amplitude” at multiple points. The lowest or highest frequency shall be selected as the frequencies that are the farthest away from the center frequency at which the spectral envelope crosses the “-X dB amplitude.”
- l. The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.5 Conducted Spurious Emissions

6.5.1 Test Setup

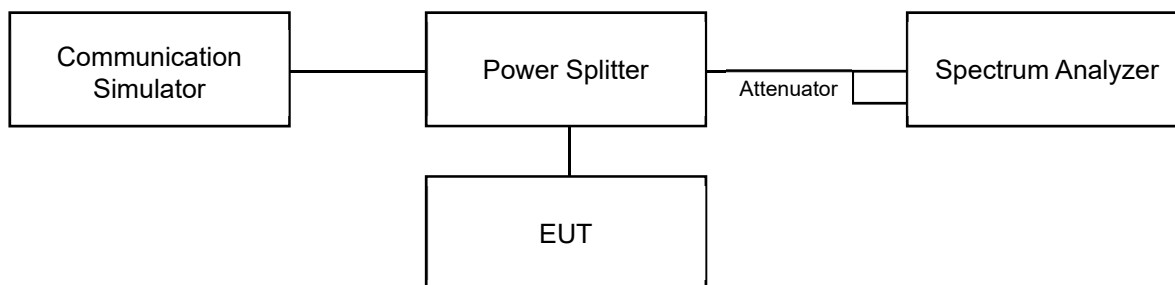


6.5.2 Test Procedure

- Measurement refer to ANSI C63.26 section 5.7.
- All measurements were done at 3 channels: low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. 20 dB attenuation pad is connected with spectrum.
- The fundamental frequency above 1 GHz, the spectrum set RBW = 1 MHz, VBW = 3 MHz, Detector = Average.
- The fundamental frequency below 1 GHz, the spectrum set RBW $\geq$ 100 kHz, VBW $\geq$ 3 x RBW, Detector = Average.
- Measuring frequency band edge, narrow RBW (no less than 1% of the OBW) is used for conducted emission measurement.
- For the emissions measurement method, certain channel BW modes demonstrate compliance by integrating with the smaller RBW allowed by the rule.
For example: Where Reference RBW = 1 MHz and a smaller RBW = 100 kHz is used, worst-case integrated BW power = [Max Measured Value (dBm) with RBW = 100 kHz] + $10 \cdot \log(1000/100)$.
To compensate for this integration before comparison to the value, the adjusted reference level offset was increase by 10 dB accordingly.
- Record the maximum power value test plot.


6.6 Radiated Spurious Emissions below 1GHz

6.6.1 Test Setup

For Radiated emission below 30 MHz

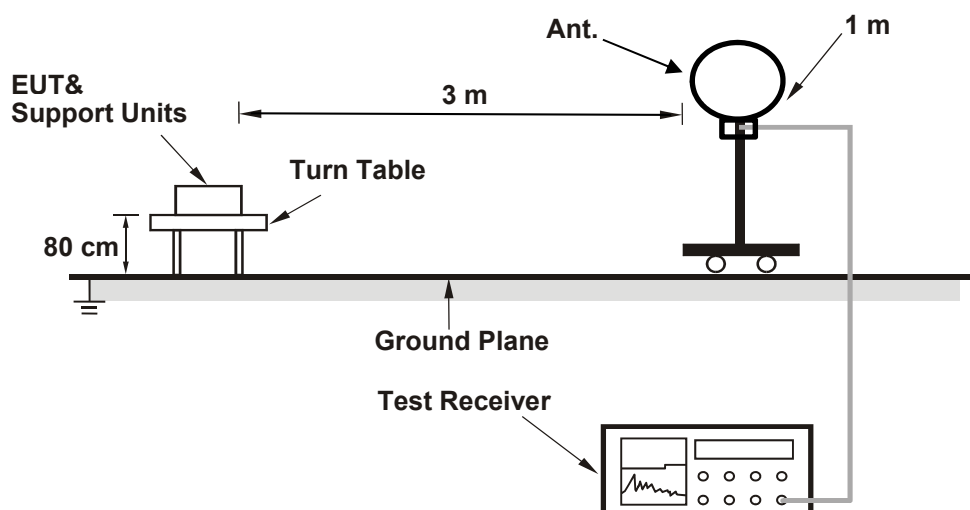

For Radiated emission above 30 MHz

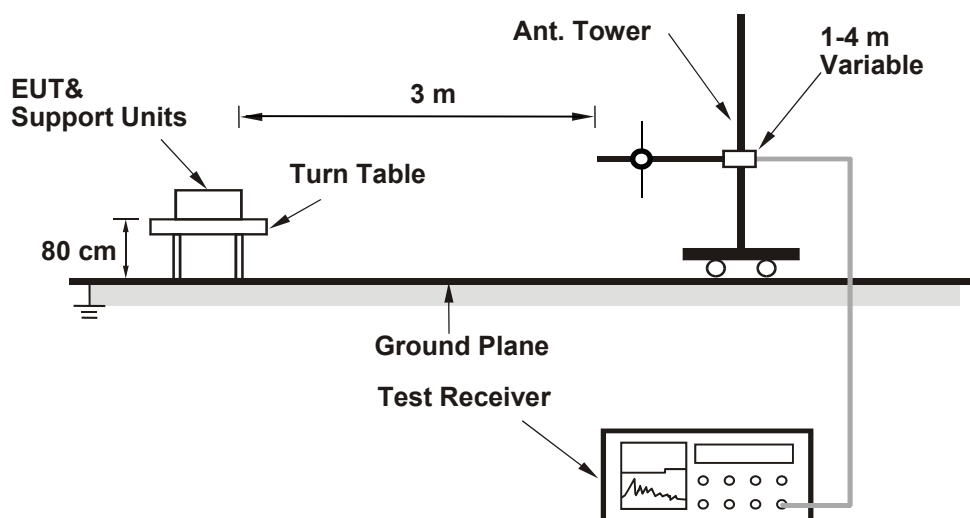

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

The EUT is configured to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following ANSI C63.26 section 5.5 and 5.2.7
- $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.


Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.
- The amplitude of spurious emissions in the range 9 kHz to 30 MHz which are attenuated more than 20 dB below the permissible value need not be reported.

6.7 Radiated Spurious Emissions above 1GHz

6.7.1 Test Setup

For radiated emission above 1 GHz

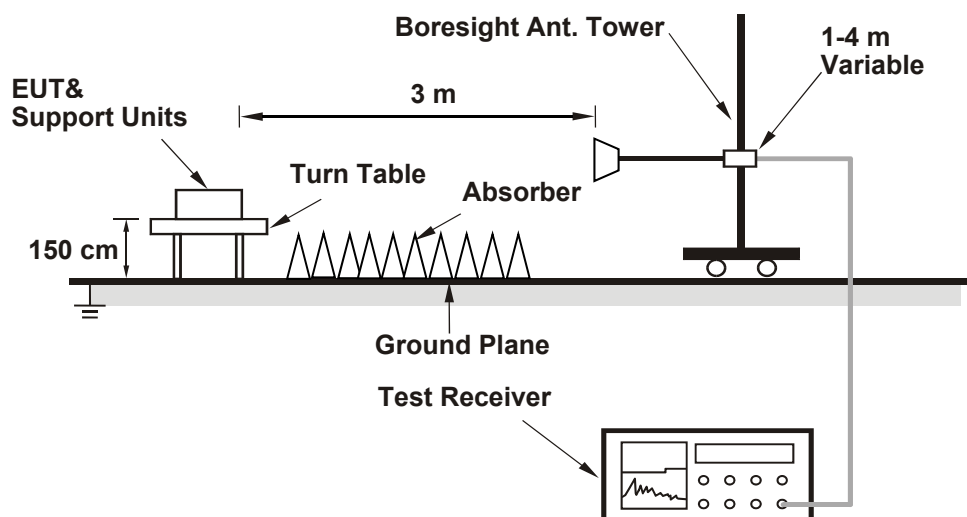

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure


The EUT is configured to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 1.5 m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following ANSI C63.26 section 5.5 and 5.2.7
- $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.

6.8 Frequency Stability

6.8.1 Test Setup

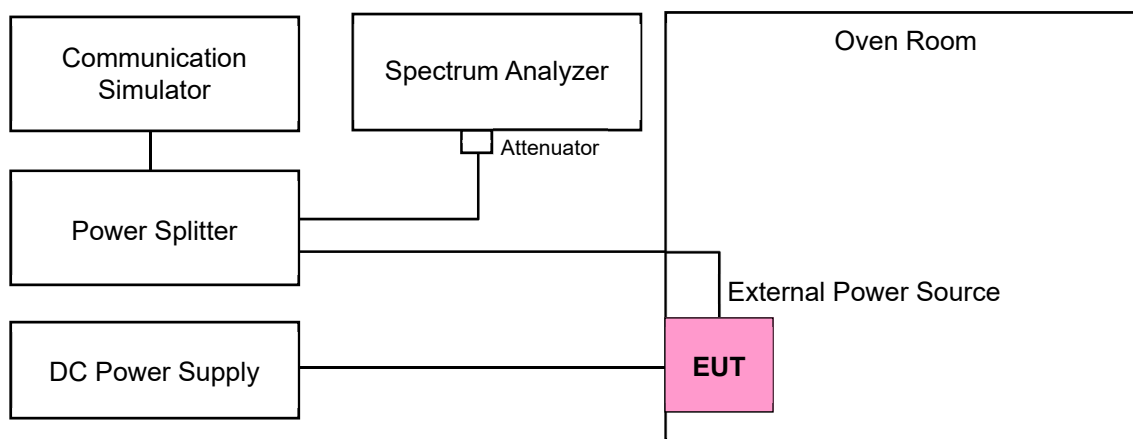

6.8.2 Test Procedure

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology.

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

7 Test Results of Test Item

7.1 Maximum EIRP

Input Power:	3.8 Vdc	Environmental Conditions:	23°C, 74% RH	Tested By:	Willy Cheng
--------------	---------	---------------------------	--------------	------------	-------------

7.1.1 LTE Band 48

LTE Band 48, Channel Bandwidth: 5 MHz

Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55265	CH 55990	CH 56715
			3552.5 MHz	3625 MHz	3697.5 MHz
QPSK	1	0	22.04	22.13	22.06
	1	12	22.27	22.33	22.33
	1	24	22.13	22.12	21.91
	12	0	21.21	21.34	21.12
	12	6	21.10	21.28	21.14
	12	13	21.15	21.28	21.24
	25	0	21.12	21.28	21.01
16QAM	1	0	20.98	21.06	21.01
	1	12	21.36	21.38	21.21
	1	24	20.99	21.13	21.02
	12	0	20.29	20.26	20.16
	12	6	20.17	20.36	20.30
	12	13	20.15	20.30	20.21
	25	0	20.13	20.26	20.13
64QAM	1	0	20.07	20.11	19.88
	1	12	20.30	20.43	20.38
	1	24	20.00	20.19	20.00
	12	0	19.26	19.34	19.16
	12	6	19.15	19.33	19.22
	12	13	19.19	19.39	19.19
	25	0	19.14	19.42	19.18
256QAM	1	0	16.68	16.91	16.51
	1	12	17.02	17.10	16.86
	1	24	16.74	16.72	16.61
	12	0	16.81	16.83	16.77
	12	6	16.76	16.83	16.93
	12	13	16.65	16.85	16.79
	25	0	16.76	16.87	16.75

Output Power

Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	21.01	22.33	21.01	22.33	23.00
16QAM	20.13	21.38	20.13	21.38	23.00
64QAM	19.14	20.43	19.14	20.43	23.00
256QAM	16.51	17.1	16.51	17.1	23.00

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

LTE Band 48, Channel Bandwidth: 10 MHz

Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55290	CH 55990	CH 56690
			3555 MHz	3625 MHz	3695 MHz
QPSK	1	0	21.97	22.16	22.06
	1	24	22.06	22.19	22.16
	1	49	22.24	22.31	22.16
	25	0	21.07	21.20	21.05
	25	12	21.03	21.26	21.13
	25	25	21.07	21.19	21.06
	50	0	21.18	21.42	21.24
16QAM	1	0	21.01	21.23	21.19
	1	24	21.04	21.27	21.21
	1	49	21.16	21.28	21.20
	25	0	20.12	20.21	20.15
	25	12	20.16	20.24	20.06
	25	25	20.24	20.30	20.13
	50	0	20.22	20.37	20.31
64QAM	1	0	20.02	20.26	20.08
	1	24	20.15	20.35	20.23
	1	49	20.18	20.38	20.24
	25	0	19.23	19.32	19.23
	25	12	19.21	19.34	19.11
	25	25	19.24	19.43	19.27
	50	0	19.23	19.45	19.26
256QAM	1	0	16.55	17.07	16.83
	1	24	16.80	17.08	16.99
	1	49	16.88	16.97	16.71
	25	0	16.81	16.76	16.83
	25	12	16.72	16.75	16.64
	25	25	16.77	16.86	16.79
	50	0	16.78	16.97	16.82

Output Power

Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	21.03	22.31	21.03	22.31	23.00
16QAM	20.06	21.28	20.06	21.28	23.00
64QAM	19.11	20.38	19.11	20.38	23.00
256QAM	16.55	17.08	16.55	17.08	23.00

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

LTE Band 48, Channel Bandwidth: 15 MHz, Output Power: Full Power

Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55315	CH 55990	CH 56665
			3557.5 MHz	3625 MHz	3692.5 MHz
QPSK	1	0	21.91	22.07	21.90
	1	37	22.21	22.23	22.05
	1	74	21.93	22.06	21.79
	36	0	21.03	21.21	21.14
	36	19	21.16	21.27	21.01
	36	39	21.03	21.18	21.02
	75	0	21.04	21.36	21.26
16QAM	1	0	20.91	21.22	20.96
	1	37	21.07	21.20	21.04
	1	74	20.97	21.06	20.90
	36	0	20.02	20.34	20.13
	36	19	20.08	20.29	20.19
	36	39	19.94	20.05	20.06
	75	0	20.23	20.23	20.25
64QAM	1	0	20.00	20.20	20.04
	1	37	20.24	20.31	20.12
	1	74	19.96	20.14	19.91
	36	0	19.04	19.37	19.08
	36	19	19.10	19.27	19.20
	36	39	19.09	19.17	19.12
	75	0	19.25	19.44	19.26
256QAM	1	0	16.69	16.90	16.74
	1	37	16.86	17.00	16.66
	1	74	16.53	16.62	16.79
	36	0	16.71	16.74	16.63
	36	19	16.67	16.82	16.69
	36	39	16.53	16.67	16.62
	75	0	16.76	16.94	16.82

Output Power

Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	21.01	22.23	21.01	22.23	23.00
16QAM	19.94	21.22	19.94	21.22	23.00
64QAM	19.04	20.31	19.04	20.31	23.00
256QAM	16.53	17	16.53	17	23.00

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

LTE Band 48, Channel Bandwidth: 20 MHz, Output Power: Full Power

Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55340	CH 55990	CH 56640
			3560 MHz	3625 MHz	3690 MHz
QPSK	1	0	22.20	22.41	22.48
	1	50	22.43	22.40	22.31
	1	99	22.19	22.27	22.16
	50	0	21.20	21.34	21.36
	50	25	21.31	21.32	21.14
	50	50	21.19	21.32	21.12
	100	0	20.98	21.14	21.09
16QAM	1	0	21.23	21.58	21.41
	1	50	21.43	21.52	21.45
	1	99	21.17	21.39	21.28
	50	0	20.23	20.47	20.36
	50	25	20.27	20.49	20.27
	50	50	20.25	20.33	20.12
	100	0	20.14	20.14	20.07
64QAM	1	0	20.39	20.53	20.43
	1	50	20.46	20.49	20.50
	1	99	20.18	20.39	20.31
	50	0	19.24	19.46	19.34
	50	25	19.35	19.36	19.23
	50	50	19.24	19.52	19.30
	100	0	19.19	19.28	19.21
256QAM	1	0	17.03	17.23	16.99
	1	50	17.25	17.11	16.95
	1	99	16.94	16.87	16.89
	50	0	16.84	17.11	16.94
	50	25	16.86	16.97	16.88
	50	50	16.92	17.10	16.76
	100	0	16.70	16.79	16.71

Output Power

Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	20.98	22.48	20.98	22.48	23.00
16QAM	20.07	21.58	20.07	21.58	23.00
64QAM	19.19	20.53	19.19	20.53	23.00
256QAM	16.7	17.25	16.7	17.25	23.00

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

LTE Band 48, Channel Bandwidth: 15 MHz, Output Power: dBm/10 MHz

Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55315	CH 55990	CH 56665
			3557.5 MHz	3625 MHz	3692.5 MHz
QPSK	1	0	21.79	21.95	21.76
	1	37	22.09	22.10	21.91
	1	74	21.81	21.93	21.65
	36	0	20.91	21.06	21.02
	36	19	21.04	21.14	20.87
	36	39	20.91	21.06	20.90
	75	0	19.76	20.12	20.06
16QAM	1	0	20.79	21.09	20.83
	1	37	20.95	21.08	20.90
	1	74	20.85	20.94	20.78
	36	0	19.88	20.21	19.99
	36	19	19.96	20.16	20.07
	36	39	19.80	19.93	19.94
	75	0	18.95	18.96	18.98
64QAM	1	0	19.87	20.06	19.92
	1	37	20.10	20.19	19.99
	1	74	19.83	20.02	19.79
	36	0	18.91	19.25	18.95
	36	19	18.98	19.15	19.07
	36	39	18.96	19.05	18.98
	75	0	18.00	18.15	18.04
256QAM	1	0	16.57	16.78	16.60
	1	37	16.74	16.88	16.53
	1	74	16.41	16.49	16.67
	36	0	16.57	16.60	16.51
	36	19	16.54	16.69	16.56
	36	39	16.40	16.53	16.49
	75	0	15.52	15.67	15.56

Output Power					
Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	19.76	22.1	19.76	22.1	23.00
16QAM	18.95	21.09	18.95	21.09	23.00
64QAM	18	20.19	18	20.19	23.00
256QAM	15.52	16.88	15.52	16.88	23.00

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

LTE Band 48, Channel Bandwidth: 20 MHz, Output Power: dBm/10 MHz


Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55340	CH 55990	CH 56640
			3560 MHz	3625 MHz	3690 MHz
QPSK	1	0	22.07	22.29	22.34
	1	50	22.31	22.27	22.19
	1	99	22.05	22.14	22.04
	50	0	21.07	21.20	21.24
	50	25	21.18	21.18	21.01
	50	50	21.06	21.18	20.99
	100	0	18.52	18.75	18.62
16QAM	1	0	21.09	21.44	21.28
	1	50	21.29	21.39	21.33
	1	99	21.04	21.26	21.14
	50	0	20.09	20.35	20.24
	50	25	20.14	20.37	20.13
	50	50	20.13	20.19	20.00
	100	0	17.65	17.76	17.66
64QAM	1	0	20.25	20.40	20.31
	1	50	20.32	20.37	20.37
	1	99	20.04	20.27	20.18
	50	0	19.11	19.32	19.21
	50	25	19.22	19.23	19.11
	50	50	19.12	19.38	19.16
	100	0	16.87	16.94	16.83
256QAM	1	0	16.90	17.09	16.85
	1	50	17.12	16.99	16.82
	1	99	16.80	16.74	16.75
	50	0	16.70	16.99	16.80
	50	25	16.74	16.83	16.74
	50	50	16.80	16.97	16.63
	100	0	14.28	14.44	14.30

Output Power

Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	18.52	22.34	18.52	22.34	23.00
16QAM	17.65	21.44	17.65	21.44	23.00
64QAM	16.83	20.4	16.83	20.4	23.00
256QAM	14.28	17.12	14.28	17.12	23.00

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

Spectrum Plot of Worst Value

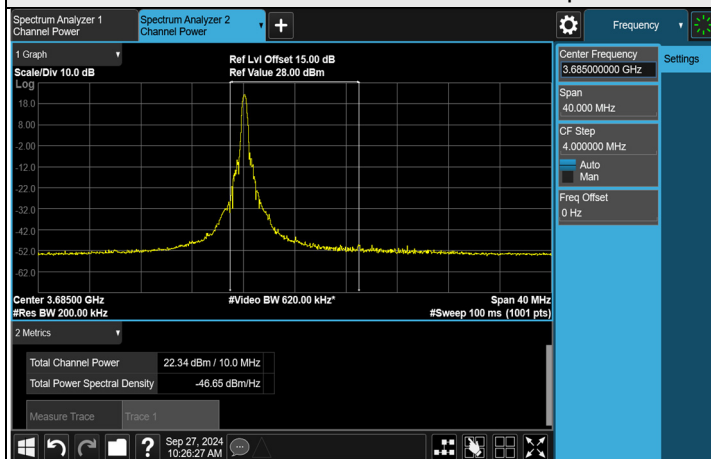

QPSK CH 566400 (3690 MHz)



Note: For the channel bandwidth is less than or equal to 10 MHz, the full power test data please refer to the power per 10 MHz corresponding to the channel bandwidth.



7.2 Modulation Characteristics

Input Power:	3.8 Vdc	Environmental Conditions:	24°C, 68% RH	Tested By:	Noah Chang
--------------	---------	---------------------------	--------------	------------	------------

7.2.1 LTE Band 48

LTE Band 48, Channel Bandwidth: 20 MHz

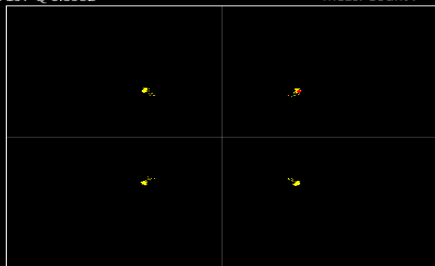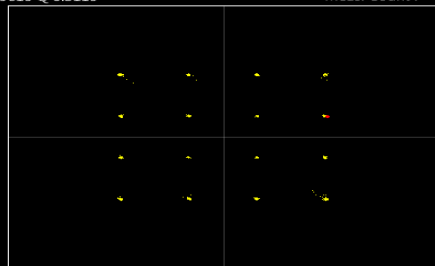Fundamental > Constellation 0 Symbol I 0.7197 Q 0.6952 Meas. Count : 1/ 1  Q I <table><tr><td>EVM</td><td>Avg. 2.11</td><td>Max. 2.11</td><td>Min. 2.11 %(rms)</td><td>Limit ≤ 17.5 %(rms)</td></tr><tr><td>Peak Vector Error</td><td>25.06</td><td>25.06</td><td>25.06 %</td><td></td></tr><tr><td>Carrier Leakage</td><td>-57.04</td><td>-57.04</td><td>-57.04 dBc</td><td></td></tr><tr><td>IQ Imbalance</td><td>100.89</td><td>100.89</td><td>100.89 %(I/Q)</td><td></td></tr></table>	EVM	Avg. 2.11	Max. 2.11	Min. 2.11 %(rms)	Limit ≤ 17.5 %(rms)	Peak Vector Error	25.06	25.06	25.06 %		Carrier Leakage	-57.04	-57.04	-57.04 dBc		IQ Imbalance	100.89	100.89	100.89 %(I/Q)		Fundamental > Constellation 0 Symbol I 0.9615 Q 0.3119 Meas. Count : 1/ 1  Q I <table><tr><td>EVM</td><td>Avg. 1.77</td><td>Max. 1.77</td><td>Min. 1.77 %(rms)</td><td>Limit ≤ 12.5 %(rms)</td></tr><tr><td>Peak Vector Error</td><td>26.29</td><td>26.29</td><td>26.29 %</td><td></td></tr><tr><td>Carrier Leakage</td><td>-52.81</td><td>-52.81</td><td>-52.81 dBc</td><td></td></tr><tr><td>IQ Imbalance</td><td>100.89</td><td>100.89</td><td>100.89 %(I/Q)</td><td></td></tr></table>	EVM	Avg. 1.77	Max. 1.77	Min. 1.77 %(rms)	Limit ≤ 12.5 %(rms)	Peak Vector Error	26.29	26.29	26.29 %		Carrier Leakage	-52.81	-52.81	-52.81 dBc		IQ Imbalance	100.89	100.89	100.89 %(I/Q)	
EVM	Avg. 2.11	Max. 2.11	Min. 2.11 %(rms)	Limit ≤ 17.5 %(rms)																																					
Peak Vector Error	25.06	25.06	25.06 %																																						
Carrier Leakage	-57.04	-57.04	-57.04 dBc																																						
IQ Imbalance	100.89	100.89	100.89 %(I/Q)																																						
EVM	Avg. 1.77	Max. 1.77	Min. 1.77 %(rms)	Limit ≤ 12.5 %(rms)																																					
Peak Vector Error	26.29	26.29	26.29 %																																						
Carrier Leakage	-52.81	-52.81	-52.81 dBc																																						
IQ Imbalance	100.89	100.89	100.89 %(I/Q)																																						
QPSK CH 55990 (3625 MHz)	16QAM CH 55990 (3625 MHz)																																								

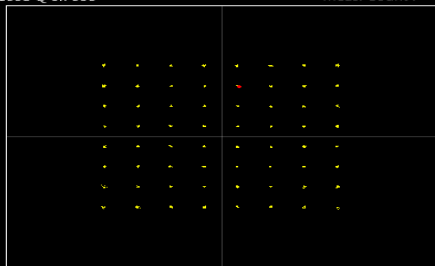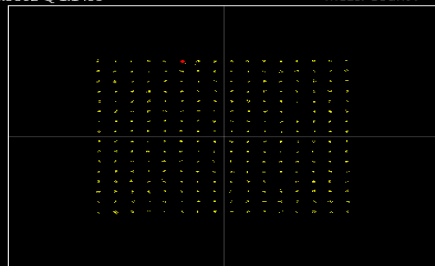Fundamental > Constellation 0 Symbol I 0.1608 Q 0.7666 Meas. Count : 1/ 1  Q I <table><tr><td>EVM</td><td>Avg. 1.22</td><td>Max. 1.22</td><td>Min. 1.22 %(rms)</td><td>Limit ≤ 8.0 %(rms)</td></tr><tr><td>Peak Vector Error</td><td>16.55</td><td>16.55</td><td>16.55 %</td><td></td></tr><tr><td>Carrier Leakage</td><td>-54.34</td><td>-54.34</td><td>-54.34 dBc</td><td></td></tr><tr><td>IQ Imbalance</td><td>100.85</td><td>100.85</td><td>100.85 %(I/Q)</td><td></td></tr></table>	EVM	Avg. 1.22	Max. 1.22	Min. 1.22 %(rms)	Limit ≤ 8.0 %(rms)	Peak Vector Error	16.55	16.55	16.55 %		Carrier Leakage	-54.34	-54.34	-54.34 dBc		IQ Imbalance	100.85	100.85	100.85 %(I/Q)		Fundamental > Constellation 0 Symbol I -0.3802 Q 1.1499 Meas. Count : 1/ 1  Q I <table><tr><td>EVM</td><td>Avg. 1.24</td><td>Max. 1.24</td><td>Min. 1.24 %(rms)</td><td>Limit</td></tr><tr><td>Peak Vector Error</td><td>9.36</td><td>9.36</td><td>9.36 %</td><td></td></tr><tr><td>Carrier Leakage</td><td>-51.73</td><td>-51.73</td><td>-51.73 dBc</td><td></td></tr><tr><td>IQ Imbalance</td><td>100.82</td><td>100.82</td><td>100.82 %(I/Q)</td><td></td></tr></table>	EVM	Avg. 1.24	Max. 1.24	Min. 1.24 %(rms)	Limit	Peak Vector Error	9.36	9.36	9.36 %		Carrier Leakage	-51.73	-51.73	-51.73 dBc		IQ Imbalance	100.82	100.82	100.82 %(I/Q)	
EVM	Avg. 1.22	Max. 1.22	Min. 1.22 %(rms)	Limit ≤ 8.0 %(rms)																																					
Peak Vector Error	16.55	16.55	16.55 %																																						
Carrier Leakage	-54.34	-54.34	-54.34 dBc																																						
IQ Imbalance	100.85	100.85	100.85 %(I/Q)																																						
EVM	Avg. 1.24	Max. 1.24	Min. 1.24 %(rms)	Limit																																					
Peak Vector Error	9.36	9.36	9.36 %																																						
Carrier Leakage	-51.73	-51.73	-51.73 dBc																																						
IQ Imbalance	100.82	100.82	100.82 %(I/Q)																																						
64QAM CH 55990 (3625 MHz)	256QAM CH 55990 (3625 MHz)																																								


7.3 Peak to Average Ratio

Input Power:	3.8 Vdc	Environmental Conditions:	24°C, 68% RH	Tested By:	Noah Chang
--------------	---------	---------------------------	--------------	------------	------------

7.3.1 LTE Band 48


LTE Band 48, Channel Bandwidth: 5 MHz

Modulation	Channel	Frequency (MHz)	Measurement Value(dB)	Limit (dB)	Result
QPSK	55265	3552.5	8.52	13	PASS
QPSK	55990	3625	8.34	13	PASS
QPSK	56715	3697.5	8.29	13	PASS
16QAM	55265	3552.5	9.24	13	PASS
16QAM	55990	3625	9.12	13	PASS
16QAM	56715	3697.5	9.07	13	PASS
64QAM	55265	3552.5	10.19	13	PASS
64QAM	55990	3625	9.80	13	PASS
64QAM	56715	3697.5	9.95	13	PASS
256QAM	55265	3552.5	10.50	13	PASS
256QAM	55990	3625	10.73	13	PASS
256QAM	56715	3697.5	10.34	13	PASS

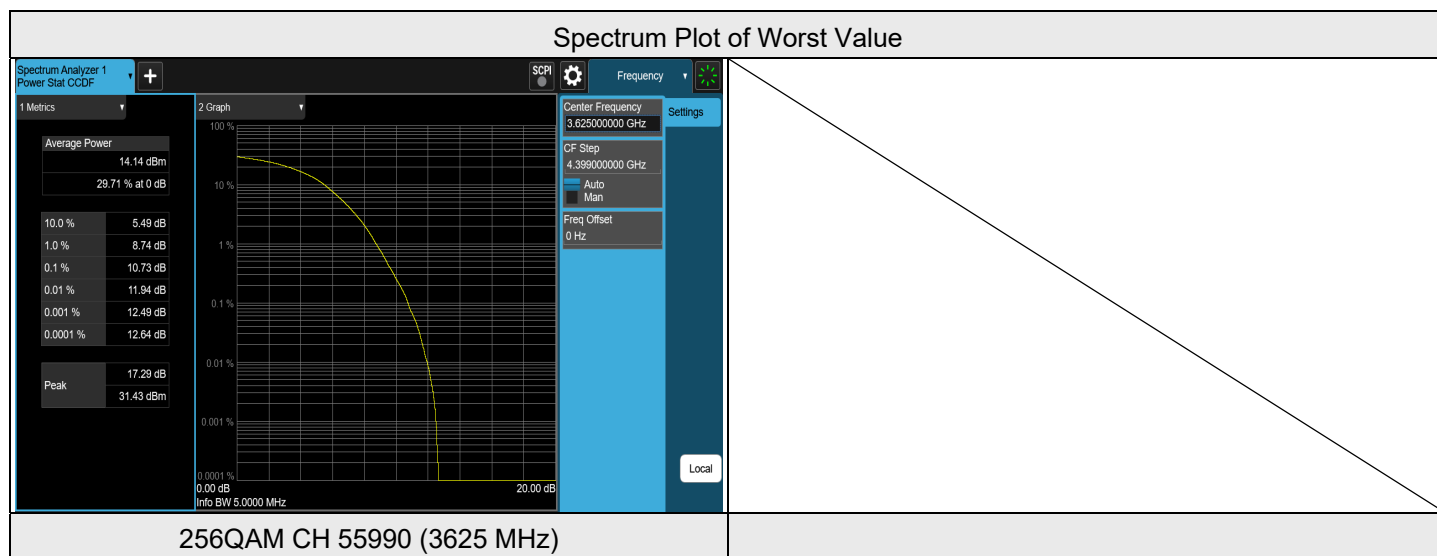

LTE Band 48, Channel Bandwidth: 10 MHz


Modulation	Channel	Frequency (MHz)	Measurement Value(dB)	Limit (dB)	Result
QPSK	55290	3555	8.75	13	PASS
QPSK	55990	3625	8.55	13	PASS
QPSK	56690	3695	8.03	13	PASS
16QAM	55290	3555	9.40	13	PASS
16QAM	55990	3625	9.23	13	PASS
16QAM	56690	3695	8.86	13	PASS
64QAM	55290	3555	10.36	13	PASS
64QAM	55990	3625	10.02	13	PASS
64QAM	56690	3695	10.14	13	PASS
256QAM	55290	3555	10.19	13	PASS
256QAM	55990	3625	10.70	13	PASS
256QAM	56690	3695	10.14	13	PASS

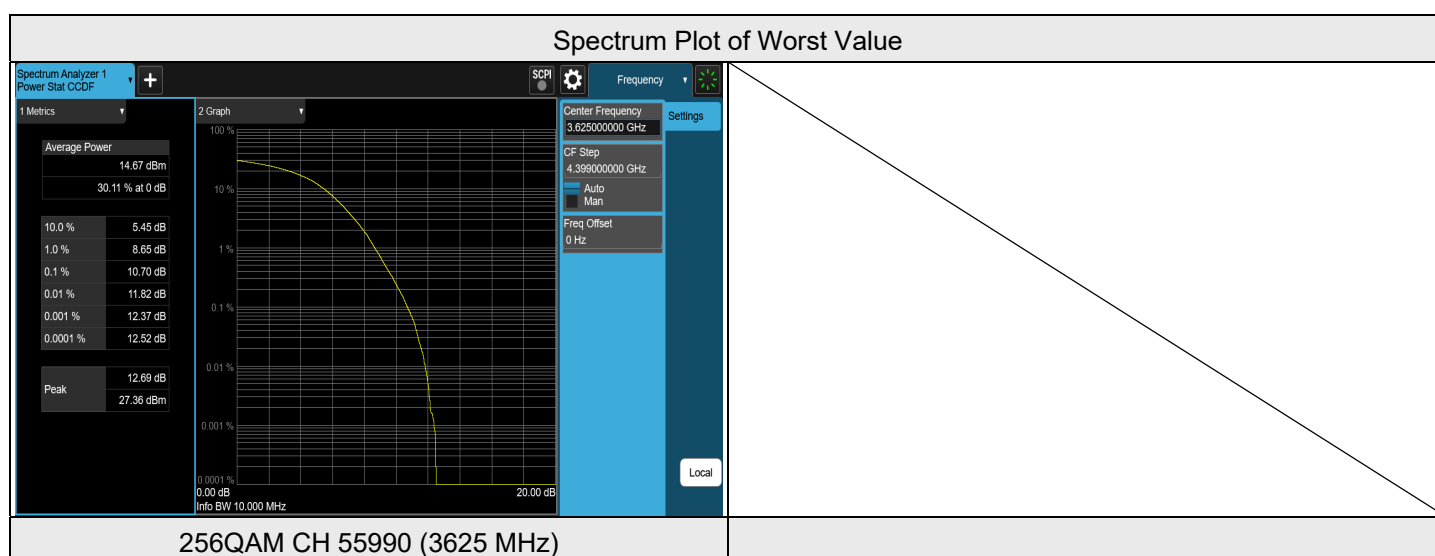

LTE Band 48, Channel Bandwidth: 15 MHz

Modulation	Channel	Frequency (MHz)	Measurement Value(dB)	Limit (dB)	Result
QPSK	55315	3557.5	8.96	13	PASS
QPSK	55990	3625	8.50	13	PASS
QPSK	56665	3692.5	8.43	13	PASS
16QAM	55315	3557.5	9.01	13	PASS
16QAM	55990	3625	7.30	13	PASS
16QAM	56665	3692.5	8.27	13	PASS
64QAM	55315	3557.5	9.60	13	PASS
64QAM	55990	3625	11.54	13	PASS
64QAM	56665	3692.5	10.46	13	PASS
256QAM	55315	3557.5	11.62	13	PASS
256QAM	55990	3625	10.94	13	PASS
256QAM	56665	3692.5	11.02	13	PASS


Spectrum Plot of Worst Value

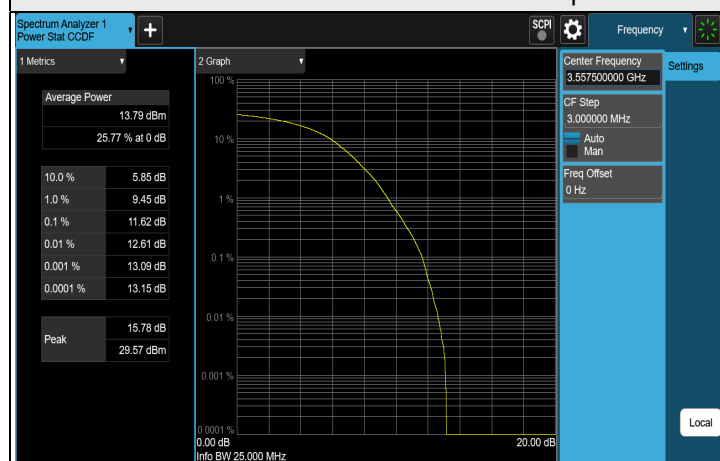

256QAM CH 55315 (3557.5 MHz)

LTE Band 48, Channel Bandwidth: 20 MHz

Modulation	Channel	Frequency (MHz)	Measurement Value(dB)	Limit (dB)	Result
QPSK	55340	3560	8.09	13	PASS
QPSK	55990	3625	9.93	13	PASS
QPSK	56640	3690	8.69	13	PASS
16QAM	55340	3560	9.68	13	PASS
16QAM	55990	3625	10.08	13	PASS
16QAM	56640	3690	9.99	13	PASS
64QAM	55340	3560	10.19	13	PASS
64QAM	55990	3625	10.07	13	PASS
64QAM	56640	3690	10.82	13	PASS
256QAM	55340	3560	11.52	13	PASS
256QAM	55990	3625	10.97	13	PASS
256QAM	56640	3690	10.28	13	PASS

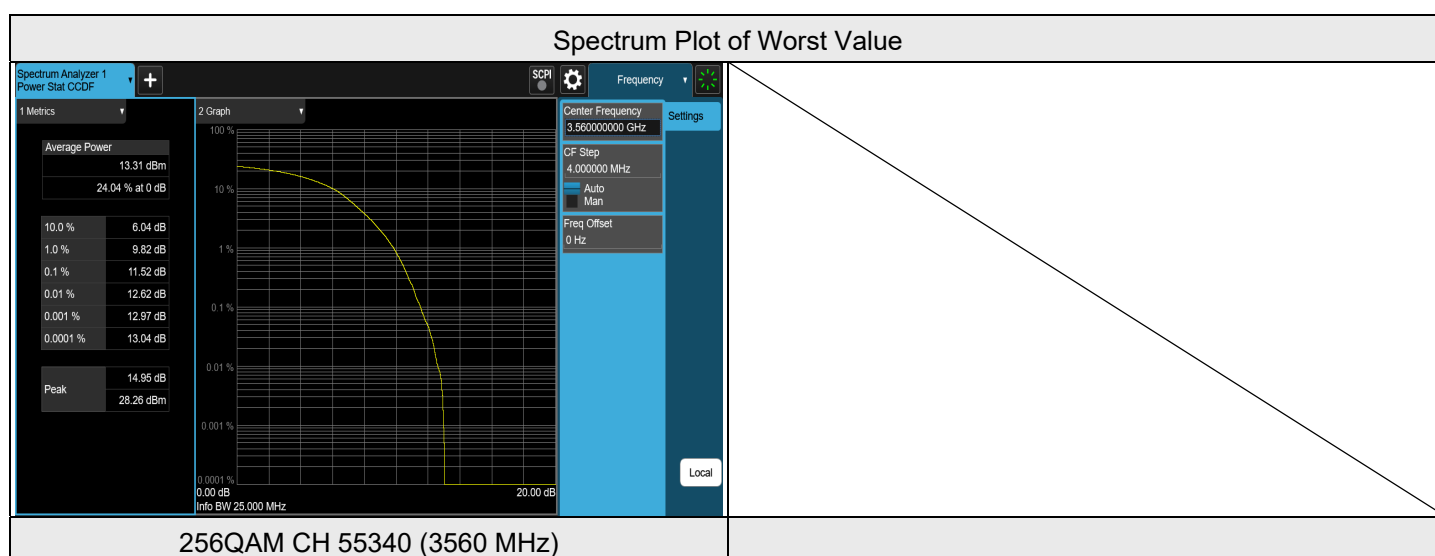


7.4 Bandwidth

Input Power:	3.8 Vdc	Environmental Conditions:	24°C, 68% RH	Tested By:	Noah Chang
--------------	---------	---------------------------	--------------	------------	------------

7.4.1 LTE Band 48


LTE Band 48, Channel Bandwidth: 5 MHz

Modulation	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	55265	3552.5	4.4912	4.853
QPSK	55990	3625	4.4907	4.869
QPSK	56715	3697.5	4.4939	4.891
16QAM	55265	3552.5	4.4926	4.876
16QAM	55990	3625	4.4936	4.874
16QAM	56715	3697.5	4.4949	4.854
64QAM	55265	3552.5	4.4980	4.844
64QAM	55990	3625	4.4874	4.850
64QAM	56715	3697.5	4.4904	4.858
256QAM	55265	3552.5	4.4997	4.870
256QAM	55990	3625	4.4870	4.807
256QAM	56715	3697.5	4.5009	4.854

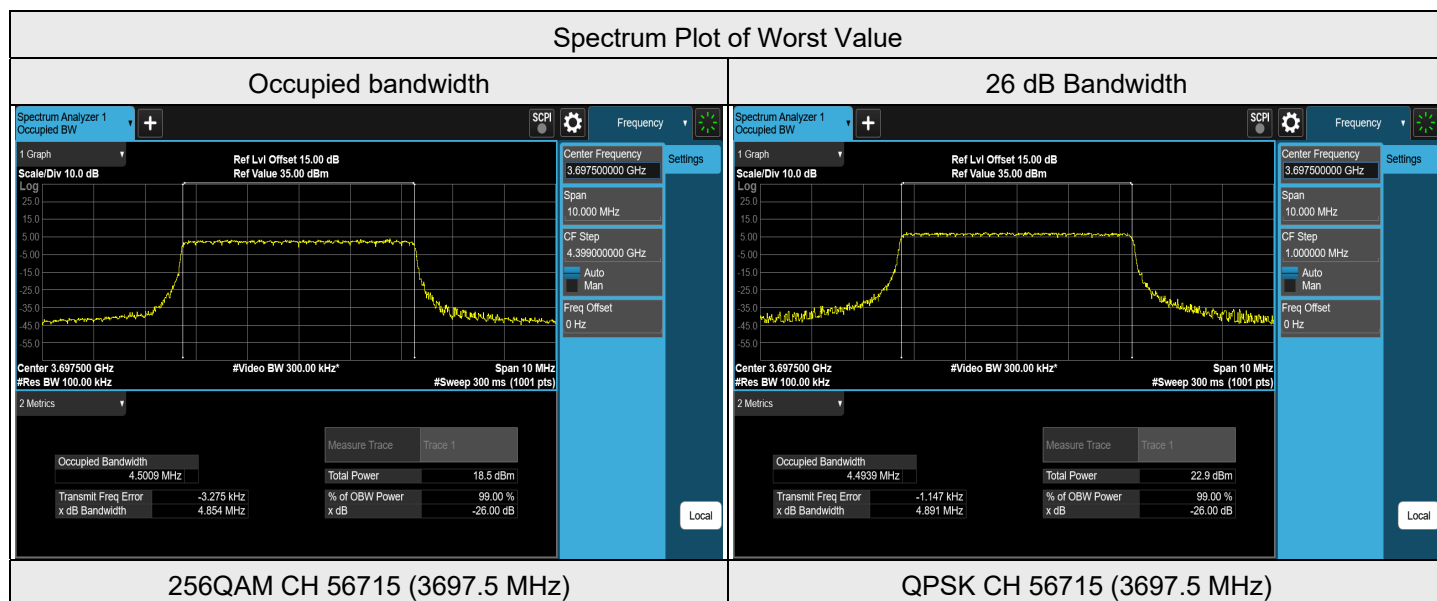

LTE Band 48, Channel Bandwidth: 10 MHz


Modulation	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	55290	3555	8.9721	9.527
QPSK	55990	3625	8.9696	9.526
QPSK	56690	3695	8.9723	9.535
16QAM	55290	3555	8.9744	9.567
16QAM	55990	3625	8.9742	9.506
16QAM	56690	3695	8.9889	9.546
64QAM	55290	3555	8.9799	9.547
64QAM	55990	3625	8.9660	9.527
64QAM	56690	3695	8.9779	9.500
256QAM	55290	3555	8.9614	9.508
256QAM	55990	3625	8.9650	9.513
256QAM	56690	3695	8.9594	9.513

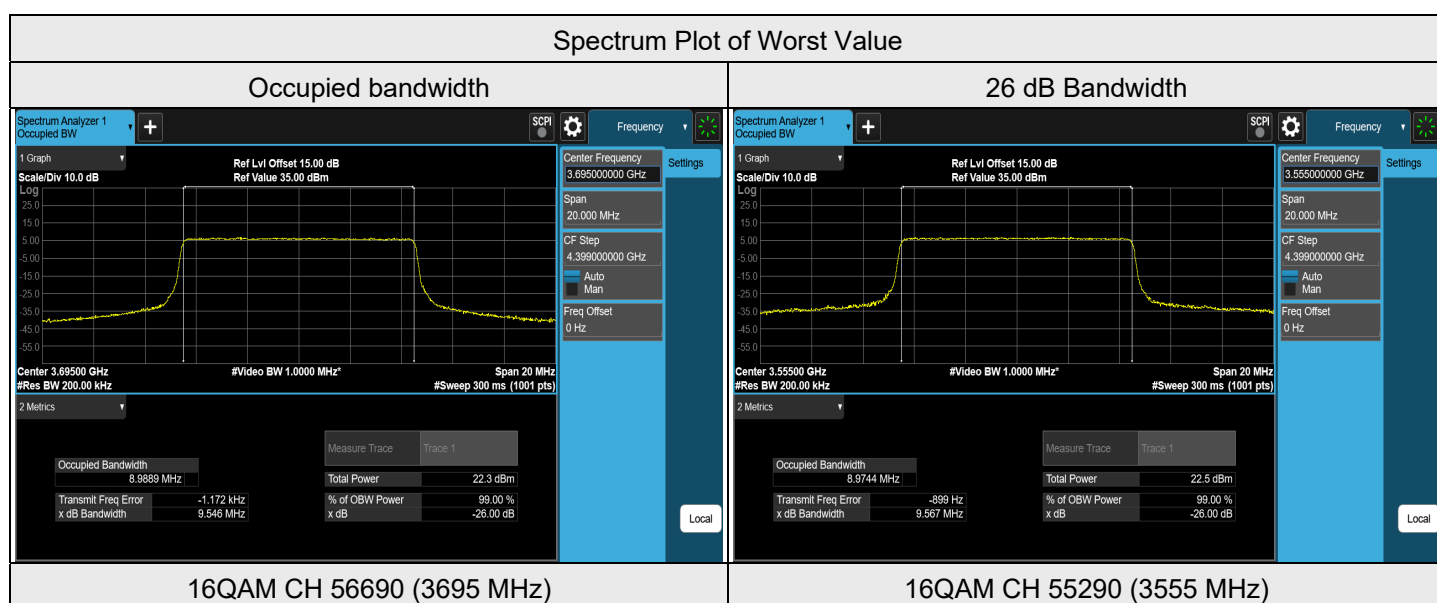

LTE Band 48, Channel Bandwidth: 15 MHz


Modulation	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	55315	3557.5	13.4509	14.259
QPSK	55990	3625	13.4583	14.252
QPSK	56665	3692.5	13.4569	14.303
16QAM	55315	3557.5	13.4711	14.273
16QAM	55990	3625	13.4560	14.251
16QAM	56665	3692.5	13.4537	14.234
64QAM	55315	3557.5	13.4709	14.282
64QAM	55990	3625	13.4620	14.263
64QAM	56665	3692.5	13.4416	14.248
256QAM	55315	3557.5	13.4568	14.278
256QAM	55990	3625	13.4604	14.276
256QAM	56665	3692.5	13.4570	14.249

Spectrum Plot of Worst Value

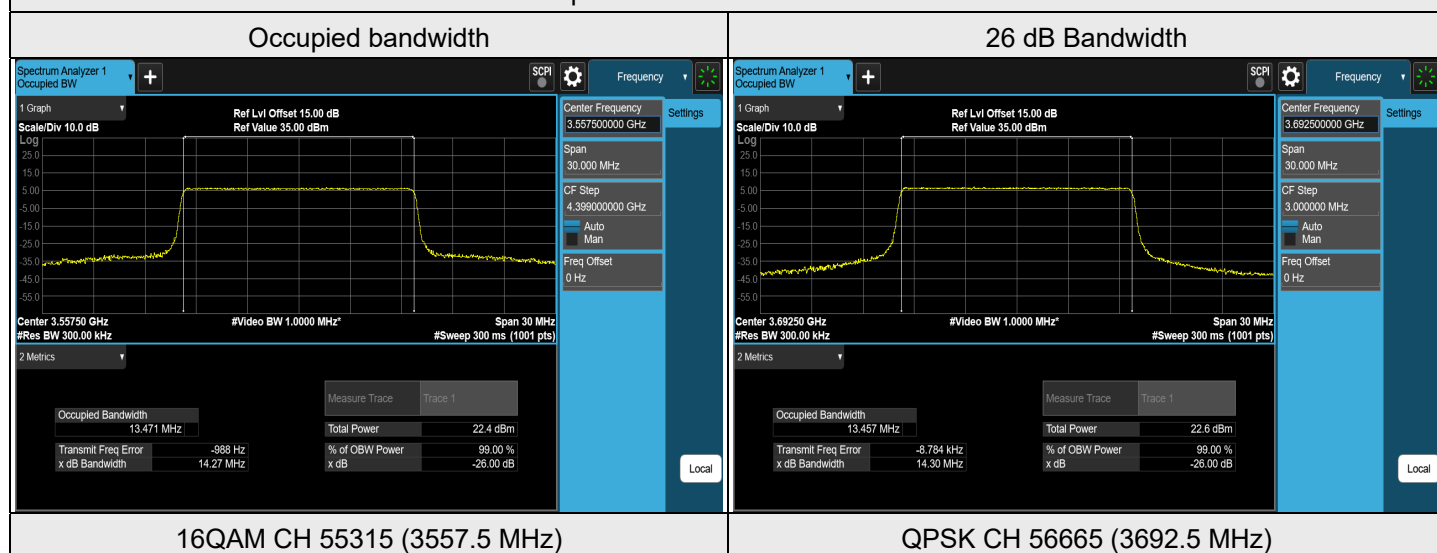

LTE Band 48, Channel Bandwidth: 20 MHz

Modulation	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	55340	3560	17.9661	19.058
QPSK	55990	3625	17.9545	19.057
QPSK	56640	3690	17.9496	19.031
16QAM	55340	3560	17.9659	19.049
16QAM	55990	3625	17.9410	19.033
16QAM	56640	3690	17.9486	19.032
64QAM	55340	3560	17.9467	19.057
64QAM	55990	3625	17.9454	19.027
64QAM	56640	3690	17.9447	19.023
256QAM	55340	3560	17.9605	19.031
256QAM	55990	3625	17.9696	19.051
256QAM	56640	3690	17.9544	19.035

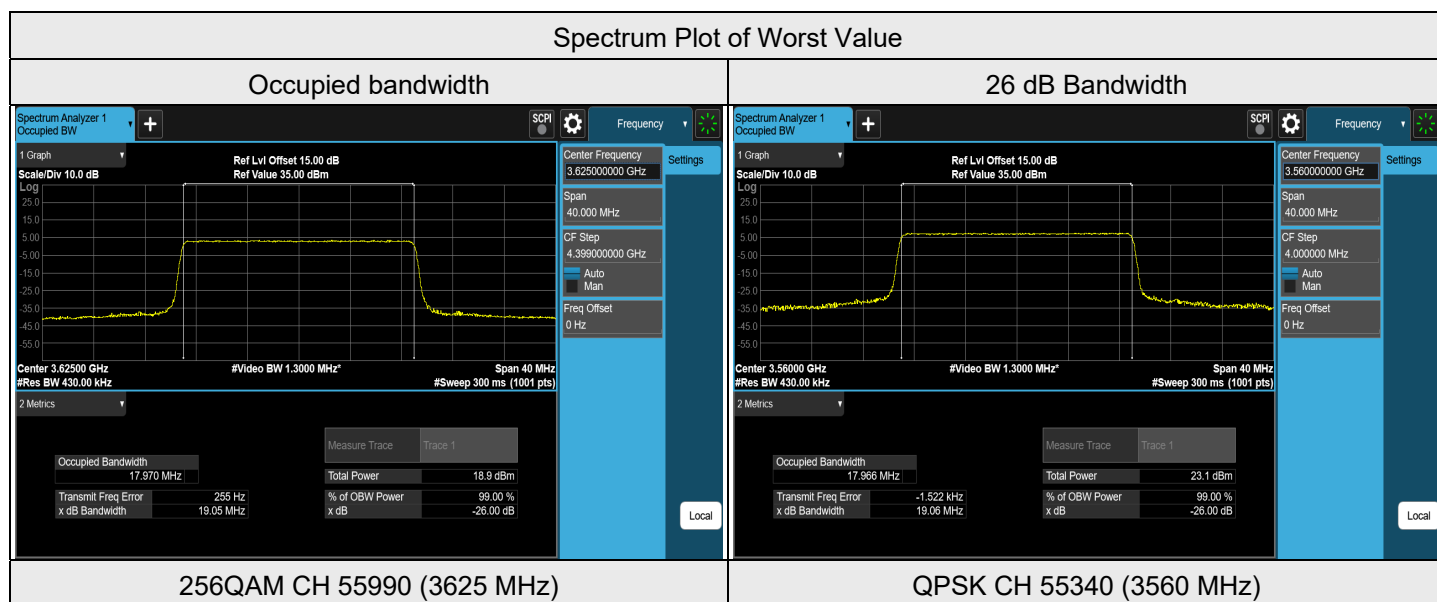



7.5 Conducted Spurious Emissions


Input Power:	3.8 Vdc	Environmental Conditions:	24°C, 68% RH	Tested By:	Noah Chang
--------------	---------	---------------------------	--------------	------------	------------

7.5.1 LTE Band 48

LTE Band 48, Channel Bandwidth: 5 MHz

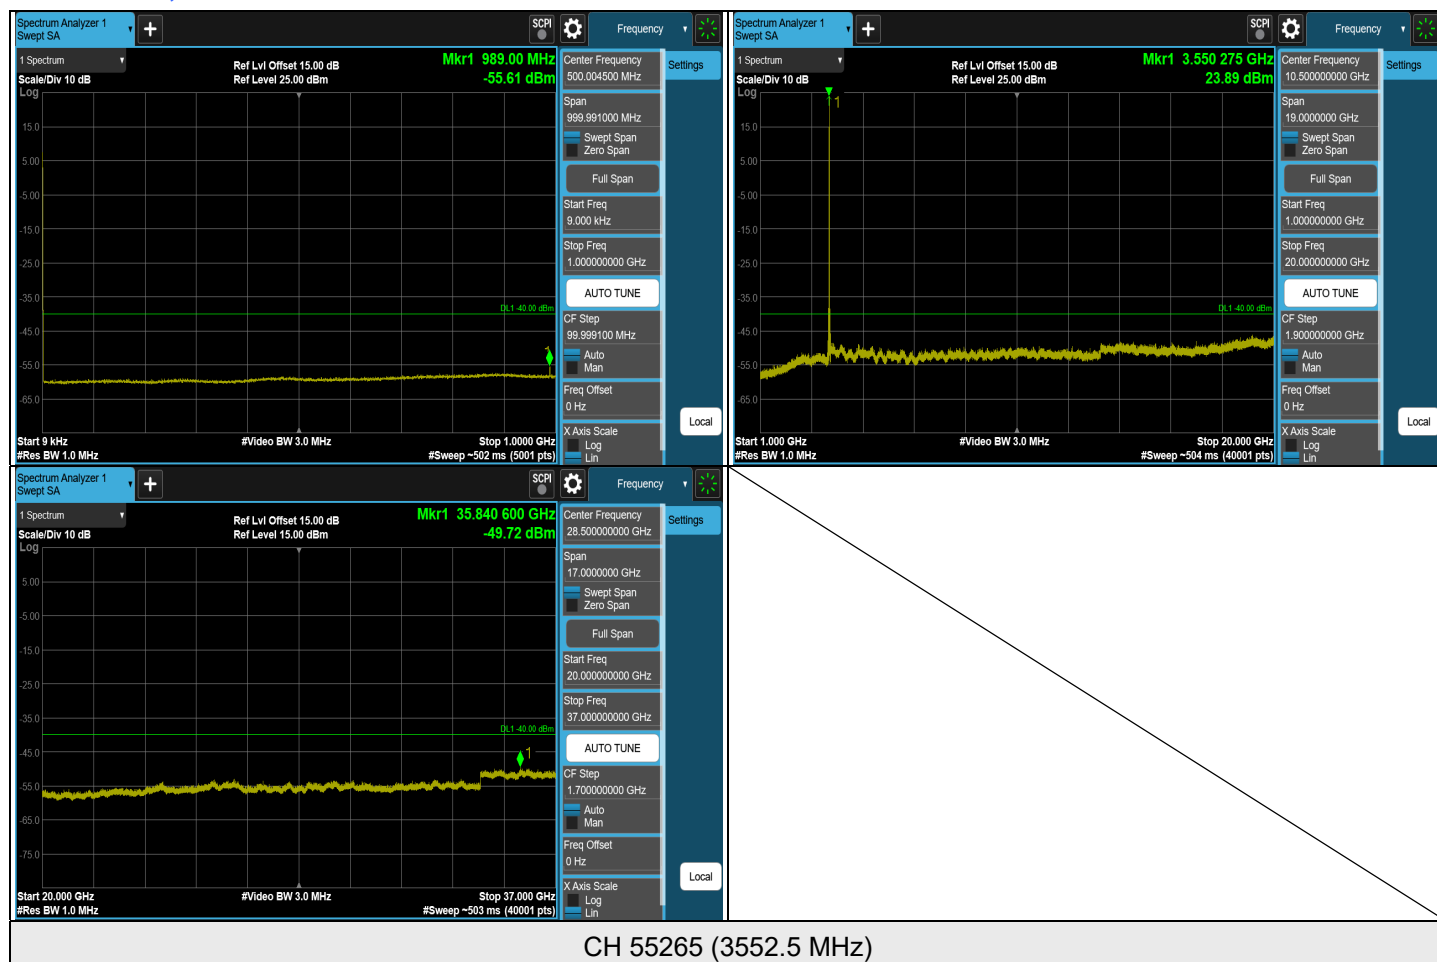



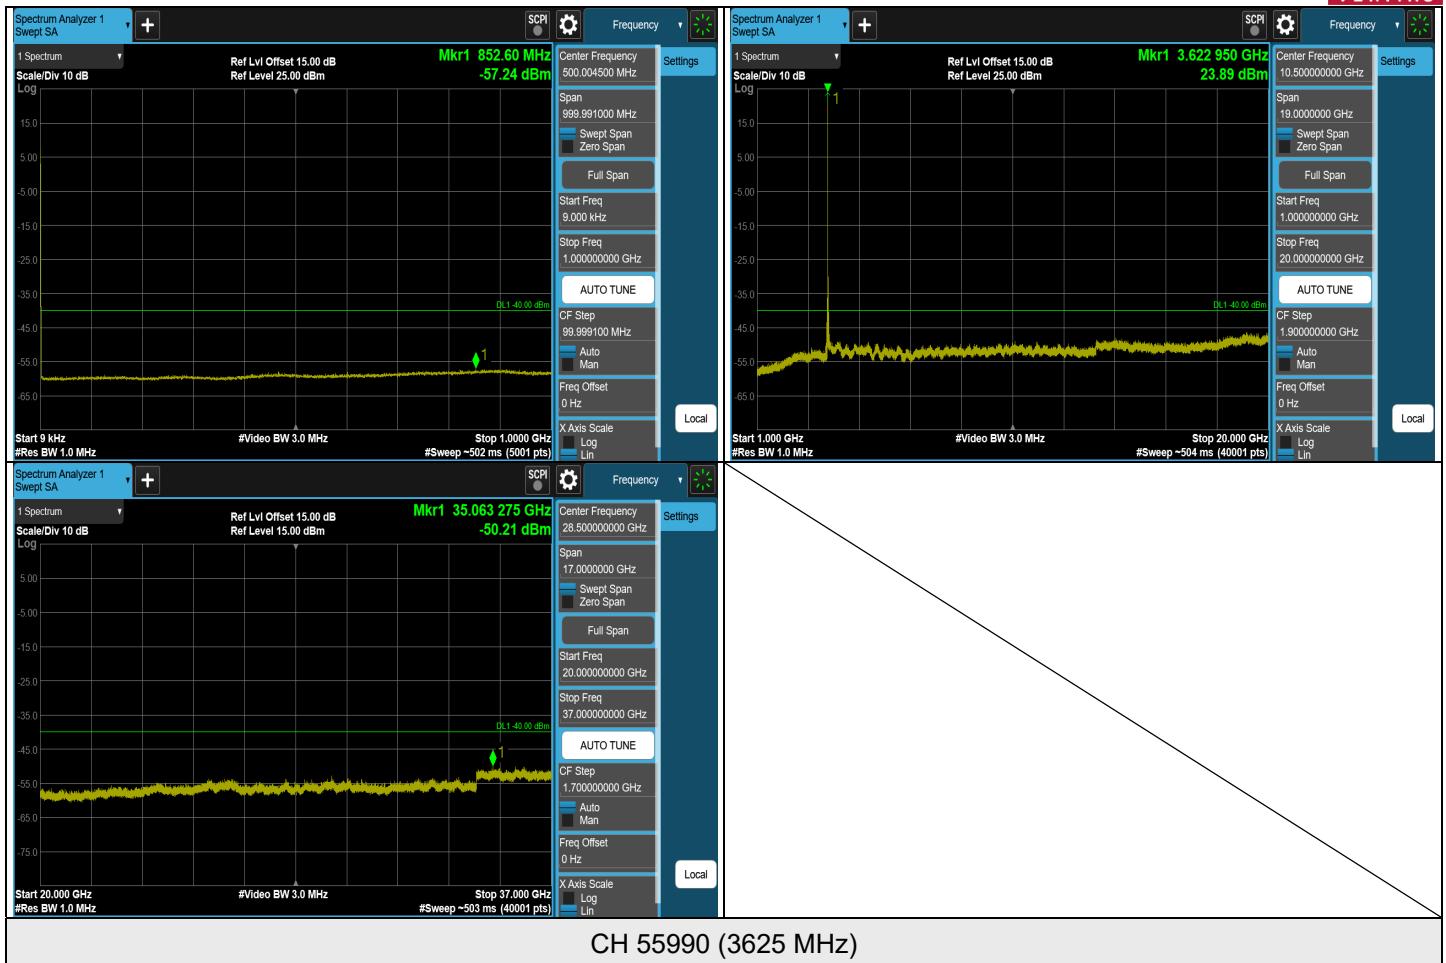


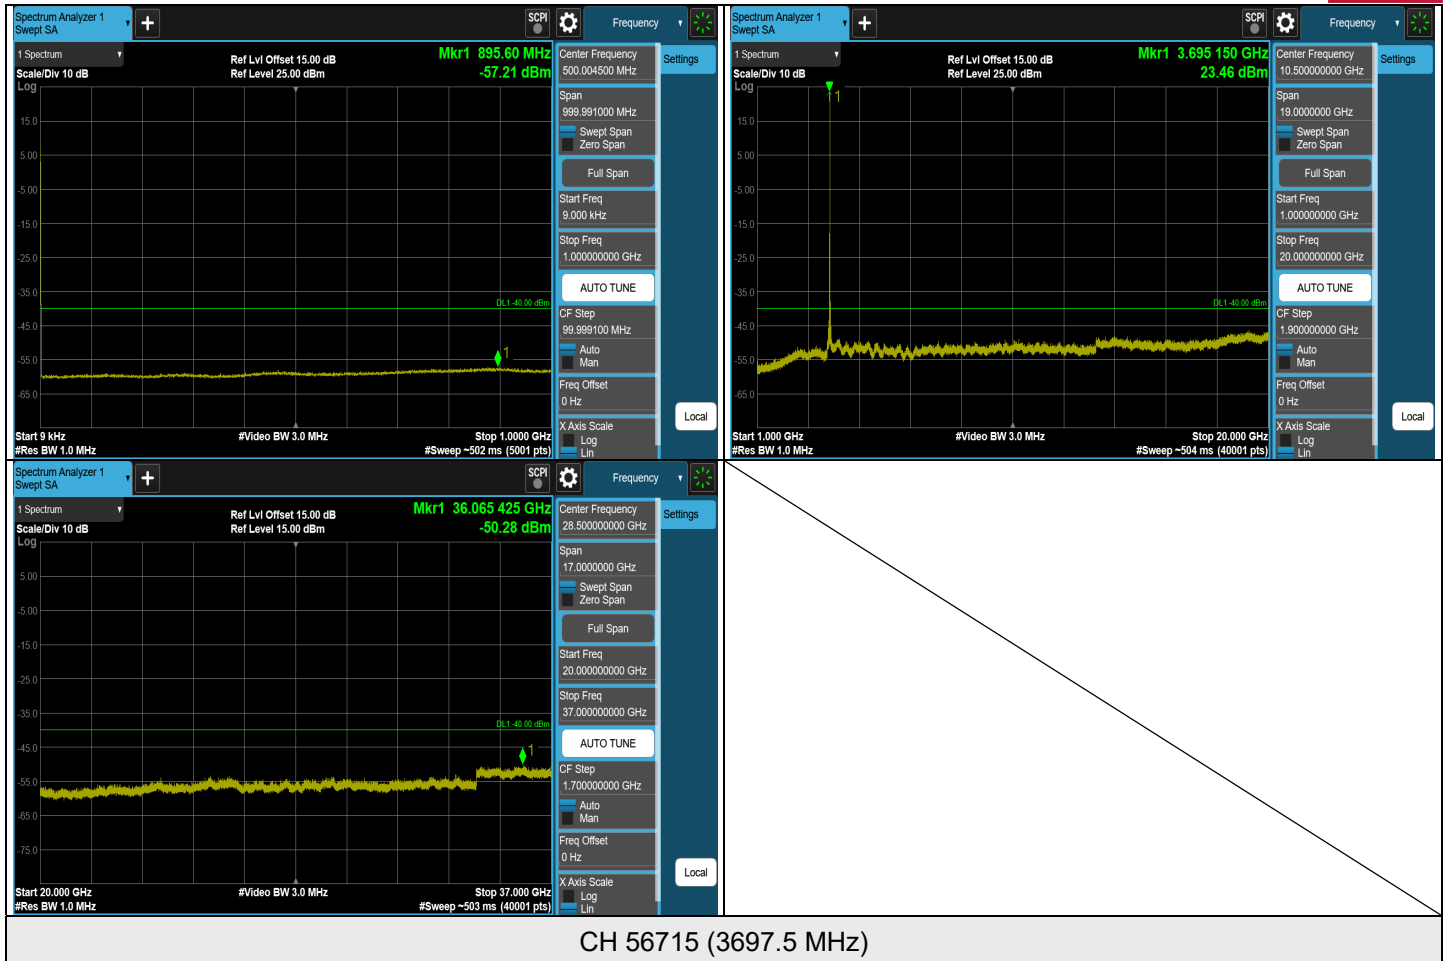

Note: The signal at 9 kHz is IF signal from spectrum analyzer.


LTE Band 48, Channel Bandwidth: 5 MHz

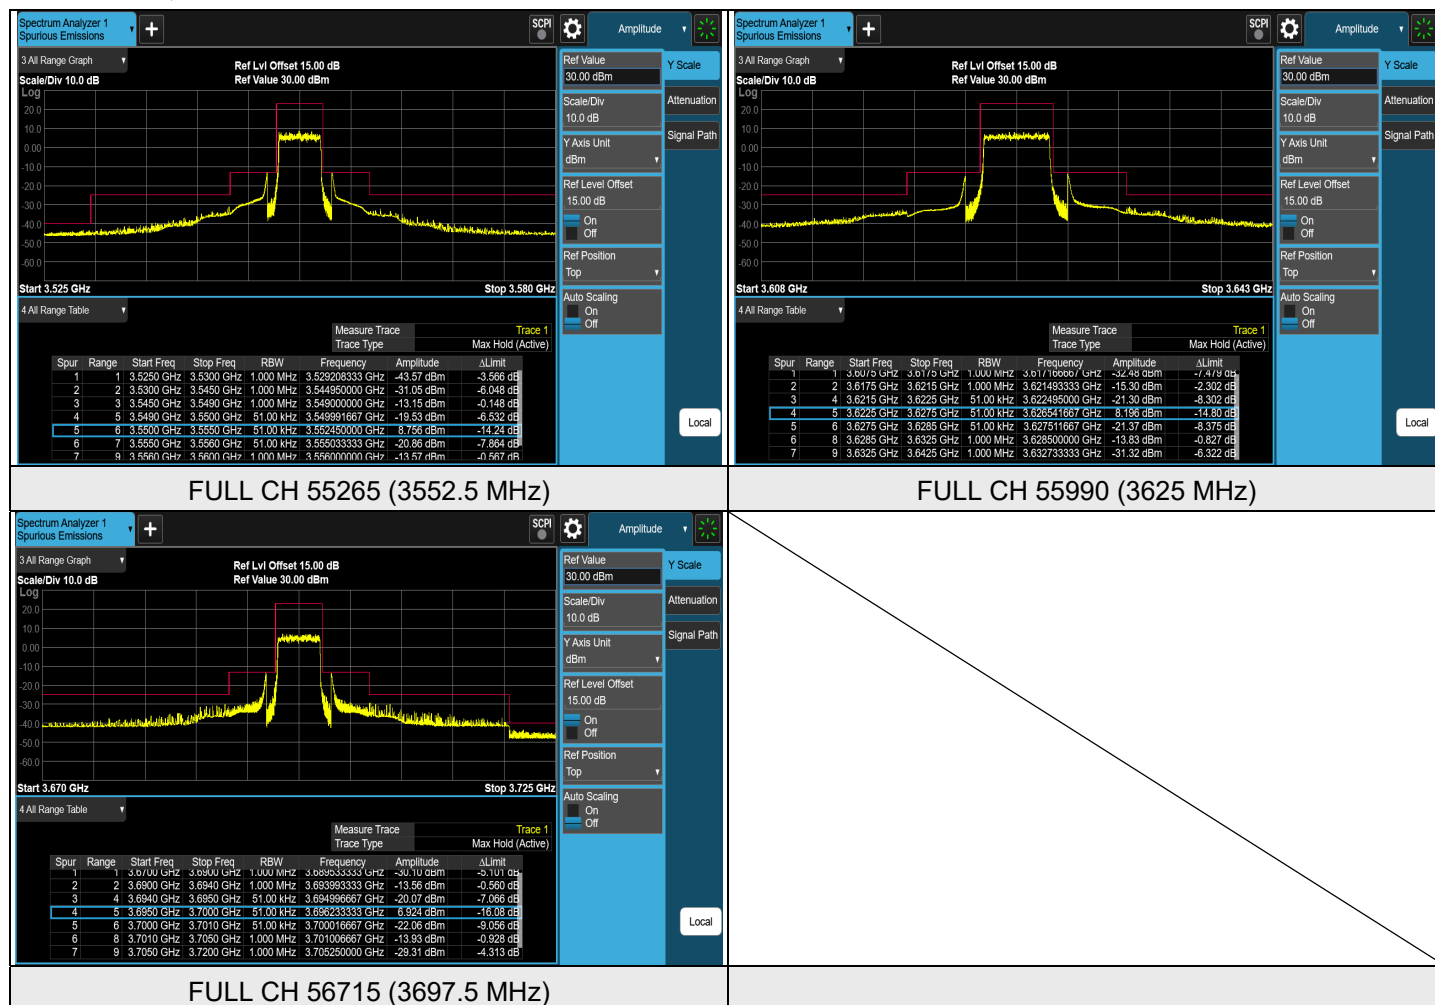

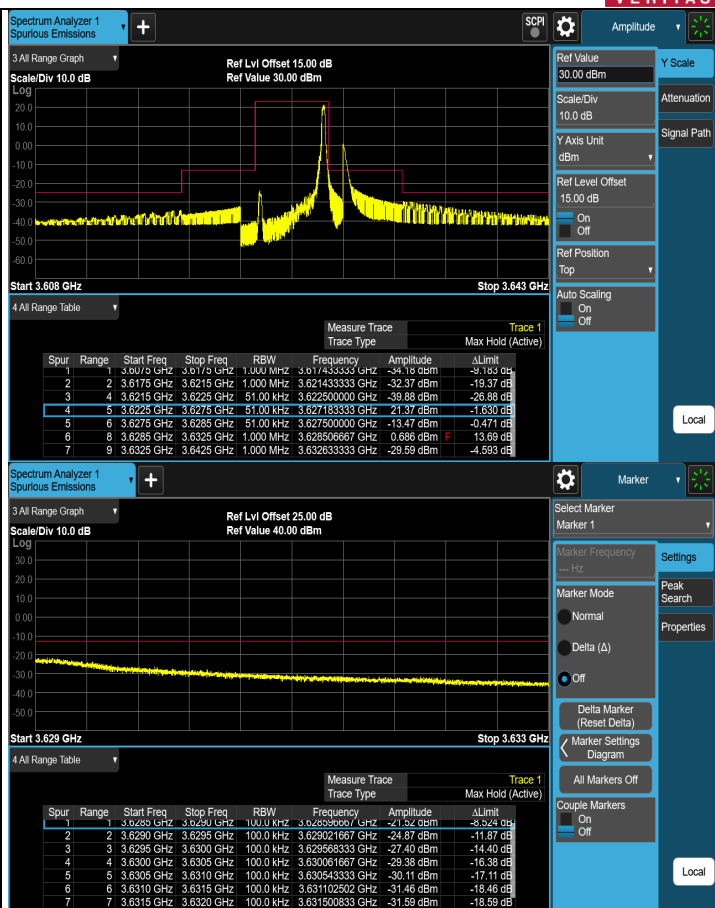
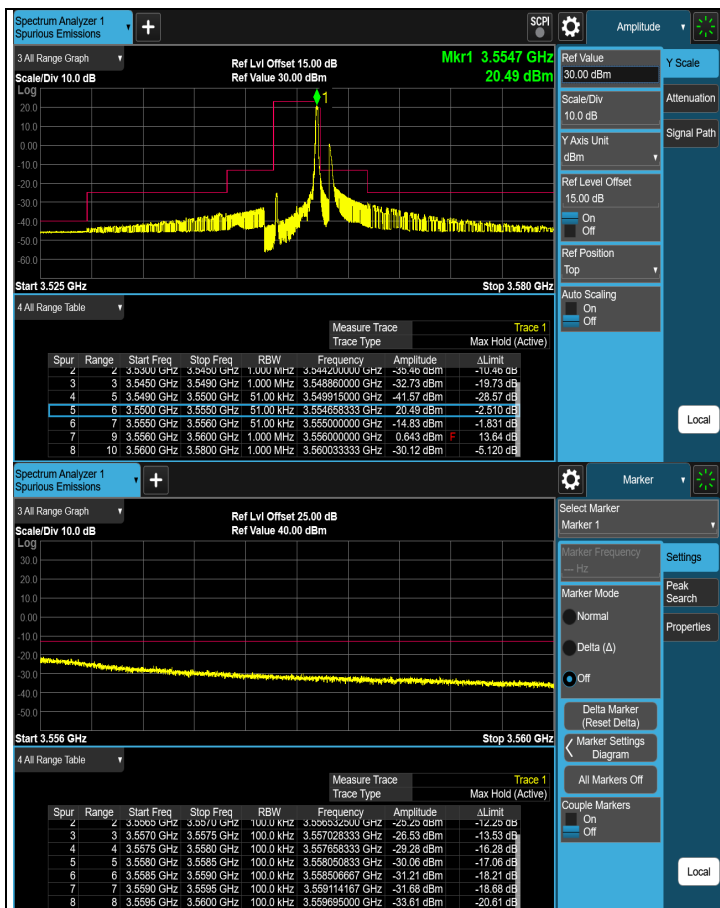


1RB#MAX CH 55265 (3552.5 MHz)



1RB#MAX CH 55990 (3625 MHz)

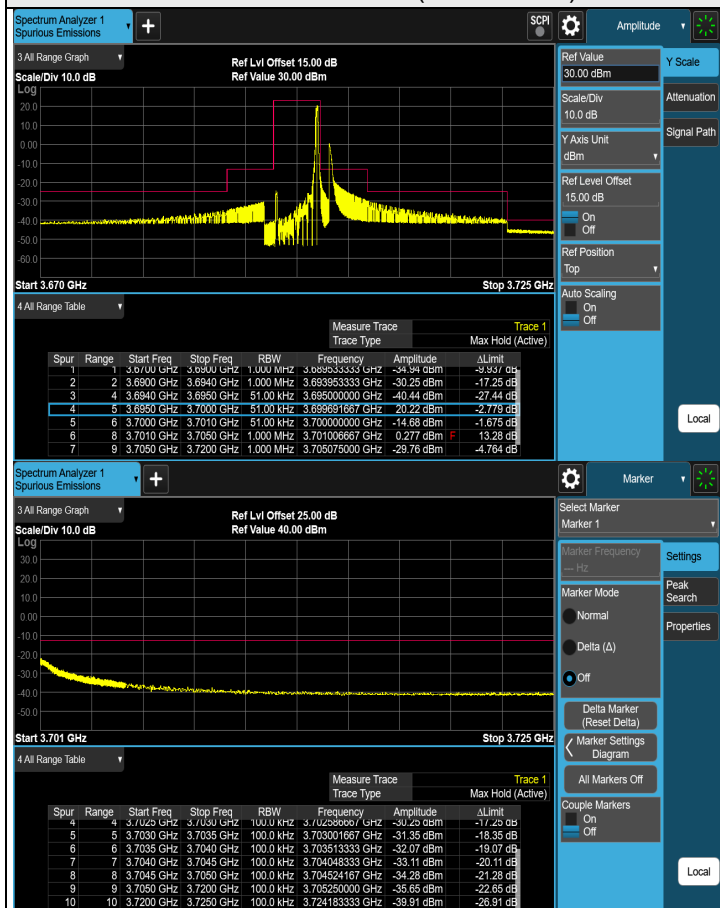



1RB#MAX CH 56715 (3697.5 MHz)

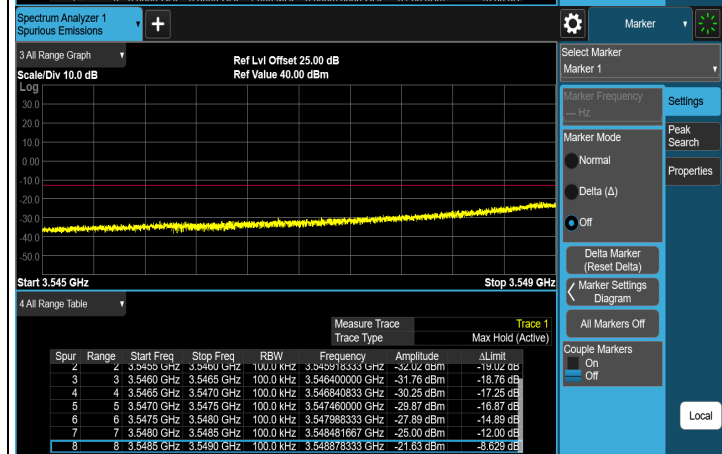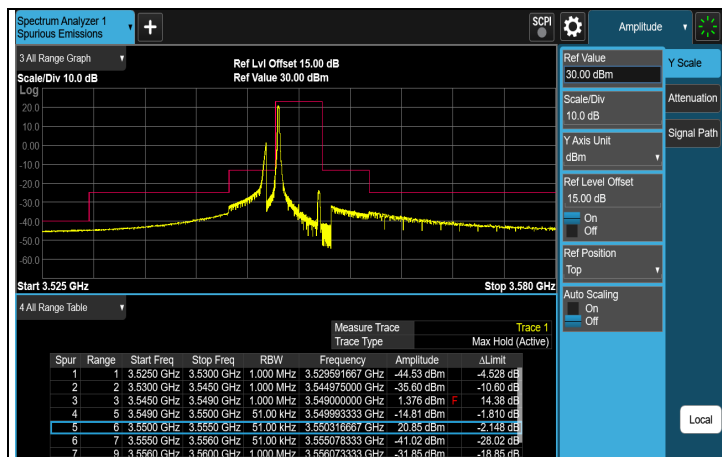

1RB#0 CH 55265 (3552.5 MHz)

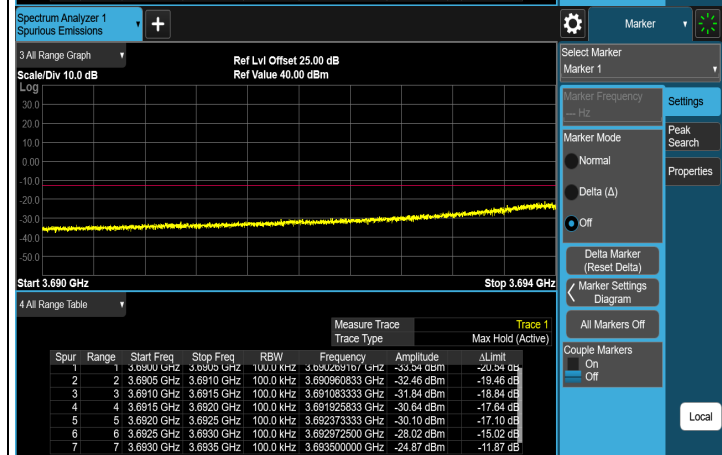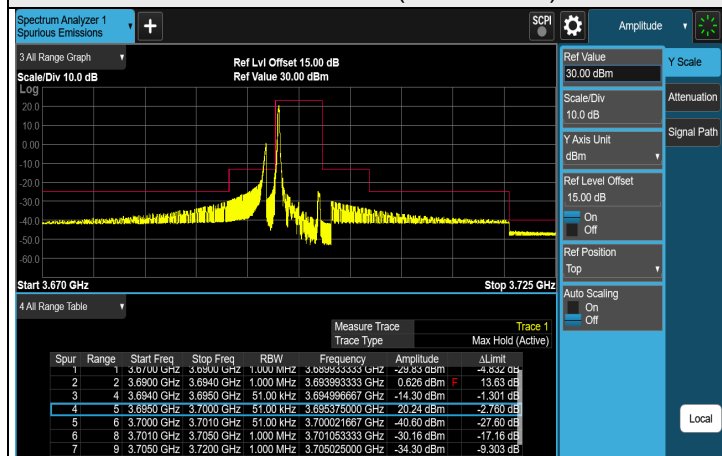



1RB#0 CH 56715 (3697.5 MHz)

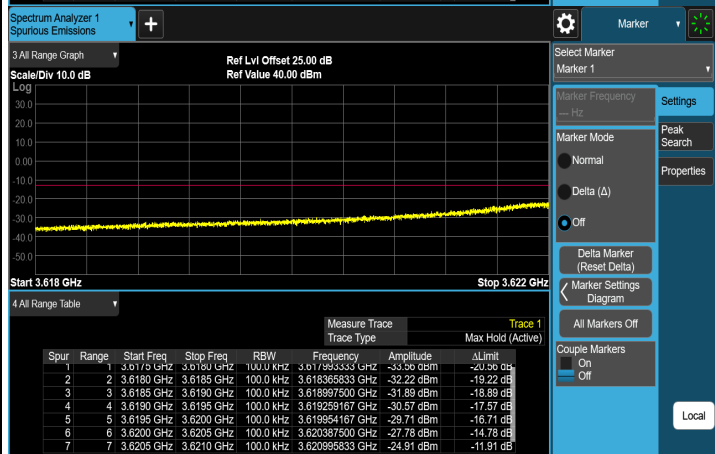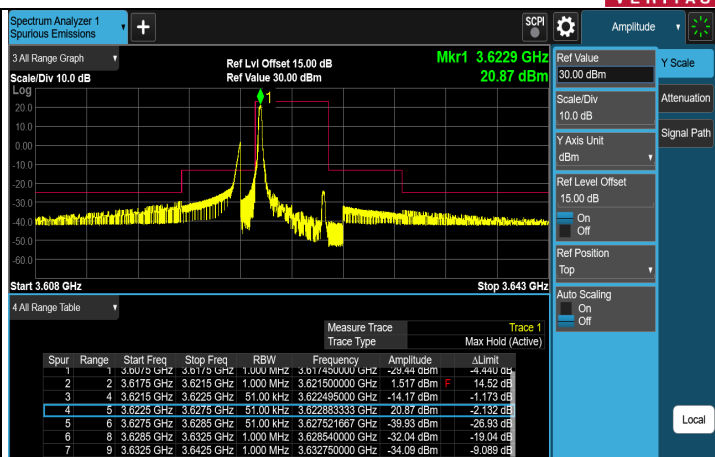


1RB#0 CH 55990 (3625 MHz)

LTE Band 48, Channel Bandwidth: 10 MHz

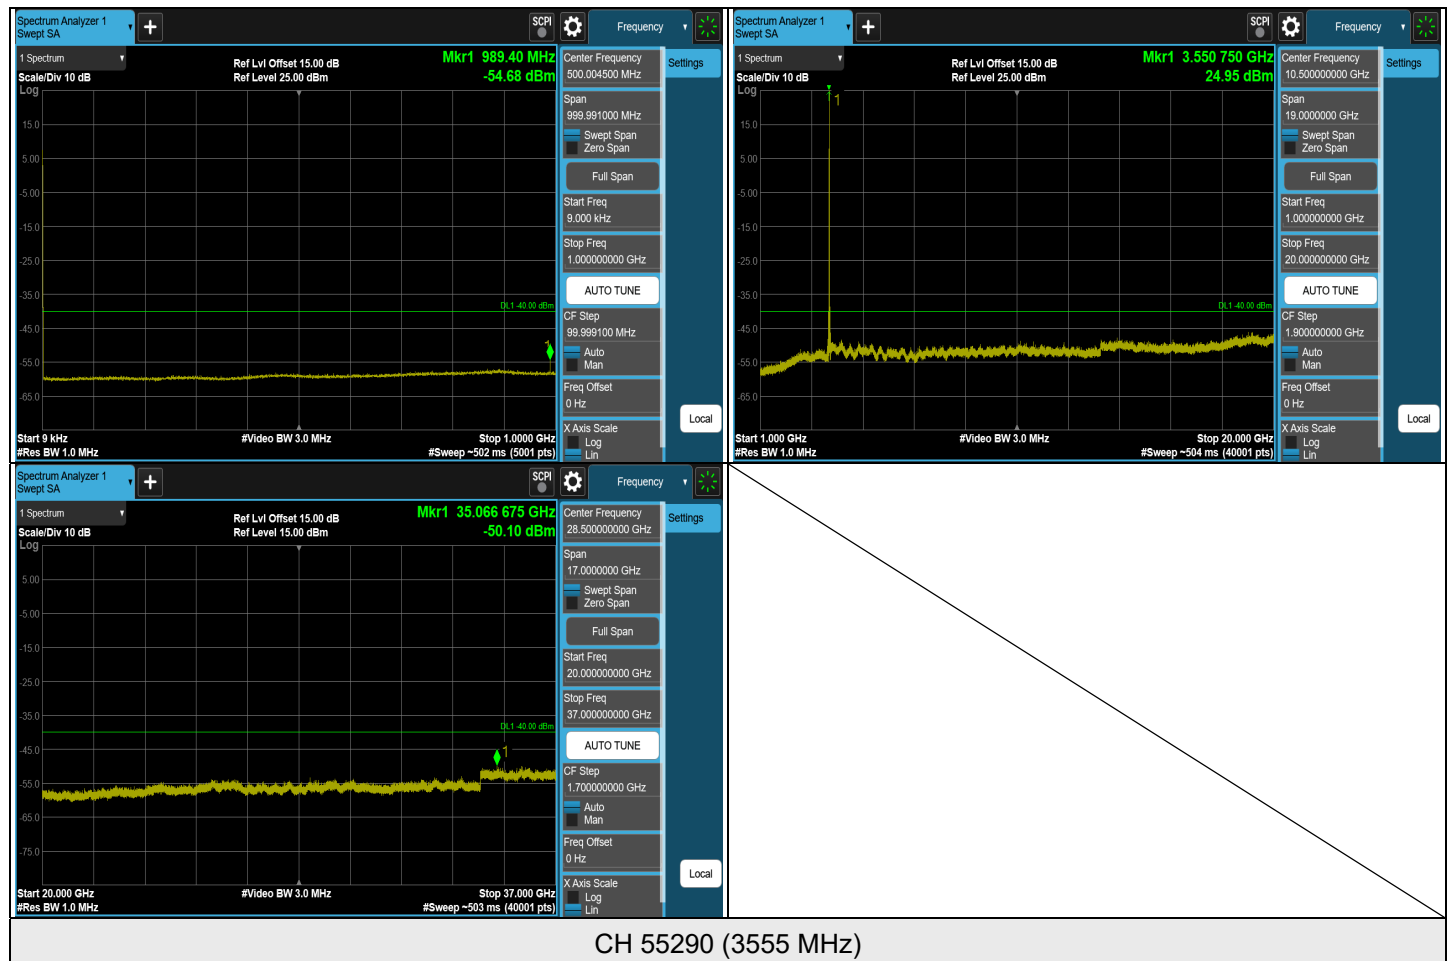




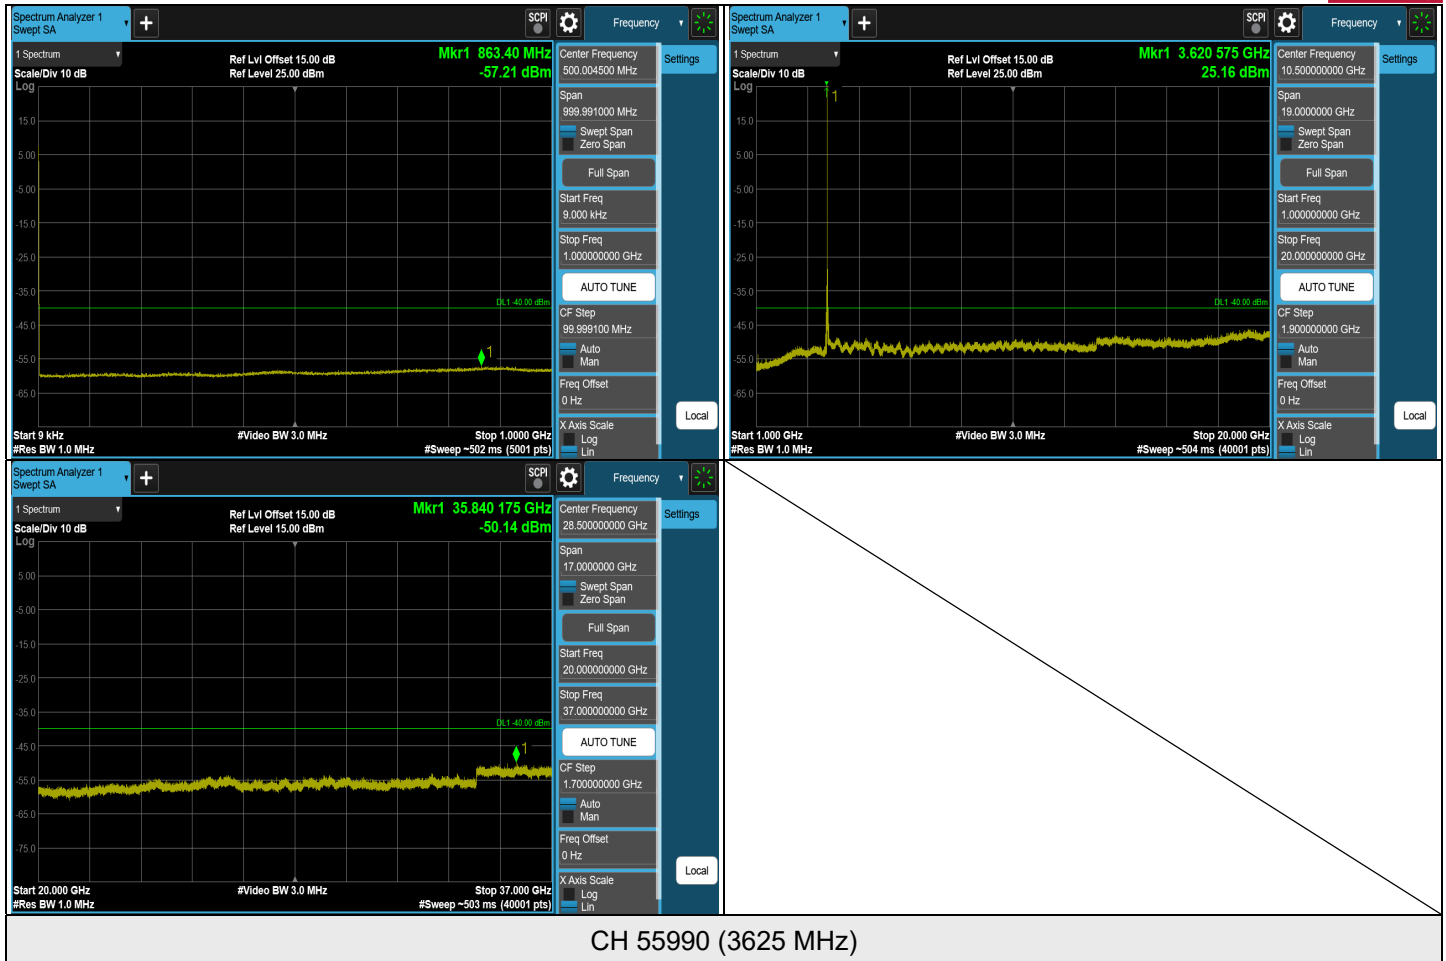


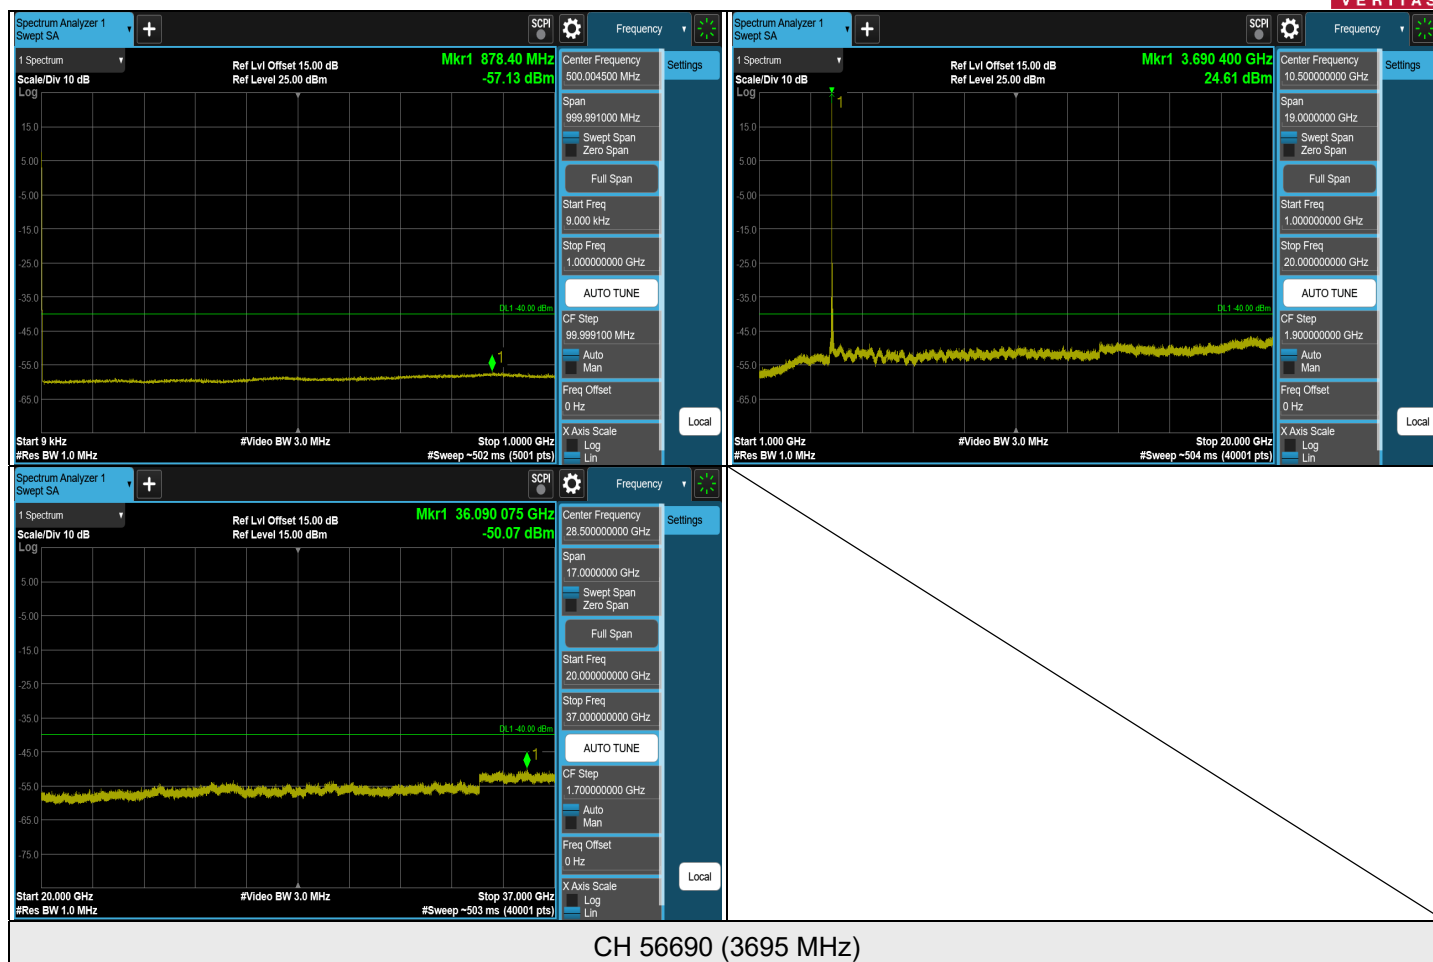

Note: The signal at 9 kHz is IF signal from spectrum analyzer.



LTE Band 48, Channel Bandwidth: 10 MHz

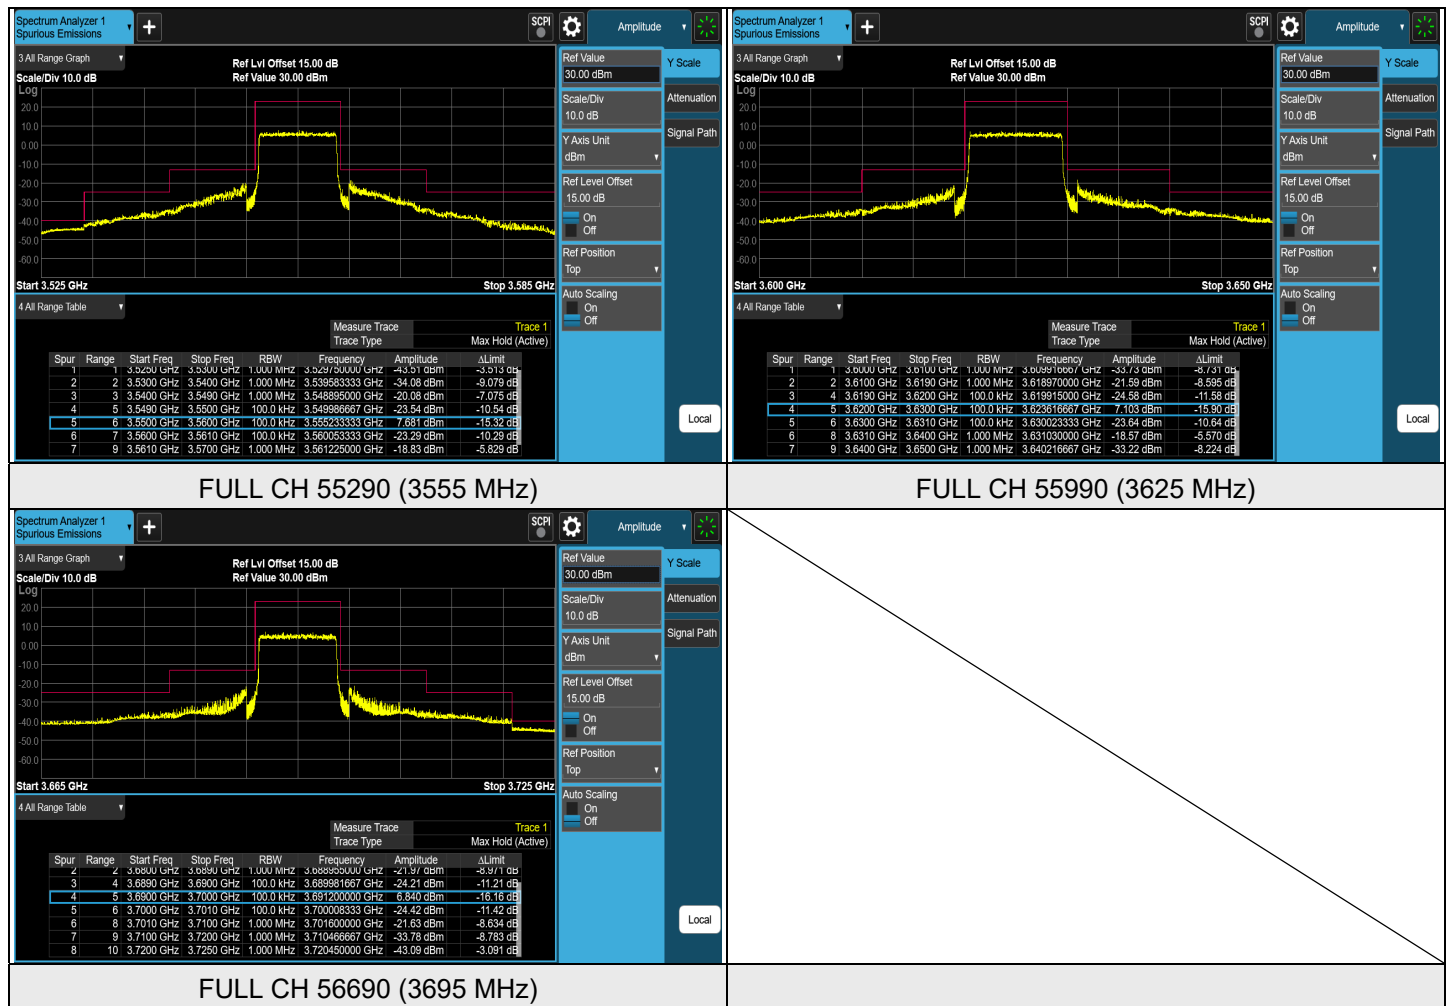

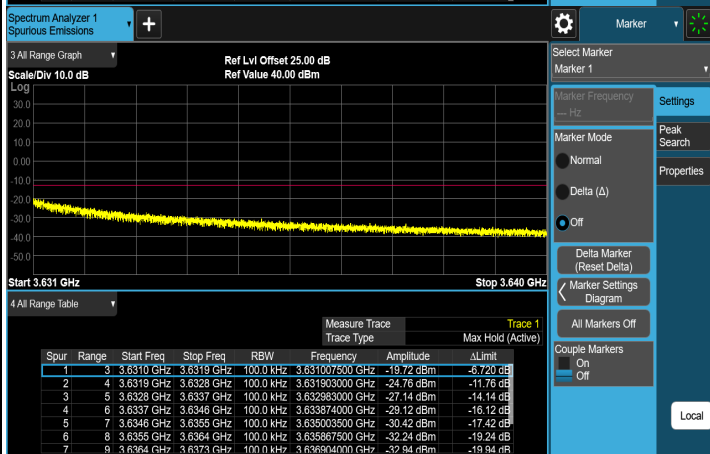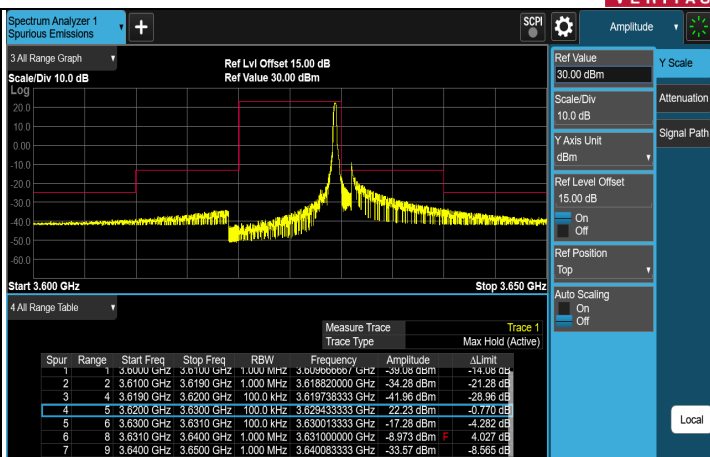
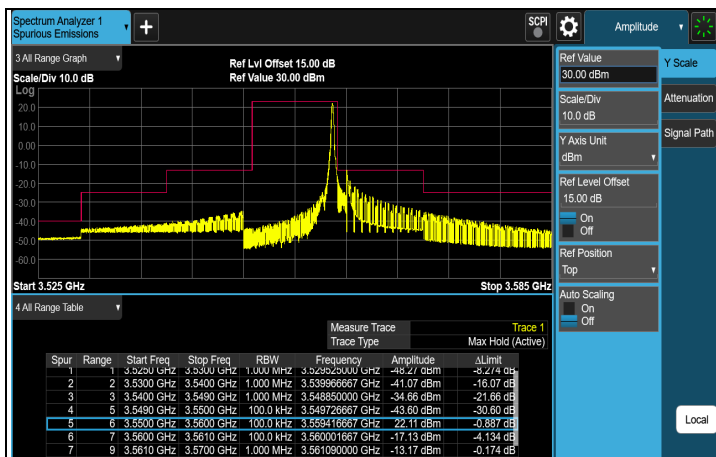


1RB#MAX CH 55290 (3555 MHz)

1RB#MAX CH 55990 (3625 MHz)

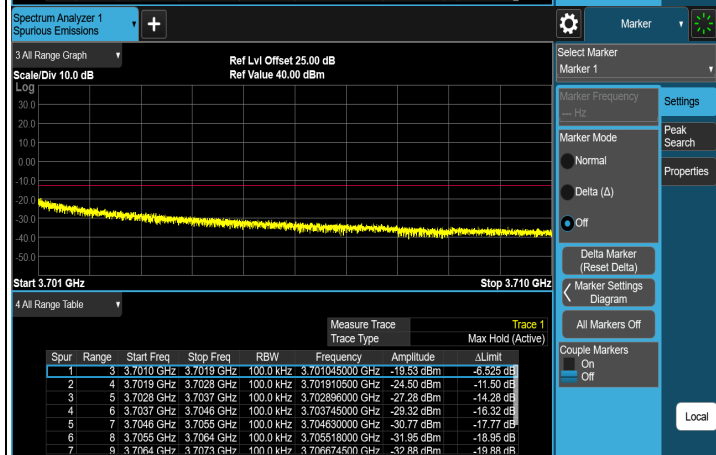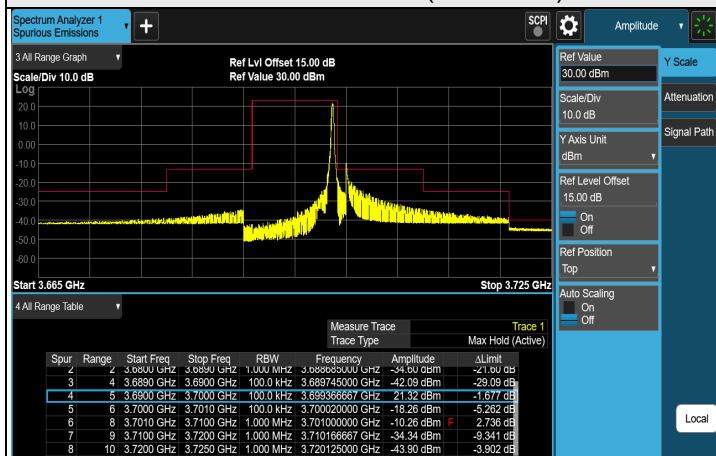


1RB#MAX CH 56690 (3695 MHz)

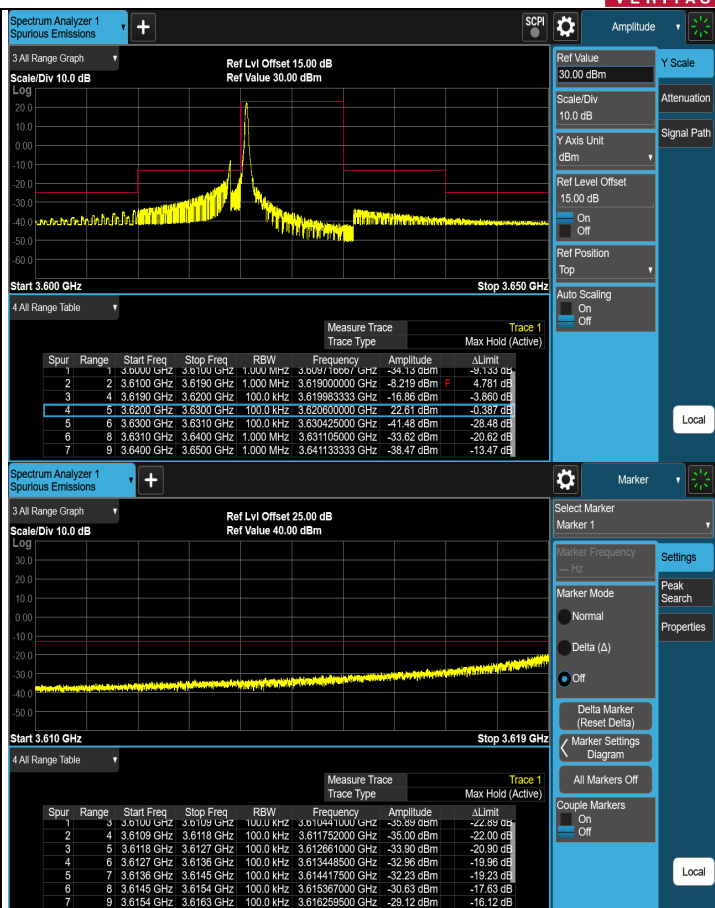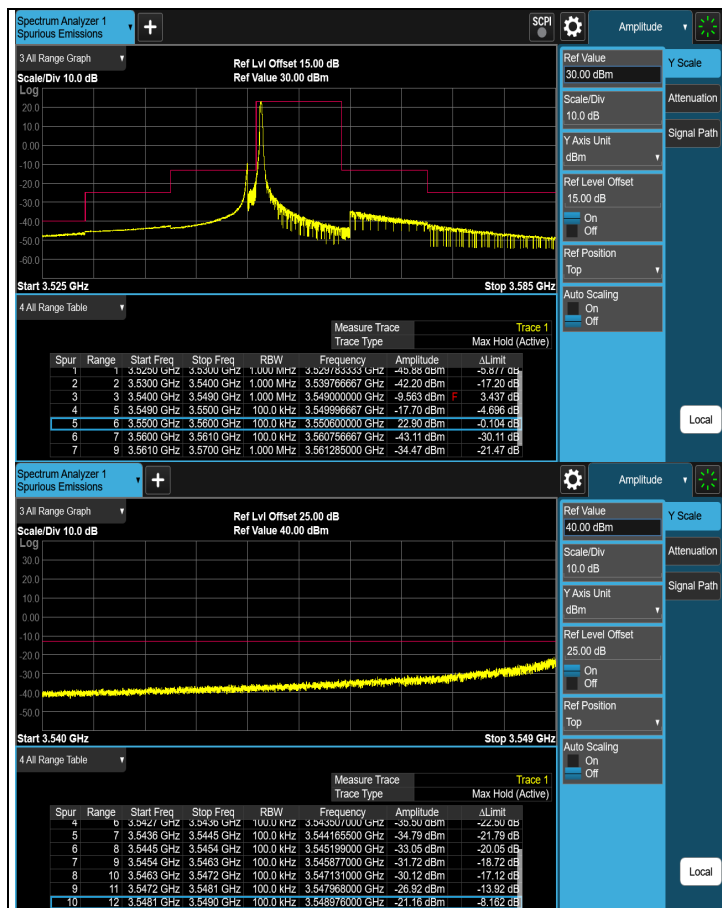


1RB#0 CH 55290 (3555 MHz)


1RB#0 CH 55990 (3625 MHz)

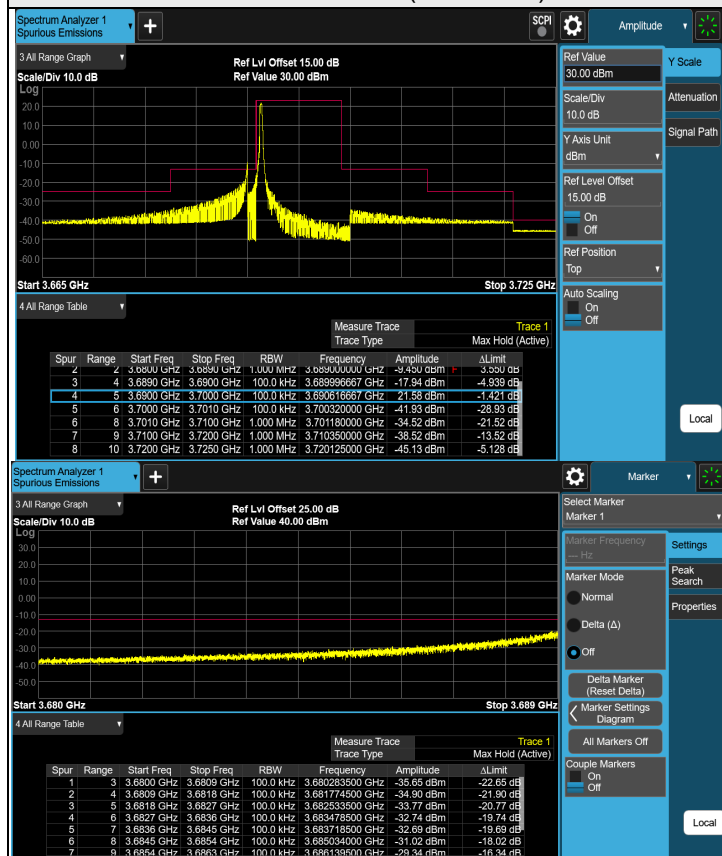


1RB#0 CH 56690 (3695 MHz)

LTE Band 48, Channel Bandwidth: 15 MHz

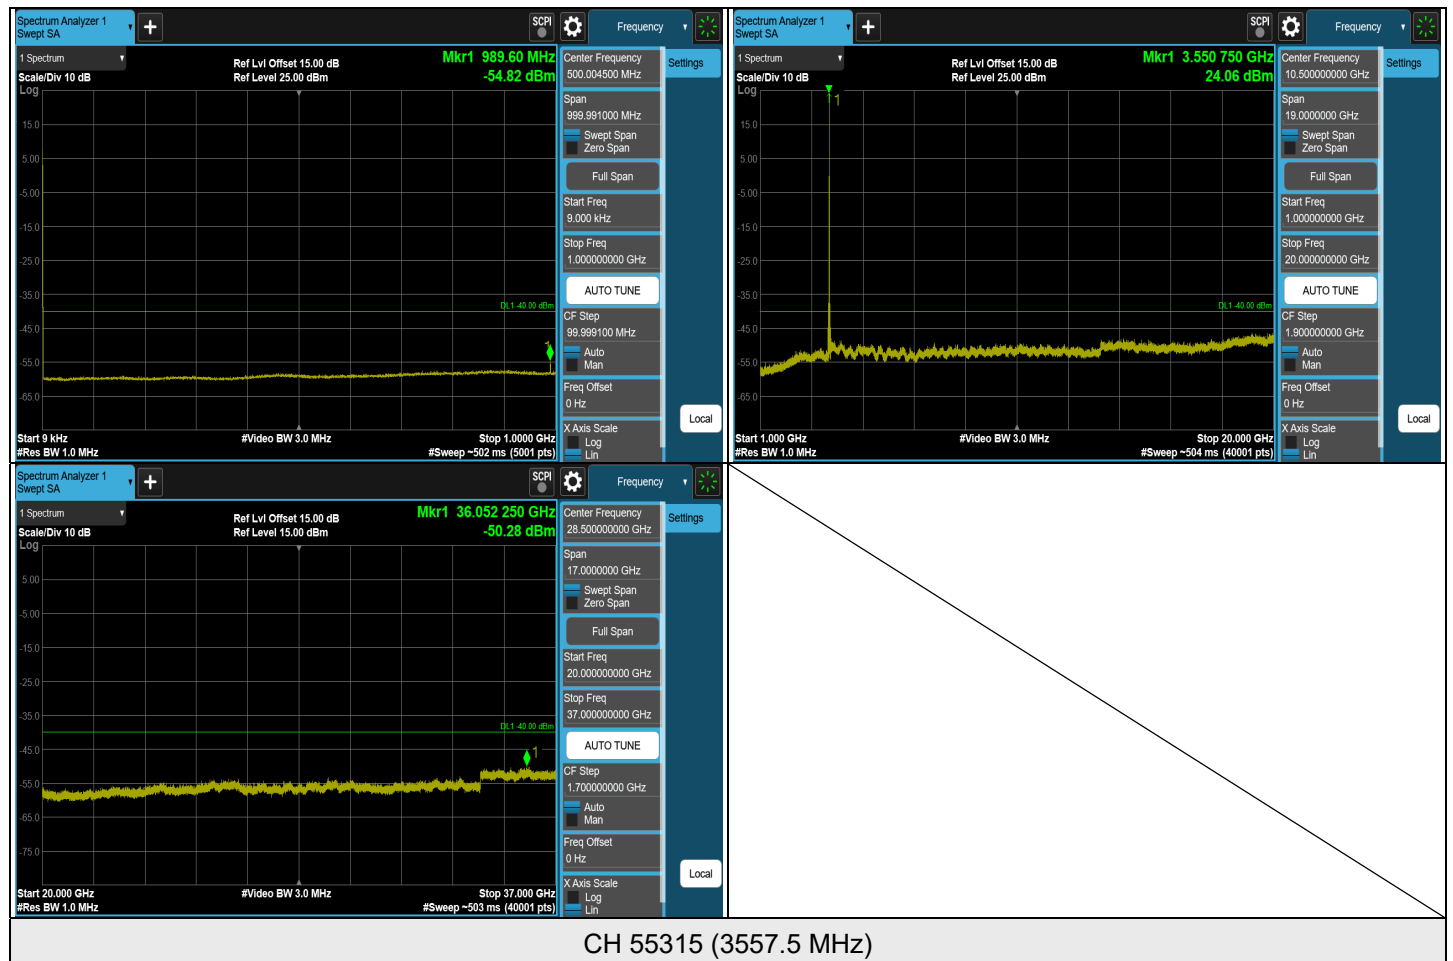

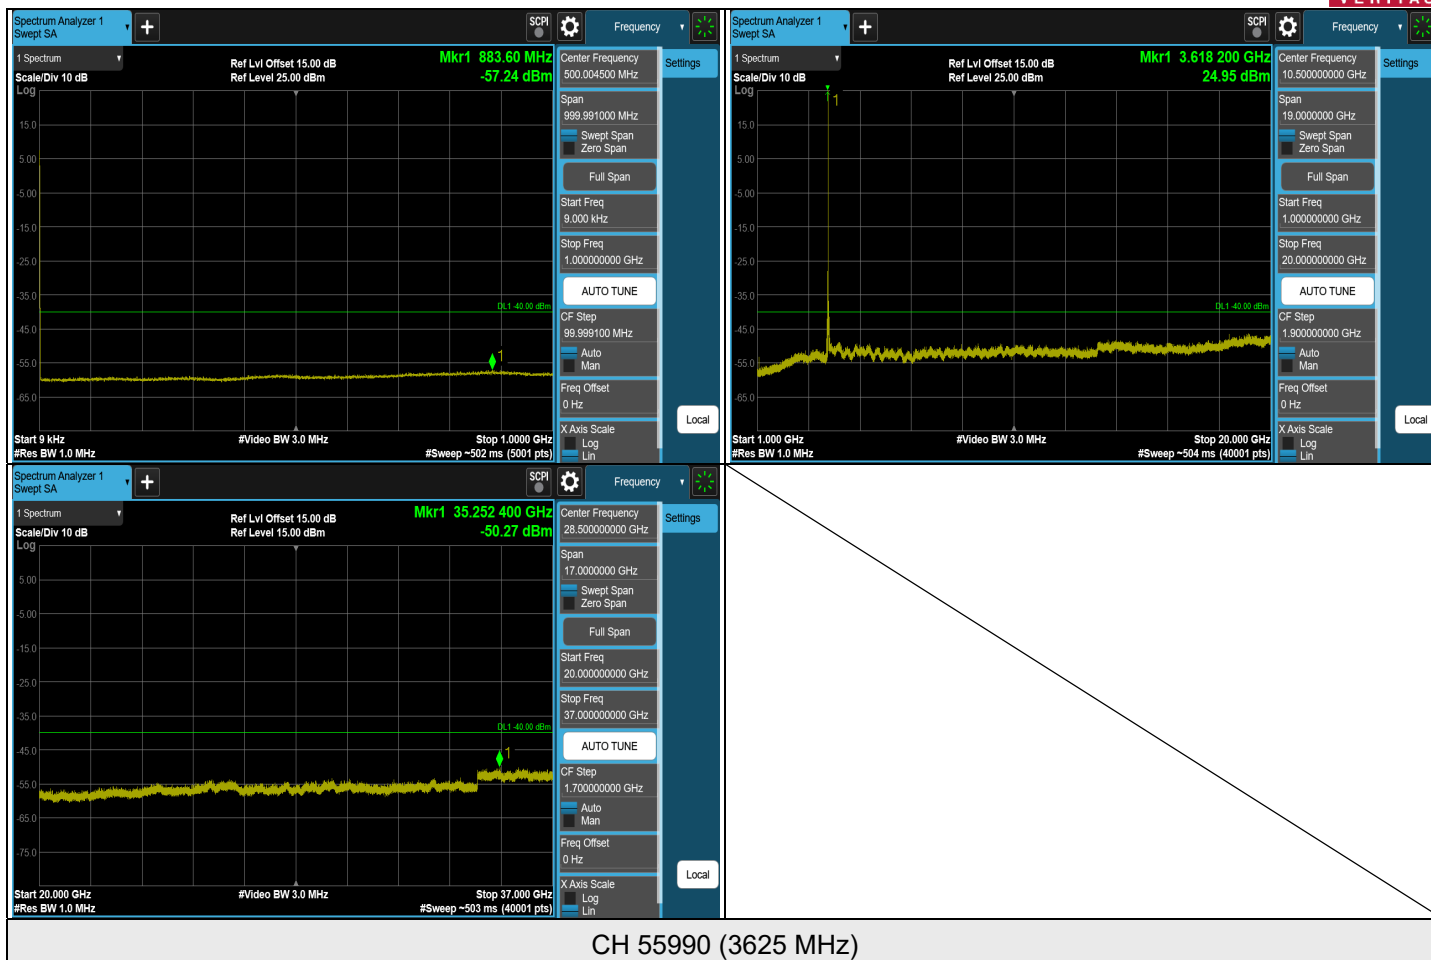

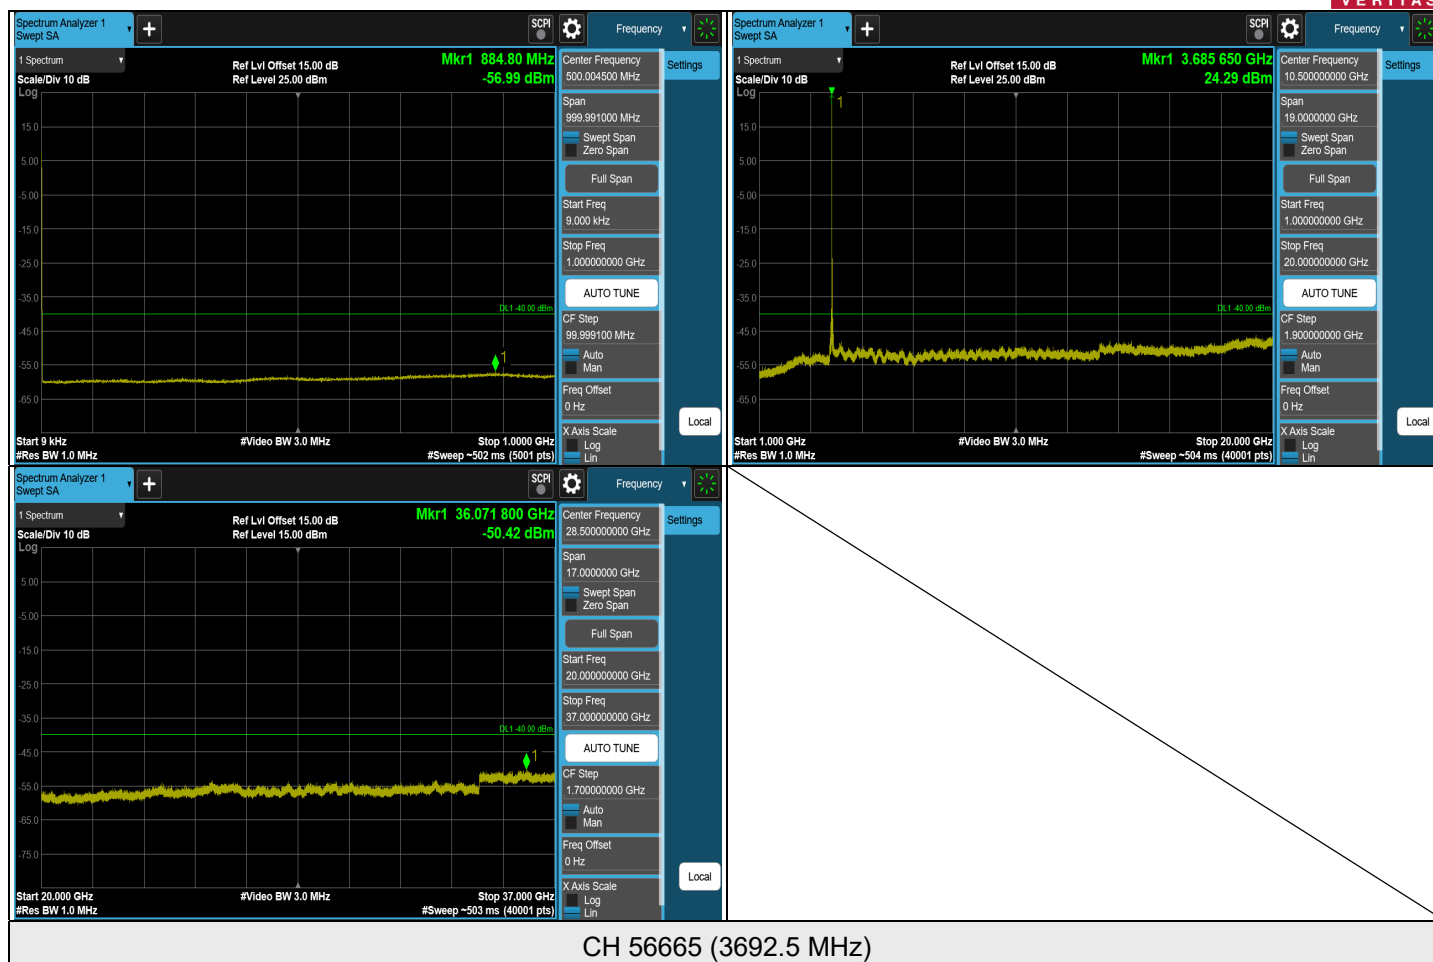

Note: The signal at 9 kHz is IF signal from spectrum analyzer.