


Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.212 mW.da4

EUT Setup Configuration 1

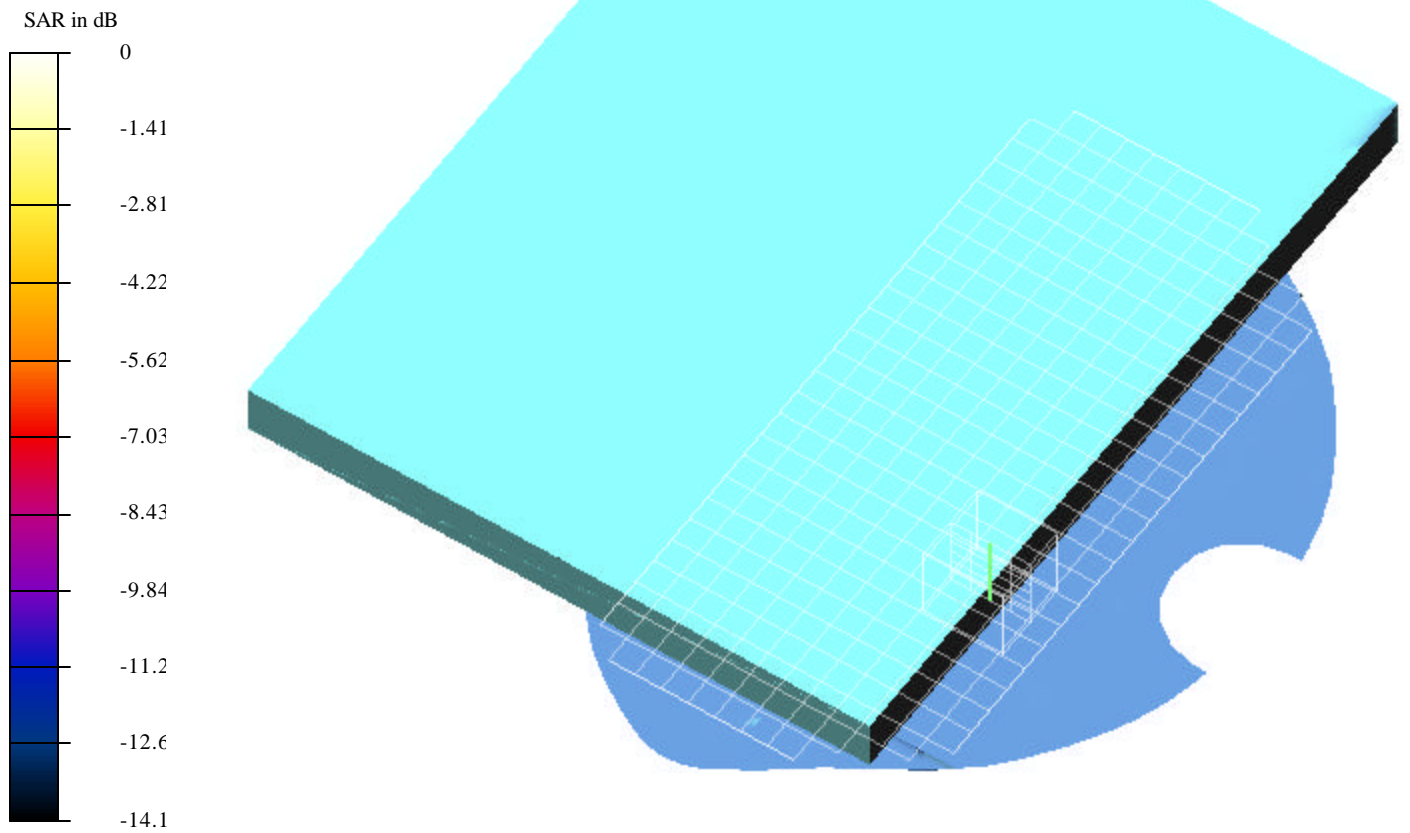

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.212 mW.da4

Applicant: Compal Trade Name: Motion Tablet M1300 Model: T002
Program: EUT Setup Configuration 1; Air temp 25 deg C & Liquid temp 22.7 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9368$ mho/m, $\epsilon = 50.84$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1 - TP:1185
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.72 V/m

Peak SAR = 0.621 mW/g

SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.0886 mW/g

Power Drift = -0.12 dB

Area Scan (13x27x1): Measurement grid: dx=10mm, dy=10mm

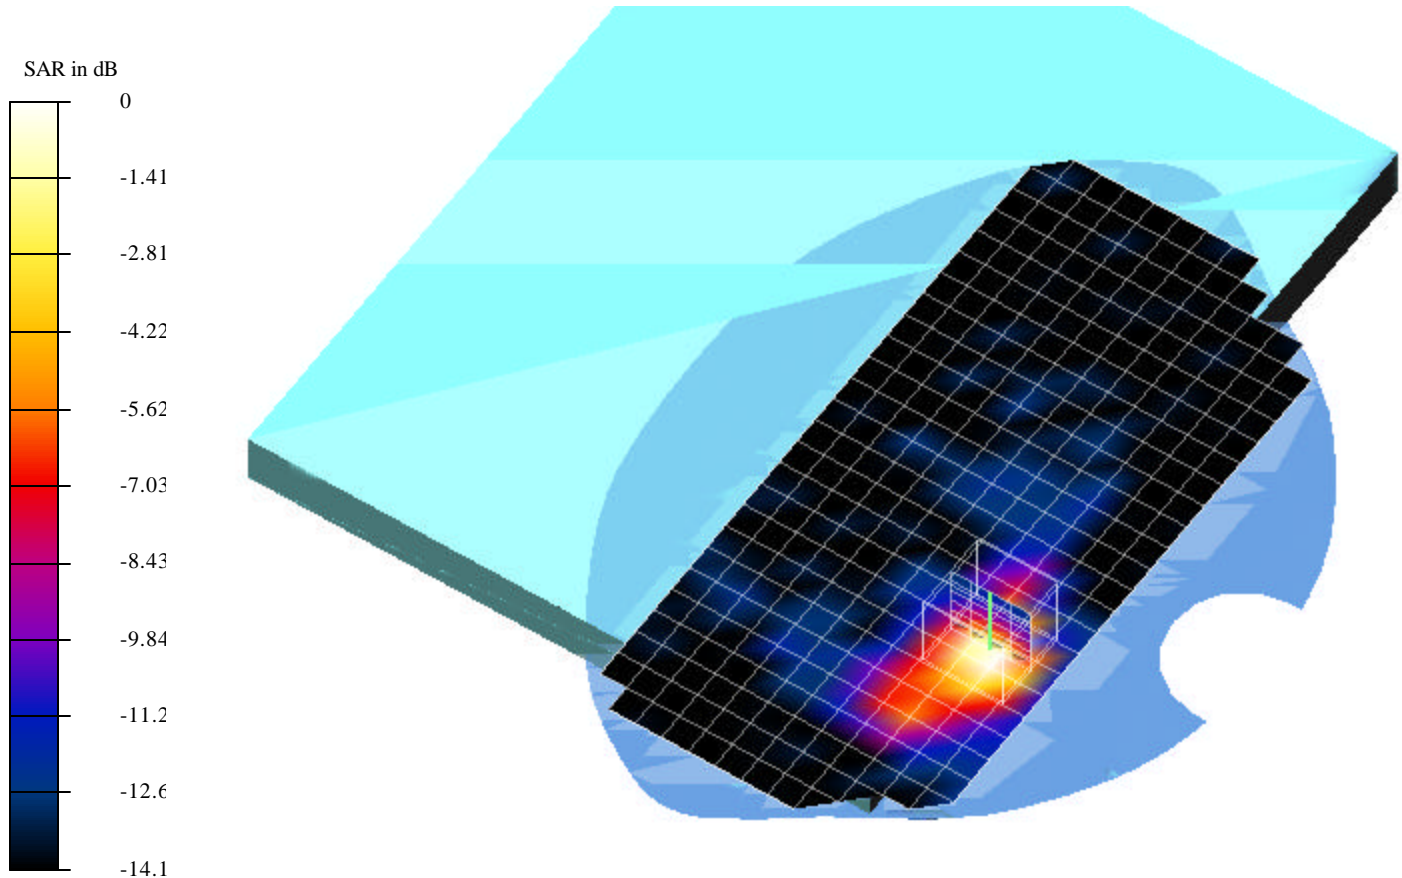

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.165 mW.da4

Applicant: Compal Trade Name: Motion Tablet M1300 Model: T002

Program: EUT Setup Configuration 1; Air temp 25 deg C & Liquid temp 22.6 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz ($\sigma = 1.9368$ mho/m, $\epsilon = 50.84$, $\rho = 1000$ kg/m³)

Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 1 - TP:1185

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.42 V/m

Peak SAR = 0.478 mW/g

SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.0708 mW/g

Power Drift = 0.03 dB

Area Scan (13x27x1): Measurement grid: dx=10mm, dy=10mm

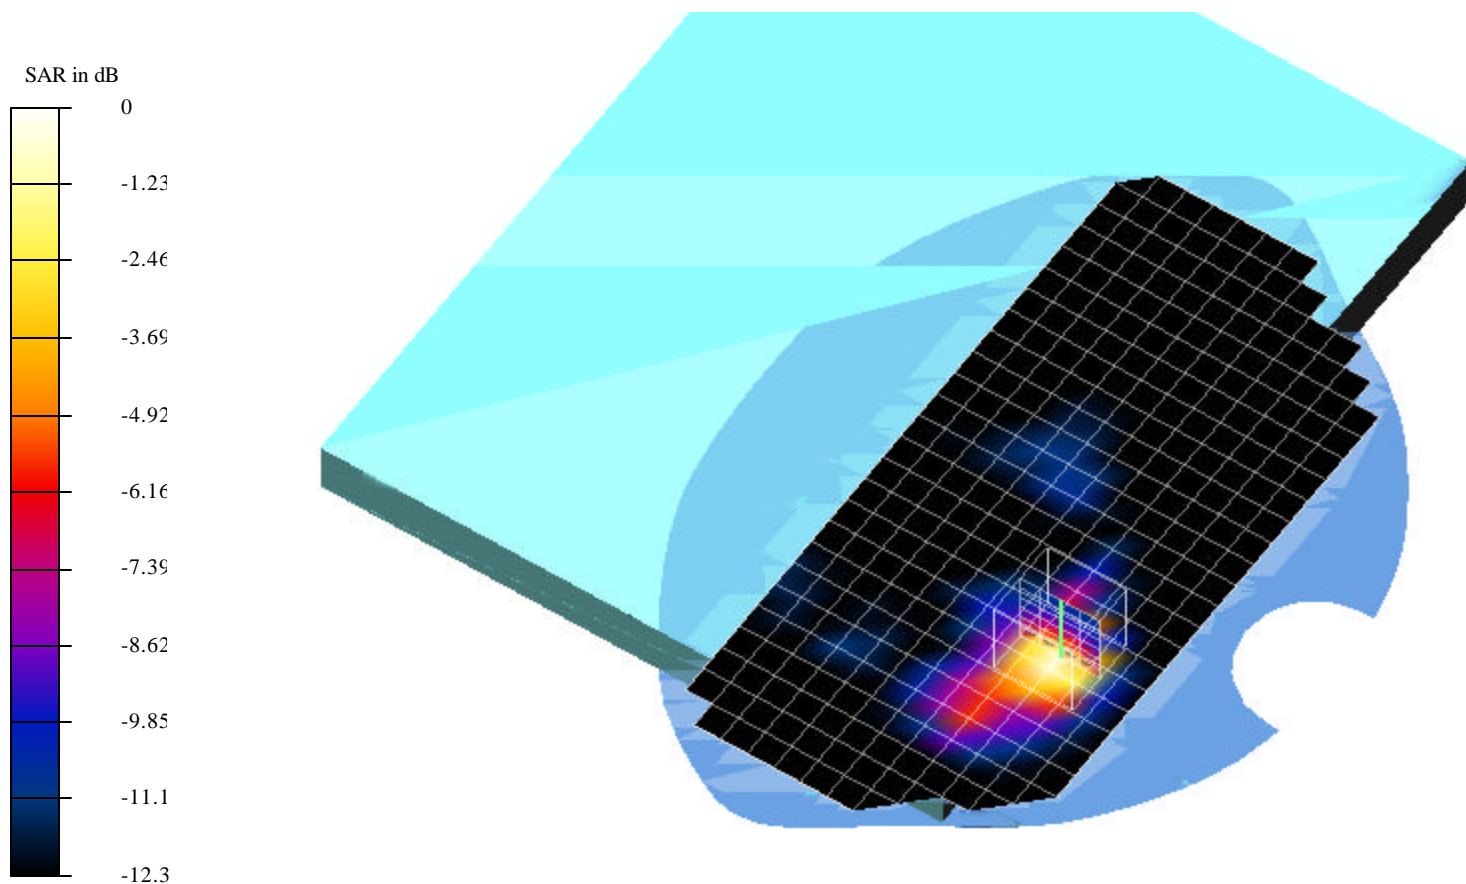

Test Laboratory: Compliance Certification Services

File Name: 3H-CH_0.141 mW.da4

Applicant: Compal Trade Name: Motion Tablet M1300 Model: T002

Program: EUT Setup Configuration 1; Air temp 25 deg C & Liquid temp 22.6 deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz ($\sigma = 1.9368$ mho/m, $\epsilon = 50.84$, $\rho = 1000$ kg/m³)

Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 1 - TP:1185

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.35 V/m

Peak SAR = 0.424 mW/g

SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.0607 mW/g



Power Drift = -0.13 dB

Area Scan (13x27x1): Measurement grid: dx=10mm, dy=10mm

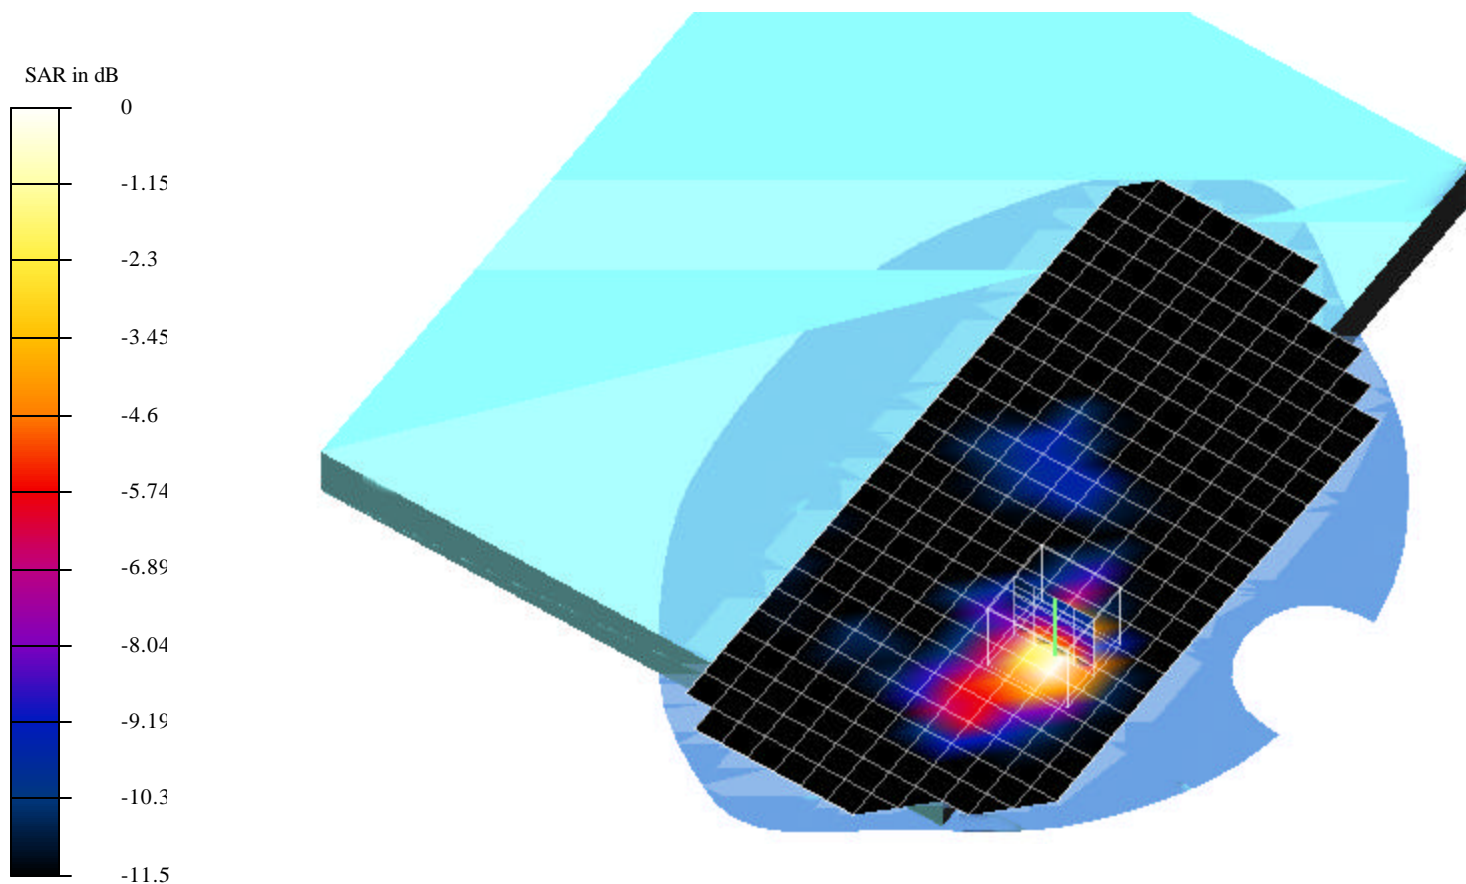

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.348 mW.da4

EUT Setup Configuration 2

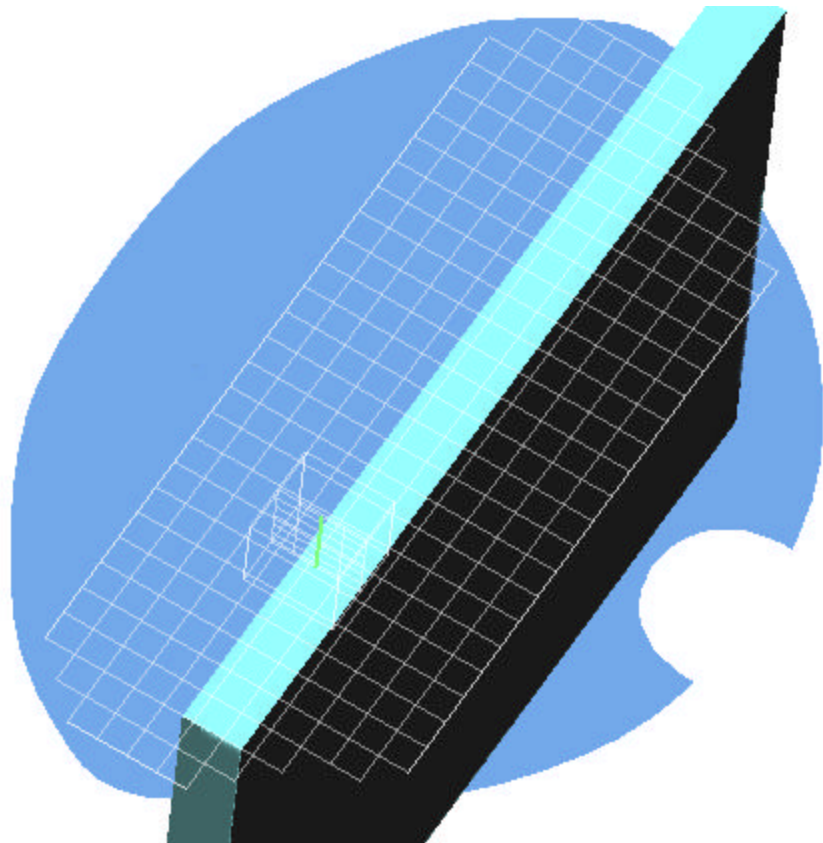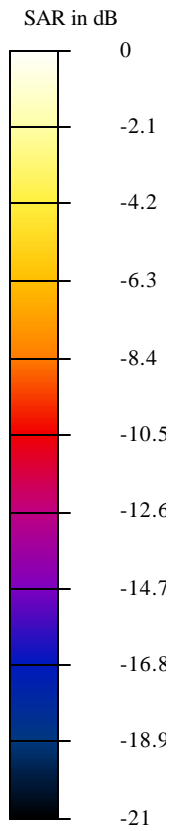

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.348 mW.da4

Applicant: Compal Trade Name: Motion Tablet M1300 Model: T002
Program: EUT Setup Configuration 2; Air temp 25 deg C & Liquid temp 22.4deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9341$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1 - TP:1185
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 5.05 V/m

Peak SAR = 1.09 mW/g

SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.131 mW/g

Power Drift = 0.03 dB

Area Scan (12x30x1): Measurement grid: dx=10mm, dy=10mm

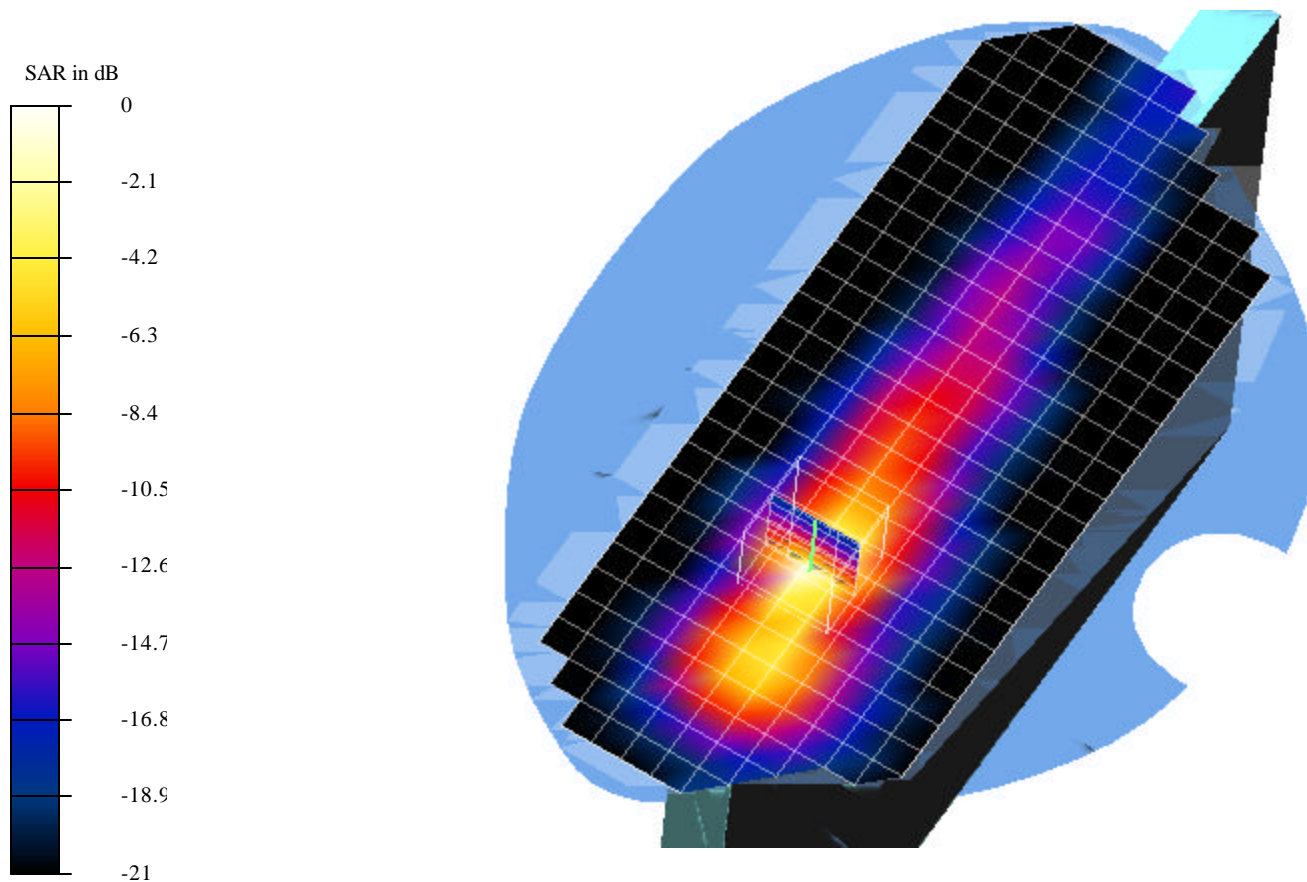

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.355 mW.da4

Applicant: Compal Trade Name: Motion Tablet M1300 Model: T002

Program: EUT Setup Configuration 2; Air temp 25 deg C & Liquid temp 22.3deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz ($\sigma = 1.9341$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)

Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 1 - TP:1185

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 5.01 V/m

Peak SAR = 1.11 mW/g

SAR(1 g) = 0.355 mW/g; SAR(10 g) = 0.133 mW/g

Power Drift = -0.03 dB

Area Scan (12x30x1): Measurement grid: dx=10mm, dy=10mm

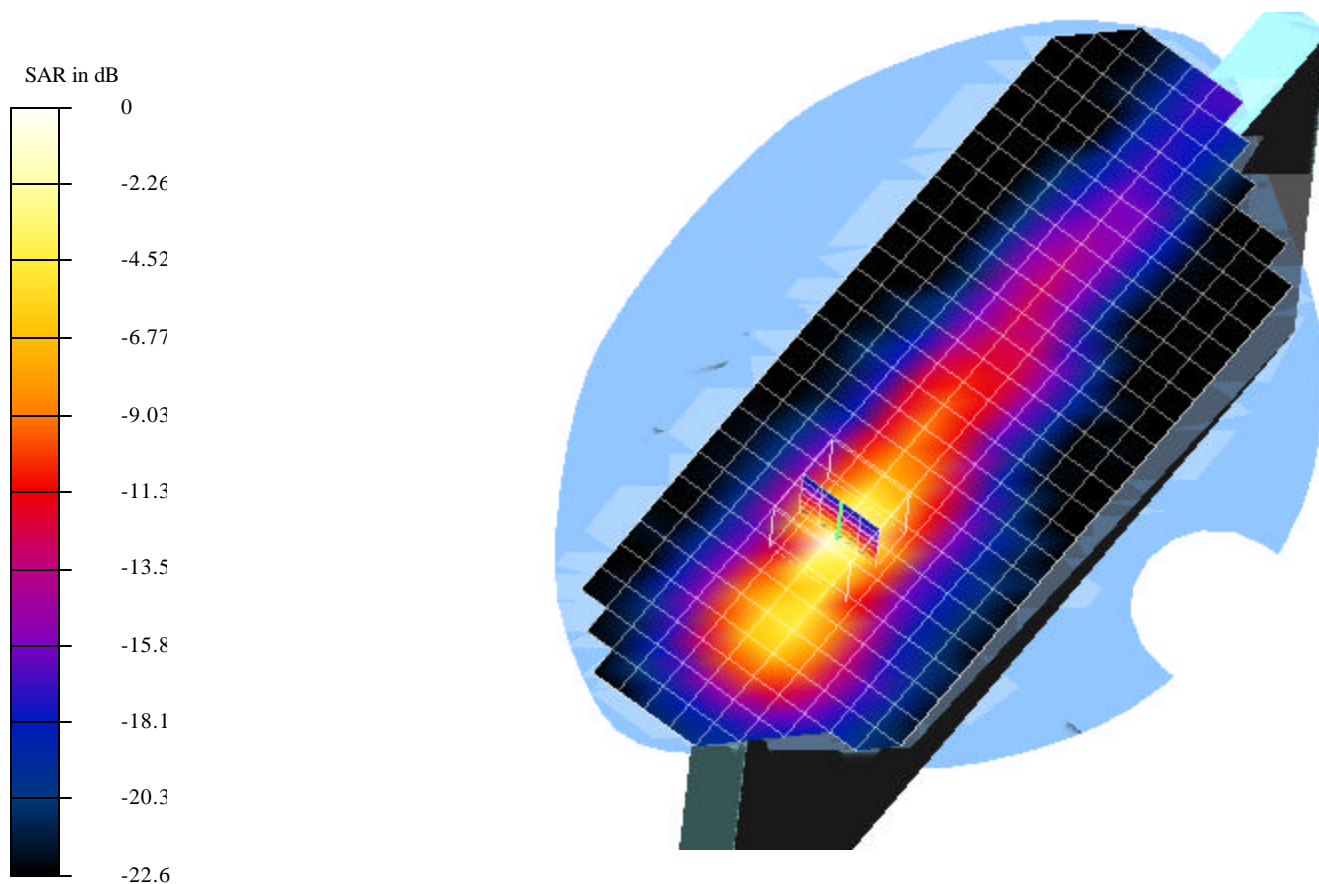

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.328 mW.da4

Applicant: Compal Trade Name: Motion Tablet M1300 Model: T002
Program: EUT Setup Configuration 2; Air temp 25 deg C & Liquid temp 22.3deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9341$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1 - TP:1185
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm

Reference Value = 4.72 V/m

Peak SAR = 1.04 mW/g

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.122 mW/g

Power Drift = 0.02 dB

Area Scan (12x30x1): Measurement grid: dx=10mm, dy=10mm

