

Test Laboratory: Compliance Certification Services

Left Hand Side

DUT: Compal; Type: VT-7U; Serial: N/A

Phantom section: Left Section

Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.7, 10.7, 10.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Touch position_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.453 mW/g

Touch position_M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 18.5 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.569 W/kg

SAR(1 g) = 0.393 mW/g; SAR(10 g) = 0.262 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.468 mW/g

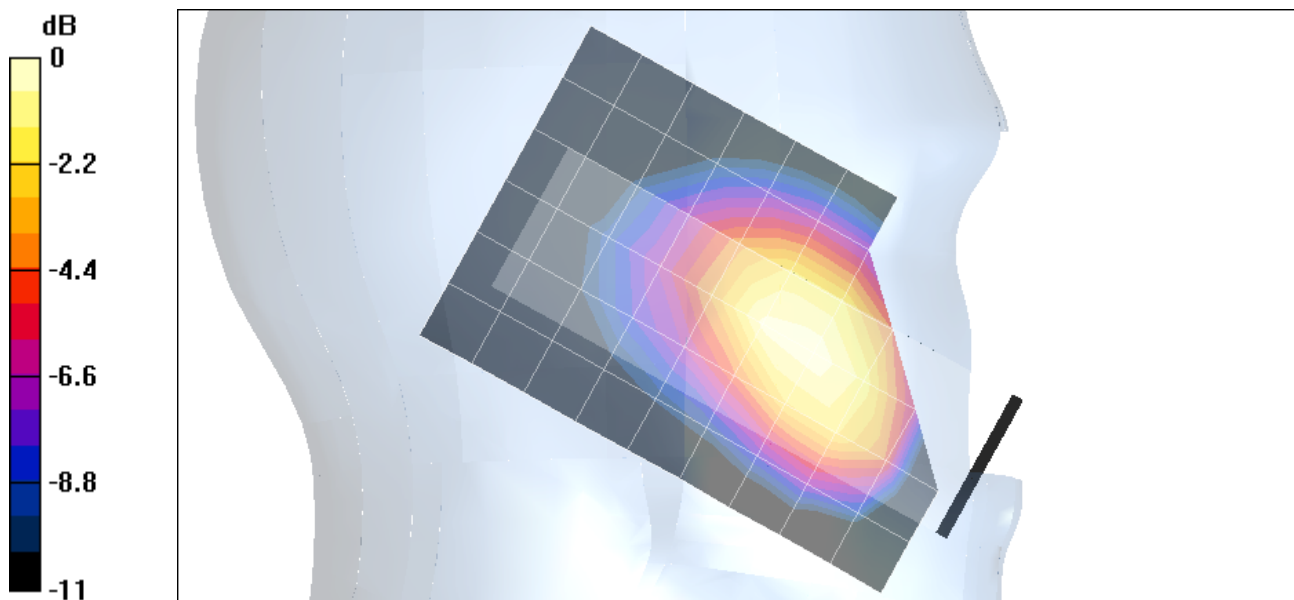

0 dB = 0.468mW/g

Test Laboratory: Compliance Certification Services

Left Hand Side

DUT: Compal; Type: VT-7U; Serial: N/A

Phantom section: Left Section

Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.7, 10.7, 10.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Tilt position_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.138 mW/g

Tilt position_M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 25.6 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.089 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.141 mW/g

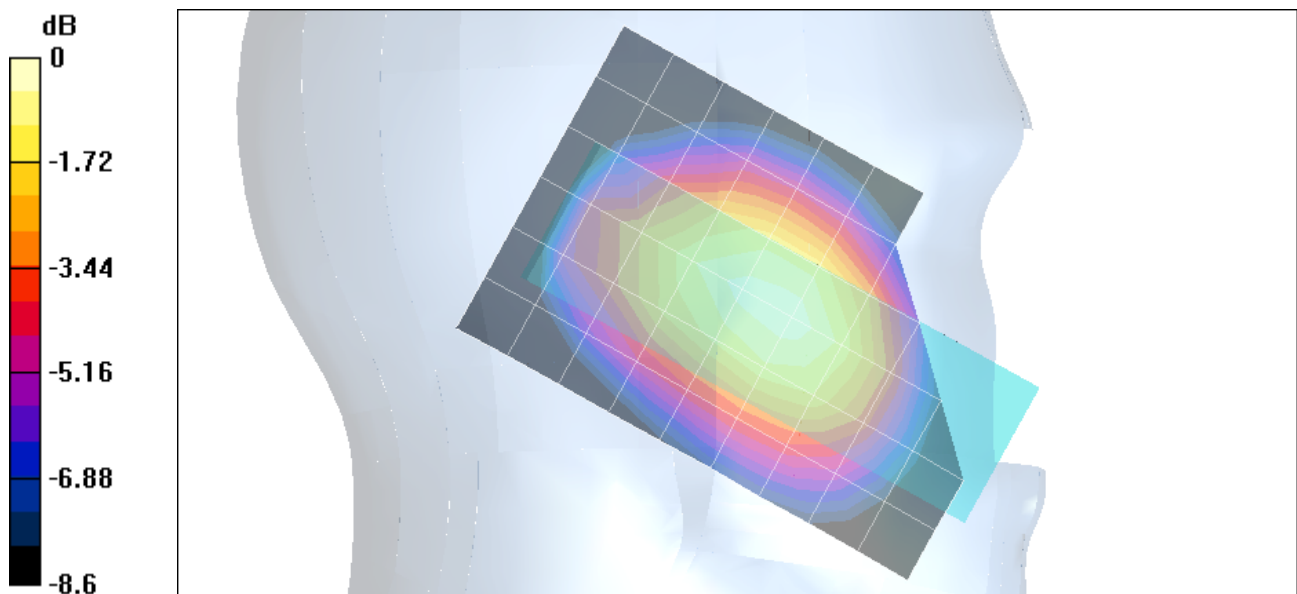

0 dB = 0.141mW/g

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Compal; Type: VT-7U; Serial: N/A

Phantom section: Right Section

Frequency: 824.76 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 824.76$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.7, 10.7, 10.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Touch position_L-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.355 mW/g

Touch position_L-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 17.4 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.217 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.386 mW/g

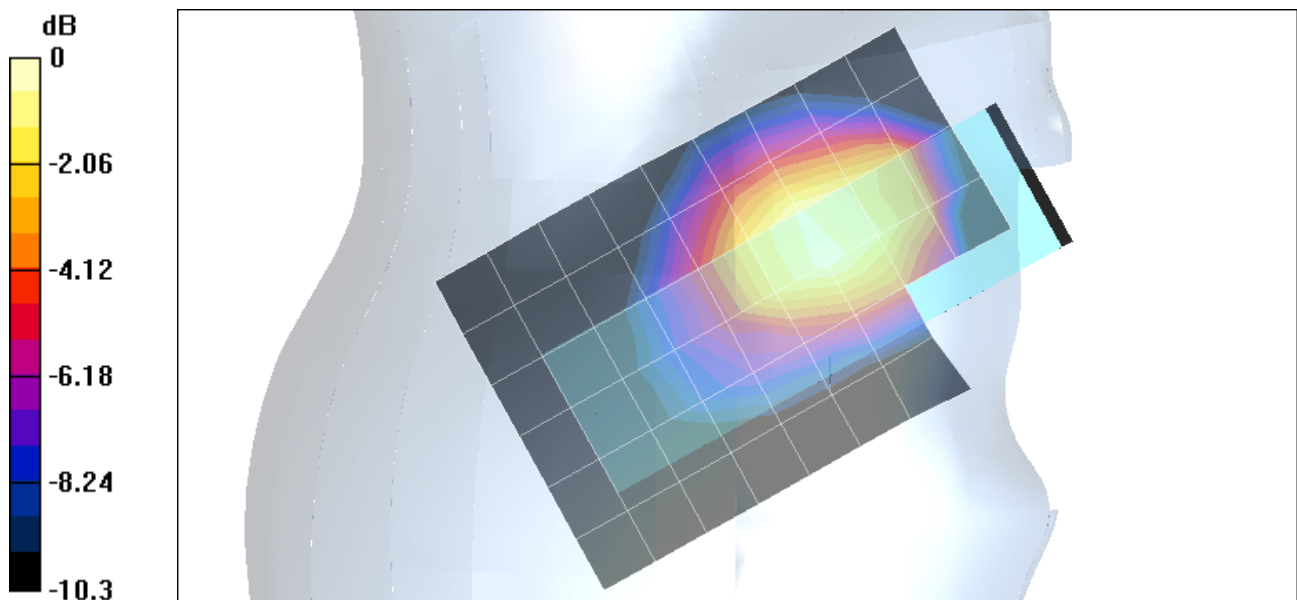

0 dB = 0.386mW/g

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Compal; Type: VT-7U; Serial: N/A

Phantom section: Right Section

Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.7, 10.7, 10.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Touch position_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.397 mW/g

Touch position_M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 18.6 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.262 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.482 mW/g

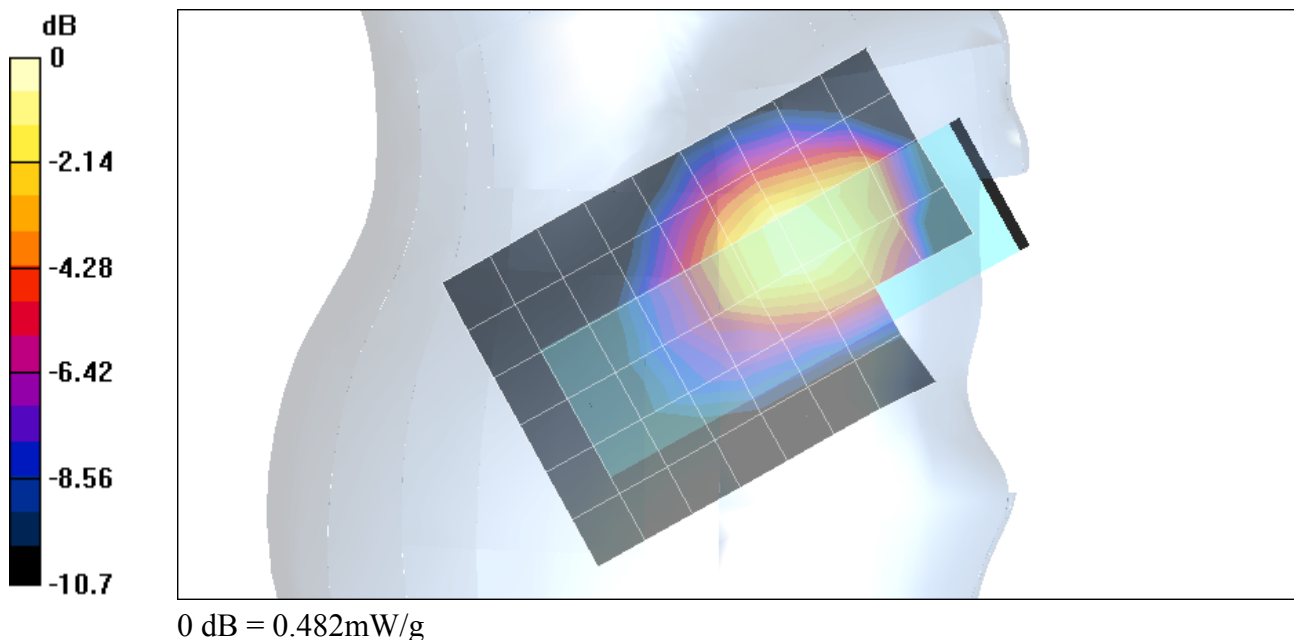

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Compal; Type: VT-7U; Serial: N/A

Phantom section: Right Section

Frequency: 848.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.25$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Measurement Standard: DASY4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.7, 10.7, 10.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Touch position_H-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.487 mW/g

Touch position_H-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 20.1 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 0.679 W/kg

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.303 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.547 mW/g

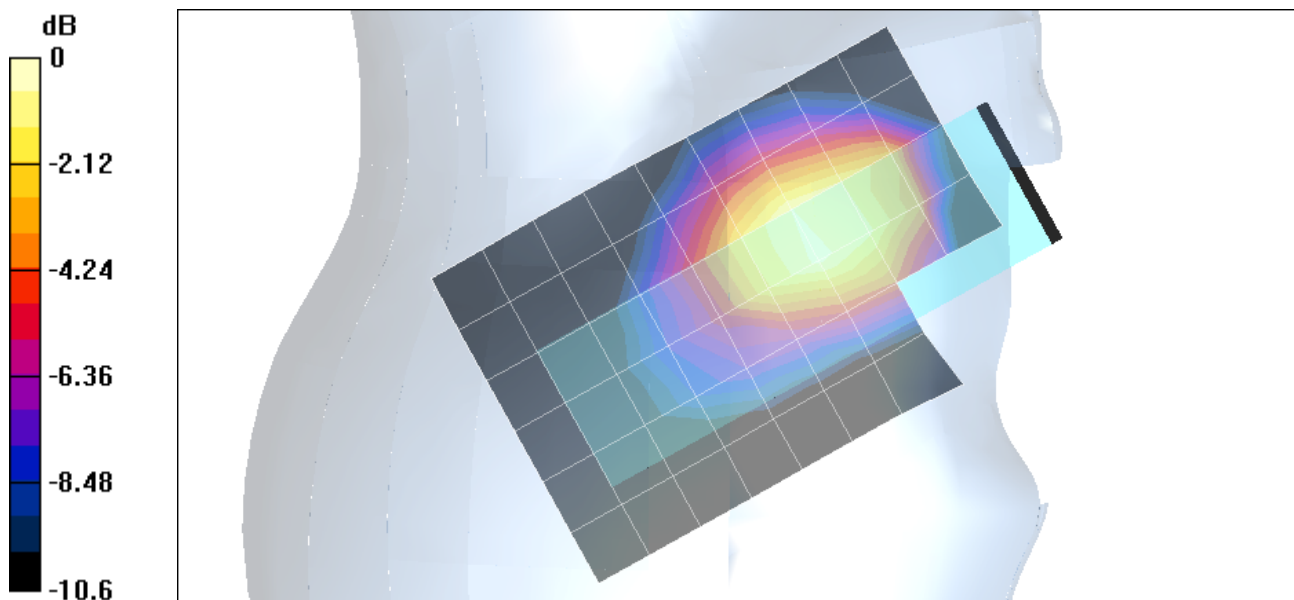

0 dB = 0.547mW/g

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Compal; Type: VT-7U; Serial: N/A


Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

Touch position_H-ch/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Info: [Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.574 mW/g

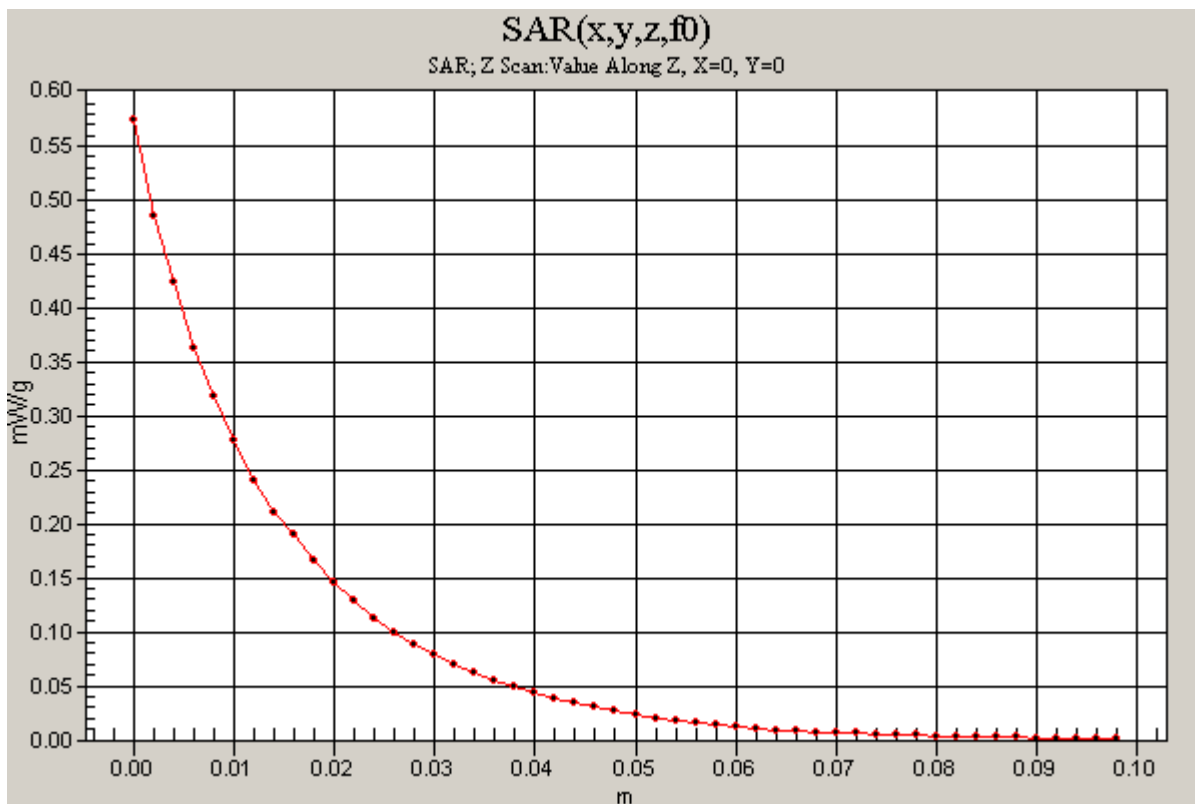

Test Laboratory: Compliance Certification Services

Right Hand Side

DUT: Compal; Type: VT-7U; Serial: N/A

Phantom section: Right Section

Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.7, 10.7, 10.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Tilt position_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.124 mW/g

Tilt position_M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 25 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.083 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.128 mW/g

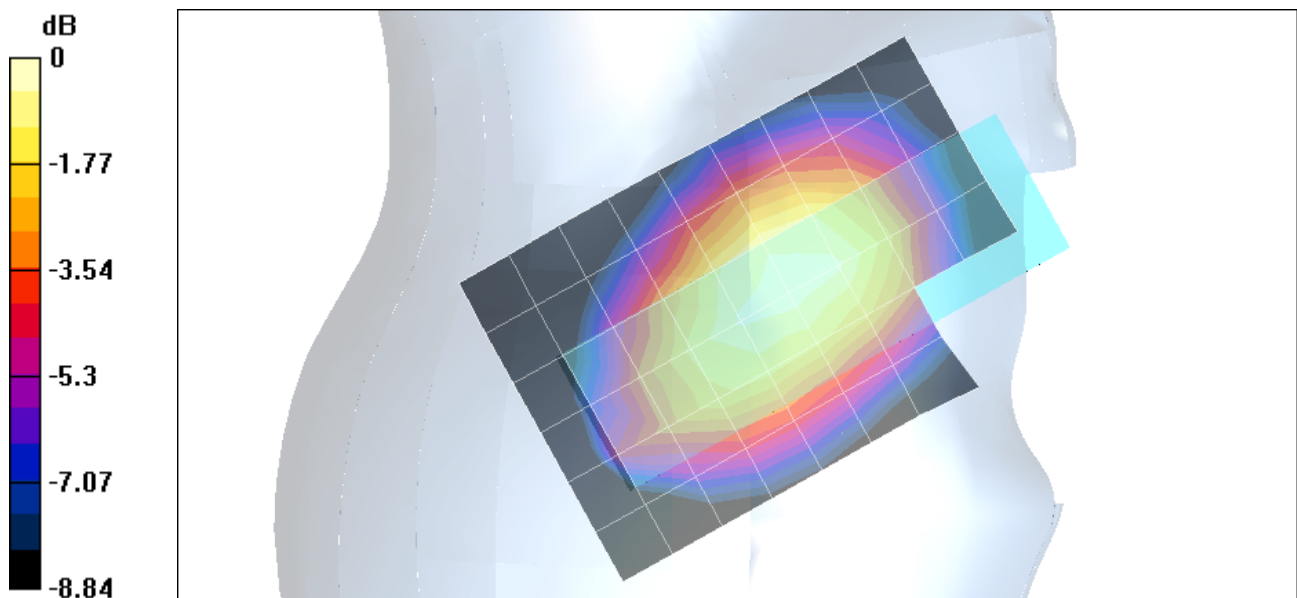

0 dB = 0.128mW/g

Test Laboratory: Compliance Certification Services

Body

DUT: Compal Electronics, Inc.; Type: VT-7U; Serial: N/A

Phantom section: Flat Section

Frequency: 824.76 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 824.76$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.5, 10.5, 10.5);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DAS4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

L-ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.167 mW/g

L-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 35.7 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.115 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.175 mW/g

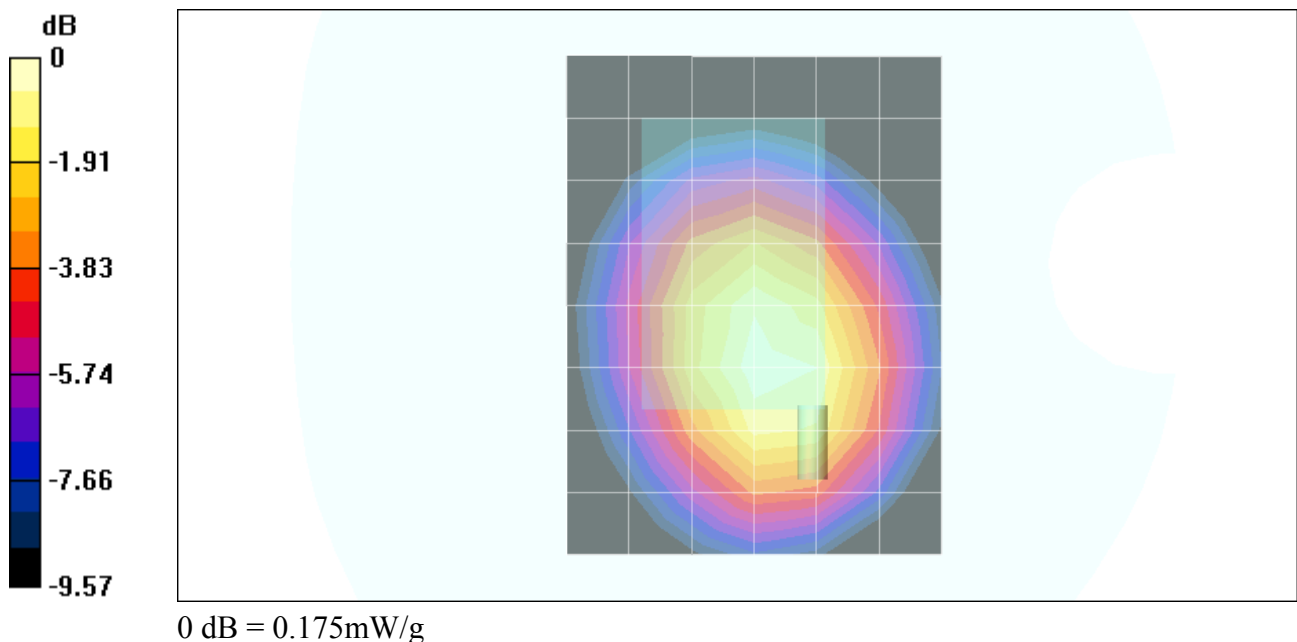

Test Laboratory: Compliance Certification Services

Body

DUT: Compal Electronics, Inc.; Type: VT-7U; Serial: N/A

Phantom section: Flat Section

Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.941$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.5, 10.5, 10.5);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DAS4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

M-ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.203 mW/g

M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 39.4 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.137 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.206 mW/g

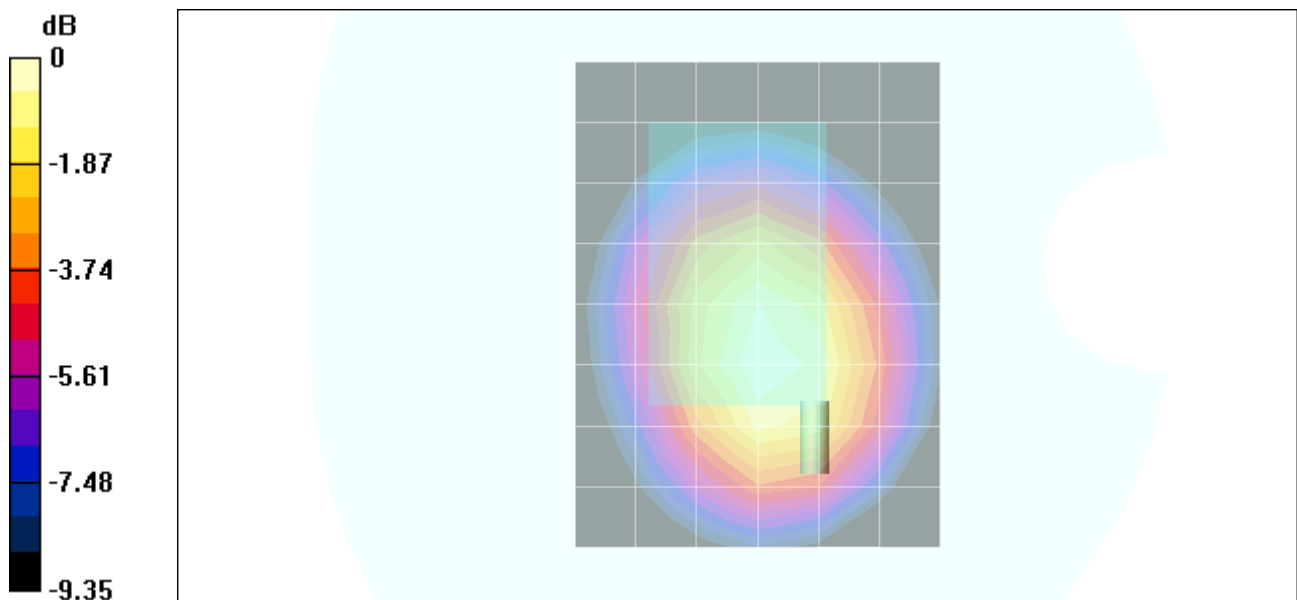

0 dB = 0.206mW/g

Test Laboratory: Compliance Certification Services

Body

DUT: Compal Electronics, Inc.; Type: VT-7U; Serial: N/A

Phantom section: Flat Section

Frequency: 848.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.25$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(10.5, 10.5, 10.5);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DAS4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

H-ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.302 mW/g

H-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 47.4 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.187 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.307 mW/g

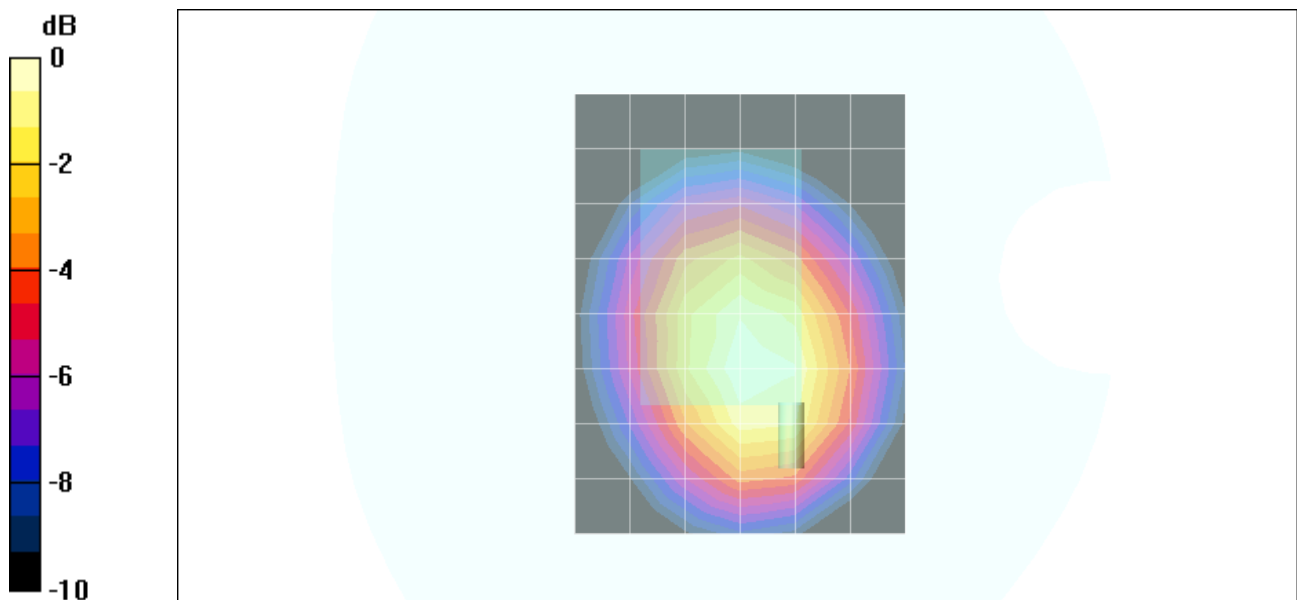

0 dB = 0.307mW/g