



**FCC CFR47 PART 22H and 24E  
CERTIFICATION  
TEST REPORT**

**FOR**

**DUAL BAND TRI MODE PCS/AMPS/CDMA CELLULAR PHONE**

**MODEL NUMBER: VT820**

**FCC ID: GKRVT820**

**REPORT NUMBER: 05I3576-1**

**ISSUE DATE: AUGUST 18, 2005**

*Prepared for*  
**COMPAL ELECTRONICS, INC.  
8F, No.500, JUIKANG ROAD, NEIHU,  
TAIPEI (114),  
TAIWAN, R.O.C**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

**NVLAP<sup>®</sup>**

**LAB CODE:200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
A	8/18/2005	Initial Issue	Thu

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>5</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>6</b>
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>6</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>6</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>6</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>6</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>6</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>7</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT.....</b>	<b>9</b>
<b>7. LIMITS AND RESULTS.....</b>	<b>10</b>
7.1. <i>OCCUPIED BANDWIDTH.....</i>	<i>10</i>
7.2. <i>AMPS EMISSION LIMITATION.....</i>	<i>21</i>
7.3. <i>MODULATION CHARACTERISTICS.....</i>	<i>28</i>
7.4. <i>RF POWER OUTPUT.....</i>	<i>32</i>
7.5. <i>FREQUENCY STABILITY.....</i>	<i>36</i>
7.6. <i>SPURIOUS EMISSION AT ANTENNA TERMINAL.....</i>	<i>39</i>
7.7. <i>FIELD STRENGTH OF SPURIOUS RADIATION .....</i>	<i>57</i>
7.7.1. <i>WORST-CASE RADIATED EMISSIONS BELOW 1 GHz (DIGITAL).....</i>	<i>61</i>
7.8. <i>POWERLINE CONDUCTED EMISSIONS.....</i>	<i>65</i>
<b>8. SETUP PHOTOS.....</b>	<b>69</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** COMPAL ELECTRONICS, INC.  
8F, No.500, JUIKANG ROAD  
TAIPEI (114), TAIWAN, R.O.C.

**EUT DESCRIPTION:** DUAL BAND TRI MODE PCS/AMPS/CDMA CELLULAR PHONE

**MODEL:** VT820

**SERIAL NUMBER:** 67255602/672555FF/67255600

**DATE TESTED:** AUGUST 10 – 17, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22 SUBPART H	NO NON-COMPLIANCE NOTED
FCC PART 24 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



---

EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



---

WILLIAM ZHUANG  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA/EIA 603A (2001), ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 22, and FCC CFR 47 Part 24.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a dual band tri mode PCS/AMPS/CDMA cellular phone.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power, ERP and EIRP as follows:

Frequency Range (MHz)	Modulation	Output Power (dBm)	Output Power (mW)	Output ERP/EIRP (dBm)	Output ERP/EIRP (mW)
824.04 - 848.97	AMPS	27.17	521.19	24.90	309.03
824.7 - 848.31	CDMA	29.36	862.98	28.30	676.08
1851.25 - 1908.75	PCS	29.2	831.76	29.40	870.96

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a Helical fixed type antenna, with a maximum gain of 1 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was manually operation.

### 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 836.49 MHz for AMPS, 835.89 for CDMA and 1851MHz for PCS mode.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Level Translator	VACOM	DL-LT--DC1	N/A	N/A
AC/DC Adaptor	VACOM	DRL-091000C	SA10022-4009	N/A


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	1	1	SMA	RF cable	0.2m	
2	2	1	BNC	RF cable	0.2m	
3	VC-5U	1	25 pin	Serial	0.2m	
4	DC	1	DC	Un-shield	1.5m	
5	AC	1	US 115V	Un-shield	1m	

### TEST SETUP

The EUT is installed as a stand-alone device during the tests.

**SETUP DIAGRAM FOR TESTS**

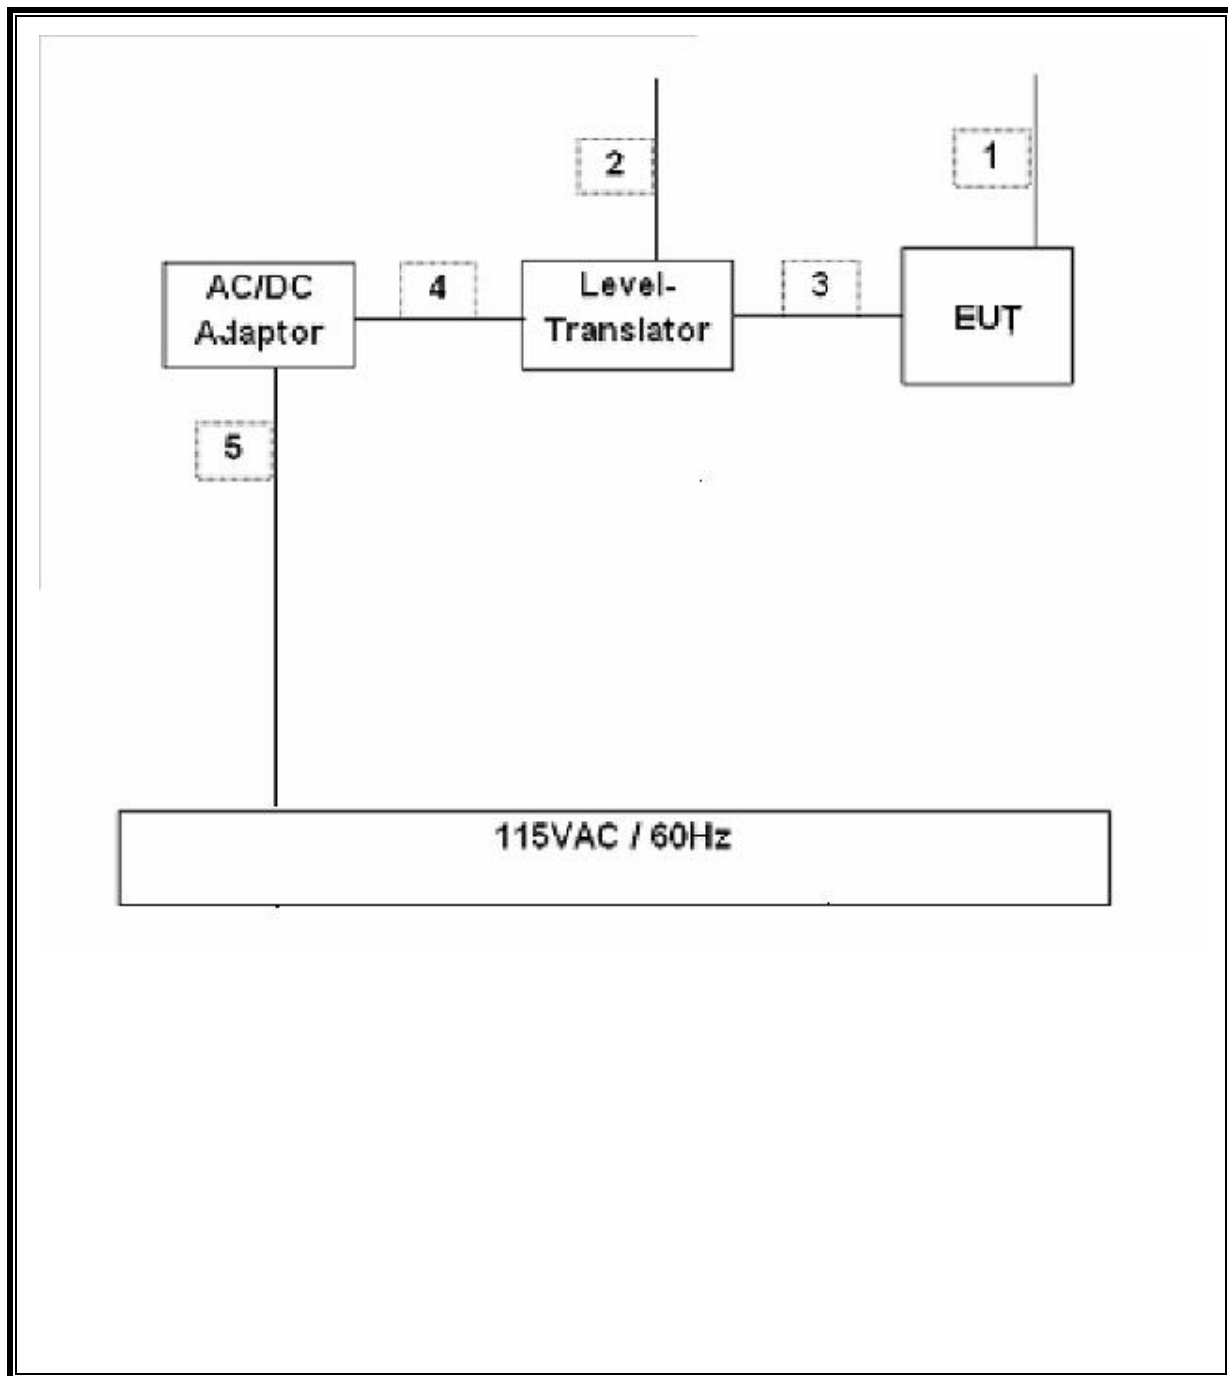



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Function Generator	HP	3325A	2652A24749	11/5/2005
Modulation Analyzer	HP	8901B	3438A05272	9/23/05
Peak Power Meter	Agilent	E4416A	GB41291160	2/9/06
Peak / Average Power Sensor	Agilent	E9327A	US40440755	2/10/06
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	US42070220	1/1/06
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	4/22/06
Preamplifier, 1 ~ 26 GHz	Miteq	NSP2600-44	646456	8/17/05
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	3/29/06
RF Filter Section	HP	85420E	3705A00256	3/29/06
Antenna, Bilog 30MHz ~ 2Ghz	Sunol Sciences	JB1	A121003	3/3/06
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/06
Site A Line Stabilizer/Conditioner	Tripplite	LC-1800a	A005181	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/05
Spectrum Analyzer, 26.5 GHz	HP	8593EM	3710A00205	1/6/06
DC Power Supply	HP	E3610A	KN24104150	N/A
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	29800	6/10/06

## 7. LIMITS AND RESULTS

### 7.1. OCCUPIED BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the -26 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal -26 dB bandwidth function is utilized.

#### RESULTS

No non-compliance noted:

##### AMPS Modulation

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	824.04	0.040657
Middle	836.49	0.040601
High	848.97	0.040588

##### CDMA Modulation


Channel	Frequency (MHz)	Bandwidth (MHz)
Low	824.76	1.414
Middle	835.89	1.383
High	848.25	1.398


##### PCS Modulation


Channel	Frequency (MHz)	Bandwidth (MHz)
Low	1851.25	1.405
Middle	1880	1.381
High	1908.75	1.446




**AMPS 26 dB BANDWIDTH**

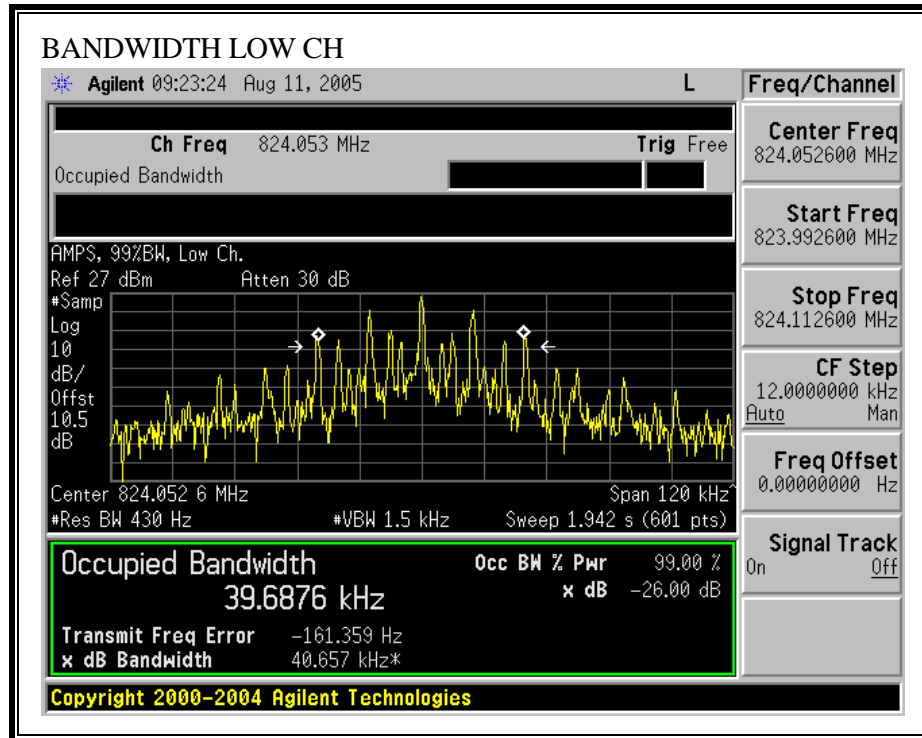


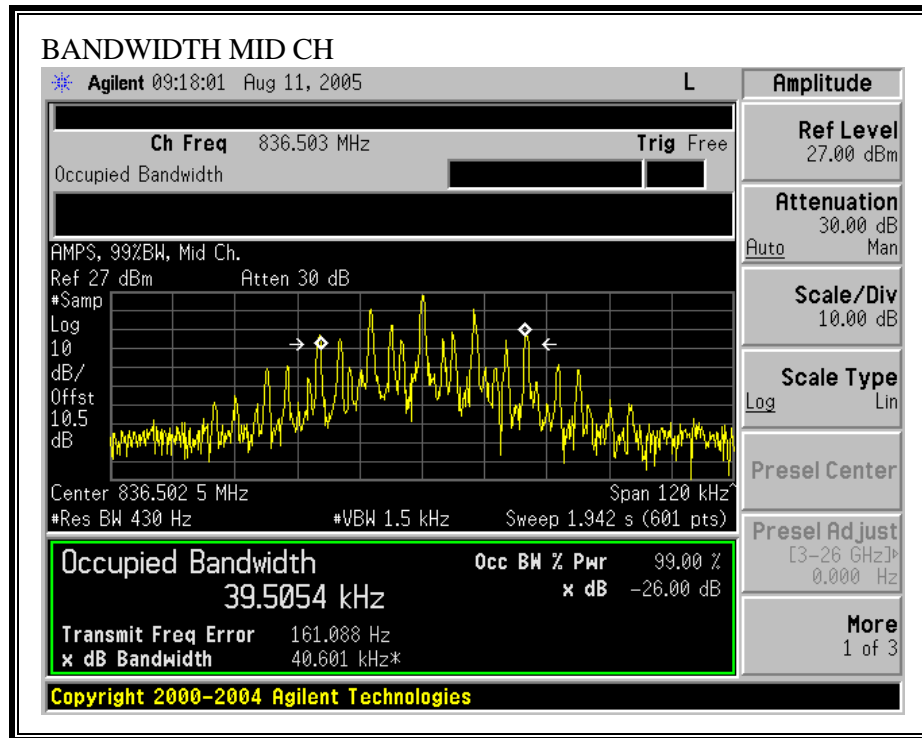

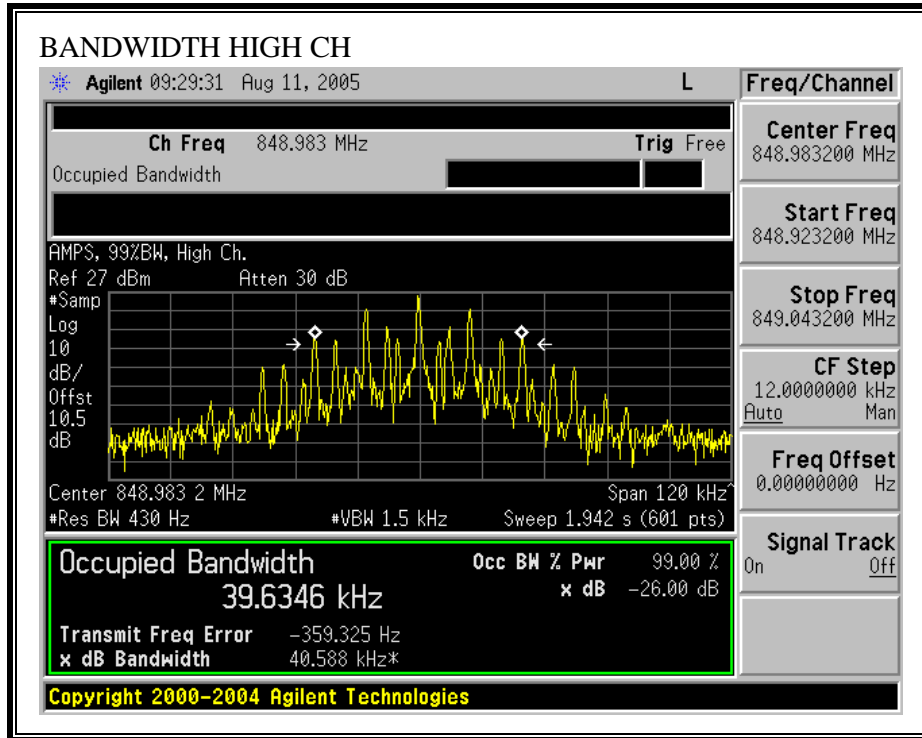


**CDMA 26 dB BANDWIDTH**

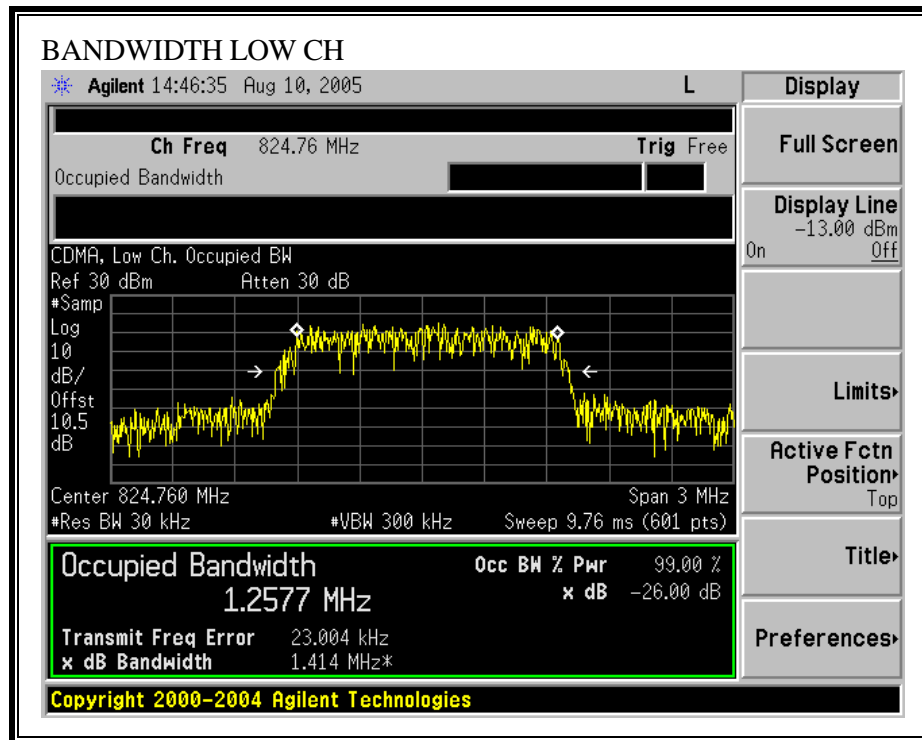


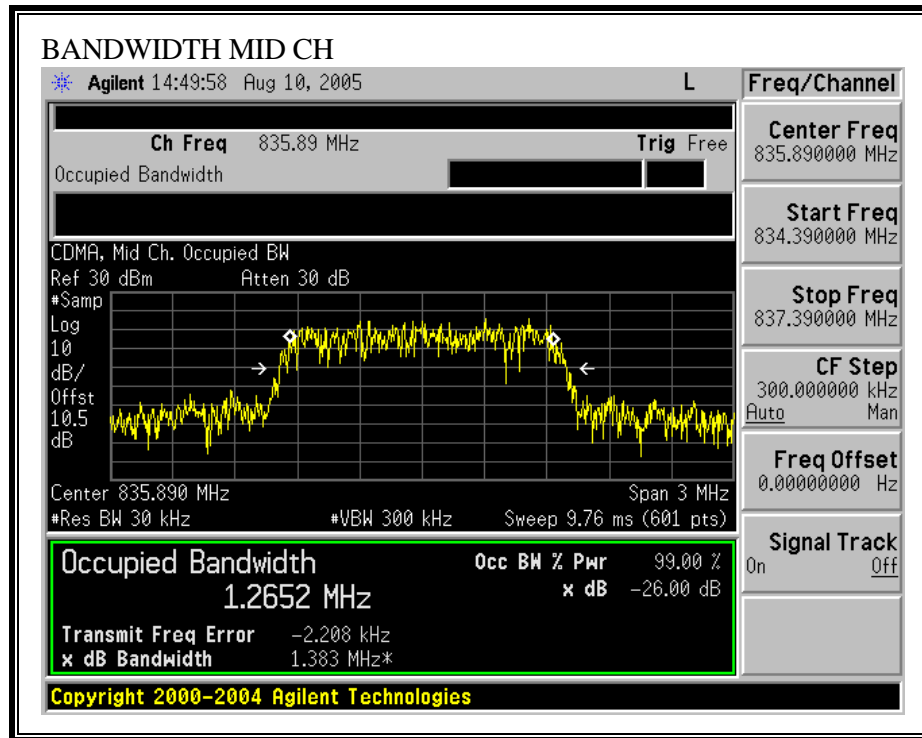





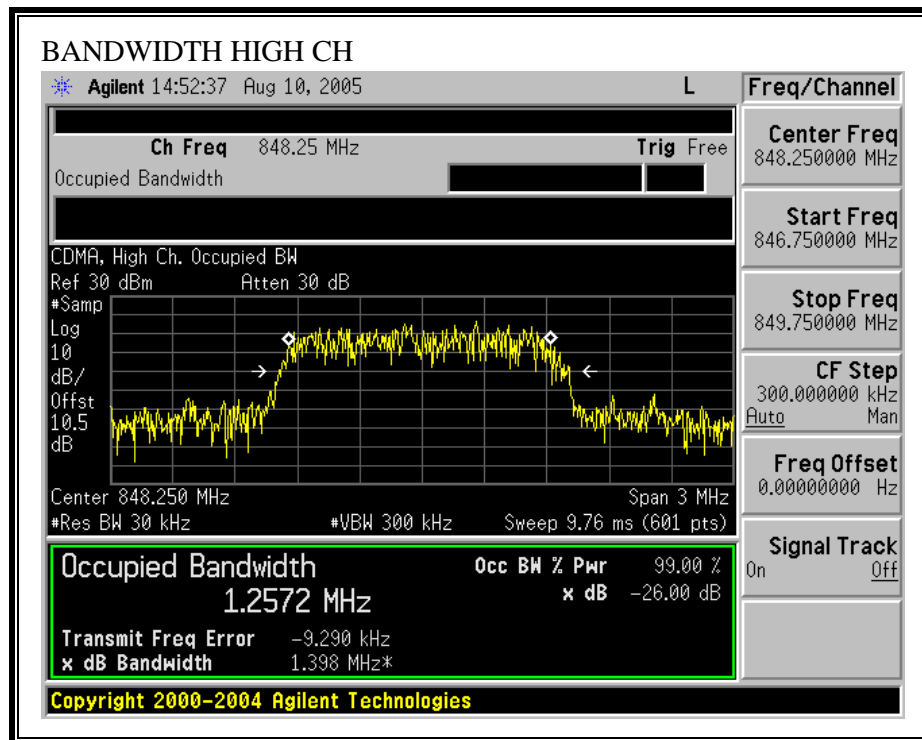

**PCS 26 dB BANDWIDTH**

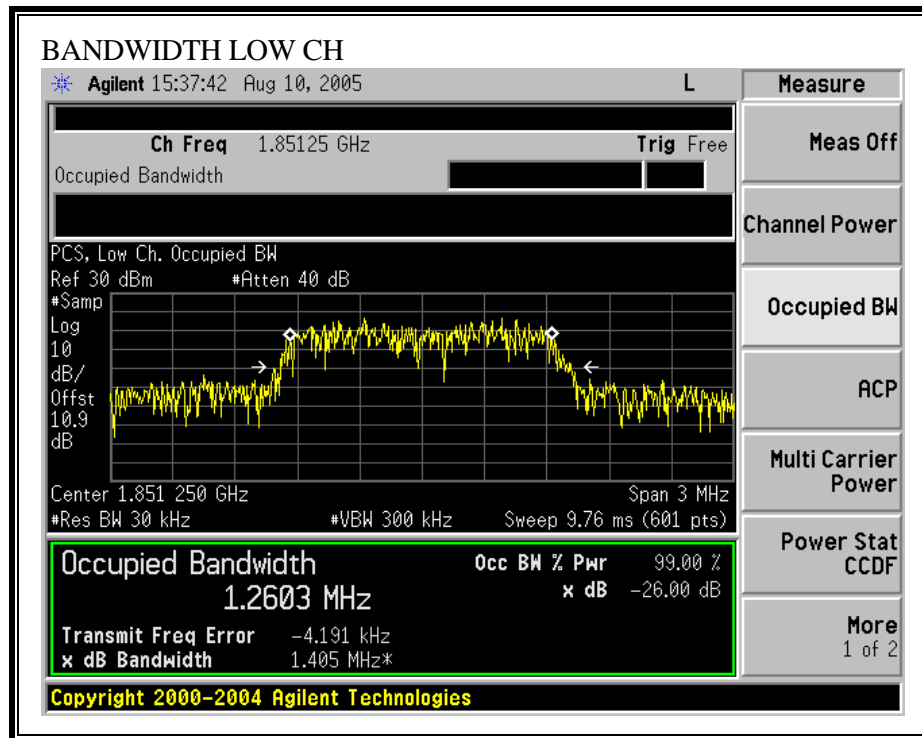

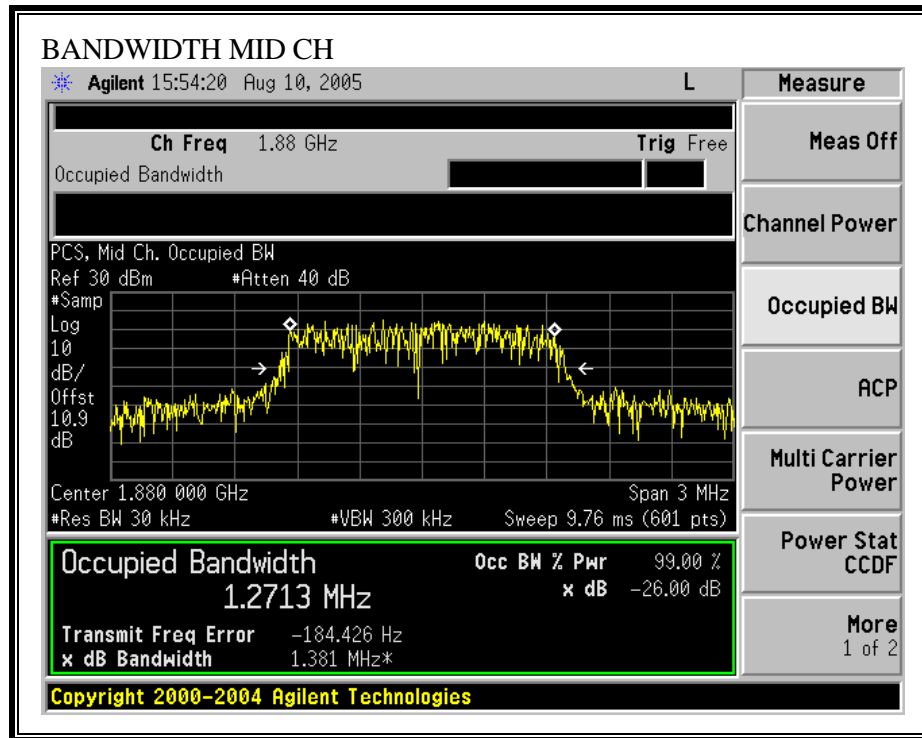

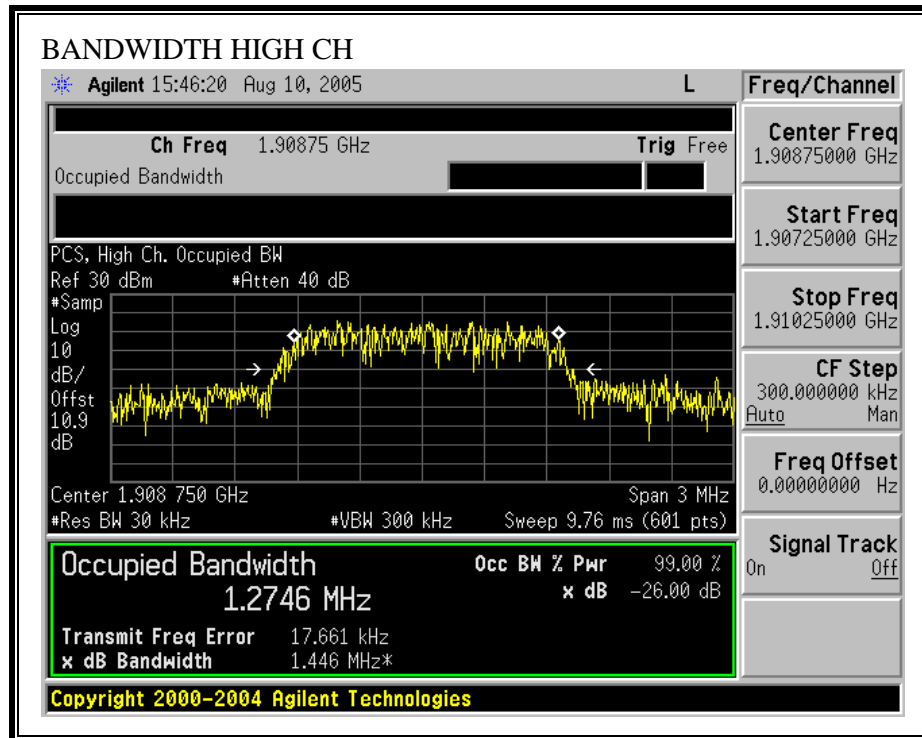

## 7.2. AMPS EMISSION LIMITATION

### LIMIT

#### §22.917 (b)

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60dB below the carrier or  $43 + 10 \log_{10}$  (mean output power in W) dB, whichever is the smaller attenuation

#### §22.917 (d)

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to and including 90 kHz, the sideband is at least 45 dB below the carrier.
- c. On any frequency removed from the assigned carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60 dB below the carrier or  $43 + 10 \log_{10}$  (mean output power in W) dB, whichever is the smaller attenuation.


### TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.4.10


### RESULTS

No non-compliance noted:


**Un-modulated Signal**

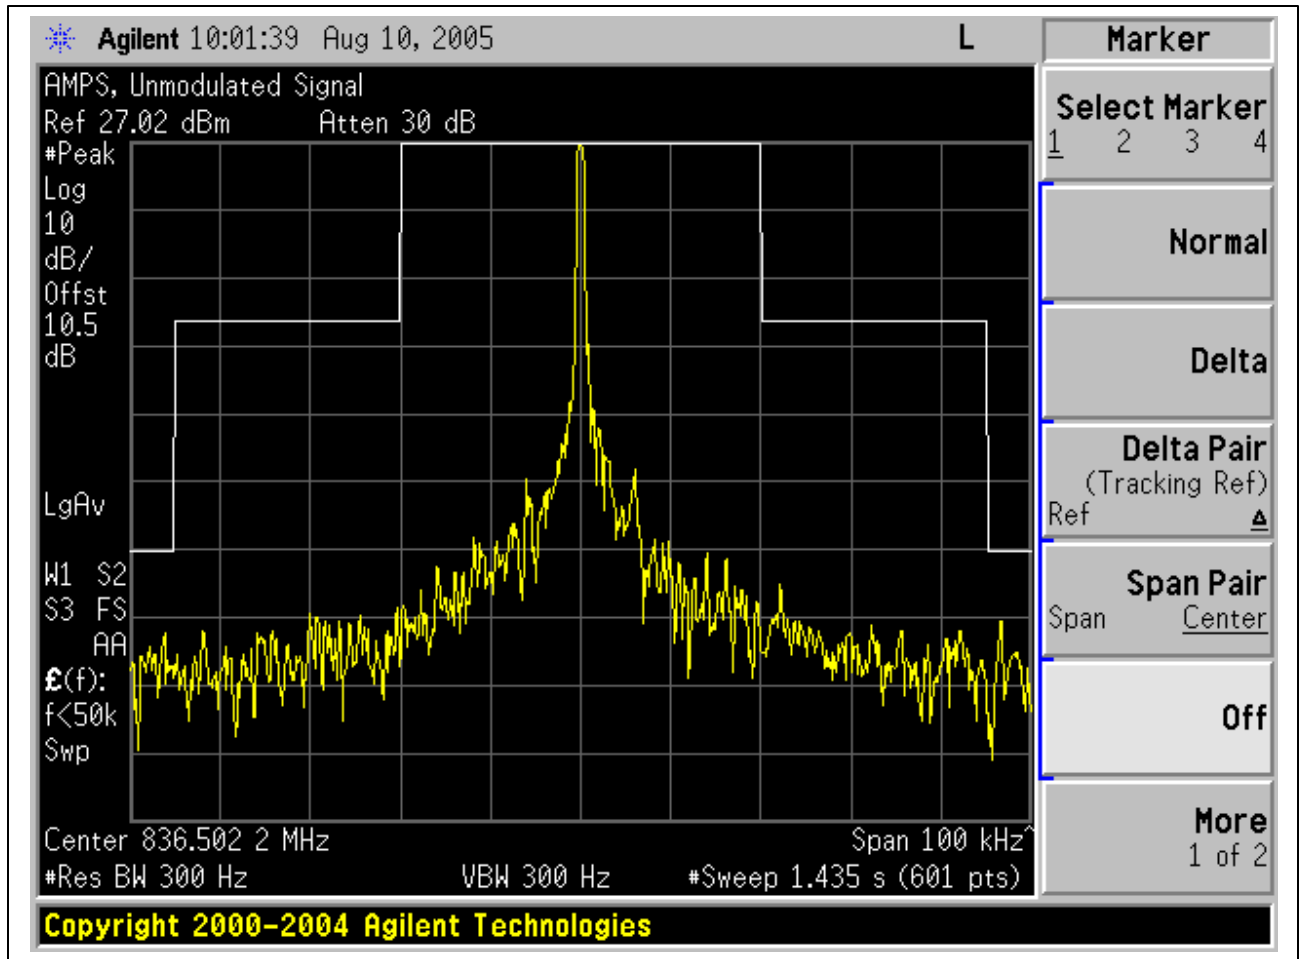

**Voice**

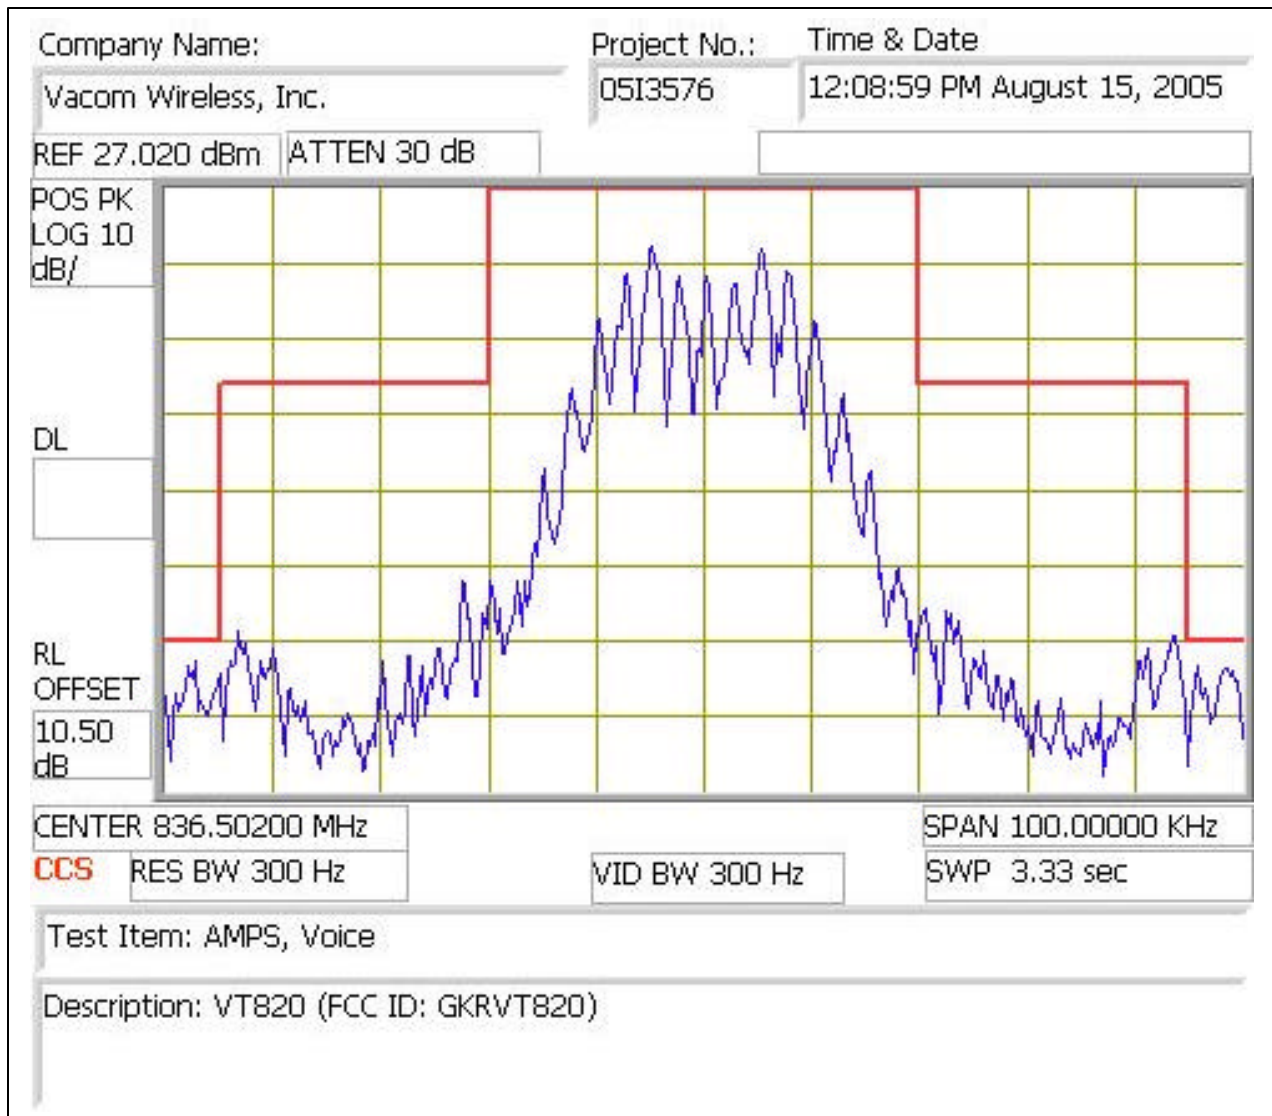


**Signalling Tone (ST) + Supervisory Audio Tone (SAT)**

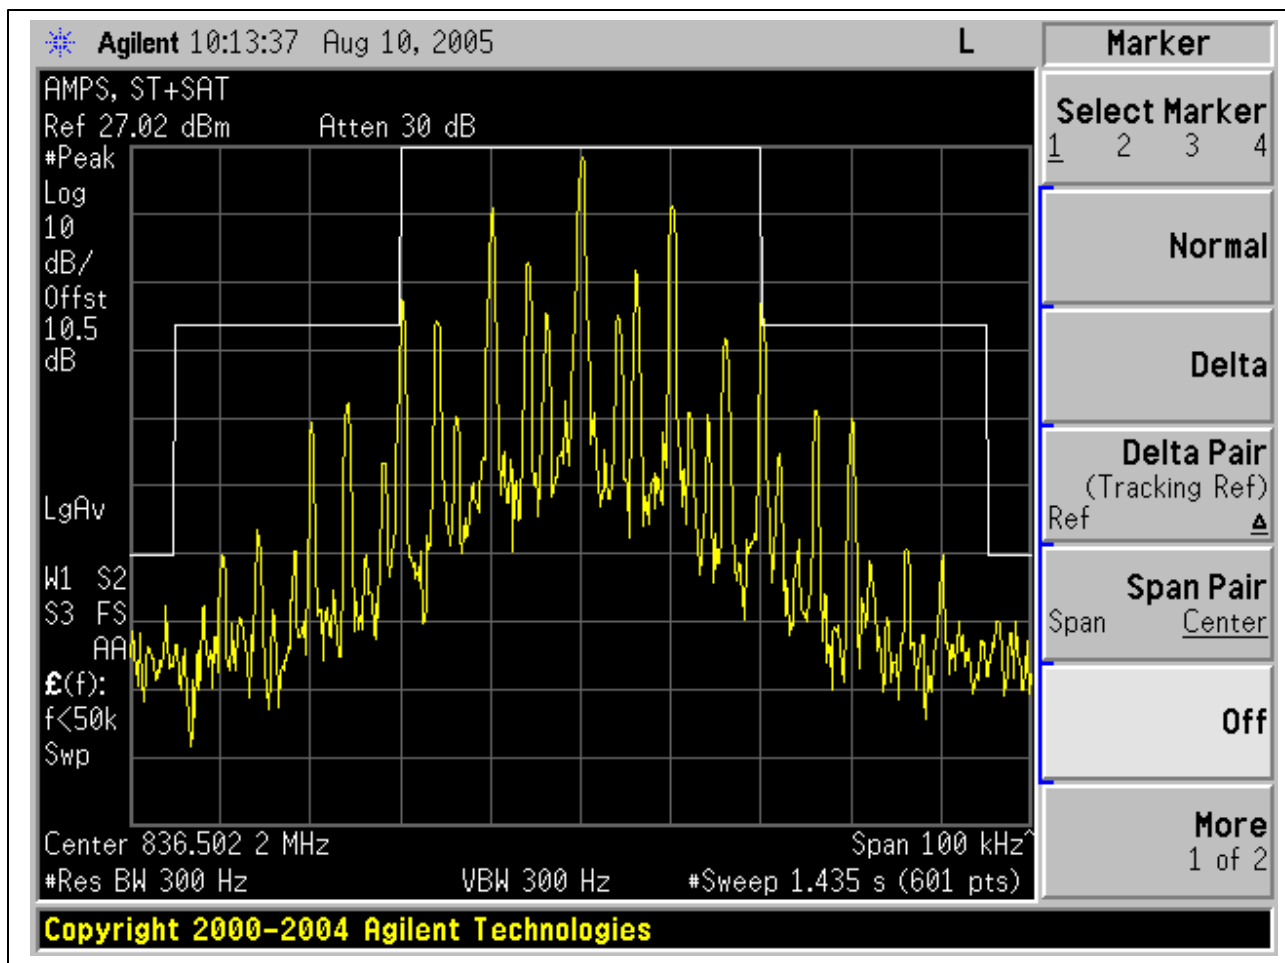





**Wide Band Data (WBD)**

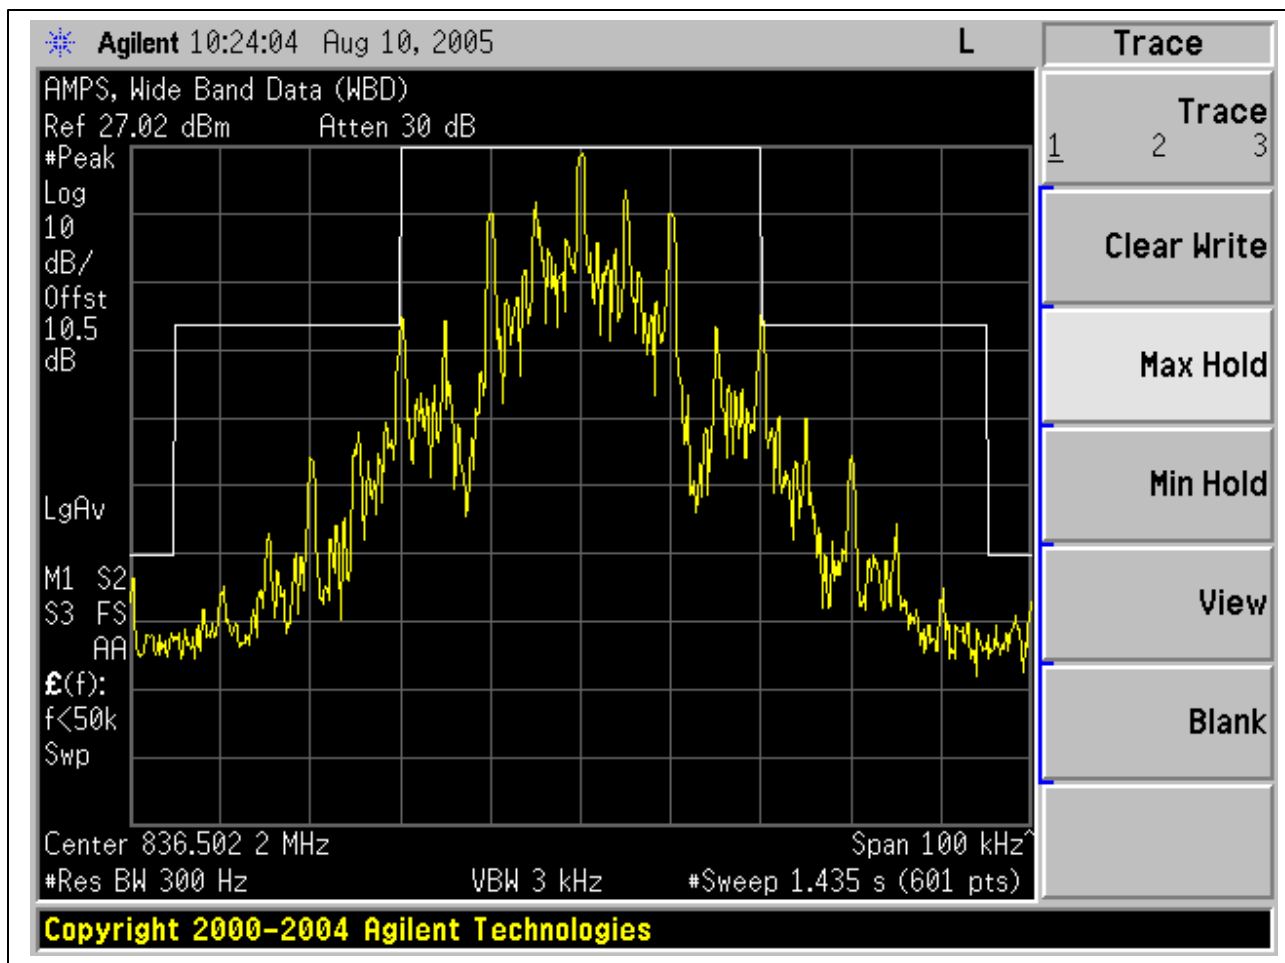

**Voice + Supervisory Audio Tone (SAT)**

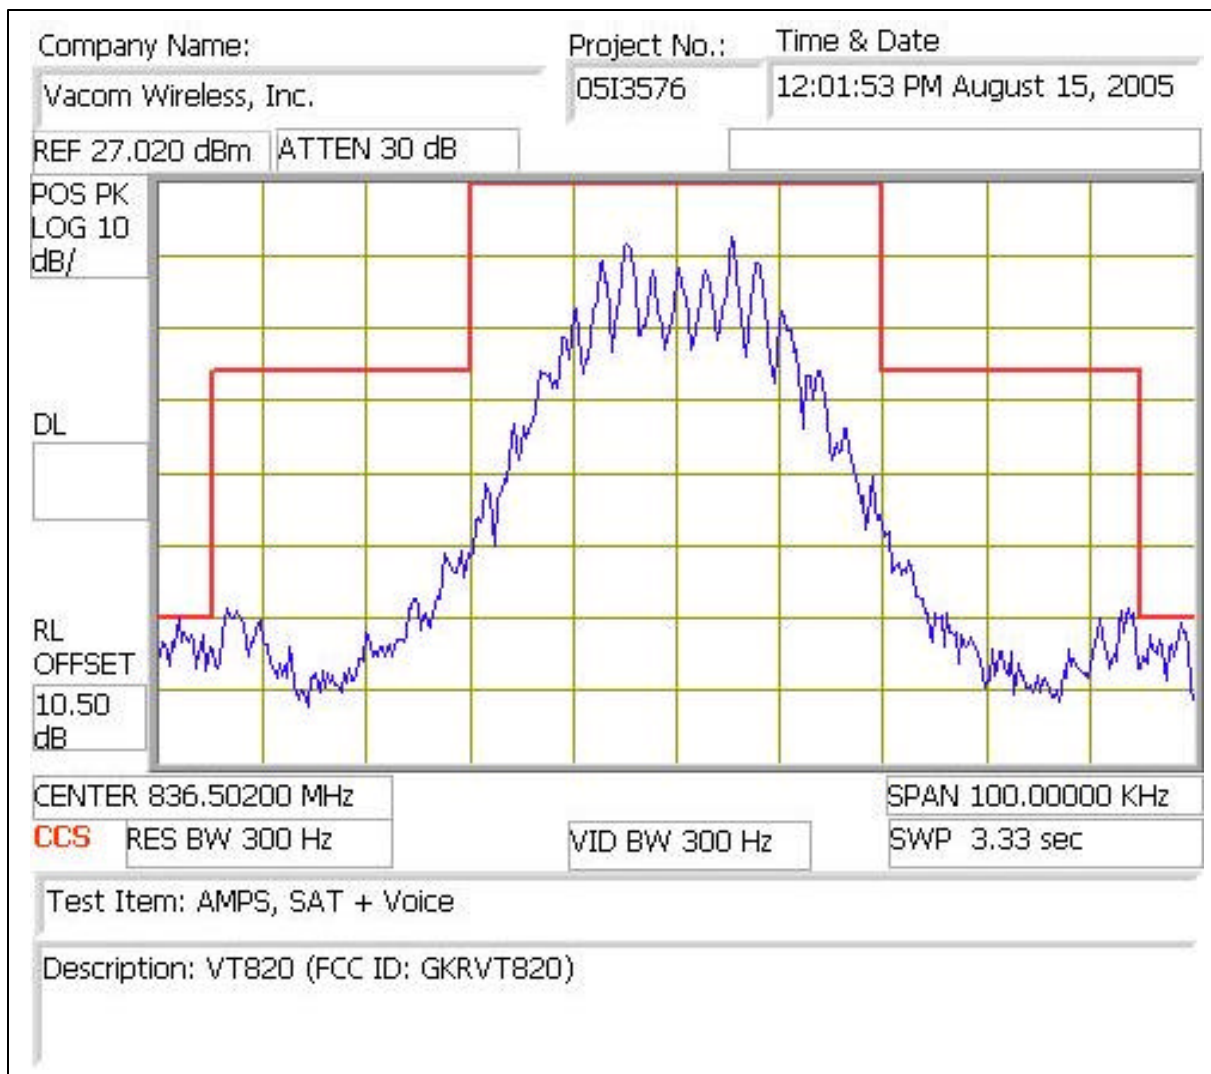

**DTMF + Supervisory Audio Tone (SAT)**

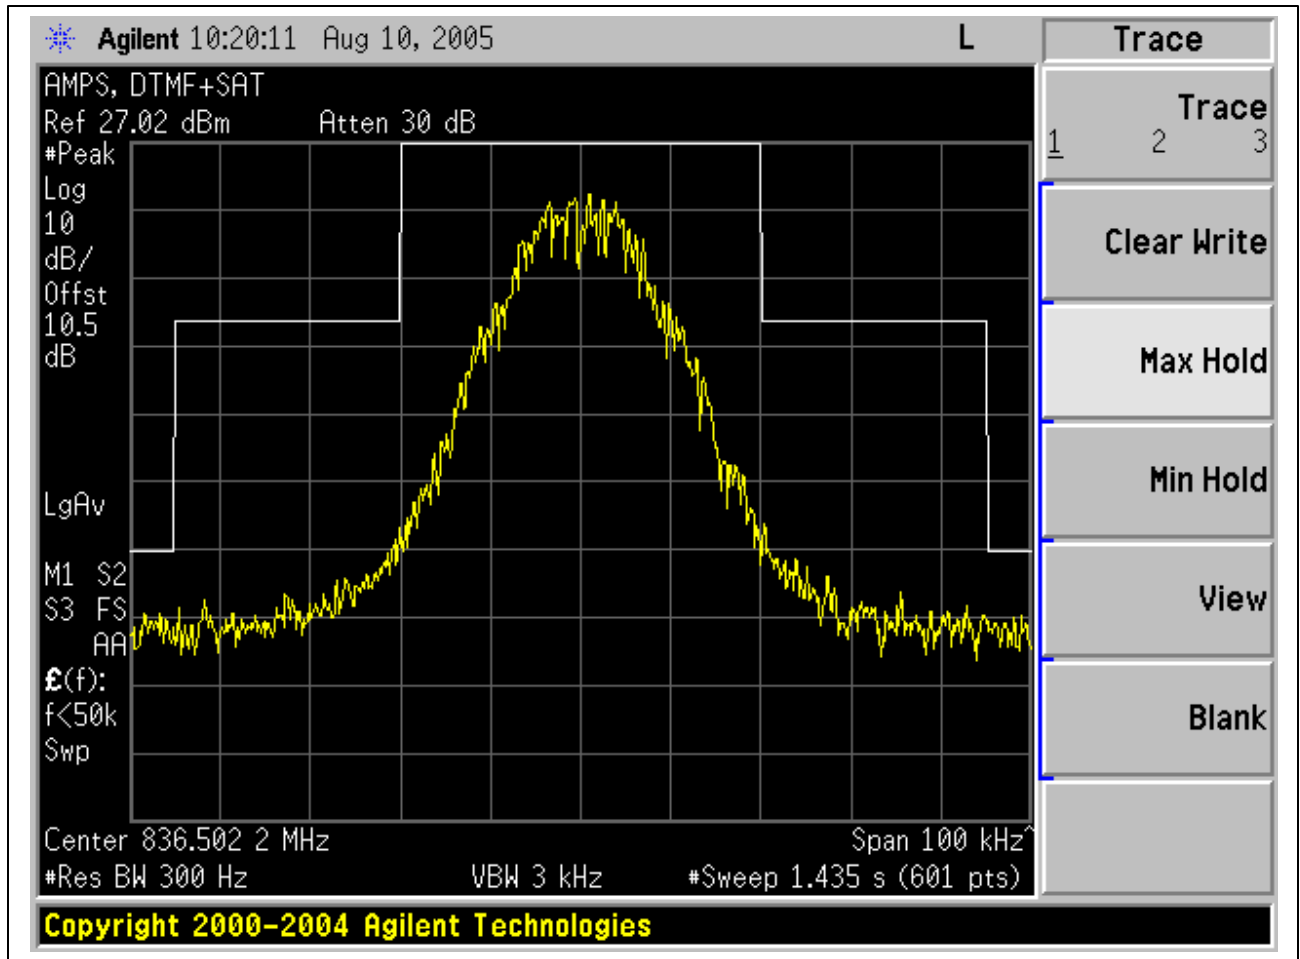

### 7.3. MODULATION CHARACTERISTICS

#### LIMIT

##### §22.915 Audio Filter Characteristics

For mobile stations, these signals must be attenuated, relative to the level at 1 kHz, as follows:

- (i) In the frequency ranges of 3.0 to 5.9 kHz and 6.1 to 15.0 kHz, signals must be attenuated by at least  $40 \log (f / 3)$  dB, where  $f$  is the frequency of the signal in kHz.
- (ii) In the frequency ranges of 5.9 to 6.1 kHz, signals must be attenuated at least 35 dB.
- (iii) In the frequency ranges above 15 kHz, signals must be attenuated at least 28 dB.


#### TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.3.1 and 2.3.2


#### RESULTS

No non-compliance noted.


**Modulation Limit:**

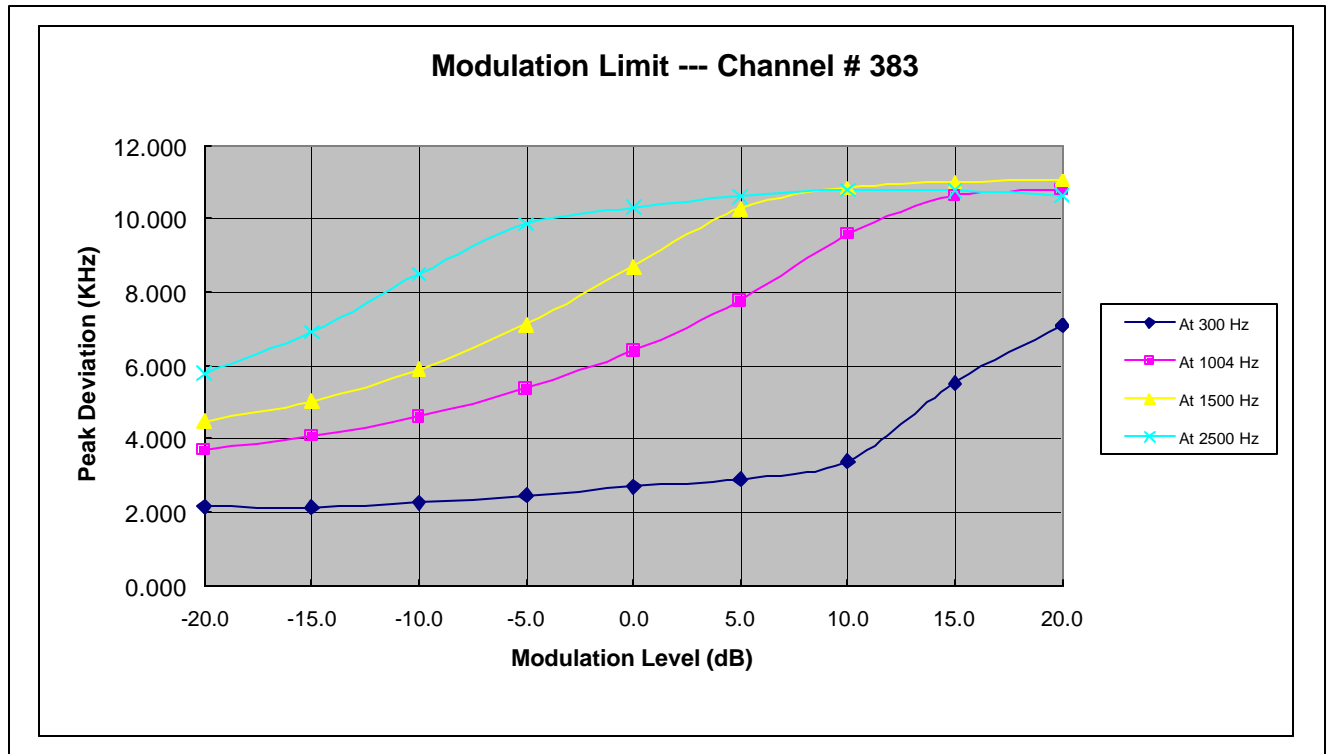

**Audio Frequency Response**

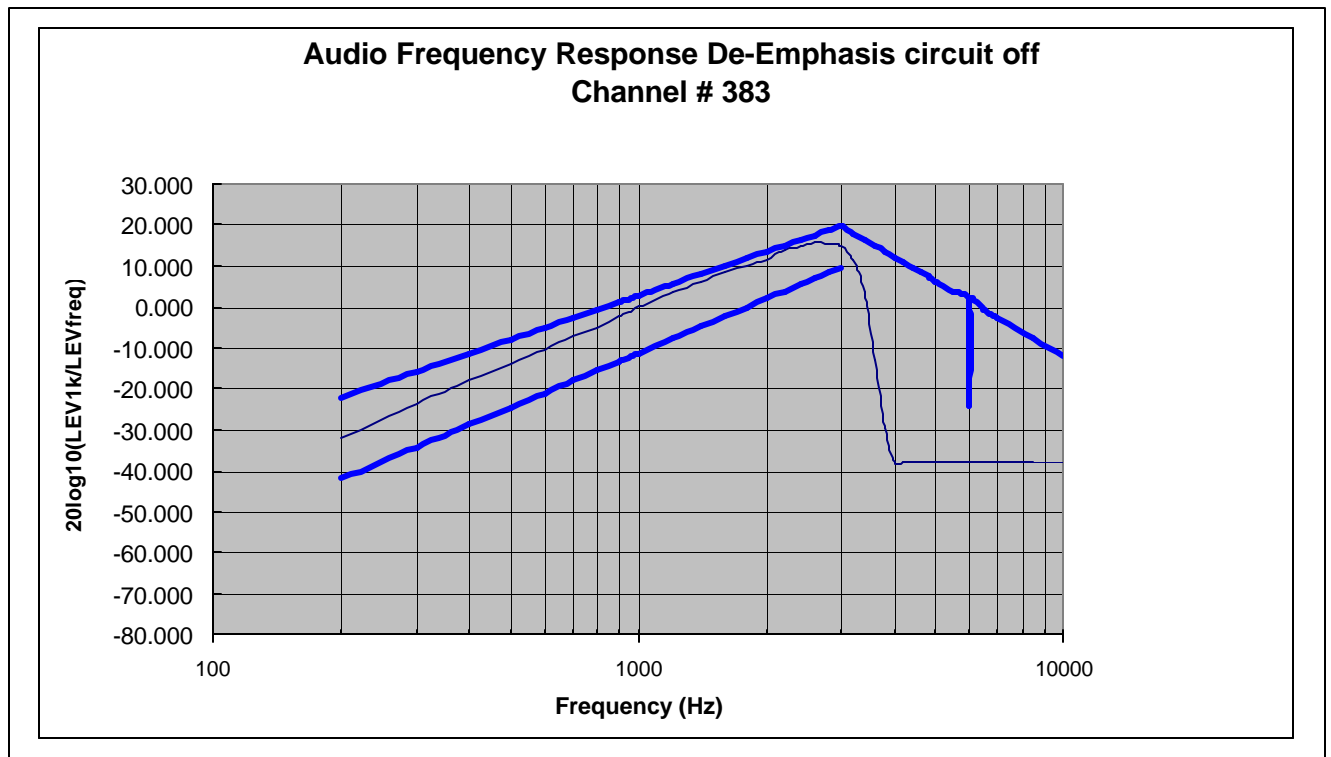

Audio low pass filter response

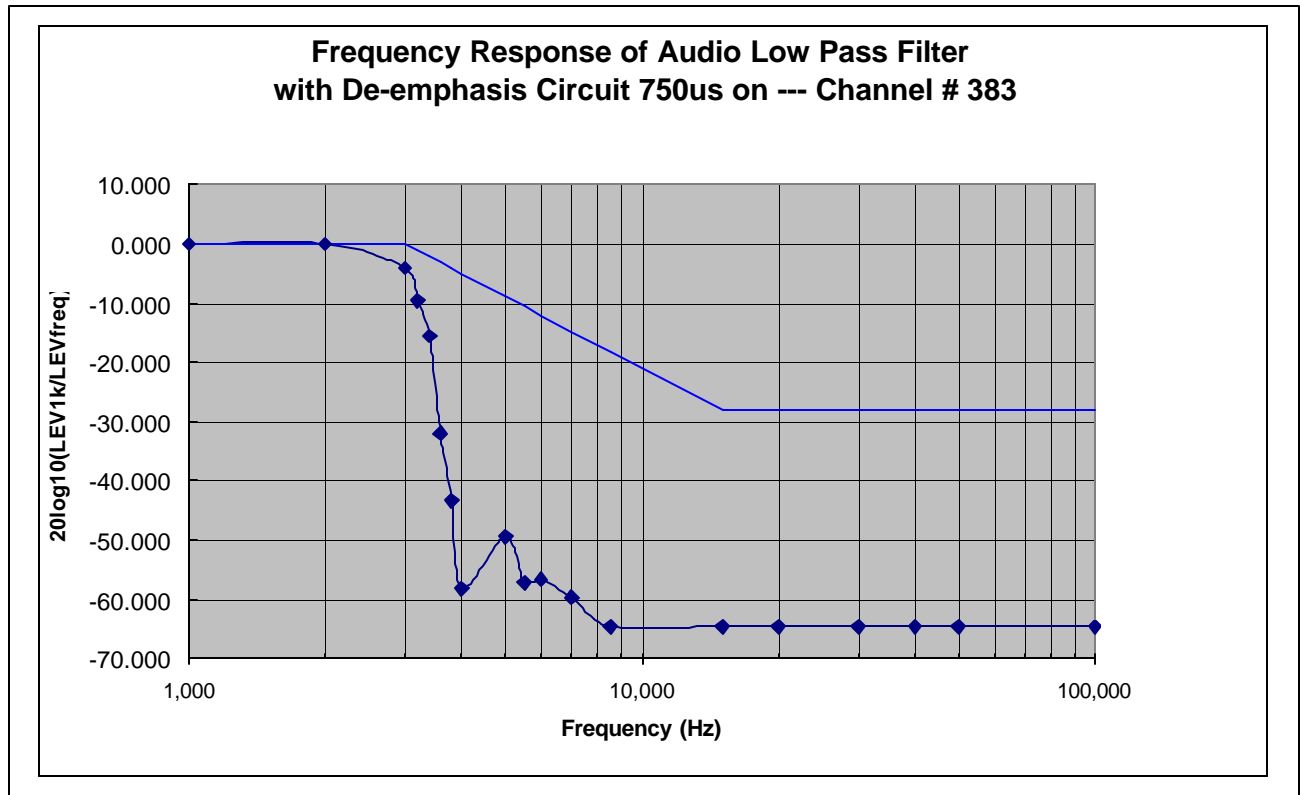

## 7.4. RF POWER OUTPUT

### LIMIT

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

### TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.2.17

### RESULTS

No non-compliance noted.



**CDMA Output Power (ERP)**

08/15/05 30 - 1000MHz Substitution Measurement  
 Compliance Certification Services, Morgan Hill 5m Chamber Site

Test Engr: William Zhuang  
 Project #: 05I3576-1  
 Company: VACOM WIRELESS, INC.  
 EUT Descr.: Dual band Tri mode PCS/AMPS/CDMA cellular Phone  
 EUT M/N: VTS20 (FCC ID: GKRVT820)  
 Test Target: FCC 22.24  
 Mode Oper: Transmit CDMA mode

Test Equipment:

Bilog Antenna	Cable	Pre-amplifier 8447D	Limit
5m Chamber Smol Bilog	5m Chamber Cable		ERP

f MHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
835.89	97.4	V	27.2	3.5	6.7	4.6	28.3	38.0	-9.7	X position
835.89	94.3	H	23.6	3.5	6.7	4.6	24.7	38.0	-13.3	X position
835.89	93.7	V	23.5	3.5	6.7	4.6	24.6	38.0	-13.4	Y position
835.89	96.0	H	25.4	3.5	6.7	4.6	26.5	38.0	-11.5	Y position
835.89	93.7	V	23.5	3.5	6.7	4.6	24.6	38.0	-13.4	Z position
835.89	90.6	H	20.0	3.5	6.7	4.6	21.1	38.0	-16.9	Z position
Worst case X position										
824.76	95.9	V	25.6	3.4	6.7	4.6	26.7	38.0	-11.3	Low Ch.
824.76	93.2	H	22.4	3.4	6.7	4.6	23.5	38.0	-14.5	Low Ch.
835.89	97.4	V	27.2	3.5	6.7	4.6	28.3	38.0	-9.7	Mid Ch.
835.89	94.3	H	23.6	3.5	6.7	4.6	24.7	38.0	-13.3	Mid Ch.
848.25	94.7	V	24.6	3.5	6.7	4.6	25.7	38.0	-12.3	High Ch.
848.25	91.7	H	21.2	3.5	6.7	4.6	22.2	38.0	-15.8	High Ch.

**AMPS Output Power (ERP)**

Compliance Certification Services, Morgan Hill 5m Chamber Site

Test Engr: William Zhuang  
 Project #: 05I3576-1  
 Company: VACOM WIRELESS, INC.  
 EUT Descrip.: Dual band Tri mode PCS/AMPS/CDMA cellular Phone  
 EUT M/N: VTS20 (FCC ID: GKRVT820)  
 Test Target: FCC 22/24  
 Mode Oper: Transmit AMPS mode

Test Equipment:

<b>Bilog Antenna</b>	<b>Cable</b>	<b>Pre-amplifier 8447D</b>	<b>Limit</b>
5m Chamber Sunol Bilog	5m Chamber Cable		ERP

f MHz	SA reading (dBuV/m)	Ant. Pol (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
836.49	94.0	V	23.8	3.5	6.7	4.6	24.9	38.0	-13.1	X position
836.49	91.7	H	21.0	3.5	6.7	4.6	22.1	38.0	-15.9	X position
836.49	89.0	V	18.8	3.5	6.7	4.6	19.9	38.0	-18.1	Y position
836.49	94.5	H	23.8	3.5	6.7	4.6	24.9	38.0	-13.1	Y position
836.49	90.8	V	20.6	3.5	6.7	4.6	21.7	38.0	-16.3	Z position
836.49	84.9	H	14.3	3.5	6.7	4.6	15.3	38.0	-22.7	Z position
Worst case X position										
824.04	92.2	V	21.9	3.4	6.7	4.6	23.0	38.0	-15.0	Low Ch.
824.04	92.5	H	21.7	3.4	6.7	4.6	22.8	38.0	-15.2	Low Ch.
836.49	94.0	V	23.8	3.5	6.7	4.6	24.9	38.0	-13.1	Mid Ch.
836.49	91.7	H	21.0	3.5	6.7	4.6	22.1	38.0	-15.9	Mid Ch.
848.97	91.4	V	21.4	3.5	6.7	4.6	22.5	38.0	-15.5	High Ch.
848.97	92.4	H	21.9	3.5	6.7	4.6	23.0	38.0	-15.0	High Ch.

**PCS Output Power (EIRP)**

08/12/05 High Frequency Substitution Measurement  
 Compliance Certification Services, Morgan Hill 5m Chamber Site

Test Engr: William Zhuang  
 Project #: 05I3576-1  
 Company: VACOM WIRELESS, INC.  
 EUT Descr.: Dual band Tri mode PCS/AMPS/CDMA cellular Phone  
 EUT M/N: VT820 (FCC ID: GKRVT820)  
 Test Target: FCC 22/24  
 Mode Oper: Transmit PCS mode

Test Equipment:

EMCO Horn 1-18GHz      Horn > 18GHz      Limit      High Pass Filter  
 T73; S/N: 6717 @3m      FCC 24

Hi Frequency Cables  
 (2 ft)     (2~3 ft)     (4~6 ft)     (12 ft)

Pre-amplifier 1-26GHz      Pre-amplifier 26-40GHz

f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
1.880	88.0	V	19.8	1.4	7.9	5.7	26.3	38.0	-11.7	X position
1.880	88.9	H	21.4	1.4	7.9	5.7	27.9	38.0	-10.1	X position
1.880	85.5	H	17.9	1.4	7.9	5.7	24.4	38.0	-13.6	Y position
1.880	88.1	V	19.8	1.4	7.9	5.7	26.3	38.0	-11.7	Y position
1.880	89.9	V	21.6	1.4	7.9	5.7	28.2	38.0	-9.8	Z position
1.880	83.1	H	15.5	1.4	7.9	5.7	22.0	38.0	-16.0	Z position
<b>Worst case X position</b>										
1.851	90.6	H	22.9	1.4	7.8	5.7	29.4	38.0	-8.6	Low Ch.
1.851	87.7	V	19.3	1.4	7.8	5.7	25.8	38.0	-12.2	Low Ch.
1.880	88.0	V	19.8	1.4	7.9	5.7	26.3	38.0	-11.7	Mid Ch.
1.880	88.9	H	21.4	1.4	7.9	5.7	27.9	38.0	-10.1	Mid Ch.
1.909	86.6	V	18.5	1.4	7.9	5.8	25.1	38.0	-12.9	High Ch.
1.909	88.6	H	21.3	1.4	7.9	5.8	27.8	38.0	-10.2	High Ch.

## 7.5. FREQUENCY STABILITY

### LIMIT

§22.355 Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is +/- 2.5 ppm.

§24.235 The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.3.1 and 2.3.2

### RESULTS

No non-compliance noted.

Reference Frequency: AMPS Mid Channel 836.490000MHz @ 25°C				
Limit: to stay ± 2.5 ppm = 2091.255 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.50219	-0.285	± 2.5
3.80	40	836.50208	-0.149	± 2.5
3.80	30	836.50199	-0.045	± 2.5
<b>3.80</b>	<b>25</b>	<b>836.50195</b>	<b>0</b>	<b>± 2.5</b>
3.80	20	836.50194	0.014	± 2.5
3.80	10	836.50194	0.014	± 2.5
3.80	0	836.50193	0.029	± 2.5
3.80	-10	836.50190	0.066	± 2.5
3.80	-20	836.50184	0.134	± 2.5
3.80	-30	836.50149	0.552	± 2.5
3.08 (end point)	25	836.50179	0.194	± 2.5
3.23	25	836.50190	0.060	± 2.5
4.37	25	836.50195	0.000	± 2.5
Reference Frequency: CDMA Mid Channel 835.890000MHz @ 25°C				
Limit: to stay ± 2.5 ppm = 2091.434 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.57392	-0.383	± 2.5
3.80	40	836.57377	-0.203	± 2.5
3.80	30	836.57368	-0.086	± 2.5
<b>3.80</b>	<b>25</b>	<b>836.57360</b>	<b>0</b>	<b>± 2.5</b>
3.80	20	836.57354	0.073	± 2.5
3.80	10	836.57327	0.400	± 2.5
3.80	0	836.57314	0.551	± 2.5
3.80	-10	836.57278	0.984	± 2.5
3.80	-20	836.57253	1.281	± 2.5
3.80	-30	836.57247	1.357	± 2.5
2.97 (end point)	25	836.57569	-2.489	± 2.5
3.23	25	836.57541	-2.160	± 2.5
4.37	25	836.57336	0.294	± 2.5

Reference Frequency: PCS Mid Channel 1880.000000MHz @ 25°C				
Limit: to stay ± 2.5 ppm = 4701.715 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1880.68632	-0.234	± 2.5
3.80	40	1880.68621	-0.175	± 2.5
3.80	30	1880.68599	-0.056	± 2.5
<b>3.80</b>	<b>25</b>	<b>1880.68588</b>	<b>0</b>	<b>± 2.5</b>
3.80	20	1880.68556	0.168	± 2.5
3.80	10	1880.68524	0.340	± 2.5
3.80	0	1880.68513	0.399	± 2.5
3.80	-10	1880.68496	0.491	± 2.5
3.80	-20	1880.68478	0.584	± 2.5
3.80	-30	1880.68469	0.633	± 2.5
2.95 (end point)	25	1880.69043	-2.419	± 2.5
3.23	25	1880.68902	-1.671	± 2.5
4.37	25	1880.68546	0.221	± 2.5

## 7.6. SPURIOUS EMISSION AT ANTENNA TERMINAL

### LIMIT

§22.917 (e) and §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### TEST PROCEDURE


ANSI / TIA / EIA 603 Clause 3.2.13 & FCC 22.917 (h) and FCC 24.238 (b)

### RESULTS

No non-compliance noted.


**AMPS MODULATION RESULTS**

**AMPS Modulation: Low Channel, Out-Of-Band Emissions**

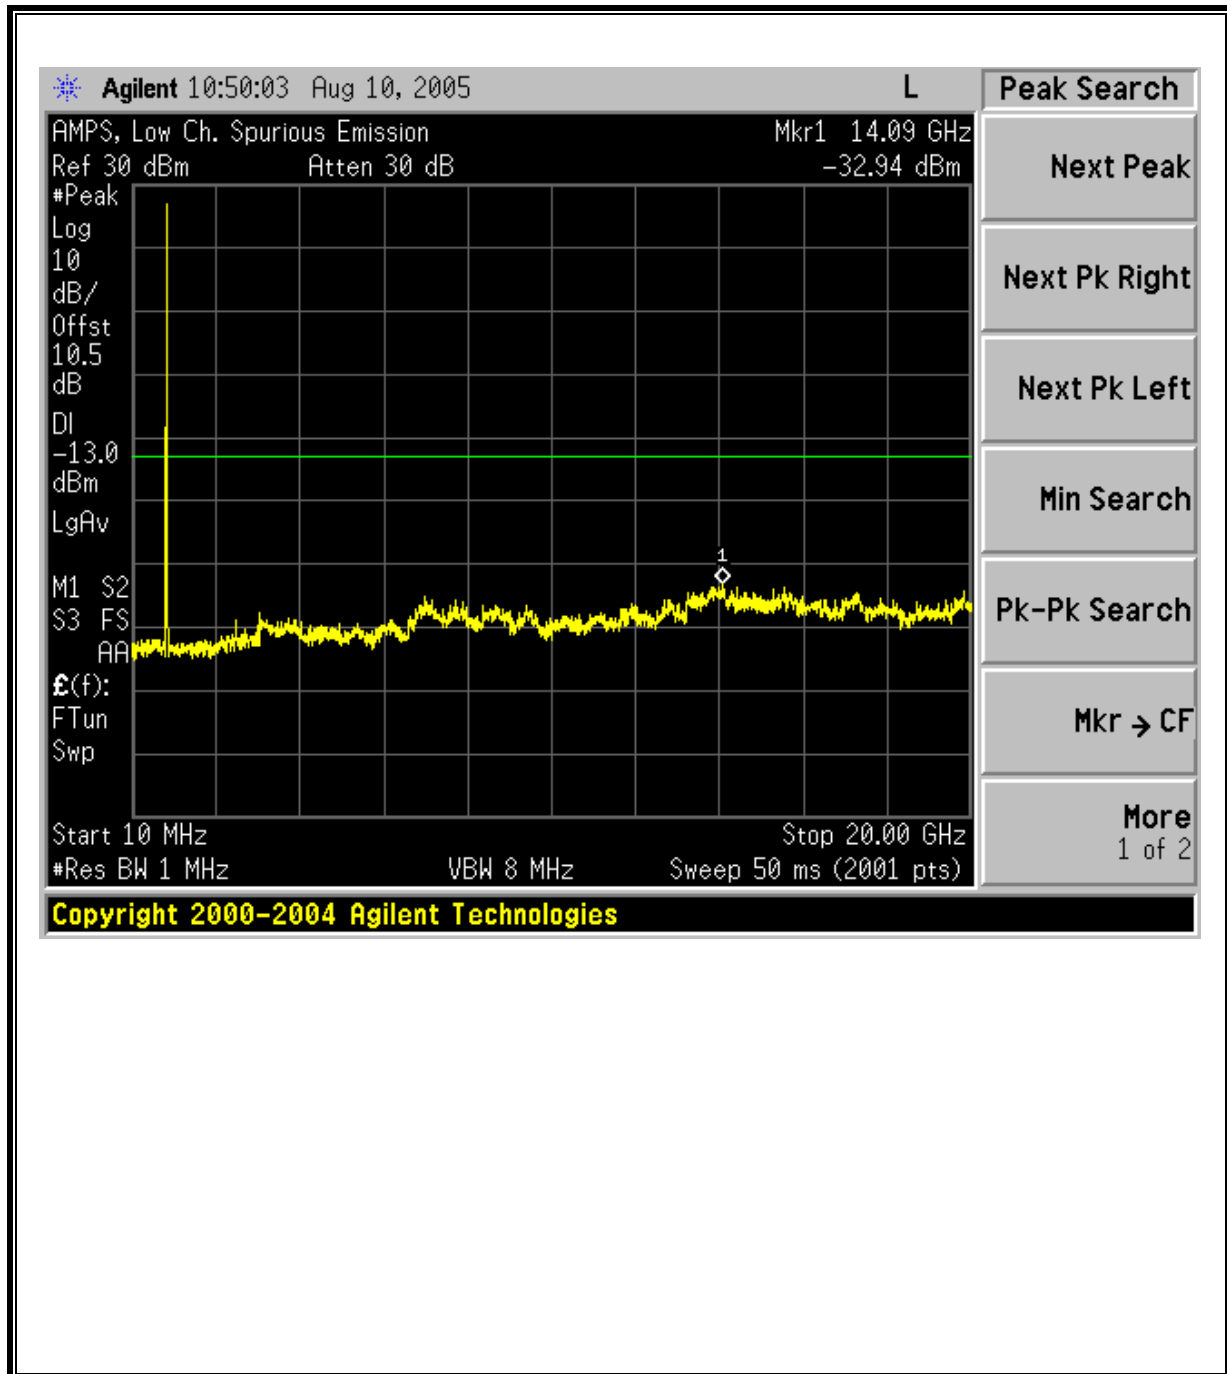




**AMPS Modulation: Mid Channel, Out-Of-Band Emissions**

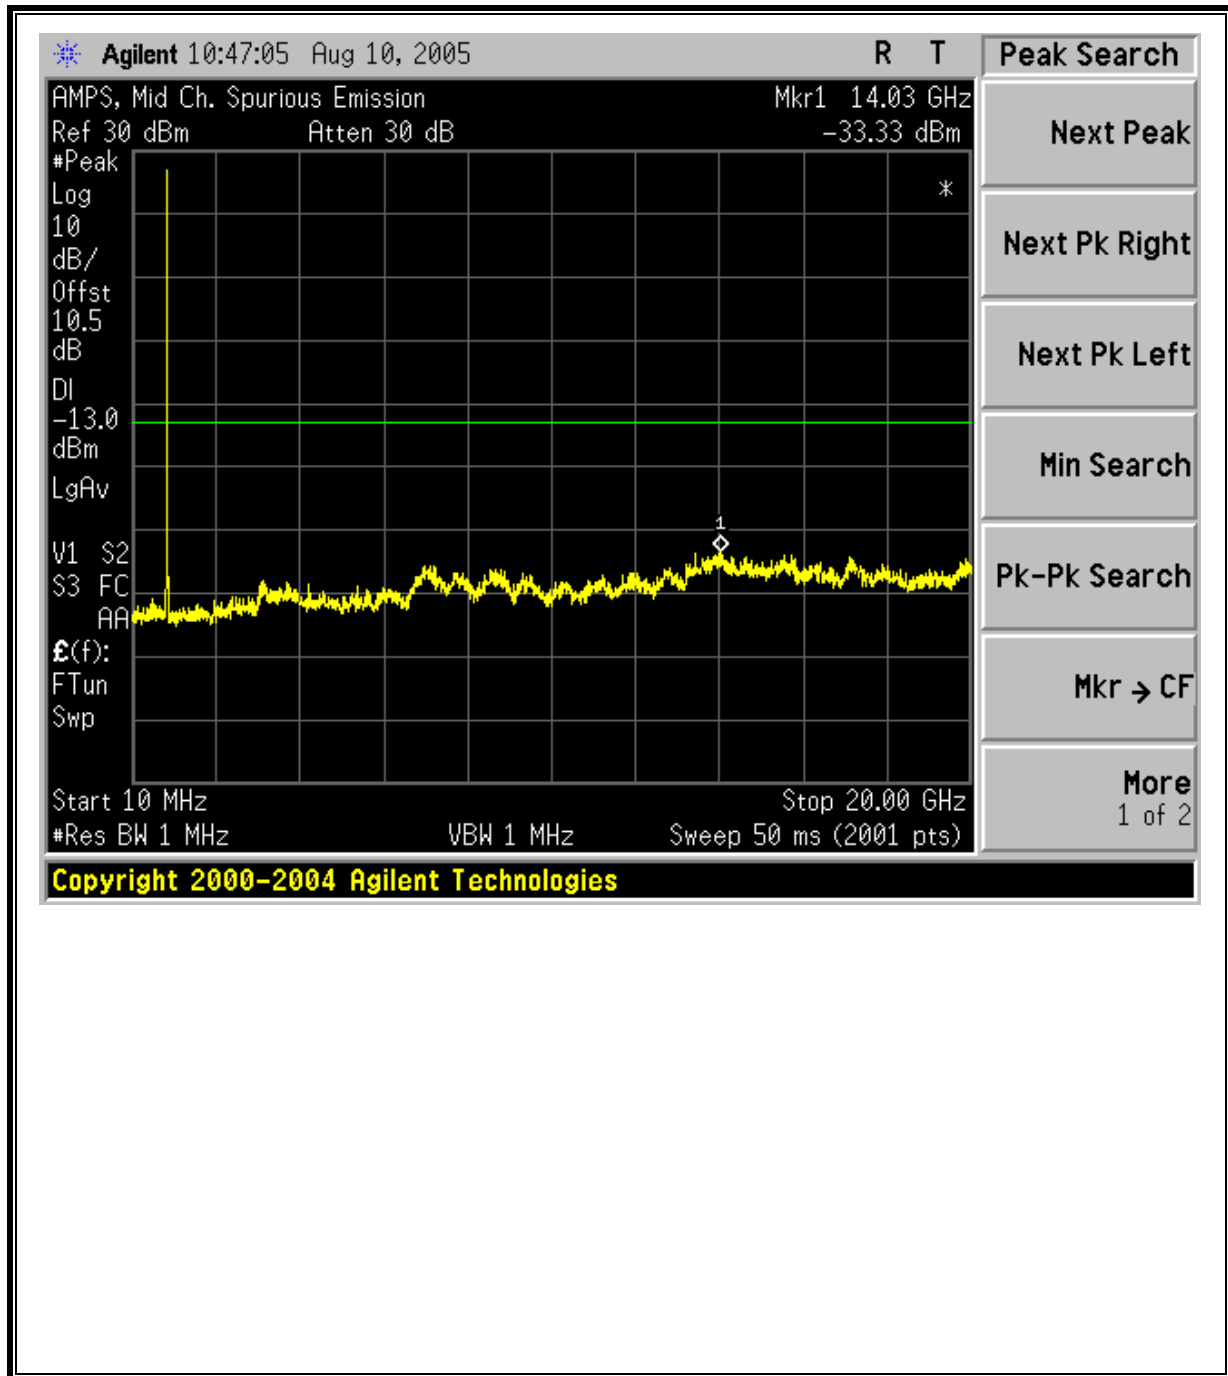


**AMPS Modulation: High Channel, Out-Of-Band Emissions**

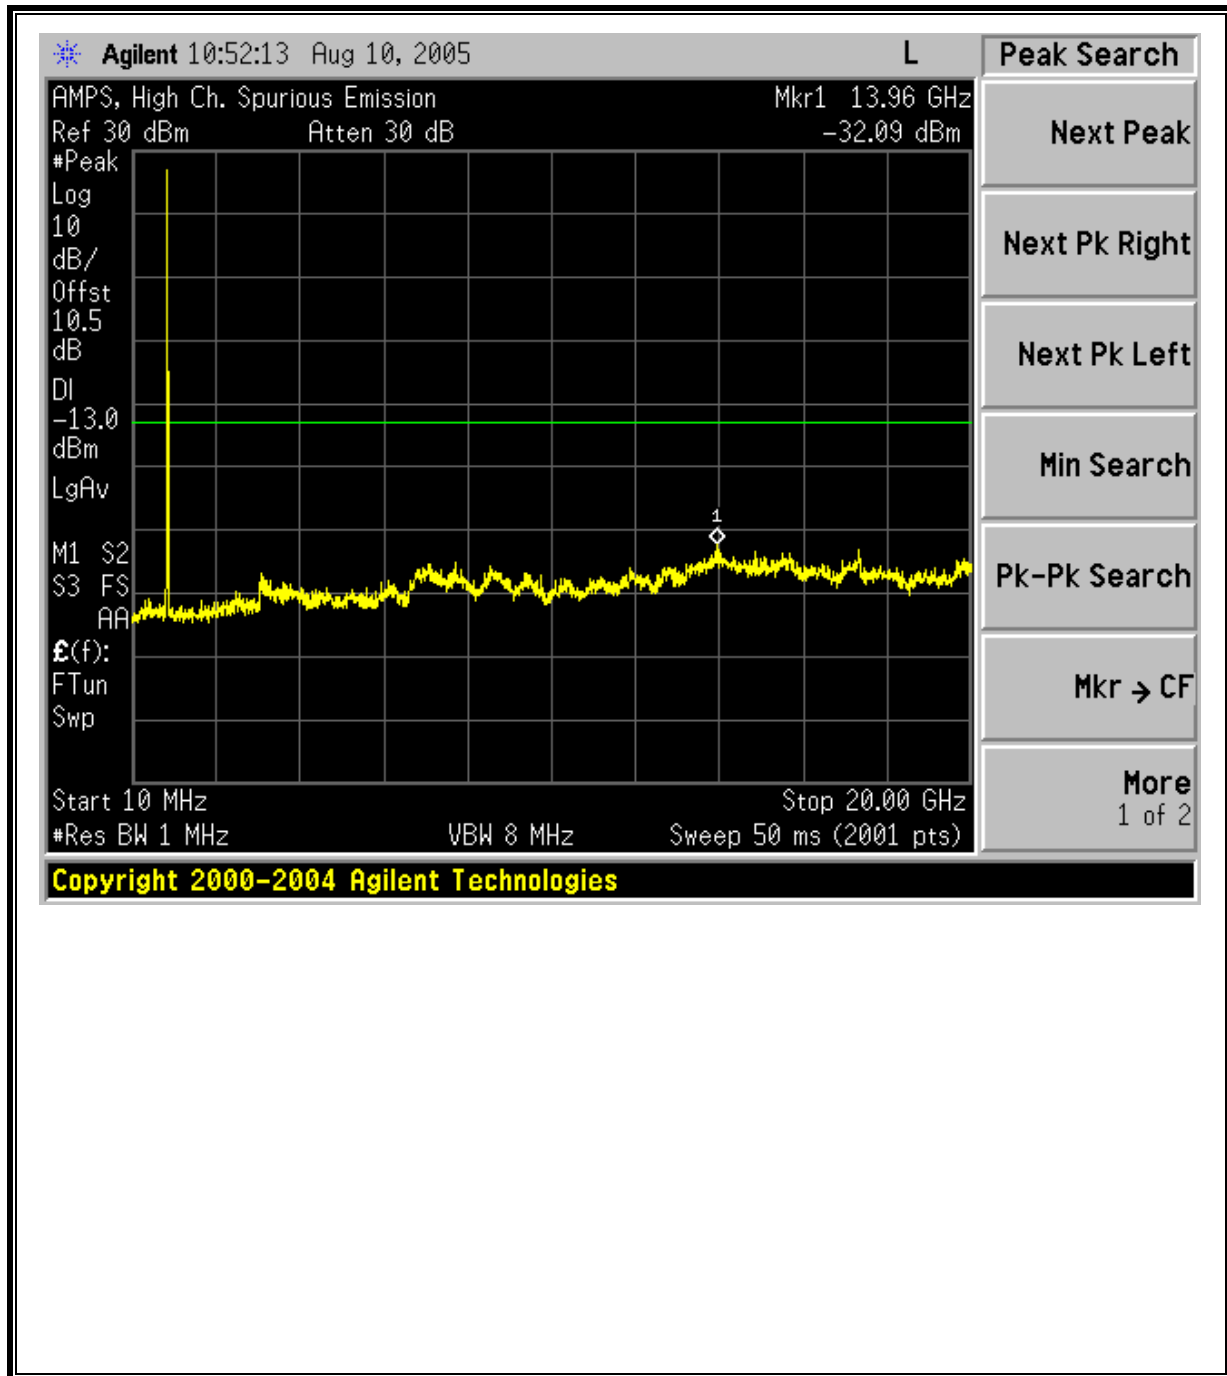


**AMPS Modulation: Low Channel Band Edge**



**AMPS Modulation: High Channel Band Edge**

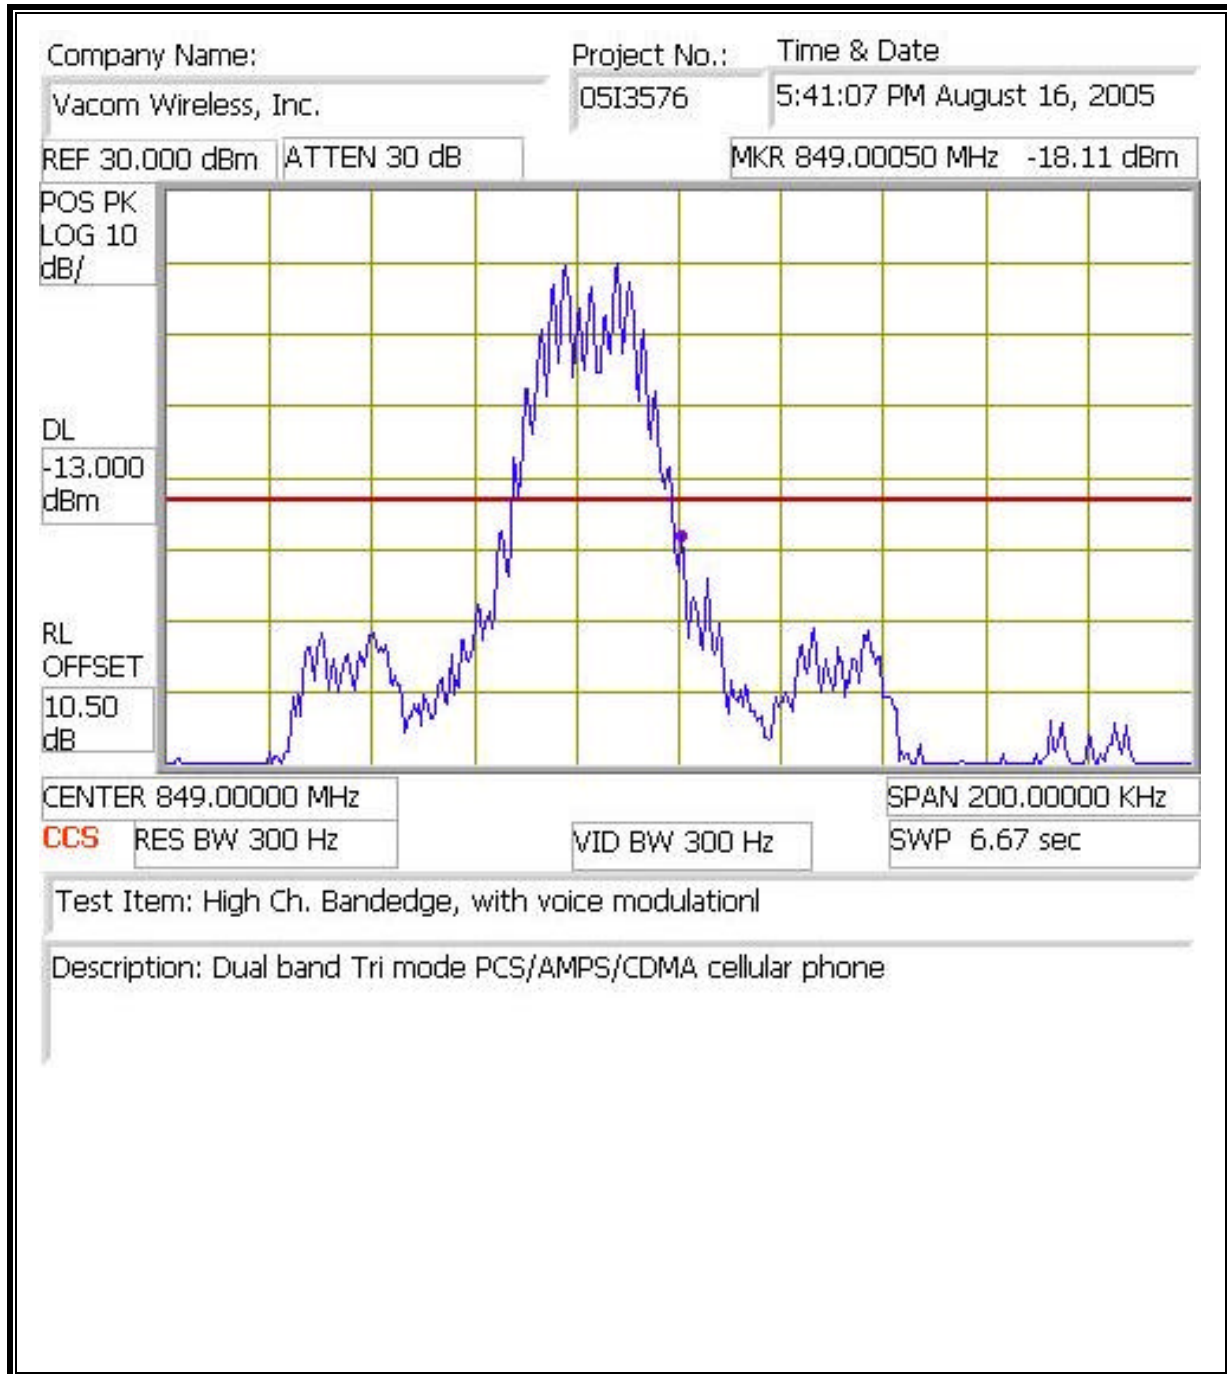


**AMPS Mobile Emissions in Base Frequency Range**

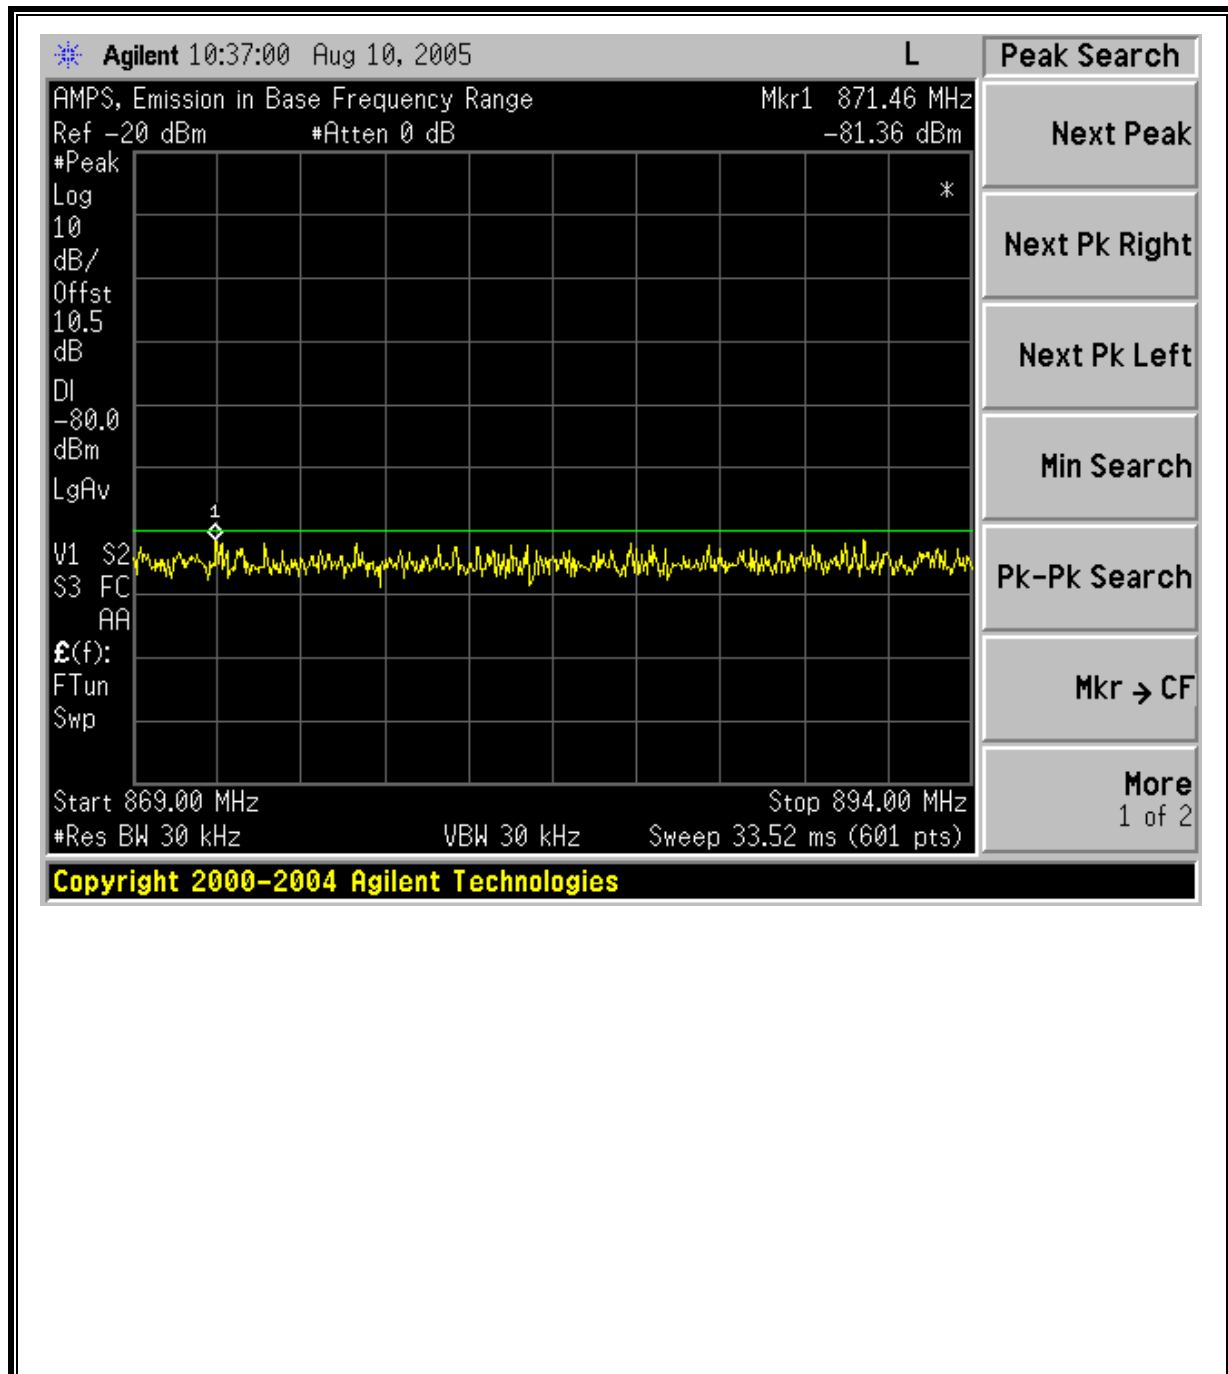


**CDMA MODULATION RESULTS**


**CDMA Modulation: Low Channel Out-Of-Band Emissions**

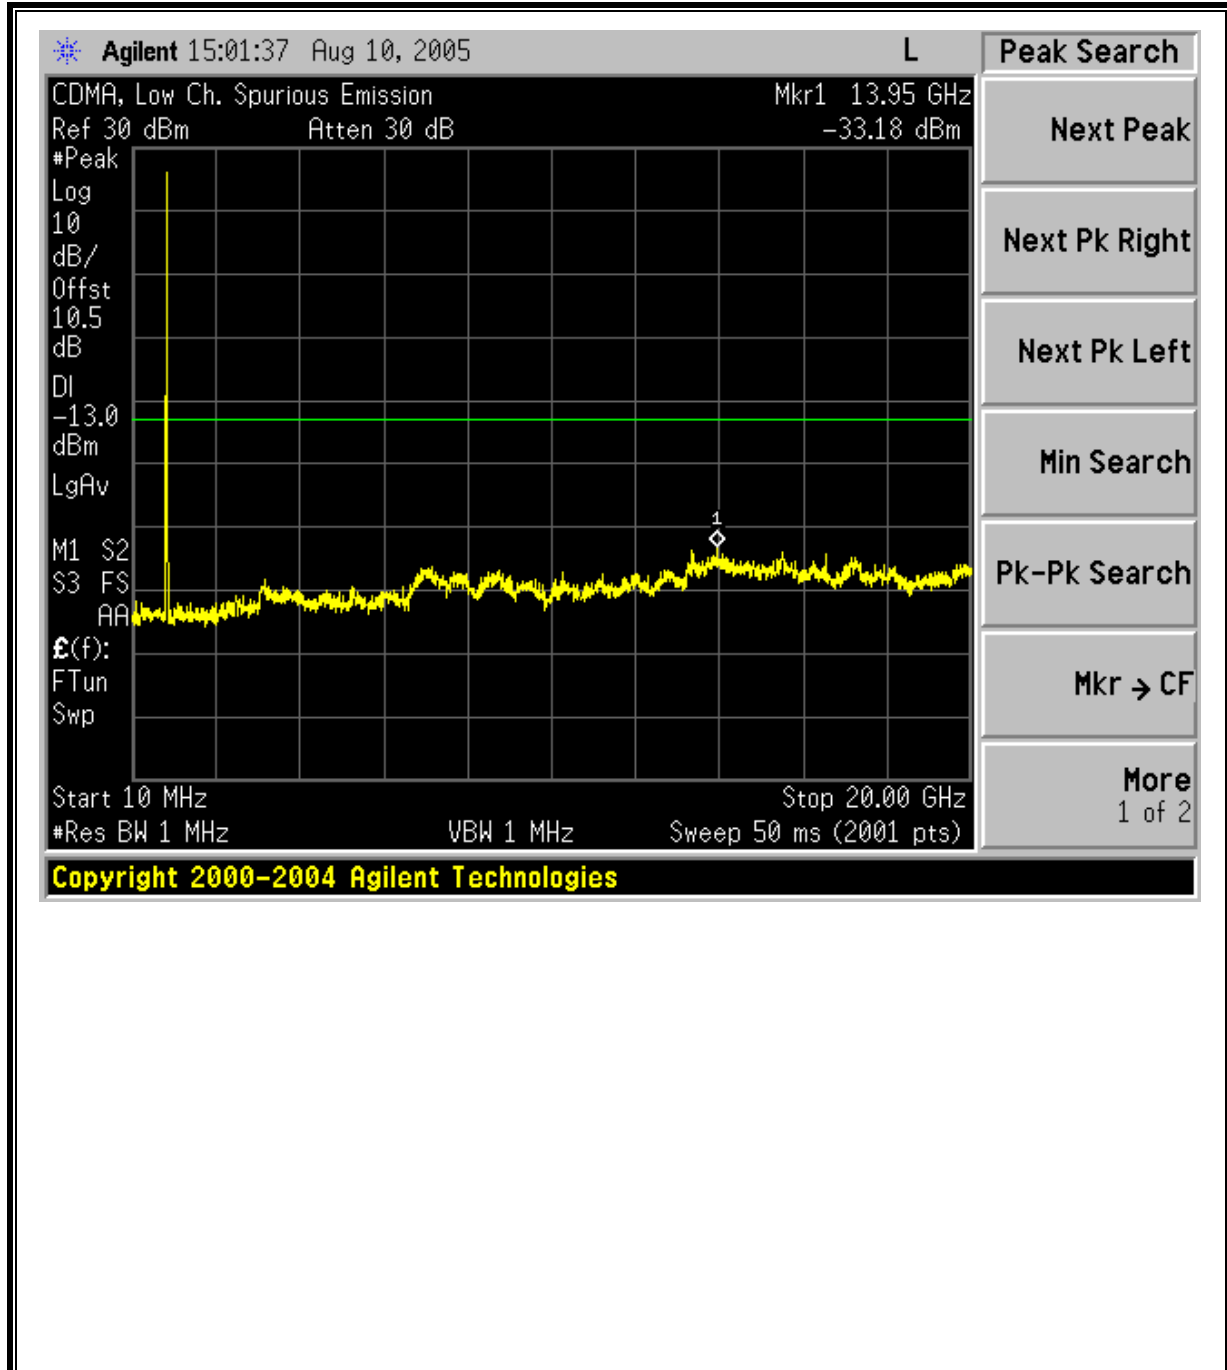

**CDMA Modulation: Mid Channel Out-Of-Band Emissions**

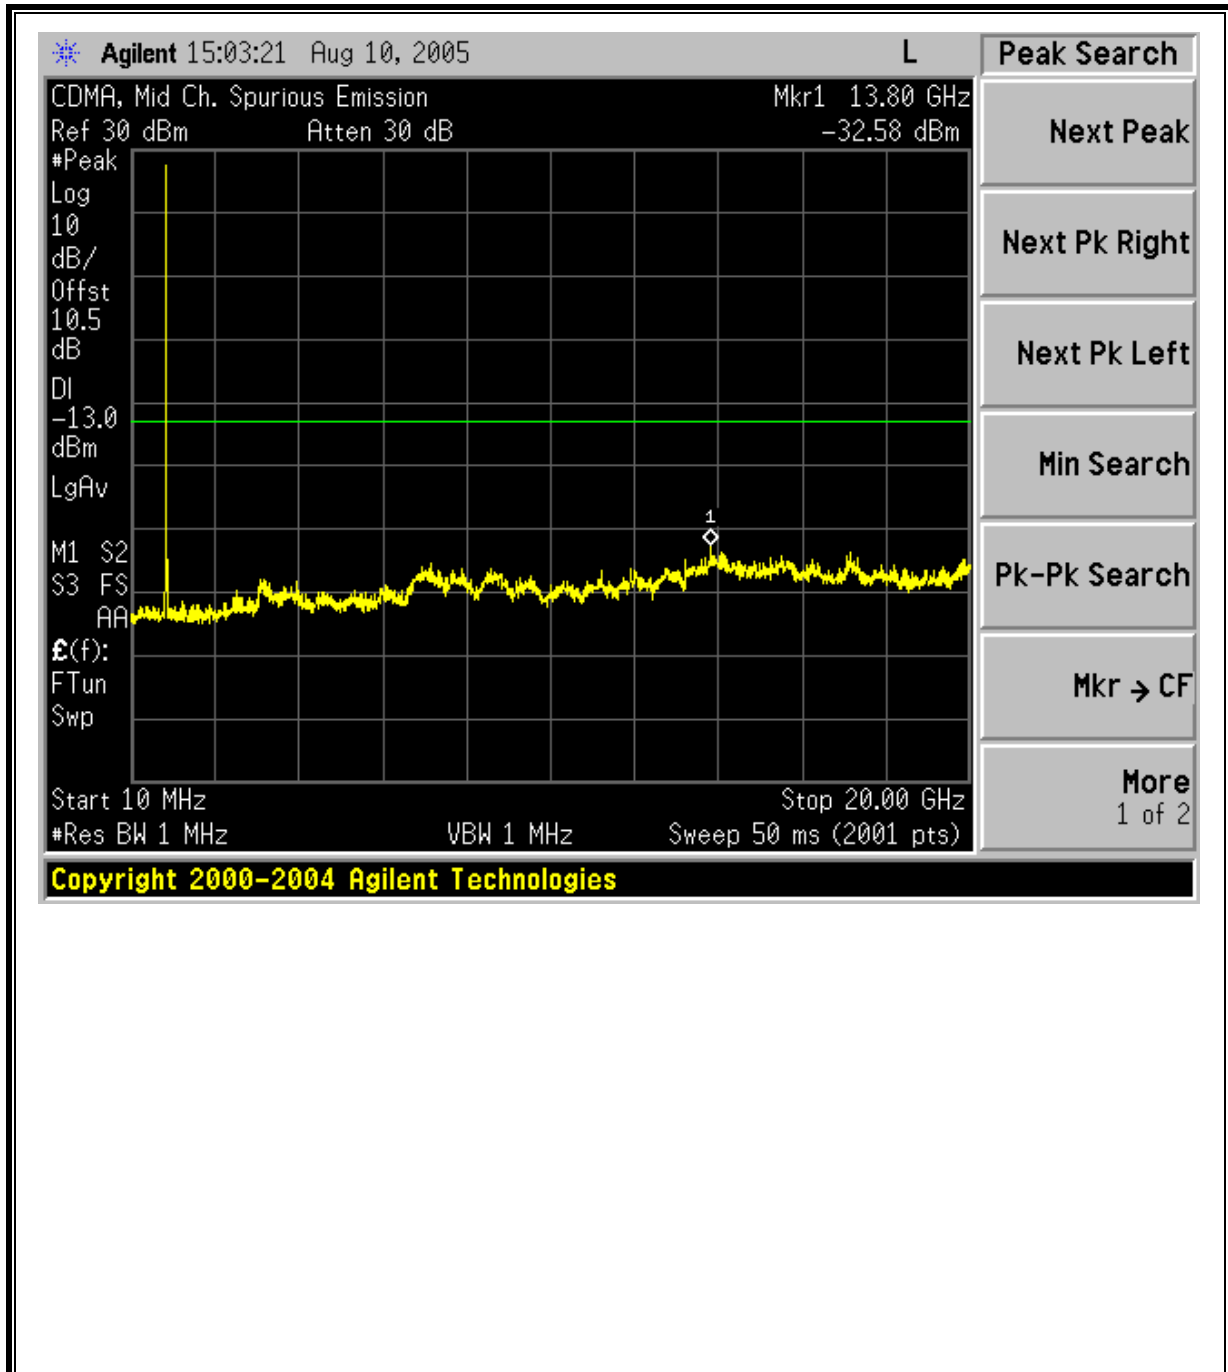


**CDMA Modulation: High Channel Out-Of-Band Emissions**

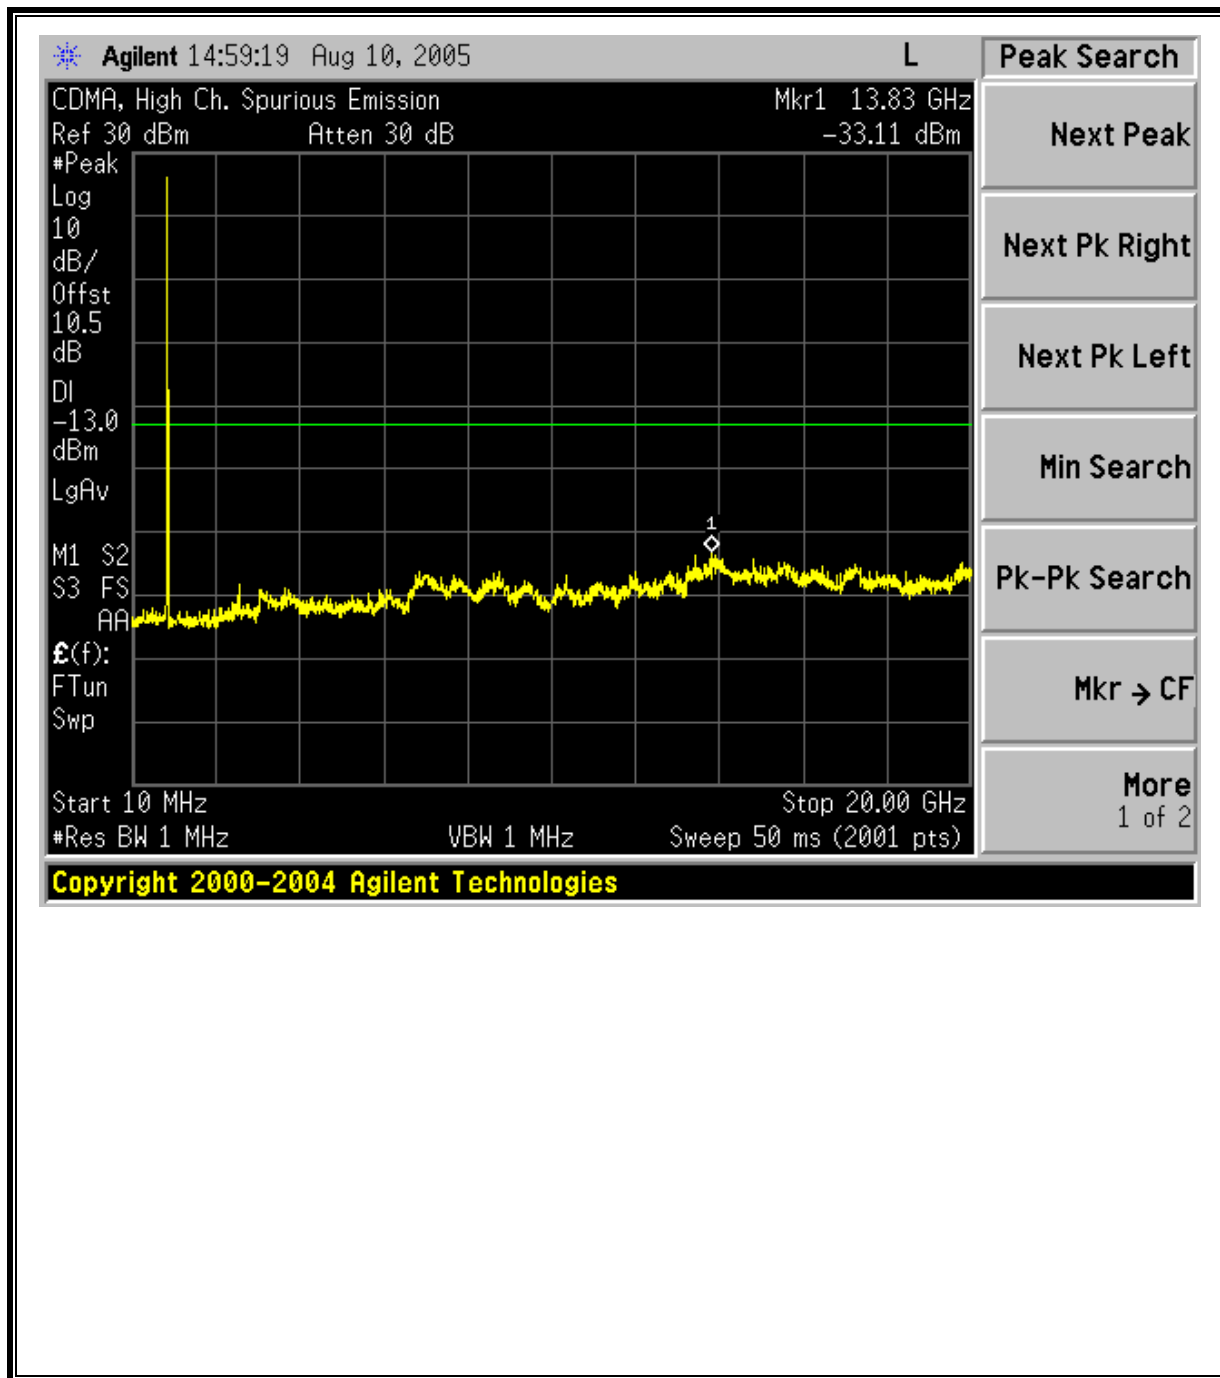





**CDMA Modulation: Low Channel Band Edge**

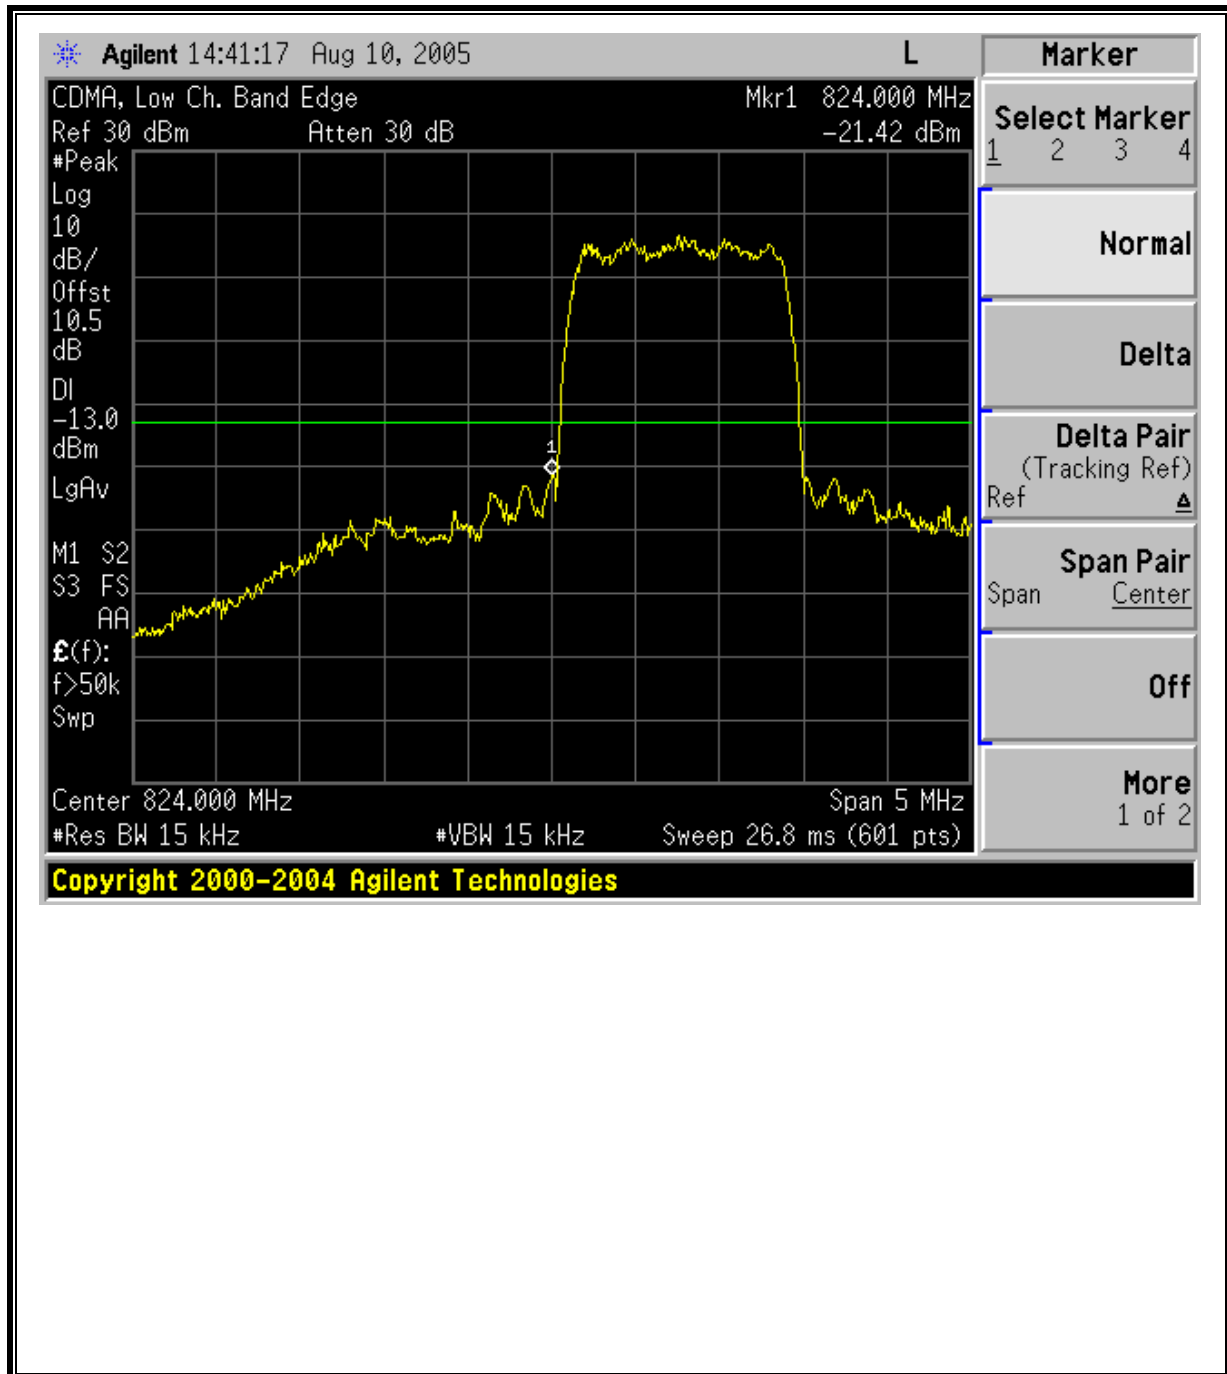

**CDMA Modulation: High Channel Band Edge**

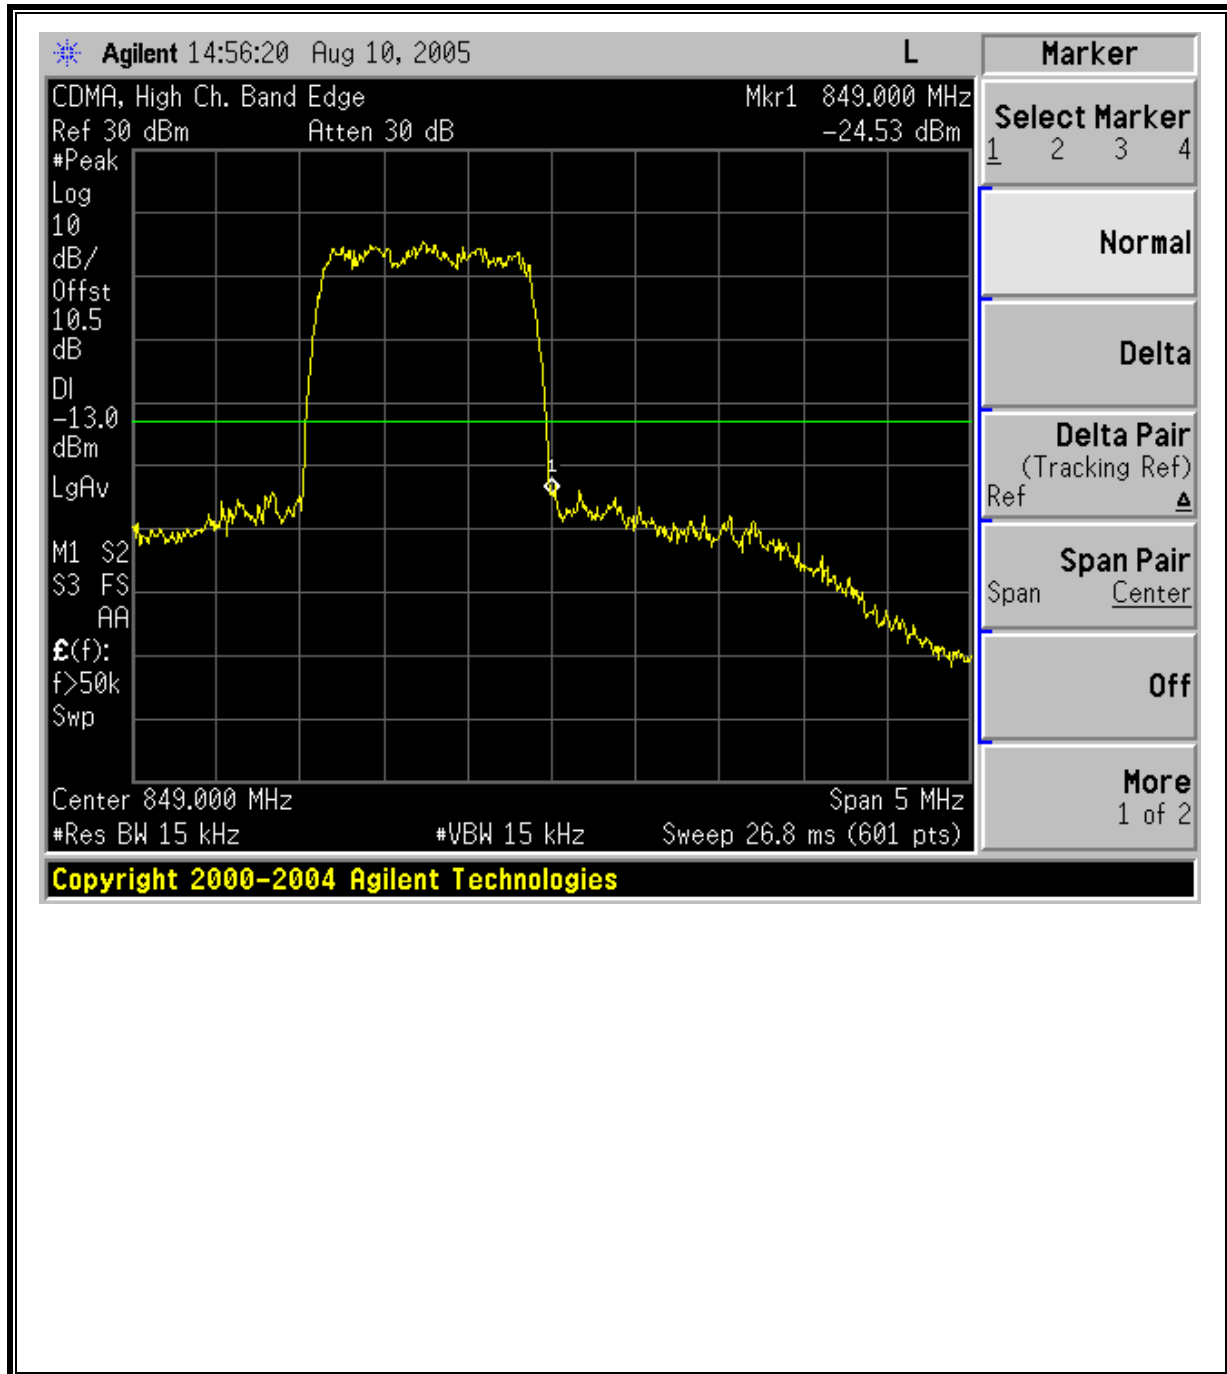


**CDMA Mobile Emissions in Base Frequency Range**

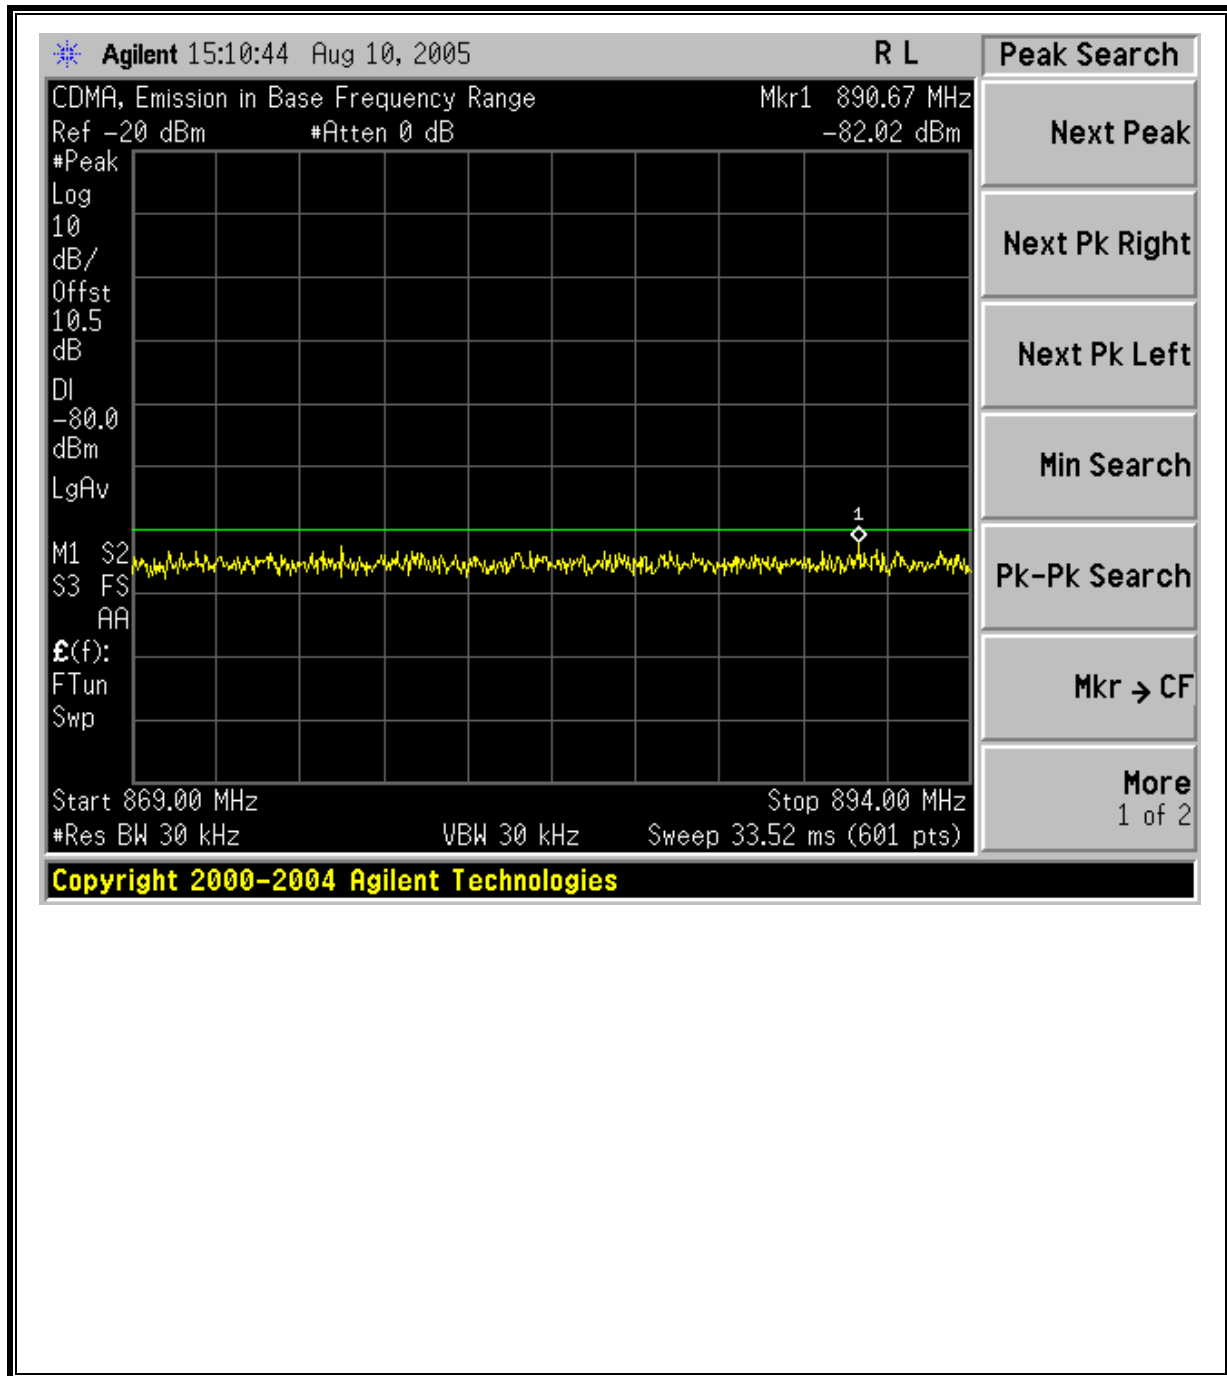


**PCS MODULATION RESULTS**


**Low Channel, Out-Of-Band Emissions**

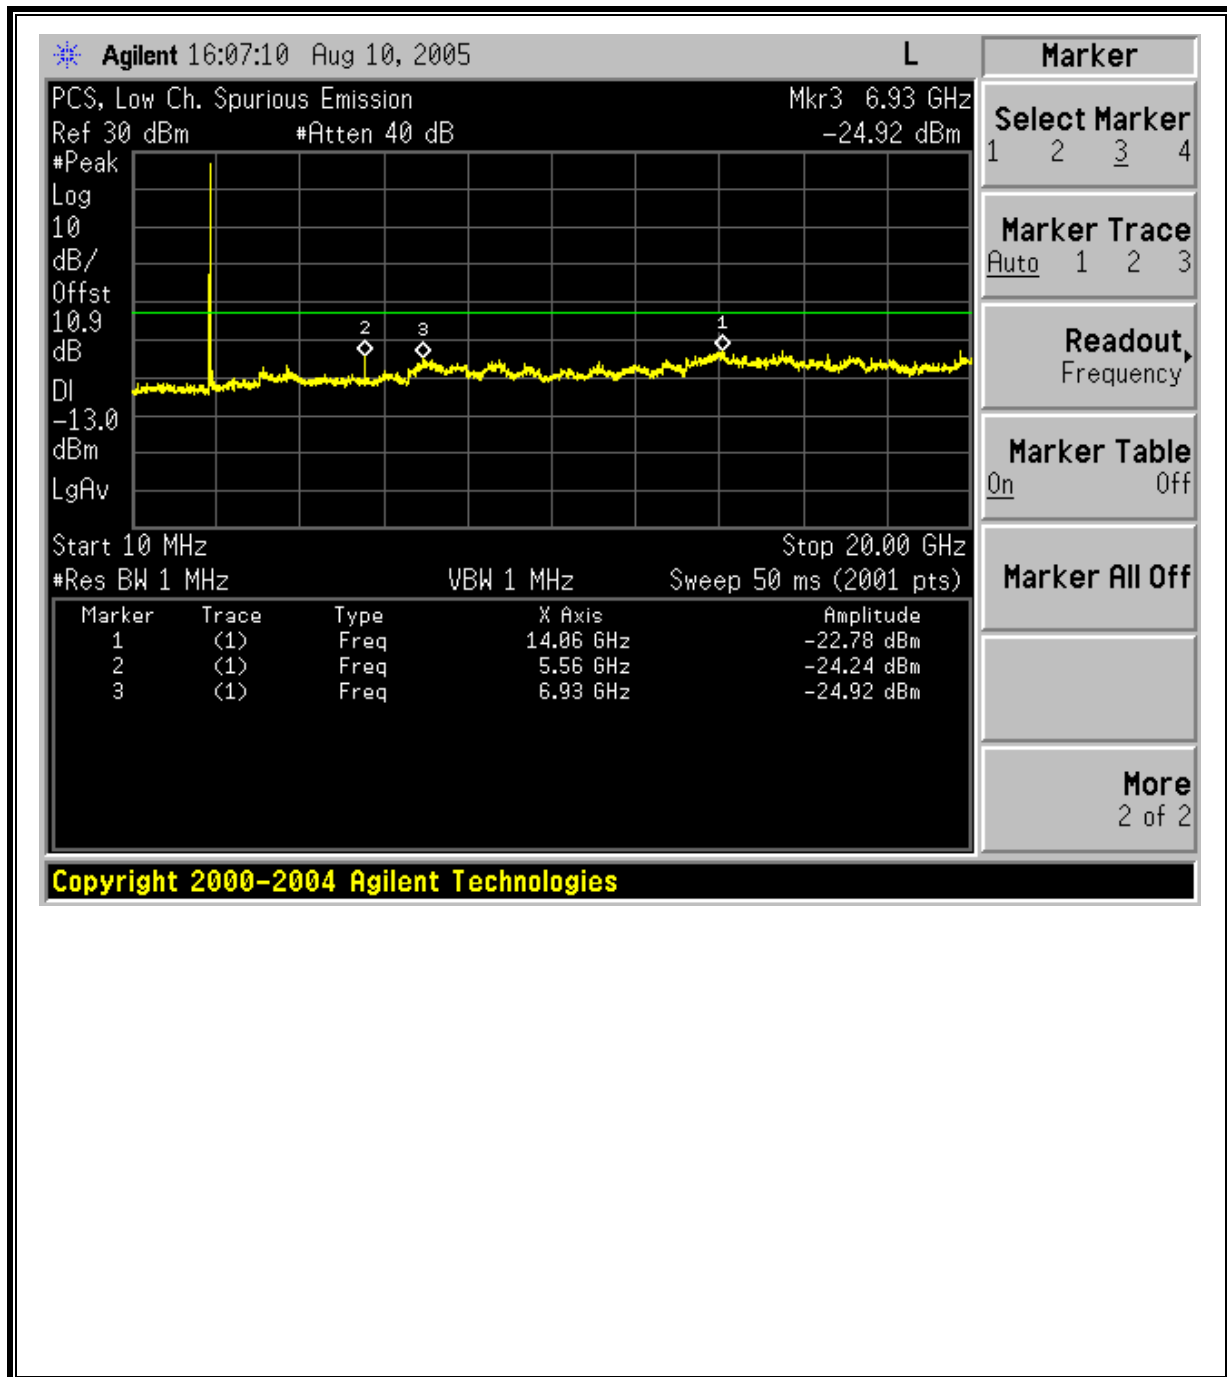


**Mid Channel, Out-Of-Band Emissions**

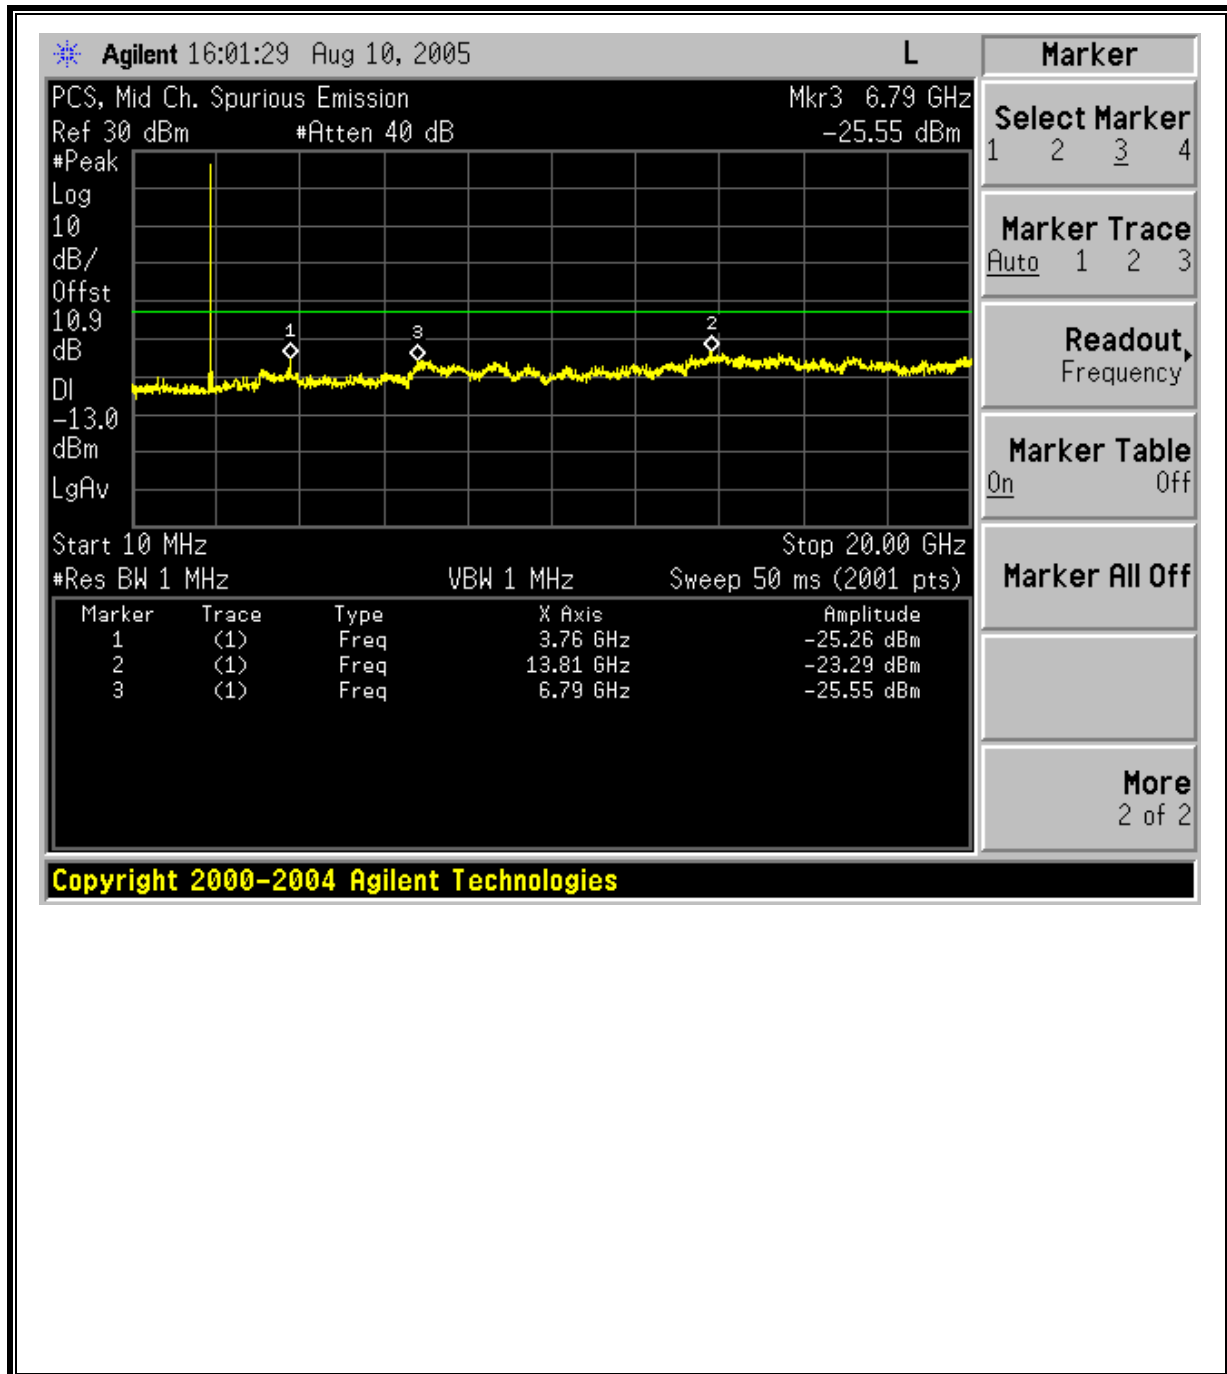


**High Channel, Out-Of-Band Emissions**

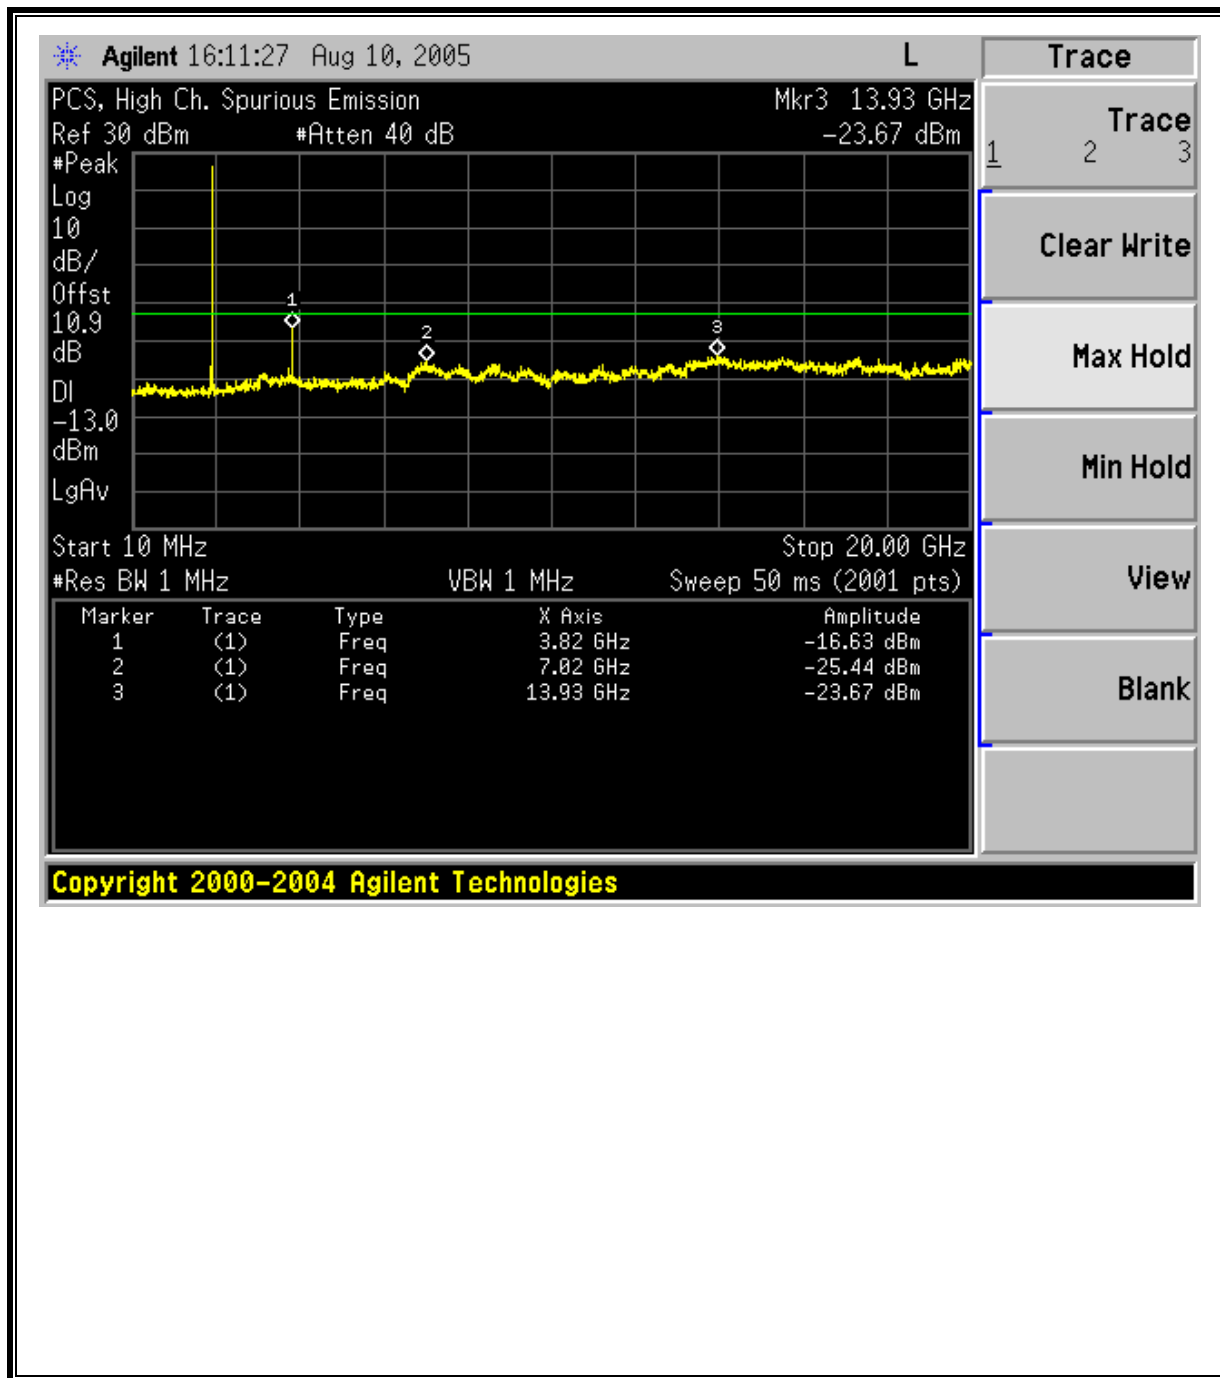

**Low Channel Band Edge**

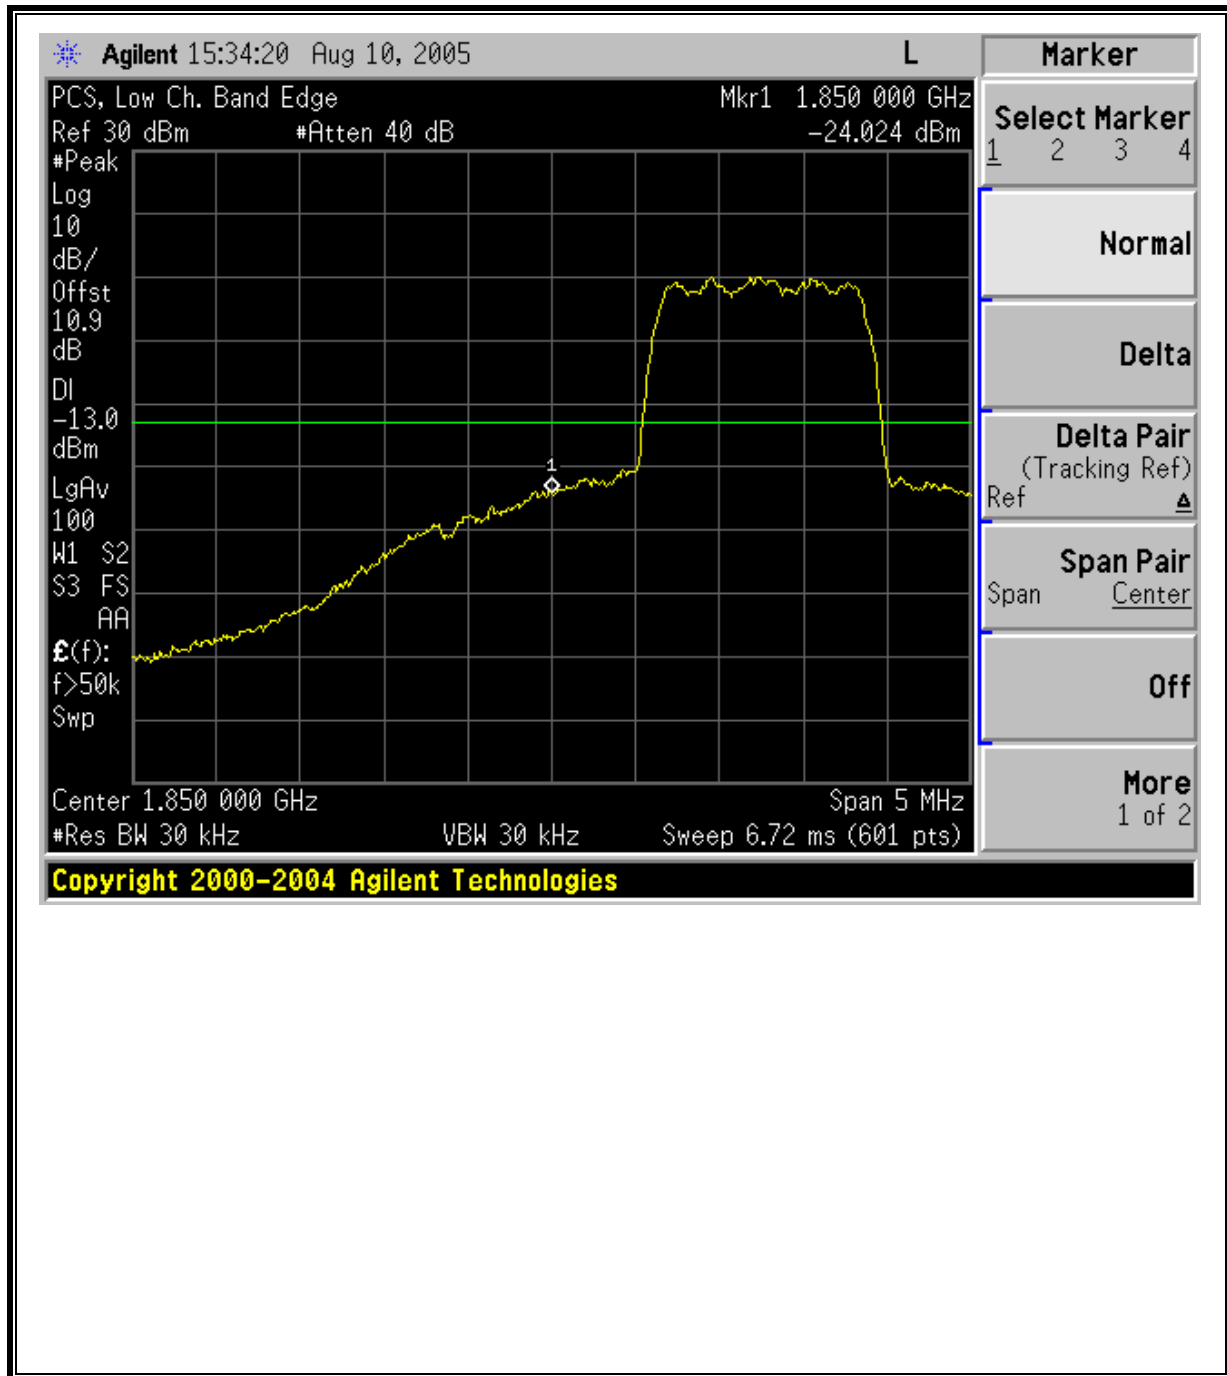

**High Channel Band Edge**

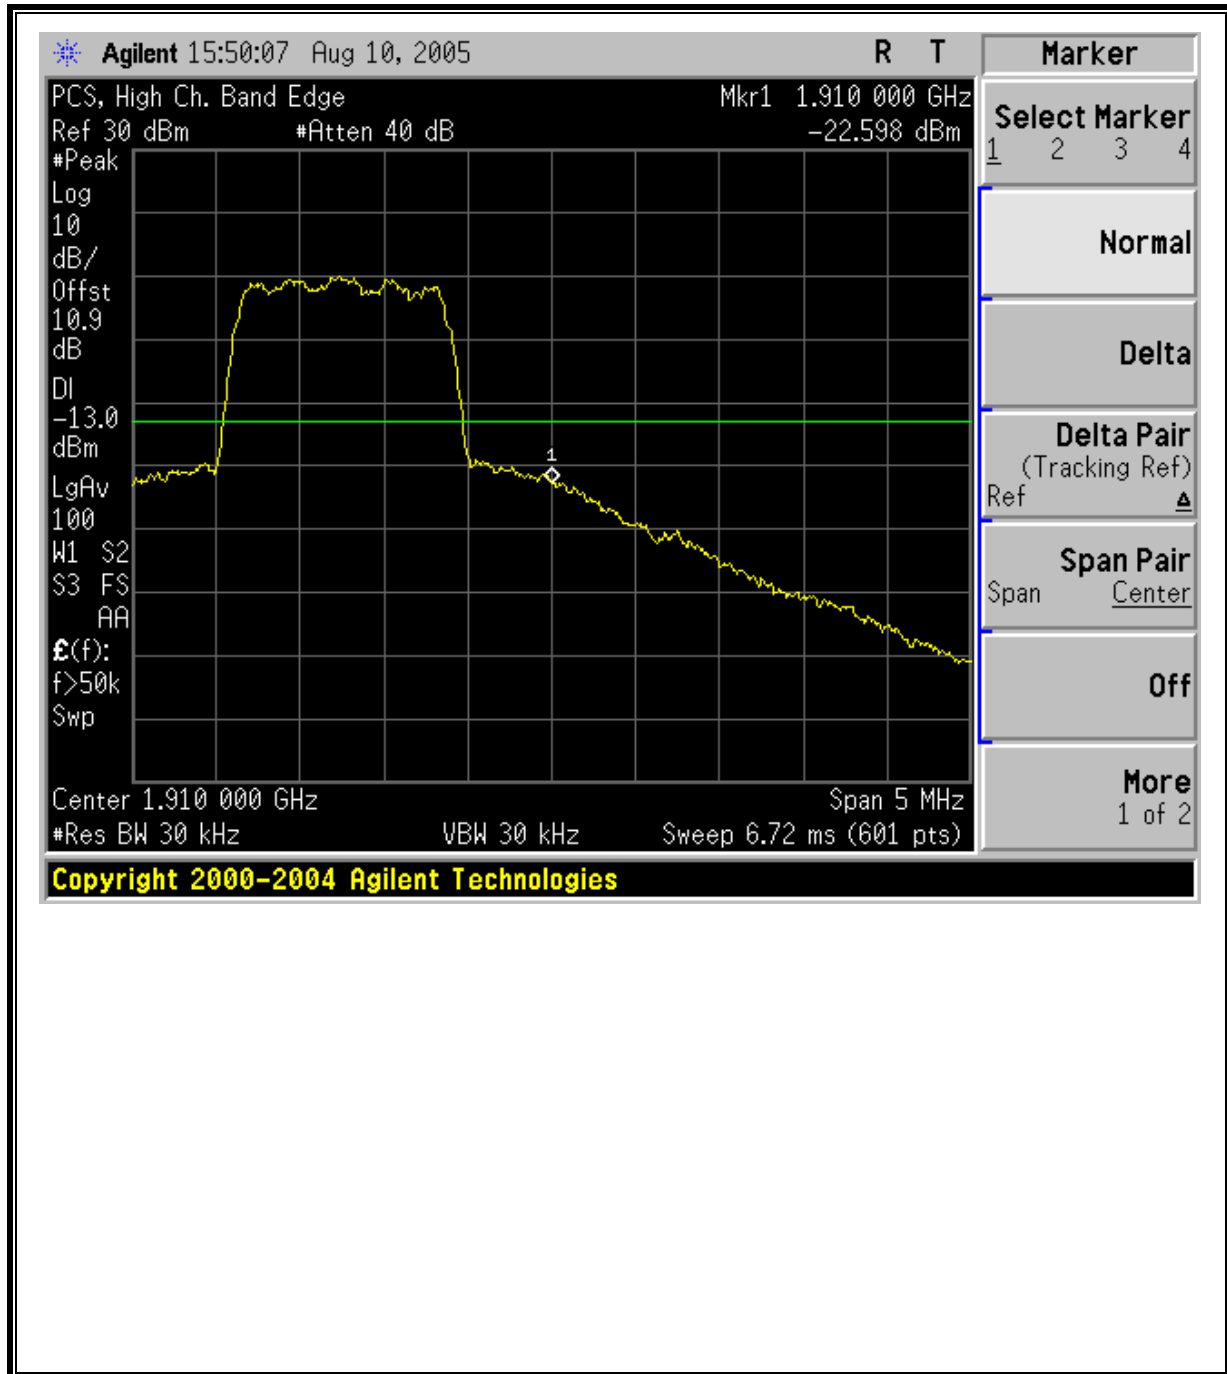



## 7.7. FIELD STRENGTH OF SPURIOUS RADIATION

### LIMIT

§22.917 (a) and §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.12 & FCC 22.917 (b) and FCC 24.238 (b)

### RESULTS

No non-compliance noted.

**AMPS Spurious & Harmonic (ERP)**

08/16/05 **High Frequency Substitution Measurement**  
 Compliance Certification Services, Morgan Hill 5m Chamber Site

Test Engr: William Zhuang  
 Project #: 05I3576-1  
 Company: VACOM WIRELESS, INC.  
 EUT Descr.: Dual band Tri mode PCS/AMPS/CDMA cellular Phone  
 EUT M/N: VT820 (FCC ID: GKRVT820)  
 Test Target: FCC 22.24  
 Mode Oper: Transmit AMPS mode at worst position

**Test Equipment:**

EMCO Horn 1-18GHz  
 T73; S/N: 6717 @3m

Horn > 18GHz

Limit  
 FCC 22

High Pass Filter

Hi Frequency Cables  
 (2 ft)  (2 ~ 3 ft)  (4 ~ 6 ft)  (12 ft)

Pre-amplifier 1-26GHz  
 T63 Mateq 646456

Pre-amplifier 26-40GHz

f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>Low Ch.</b>										
1.648	61.7	V	-42.8	1.6	7.5	5.4	-39.0	-13.0	-26.0	
2.472	66.2	V	-34.7	1.9	8.6	6.4	-30.2	-13.0	-17.2	
3.296	70.1	V	-28.2	2.3	9.3	7.2	-23.4	-13.0	-10.4	
4.120	67.1	V	-29.1	2.7	9.8	7.7	-24.1	-13.0	-11.1	
4.944	51.9	V	-42.9	3.0	10.6	8.4	-37.5	-13.0	-24.5	
1.648	66.6	H	-37.3	1.6	7.5	5.4	-33.4	-13.0	-20.4	
2.472	70.5	H	-30.3	1.9	8.6	6.4	-25.8	-13.0	-12.8	
3.296	68.6	H	-29.6	2.3	9.3	7.2	-24.7	-13.0	-11.7	
4.120	70.2	H	-25.7	2.7	9.8	7.7	-20.7	-13.0	-7.7	
4.944	49.4	H	-42.7	3.0	10.6	8.4	-37.3	-13.0	-24.3	
<b>Mid Ch.</b>										
1.673	65.6	V	-38.8	1.6	7.6	5.4	-35.0	-13.0	-22.0	
2.510	57.3	V	-43.5	1.9	8.6	6.4	-39.0	-13.0	-26.0	
3.346	63.0	V	-35.2	2.3	9.3	7.2	-30.3	-13.0	-17.3	
4.182	60.5	V	-35.6	2.7	9.9	7.8	-30.6	-13.0	-17.6	
1.673	67.6	H	-36.1	1.6	7.6	5.4	-32.2	-13.0	-19.2	
2.510	66.2	H	-34.3	1.9	8.6	6.4	-29.8	-13.0	-16.8	
3.346	61.5	H	-36.5	2.3	9.3	7.2	-31.7	-13.0	-18.7	
4.182	66.1	H	-29.7	2.7	9.9	7.8	-24.6	-13.0	-11.6	
<b>High Ch.</b>										
1.698	68.0	V	-36.3	1.6	7.6	5.5	-32.5	-13.0	-19.5	
2.547	65.9	V	-34.8	2.0	8.6	6.5	-30.2	-13.0	-17.2	
3.396	64.7	V	-33.4	2.3	9.4	7.2	-28.5	-13.0	-15.5	
4.245	61.7	V	-34.4	2.7	10.0	7.8	-29.3	-13.0	-16.3	
1.698	70.1	H	-33.4	1.6	7.6	5.5	-29.6	-13.0	-16.6	
2.547	74.4	H	-26.0	2.0	8.6	6.5	-21.5	-13.0	-8.5	
3.396	66.0	H	-32.0	2.3	9.4	7.2	-27.1	-13.0	-14.1	
4.245	63.7	H	-32.0	2.7	10.0	7.8	-26.9	-13.0	-13.9	

**CDMA Spurious & Harmonic (ERP)**

08/12/05 **High Frequency Substitution Measurement**  
 Compliance Certification Services, Morgan Hill 5m Chamber Site

Test Engr: William Zhuang  
 Project #: 05I3576-1  
 Company: VACOM WIRELESS, INC.  
 EUT Descrip.: Dual band Tri mode PCS/AMPS/CDMA cellular Phone  
 EUT M/N: VT820 (FCC ID: GKRVT820)  
 Test Target: FCC 22.24  
 Mode Oper: Transmit CDMA mode at worst position

**Test Equipment:**

EMCO Horn 1-18GHz  
 T73, S/N: 6717 @3m

Horn > 18GHz

Limit  
 FCC 22

High Pass Filter

Hi Frequency Cables  
 (2 ft)  (2-3 ft)  (4-6 ft)  (12 ft)

Pre-amplifier 1-26GHz  
 T63 Miteq 646456

Pre-amplifier 26-40GHz

f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>Low Ch.</b>										
1.650	58.0	V	-46.5	1.6	7.5	5.4	-42.7	-13.0	-29.7	
2.474	58.9	V	-42.1	1.9	8.6	6.4	-37.6	-13.0	-24.6	
3.299	56.3	V	-42.0	2.3	9.3	7.2	-37.1	-13.0	-24.1	
4.124	50.0	V	-46.2	2.7	9.9	7.7	-41.2	-13.0	-28.2	
1.650	59.8	H	-44.0	1.6	7.5	5.4	-40.2	-13.0	-27.2	
2.474	59.2	H	-41.5	1.9	8.6	6.4	-37.0	-13.0	-24.0	
3.299	56.5	H	-41.7	2.3	9.3	7.2	-36.9	-13.0	-23.9	
4.124	49.5	H	-46.4	2.7	9.9	7.7	-41.3	-13.0	-28.3	
<b>Mid Ch.</b>										
1.672	59.6	V	-44.8	1.6	7.6	5.4	-41.0	-13.0	-28.0	
2.508	58.6	V	-42.2	1.9	8.6	6.4	-37.7	-13.0	-24.7	
3.344	58.7	V	-39.4	2.3	9.3	7.2	-34.6	-13.0	-21.6	
1.672	62.6	H	-41.1	1.6	7.6	5.4	-37.3	-13.0	-24.3	
2.508	65.0	H	-35.6	1.9	8.6	6.4	-31.1	-13.0	-18.1	
3.344	63.8	H	-34.3	2.3	9.3	7.2	-29.5	-13.0	-16.5	
<b>High Ch.</b>										
1.697	57.2	V	-47.1	1.6	7.6	5.5	-43.2	-13.0	-30.2	
2.545	57.7	V	-43.0	2.0	8.6	6.5	-38.5	-13.0	-25.5	
3.393	56.9	V	-41.2	2.3	9.4	7.2	-36.3	-13.0	-23.3	
1.697	65.0	H	-38.6	1.6	7.6	5.5	-34.7	-13.0	-21.7	
2.545	68.2	H	-32.3	2.0	8.6	6.5	-27.8	-13.0	-14.8	
3.393	57.6	H	-40.3	2.3	9.4	7.2	-35.5	-13.0	-22.5	

PCS Spurious & Harmonic (EIRP):

08/12/05 High Frequency Substitution Measurement  
 Compliance Certification Services, Morgan Hill 5m Chamber Site

Test Engr: William Zhuang  
 Project #: 05I3576-1  
 Company: VACOM WIRELESS, INC.  
 EUT Descr.: Dual band Tri mode PCS/AMPS/CDMA cellular Phone  
 EUT M/N: VTS20 (FCC ID: GKRVT820)  
 Test Target: FCC 22/24  
 Mode Oper: Transmit PCS mode at worst position

**Test Equipment:**

EMCO Horn 1-18GHz  
 T73, S/N: 6717 @3m

Horn > 18GHz

Limit  
 FCC 24

High Pass Filter

Hi Frequency Cables  
 (2 ft)  (2-3 ft)  (4-6 ft)  (12 ft)


Pre-amplifier 1-26GHz  
 T63 Miteq 646456

Pre-amplifier 26-40GHz

f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>Low Ch.</b>										
3.703	68.5	V	-28.8	2.5	9.6	7.4	-21.7	-13.0	-8.7	
5.554	62.7	V	-30.0	3.3	11.1	9.0	-22.2	-13.0	-9.2	
7.405	53.2	V	-36.3	3.7	11.6	9.4	-28.3	-13.0	-15.3	
9.256	43.7	V	-42.2	4.0	10.5	8.4	-35.7	-13.0	-22.7	
3.703	71.4	H	-25.8	2.5	9.6	7.4	-18.7	-13.0	-5.7	
5.554	61.1	H	-30.6	3.3	11.1	9.0	-22.8	-13.0	-9.8	
7.405	48.5	H	-40.2	3.7	11.6	9.4	-32.3	-13.0	-19.3	
9.256	43.7	H	-42.2	4.0	10.5	8.4	-35.7	-13.0	-22.7	
<b>Mid Ch.</b>										
3.760	69.5	V	-27.6	2.5	9.6	7.4	-20.5	-13.0	-7.5	
5.640	53.3	V	-39.3	3.3	11.2	9.0	-31.5	-13.0	-18.5	
7.520	50.6	V	-38.6	3.7	11.5	9.4	-30.8	-13.0	-17.8	
3.760	73.4	H	-23.7	2.5	9.6	7.4	-16.6	-13.0	-3.6	
5.640	60.3	H	-31.3	3.3	11.2	9.0	-23.4	-13.0	-10.4	
7.520	50.0	H	-38.4	3.7	11.5	9.4	-30.5	-13.0	-17.5	
<b>High Ch.</b>										
3.818	67.7	V	-29.3	2.5	9.6	7.5	-22.2	-13.0	-9.2	
5.726	51.1	V	-41.3	3.4	11.2	9.1	-33.5	-13.0	-20.5	
7.635	49.7	V	-39.2	3.7	11.5	9.3	-31.4	-13.0	-18.4	
3.818	73.6	H	-23.3	2.5	9.6	7.5	-16.2	-13.0	-3.2	
5.726	56.5	H	-35.0	3.4	11.2	9.1	-27.1	-13.0	-14.1	
7.635	48.4	H	-39.7	3.7	11.5	9.3	-31.9	-13.0	-18.9	

### 7.7.1. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz (DIGITAL)

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

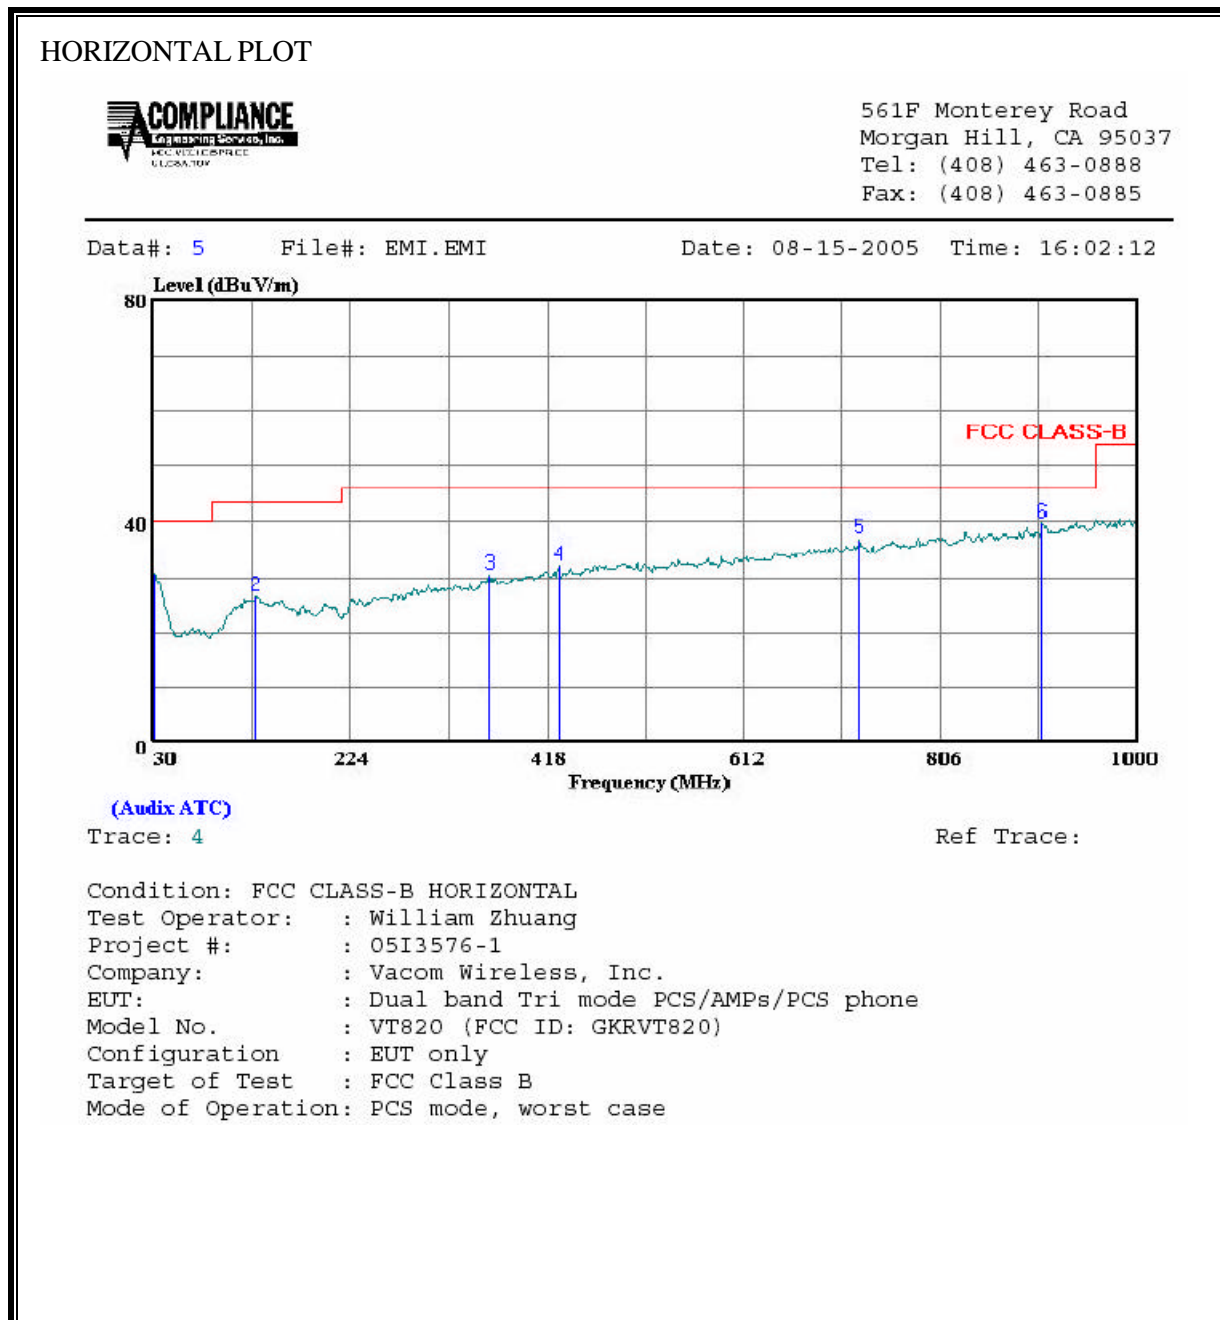


HORIZONTAL DATA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Cable Loss	Probe Factor
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		dB	dB
1	30.970	10.35	20.45	30.80	40.00	-9.20	Peak	0.45	20.00
2	130.880	11.48	15.09	26.57	43.50	-16.93	Peak	0.93	14.16
3	361.740	13.29	17.20	30.49	46.00	-15.51	Peak	1.67	15.53
4	429.640	13.47	18.74	32.21	46.00	-13.79	Peak	1.83	16.91
5	725.490	13.31	23.53	36.84	46.00	-9.16	Peak	2.50	21.03
6	906.880	13.55	26.01	39.56	46.00	-6.44	Peak	2.99	23.02

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

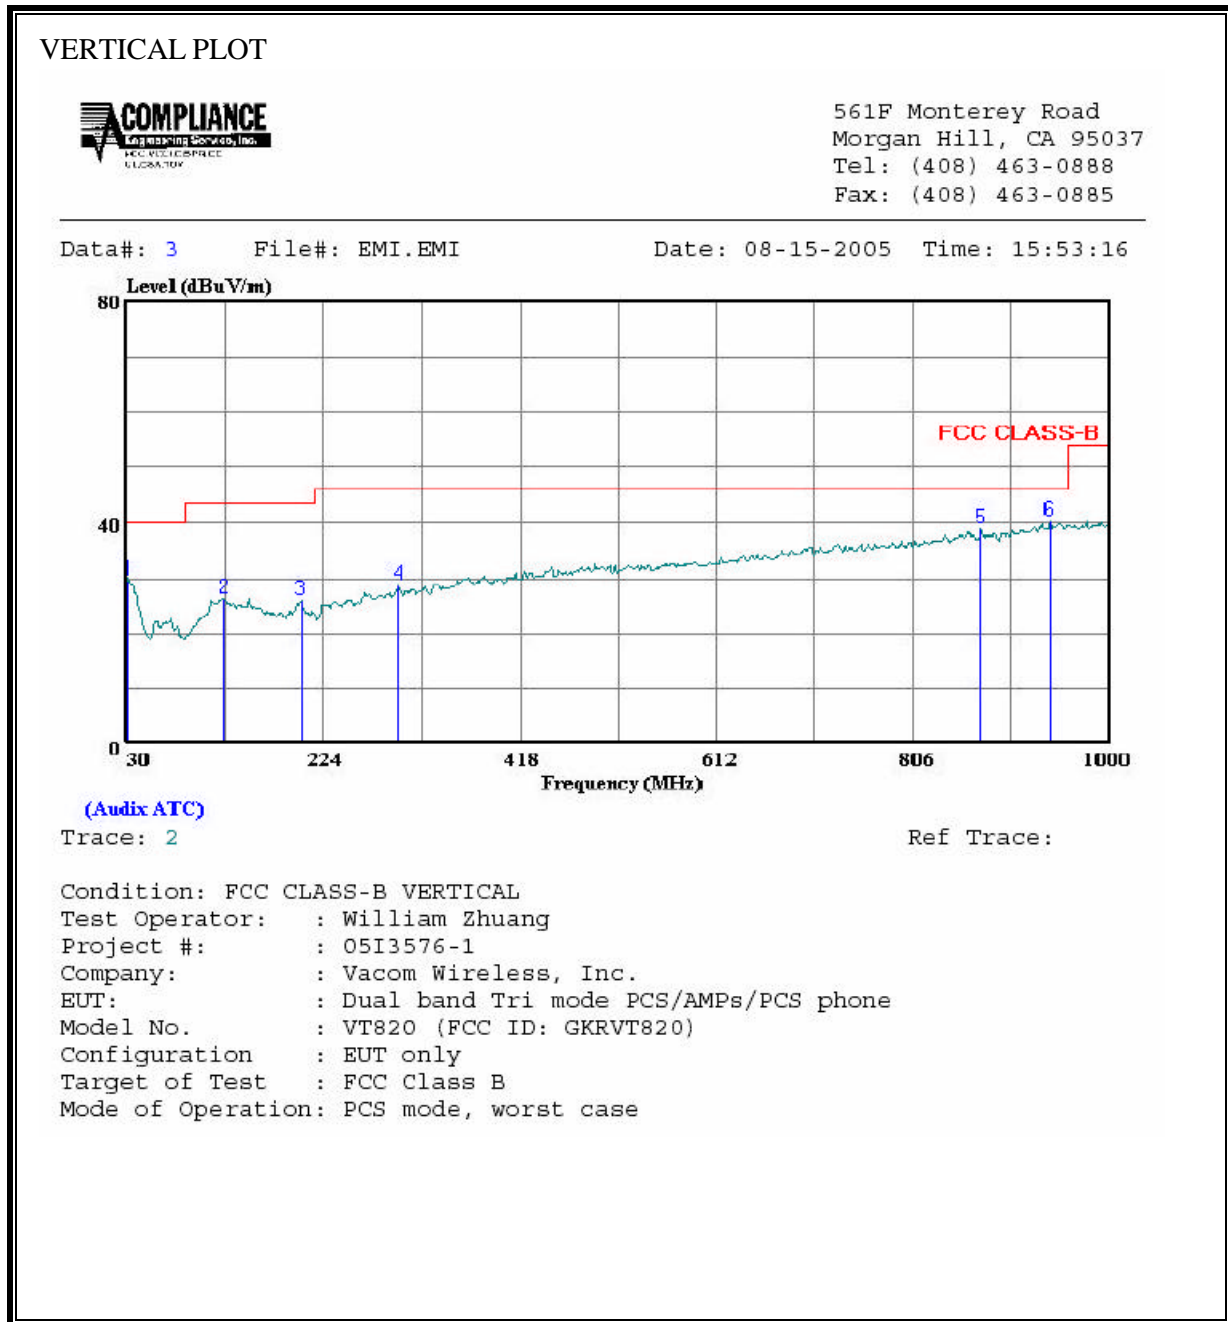

VERTICAL DATA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Cable Loss	Probe Factor
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		dB	dB
1	31.940	9.81	19.94	29.75	40.00	-10.25	Peak	0.47	19.47
2	126.030	11.19	15.25	26.44	43.50	-17.06	Peak	0.93	14.32
3	201.690	11.59	14.32	25.91	43.50	-17.59	Peak	1.21	13.11
4	298.690	13.08	15.63	28.71	46.00	-17.29	Peak	1.56	14.07
5	872.930	13.13	25.61	38.74	46.00	-7.26	Peak	2.92	22.69
6	940.830	13.72	26.44	40.16	46.00	-5.84	Peak	3.15	23.29



## 7.8. POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.107 (a) (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST PROCEDURE

ANSI C63.4


### RESULTS

No non-compliance noted:


**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA										
Freq. (MHz)	Reading			Class (dB)	Limit QP	FCC_B		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)			AV	QP (dB)	AV (dB)		
0.17	53.80	--	36.58	0.00	65.21	55.21	-11.41	-18.63	L1	
0.25	49.14	--	31.20	0.00	61.72	51.72	-12.58	-20.52	L1	
0.34	46.36	--	29.65	0.00	59.30	49.30	-12.94	-19.65	L1	
0.17	51.20	--	34.80	0.00	65.06	55.06	-13.86	-20.26	L2	
0.25	46.64	--	27.69	0.00	61.69	51.69	-15.05	-24.00	L2	
0.35	43.88	--	26.01	0.00	59.08	49.08	-15.20	-23.07	L2	
6 Worst Data										

**LINE 1 RESULTS**

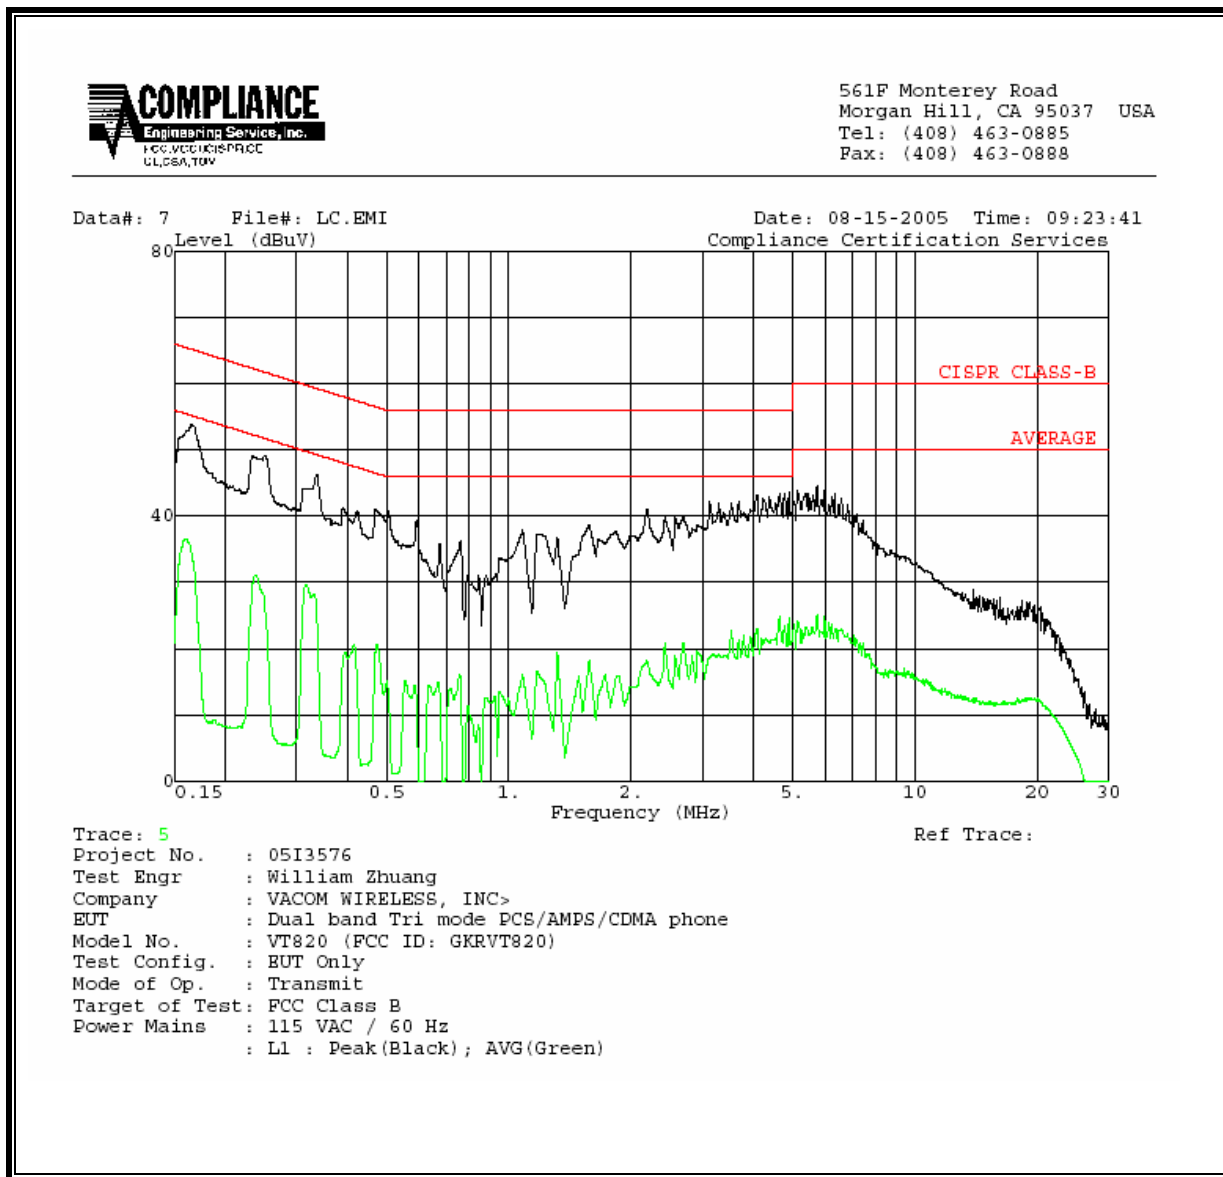


**LINE 2 RESULTS**

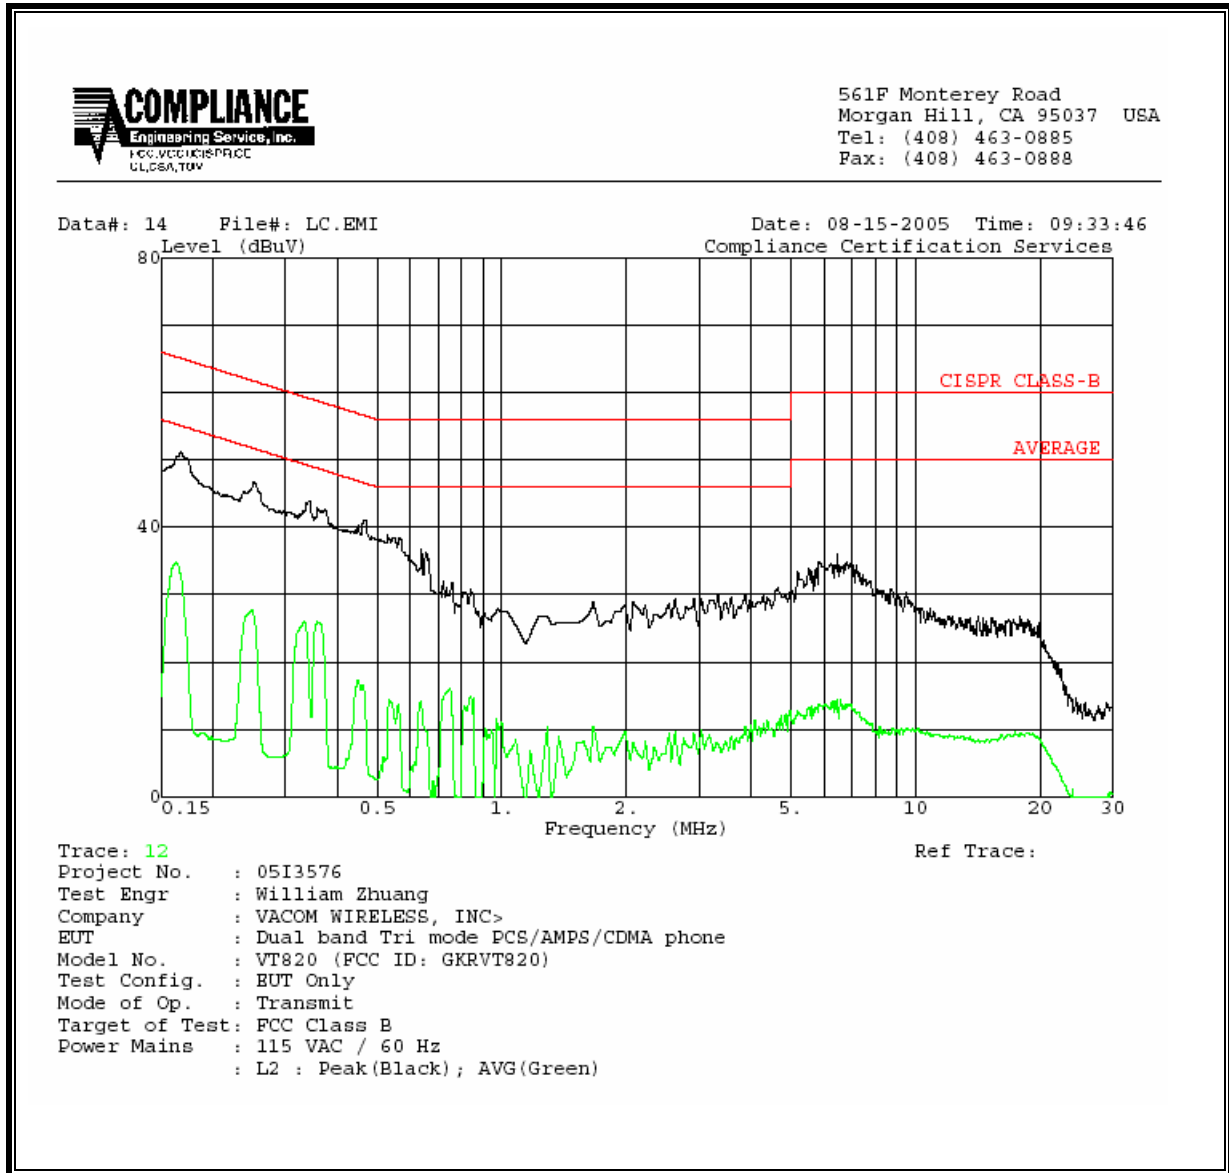


## 8. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

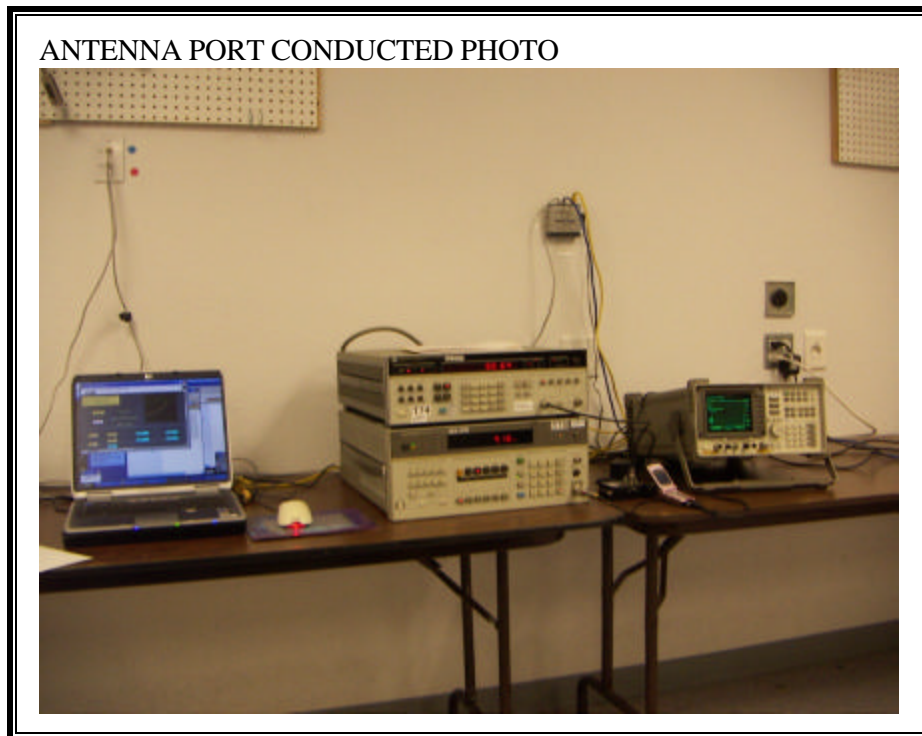

**RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION**

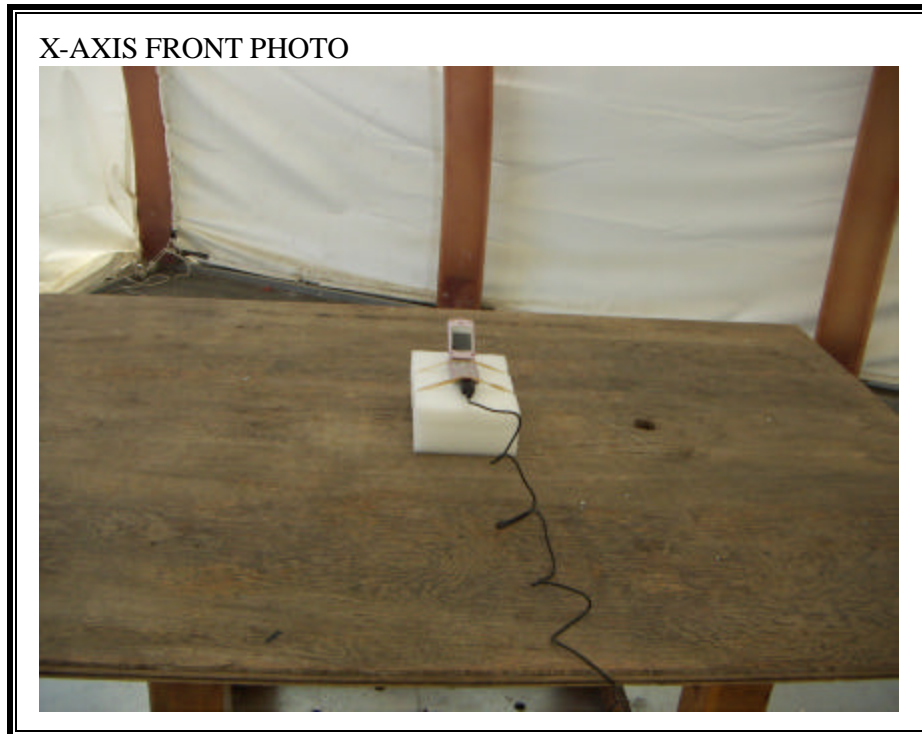

X-AXIS BACK PHOTO



Y-AXIS FRONT PHOTO





Y-AXIS BACK PHOTO



Z-AXIS FRONT PHOTO



Z-AXIS BACK PHOTO




**DIGITAL DEVICE RADIATED EMISSIONS SETUP**



DIGITAL DEVICE BACK PHOTO



**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

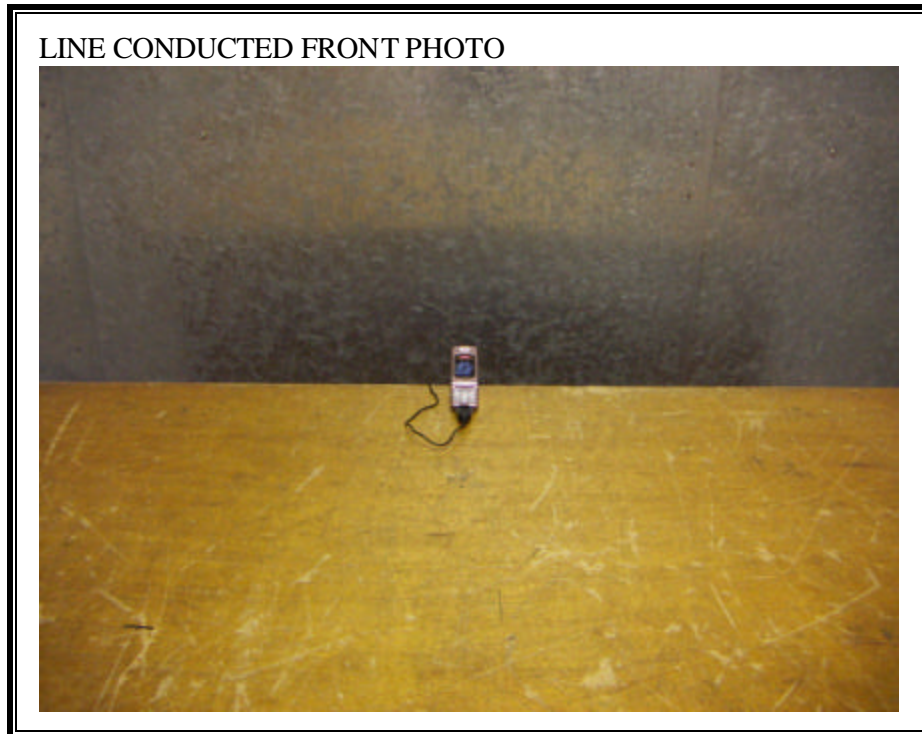



**END OF REPORT**