

Test Laboratory: Compliance Certification Services

1_Left Hand Side

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.95, 7.95, 7.95); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch - L-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.31 mW/g

Touch - L-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.56 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.32 mW/g; SAR(10 g) = 0.809 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.53 mW/g

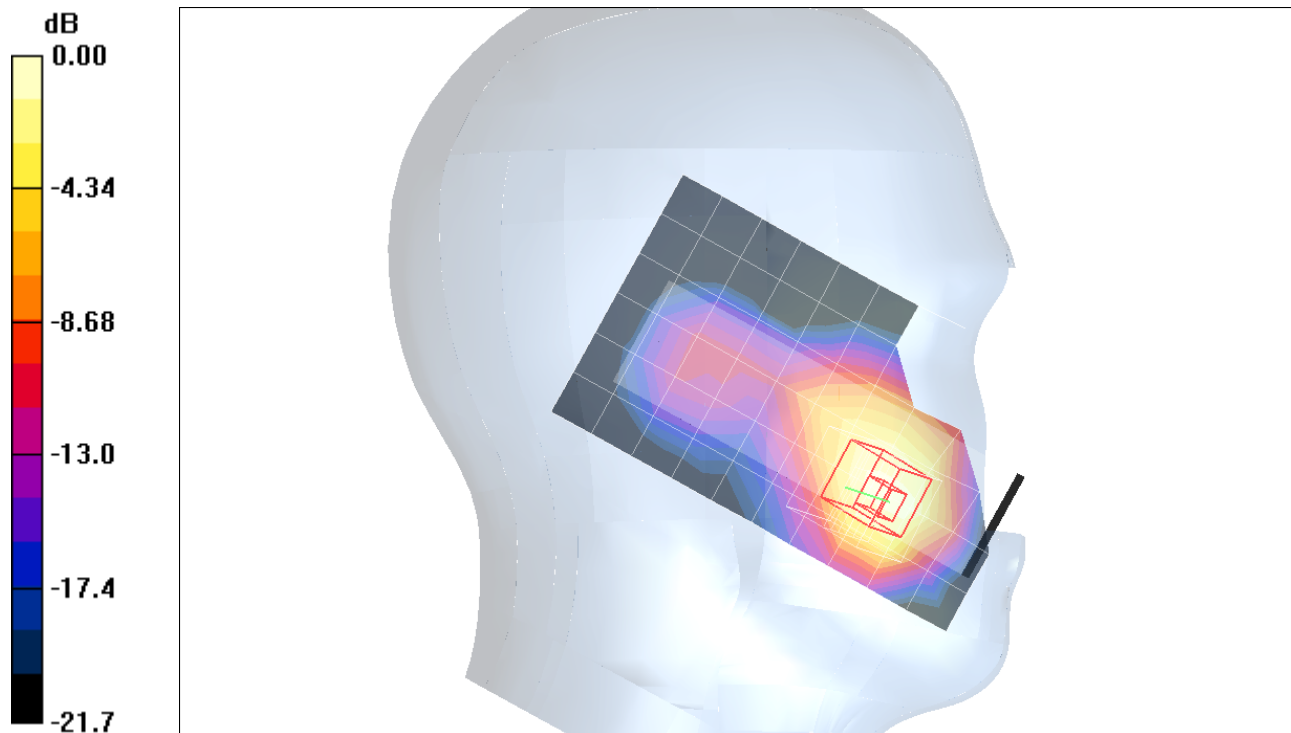

0 dB = 1.53mW/g

Test Laboratory: Compliance Certification Services

1_Left Hand Side

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section


Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.95, 7.95, 7.95); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch - M-ch 2 2/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.46 mW/g

Touch - M-ch 2 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 7.93 V/m; Power Drift = -0.174 dB
Peak SAR (extrapolated) = 2.07 W/kg
SAR(1 g) = 1.47 mW/g; SAR(10 g) = 0.877 mW/g
Maximum value of SAR (measured) = 1.73 mW/g

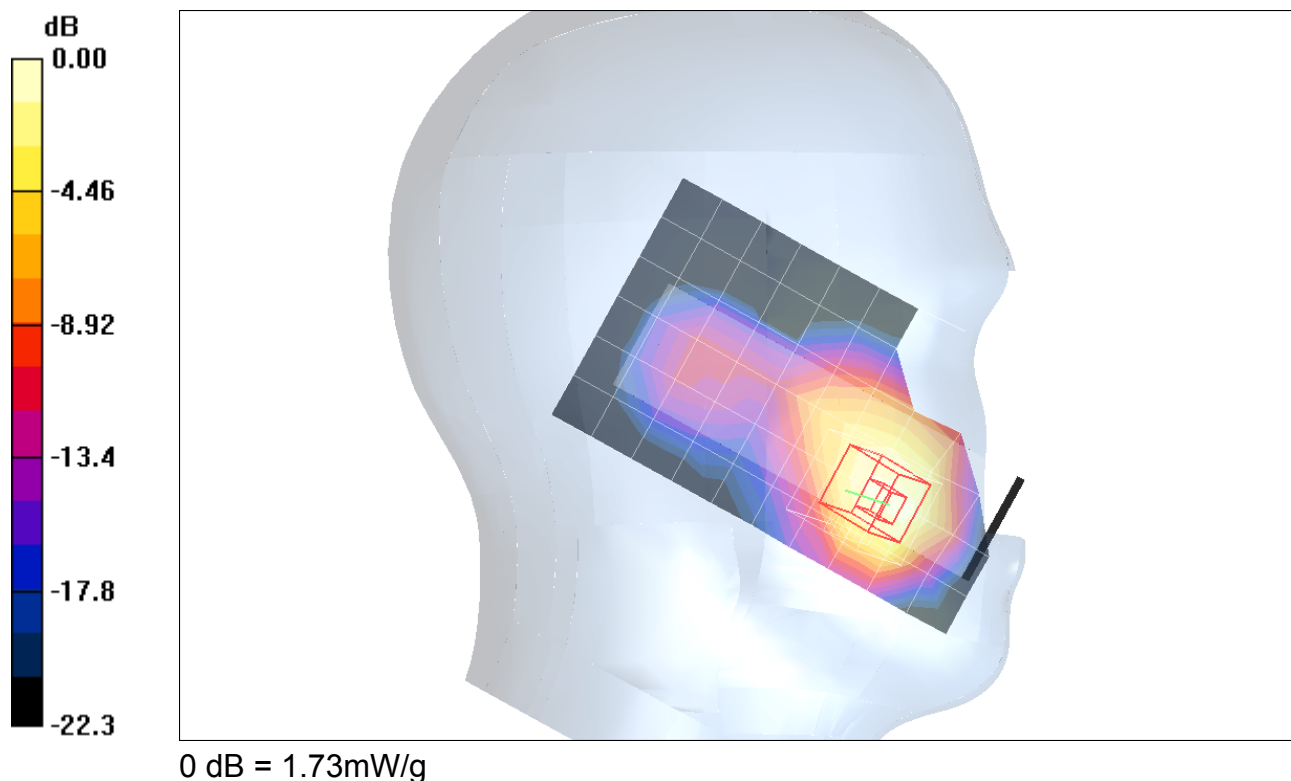


Test Laboratory: Compliance Certification Services

1_Left Hand Side

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1880 MHz;Duty Cycle: 1:1

Touch - M-ch 2 2/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm
Maximum value of SAR (measured) = 1.22 mW/g

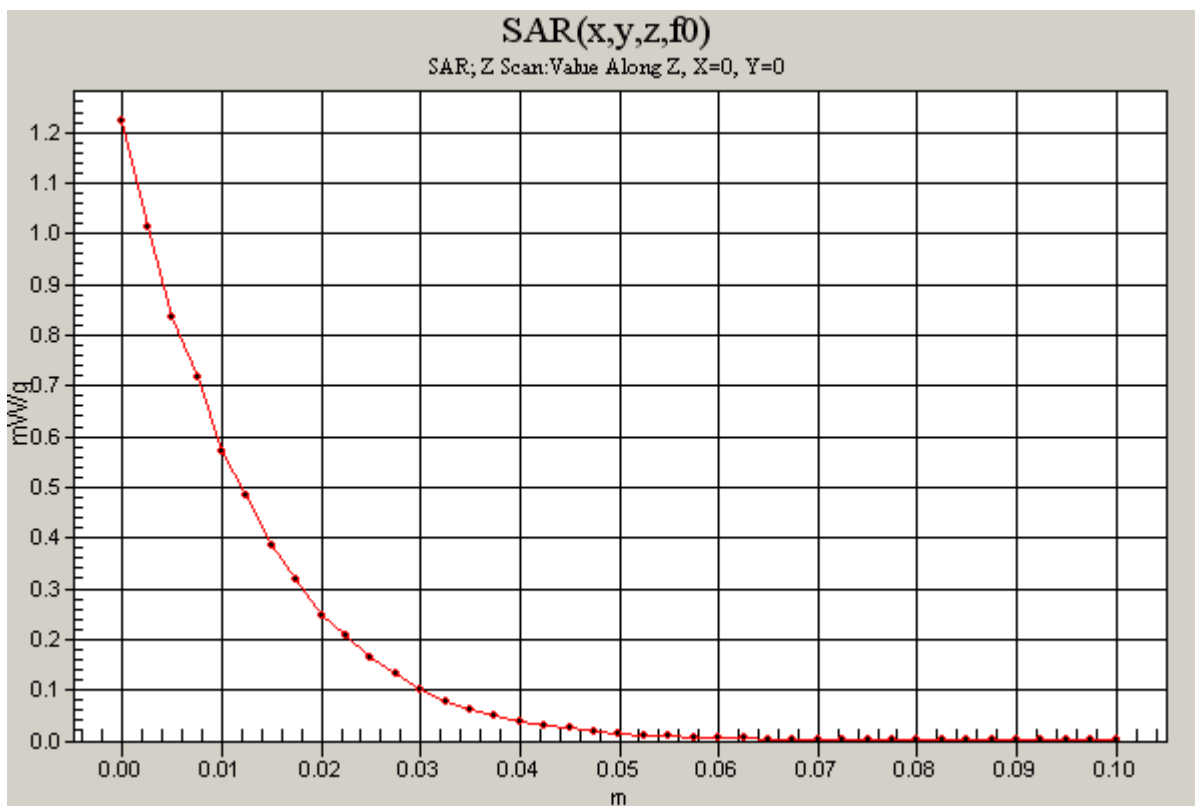

Test Laboratory: Compliance Certification Services

1_Left Hand Side

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.95, 7.95, 7.95); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch - H-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.28 mW/g

Touch - H-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.24 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.748 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.53 mW/g

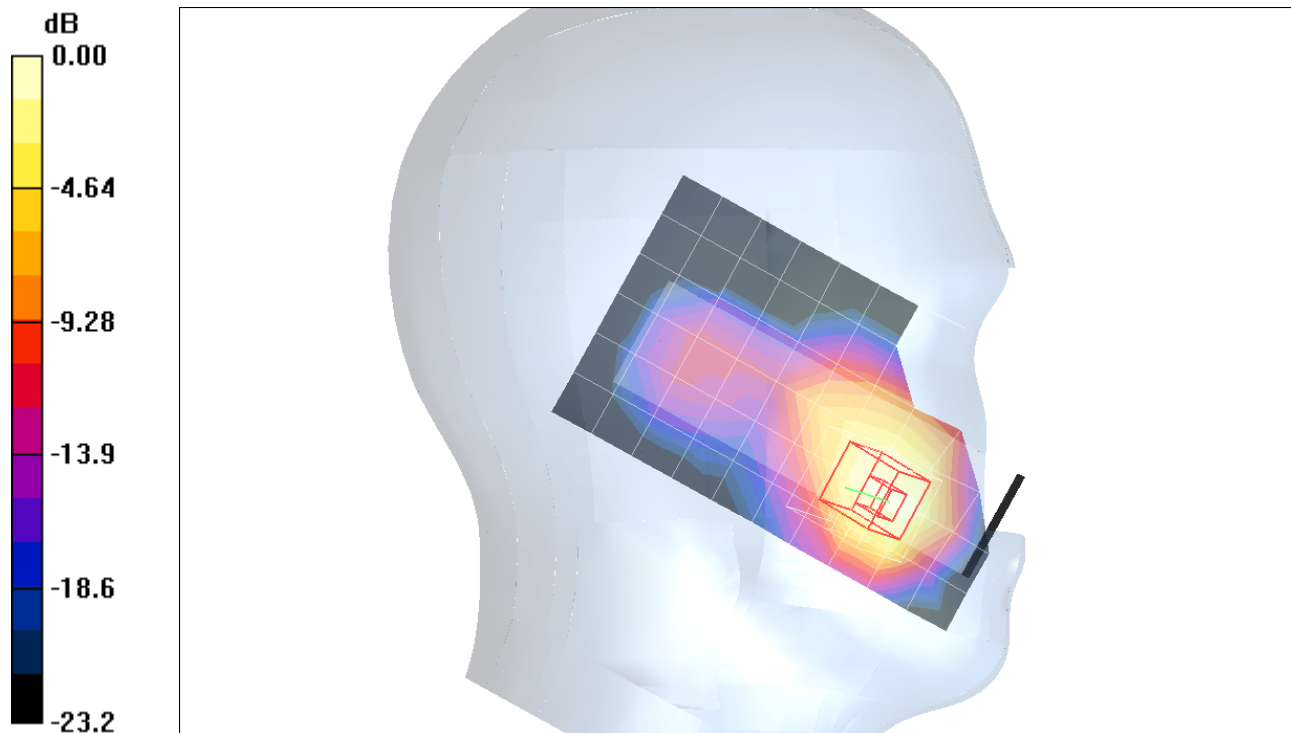

0 dB = 1.53mW/g

Test Laboratory: Compliance Certification Services

1_Left Hand Side

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C


DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.95, 7.95, 7.95); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt - M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.118 mW/g

Tilt - M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 6.87 V/m; Power Drift = -0.039 dB
Peak SAR (extrapolated) = 0.147 W/kg
SAR(1 g) = 0.106 mW/g; SAR(10 g) = 0.068 mW/g
Maximum value of SAR (measured) = 0.124 mW/g

Tilt - M-ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 6.87 V/m; Power Drift = -0.039 dB
Peak SAR (extrapolated) = 0.141 W/kg
SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.054 mW/g
Maximum value of SAR (measured) = 0.114 mW/g

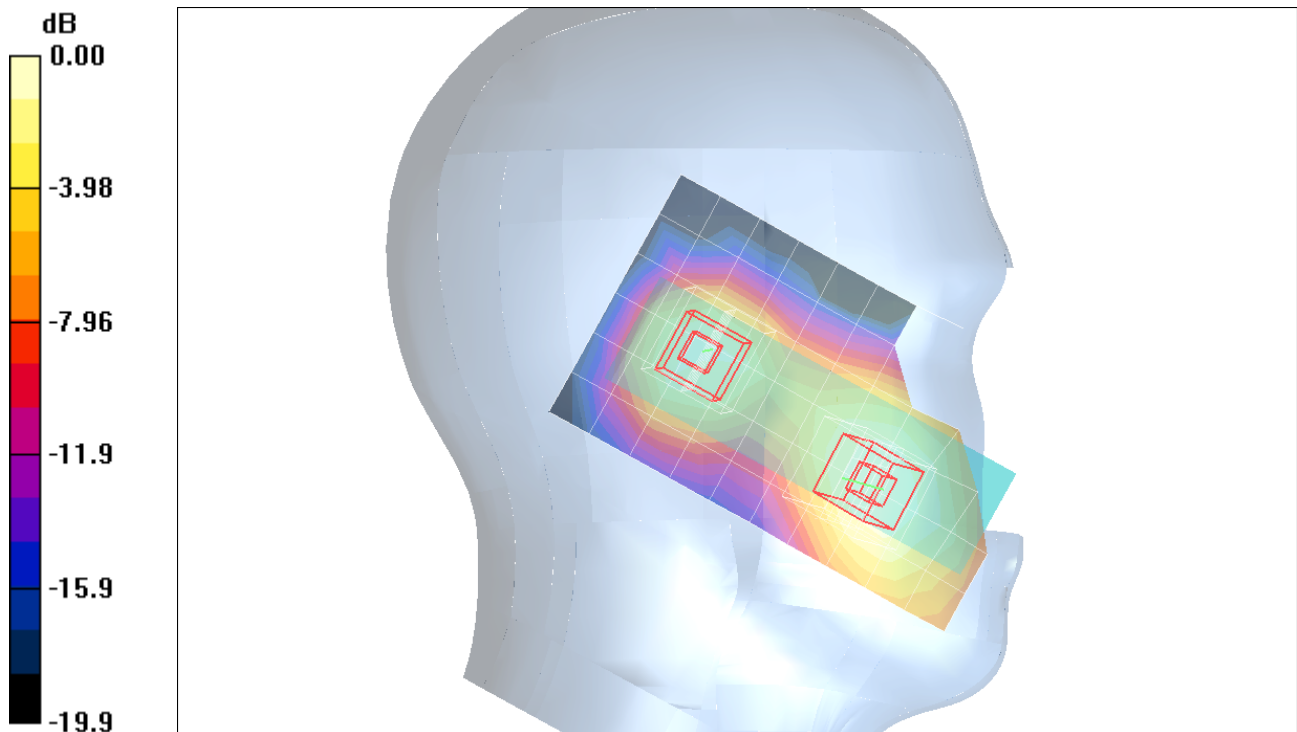

0 dB = 0.114mW/g

Test Laboratory: Compliance Certification Services

2_Right Hand Side

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.95, 7.95, 7.95); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch - L-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.41 mW/g

Touch - L-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.47 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.771 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.55 mW/g

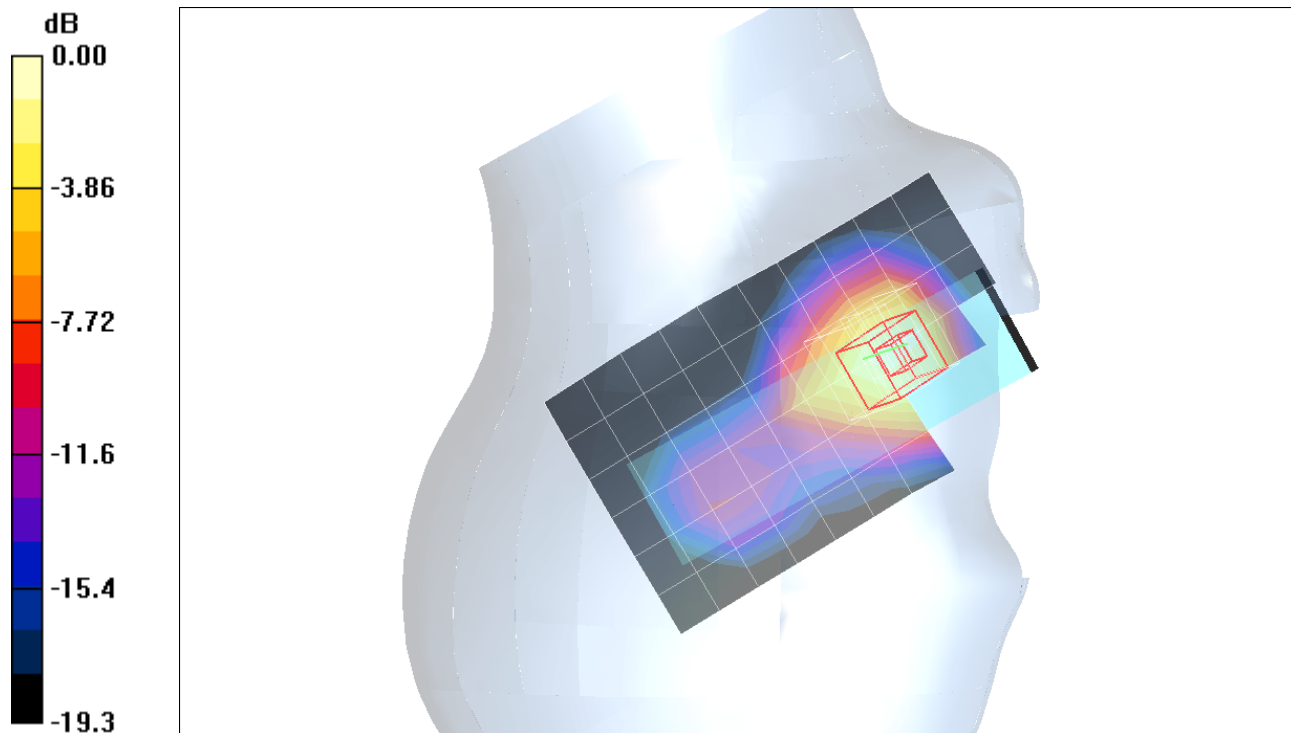

0 dB = 1.55mW/g

Test Laboratory: Compliance Certification Services

2_Right Hand Side

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section


Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.95, 7.95, 7.95); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch - M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.46 mW/g

Touch - M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 7.67 V/m; Power Drift = -0.107 dB
Peak SAR (extrapolated) = 2.08 W/kg
SAR(1 g) = 1.37 mW/g; SAR(10 g) = 0.828 mW/g
Maximum value of SAR (measured) = 1.70 mW/g

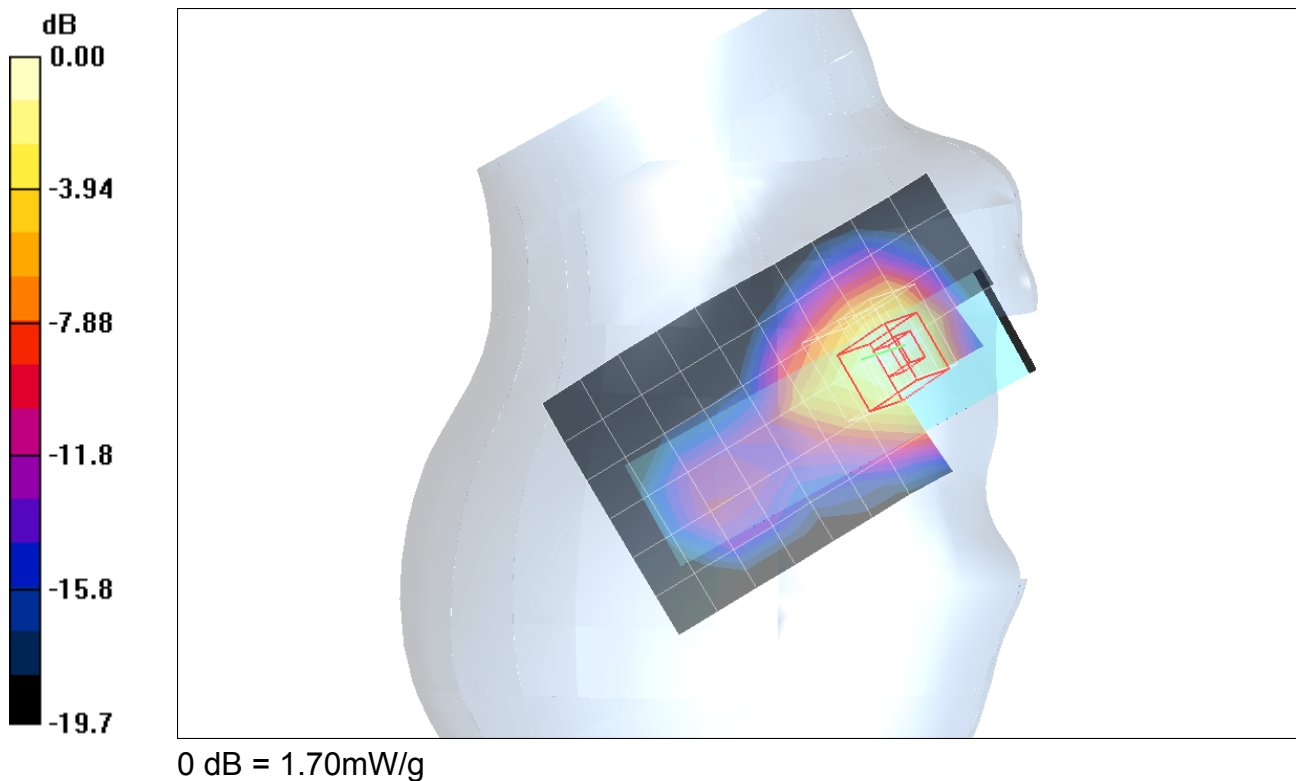


Test Laboratory: Compliance Certification Services

2_Right Hand Side

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1

Touch - M-ch/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm
Maximum value of SAR (measured) = 1.13 mW/g

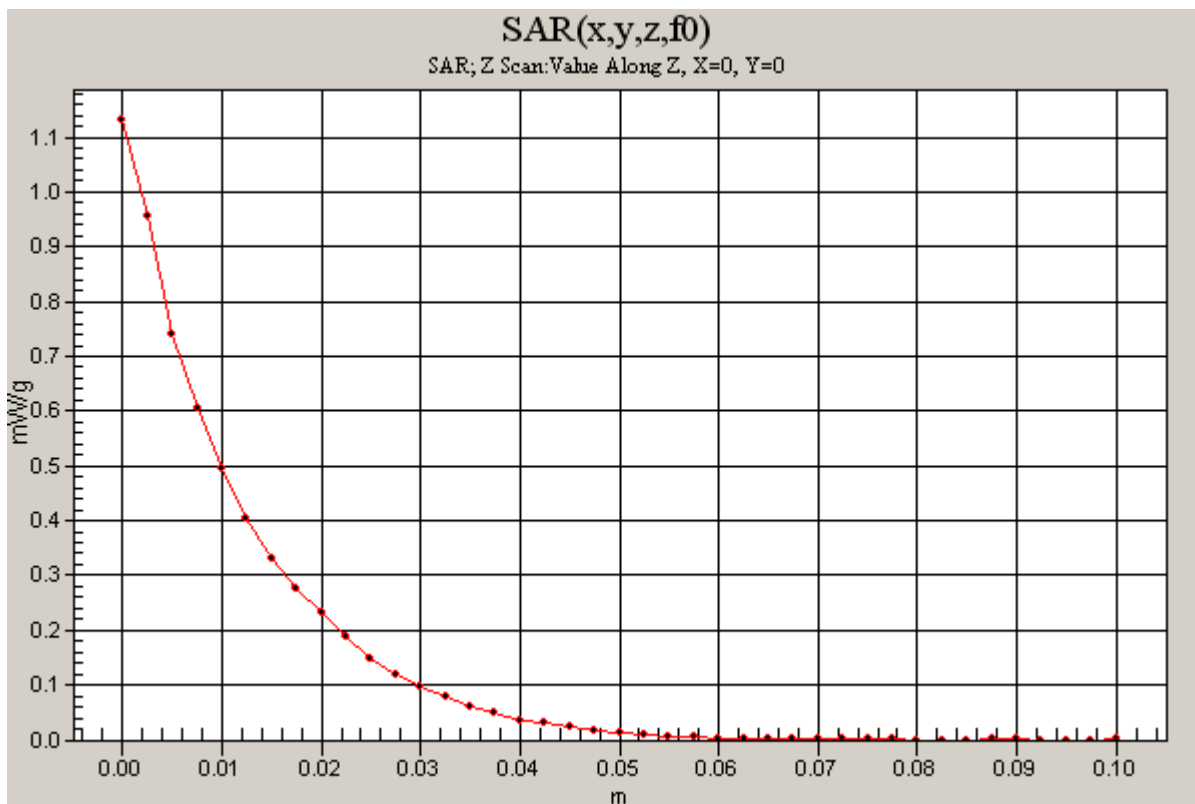

Test Laboratory: Compliance Certification Services

2_Right Hand Side

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.95, 7.95, 7.95); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch - H-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.26 mW/g

Touch - H-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.10 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.708 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.45 mW/g

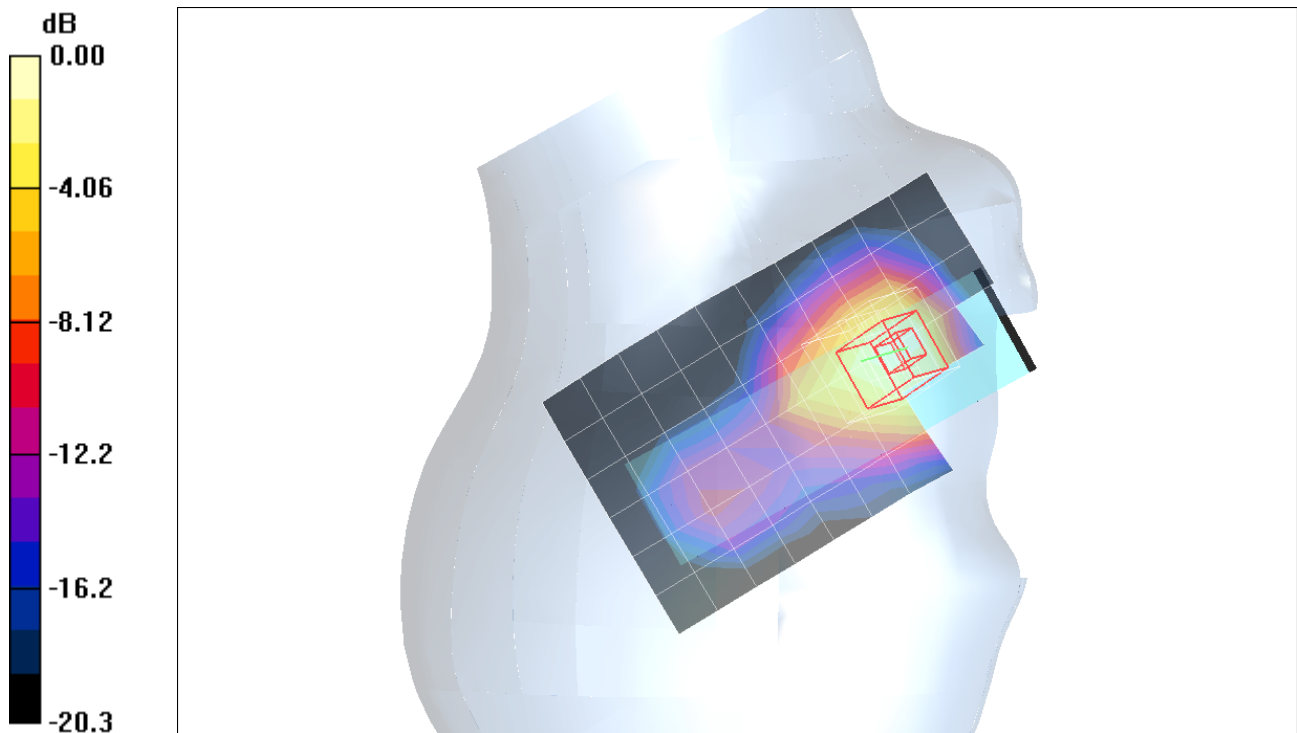

0 dB = 1.45mW/g

Test Laboratory: Compliance Certification Services

2_Right Hand Side

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C


DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.95, 7.95, 7.95); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt - M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.110 mW/g

Tilt - M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 7.05 V/m; Power Drift = -0.138 dB
Peak SAR (extrapolated) = 0.141 W/kg
SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.054 mW/g
Maximum value of SAR (measured) = 0.114 mW/g

Tilt - M-ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 7.05 V/m; Power Drift = -0.138 dB
Peak SAR (extrapolated) = 0.136 W/kg
SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.062 mW/g

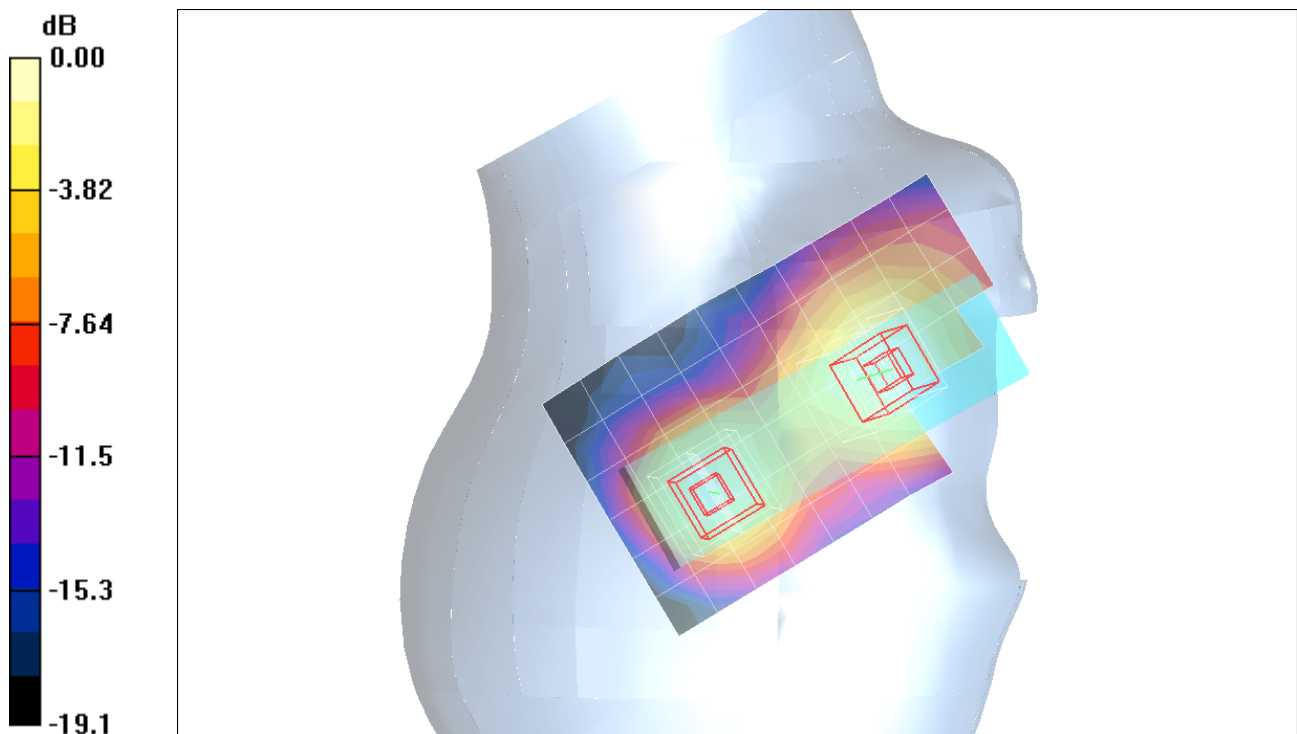

0 dB = 0.114mW/g

Test Laboratory: Compliance Certification Services

3_Bosy worn - 1.5 cm seperation

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.82, 7.82, 7.82); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

1.5 cm sep., L-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.214 mW/g

1.5 cm sep., L-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 11.3 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.116 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.215 mW/g

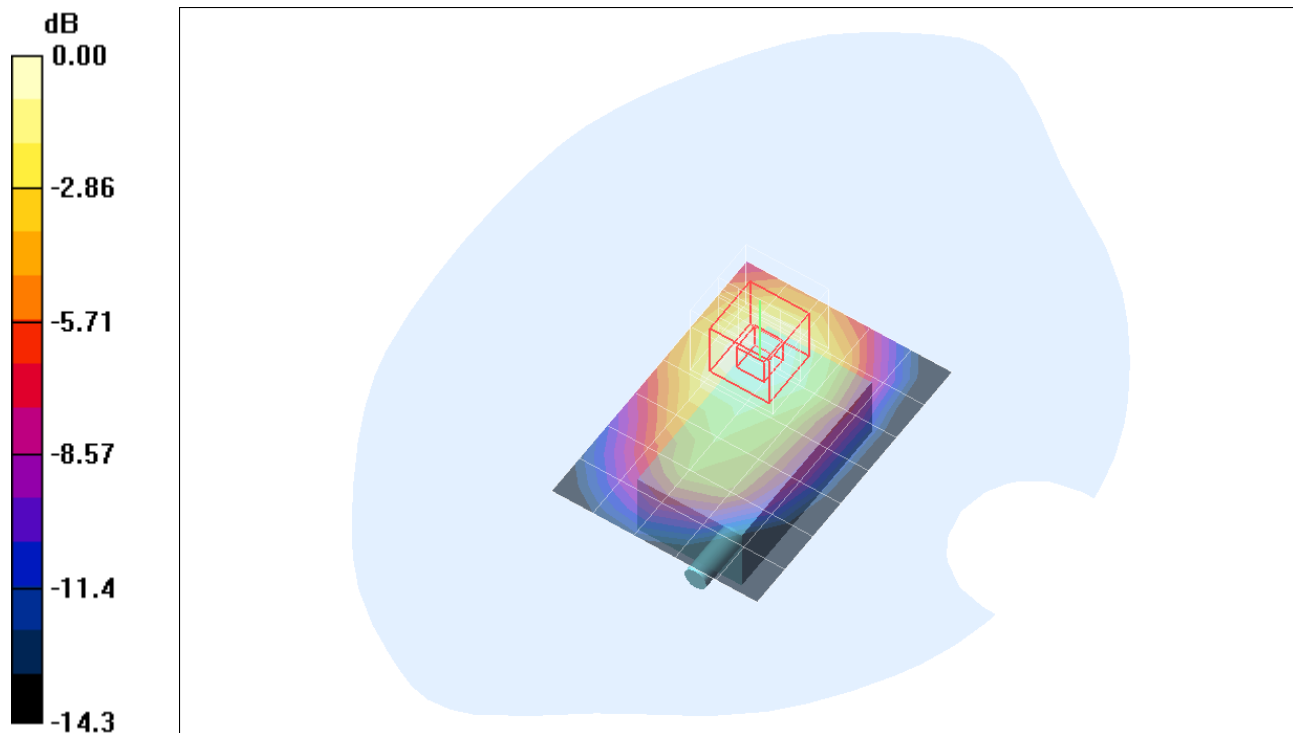

0 dB = 0.215mW/g

Test Laboratory: Compliance Certification Services

3_Bosy worn - 1.5 cm seperation


DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1851.25 MHz;Duty Cycle: 1:1

1.5 cm sep., L-ch/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.152 mW/g

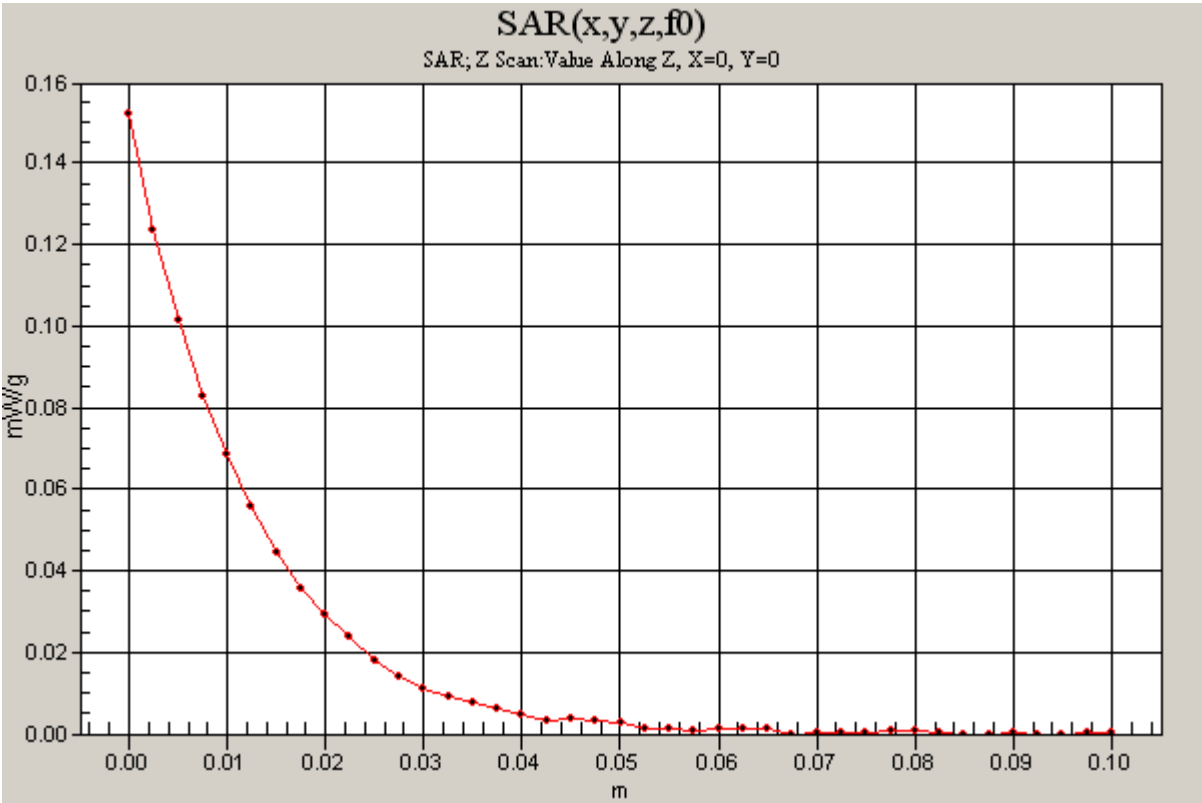

Test Laboratory: Compliance Certification Services

3_Bosy worn - 1.5 cm separation

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.82, 7.82, 7.82); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

1.5 cm sep., M-ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.205 mW/g


1.5 cm sep., M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.212 mW/g

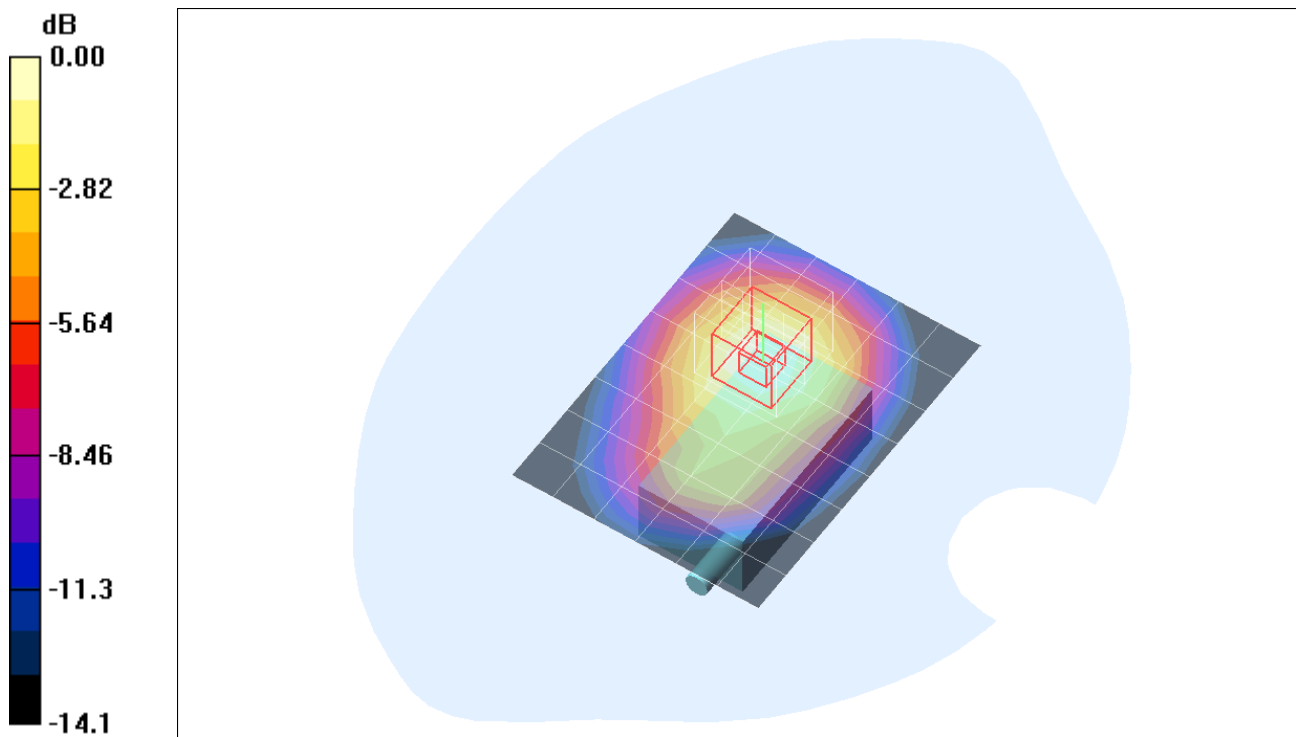

0 dB = 0.212mW/g

Test Laboratory: Compliance Certification Services

3_Bosy worn - 1.5 cm seperation

DUT: Compal Electronics, Inc.; Type: VT820; Serial: B-Test1 145

Communication System: CDMA PCS band; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 23 deg. C; Liquid Temperature: 22 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552 ; ConvF(7.82, 7.82, 7.82); Calibrated: 3/19/2005
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

1.5 cm sep., H-ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.168 mW/g

1.5 cm sep., H-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.09 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.090 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.172 mW/g

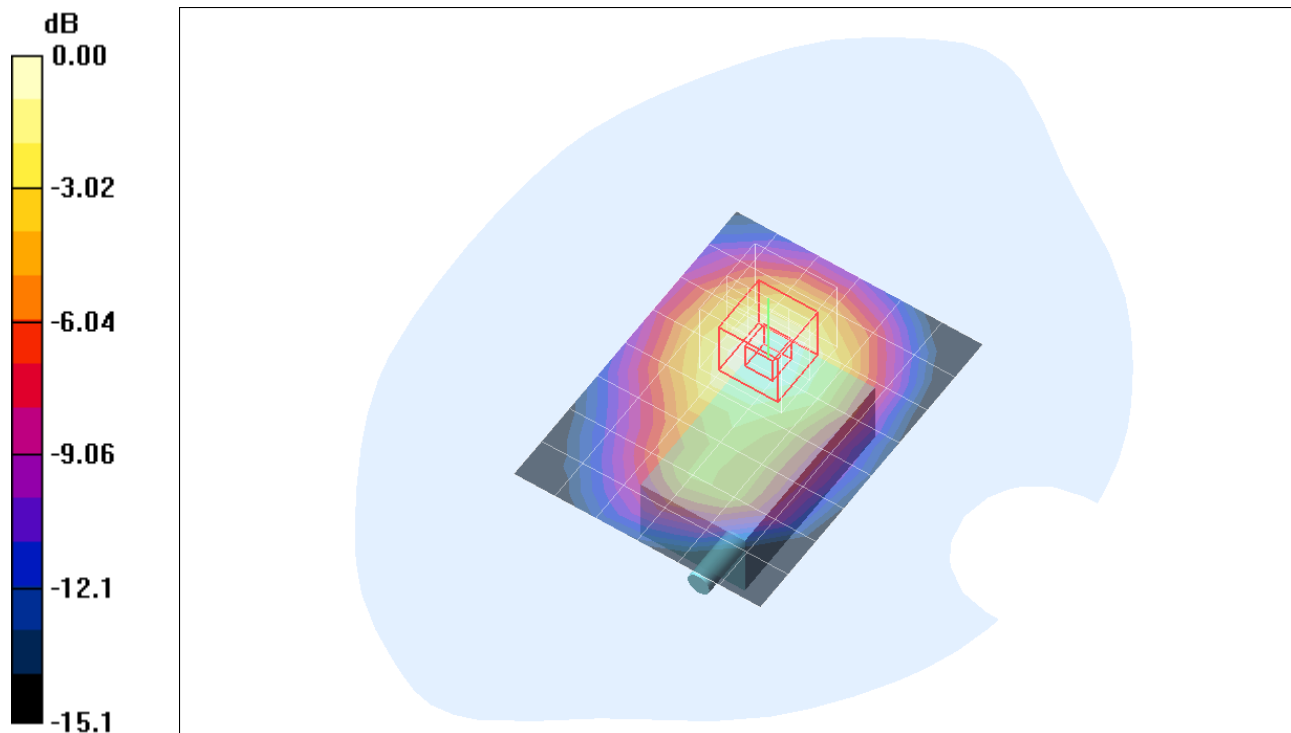

0 dB = 0.172mW/g