

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)



## Test Report

Product Name: 26.96 - 27.28MHz WIRELESS REMOTE CONTROL TOY  
THREE FREQUENCY CHANNELS - TRANSMITTER

FCC ID: GLE604393

Applicant:

**SUNCON TOYS INDUSTRY LTD.**  
**11/F, KAI TAK FACTORY BUILDING**  
**99 KING FUK STREET SANPOKONG, KOWLOON, HONG KONG**

**Date Receipt: AUGUST 6, 2004**

**Date Tested: AUGUST 6, 2004**

**APPLICANT: SUNCON TOYS INDUSTRY LTD.**

**FCC ID: GLE604393**

**REPORT #: S\SUNCONGLE\1252HT4\1252HT4TestReport.doc**

**COVER SHEET**

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## TABLE OF CONTENTS LIST

**APPLICANT:** SUNCON TOYS INDUSTRY LTD.

**FCC ID:** GLE604393

### TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST  
PAGE 2.....TEST PROCEDURE  
PAGE 3.....RADIATION INTERFERENCE TEST DATA  
PAGE 4.....OCCUPIED BANDWIDTH  
PAGE 5.....OCCUPIED BANDWIDTH PLOT

### EXHIBITS INCLUDING:

BLOCK DIAGRAM  
SCHEMATIC  
INSTRUCTION MANUAL  
LABEL SAMPLE  
LABEL LOCATION  
EXTERNAL PHOTOGRAPHS  
INTERNAL PHOTOGRAPHS  
OPERATIONAL DESCRIPTION  
TEST SET UP PHOTOGRAPHS

**APPLICANT:** SUNCON TOYS INDUSTRY LTD.

**FCC ID:** GLE604393

**REPORT #:** S\SUNCONGLE\1252HT4\1252HT4TestReport.doc

**TABLE OF CONTENTS**

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## EMC Equipment List

| Device  | Manufacturer        | Model    | Serial<br>Number         | Cal/Char<br>Date  | Due Date |
|---|---------------------|----------|--------------------------|-------------------|----------|
| 3/10-Meter<br>OATS                                | TEI                 | N/A      | N/A                      | Listed<br>3/27/04 | 3/26/07  |
| 3-Meter<br>OATS                                   | TEI                 | N/A      | N/A                      | Listed<br>1/13/03 | 1/12/06  |
| Biconnical<br>Antenna                             | Eaton               | 94455-1  | 1057                     | CAL 3/18/03       | 3/18/05  |
| Biconnical<br>Antenna                             | Eaton               | 94455-1  | 1096                     | CAL 10/1/01       | 10/1/03  |
| Biconnical<br>Antenna                             | Electro-<br>Metrics | BIA-25   | 1171                     | CAL 4/26/01       | 4/26/03  |
| Blue Tower<br>Quasi-Peak<br>Adapter               | HP                  | 85650A   | 2811A01279               | CAL 4/15/03       | 4/15/05  |
| Blue Tower<br>RF                                  | HP                  | 85685A   | 2620A00294               | CAL 4/27/04       | 4/27/06  |
| Preselector<br>Blue Tower<br>Spectrum<br>Analyzer | HP                  | 8568B    | 2928A04729<br>2848A18049 | CAL 4/15/03       | 4/15/05  |
| LISN  | Electro-<br>Metrics | ANS-25/2 | 2604                     | CAL 10/9/01       | 10/9/03  |
| LISN  | Electro-<br>Metrics | EM-7820  | 2682                     | CAL 3/12/03       | 3/12/05  |
| Log-<br>Periodic<br>Antenna                       | Eaton               | 96005    | 1243                     | CAL 5/8/03        | 5/8/05   |

APPLICANT: SUNCON TOYS INDUSTRY LTD.

FCC ID: GLE604393

REPORT #: S\SUNCONGLE\1252HT4\1252HT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## TEST PROCEDURE

**GENERAL:** This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

**RADIATION INTERFERENCE:** The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a pre-selector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 80°C with a humidity of 76%.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

**Example:**

Freq (MHz) METER READING + ACF = FS  
33            20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

**ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES:** The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

**APPLICANT:** SUNCON TOYS INDUSTRY LTD.

**FCC ID:** GLE604393

**REPORT #:** S\SUNCONGLE\1252HT4\1252HT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

**APPLICANT:** SUNCON TOYS INDUSTRY LTD.

**FCC ID:** GLE604393

**NAME OF TEST:** RADIATION INTERFERENCE

**RULES PART NO.:** 15.227

**REQUIREMENTS:** CARRIER FREQUENCY WILL NOT EXCEEDS 80 dBuV/m AT 3M.  
OUT-OF-BAND EMISSIONS SHALL NOT EXCEED:

|               |                                  |
|---------------|----------------------------------|
| 30 - 88 MHz   | 40.0 dBuV/M MEASURED AT 3 METERS |
| 88 - 216 MHz  | 43.5 dBuV/M                      |
| 216 - 960 MHz | 46.0 dBuV/m                      |
| ABOVE 960 MHz | 54.0 dBuV/m                      |

## TEST DATA:

| Emission Frequency<br>MHz | Meter Reading<br>dBuV | Ant. Polarity | Coax Loss<br>dB | Correction Factor<br>dB | Field Strength<br>dBuV/m | Margin<br>dB |
|---------------------------|-----------------------|---------------|-----------------|-------------------------|--------------------------|--------------|
| 27.15                     | 41.1                  | H             | 0.80            | 13.44                   | 55.34                    | 24.66        |
| 27.15                     | 61.4                  | V             | 0.80            | 11.99                   | 74.19                    | 5.81         |
| 54.30                     | 14.1                  | H             | 0.80            | 10.05                   | 24.95                    | 15.05        |
| 54.30                     | 20.6                  | V             | 0.80            | 9.42                    | 30.82                    | 9.18         |
| 81.45                     | 18.9                  | H             | 0.80            | 8.48                    | 28.18                    | 11.82        |
| 81.45                     | 25.0                  | V             | 0.80            | 8.72                    | 34.52                    | 5.48         |
| 108.60                    | 16.8                  | H             | 1.46            | 10.08                   | 28.34                    | 15.16        |
| 108.60                    | 17.4                  | V             | 1.46            | 10.97                   | 29.83                    | 13.67        |
| 135.75                    | 18.9                  | H             | 1.65            | 13.94                   | 34.49                    | 9.01         |
| 135.75                    | 19.5                  | V             | 1.65            | 14.85                   | 36.00                    | 7.50         |
| 162.90                    | 13.5                  | H             | 1.84            | 15.87                   | 31.21                    | 12.29        |
| 162.90                    | 17.9                  | V             | 1.84            | 16.94                   | 36.68                    | 6.82         |
| 190.05                    | 13.5                  | H             | 2.03            | 13.81                   | 29.34                    | 14.16        |
| 190.05                    | 17.9                  | V             | 2.03            | 14.61                   | 34.54                    | 8.96         |
| 217.20                    | 13.5                  | H             | 2.22            | 12.11                   | 27.83                    | 18.17        |
| 217.20                    | 25.1                  | V             | 2.22            | 11.36                   | 38.68                    | 7.32         |
| 244.35                    | 13.8                  | H             | 2.41            | 12.52                   | 28.73                    | 17.27        |
| 244.35                    | 27.7                  | V             | 2.41            | 12.16                   | 42.27                    | 3.73         |
| 271.50                    | 10.2                  | H             | 2.60            | 13.72                   | 26.52                    | 19.48        |
| 271.50                    | 24.2                  | V             | 2.60            | 12.82                   | 39.62                    | 6.38         |

**SAMPLE CALCULATION:** FSdBuV/m = MR (dBuV) + ACFdB.

**TEST PROCEDURE:** The procedure used was ANSI STANDARD C63.4-1992. The spectrum was scanned from 30 MHz to 1000 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The UUT was tested in 3 orthogonal planes.

**TEST RESULTS:** THE UNIT DOES MEET THE FCC REQUIREMENTS.

**PERFORMED BY:** NAM NGUYEN

**DATE:** AUGUST 6, 2004

**APPLICANT:** SUNCON TOYS INDUSTRY LTD.

**FCC ID:** GLE604393

**REPORT #:** S\SUNCONGLE\1252HT4\1252HT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

**APPLICANT:** SUNCON TOYS INDUSTRY LTD.

**FCC ID:** GLE604393

**NAME OF TEST:** Occupied Bandwidth

**RULES PART NO.:** 15.227

**REQUIREMENTS:** The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated to the general limits of 15.209.

**TEST DATA:**

**THE GRAPH ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR OCCUPIED BANDWIDTH FOR THIS DEVICE.**

**METHOD OF MEASUREMENT:** A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was taken. The vertical scale is set to 10 dB per division. The horizontal scale is set to 5 kHz per division.

**TEST RESULTS:** The unit DOES meet the FCC requirements.

**PERFORMED BY:** NAM NGUYEN

**DATE:** AUGUST 6, 2004

**APPLICANT:** SUNCON TOYS INDUSTRY LTD.

**FCC ID:** GLE604393

**REPORT #:** S\SUNCONGLE\1252HT4\1252HT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>


888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## OCCUPIED BANDWIDTH

### NOTES:

SUNCON TOYS INDUSTRY LTD. - FCC ID: GLE604393

OCCUPIED BANDWIDTH PLOT

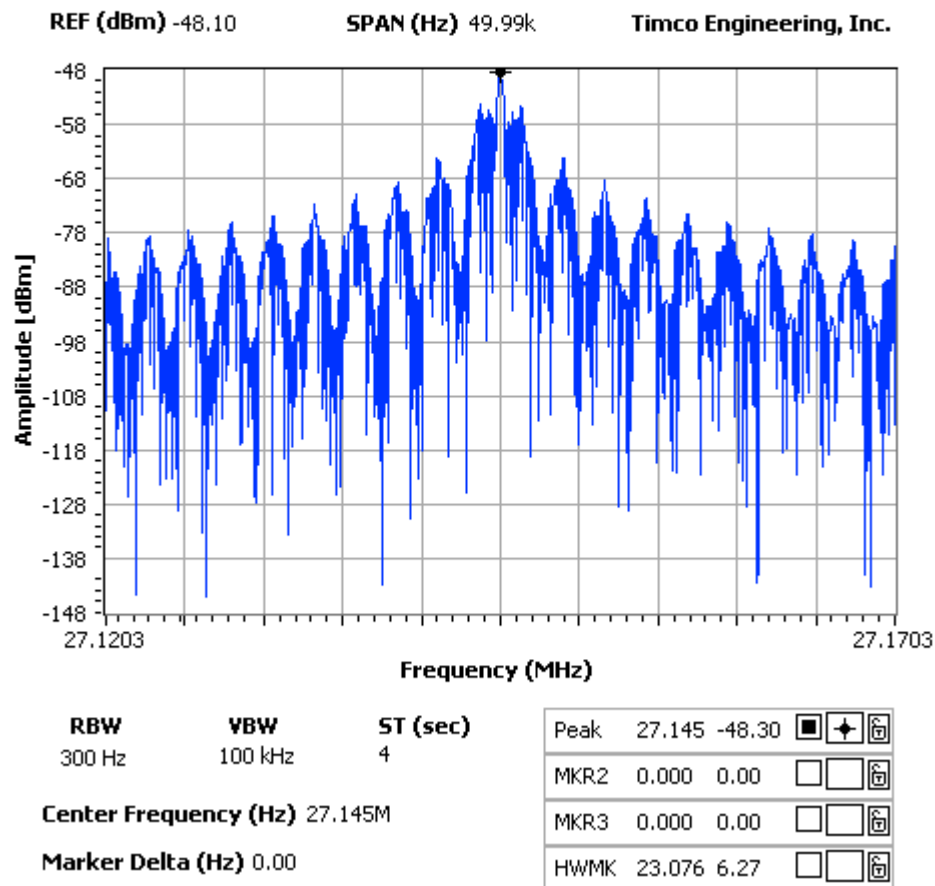

APPLICANT: SUNCON TOYS INDUSTRY LTD.

FCC ID: GLE604393

REPORT #: S\SUNCONGLE\1252HT4\1252HT4TestReport.doc