

June 05, 1998

**FEDERAL COMMUNICATIONS COMMISSION**

7435 Oakland Mills Road  
Columbia, MD 21046  
USA

**Subject:**            **Type Acceptance Application under FCC CFR 47, Parts 2            and  
90 - Radio Services Transmitters Operating in the frequency bands 403 -  
512 MHz (12.5 kHz Channel Spacing).**

**Applicant:**        **TEKLOGIX INC.**  
**Product:**         **TEKLOGIX TRX7355 VOICE/DATA FM  
MODULATED TRANSCEIVER (Base, Mobile &  
Portable)**  
**Model:**            **TRX7355**  
**FCC ID:**          **GM332D73552356781**

Dear Sir/Madam,

As appointed agent for **TEKLOGIX INC.**, please find enclosed copies of the engineering report, authorization form, application form and all required exhibits. The cheque in the amount of US \$450.00 and FCC 159 Form has been con-currently sent to Mellon Bank for this application.

This application is submitted to FCC by an electronic filing system. However, the schematics and user's manual are not available in an electronic files and they are to big to be scanned. Therefore, the hard copies of these documents will be sent to you separately by mail or courier.

If you have any queries, please do not hesitate to contact us by our TOLL FREE numbers:

OUR TELEPHONE NO.: 1-800-263-7670

Yours truly,

Tri Minh Luu, P. Eng.,  
V.P., Engineering

TML/AK

Encl.

June 05, 1998

**TEKLOGIX INC.**  
2100 Meadowvale Blvd.  
Mississauga, Ontario  
Canada, L5N 7J9

**Attn.: Mr. Sada Dharwarkar**

**Subject: Type Acceptance Application under FCC CFR 47, Parts 2 and 90 - Radio Services Transmitters Operating in the frequency bands 403 - 512 MHz (12.5 kHz Channel Spacing).**

**Product: TEKLOGIX TRX7355 VOICE/DATA FM  
MODULATED TRANSCEIVER (Base, Mobile &  
Portable)**  
**Model: TRX7355**  
**FCC ID: GM332D73552356781**

Dear Mr. Dharwarkar,

The product sample, as provided by you, has been tested and found to comply with **FCC Parts 2 & 90, Subpart I, Radio Services Operating in the Frequency Bands 403 - 512 MHz.**

We, UltraTech Engineering Labs Inc., as appointed agent for **TEKLOGIX INC.**, will prepare the application to Federal Communications Commission (F.C.C.) for authorization of this equipment under Certification requirements of F.C.C. Rules. The engineering report and required application documents have been submitted to FCC for inspection.

Enclosed you will find copies of the engineering report. If you have any queries, please do not hesitate to contact us.

Yours truly,

Tri Minh Luu, P. Eng.,  
V.P., Engineering

Encl.

# **ENGINEERING TEST REPORT**

**TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER  
(Base, Mobile & Portable)  
MODEL NO.: TRX7355**

**FCC ID: GM332D73552356781**

**FCC PART 2  
&  
PART 90, SUBPART I  
RADIO SERVICES  
FOR  
COMMERCIAL/INDUSTRIAL USES**

**UltraTech's FILE NO.: TEK-122FTX**

**TESTED FOR:**

TEKLOGIX INC.  
2100 Meadowvale Blvd.  
Mississauga, Ontario  
Canada, L5N 7J9

**TESTED BY:**

**UltraTech Engineering Labs Inc.**  
4181 Sladeview Crescent, Unit 33  
Mississauga, Ontario  
Canada L5L 5R2

**DATE:** June 05, 1998

**TABLE OF CONTENTS**

**1. EXHIBIT 1 - SUMMARY OF TEST RESULTS & GENERAL STATEMENT OF CERTIFICATION ..... 4**

**1. EXHIBIT 2 - GENERAL INFORMATION..... 6**

1.1. APPLICANT..... 6

1.2. MANUFACTURER OF THE RADIO MODULE..... 6

1.3. DESCRIPTION OF EQUIPMENT UNDER TESTS ..... 6

1.4. RELATED SUBMITTALS)/GRANT ..... 7

1.5. TEST METHODOLOGY ..... 7

1.6. TEST FACILITY ..... 8

1.7. UNITS OF MEASUREMENTS ..... 8

**2. EXHIBIT 3 - SYSTEM TEST CONFIGURATION ..... 9**

2.1. TEST SYSTEM DETAILS ..... 9

2.2. BLOCK DIAGRAMS OF TEST SET-UP.....11

2.2.1. *Teklogix TRX7355 Radio with Teklogix 6040 (Mobile) System.....11*

2.2.2. *Teklogix TRX7355 Radio with Teklogix 7025 (Portable) System.....12*

2.2.3. *Teklogix TRX7355 Radio with Teklogix 7030 (Portable) System.....13*

2.3.4. *Teklogix TRX7355 Radio with Teklogix 8045 (Mobile) System .....14*

2.3.5. *Teklogix TRX7355 Radio with Teklogix 8050 (Mobile) System .....15*

2.3.6. *Teklogix TRX7355 Radio with Teklogix 8055 (Mobile) System .....16*

2.3.7. *Teklogix TRX7355 Radio with Teklogix 8060 (Mobile) System .....17*

2.2.8. *Teklogix TRX7355 Radio with Teklogix 9130 (Base) System .....18*

2.2.9. *Teklogix TRX7355 Radio with Teklogix 9140 (Base) System .....18*

2.2.10. *Teklogix TRX7355 Radio (outside any Teklogix system) .....19*

2.3. PHOTOGRAPHS FOR TEST SETUP AT OFTS FOR RADIATED EMISSIONS MEASUREMENTS .....20

2.3.1. *Teklogix TRX7355 Radio with Teklogix 6040 (Mobile) System.....20*

2.3.2. *Teklogix TRX7355 Radio with Teklogix 7025 (Portable) System.....22*

2.3.3. *Teklogix TRX7355 Radio with Teklogix 7030 (Portable) System.....24*

2.3.4. *Teklogix TRX7355 Radio with Teklogix 8045 (Mobile) System.....26*

2.3.5. *Teklogix TRX7355 Radio with Teklogix 8050 (Mobile) System.....28*

2.3.6. *Teklogix TRX7355 Radio with Teklogix 8055 (Mobile) System.....30*

2.3.7. *Teklogix TRX7355 Radio with Teklogix 8060 (Mobile) System.....32*

2.3.8. *Teklogix TRX7355 Radio with Teklogix 9130 (Base) System .....34*

2.3.9. *Teklogix TRX7355 Radio with Teklogix 9140 (Base) System.....36*

2.3.10. *Teklogix TRX7355 Radio (outside any Teklogix system).....38*

2.4. JUSTIFICATION.....40

2.5. EUT OPERATING CONDITION .....40

2.6. SPECIAL ACCESSORIES .....40

2.7. EQUIPMENT MODIFICATIONS.....40

**3. EXHIBIT 4 - TEST DATA .....41**

3.1. POWER AND ANTENNA HEIGHT @ FCC 90.205 .....41

3.2. FREQUENCY STABILITY @ FCC 90.213.....43

3.3. AUDIO FREQUENCY RESPONSE @ FCC 2.987(A).....49

3.4. MODULATION LIMITING @ FCC 90.210.....52

3.5. EMISSION MASKS @ FCC 90.210.....55

3.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210.....57

3.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210 .....65

|         |  |     |
|---------|--|-----|
| 3.7.1.  | Teklogix TRX7355 Radio with Teklogix 6040 (Mobile) System.....   | 68  |
| 3.7.2.  | Teklogix TRX7355 Radio with Teklogix 7025 (Portable) System..... | 72  |
| 3.7.3.  | Teklogix TRX7355 Radio with Teklogix 7030 (Portable) System..... | 75  |
| 3.7.4.  | Teklogix TRX7355 Radio with Teklogix 8045 (Mobile) System.....   | 78  |
| 3.7.5.  | Teklogix TRX7355 Radio with Teklogix 8050 (Mobile) System.....   | 81  |
| 3.7.6.  | Teklogix TRX7355 Radio with Teklogix 8055 (Mobile) System.....   | 85  |
| 3.7.7.  | Teklogix TRX7355 Radio with Teklogix 8060 (Mobile) System.....   | 88  |
| 3.7.8.  | Teklogix TRX7355 Radio with Teklogix 9130 (Base) System .....    | 91  |
| 3.7.9.  | Teklogix TRX7355 Radio with Teklogix 9140 (Base) System .....    | 94  |
| 3.7.10. | Teklogix TRX7355 Radio (outside any Teklogix system).....        | 97  |
| 3.8.    | TRANSIENT FREQUENCY BEHAVIOR.....                                | 100 |

**ULTRATECH GROUP OF LABS**

File #: TEK-122FTX

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 1. EXHIBIT 1 - SUMMARY OF TEST RESULTS & GENERAL STATEMENT OF CERTIFICATION

| FCC PARAGRAPH.          | TEST REQUIREMENTS  | COMPLIANCE (YES/NO) |
|-------------------------|--|---------------------|
| 90.205 & 2.985          | RF Power Output  | Yes                 |
| 90.213 & 2.995          | Frequency Stability                                      | Yes                 |
| 90.242(b)(8) & 2.987(a) | Audio Frequency Response                                 | Yes                 |
| 90.210 & 2.987(b)       | Modulation Limiting                                      | Yes                 |
| 90.210 & 2.989          | Emission Masks   | Yes                 |
| 90.210, 2.997 & 2.991   | Emission Limits - Spurious Emissions at Antenna Terminal | Yes                 |
| 90.210, 2.997 & 2.993   | Emission Limits - Field Strength of Spurious Emissions   | Yes                 |
| 90.214                  | Transient Frequency Behavior                             | Yes                 |

**TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable)** has also been tested and found to comply with **FCC Part 15, Subpart B - Radio Receivers and Class A Digital Devices** when tested with all of the Teklogix System models: **6040 (Mobile), 7025 (Portable), 7030 (Portable), 8045 (Mobile), 8050 (Mobile), 8055 (Mobile), 8060 (Mobile), 9130 (Base) and 9140 (Base).**

The engineering test report has been documented and kept in file and it is available anytime upon FCC request.

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## TESTIMONIAL AND STATEMENT OF CERTIFICATION

*THIS IS TO CERTIFY:*

- 1) *THAT the application was prepared either by, or under the direct supervision of the undersigned.*
- 2) *THAT the measurement data supplied with the application was taken under my direction and supervision.*
- 3) *THAT the data was obtained on representative production units, representative.*
- 4) *THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.*

**Certified by:**

\_\_\_\_\_  
**Tri Minh Luu, P. Eng.**  
**V.P., Engineering**

DATE: June 05, 1998

---

### **ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 1. EXHIBIT 2 - GENERAL INFORMATION

### 1.1. APPLICANT

TEKLOGIX INC.  
2100 Meadowvale Blvd.  
Mississauga, Ontario  
Canada, L5N 7J9

Applicant's Representative: Mr. Sada Dharwarkar

### 1.2. MANUFACTURER OF THE RADIO MODULE

JOHNSON DATA TELEMETRY CORPORATION  
299 Johnson Ave., P.O. 1733  
Waseca, Minnesota  
USA 56093-0833

### 1.3. DESCRIPTION OF EQUIPMENT UNDER TESTS

|                              |  |
|------------------------------|--|
| <b>PRODUCT NAME:</b>         | TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable) |
| <b>MODEL NO.:</b>            | TRX7355  |
| <b>SERIAL NUMBER:</b>        | Pre-production   |
| <b>TYPE OF EQUIPMENT:</b>    | Radio Services Transmitters  |
| <b>SERVICES AREAS:</b>       | Commercial/Industrial  |
| <b>OPERATING FREQ.:</b>      | 403 - 512 MHz  |
| <b>CHANNEL SPACINGS:</b>     | 12.5 kHz   |
| <b>POWER RATING:</b>         | 2 Watts  |
| <b>OUTPUT IMPEDANCE:</b>     | 50 Ohms  |
| <b>DUTY CYCLE:</b>           | Continuous   |
| <b>NECESSARY BANDWIDTH:</b>  | 8.8 kHz (Voice), 13.2 kHz (Data)   |
| <b>BAUD RATES:</b>           | 4800 b/s or 9600 b/s   |
| <b>EMISSION DESIGNATION:</b> | 8K8F3E, 8K4F1D   |

---

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



(\*) For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:

(i) For FM Voice Modulation:

- Channel Spacing = 12.5 KHz, D = 1.4 KHz max. as measured, K = 1, M = 3 KHz  
 $B_n = 2M + 2DK = 2(3) + 2(1.4)(1) = \underline{8.8 \text{ KHz}}$   
 emission designation: 8K8F3E

(ii) For FM Digital Modulation:

- Channel Spacing = 12.5 KHz, D = 1.8 KHz max. as measured, K = 1  
  
 $M = 9.6/4 \text{ kb/s}$  (4 level of FM data modulation)  
 $B_n = 2M + 2DK = 2(9.6/4) + 2(1.8)(1) = \underline{8.4 \text{ KHz}}$   
 emission designation: 8K4F1D

**OSC. FREQUENCY(IES):** LO1: 52.95 MHz (High Side Injection), LO2: 450 kHz (Low Side Injection), Ref. Osc.: 17.5 MHz

**INPUT SUPPLY:** 7.2 Vdc nominal

**ASSOCIATED DEVICES:** N/A

**FCC ID:** GM332D73552356781

#### 1.4. RELATED SUBMITTALS/GRANT

Not applicable

#### 1.5. TEST METHODOLOGY

These tests were conducted on a sample of the equipment for the purpose of certification compliance with Code of Federal Regulations, Parts 2 & 90, Subpart I, Radio Services Operating in the Frequency Bands 403 - 512 MHz.

Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

---

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 1.6. TEST FACILITY

AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).

Radiated Emissions were performed at the Ultratech's 3-to-30 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3). Last Date of Site Calibration: July 16, 1997

The above test site is also filed with Interference Technology International Ltd (ITI - An EC Directive on EMC).

## 1.7. UNITS OF MEASUREMENTS

Measurements of conducted emissions are reported in units of dB referenced to one microvolt [dB(uV)].

Measurements of radiated emissions are reported in units of dB referenced to one microvolt per meter [dB(uV)/m] at the distance specified in the report, wherever it is applicable.

---

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 2. EXHIBIT 3 - SYSTEM TEST CONFIGURATION

### 2.1. TEST SYSTEM DETAILS

The following peripherals, FCC identifiers and types interconnecting cables were used with the EUT for testing:

**EUT:** TEKLOGIX INC., TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable), Model : TRX7355, S/N: pre-production, OSC. FREQ: LO1: 52.95 MHz (High Side Injection), LO2: 450 kHz (Low Side Injection), Ref. Osc.: 17.5 MHz

This radio will be tested with the following Teklogix Systems:

#### (1) Teklogix TRX7355 Radio with Teklogix 6040 (Mobile) System

- **Associated Device #1:** 13.8 Vdc Battery or External Power Supply, M/N: PSA0153, S/N: M70400416D2. Power Cable: non-shielded.
- **Peripheral Device #1:** Digital Console (Control terminal), Model VT-220, FCC Class Verifeid. I/O Cable: shielded.
- **Peripheral Device #2:** 50 Ohm, 50 Watts, RF Load. RF Cable: Shielded.

#### (2) Teklogix TRX7355 Radio with Teklogix 7025 (Portable) System

- **Peripheral Device #1:** Symbol Tech Laser Scanner, M/N: LS-3200ER-1200A, S/N: D126916, FCC Class A Verified, CE Approved. I/O Cable: shielded.
- **Peripheral Device #2:** Johnson Microphone, P.N: 589-0015-020. I/O Cable: shielded
- **Peripheral Device #3:** 50 Ohm, 50 Watts, RF Load. RF Cable: Shielded.

#### (3) Teklogix TRX7355 Radio with Teklogix 7030 (Portable) System

- **Peripheral Device #1:** Symbol Tech Laser Scanner, M/N: LS-3200ER-1200A, S/N: D126916, FCC Class A Verified, CE Approved. I/O Cable: shielded.
- **Peripheral Device #2:** Johnson Microphone, P.N: 589-0015-020. I/O Cable: shielded
- **Peripheral Device #3:** 50 Ohm, 50 Watts, RF Load. RF Cable: Shielded.

#### (4) Teklogix TRX7355 Radio with Teklogix 8045 (Mobile) System

- **Associated Device #1:** 13.8 Vdc Battery or External Power Supply, M/N: PSA0153, S/N: M70400416D2. Power Cable: non-shielded.
- **Peripheral Device #1:** Symbol Tech Laser Scanner, M/N: LS-3200ER-1200A, S/N: D126916, FCC Class A Verified, CE Approved. I/O Cable: shielded.
- **Peripheral Device #2:** Johnson Microphone, P.N: 589-0015-020. I/O Cable: shielded
- **Peripheral Device #3:** 50 Ohm, 50 Watts, RF Load. RF Cable: Shielded.

#### (5) Teklogix TRX7355 Radio with Teklogix 8050 (Mobile) System

- **Associated Device #1:** 13.8 Vdc Battery or External Power Supply, M/N: PSA0153, S/N: M70400416D2. Power Cable: non-shielded.
- **Associated Device #2:** Teklogix 8050 Keyboard. I/O Cable: Shielded
- **Peripheral Device #1:** Symbol Tech Laser Scanner, M/N: LS-3200ER-1200A, S/N: D126916, FCC Class A Verified, CE Approved. I/O Cable: shielded.
- **Peripheral Device #2:** Johnson Microphone, P.N: 589-0015-020. I/O Cable: shielded
- **Peripheral Device #3:** 50 Ohm, 50 Watts, RF Load. RF Cable: Shielded.

**(6) Teklogix TRX7355 Radio with Teklogix 8055 (Mobile) System**

- **Associated Device #1:** 13.8 Vdc Battery or External Power Supply, M/N: PSA0153, S/N: M70400416D2. Power Cable: non-shielded.
- **Peripheral Device #1:** Symbol Tech Laser Scanner, M/N: LS-3200ER-1200A, S/N: D126916, FCC Class A Verified, CE Approved. I/O Cable: shielded.
- **Peripheral Device #2:** Johnson Microphone, P.N: 589-0015-020. I/O Cable: shielded
- **Peripheral Device #3:** 50 Ohm, 50 Watts, RF Load. RF Cable: Shielded.

**(7) Teklogix TRX7355 Radio with Teklogix 8060 (Mobile) System**

- **Associated Device #1:** 13.8 Vdc Battery or External Power Supply, M/N: PSA0153, S/N: M70400416D2. Power Cable: non-shielded.
- **Associated Device #2:** Teklogix 8060 Keyboard. I/O Cable: Shielded
- **Peripheral Device #1:** Symbol Tech Laser Scanner, M/N: LS-3200ER-1200A, S/N: D126916, FCC Class A Verified, CE Approved. I/O Cable: shielded.
- **Peripheral Device #2:** Johnson Microphone, P.N: 589-0015-020. I/O Cable: shielded
- **Peripheral Device #3:** 50 Ohm, 50 Watts, RF Load. RF Cable: Shielded.

**(8) Teklogix TRX7355 Radio with Teklogix 9130 (Base) System**

- **Peripheral Device #1:** Digital Console (Control terminal), Model VT-220, FCC Class Verifeid. I/O Cable: shielded.
- **Peripheral Device #2:** 50 Ohm, 50 Watts, RF Load. RF Cable: Shielded.

**(9) Teklogix TRX7355 Radio with Teklogix 9140 (Base) System**


- **Peripheral Device #1:** Digital Console (Control terminal), Model VT-220, FCC Class Verifeid. I/O Cable: shielded.
- **Peripheral Device #2:** 50 Ohm, 50 Watts, RF Load. RF Cable: Shielded.

**(10) Teklogix TRX7355 Radio with (Outside any Teklogix System)**


- **Test Jig:** Teklogix Customed Test Jig. I/O Cable: non-shielded.
- **Peripheral Device:** 50 Ohm, 50 Watts, RF Load. RF Cable: Shielded.

2.2. BLOCK DIAGRAMS OF TEST SET-UP


2.2.1. Teklogix TRX7355 Radio with Teklogix 6040 (Mobile) System

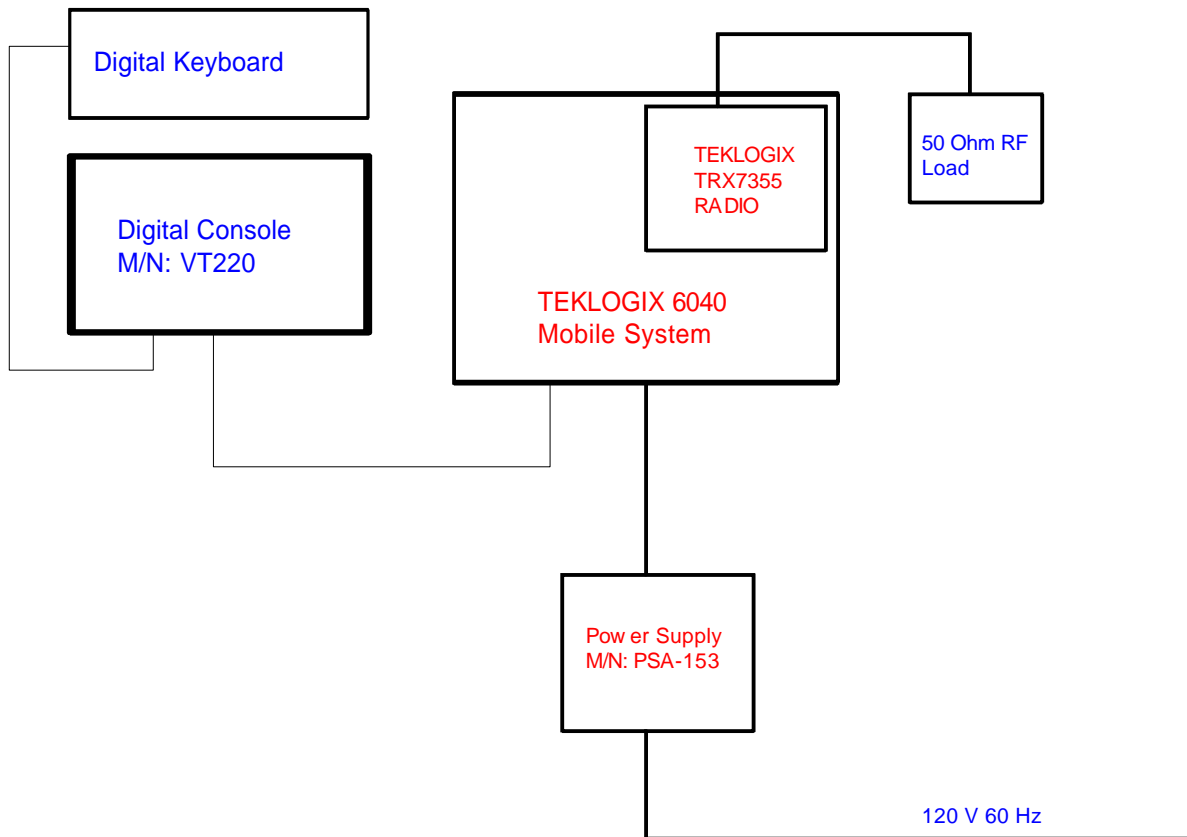

2.2.2. Teklogix TRX7355 Radio with Teklogix 7025 (Portable) System

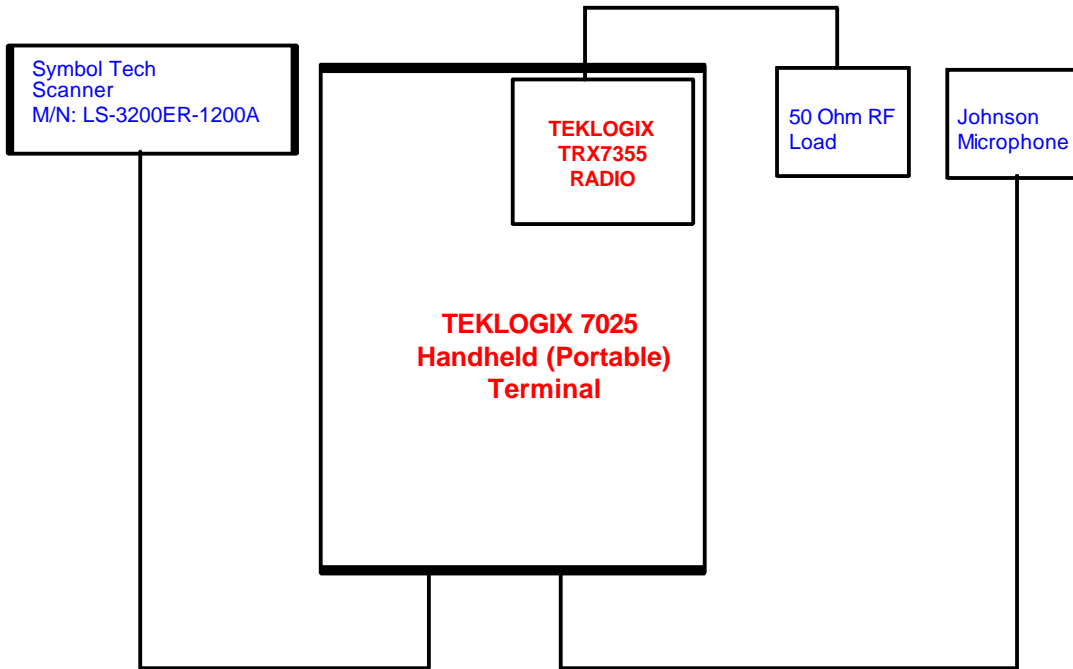


### 2.2.3. Teklogix TRX7355 Radio with Teklogix 7030 (Portable) System

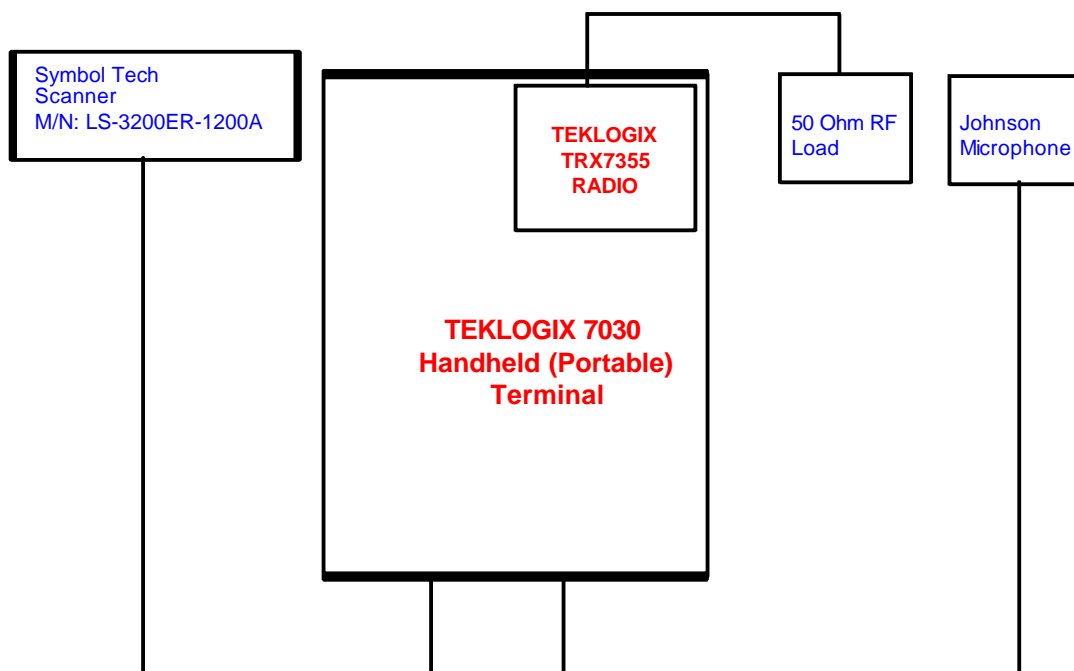


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.2.4. Teklogix TRX7355 Radio with Teklogix 8045 (Mobile) System

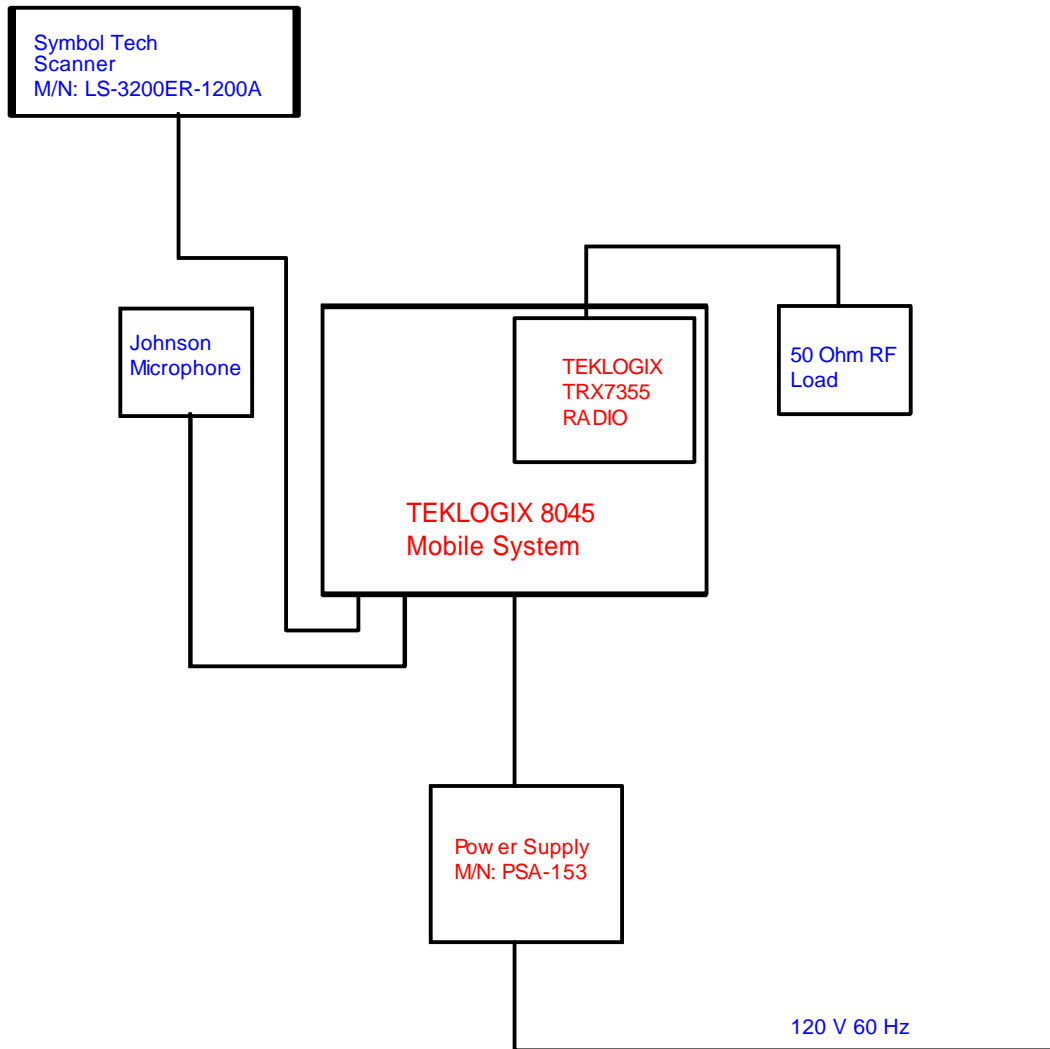





2.2.5. Teklogix TRX7355 Radio with Teklogix 8050 (Mobile) System

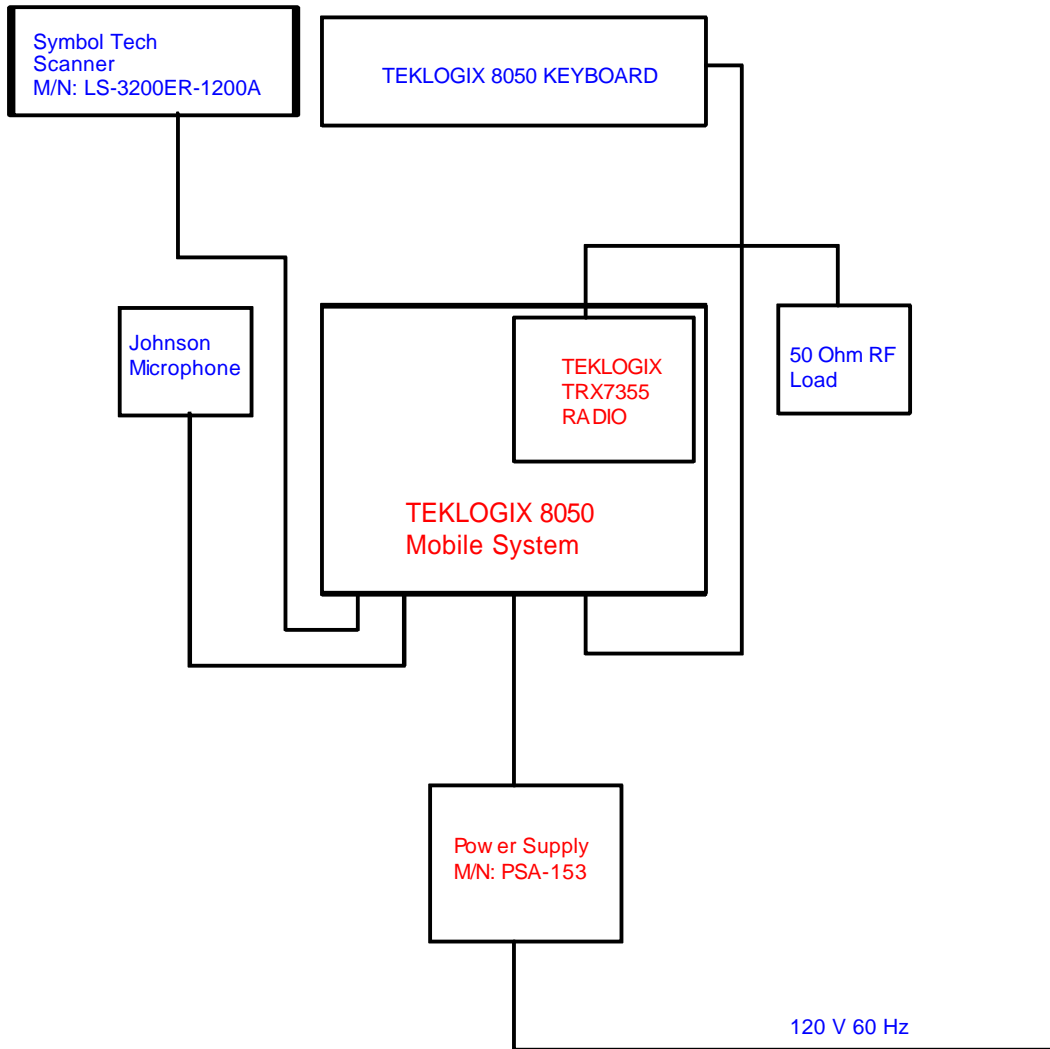


2.2.6. Teklogix TRX7355 Radio with Teklogix 8055 (Mobile) System

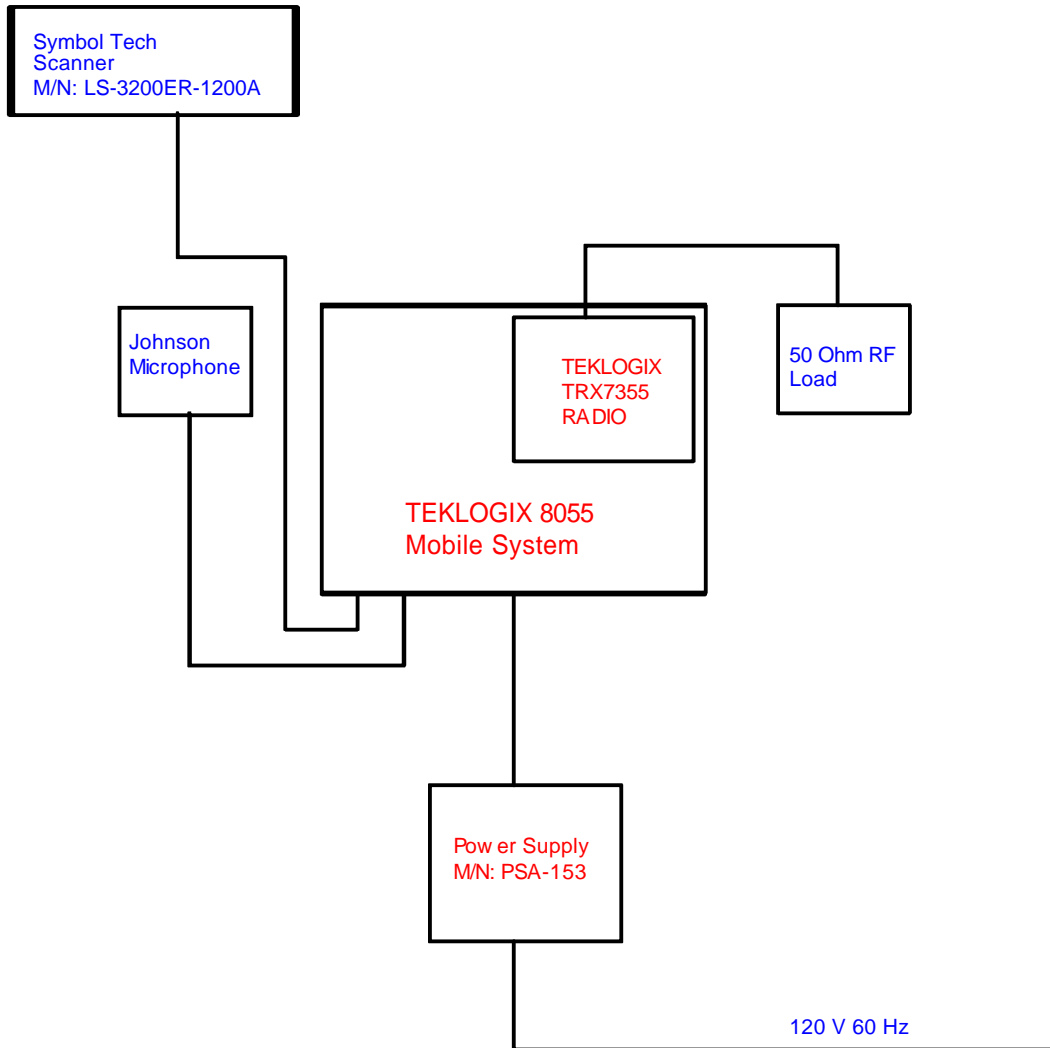


2.2.7. Teklogix TRX7355 Radio with Teklogix 8060 (Mobile) System

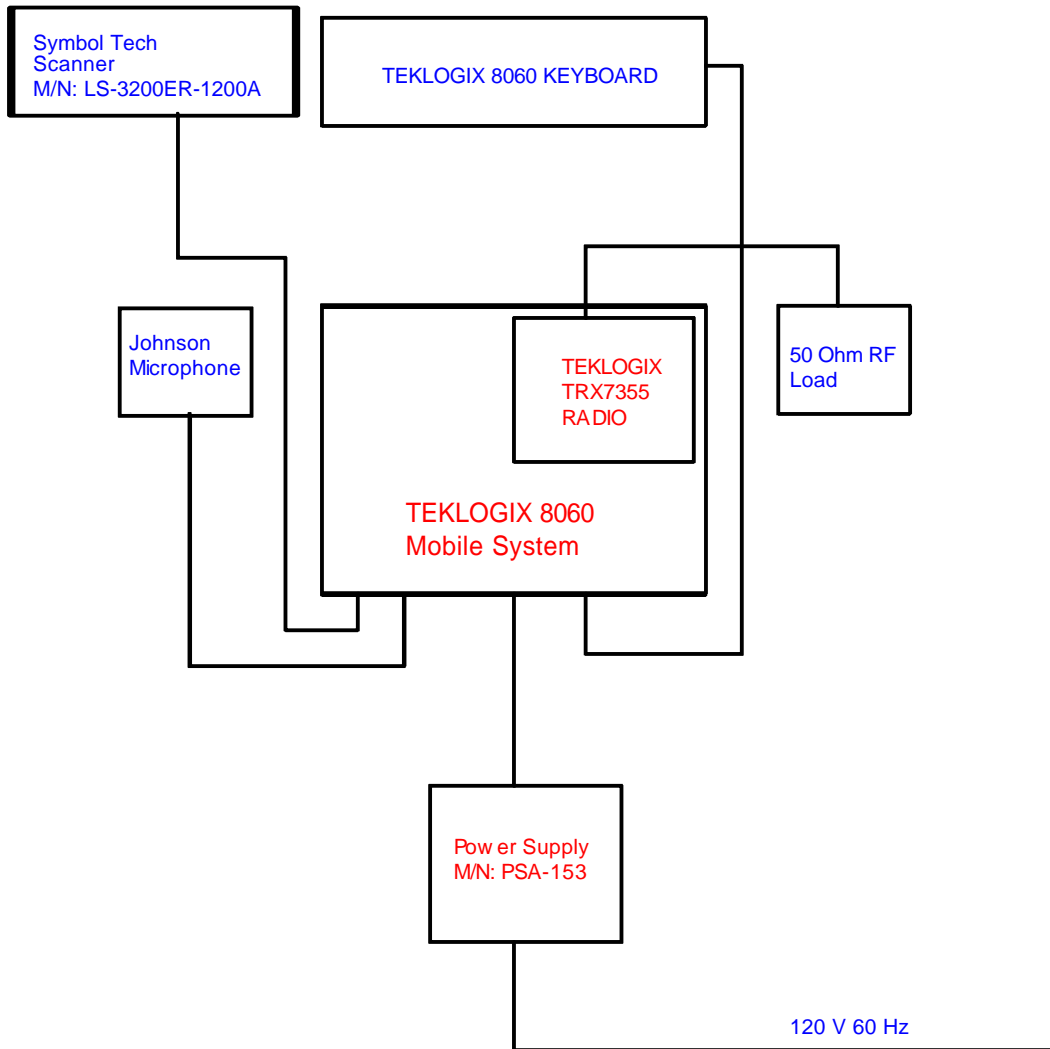

2.2.8. Teklogix TRX7355 Radio with Teklogix 9130 (Base) System

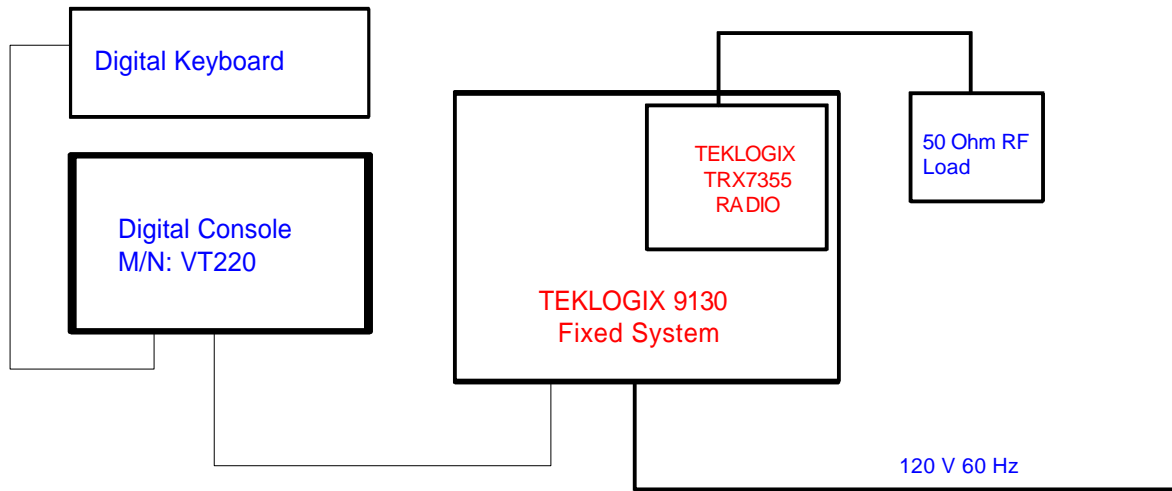

2.2.9. Teklogix TRX7355 Radio with Teklogix 9140 (Base) System

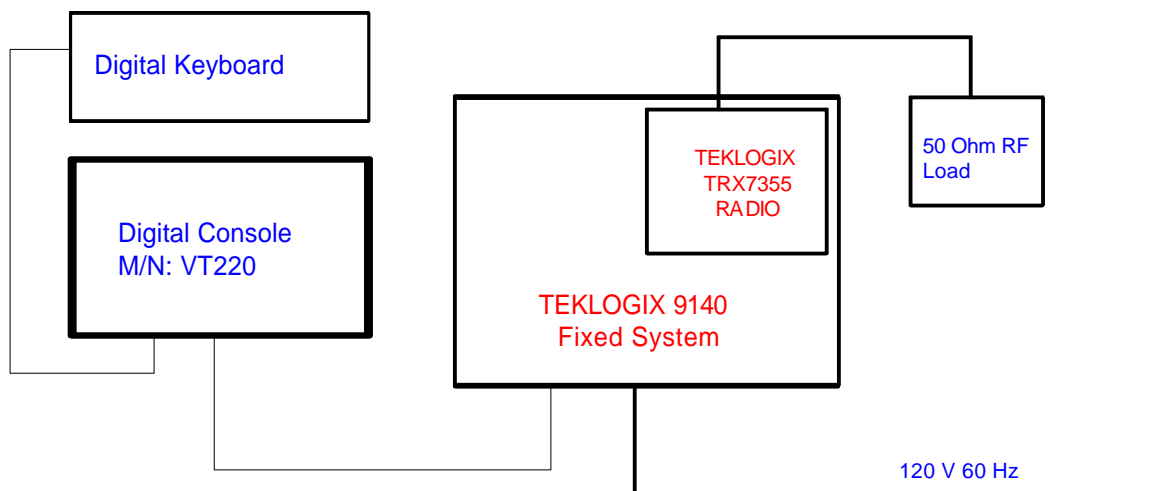

ULTRATECH GROUP OF LABS


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 2.2.10. Teklogix TRX7355 Radio (outside any Teklogix system)

The Teklogix test Jig with the radio standing by itself on a wooden table and connected to the test jig using a non-shielded ribbon cable.

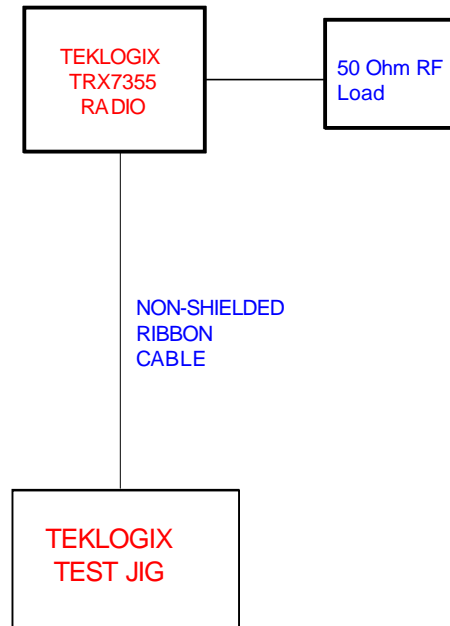

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 2.3. PHOTOGRAPHS FOR TEST SETUP AT OFTS FOR RADIATED EMISSIONS MEASUREMENTS

Tests were performed at the Open Field test Site located in Oakville, Ontario, Canada

#### 2.3.1. Teklogix TRX7355 Radio with Teklogix 6040 (Mobile) System



---

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



---

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



### 2.3.2. Teklogix TRX7355 Radio with Teklogix 7025 (Portable) System



#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)





**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 2.3.3. Teklogix TRX7355 Radio with Teklogix 7030 (Portable) System



#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**ULTRATECH GROUP OF LABS**


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



### 2.3.4. Teklogix TRX7355 Radio with Teklogix 8045 (Mobile) System

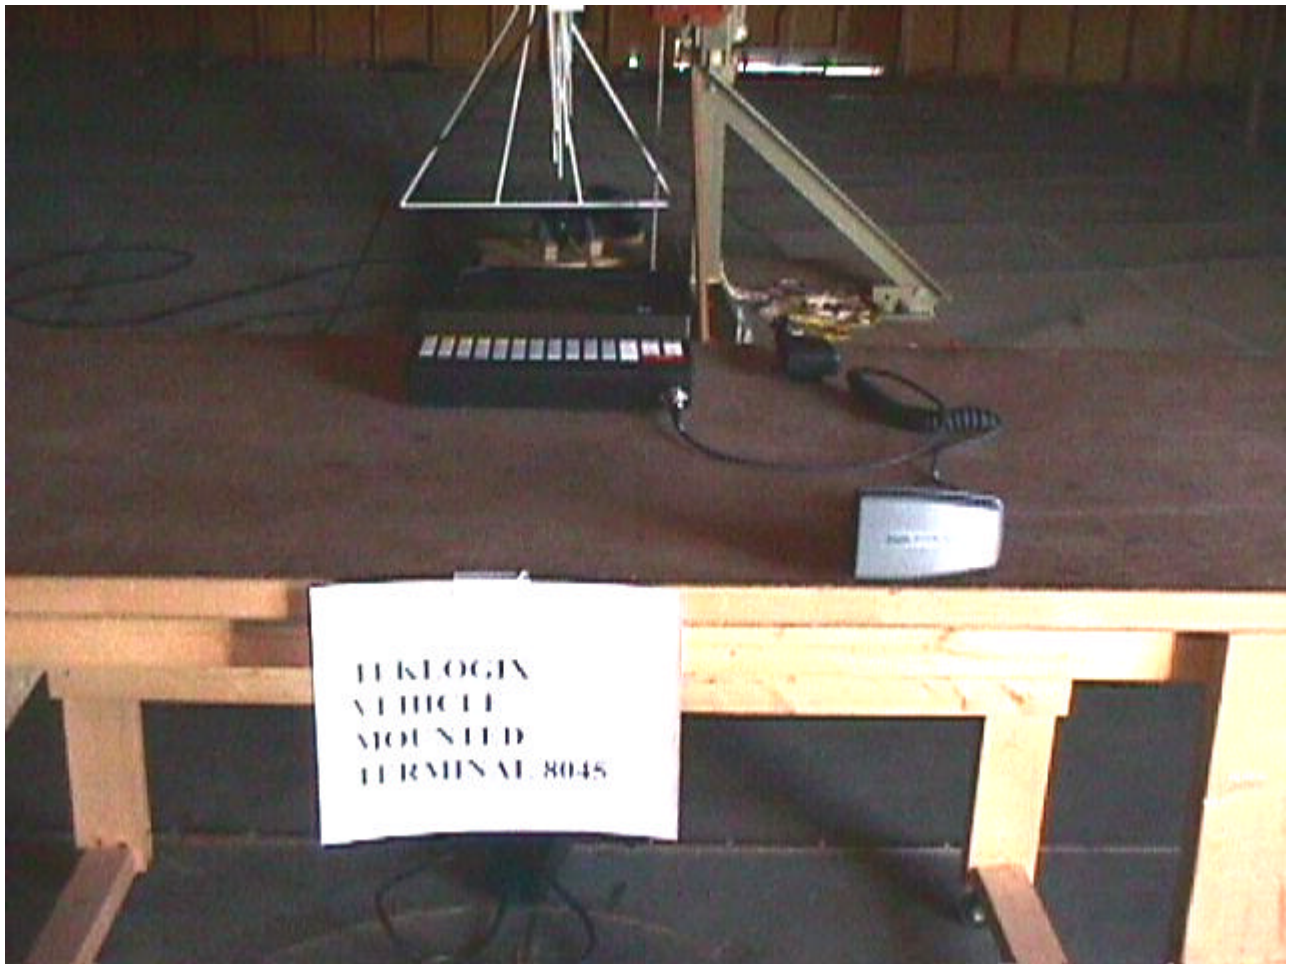

---

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 2.3.5. Teklogix TRX7355 Radio with Teklogix 8050 (Mobile) System



---

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)





**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 2.3.6. Teklogix TRX7355 Radio with Teklogix 8055 (Mobile) System



---

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)





**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 2.3.7. Teklogix TRX7355 Radio with Teklogix 8060 (Mobile) System




---

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

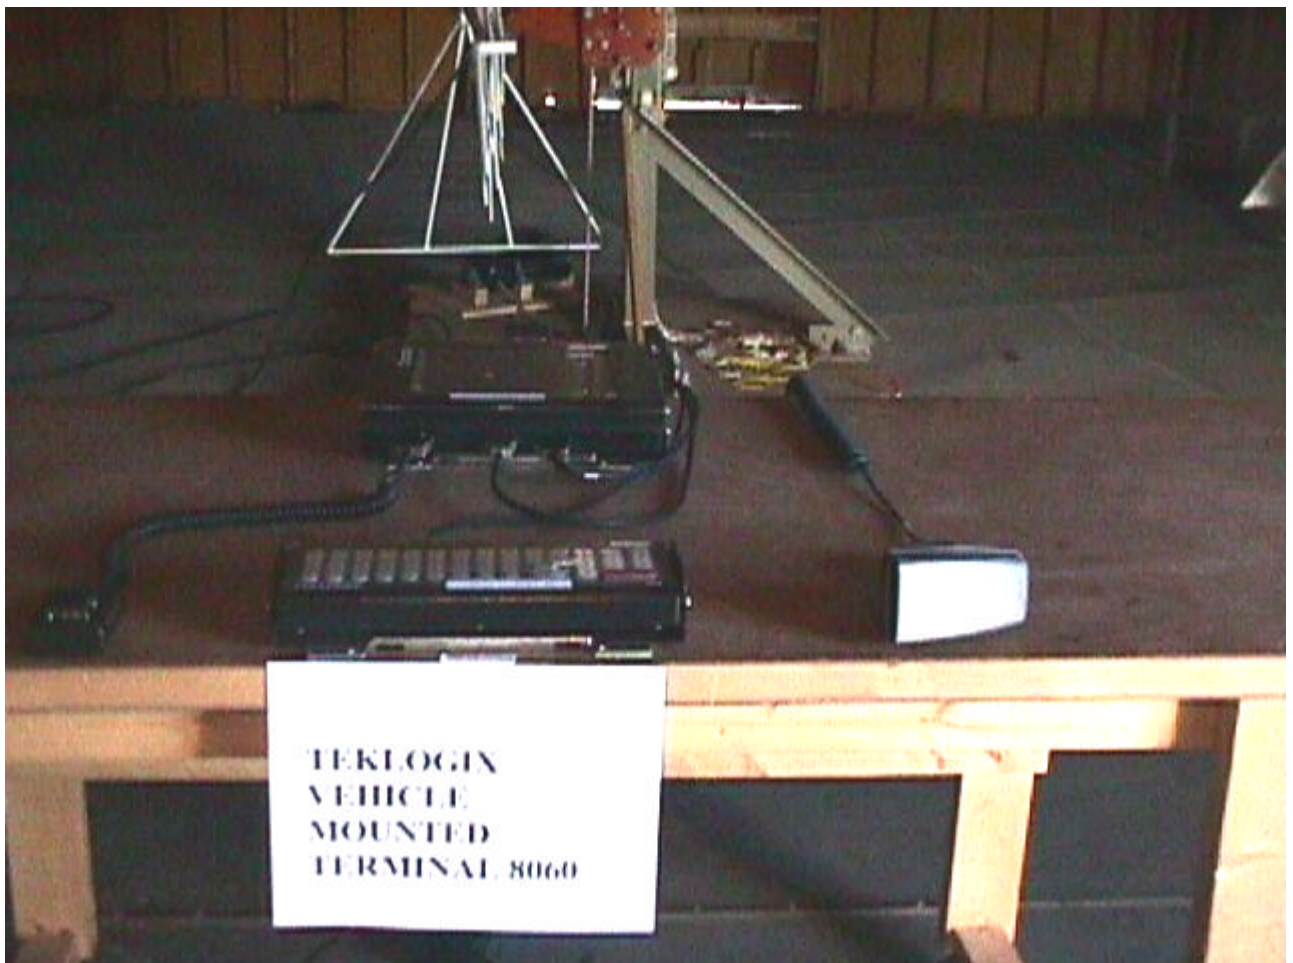

**ULTRATECH GROUP OF LABS**


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



### 2.3.8. Teklogix TRX7355 Radio with Teklogix 9130 (Base) System

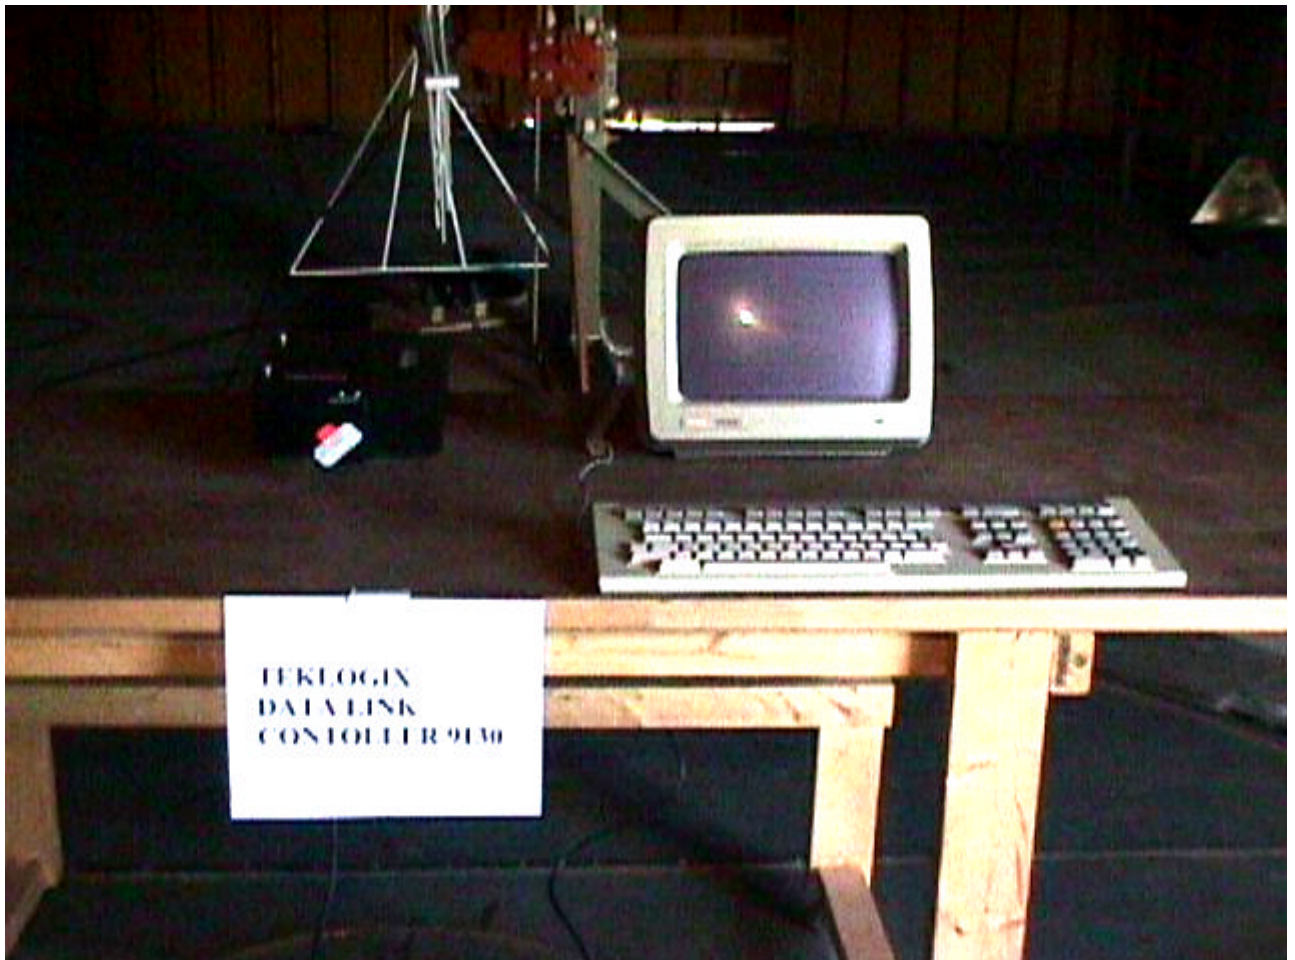

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



---

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

### 2.3.9. Teklogix TRX7355 Radio with Teklogix 9140 (Base) System



---


#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



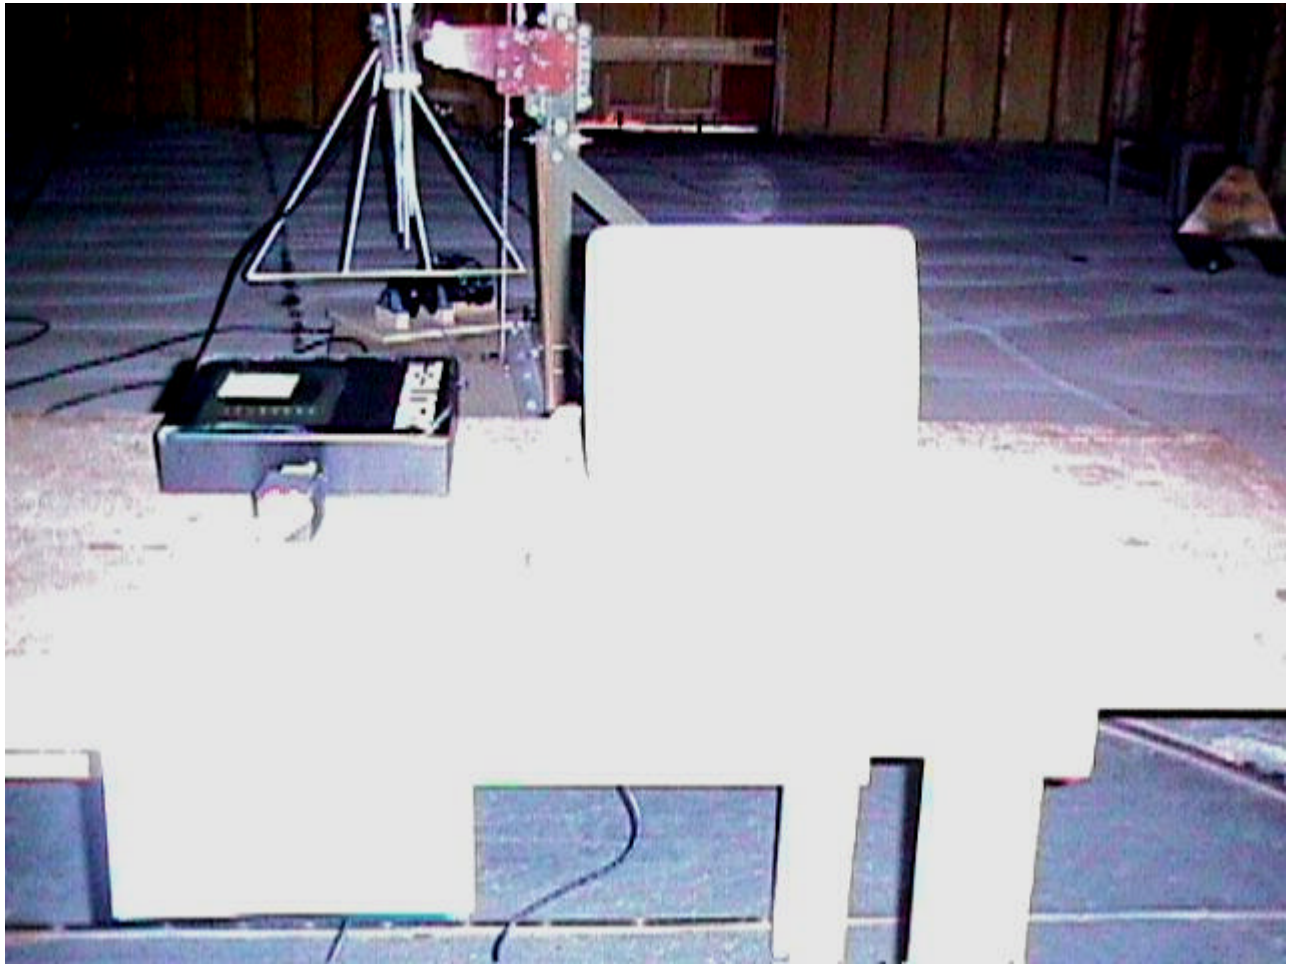

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 2.3.10. Teklogix TRX7355 Radio (outside any Teklogix system)

The Teklogix test Jig with the radio standing by itself on a wooden table and connected to the test jig using a non-shielded ribbon cable.




### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



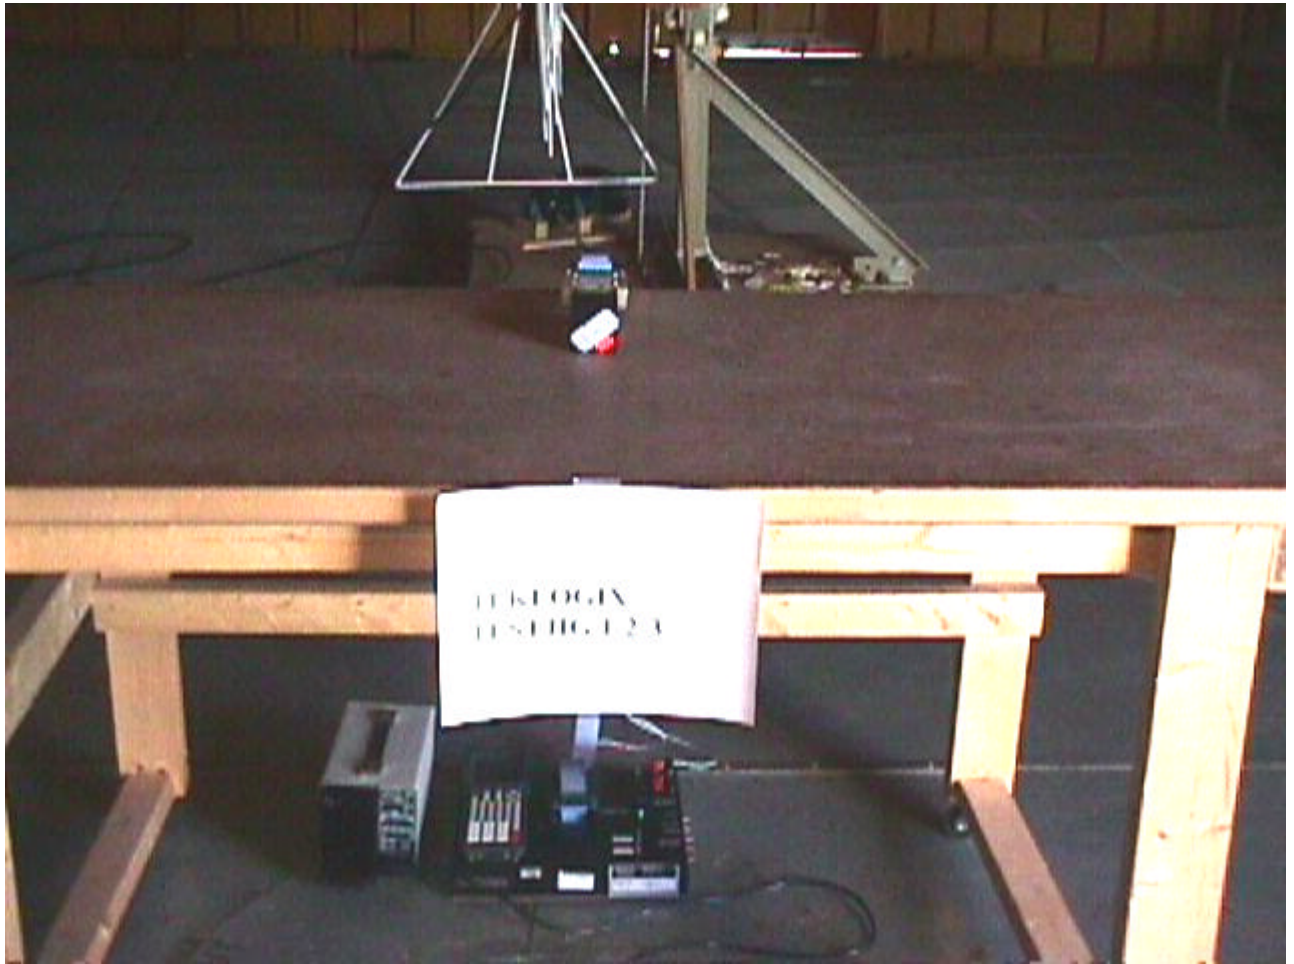

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 2.4. JUSTIFICATION

No deviation, in both configuration and operation manners, different from normal operation were required.

## 2.5. EUT OPERATING CONDITION

The EUT was operated in the transmit mode with the transmit-channels selected at lowest, middle and highest frequencies. The RF output was modulated with pseudo random data at 9600 b/s, voice (2.5 kHz Sine Wave Signal) or un-modulated wherever it is required.

## 2.6. SPECIAL ACCESSORIES

No special accessories were required.

## 2.7. EQUIPMENT MODIFICATIONS

To achieve compliance, the following change(s) were made by UltraTech's test house during compliance testing:

Not required.

---

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

### 3. EXHIBIT 4 - TEST DATA

#### 3.1. POWER AND ANTENNA HEIGHT @ FCC 90.205

**PRODUCT NAME:** TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable), Model No.: TRX7355

**FCC REQUIREMENTS:**

FCC Part 90, Para. 90.205:- Please refer to FCC CFR 47, Part 80 to End, Para. 90.205 for specification details.

**CLIMATE CONDITION:**

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

**POWER INPUT:**

7.2 Vdc nominal.

**TEST EQUIPMENT:**


- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT

**METHOD OF MEASUREMENTS:**

Refer to FCC @ 2.985

- (a) For transmitter other than single sideband, independent sideband and controlled carrier radiotelephone, power rf output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of the current and voltage on the circuit elements specified in 2.983(d)(5). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

**TEST ARRANGEMENT**



**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Tri Luu, P.Eng. Engineer Tri M. Luu, P.Eng.

**DATE:** May 25, 1998

---

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**MEASUREMENT DATA****PEAK POWER MEASUREMENT****TEST CONFIGURATION**

- The transmitter terminal was coupled to the Spectrum Analyzer through a 20 dB attenuator
- Power of the transmitter channel near the lowest, middle and highest of each frequency block/band were measured using the power meter, and the reading was corrected by added the calibrated attenuator's attenuation value and cable loss.
- The RF Output was turned on with no modulation.

| <b>TRANSMITTER CHANNEL OUTPUT</b> | <b>FUNDAMENTAL FREQUENCY (MHz)</b> | <b>MEASURED PEAK POWER (Watts)</b> | <b>PEAK POWER RATING (Watts)</b> |
|-----------------------------------|------------------------------------|------------------------------------|----------------------------------|
| Near lowest                       | 406.125                            | 1.5                                | 2.0                              |
| Middle                            | 450.000                            | 2.0                                | 2.0                              |
| Near highest                      | 470.000                            | 2.0                                | 2.0                              |

**ERP Measurements:** -Appropriate antenna type, and adjustment of power output for effective radiated power (ERP) to meet FCC limits will be performed by the manufacturer at location of installation.

**NOTE:** Since all Teklogix Systems (Models 6040, 7025, 7030, 8045, 8050, 8055, 8060, 9130 & 9140) use exactly the same TRX7355 radio transceiver, and the RF output characteristics are exactly the same. This test is required to be tested with only one system and the results shall be the same for all Teklogix systems.

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**3.2. FREQUENCY STABILITY @ FCC 90.213**

**PRODUCT NAME:** TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable), Model No.: TRX7355

**FCC REQUIREMENTS:**

FCC Part 90, Sub. I, Para. 90.213

The carrier frequency of each transmitter shall be maintain within the following tolerances from the assigned frequencies.

| FREQUENCY RANGE (MHz) | FIXED & BASE STATIONS (ppm) |          |        | MOBILE STATIONS (ppm) |          |        |          |          |        |
|-----------------------|-----------------------------|----------|--------|-----------------------|----------|--------|----------|----------|--------|
|                       |                             |          |        | > 2 W                 |          |        | ≤ 2 W    |          |        |
|                       | 6.25 kHz                    | 12.5 kHz | 25 kHz | 6.25 kHz              | 12.5 kHz | 25 kHz | 6.25 kHz | 12.5 kHz | 25 kHz |
| 403 – 512 MHz         | 0.5                         | 1.5      | 2.5    | 1.0                   | 2.5      | 5.0    | 1.0      | 2.5      | 5.0    |

**CLIMATE CONDITION:**

Standard Temperature and Humidity: Please refer to Measurement Data

**POWER INPUT:**

7.2 Vdc nominal.

**TEST EQUIPMENT:**

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Tenney Temp. & Humidity Chamber, Model T5, S/N: 9723B
- Bird Attenuator, 50 Ohm IN/OUT

**METHOD OF MEASUREMENTS:**

Refer to FCC @ 2.995

- (a) The frequency stability shall be measured with variation of ambient temperature as follows:
  - From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:

**ULTRATECH GROUP OF LABS**


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Wesite: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
  - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
  - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

### TEST ARRANGEMENT

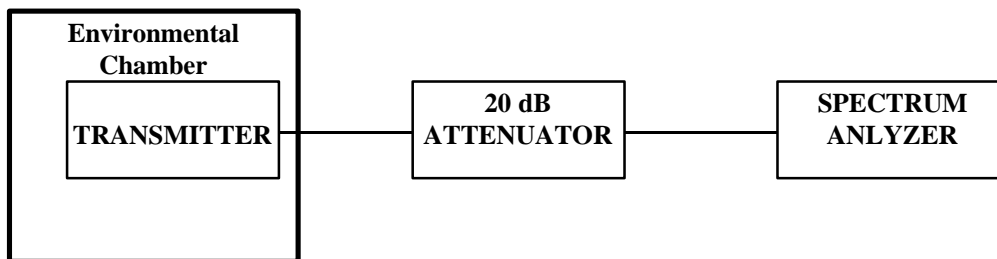

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Tri Luu, P.Eng. Engineer

**DATE:** May 27 - 28, 1998

---

### **ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**MEASUREMENT DATA**

**FREQUENCY STABILITY**

**TEST CONFIGURATION**

- The transmitter was placed inside the environmental chamber, and its output terminal was coupled to the Spectrum Analyzer through a 20 dB attenuator.
- One transmitter channel frequency was tested.
- The DUT was supplied by a variable power supply.
- The environmental chamber was cycled down to -30° C. When the chamber reaches -30° C, the EUT was powered on with the nominal voltage level, with the transmitter keyed off. The terminal remained in the chamber at -30° C for a period of 1 hour. After 1 hour the transmitter was continuously keyed on, at **full power**. The transmitter frequency of the terminal was measured from the spectrum analyzer every minute for a period of 10 minutes.
- After 10 minutes the variable power supply was adjusted to supply the EUT with voltage of 85% nominal voltage level and measurement was repeated.
- After 10 minutes the variable power supply was adjusted to supply the EUT with voltage of 115% nominal voltage level and measurement was repeated,
- When the measurement complete, the transmitter was keyed off and the chamber was cycled up to 10° C steps. The EUT remained powered up (unkeyed) at -20° C for a minimum period of 1 hour, after which the measurements will be made as outlined above.
- The above was repeated for -10, 0, 20, 30, 40 and 50 degrees Celsius.

|  |   |
|--|---|
| <b>Product Name<br/>Model No.</b>            | <b>TEKLOGIX TRX7355 VOICE/DATA FM<br/>MODULATED TRANSCEIVER (Base, Mobile &amp;<br/>Portable)<br/>TRX7355</b> |
| <b>Centre Frequency</b>                      | 403 MHz   |
| <b>Full Power Level</b>                      | 1.5 Watts   |
| <b>Frequency Tolerance Limit</b>             | 604 Hz or 0.00015%  |
| <b>Max. Frequency Tolerance<br/>Measured</b> | ± 230 Hz or ± 0.000057%   |
| <b>Input Voltage Rating</b>                  | 7.2 Vdc   |

**NOTE:** Since all Teklogix Systems (Models 6040, 7025, 7030, 8045, 8050, 8055, 8060, 9130 & 9140) use exactly the same TRX7355 radio transceiver, and the RF output characteristics are exactly the same. This test is required to be tested with only one system and the results shall be the same for all Teklogix systems.

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

|                    |                         | CENTRE FREQUENCY & RF POWER OUTPUT VARIATION |      |  |      |  |     |
|--------------------|-------------------------|--|------|--|------|--|-----|
| AMBIENT TEMP. (°C) | KEYED-ON TIME (Minutes) | Supply Voltage (Nominal) 7.2 Volts dc        |      | Supply Voltage (85% of Nominal) 6.1 Volts dc |      | Supply Voltage (115% of Nominal) 8.3 Volts |     |
|                    |                         | Hz   | dB   | Hz   | dB   | Hz   | dB  |
|                    |                         | -30  | 0    | -216   | +0.8 | N/A  | N/A |
|                    | 1                       | -227   | +0.8 | N/A  | N/A  | N/A  | N/A |
|                    | 2                       | -223   | +0.8 | N/A  | N/A  | N/A  | N/A |
|                    | 3                       | -230   | +0.8 | N/A  | N/A  | N/A  | N/A |
|                    | 4                       | -216   | +0.8 | N/A  | N/A  | N/A  | N/A |
|                    | 5                       | -222   | +0.8 | N/A  | N/A  | N/A  | N/A |
|                    | 6                       | -210   | +0.8 | N/A  | N/A  | N/A  | N/A |
|                    | 7                       | -199   | +0.8 | N/A  | N/A  | N/A  | N/A |
|                    | 8                       | -194   | +0.8 | N/A  | N/A  | N/A  | N/A |
|                    | 9                       | -184   | +0.8 | N/A  | N/A  | N/A  | N/A |
|                    | 10                      | -177   | +0.8 | N/A  | N/A  | N/A  | N/A |
| -20                | 0                       | -16  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 1                       | -22  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 2                       | -10  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 3                       | -30  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 4                       | -26  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 5                       | -36  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 6                       | -44  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 7                       | -53  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 8                       | -52  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 9                       | -54  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 10                      | -52  | +0.5 | N/A  | N/A  | N/A  | N/A |
| -10                | 0                       | -44  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 1                       | -44  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 2                       | -44  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 3                       | -37  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 4                       | -54  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 5                       | -47  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 6                       | -43  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 7                       | -43  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 8                       | -42  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 9                       | -42  | +0.5 | N/A  | N/A  | N/A  | N/A |
|                    | 10                      | -47  | +0.5 | N/A  | N/A  | N/A  | N/A |
| 0                  | 0                       | +70  | +0.3 | N/A  | N/A  | N/A  | N/A |
|                    | 1                       | +95  | +0.3 | N/A  | N/A  | N/A  | N/A |
|                    | 2                       | +81  | +0.3 | N/A  | N/A  | N/A  | N/A |
|                    | 3                       | +73  | +0.3 | N/A  | N/A  | N/A  | N/A |
|                    | 4                       | +90  | +0.3 | N/A  | N/A  | N/A  | N/A |
|                    | 5                       | +75  | +0.3 | N/A  | N/A  | N/A  | N/A |
|                    | 6                       | +80  | +0.3 | N/A  | N/A  | N/A  | N/A |
|                    | 7                       | +85  | +0.3 | N/A  | N/A  | N/A  | N/A |
|                    | 8                       | +84  | +0.3 | N/A  | N/A  | N/A  | N/A |
|                    | 9                       | +88  | +0.3 | N/A  | N/A  | N/A  | N/A |
|                    | 10                      | +81  | +0.3 | N/A  | N/A  | N/A  | N/A |

**ULTRATECH GROUP OF LABS**

File #: TEK-122FTX

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



| AMBIENT TEMP. (°C) | KEYED-ON TIME (Minutes) | CENTRE FREQUENCY & RF POWER OUTPUT VARIATION |      |   |      |   |      |
|--------------------|-------------------------|--|------|---|------|---|------|
|                    |                         | Supply Voltage (Nominal)<br>7.2 Volts dc     |      | Supply Voltage (85% of Nominal)<br>6.1 Volts dc |      | Supply Voltage (115% of Nominal)<br>8.3 Volts |      |
|                    |                         | Hz   | dB   | Hz  | dB   | Hz  | dB   |
| <b>+10</b>         | <b>0</b>                | +151   | +0.1 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>1</b>                | +148   | +0.1 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>2</b>                | +153   | +0.1 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>3</b>                | +147   | +0.1 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>4</b>                | +163   | +0.1 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>5</b>                | +157   | +0.1 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>6</b>                | +160   | +0.1 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>7</b>                | +160   | +0.1 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>8</b>                | +163   | +0.1 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>9</b>                | +164   | +0.1 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>10</b>               | +158   | +0.1 | N/A   | N/A  | N/A   | N/A  |
| <b>+20</b>         | <b>0</b>                | +110   | 0.0  | +144  | -2.4 | +168  | +0.9 |
|                    | <b>1</b>                | +130   | 0.0  | +145  | -2.4 | +163  | +0.9 |
|                    | <b>2</b>                | +128   | 0.0  | +141  | -2.4 | +165  | +0.9 |
|                    | <b>3</b>                | +127   | 0.0  | +153  | -2.4 | +161  | +0.9 |
|                    | <b>4</b>                | +134   | 0.0  | +153  | -2.4 | +170  | +0.9 |
|                    | <b>5</b>                | +123   | 0.0  | +145  | -2.4 | +170  | +0.9 |
|                    | <b>6</b>                | +137   | 0.0  | +157  | -2.4 | +171  | +0.9 |
|                    | <b>7</b>                | +138   | 0.0  | +160  | -2.4 | +181  | +0.9 |
|                    | <b>8</b>                | +117   | 0.0  | +154  | -2.4 | +178  | +0.9 |
|                    | <b>9</b>                | +123   | 0.0  | +151  | -2.4 | +175  | +0.9 |
|                    | <b>10</b>               | +121   | 0.0  | +153  | -2.4 | +187  | +0.9 |
| <b>+30</b>         | <b>0</b>                | +200   | 0.0  | N/A   | N/A  | N/A   | N/A  |
|                    | <b>1</b>                | +214   | 0.0  | N/A   | N/A  | N/A   | N/A  |
|                    | <b>2</b>                | +208   | 0.0  | N/A   | N/A  | N/A   | N/A  |
|                    | <b>3</b>                | +210   | 0.0  | N/A   | N/A  | N/A   | N/A  |
|                    | <b>4</b>                | +205   | 0.0  | N/A   | N/A  | N/A   | N/A  |
|                    | <b>5</b>                | +203   | 0.0  | N/A   | N/A  | N/A   | N/A  |
|                    | <b>6</b>                | +214   | 0.0  | N/A   | N/A  | N/A   | N/A  |
|                    | <b>7</b>                | +230   | 0.0  | N/A   | N/A  | N/A   | N/A  |
|                    | <b>8</b>                | +210   | 0.0  | N/A   | N/A  | N/A   | N/A  |
|                    | <b>9</b>                | +213   | 0.0  | N/A   | N/A  | N/A   | N/A  |
|                    | <b>10</b>               | +197   | 0.0  | N/A   | N/A  | N/A   | N/A  |
| <b>+40</b>         | <b>0</b>                | -52  | -0.5 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>1</b>                | -40  | -0.5 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>2</b>                | -39  | -0.5 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>3</b>                | -39  | -0.5 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>4</b>                | -53  | -0.5 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>5</b>                | -32  | -0.5 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>6</b>                | -39  | -0.5 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>7</b>                | -42  | -0.5 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>8</b>                | -54  | -0.5 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>9</b>                | -42  | -0.5 | N/A   | N/A  | N/A   | N/A  |
|                    | <b>10</b>               | -44  | -0.5 | N/A   | N/A  | N/A   | N/A  |

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

|                    |                         | CENTRE FREQUENCY & RF POWER OUTPUT VARIATION |          |   |      |   |     |
|--------------------|-------------------------|--|----------|---|------|---|-----|
| AMBIENT TEMP. (°C) | KEYED-ON TIME (Minutes) | Supply Voltage (Nominal)<br>7.2 Volts dc     |          | Supply Voltage (85% of Nominal)<br>6.1 Volts dc |      | Supply Voltage (115% of Nominal)<br>8.3 Volts |     |
|                    |                         | Hz   | dB       | Hz  | dB   | Hz  | dB  |
|                    |                         | <b>+50</b>                                   | <b>0</b> | -19   | -0.5 | N/A   | N/A |
|                    | <b>1</b>                | -13  | -0.5     | N/A   | N/A  | N/A   | N/A |
|                    | <b>2</b>                | -6   | -0.5     | N/A   | N/A  | N/A   | N/A |
|                    | <b>3</b>                | +1   | -0.5     | N/A   | N/A  | N/A   | N/A |
|                    | <b>4</b>                | +7   | -0.5     | N/A   | N/A  | N/A   | N/A |
|                    | <b>5</b>                | +6   | -0.5     | N/A   | N/A  | N/A   | N/A |
|                    | <b>6</b>                | +8   | -0.5     | N/A   | N/A  | N/A   | N/A |
|                    | <b>7</b>                | +4   | -0.5     | N/A   | N/A  | N/A   | N/A |
|                    | <b>8</b>                | +7   | -0.5     | N/A   | N/A  | N/A   | N/A |
|                    | <b>9</b>                | +20  | -0.5     | N/A   | N/A  | N/A   | N/A |
|                    | <b>10</b>               | -10  | -0.5     | N/A   | N/A  | N/A   | N/A |
| <b>+60</b>         | <b>0</b>                | +4   | -0.9     | N/A   | N/A  | N/A   | N/A |
|                    | <b>1</b>                | +16  | -0.9     | N/A   | N/A  | N/A   | N/A |
|                    | <b>2</b>                | +23  | -0.9     | N/A   | N/A  | N/A   | N/A |
|                    | <b>3</b>                | +18  | -0.9     | N/A   | N/A  | N/A   | N/A |
|                    | <b>4</b>                | +24  | -0.9     | N/A   | N/A  | N/A   | N/A |
|                    | <b>5</b>                | +28  | -0.9     | N/A   | N/A  | N/A   | N/A |
|                    | <b>6</b>                | +31  | -0.9     | N/A   | N/A  | N/A   | N/A |
|                    | <b>7</b>                | +27  | -0.9     | N/A   | N/A  | N/A   | N/A |
|                    | <b>8</b>                | +28  | -0.9     | N/A   | N/A  | N/A   | N/A |
|                    | <b>9</b>                | +27  | -0.9     | N/A   | N/A  | N/A   | N/A |
|                    | <b>10</b>               | +23  | -0.9     | N/A   | N/A  | N/A   | N/A |

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**3.3. AUDIO FREQUENCY RESPONSE @ FCC 2.987(A)**

**PRODUCT NAME:** TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable), Model No.: TRX7355

**FCC REQUIREMENTS:**

FCC Part 2, Sub. J, Para. 2.987(a)

Compliance limit is not applicable. The following limit is a guideline for the audio lowpass filter but it is not the requirement.

The attenuation of lowpass filter between the frequencies of 3 KHz and 20 KHz shall be greater than the attenuation at 1KHz by at least:  $60\text{Log}_{10}(f/3)$  decibels where "f" is the frequency in KHz. At frequency above 20 KHz, the attenuation shall be 50 dB greater than the attenuation at 1 KHz.

**CLIMATE CONDITION:**

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

**POWER INPUT:**


7.2 Vdc nominal.

**TEST EQUIPMENT:**

- Audio Oscillator, HP, Model 204C, OUT FREQ.: 0-1.2 MHz, S/N: 0989A08798
- FFT (Audio) Spectrum Analyzer, Advantest, Model R9211E, Input Impedance: 1M-Ohms, Freq. Range: 10 mHz - 100 kHz.

**METHOD OF MEASUREMENTS:**

The rated audio input signal was applied to the input of the audio lowpass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal of audio lowpass filter (or of all modulation stages) were then measured and recorded using the FFT (Audio) spectrum analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 kHz.

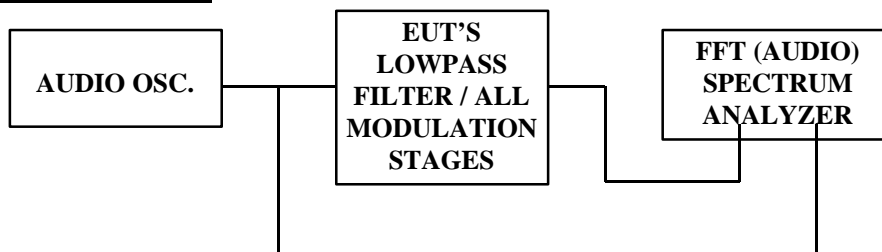**TEST ARRANGEMENT****ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**TEST RESULTS:** Conforms.**TESTED PERSONNEL:** Tri Luu, P.Eng. Engineer**DATE:** May 28, 1998**MEASUREMENT DATA**

**NOTE:** Since all Teklogix Systems (Models 6040, 7025, 7030, 8045, 8050, 8055, 8060, 9130 & 9140) use exactly the same TRX7355 radio transceiver, and the RF output characteristics are exactly the same. This test is required to be tested with only one system and the results shall be the same for all Teklogix systems.

**AUDIO FREQUENCY RESPONSE OF THE LOWPASS FILTER****Audio Input Rating: 1 Vrms**

| FREQUENCY<br>(kHz) | AUDIO<br>IN<br>(dBV) | AUDIO<br>OUT<br>(dBV) | ATTEN.<br>(OUT - IN)<br>(dB) | ATTEN.<br>wrt. 1 kHz<br>(dB) | FCC LIMIT<br>@2.987(a)<br>(dB) | PASS/<br>FAIL |
|--------------------|----------------------|-----------------------|------------------------------|------------------------------|--------------------------------|---------------|
| 0.1                | 0.0                  | -5.1                  | -5.1                         | 0.8                          | 0                              | PASS          |
| 0.20               | 0.0                  | -5.2                  | -5.2                         | 0.7                          | 0.0                            | PASS          |
| 0.40               | 0.0                  | -5.3                  | -5.3                         | 0.6                          | 0.0                            | PASS          |
| 0.60               | 0.0                  | -5.5                  | -5.5                         | 0.4                          | 0.0                            | PASS          |
| 0.80               | 0.0                  | -5.6                  | -5.6                         | 0.3                          | 0.0                            | PASS          |
| 1.00               | 0.0                  | -5.9                  | -5.9                         | 0.0                          | 0.0                            | PASS          |
| 2.00               | 0.0                  | -7.6                  | -7.6                         | -1.7                         | 0.0                            | PASS          |
| 3.00               | 0.0                  | -10.7                 | -10.7                        | -4.8                         | 0.0                            | PASS          |
| 3.50               | 0.0                  | -13.1                 | -13.1                        | -7.2                         | -4.0                           | PASS          |
| 4.00               | 0.0                  | -15.7                 | -15.7                        | -9.8                         | -7.5                           | PASS          |
| 4.50               | 0.0                  | -18.7                 | -18.7                        | -12.8                        | -10.6                          | PASS          |
| 5.00               | 0.0                  | -21.7                 | -21.7                        | -15.8                        | -13.3                          | PASS          |
| 6.00               | 0.0                  | -27.6                 | -27.6                        | -21.7                        | -18.1                          | PASS          |
| 7.00               | 0.0                  | -33.4                 | -33.4                        | -27.5                        | -22.1                          | PASS          |
| 8.00               | 0.0                  | -38.5                 | -38.5                        | -32.6                        | -25.6                          | PASS          |
| 9.00               | 0.0                  | -42.9                 | -42.9                        | -37.0                        | -28.6                          | PASS          |
| 10.00              | 0.0                  | -47.2                 | -47.2                        | -41.3                        | -31.4                          | PASS          |
| 12.00              | 0.0                  | -54.8                 | -54.8                        | -48.9                        | -36.1                          | PASS          |
| 14.00              | 0.0                  | -61.8                 | -61.8                        | -55.9                        | -40.1                          | PASS          |
| 16.00              | 0.0                  | -74.0                 | -74.0                        | -68.1                        | -43.6                          | PASS          |
| 18.00              | 0.0                  | -74.0                 | -74.0                        | -68.1                        | -46.7                          | PASS          |
| 20.00              | 0.0                  | -79.3                 | -79.3                        | -73.4                        | -49.4                          | PASS          |
| 25.00              | 0.0                  | -79.9                 | -79.9                        | -74.0                        | -50.0                          | PASS          |
| 30.00              | 0.0                  | -76.3                 | -76.3                        | -70.4                        | -50.0                          | PASS          |
| 35.00              | 0.0                  | -74.3                 | -74.3                        | -68.4                        | -50.0                          | PASS          |
| 40.00              | 0.0                  | -73.6                 | -73.6                        | -67.7                        | -50.0                          | PASS          |
| 45.00              | 0.0                  | -72.2                 | -72.2                        | -66.3                        | -50.0                          | PASS          |
| 50.00              | 0.0                  | -71.2                 | -71.2                        | -65.3                        | -50.0                          | PASS          |


**ULTRATECH GROUP OF LABS**

4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

LOWPASS FILTER - AUDIO FREQUENCY REPSONSE wrt. 1 kHz  
 @ FCC 2.987(a) - 12.5 kHz Channel Spacing  
 TEKLOGIX TRX7355 VOICE/DATA RADIO TRANSCEIVER

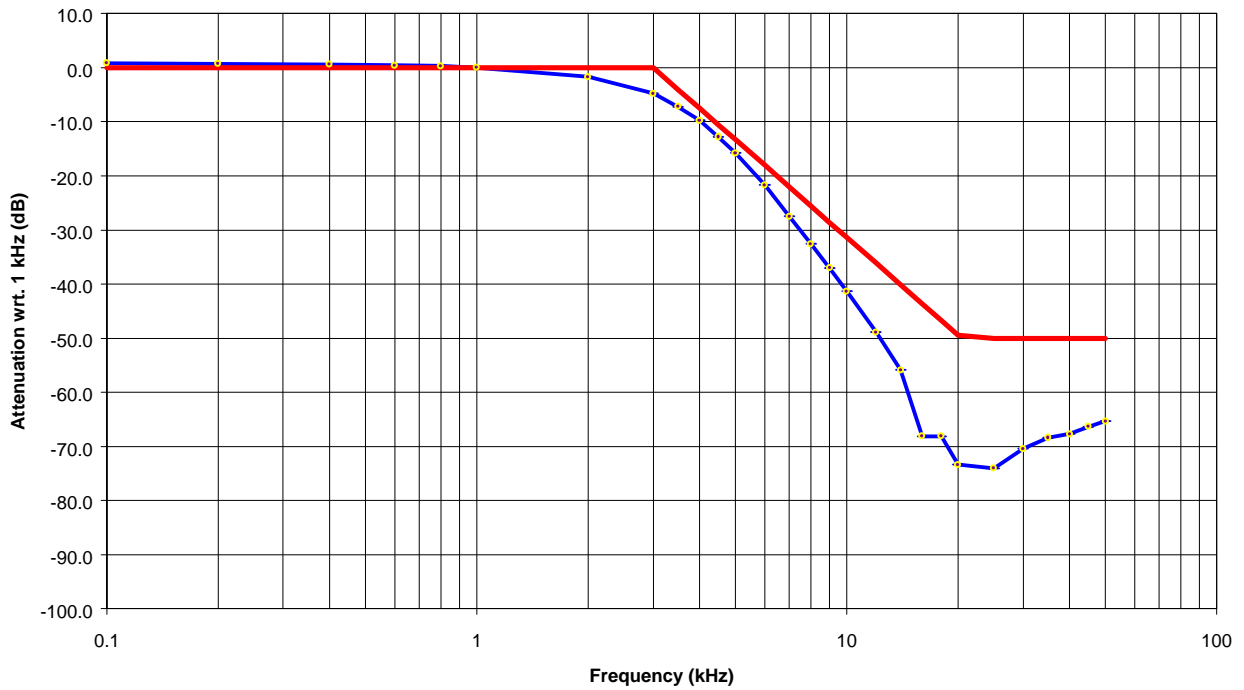

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



### 3.4. MODULATION LIMITING @ FCC 90.210

**PRODUCT NAME:** TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable), Model No.: TRX7355

**FCC REQUIREMENTS:**

**FCC Part 2, Sub. J, Para. 2.987(b) & FCC Part 90, Subpart I, Para. 90.210**

The EUT shall be installed with a modulation limiter which limits the deviation of the FM carrier less than 1.25 kHz for 6.25 kHz Channel Spacing System, 2.5 kHz for 12.5 kHz Channel Spacing , and 5 kHz for 25 kHz Channel Spacing System.

**CLIMATE CONDITION:**

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

**POWER INPUT:**

7.2 Vdc nominal.

**TEST EQUIPMENT:**


- Communication Analyzer, Rohde & Schawrz, Model SMFO2, S/N: 879988/057, 0.4 - 1000 MHz including AF & RF Signal Generators, SINAD, DISTORTION, DEVIATION meters and etc...

**METHOD OF MEASUREMENTS:**

**For Audio Transmitter:-** The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

**For Data Transmitter with Maximum Frequency Deviation set by Factory:-** The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

**TEST ARRANGEMENT**

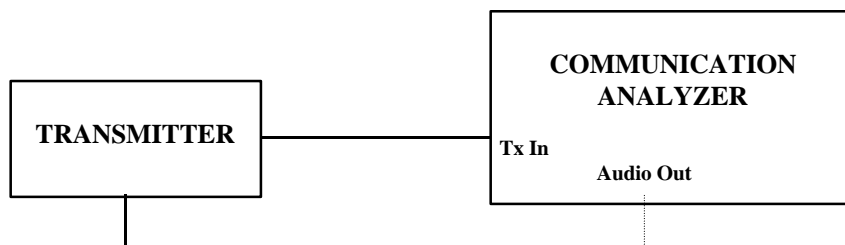

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Tri Luu, P.Eng. Engineer

**DATE:** May 27, 1998

**MEASUREMENT DATA**

**NOTE:** Since all Teklogix Systems (Models 6040, 7025, 7030, 8045, 8050, 8055, 8060, 9130 & 9140) use exactly the same TRX7355 radio transceiver, and the RF output characteristics are exactly the same. This test is required to be tested with only one system and the results shall be the same for all Teklogix systems.

**MODULATION LIMITING FOR DATA TRANSMITTER**

**Modulation:** FM modulation with random data and Modulation Limiter set at a Maximum Frequency Deviation (Factory Setting).

| DATA BAUD RATE | PEAK DEVIATION (KHz) | MAXIMUM LIMIT (KHz) |
|----------------|----------------------|---------------------|
| 4800           | 1.8                  | 2.5                 |
| 9600           | 1.8                  | 2.5                 |

**MODULATION LIMITING FOR AN AUDIO TRANSMITTER**

**Audio Input Rating:** 10mVrms

| MODULATING SIGNAL LEVEL (Vrms) | PEAK FREQUENCY DEVIATION (kHz)<br>at the following modulating frequency: |         |         |         |         | MAXIMUM LIMIT (KHz) |
|--------------------------------|--|---------|---------|---------|---------|---------------------|
|                                | 0.1 KHz  | 0.5 KHz | 1.0 KHz | 3.0 KHz | 5.0 KHz |                     |
| 1                              | 0.1  | 0.1     | 0.2     | 0.3     | 0.2     | 2.5                 |
| 2                              | 0.1  | 0.2     | 0.3     | 0.5     | 0.3     | 2.5                 |
| 4                              | 0.1  | 0.3     | 0.6     | 1.0     | 0.5     | 2.5                 |
| 6                              | 0.1  | 0.5     | 0.8     | 1.2     | 0.5     | 2.5                 |
| 8                              | 0.1  | 0.6     | 1.1     | 1.2     | 0.5     | 2.5                 |
| 10                             | 0.1  | 0.8     | 1.3     | 1.2     | 0.5     | 2.5                 |
| 12                             | 0.1  | 0.9     | 1.4     | 1.2     | 0.5     | 2.5                 |
| 14                             | 0.1  | 1.1     | 1.4     | 1.2     | 0.5     | 2.5                 |
| 16                             | 0.1  | 1.2     | 1.4     | 1.2     | 0.5     | 2.5                 |
| 18                             | 0.1  | 1.4     | 1.4     | 1.2     | 0.5     | 2.5                 |
| 20                             | 0.1  | 1.4     | 1.4     | 1.2     | 0.5     | 2.5                 |
| 25                             | 0.1  | 1.4     | 1.4     | 1.2     | 0.5     | 2.5                 |
| 30                             | 0.1  | 1.4     | 1.4     | 1.2     | 0.5     | 2.5                 |
| 40                             | 0.1  | 1.4     | 1.4     | 1.2     | 0.5     | 2.5                 |
| 50                             | 0.1  | 1.4     | 1.4     | 1.2     | 0.5     | 2.5                 |

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**MODULATION LIMITING FOR AN AUDIO TRANSMITTER**

Voice Signal Input Level = STD MOD Level + 16 dB = -48 dBVrms + 16 dB = **-22 dBVrms**

| <b>MODULATING<br/>FREQUENCY (KHz)</b> | <b>PEAK FREQUENCY<br/>DEVIATION (KHz)</b> | <b>MAXIMUM LIMIT<br/>(KHz)</b> |
|---------------------------------------|---|--------------------------------|
| 0.1                                   | 0.0                                       | 2.5                            |
| 0.2                                   | 0.3                                       | 2.5                            |
| 0.4                                   | 1.4                                       | 2.5                            |
| 0.6                                   | 1.4                                       | 2.5                            |
| 0.8                                   | 1.4                                       | 2.5                            |
| 1.0                                   | 1.4                                       | 2.5                            |
| 1.2                                   | 1.4                                       | 2.5                            |
| 1.4                                   | 1.4                                       | 2.5                            |
| 1.6                                   | 1.4                                       | 2.5                            |
| 1.8                                   | 1.4                                       | 2.5                            |
| 2.0                                   | 1.4                                       | 2.5                            |
| 2.5                                   | 1.3                                       | 2.5                            |
| 3.0                                   | 1.2                                       | 2.5                            |
| 3.5                                   | 1.0                                       | 2.5                            |
| 4.0                                   | 0.8                                       | 2.5                            |
| 4.5                                   | 0.7                                       | 2.5                            |
| 5.0                                   | 0.6                                       | 2.5                            |
| 6.0                                   | 0.4                                       | 2.5                            |
| 7.0                                   | 0.2                                       | 2.5                            |
| 8.0                                   | 0.1                                       | 2.5                            |
| 9.0                                   | 0.1                                       | 2.5                            |
| 10.0                                  | 0.1                                       | 2.5                            |

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**3.5. EMISSION MASKS @ FCC 90.210**

**PRODUCT NAME:** TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable), Model No.: TRX7355

**FCC REQUIREMENTS:**

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

| FREQUENCY RANGE (MHz) | MAXIMUM OBW (KHz) | CHANNEL SPACING (KHz) | MAX. FREQ. DEVIATION (KHz) | FCC APPLICABLE MASK              |
|-----------------------|-------------------|-----------------------|----------------------------|----------------------------------|
| 403 – 512             | 10.0              | 12.5                  | 2.5                        | 90.210(d): Mask D – Voice & Data |

| FCC RULES                        | FREQUENCY RANGE  | ATTENUATION LIMIT (dBc)  |
|----------------------------------|--|--|
| 90.210(d): Mask D – Voice & Data | > Fc – 5.625 kHz - < FC + 5.625 kHz<br>Fc ± 5.625 kHz - Fc ± 12.5 kHz<br>> Fc – 12.5 kHz - < Fc + 12.5 kHz | 0<br>7.27(fd-2.88 kHz)<br>50 + 10log <sub>10</sub> (P) or 70 dB whichever is less. |

**CLIMATE CONDITION:**

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

**POWER INPUT:**

7.2 Vdc nominal.

**TEST EQUIPMENT:**

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT
- Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**METHOD OF MEASUREMENTS:****FCC CFR 47, Para. 2.989 - Out-of-Band Emissions:**

The Emission Masks was measured with the Spectrum Analyzer controls set as shown on the test results (RBW  $\geq$  300 Hz, VBW  $\geq$  300 Hz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**Voice or Digital Modulation Through a Voice Input Port @ 2.989(c)(1):**- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.:  $\pm 2.5$  KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

**Digital Modulation Through a Data Input Port @ 2.989(h):**- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

**TEST ARRANGEMENT**

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Tri Luu, P.Eng. Engineer

**DATE:** May 26, 1998

**MEASUREMENT DATA**

*Please see attached plots for detailed measurements.*

**NOTE:** Since all Teklogix Systems (Models 6040, 7025, 7030, 8045, 8050, 8055, 8060, 9130 & 9140) use exactly the same TRX7355 radio transceiver, and the RF output characteristics are exactly the same. This test is required to be tested with only one system and the results shall be the same for all Teklogix systems.

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**3.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210**

**PRODUCT NAME:** TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable), Model No.: TRX7355

**FCC REQUIREMENTS:**

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

| FREQUENCY RANGE (MHz) | MAXIMUM OBW (KHz) | CHANNEL SPACING (KHz) | MAX. FREQ. DEVIATION (KHz) | FCC SPECIFICATION LIMITS (Para. No.) |
|-----------------------|-------------------|-----------------------|----------------------------|--------------------------------------|
| 403-512               | 10.0              | 12.5                  | 2.5                        | 90.210(d): Mask D – Audio & Voice    |

| FCC RULES                        | FREQUENCY RANGE   | ATTENUATION LIMIT (dBc)                                 |
|----------------------------------|---|---|
| 90.210(d): Mask D - Voice & Data | Lowest frequency generated from the transmitter circuit to 10 <sup>th</sup> harmonic of the fundamental frequency | 50 + 10log <sub>10</sub> (P) or 70 dB whichever is less |

**CLIMATE CONDITION:**

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

**POWER INPUT:**

7.2 Vdc nominal.

**TEST EQUIPMENT:**

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT
- Hihpass Filter, Microphase, P/N: CR220HIB, S/N: IITI11000AB, cut-off freq.: 600 MHz.
- Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

**METHOD OF MEASUREMENTS:**

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.989, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the Spectrum Analyzer controls set as RBW = 100 kHz, VBW = 100 kHz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Wesite: <http://www.ultratech-labs.com>

File #: TEK-122FTX


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**FCC CFR 47, Para. 2.997 - Frequency spectrum to be investigated:-** The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The

amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

**FCC CFR 47, Para. 2.991 - Spurious Emissions at Antenna Terminal:-** The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.989 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

### TEST ARRANGEMENT

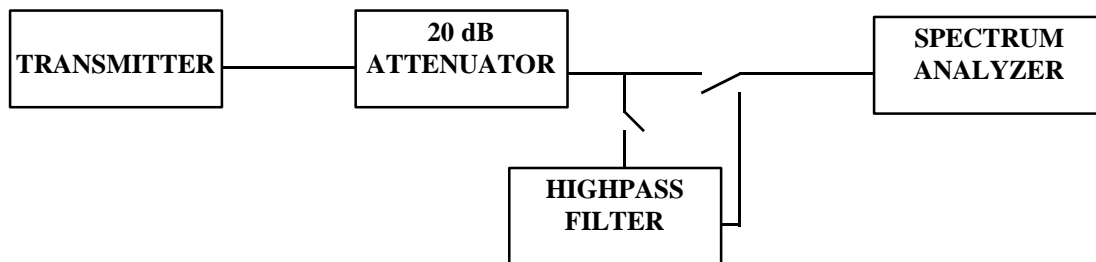

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Hung Trinh, EMI/RFI Technician

**DATE:** June 02, 1998

**MEASUREMENT DATA**

**SPURIOUS & HARMONIC EMISSIONS  
AT THE TRANSMITTER ANTENNA TERMINAL**

**TEST CONFIGURATION**

- The transmitter was coupled to the Spectrum Analyzer through a 20 dB attenuator.
- The insertion loss between the transmitter output terminal and the spectrum analyzer was measured to be 20 dB
- The channel frequencies (Low, Middle and High ) was established on the extreme edges of the operating band, both upper and lower at its full rated output power. The emissions was investigated up to the tenth harmonic of the fundamental emissions in each case.

**NOTE:** Since all Teklogix Systems (Models 6040, 7025, 7030, 8045, 8050, 8055, 8060, 9130 & 9140) use exactly the same TRX7355 radio transceiver, and the RF output characteristics are exactly the same. This test is required to be tested with only one system and the results shall be the same for all Teklogix systems.

| Fundamental Frequency: 406.125 MHz  |                           |             |             |            |
|---|---------------------------|-------------|-------------|------------|
| RF Output Power: 1.5 Watts  |                           |             |             |            |
| Modulation: FM modulation with 9600 b/s random data   |                           |             |             |            |
| FREQUENCY (MHz)   | RF LEVEL 100 kHz BW (dBm) | LIMIT (dBm) | MARGIN (dB) | PASS/ FAIL |
| 202.0   | -33.5                     | -20.0       | -13.5       | PASS       |
| The emissions were scanned form 10 MHz to 5 GHz and all emissions less than 20 dB below the limits were recorded. |                           |             |             |            |

| Fundamental Frequency: 406.125 MHz  |                           |             |             |            |
|---|---------------------------|-------------|-------------|------------|
| RF Output Power: 1.5 Watts  |                           |             |             |            |
| Modulation: FM modulation with 2.5 kHz Sine Wave Signal   |                           |             |             |            |
| FREQUENCY (MHz)   | RF LEVEL 100 kHz BW (dBm) | LIMIT (dBm) | MARGIN (dB) | PASS/ FAIL |
| 202.0   | -33.2                     | -20.0       | -13.2       | PASS       |
| The emissions were scanned form 10 MHz to 5 GHz and all emissions less than 20 dB below the limits were recorded. |                           |             |             |            |

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Wesite: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Date: June 02, 1998  
Tested by: Tri Lau

TEKLOGIX TRX7355 VOICE/DATA MODULATED TRANSMITTER  
Tx Frequency: 406.125 RF Power: 1.5 Watts




ULTRATECH ENGINEERING LABS INC Tue Jun 2 13:27:52 1998  
REF 35.0 dBm ATT 30 dB A\_view B\_blank  
10dB/

MKR 202 MHz

Modulation: FM Modulation with 2.5 kHz Signal

REF 21.5 dB  
RBW 100 kHz  
VBW 100 kHz  
SWP 1.0 s

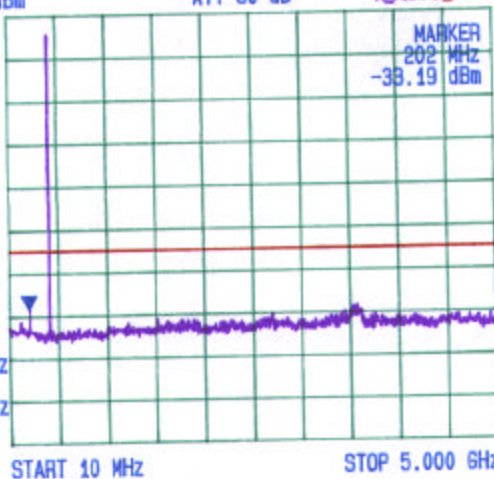


Modulation: FM Modulation with 9600 b/s Random Data

ULTRATECH ENGINEERING LABS INC Tue Jun 2 13:30:21 1998  
REF 35.0 dBm ATT 30 dB A\_view B\_blank  
10dB/

MKR 202 MHz

REF 21.5 dB  
RBW 100 kHz  
VBW 100 kHz  
SWP 1.0 s

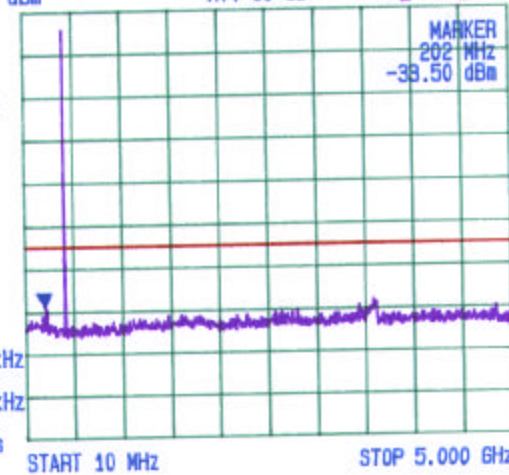

ULTRATECH GROUP OF LABS

4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 450.000 MHz  |                           |             |             |            |
|---|---------------------------|-------------|-------------|------------|
| RF Output Power: 2.0 Watts  |                           |             |             |            |
| Modulation: FM modulation with 9600 b/s random data   |                           |             |             |            |
| FREQUENCY (MHz)   | RF LEVEL 100 kHz BW (dBm) | LIMIT (dBm) | MARGIN (dB) | PASS/ FAIL |
| 202.0   | -34.1                     | -20.0       | -14.1       | PASS       |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 20 dB below the limits were recorded. |                           |             |             |            |

| Fundamental Frequency: 450.00 MHz   |                           |             |             |            |
|---|---------------------------|-------------|-------------|------------|
| RF Output Power: 2.0 Watts  |                           |             |             |            |
| Modulation: FM modulation with 2.5 kHz Sine Wave Signal   |                           |             |             |            |
| FREQUENCY (MHz)   | RF LEVEL 100 kHz BW (dBm) | LIMIT (dBm) | MARGIN (dB) | PASS/ FAIL |
| 202.0   | -34.7                     | -20.0       | -14.7       | PASS       |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 20 dB below the limits were recorded. |                           |             |             |            |

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX



- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



Date: June 02, 1998  
Tested by: Tri Liao

TEKLOGIX TRX7355 VOICE/DATA MODULATED TRANSMITTER

Tx Frequency: 44.530 RF Power: 2 Watts

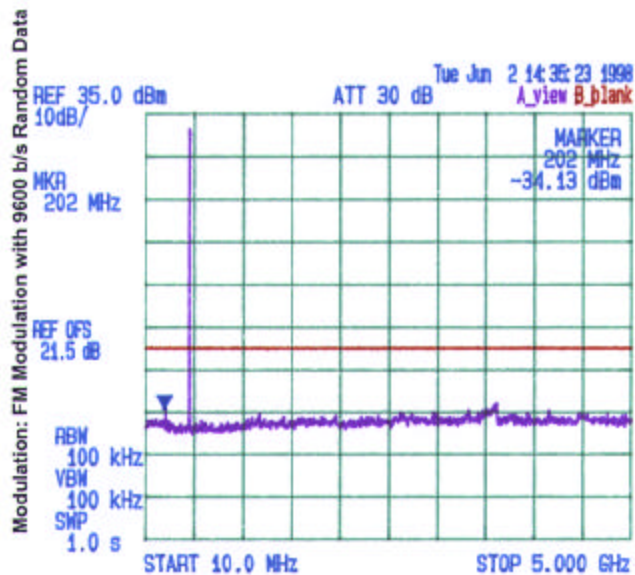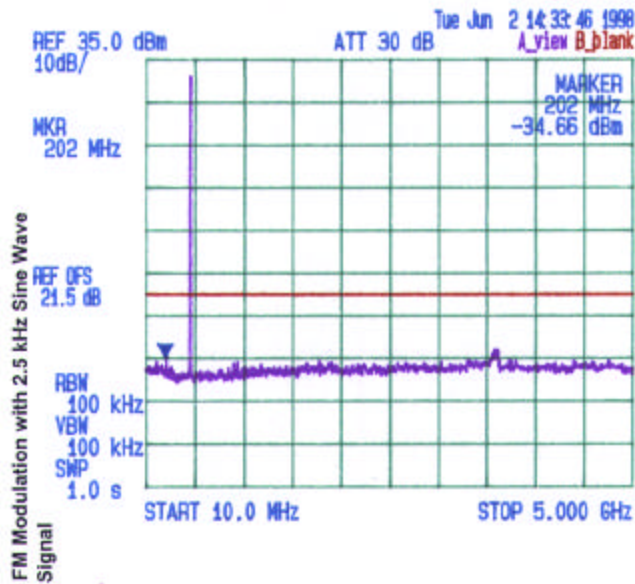

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz  |                           |             |             |            |
|---|---------------------------|-------------|-------------|------------|
| RF Output Power: 2.0 Watts  |                           |             |             |            |
| Modulation: FM modulation with 9600 b/s random data   |                           |             |             |            |
| FREQUENCY (MHz)   | RF LEVEL 100 kHz BW (dBm) | LIMIT (dBm) | MARGIN (dB) | PASS/ FAIL |
| 202.0   | -34.8                     | -20.0       | -14.8       | PASS       |
| The emissions were scanned form 10 MHz to 5 GHz and all emissions less than 20 dB below the limits were recorded. |                           |             |             |            |

| Fundamental Frequency: 470.00 MHz   |                           |             |             |            |
|---|---------------------------|-------------|-------------|------------|
| RF Output Power: 2.0 Watts  |                           |             |             |            |
| Modulation: FM modulation with 2.5 kHz Sine Wave Signal   |                           |             |             |            |
| FREQUENCY (MHz)   | RF LEVEL 100 kHz BW (dBm) | LIMIT (dBm) | MARGIN (dB) | PASS/ FAIL |
| 202.0   | -33.6                     | -20.0       | -13.6       | PASS       |
| The emissions were scanned form 10 MHz to 5 GHz and all emissions less than 20 dB below the limits were recorded. |                           |             |             |            |

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Wesite: <http://www.ultratech-labs.com>



File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Date: June 02, 1998  
 Tested by: Tri Lau

TEKLOGIX TRX7355 VOICE/DATA MODULATED TRANSMITTER

Tx Frequency: #70, RF Power: 2 Watts

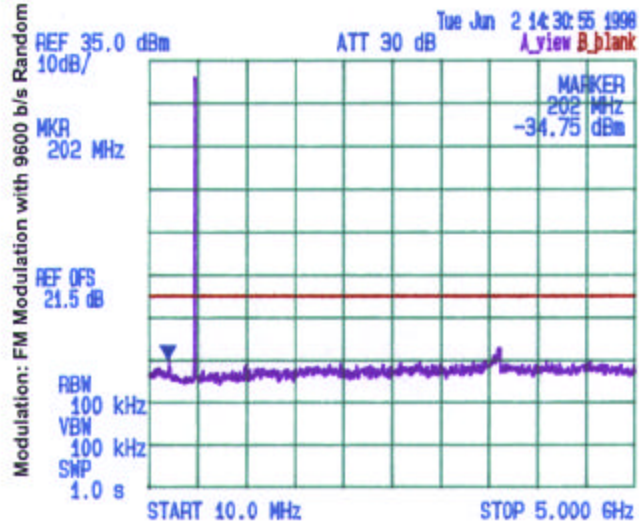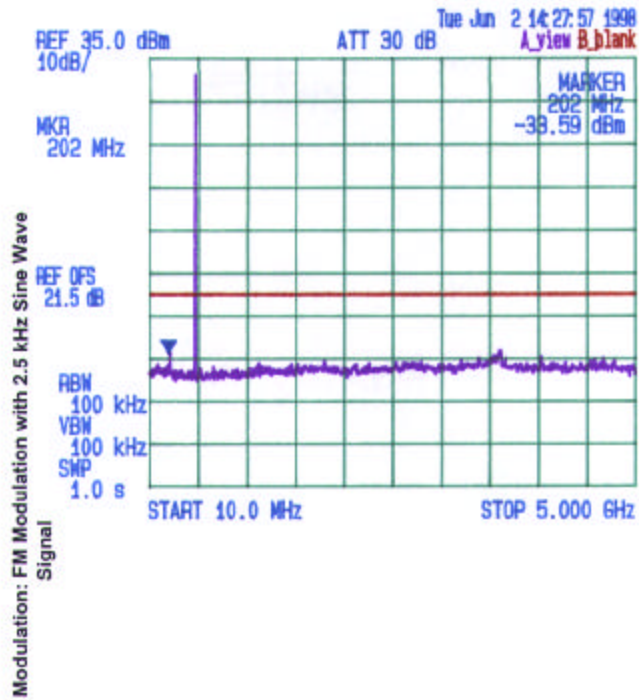

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**3.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210**

**PRODUCT NAME:** TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable), Model No.: TRX7355

**FCC REQUIREMENTS:**

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

| FREQUENCY RANGE (MHz) | MAXIMUM OBW (KHz) | CHANNEL SPACING (KHz) | MAX. FREQ. DEVIATION (KHz) | FCC SPECIFICATION LIMITS (Para. No.) |
|-----------------------|-------------------|-----------------------|----------------------------|--------------------------------------|
| 403-512               | 10.0              | 12.5                  | 2.5                        | 90.210(d): Mask D – Audio & Voice    |

| FCC RULES                        | FREQUENCY RANGE   | ATTENUATION LIMIT (dBc)                                 |
|----------------------------------|---|---|
| 90.210(d): Mask D - Voice & Data | Lowest frequency generated from the transmitter circuit to 10 <sup>th</sup> harmonic of the fundamental frequency | 50 + 10log <sub>10</sub> (P) or 70 dB whichever is less |

**CLIMATE CONDITION:**

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

**POWER INPUT:**

7.2 Vdc nominal.

**TEST EQUIPMENT:**

1. EMI Receiver System/Spectrum Analyzer, Hewlett Packard, Model 8546A, Input +25dBm max., 9KHz-5.6GHz, 50 Ohms, built-in Peak, Quasi-Peak & Average Detectors, Pre-Amplifier and Tracking Signal Generator. This System includes: (1) HP 85460A RF Filter Section, S/N: 3448A00236 and (2) HP 85462A Receiver RF Section/Display, S/N: 3520A00248.
2. Spectrum Analyzer, Advantest, Model R3271, S/N: 15050203, 100 Hz to 32 GHz)
3. Microwave Amplifier, HP, Model 83017A, Frequency Range 1 to 22GHz, 30dB gain nominal, low noise floor type.
4. Active Loop Antenna, Emco, Model 6502, SN 9104-2611, Frequency Range 1 KHz - 30 MHz, @ 50 Ohms.
5. BiconiLog Antenna, Emco, Model 3142, SN 10005, 30-2000 MHz @ 50 Ohms.
6. Log Periodic Antenna, AH System, Model SAS-200/518, SN: 343, Frequency Range: 1GHz-18GHz.
7. FCC Listed Open Field Test Site.
8. Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**METHOD OF MEASUREMENTS:**

Refer to **ANSI 63.4**, Para. 8 for detailed radiated emissions measurement procedures.

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.989, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the Spectrum Analyzer controls set as RBW = 100 kHz, VBW = 100 kHz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**FCC CFR 47, Para. 2.997 - Frequency spectrum to be investigated**

The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

**FCC CFR 47, Para. 2.993 - Field Strength Spurious Emissions**

- (a) Measurements was made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.989(c) as appropriate. For equipment operating on frequencies below 1 GHz , an Open Field Test is normally required, with the measuring instrument antenna located in the far field at all test frequencies. In event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.
- (b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:
- (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
  - (2) All equipment operating on frequencies higher than 25 MHz
  - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
  - (4) Other types of equipment as required, when deemed necessary by the Commission.

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**METHOD OF CALCULATION FOR TRANSMITTED POWER (P) FROM THE MEASURED FIELD STRENGTH LEVEL (E):**

According to IEC 801-3, the power density can be calculated as follows:

$$S = P / (4 \times \text{PI} \times D^2)$$

Where: S: Power density in watts per square feet  
 P: Transmitted power in watts  
 PI: 13.1415  
 D: Distance in meters

The power density S (W/m<sup>2</sup>) and electric field E (V/m) is related by:

$$S = E^2 / (120 \times \text{PI})$$

Accordingly, the field intensity of isotropic radiator in free space can be expressed as follows:

$$E = (30 \times P)^{1/2} / D = 5.5 \times (P)^{1/2} / D$$

For Halfwave dipole antenna or other antennas correlated to dipole in direction of maximum radiation:

$$S = (1.64 \times P) / (4 \times \text{PI} \times D^2)$$

$$E = (49.2 \times P)^{1/2} / D = 7.01 \times (P)^{1/2} / D$$

$$P = (E \times D / 7.01)^2$$

Calculation of transmitted power P (dBm) given a measured field intensity E (dBuV/m):

$$P(W) = [E(V/m) \times D / 7.01]^2$$

$$P(mW) = P(W) \times 1000$$

$$\Rightarrow P(dBm) = 10 \log P(mW)$$

$$= 20 \log E(V/m) + 20 \log(D) - 20 \log(7.01) + 10 \log 1000$$

$$= E(dBV/m) + 20 \log D + 13$$

$$= E(dBuV/m) - 120 + 20 \log(D) + 13$$

$$= E(dBuV/m) + 20 \log(D) - 107$$

The Transmitted Power @ D = 3 Meters

$$P(dBm) = E(dBuV/m) - 97.5$$

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Hung Trinh, EMI/RFI Technician & Tri Luu, P.Eng. Engineer

**DATE:** May 25 - June 01, 1998

**MEASUREMENT DATA**

**RADIATED EMISSIONS MEASUREMENTS @ 3 METERS**

**TEST CONFIGURATION**

- The channel frequencies (Low, Middle and High ) was established at its full rated output power. The emissions was investigated up to the tenth harmonic of the fundamental emissions in each case. the measured level of the carrier was recorded and compared to the level of the emissions as required in Part 90.238(a). The absolute level of each emission shall not be greater than -13 dBm.
- For measuring radiated emissions at frequencies below 1 GHz, the Spectrum Analyzer was set as 100 kHz RBW, 100 KHz VBW, SWEEP TIME: AUTO, PEAK DETECTOR.
- For measuring radiated emissions at frequencies above 1 GHz, the Spectrum Analyzer was set as 1 MHz RBW, 1 MHz VBW, SWEEP TIME: AUTO, PEAK DETECTOR.
- All rf emissions from the lowest frequency generated by the transmitter ( ... ) upto the 10<sup>th</sup> harmonic of fundamental were scanned, and only emissions less than 20 dB below the limits (-13 dBm) were recorded.

**Remarks:** According to our measurement inspection (rf conducted emissions at the antenna terminal and radiated emissions with the TRX7355 radio outside the case), the transmitter radiated emissions with the rf output FM modulated with data or voice are identical. The following test data recorded with the rf output modulated with data and they shall be the same for those modulated with voice.

**3.7.1. Teklogix TRX7355 Radio with Teklogix 6040 (Mobile) System**

| Fundamental Frequency: 406.125 MHz  |  |                            |                               |                           |                |                |               |
|---|--|----------------------------|-------------------------------|---------------------------|----------------|----------------|---------------|
| RF Output Power: 1.5 Watts  |  |                            |                               |                           |                |                |               |
| Modulation: FM modulation with 9600b/s pseudo random data   |  |                            |                               |                           |                |                |               |
| FREQUENCY<br>(MHz)  | RF Field<br>Strength Level<br>(dBuV/m) | RF Power<br>Level<br>(dBm) | DETECTOR<br>USED<br>(PEAK/QP) | ANTENNA<br>PLANE<br>(H/V) | LIMIT<br>(dBm) | MARGIN<br>(dB) | PASS/<br>FAIL |
| 812.25  | 52.5                                   | -45.0                      | PEAK                          | V                         | -20.0          | -25.0          | PASS          |
| 812.25  | 65.9                                   | -31.6                      | PEAK                          | H                         | -20.0          | -11.6          | PASS          |
| 1218.38   | 41.5                                   | -56.0                      | PEAK                          | V                         | -20.0          | -36.0          | PASS          |
| 1218.38   | 59.2                                   | -38.3                      | PEAK                          | H                         | -20.0          | -18.3          | PASS          |
| 1624.50   | 45.7                                   | -51.8                      | PEAK                          | V                         | -20.0          | -31.8          | PASS          |
| 1624.50   | 47.1                                   | -50.4                      | PEAK                          | H                         | -20.0          | -30.4          | PASS          |
| 2436.75   | 41.3                                   | -56.3                      | PEAK                          | V                         | -20.0          | -36.3          | PASS          |
| 2436.75   | 44.5                                   | -53.0                      | PEAK                          | H                         | -20.0          | -33.0          | PASS          |
| 2842.88   | 42.6                                   | -54.9                      | PEAK                          | V                         | -20.0          | -34.9          | PASS          |
| 2842.88   | 42.8                                   | -54.7                      | PEAK                          | H                         | -20.0          | -34.7          | PASS          |
| 4061.25   | 44.4                                   | -53.1                      | PEAK                          | V                         | -20.0          | -33.1          | PASS          |
| 4061.25   | 44.8                                   | -52.7                      | PEAK                          | H                         | -20.0          | -32.7          | PASS          |
| The emissions were scanned form 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |  |                            |                               |                           |                |                |               |


**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Wesite: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 6040 SYSTEM  
 RF OUTPUT: 1.5 Watts, 406.125 MHz

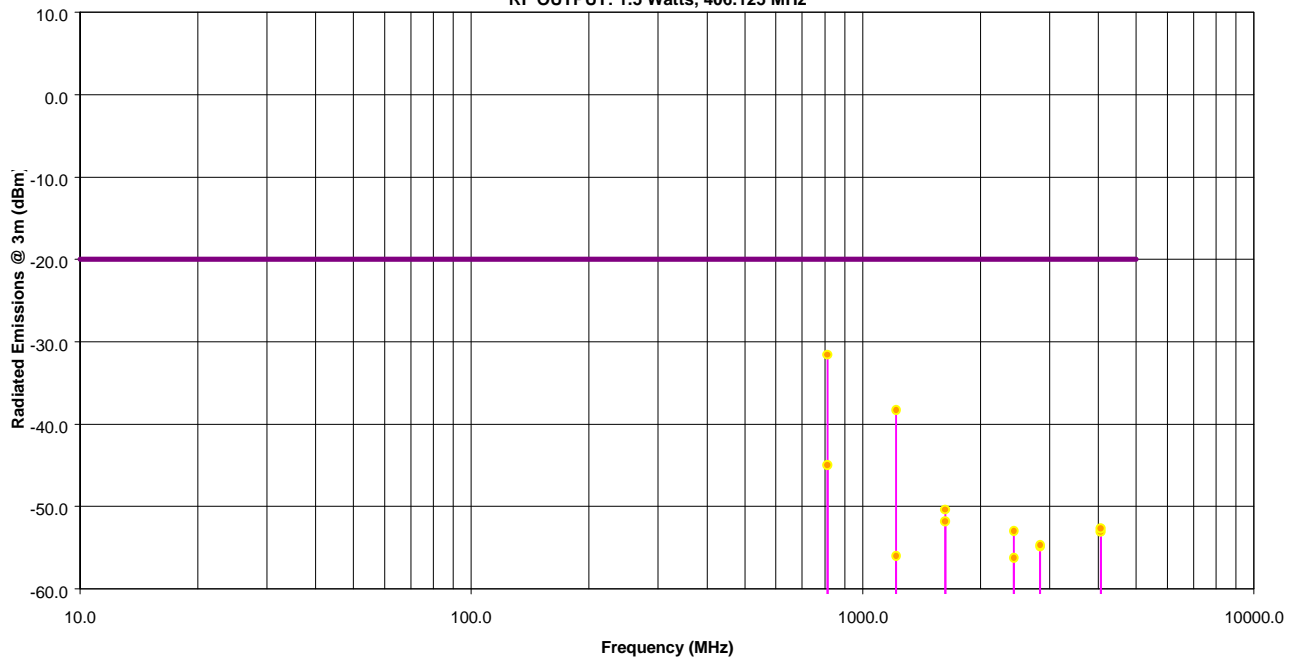

ULTRATECH GROUP OF LABS


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 450.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 900.00  | 31.6                             | -65.9                | PEAK                    | V                   | -20.0       | -45.9       | PASS      |
| 900.00  | 33.6                             | -63.9                | PEAK                    | H                   | -20.0       | -43.9       | PASS      |
| 1350.00   | 38.8                             | -58.7                | PEAK                    | V                   | -20.0       | -38.7       | PASS      |
| 1350.00   | 42.3                             | -55.2                | PEAK                    | H                   | -20.0       | -35.2       | PASS      |
| 1800.00   | 42.9                             | -54.6                | PEAK                    | V                   | -20.0       | -34.6       | PASS      |
| 1800.00   | 43.7                             | -53.8                | PEAK                    | H                   | -20.0       | -33.8       | PASS      |
| 2250.00   | 41.3                             | -56.2                | PEAK                    | V                   | -20.0       | -36.2       | PASS      |
| 2250.00   | 40.8                             | -56.7                | PEAK                    | H                   | -20.0       | -36.7       | PASS      |
| 2700.00   | 45.2                             | -52.3                | PEAK                    | V                   | -20.0       | -32.3       | PASS      |
| 2700.00   | 45.0                             | -52.5                | PEAK                    | H                   | -20.0       | -32.5       | PASS      |
| 3150.00   | 44.0                             | -53.5                | PEAK                    | V                   | -20.0       | -33.5       | PASS      |
| 3150.00   | 41.7                             | -55.8                | PEAK                    | H                   | -20.0       | -35.8       | PASS      |
| 3600.00   | 42.1                             | -55.4                | PEAK                    | V                   | -20.0       | -35.4       | PASS      |
| 3600.00   | 42.3                             | -55.2                | PEAK                    | H                   | -20.0       | -35.2       | PASS      |
| 4050.00   | 44.5                             | -53.0                | PEAK                    | V                   | -20.0       | -33.0       | PASS      |
| 4050.00   | 44.1                             | -53.4                | PEAK                    | H                   | -20.0       | -33.4       | PASS      |
| 4500.00   | 48.6                             | -48.9                | PEAK                    | V                   | -20.0       | -28.9       | PASS      |
| 4500.00   | 47.0                             | -50.5                | PEAK                    | H                   | -20.0       | -30.5       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

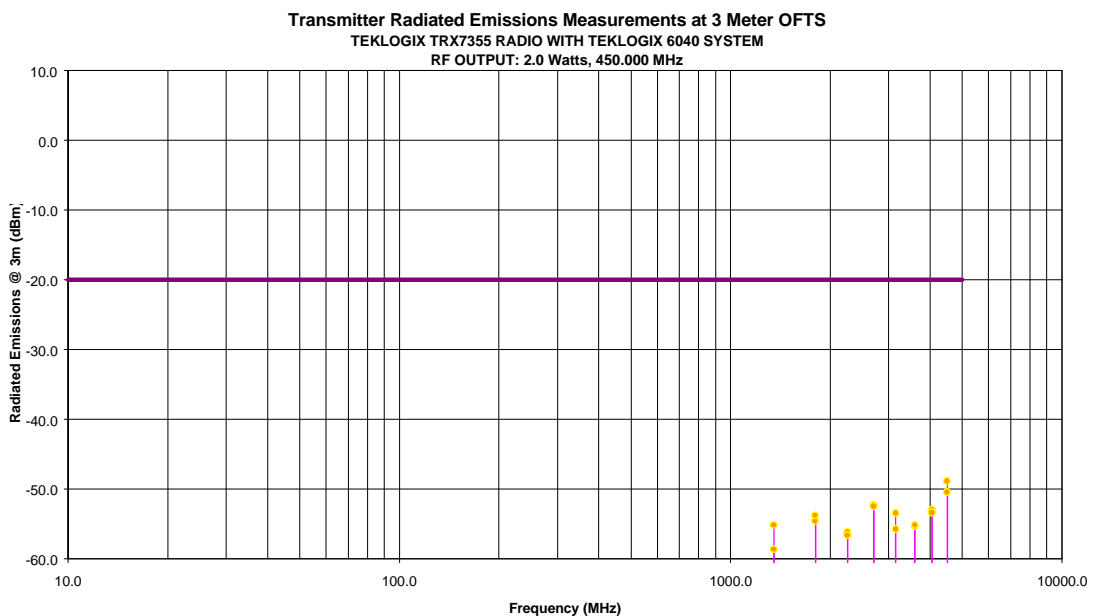


**ULTRATECH GROUP OF LABS**

File #: TEK-122FTX

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz  |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts  |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data   |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 940.00  | 40.6                             | -56.9                | PEAK                    | V                   | -20.0       | -36.9       | PASS      |
| 940.00  | 63.4                             | -34.1                | PEAK                    | H                   | -20.0       | -14.1       | PASS      |
| 1410.00   | 41.8                             | -55.7                | PEAK                    | V                   | -20.0       | -35.7       | PASS      |
| 1410.00   | 35.5                             | -62.0                | PEAK                    | H                   | -20.0       | -42.0       | PASS      |
| 1880.00   | 44.0                             | -53.5                | PEAK                    | V                   | -20.0       | -33.5       | PASS      |
| 1880.00   | 47.0                             | -50.5                | PEAK                    | H                   | -20.0       | -30.5       | PASS      |
| 2350.00   | 41.8                             | -55.7                | PEAK                    | V                   | -20.0       | -35.7       | PASS      |
| 2350.00   | 42.1                             | -55.4                | PEAK                    | H                   | -20.0       | -35.4       | PASS      |
| 2820.00   | 51.4                             | -46.1                | PEAK                    | V                   | -20.0       | -26.1       | PASS      |
| 2820.00   | 41.1                             | -56.4                | PEAK                    | H                   | -20.0       | -36.4       | PASS      |
| 4230.00   | 49.7                             | -47.8                | PEAK                    | V                   | -20.0       | -27.8       | PASS      |
| 4230.00   | 45.7                             | -51.8                | PEAK                    | H                   | -20.0       | -31.8       | PASS      |
| 4700.00   | 46.7                             | -50.8                | PEAK                    | V                   | -20.0       | -30.8       | PASS      |
| 4700.00   | 45.0                             | -52.5                | PEAK                    | H                   | -20.0       | -32.5       | PASS      |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |                                  |                      |                         |                     |             |             |           |

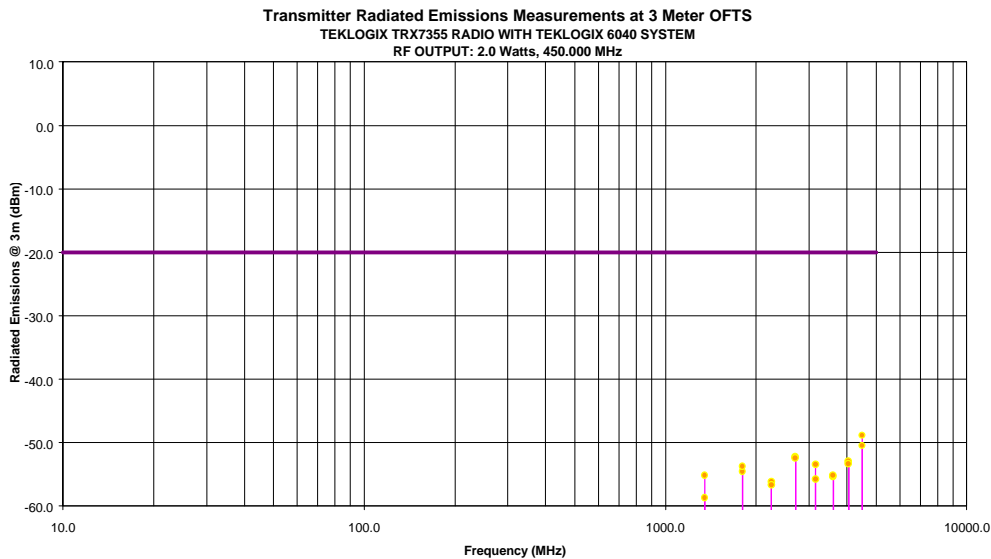

**ULTRATECH GROUP OF LABS**


File #: TEK-122FTX

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.7.2. Teklogix TRX7355 Radio with Teklogix 7025 (Portable) System

| Fundamental Frequency: 406.125 MHz  |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 1.5 Watts  |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data   |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 812.25  | 52.8                             | -44.7                | PEAK                    | V                   | -20.0       | -24.7       | PASS      |
| 812.25  | 53.2                             | -44.3                | PEAK                    | H                   | -20.0       | -24.3       | PASS      |
| 1218.38   | 48.9                             | -48.6                | PEAK                    | V                   | -20.0       | -28.6       | PASS      |
| 1218.38   | 42.4                             | -55.1                | PEAK                    | H                   | -20.0       | -35.1       | PASS      |
| 1624.50   | 48.2                             | -49.3                | PEAK                    | V                   | -20.0       | -29.3       | PASS      |
| 1624.50   | 45.1                             | -52.4                | PEAK                    | H                   | -20.0       | -32.4       | PASS      |
| 2030.00   | 44.2                             | -53.3                | PEAK                    | V                   | -20.0       | -33.3       | PASS      |
| 2030.00   | 39.0                             | -58.5                | PEAK                    | H                   | -20.0       | -38.5       | PASS      |
| 2436.75   | 48.8                             | -48.8                | PEAK                    | V                   | -20.0       | -28.8       | PASS      |
| 2436.75   | 47.1                             | -50.4                | PEAK                    | H                   | -20.0       | -30.4       | PASS      |
| 2842.88   | 54.4                             | -43.1                | PEAK                    | V                   | -20.0       | -23.1       | PASS      |
| 2842.88   | 48.7                             | -48.8                | PEAK                    | H                   | -20.0       | -28.8       | PASS      |
| 3249.00   | 43.4                             | -54.1                | PEAK                    | V                   | -20.0       | -34.1       | PASS      |
| 3249.00   | 41.2                             | -56.3                | PEAK                    | H                   | -20.0       | -36.3       | PASS      |
| 3655.13   | 42.2                             | -55.3                | PEAK                    | V                   | -20.0       | -35.3       | PASS      |
| 3655.13   | 41.3                             | -56.3                | PEAK                    | H                   | -20.0       | -36.3       | PASS      |
| 4061.25   | 44.0                             | -53.5                | PEAK                    | V                   | -20.0       | -33.5       | PASS      |
| 4061.25   | 42.7                             | -54.8                | PEAK                    | H                   | -20.0       | -34.8       | PASS      |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |                                  |                      |                         |                     |             |             |           |

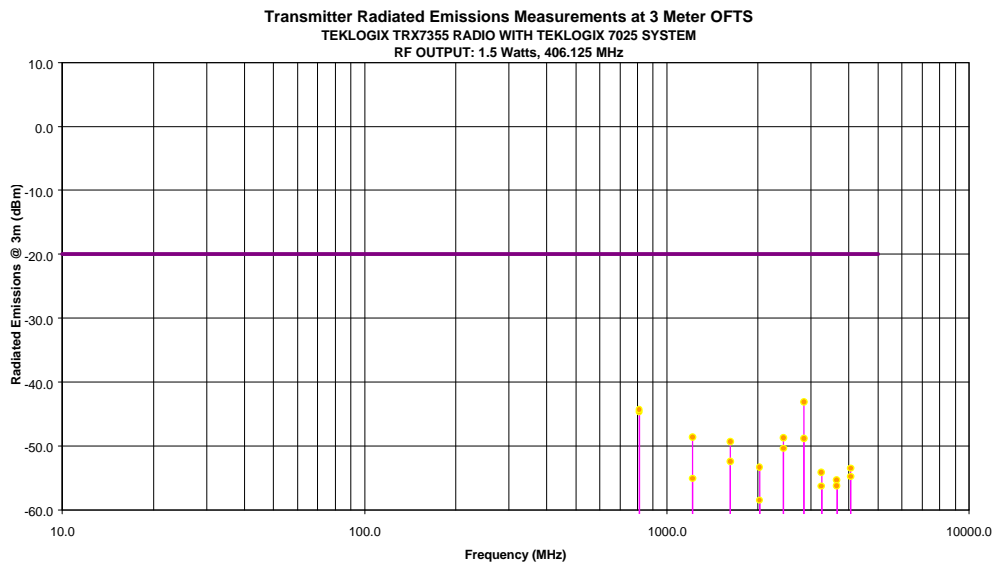

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



| Fundamental Frequency: 450.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 900.00  | 44.7                             | -52.8                | PEAK                    | V                   | -20.0       | -32.8       | PASS      |
| 900.00  | 42.6                             | -54.9                | PEAK                    | H                   | -20.0       | -34.9       | PASS      |
| 1350.00   | 42.7                             | -54.8                | PEAK                    | V                   | -20.0       | -34.8       | PASS      |
| 1350.00   | 40.5                             | -57.0                | PEAK                    | H                   | -20.0       | -37.0       | PASS      |
| 1800.00   | 49.6                             | -47.9                | PEAK                    | V                   | -20.0       | -27.9       | PASS      |
| 1800.00   | 42.1                             | -55.4                | PEAK                    | H                   | -20.0       | -35.4       | PASS      |
| 2250.00   | 49.3                             | -48.2                | PEAK                    | V                   | -20.0       | -28.2       | PASS      |
| 2250.00   | 44.9                             | -52.6                | PEAK                    | H                   | -20.0       | -32.6       | PASS      |
| 2700.00   | 53.6                             | -43.9                | PEAK                    | V                   | -20.0       | -23.9       | PASS      |
| 2700.00   | 48.7                             | -48.8                | PEAK                    | H                   | -20.0       | -28.8       | PASS      |
| 3150.00   | 48.1                             | -49.4                | PEAK                    | V                   | -20.0       | -29.4       | PASS      |
| 3150.00   | 46.9                             | -50.6                | PEAK                    | H                   | -20.0       | -30.6       | PASS      |
| 3600.00   | 47.7                             | -49.8                | PEAK                    | V                   | -20.0       | -29.8       | PASS      |
| 3600.00   | 45.7                             | -51.8                | PEAK                    | H                   | -20.0       | -31.8       | PASS      |
| 4050.00   | 44.7                             | -52.8                | PEAK                    | V                   | -20.0       | -32.8       | PASS      |
| 4050.00   | 43.7                             | -53.8                | PEAK                    | H                   | -20.0       | -33.8       | PASS      |
| 4500.00   | 48.8                             | -48.7                | PEAK                    | V                   | -20.0       | -28.7       | PASS      |
| 4500.00   | 45.3                             | -52.2                | PEAK                    | H                   | -20.0       | -32.2       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 7025 SYSTEM  
 RF OUTPUT: 2.0 Watts, 450.000 MHz

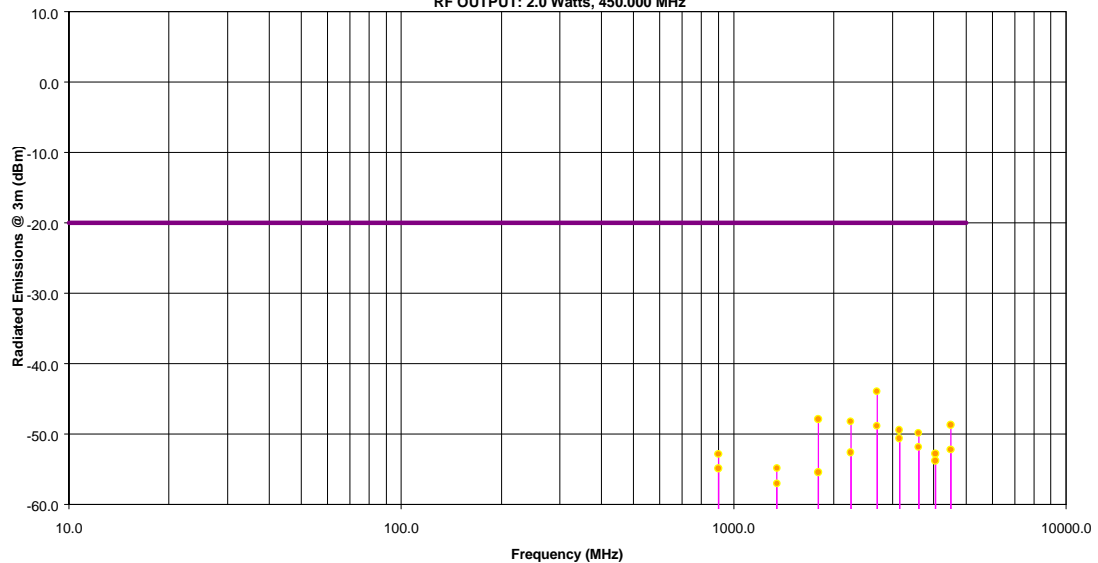

**ULTRATECH GROUP OF LABS**

4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>


File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 940.00  | 47.5                             | -50.0                | PEAK                    | V                   | -20.0       | -30.0       | PASS      |
| 940.00  | 47.0                             | -50.5                | PEAK                    | H                   | -20.0       | -30.5       | PASS      |
| 1410.00   | 42.4                             | -55.1                | PEAK                    | V                   | -20.0       | -35.1       | PASS      |
| 1410.00   | 42.5                             | -55.0                | PEAK                    | H                   | -20.0       | -35.0       | PASS      |
| 1880.00   | 45.0                             | -52.5                | PEAK                    | V                   | -20.0       | -32.5       | PASS      |
| 1880.00   | 39.7                             | -57.8                | PEAK                    | H                   | -20.0       | -37.8       | PASS      |
| 2350.00   | 48.5                             | -49.0                | PEAK                    | V                   | -20.0       | -29.0       | PASS      |
| 2350.00   | 48.0                             | -49.5                | PEAK                    | H                   | -20.0       | -29.5       | PASS      |
| 2820.00   | 55.3                             | -42.2                | PEAK                    | V                   | -20.0       | -22.2       | PASS      |
| 2820.00   | 51.6                             | -45.9                | PEAK                    | H                   | -20.0       | -25.9       | PASS      |
| 3290.00   | 48.8                             | -48.8                | PEAK                    | V                   | -20.0       | -28.8       | PASS      |
| 3290.00   | 46.9                             | -50.6                | PEAK                    | H                   | -20.0       | -30.6       | PASS      |
| 3760.00   | 47.6                             | -49.9                | PEAK                    | V                   | -20.0       | -29.9       | PASS      |
| 3760.00   | 44.8                             | -52.8                | PEAK                    | H                   | -20.0       | -32.8       | PASS      |
| 4230.00   | 51.1                             | -46.4                | PEAK                    | V                   | -20.0       | -26.4       | PASS      |
| 4230.00   | 47.5                             | -50.0                | PEAK                    | H                   | -20.0       | -30.0       | PASS      |
| 4700.00   | 47.8                             | -49.7                | PEAK                    | V                   | -20.0       | -29.7       | PASS      |
| 4700.00   | 45.7                             | -51.8                | PEAK                    | H                   | -20.0       | -31.8       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 7025 SYSTEM  
 RF OUTPUT: 2.0 Watts, 470.000 MHz

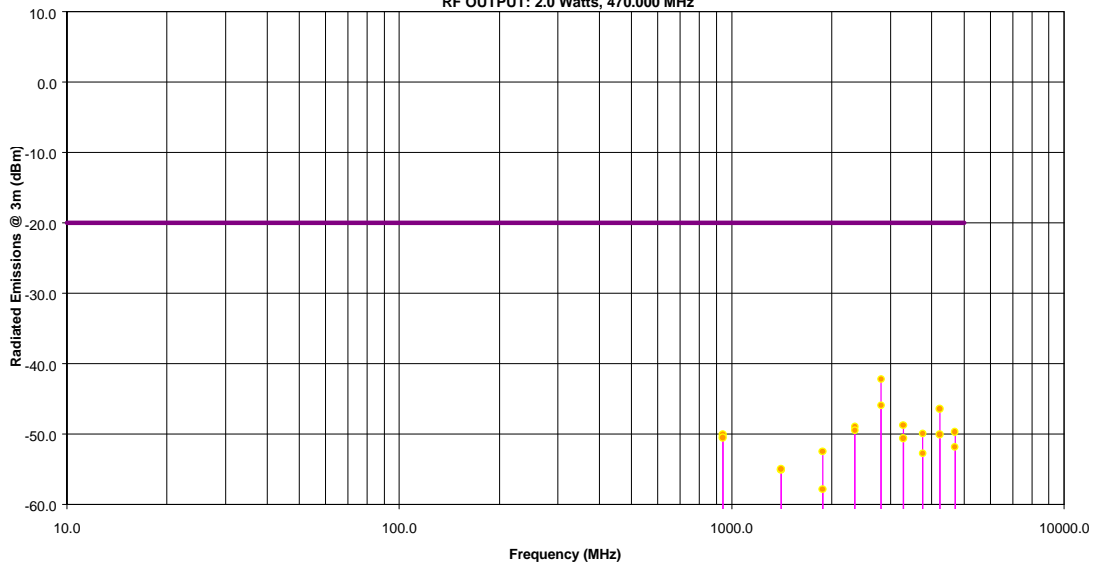

**ULTRATECH GROUP OF LABS**

4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>


File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.7.3. Teklogix TRX7355 Radio with Teklogix 7030 (Portable) System

| Fundamental Frequency: 406.125 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 1.5 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 812.25  | 49.7                             | -47.8                | PEAK                    | V                   | -20.0       | -27.8       | PASS      |
| 812.25  | 49.9                             | -47.6                | PEAK                    | H                   | -20.0       | -27.6       | PASS      |
| 1218.38   | 49.7                             | -47.8                | PEAK                    | V                   | -20.0       | -27.8       | PASS      |
| 1218.38   | 48.7                             | -48.8                | PEAK                    | H                   | -20.0       | -28.8       | PASS      |
| 1624.50   | 52.9                             | -44.6                | PEAK                    | V                   | -20.0       | -24.6       | PASS      |
| 1624.50   | 50.8                             | -46.7                | PEAK                    | H                   | -20.0       | -26.7       | PASS      |
| 2030.63   | 49.5                             | -48.0                | PEAK                    | V                   | -20.0       | -28.0       | PASS      |
| 2030.63   | 43.2                             | -54.3                | PEAK                    | H                   | -20.0       | -34.3       | PASS      |
| 2436.75   | 48.8                             | -48.7                | PEAK                    | V                   | -20.0       | -28.7       | PASS      |
| 2436.75   | 44.6                             | -52.9                | PEAK                    | H                   | -20.0       | -32.9       | PASS      |
| 2842.88   | 51.5                             | -46.0                | PEAK                    | V                   | -20.0       | -26.0       | PASS      |
| 2842.88   | 48.7                             | -48.8                | PEAK                    | H                   | -20.0       | -28.8       | PASS      |
| 3249.00   | 46.8                             | -50.7                | PEAK                    | V                   | -20.0       | -30.7       | PASS      |
| 3249.00   | 44.8                             | -52.8                | PEAK                    | H                   | -20.0       | -32.8       | PASS      |
| 3655.13   | 48.4                             | -49.1                | PEAK                    | V                   | -20.0       | -29.1       | PASS      |
| 3655.13   | 47.4                             | -50.1                | PEAK                    | H                   | -20.0       | -30.1       | PASS      |
| 4061.25   | 48.2                             | -49.3                | PEAK                    | V                   | -20.0       | -29.3       | PASS      |
| 4061.25   | 45.8                             | -51.7                | PEAK                    | H                   | -20.0       | -31.7       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

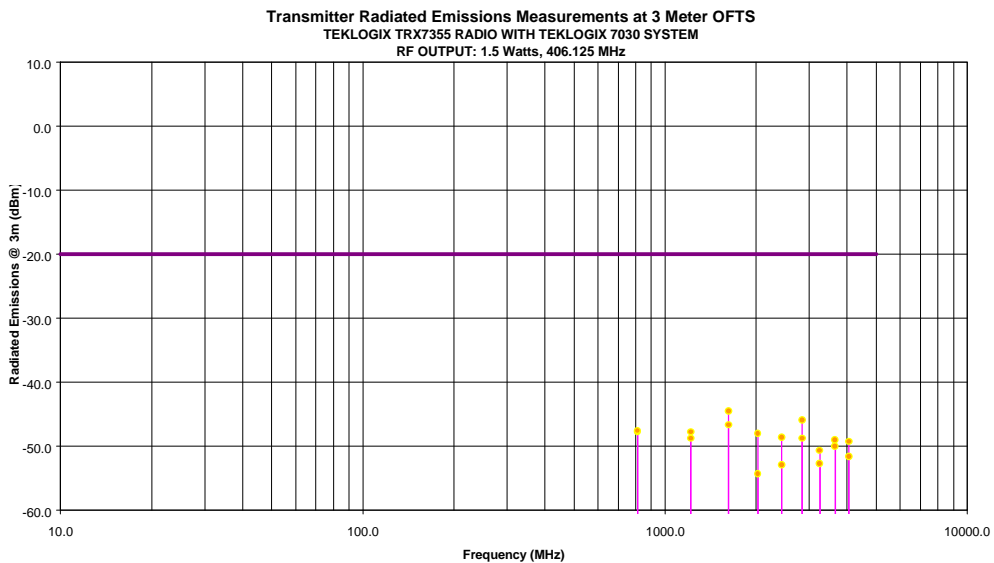


ULTRATECH GROUP OF LABS

File #: TEK-122FTX

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 450.000 MHz  |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts  |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data   |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 900.00  | 55.7                             | -41.8                | PEAK                    | V                   | -20.0       | -21.8       | PASS      |
| 900.00  | 45.7                             | -51.8                | PEAK                    | H                   | -20.0       | -31.8       | PASS      |
| 1350.00   | 45.1                             | -52.4                | PEAK                    | V                   | -20.0       | -32.4       | PASS      |
| 1350.00   | 46.8                             | -50.7                | PEAK                    | H                   | -20.0       | -30.7       | PASS      |
| 1800.00   | 62.2                             | -35.3                | PEAK                    | V                   | -20.0       | -15.3       | PASS      |
| 1800.00   | 54.8                             | -42.8                | PEAK                    | H                   | -20.0       | -22.8       | PASS      |
| 2250.00   | 54.3                             | -43.2                | PEAK                    | V                   | -20.0       | -23.2       | PASS      |
| 2250.00   | 50.2                             | -47.3                | PEAK                    | H                   | -20.0       | -27.3       | PASS      |
| 2700.00   | 40.8                             | -56.8                | PEAK                    | H                   | -20.0       | -36.8       | PASS      |
| 3150.00   | 43.5                             | -54.0                | PEAK                    | V                   | -20.0       | -34.0       | PASS      |
| 3150.00   | 45.5                             | -52.0                | PEAK                    | H                   | -20.0       | -32.0       | PASS      |
| 3600.00   | 47.3                             | -50.3                | PEAK                    | V                   | -20.0       | -30.3       | PASS      |
| 3600.00   | 47.9                             | -49.6                | PEAK                    | H                   | -20.0       | -29.6       | PASS      |
| 4050.00   | 46.0                             | -51.5                | PEAK                    | V                   | -20.0       | -31.5       | PASS      |
| 4050.00   | 50.2                             | -47.3                | PEAK                    | H                   | -20.0       | -27.3       | PASS      |
| 4500.00   | 48.4                             | -49.1                | PEAK                    | V                   | -20.0       | -29.1       | PASS      |
| 4500.00   | 45.9                             | -51.6                | PEAK                    | H                   | -20.0       | -31.6       | PASS      |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |                                  |                      |                         |                     |             |             |           |

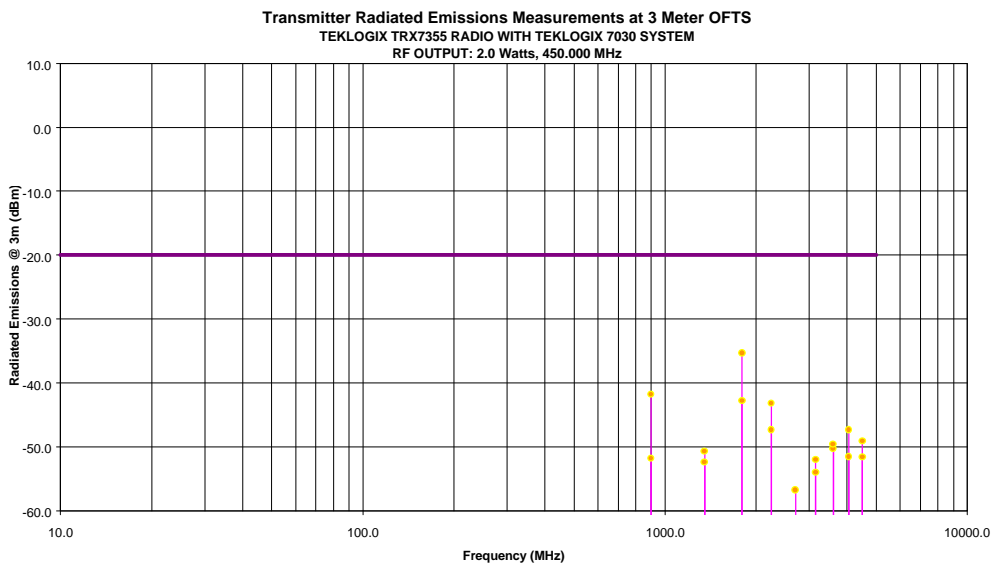

**ULTRATECH GROUP OF LABS**

File #: TEK-122FTX


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 940.00  | 53.8                             | -43.7                | PEAK                    | V                   | -20.0       | -23.7       | PASS      |
| 940.00  | 48.0                             | -49.5                | PEAK                    | H                   | -20.0       | -29.5       | PASS      |
| 1410.00   | 52.4                             | -45.1                | PEAK                    | V                   | -20.0       | -25.1       | PASS      |
| 1410.00   | 45.4                             | -52.1                | PEAK                    | H                   | -20.0       | -32.1       | PASS      |
| 1880.00   | 54.1                             | -43.4                | PEAK                    | V                   | -20.0       | -23.4       | PASS      |
| 1880.00   | 56.8                             | -40.8                | PEAK                    | H                   | -20.0       | -20.8       | PASS      |
| 2350.00   | 50.4                             | -47.1                | PEAK                    | V                   | -20.0       | -27.1       | PASS      |
| 2350.00   | 48.1                             | -49.4                | PEAK                    | H                   | -20.0       | -29.4       | PASS      |
| 2820.00   | 46.4                             | -51.1                | PEAK                    | V                   | -20.0       | -31.1       | PASS      |
| 2820.00   | 47.0                             | -50.5                | PEAK                    | H                   | -20.0       | -30.5       | PASS      |
| 3290.00   | 44.4                             | -53.1                | PEAK                    | V                   | -20.0       | -33.1       | PASS      |
| 3290.00   | 43.2                             | -54.3                | PEAK                    | H                   | -20.0       | -34.3       | PASS      |
| 3760.00   | 48.5                             | -49.0                | PEAK                    | V                   | -20.0       | -29.0       | PASS      |
| 3760.00   | 44.8                             | -52.8                | PEAK                    | H                   | -20.0       | -32.8       | PASS      |
| 4230.00   | 46.8                             | -50.7                | PEAK                    | V                   | -20.0       | -30.7       | PASS      |
| 4230.00   | 47.3                             | -50.2                | PEAK                    | H                   | -20.0       | -30.2       | PASS      |
| 4700.00   | 46.7                             | -50.8                | PEAK                    | V                   | -20.0       | -30.8       | PASS      |
| 4700.00   | 46.9                             | -50.6                | PEAK                    | H                   | -20.0       | -30.6       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 7030 SYSTEM  
 RF OUTPUT: 2.0 Watts, 470.000 MHz

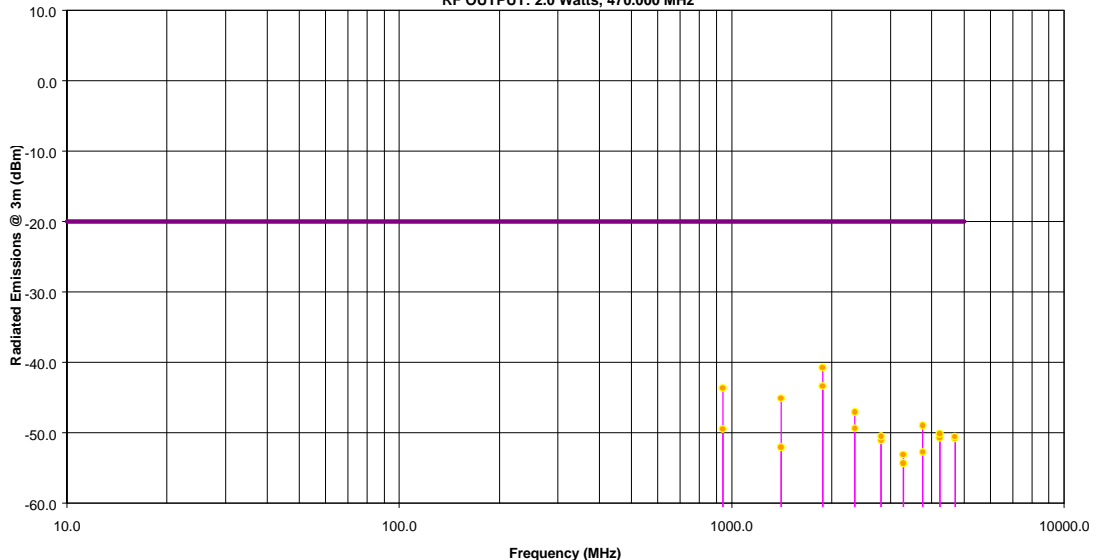

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>


File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.7.4. Teklogix TRX7355 Radio with Teklogix 8045 (Mobile) System

| Fundamental Frequency: 406.125 MHz                        |  |                            |                               |                           |                |                |               |
|---|--|----------------------------|-------------------------------|---------------------------|----------------|----------------|---------------|
| RF Output Power: 1.5 Watts                                |  |                            |                               |                           |                |                |               |
| Modulation: FM modulation with 9600b/s pseudo random data |  |                            |                               |                           |                |                |               |
| FREQUENCY<br>(MHz)  | RF Field<br>Strength Level<br>(dBuV/m) | RF Power<br>Level<br>(dBm) | DETECTOR<br>USED<br>(PEAK/QP) | ANTENNA<br>PLANE<br>(H/V) | LIMIT<br>(dBm) | MARGIN<br>(dB) | PASS/<br>FAIL |
| 812.25  | 60.9                                   | -36.6                      | PEAK                          | V                         | -20.0          | -16.6          | PASS          |
| 812.25  | 62.1                                   | -35.4                      | PEAK                          | H                         | -20.0          | -15.4          | PASS          |
| 1218.38   | 43.0                                   | -54.5                      | PEAK                          | V                         | -20.0          | -34.5          | PASS          |
| 1218.38   | 44.6                                   | -52.9                      | PEAK                          | H                         | -20.0          | -32.9          | PASS          |
| 1624.50   | 51.0                                   | -46.5                      | PEAK                          | V                         | -20.0          | -26.5          | PASS          |
| 1624.50   | 48.9                                   | -48.6                      | PEAK                          | H                         | -20.0          | -28.6          | PASS          |
| 2030.63   | 37.9                                   | -59.6                      | PEAK                          | V                         | -20.0          | -39.6          | PASS          |
| 2030.63   | 38.4                                   | -59.1                      | PEAK                          | H                         | -20.0          | -39.1          | PASS          |
| 2436.75   | 45.4                                   | -52.1                      | PEAK                          | V                         | -20.0          | -32.1          | PASS          |
| 2436.75   | 47.3                                   | -50.2                      | PEAK                          | H                         | -20.0          | -30.2          | PASS          |
| 2842.88   | 46.4                                   | -51.1                      | PEAK                          | V                         | -20.0          | -31.1          | PASS          |
| 2842.88   | 49.8                                   | -47.7                      | PEAK                          | H                         | -20.0          | -27.7          | PASS          |
| 3249.00   | 41.0                                   | -56.5                      | PEAK                          | V                         | -20.0          | -36.5          | PASS          |
| 3249.00   | 41.8                                   | -55.7                      | PEAK                          | H                         | -20.0          | -35.7          | PASS          |
| 3655.00   | 43.4                                   | -54.1                      | PEAK                          | V                         | -20.0          | -34.1          | PASS          |
| 3655.00   | 45.2                                   | -52.3                      | PEAK                          | H                         | -20.0          | -32.3          | PASS          |
| 4061.25   | 44.9                                   | -52.6                      | PEAK                          | V                         | -20.0          | -32.6          | PASS          |
| 4061.25   | 46.0                                   | -51.5                      | PEAK                          | H                         | -20.0          | -31.5          | PASS          |
| 5000.00   | 0.0                                    | -97.5                      | PEAK                          | H                         | -20.0          | -77.5          | PASS          |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

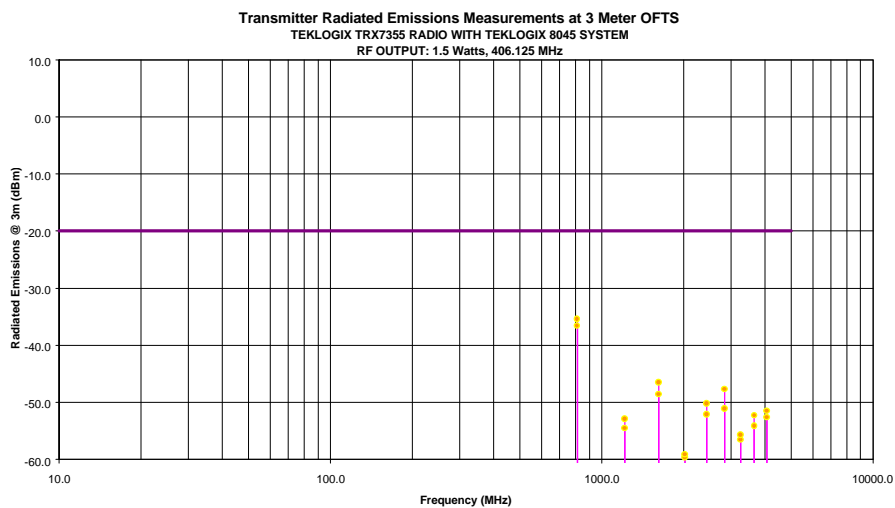

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



| Fundamental Frequency: 450.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 900.00  | 40.7                             | -56.8                | PEAK                    | V                   | -20.0       | -36.8       | PASS      |
| 900.00  | 42.1                             | -55.4                | PEAK                    | H                   | -20.0       | -35.4       | PASS      |
| 1350.00   | 40.4                             | -57.1                | PEAK                    | V                   | -20.0       | -37.1       | PASS      |
| 1350.00   | 41.8                             | -55.7                | PEAK                    | H                   | -20.0       | -35.7       | PASS      |
| 1800.00   | 41.1                             | -56.4                | PEAK                    | V                   | -20.0       | -36.4       | PASS      |
| 1800.00   | 42.5                             | -55.0                | PEAK                    | H                   | -20.0       | -35.0       | PASS      |
| 2250.00   | 41.6                             | -55.9                | PEAK                    | V                   | -20.0       | -35.9       | PASS      |
| 2250.00   | 41.6                             | -55.9                | PEAK                    | H                   | -20.0       | -35.9       | PASS      |
| 2700.00   | 47.2                             | -50.3                | PEAK                    | V                   | -20.0       | -30.3       | PASS      |
| 2700.00   | 43.0                             | -54.5                | PEAK                    | H                   | -20.0       | -34.5       | PASS      |
| 3150.00   | 43.9                             | -53.6                | PEAK                    | V                   | -20.0       | -33.6       | PASS      |
| 3150.00   | 43.1                             | -54.4                | PEAK                    | H                   | -20.0       | -34.4       | PASS      |
| 3600.00   | 44.8                             | -52.7                | PEAK                    | V                   | -20.0       | -32.7       | PASS      |
| 3600.00   | 42.4                             | -55.1                | PEAK                    | H                   | -20.0       | -35.1       | PASS      |
| 4050.00   | 44.7                             | -52.8                | PEAK                    | V                   | -20.0       | -32.8       | PASS      |
| 4500.00   | 50.4                             | -47.1                | PEAK                    | V                   | -20.0       | -27.1       | PASS      |
| 4500.00   | 46.7                             | -50.8                | PEAK                    | H                   | -20.0       | -30.8       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 8045 SYSTEM  
 RF OUTPUT: 2.0 Watts, 450.000 MHz

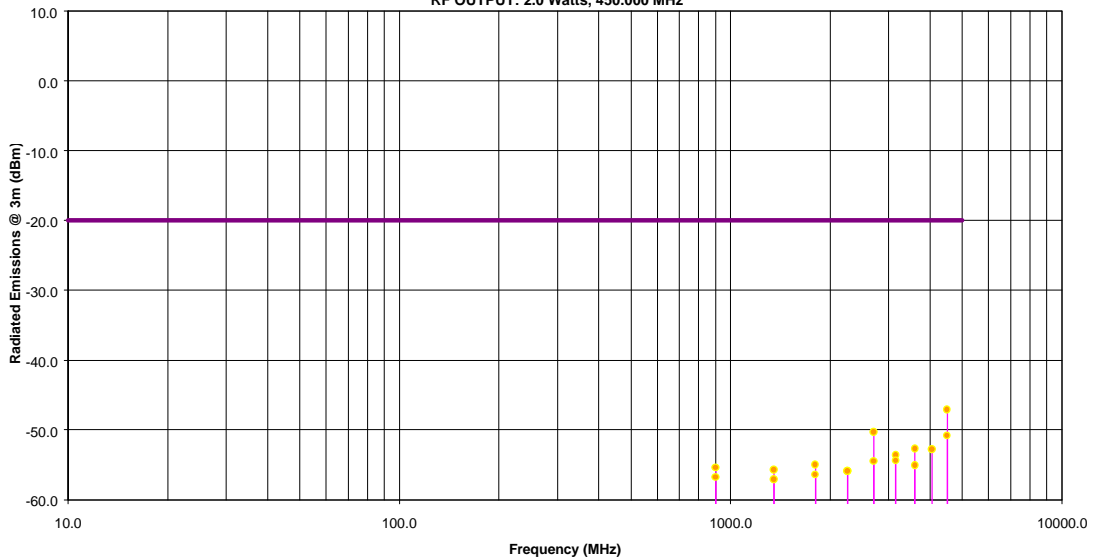

**ULTRATECH GROUP OF LABS**


File #: TEK-122FTX

4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz  |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts  |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data   |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 940.00  | 49.0                             | -48.5                | PEAK                    | V                   | -20.0       | -28.5       | PASS      |
| 940.00  | 47.3                             | -50.2                | PEAK                    | H                   | -20.0       | -30.2       | PASS      |
| 1410.00   | 45.0                             | -52.5                | PEAK                    | V                   | -20.0       | -32.5       | PASS      |
| 1410.00   | 44.0                             | -53.5                | PEAK                    | H                   | -20.0       | -33.5       | PASS      |
| 1880.00   | 38.1                             | -59.4                | PEAK                    | V                   | -20.0       | -39.4       | PASS      |
| 1880.00   | 40.2                             | -57.3                | PEAK                    | H                   | -20.0       | -37.3       | PASS      |
| 2350.00   | 43.1                             | -54.4                | PEAK                    | V                   | -20.0       | -34.4       | PASS      |
| 2350.00   | 40.0                             | -57.5                | PEAK                    | H                   | -20.0       | -37.5       | PASS      |
| 2820.00   | 57.4                             | -40.1                | PEAK                    | V                   | -20.0       | -20.1       | PASS      |
| 2820.00   | 52.8                             | -44.7                | PEAK                    | H                   | -20.0       | -24.7       | PASS      |
| 3290.00   | 41.9                             | -55.6                | PEAK                    | V                   | -20.0       | -35.6       | PASS      |
| 3290.00   | 40.8                             | -56.7                | PEAK                    | H                   | -20.0       | -36.7       | PASS      |
| 3760.00   | 44.2                             | -53.3                | PEAK                    | V                   | -20.0       | -33.3       | PASS      |
| 3760.00   | 41.8                             | -55.7                | PEAK                    | H                   | -20.0       | -35.7       | PASS      |
| 4230.00   | 52.7                             | -44.8                | PEAK                    | V                   | -20.0       | -24.8       | PASS      |
| 4230.00   | 47.7                             | -49.8                | PEAK                    | H                   | -20.0       | -29.8       | PASS      |
| 4700.00   | 50.0                             | -47.5                | PEAK                    | V                   | -20.0       | -27.5       | PASS      |
| 4700.00   | 48.7                             | -48.8                | PEAK                    | H                   | -20.0       | -28.8       | PASS      |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |                                  |                      |                         |                     |             |             |           |

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 8045 SYSTEM  
 RF OUTPUT: 2.0 Watts, 470.000 MHz

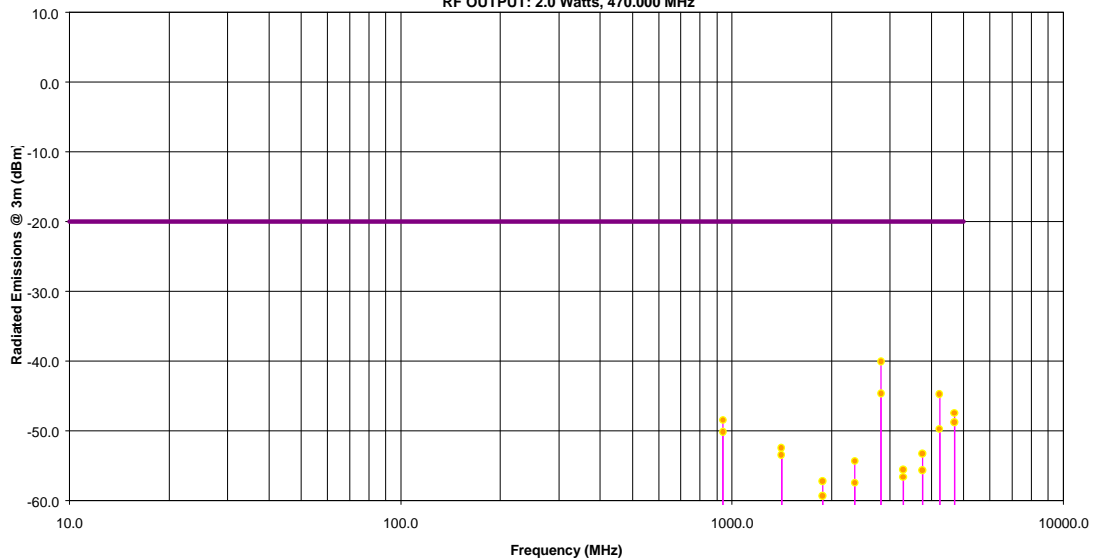

**ULTRATECH GROUP OF LABS**


4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.7.5. Teklogix TRX7355 Radio with Teklogix 8050 (Mobile) System

| Fundamental Frequency: 406.125 MHz  |  |                            |                               |                           |                |                |               |
|---|--|----------------------------|-------------------------------|---------------------------|----------------|----------------|---------------|
| RF Output Power: 1.5 Watts  |  |                            |                               |                           |                |                |               |
| Modulation: FM modulation with 9600b/s pseudo random data   |  |                            |                               |                           |                |                |               |
| FREQUENCY<br>(MHz)  | RF Field<br>Strength Level<br>(dBuV/m) | RF Power<br>Level<br>(dBm) | DETECTOR<br>USED<br>(PEAK/QP) | ANTENNA<br>PLANE<br>(H/V) | LIMIT<br>(dBm) | MARGIN<br>(dB) | PASS/<br>FAIL |
| 812.25  | 60.7                                   | -36.8                      | PEAK                          | V                         | -20.0          | -16.8          | PASS          |
| 812.25  | 64.1                                   | -33.4                      | PEAK                          | H                         | -20.0          | -13.4          | PASS          |
| 1218.38   | 48.1                                   | -49.4                      | PEAK                          | V                         | -20.0          | -29.4          | PASS          |
| 1218.38   | 48.9                                   | -48.6                      | PEAK                          | H                         | -20.0          | -28.6          | PASS          |
| 1624.50   | 55.1                                   | -42.4                      | PEAK                          | V                         | -20.0          | -22.4          | PASS          |
| 1624.50   | 51.5                                   | -46.0                      | PEAK                          | H                         | -20.0          | -26.0          | PASS          |
| 2030.63   | 38.6                                   | -58.9                      | PEAK                          | V                         | -20.0          | -38.9          | PASS          |
| 2030.63   | 38.9                                   | -58.6                      | PEAK                          | H                         | -20.0          | -38.6          | PASS          |
| 2436.75   | 45.1                                   | -52.4                      | PEAK                          | V                         | -20.0          | -32.4          | PASS          |
| 2436.75   | 40.5                                   | -57.0                      | PEAK                          | H                         | -20.0          | -37.0          | PASS          |
| 2842.88   | 49.6                                   | -47.9                      | PEAK                          | V                         | -20.0          | -27.9          | PASS          |
| 2842.88   | 44.3                                   | -53.3                      | PEAK                          | H                         | -20.0          | -33.3          | PASS          |
| 3249.00   | 42.4                                   | -55.1                      | PEAK                          | V                         | -20.0          | -35.1          | PASS          |
| 3249.00   | 40.8                                   | -56.7                      | PEAK                          | H                         | -20.0          | -36.7          | PASS          |
| 3655.00   | 43.5                                   | -54.0                      | PEAK                          | V                         | -20.0          | -34.0          | PASS          |
| 3655.00   | 42.3                                   | -55.2                      | PEAK                          | H                         | -20.0          | -35.2          | PASS          |
| 4061.25   | 47.3                                   | -50.2                      | PEAK                          | V                         | -20.0          | -30.2          | PASS          |
| 4061.25   | 46.3                                   | -51.2                      | PEAK                          | H                         | -20.0          | -31.2          | PASS          |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |  |                            |                               |                           |                |                |               |

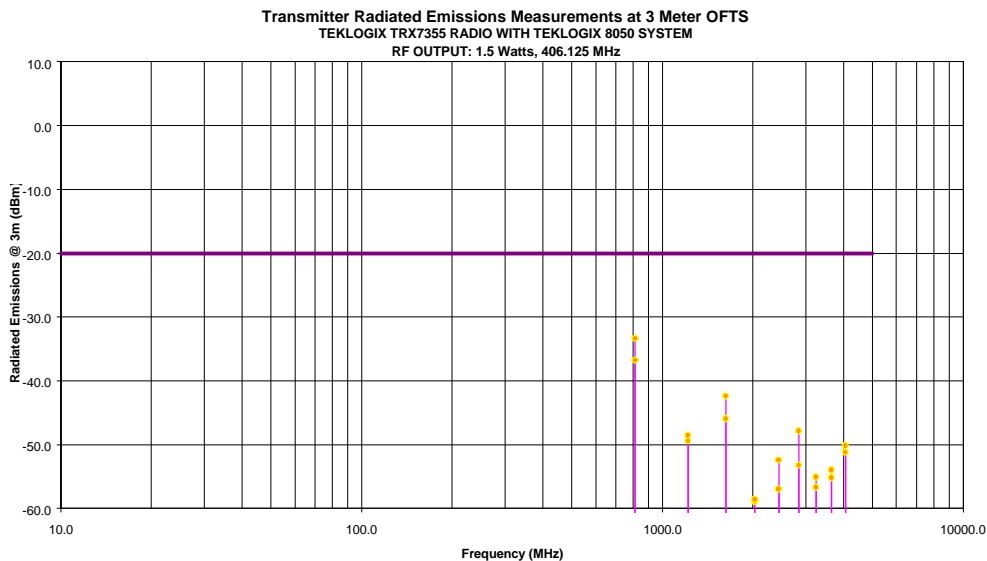

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


| Fundamental Frequency: 450.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 900.00  | 47.0                             | -50.5                | PEAK                    | V                   | -20.0       | -30.5       | PASS      |
| 900.00  | 48.3                             | -49.2                | PEAK                    | H                   | -20.0       | -29.2       | PASS      |
| 1350.00   | 44.2                             | -53.3                | PEAK                    | V                   | -20.0       | -33.3       | PASS      |
| 1350.00   | 44.4                             | -53.1                | PEAK                    | H                   | -20.0       | -33.1       | PASS      |
| 1800.00   | 44.1                             | -53.4                | PEAK                    | V                   | -20.0       | -33.4       | PASS      |
| 1800.00   | 39.4                             | -58.1                | PEAK                    | H                   | -20.0       | -38.1       | PASS      |
| 2250.00   | 40.7                             | -56.8                | PEAK                    | V                   | -20.0       | -36.8       | PASS      |
| 2250.00   | 39.6                             | -57.9                | PEAK                    | H                   | -20.0       | -37.9       | PASS      |
| 2700.00   | 47.5                             | -50.0                | PEAK                    | V                   | -20.0       | -30.0       | PASS      |
| 2700.00   | 44.5                             | -53.0                | PEAK                    | H                   | -20.0       | -33.0       | PASS      |
| 3150.00   | 45.2                             | -52.3                | PEAK                    | V                   | -20.0       | -32.3       | PASS      |
| 3150.00   | 43.7                             | -53.8                | PEAK                    | H                   | -20.0       | -33.8       | PASS      |
| 3600.00   | 44.8                             | -52.7                | PEAK                    | V                   | -20.0       | -32.7       | PASS      |
| 3600.00   | 43.0                             | -54.5                | PEAK                    | H                   | -20.0       | -34.5       | PASS      |
| 4050.00   | 45.4                             | -52.1                | PEAK                    | V                   | -20.0       | -32.1       | PASS      |
| 4050.00   | 44.4                             | -53.1                | PEAK                    | H                   | -20.0       | -33.1       | PASS      |
| 4500.00   | 49.3                             | -48.2                | PEAK                    | V                   | -20.0       | -28.2       | PASS      |
| 4500.00   | 46.1                             | -51.4                | PEAK                    | H                   | -20.0       | -31.4       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS

TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 8050 SYSTEM

RF OUTPUT: 2.0 Watts, 450.000 MHz

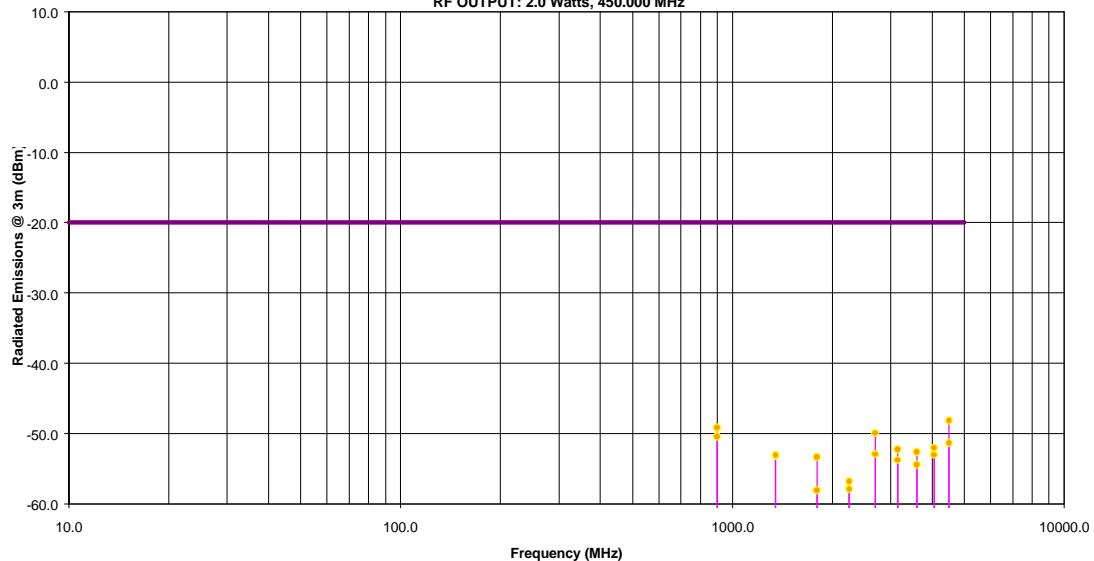

ULTRATECH GROUP OF LABS


4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz  |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts  |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data   |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 940.00  | 53.8                             | -43.7                | PEAK                    | V                   | -20.0       | -23.7       | PASS      |
| 940.00  | 50.6                             | -46.9                | PEAK                    | H                   | -20.0       | -26.9       | PASS      |
| 1410.00   | 47.4                             | -50.1                | PEAK                    | V                   | -20.0       | -30.1       | PASS      |
| 1410.00   | 44.5                             | -53.0                | PEAK                    | H                   | -20.0       | -33.0       | PASS      |
| 1880.00   | 41.1                             | -56.4                | PEAK                    | V                   | -20.0       | -36.4       | PASS      |
| 1880.00   | 40.1                             | -57.4                | PEAK                    | H                   | -20.0       | -37.4       | PASS      |
| 2350.00   | 43.0                             | -54.5                | PEAK                    | V                   | -20.0       | -34.5       | PASS      |
| 2350.00   | 40.8                             | -56.8                | PEAK                    | H                   | -20.0       | -36.8       | PASS      |
| 2820.00   | 56.1                             | -41.4                | PEAK                    | V                   | -20.0       | -21.4       | PASS      |
| 2820.00   | 49.7                             | -47.8                | PEAK                    | H                   | -20.0       | -27.8       | PASS      |
| 3290.00   | 42.3                             | -55.2                | PEAK                    | V                   | -20.0       | -35.2       | PASS      |
| 3290.00   | 42.3                             | -55.2                | PEAK                    | H                   | -20.0       | -35.2       | PASS      |
| 3760.00   | 46.7                             | -50.8                | PEAK                    | V                   | -20.0       | -30.8       | PASS      |
| 3760.00   | 45.4                             | -52.1                | PEAK                    | H                   | -20.0       | -32.1       | PASS      |
| 4230.00   | 51.2                             | -46.3                | PEAK                    | V                   | -20.0       | -26.3       | PASS      |
| 4230.00   | 49.2                             | -48.3                | PEAK                    | H                   | -20.0       | -28.3       | PASS      |
| 4700.00   | 49.1                             | -48.4                | PEAK                    | V                   | -20.0       | -28.4       | PASS      |
| 4700.00   | 46.7                             | -50.8                | PEAK                    | H                   | -20.0       | -30.8       | PASS      |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |                                  |                      |                         |                     |             |             |           |

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 8050 SYSTEM  
 RF OUTPUT: 2.0 Watts, 470.000 MHz

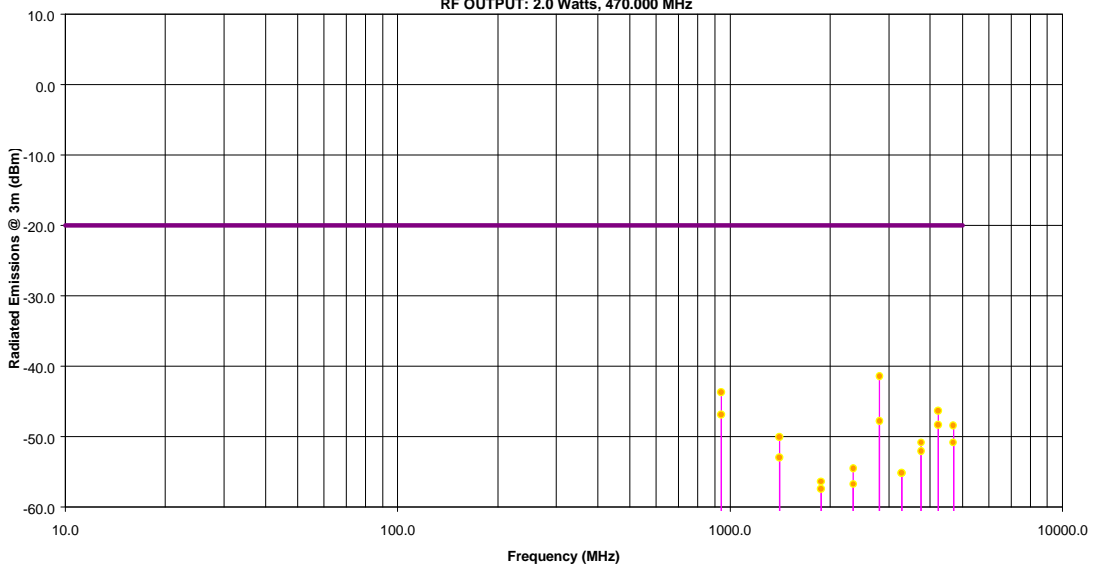

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

---

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>


File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*



3.7.6. Teklogix TRX7355 Radio with Teklogix 8055 (Mobile) System

| Fundamental Frequency: 406.125 MHz  |  |                            |                               |                           |                |                |               |
|---|--|----------------------------|-------------------------------|---------------------------|----------------|----------------|---------------|
| RF Output Power: 1.5 Watts  |  |                            |                               |                           |                |                |               |
| Modulation: FM modulation with 9600b/s pseudo random data   |  |                            |                               |                           |                |                |               |
| FREQUENCY<br>(MHz)  | RF Field<br>Strength Level<br>(dBuV/m) | RF Power<br>Level<br>(dBm) | DETECTOR<br>USED<br>(PEAK/QP) | ANTENNA<br>PLANE<br>(H/V) | LIMIT<br>(dBm) | MARGIN<br>(dB) | PASS/<br>FAIL |
| 812.25  | 40.2                                   | -57.3                      | PEAK                          | V                         | -20.0          | -37.3          | PASS          |
| 812.25  | 40.5                                   | -57.0                      | PEAK                          | H                         | -20.0          | -37.0          | PASS          |
| 1218.38   | 44.5                                   | -53.0                      | PEAK                          | V                         | -20.0          | -33.0          | PASS          |
| 1218.38   | 46.4                                   | -51.1                      | PEAK                          | H                         | -20.0          | -31.1          | PASS          |
| 1624.50   | 42.7                                   | -54.8                      | PEAK                          | V                         | -20.0          | -34.8          | PASS          |
| 1624.50   | 43.7                                   | -53.8                      | PEAK                          | H                         | -20.0          | -33.8          | PASS          |
| 2030.63   | 41.9                                   | -55.6                      | PEAK                          | V                         | -20.0          | -35.6          | PASS          |
| 2030.63   | 42.2                                   | -55.3                      | PEAK                          | H                         | -20.0          | -35.3          | PASS          |
| 2436.75   | 41.5                                   | -56.0                      | PEAK                          | V                         | -20.0          | -36.0          | PASS          |
| 2436.75   | 42.2                                   | -55.3                      | PEAK                          | H                         | -20.0          | -35.3          | PASS          |
| 2842.88   | 43.2                                   | -54.3                      | PEAK                          | V                         | -20.0          | -34.3          | PASS          |
| 2842.88   | 43.8                                   | -53.7                      | PEAK                          | H                         | -20.0          | -33.7          | PASS          |
| 3249.00   | 42.7                                   | -54.8                      | PEAK                          | V                         | -20.0          | -34.8          | PASS          |
| 3655.00   | 43.1                                   | -54.4                      | PEAK                          | V                         | -20.0          | -34.4          | PASS          |
| 3655.00   | 43.0                                   | -54.5                      | PEAK                          | H                         | -20.0          | -34.5          | PASS          |
| 4061.25   | 44.2                                   | -53.3                      | PEAK                          | V                         | -20.0          | -33.3          | PASS          |
| 4061.25   | 42.9                                   | -54.6                      | PEAK                          | H                         | -20.0          | -34.6          | PASS          |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |  |                            |                               |                           |                |                |               |

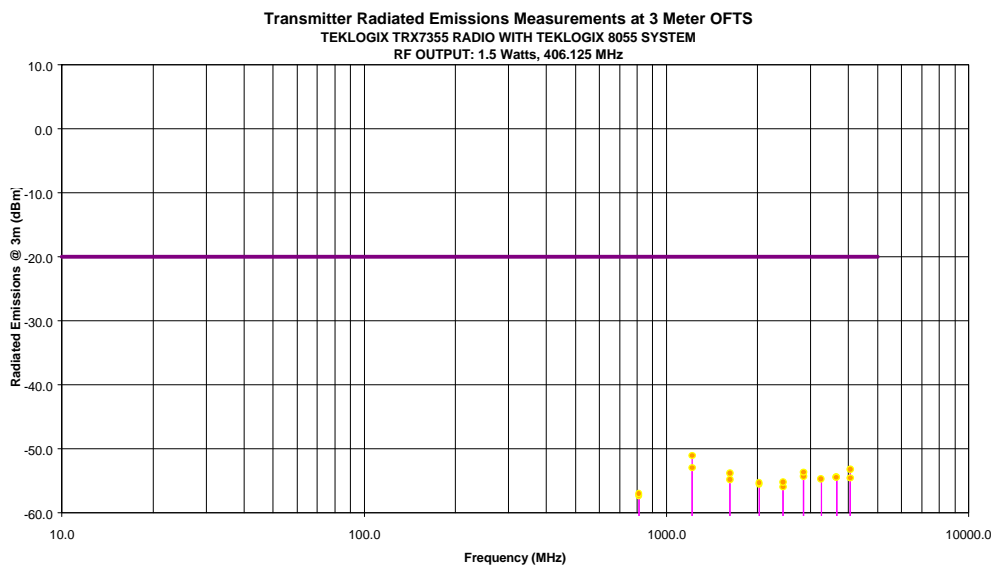

ULTRATECH GROUP OF LABS


4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 450.000 MHz  |  |                            |                               |                           |                |                |               |
|---|--|----------------------------|-------------------------------|---------------------------|----------------|----------------|---------------|
| RF Output Power: 2.0 Watts  |  |                            |                               |                           |                |                |               |
| Modulation: FM modulation with 9600b/s pseudo random data   |  |                            |                               |                           |                |                |               |
| FREQUENCY<br>(MHz)  | RF Field<br>Strength Level<br>(dBuV/m) | RF Power<br>Level<br>(dBm) | DETECTOR<br>USED<br>(PEAK/QP) | ANTENNA<br>PLANE<br>(H/V) | LIMIT<br>(dBm) | MARGIN<br>(dB) | PASS/<br>FAIL |
| 900.00  | 43.9                                   | -53.6                      | PEAK                          | V                         | -20.0          | -33.6          | PASS          |
| 900.00  | 42.4                                   | -55.1                      | PEAK                          | H                         | -20.0          | -35.1          | PASS          |
| 1350.00   | 43.2                                   | -54.3                      | PEAK                          | V                         | -20.0          | -34.3          | PASS          |
| 1350.00   | 35.7                                   | -61.8                      | PEAK                          | H                         | -20.0          | -41.8          | PASS          |
| 1800.00   | 50.5                                   | -47.0                      | PEAK                          | V                         | -20.0          | -27.0          | PASS          |
| 1800.00   | 45.3                                   | -52.2                      | PEAK                          | H                         | -20.0          | -32.2          | PASS          |
| 2250.00   | 48.6                                   | -48.9                      | PEAK                          | V                         | -20.0          | -28.9          | PASS          |
| 2250.00   | 43.4                                   | -54.1                      | PEAK                          | H                         | -20.0          | -34.1          | PASS          |
| 2700.00   | 40.5                                   | -57.0                      | PEAK                          | V                         | -20.0          | -37.0          | PASS          |
| 2700.00   | 39.7                                   | -57.8                      | PEAK                          | H                         | -20.0          | -37.8          | PASS          |
| 3150.00   | 43.6                                   | -53.9                      | PEAK                          | V                         | -20.0          | -33.9          | PASS          |
| 3150.00   | 41.4                                   | -56.1                      | PEAK                          | H                         | -20.0          | -36.1          | PASS          |
| 3600.00   | 43.5                                   | -54.0                      | PEAK                          | V                         | -20.0          | -34.0          | PASS          |
| 3600.00   | 39.4                                   | -58.1                      | PEAK                          | H                         | -20.0          | -38.1          | PASS          |
| 4050.00   | 41.1                                   | -56.4                      | PEAK                          | V                         | -20.0          | -36.4          | PASS          |
| 4500.00   | 46.0                                   | -51.5                      | PEAK                          | V                         | -20.0          | -31.5          | PASS          |
| 4500.00   | 44.3                                   | -53.2                      | PEAK                          | H                         | -20.0          | -33.2          | PASS          |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |  |                            |                               |                           |                |                |               |

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 8055 SYSTEM  
 RF OUTPUT: 2.0 Watts, 450.000 MHz

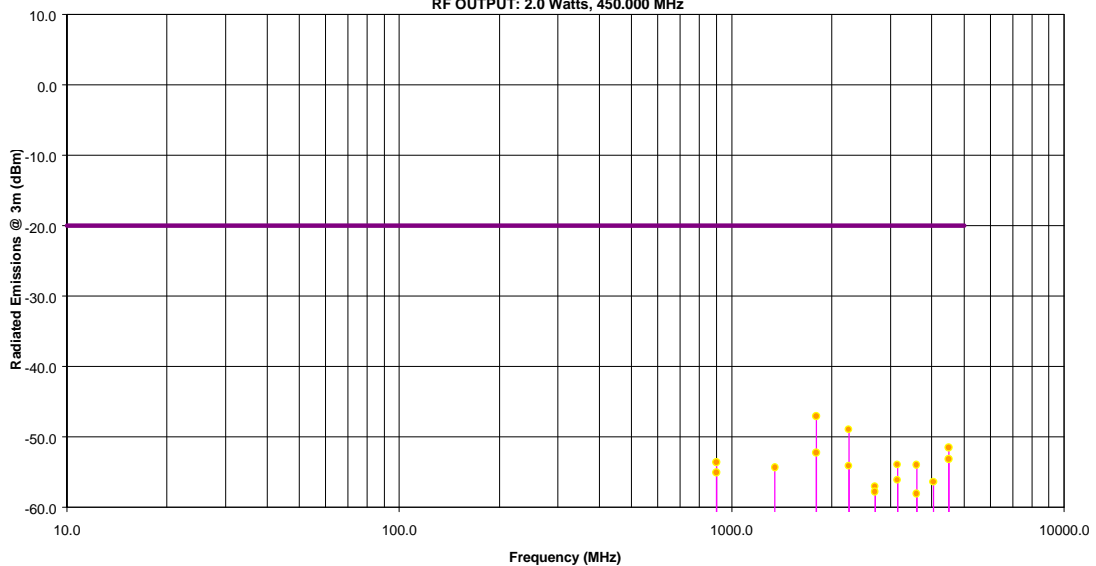

**ULTRATECH GROUP OF LABS**


4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 940.00  | 44.9                             | -52.6                | PEAK                    | V                   | -20.0       | -32.6       | PASS      |
| 940.00  | 39.7                             | -57.8                | PEAK                    | H                   | -20.0       | -37.8       | PASS      |
| 1410.00   | 42.4                             | -55.1                | PEAK                    | V                   | -20.0       | -35.1       | PASS      |
| 1410.00   | 42.3                             | -55.2                | PEAK                    | H                   | -20.0       | -35.2       | PASS      |
| 1880.00   | 45.1                             | -52.4                | PEAK                    | V                   | -20.0       | -32.4       | PASS      |
| 1880.00   | 39.3                             | -58.2                | PEAK                    | H                   | -20.0       | -38.2       | PASS      |
| 2350.00   | 54.0                             | -43.5                | PEAK                    | V                   | -20.0       | -23.5       | PASS      |
| 2350.00   | 40.5                             | -57.0                | PEAK                    | H                   | -20.0       | -37.0       | PASS      |
| 2820.00   | 46.9                             | -50.6                | PEAK                    | V                   | -20.0       | -30.6       | PASS      |
| 2820.00   | 41.3                             | -56.2                | PEAK                    | H                   | -20.0       | -36.2       | PASS      |
| 3290.00   | 41.7                             | -55.8                | PEAK                    | V                   | -20.0       | -35.8       | PASS      |
| 3290.00   | 41.1                             | -56.4                | PEAK                    | H                   | -20.0       | -36.4       | PASS      |
| 3760.00   | 42.5                             | -55.0                | PEAK                    | V                   | -20.0       | -35.0       | PASS      |
| 3760.00   | 40.8                             | -56.7                | PEAK                    | H                   | -20.0       | -36.7       | PASS      |
| 4230.00   | 47.0                             | -50.5                | PEAK                    | V                   | -20.0       | -30.5       | PASS      |
| 4230.00   | 45.6                             | -51.9                | PEAK                    | H                   | -20.0       | -31.9       | PASS      |
| 4700.00   | 47.1                             | -50.4                | PEAK                    | V                   | -20.0       | -30.4       | PASS      |
| 4700.00   | 43.8                             | -53.7                | PEAK                    | H                   | -20.0       | -33.7       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

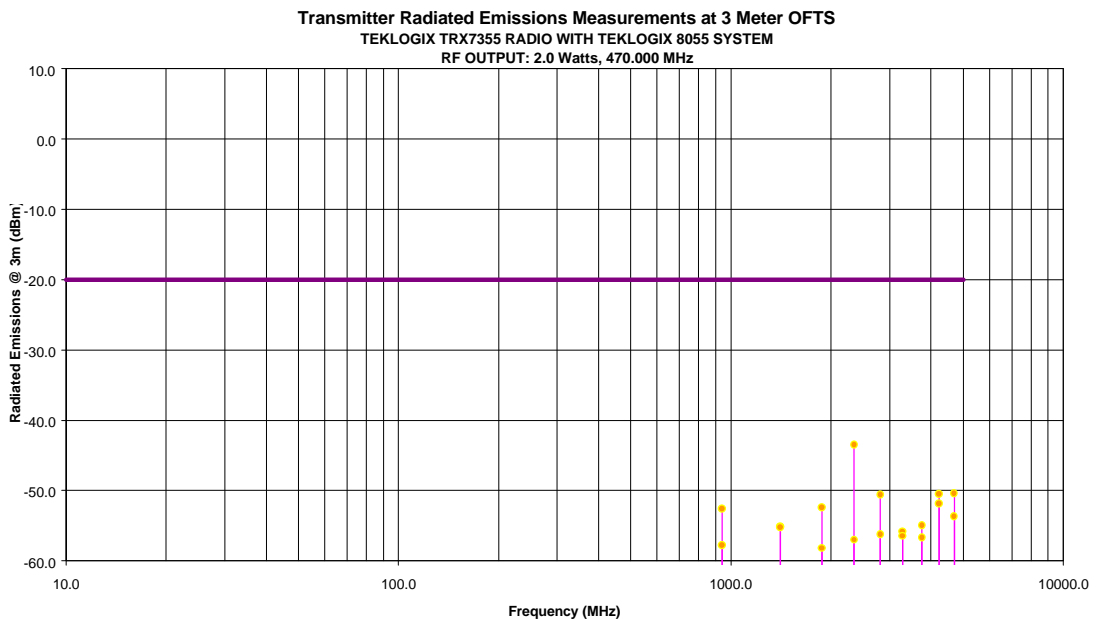

**ULTRATECH GROUP OF LABS**


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.7.7. Teklogix TRX7355 Radio with Teklogix 8060 (Mobile) System

| Fundamental Frequency: 406.125 MHz  |                                  |                      |                         |                     |             |             |            |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|------------|
| RF Output Power: 1.5 Watts  |                                  |                      |                         |                     |             |             |            |
| Modulation: FM modulation with 9600b/s pseudo random data   |                                  |                      |                         |                     |             |             |            |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/ FAIL |
| 812.25  | 34.1                             | -63.4                | PEAK                    | V                   | -20.0       | -43.4       | PASS       |
| 812.25  | 35.4                             | -62.1                | PEAK                    | H                   | -20.0       | -42.1       | PASS       |
| 1218.38   | 42.8                             | -54.7                | PEAK                    | V                   | -20.0       | -34.7       | PASS       |
| 1218.38   | 41.2                             | -56.3                | PEAK                    | H                   | -20.0       | -36.3       | PASS       |
| 1624.50   | 48.3                             | -49.3                | PEAK                    | V                   | -20.0       | -29.3       | PASS       |
| 1624.50   | 43.4                             | -54.1                | PEAK                    | H                   | -20.0       | -34.1       | PASS       |
| 2030.63   | 40.4                             | -57.1                | PEAK                    | V                   | -20.0       | -37.1       | PASS       |
| 2030.63   | 39.8                             | -57.7                | PEAK                    | H                   | -20.0       | -37.7       | PASS       |
| 2436.75   | 40.2                             | -57.3                | PEAK                    | V                   | -20.0       | -37.3       | PASS       |
| 2436.75   | 40.3                             | -57.2                | PEAK                    | H                   | -20.0       | -37.2       | PASS       |
| 2842.88   | 42.2                             | -55.3                | PEAK                    | V                   | -20.0       | -35.3       | PASS       |
| 2842.88   | 42.1                             | -55.4                | PEAK                    | H                   | -20.0       | -35.4       | PASS       |
| 3249.00   | 42.0                             | -55.5                | PEAK                    | V                   | -20.0       | -35.5       | PASS       |
| 3655.00   | 41.8                             | -55.7                | PEAK                    | V                   | -20.0       | -35.7       | PASS       |
| 3655.00   | 41.4                             | -56.1                | PEAK                    | H                   | -20.0       | -36.1       | PASS       |
| 4061.25   | 45.3                             | -52.3                | PEAK                    | V                   | -20.0       | -32.3       | PASS       |
| 4061.25   | 43.2                             | -54.3                | PEAK                    | H                   | -20.0       | -34.3       | PASS       |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |                                  |                      |                         |                     |             |             |            |

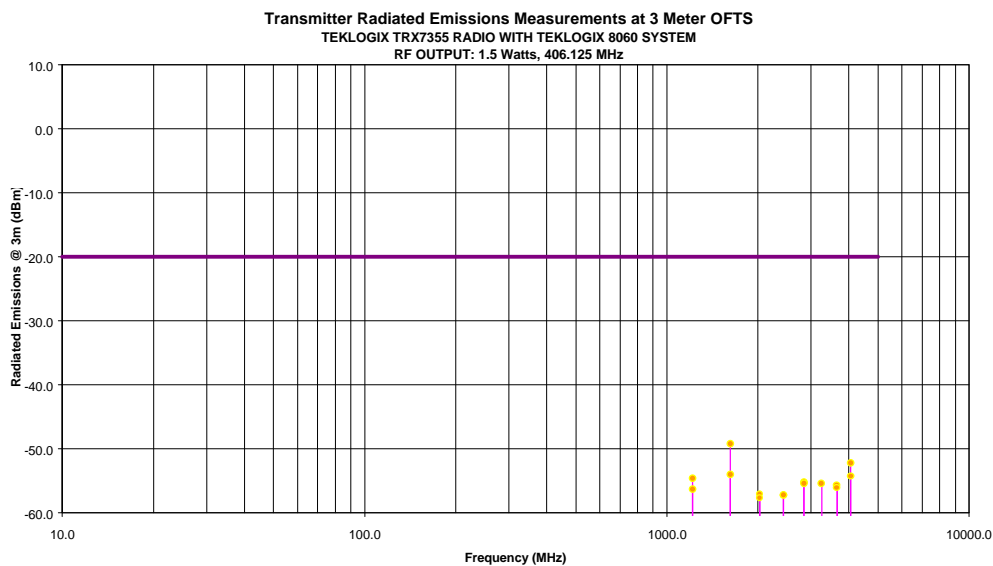

**ULTRATECH GROUP OF LABS**


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 450.000 MHz  |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts  |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data   |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 900.00  | 45.5                             | -52.0                | PEAK                    | V                   | -20.0       | -32.0       | PASS      |
| 900.00  | 42.3                             | -55.2                | PEAK                    | H                   | -20.0       | -35.2       | PASS      |
| 1350.00   | 44.9                             | -52.6                | PEAK                    | V                   | -20.0       | -32.6       | PASS      |
| 1350.00   | 42.1                             | -55.4                | PEAK                    | H                   | -20.0       | -35.4       | PASS      |
| 1800.00   | 48.1                             | -49.4                | PEAK                    | V                   | -20.0       | -29.4       | PASS      |
| 1800.00   | 43.0                             | -54.5                | PEAK                    | H                   | -20.0       | -34.5       | PASS      |
| 2250.00   | 41.9                             | -55.6                | PEAK                    | V                   | -20.0       | -35.6       | PASS      |
| 2250.00   | 40.3                             | -57.2                | PEAK                    | H                   | -20.0       | -37.2       | PASS      |
| 2700.00   | 39.7                             | -57.8                | PEAK                    | V                   | -20.0       | -37.8       | PASS      |
| 2700.00   | 39.3                             | -58.2                | PEAK                    | H                   | -20.0       | -38.2       | PASS      |
| 3150.00   | 41.4                             | -56.1                | PEAK                    | V                   | -20.0       | -36.1       | PASS      |
| 3150.00   | 42.4                             | -55.1                | PEAK                    | H                   | -20.0       | -35.1       | PASS      |
| 3600.00   | 43.7                             | -53.8                | PEAK                    | V                   | -20.0       | -33.8       | PASS      |
| 3600.00   | 43.2                             | -54.3                | PEAK                    | H                   | -20.0       | -34.3       | PASS      |
| 4050.00   | 40.7                             | -56.8                | PEAK                    | V                   | -20.0       | -36.8       | PASS      |
| 4050.00   | 44.5                             | -53.0                | PEAK                    | H                   | -20.0       | -33.0       | PASS      |
| 4500.00   | 45.2                             | -52.3                | PEAK                    | V                   | -20.0       | -32.3       | PASS      |
| 4500.00   | 45.5                             | -52.0                | PEAK                    | H                   | -20.0       | -32.0       | PASS      |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |                                  |                      |                         |                     |             |             |           |

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 8060 SYSTEM  
 RF OUTPUT: 2.0 Watts, 450.000 MHz

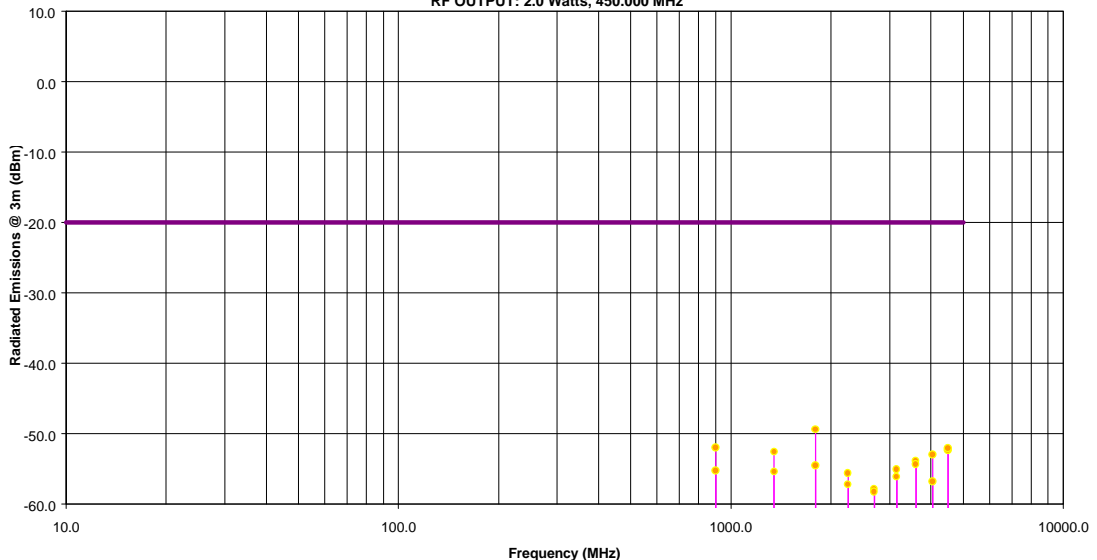

ULTRATECH GROUP OF LABS


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 940.00  | 51.7                             | -45.8                | PEAK                    | V                   | -20.0       | -25.8       | PASS      |
| 940.00  | 46.1                             | -51.4                | PEAK                    | H                   | -20.0       | -31.4       | PASS      |
| 1410.00   | 47.9                             | -49.6                | PEAK                    | V                   | -20.0       | -29.6       | PASS      |
| 1410.00   | 42.7                             | -54.8                | PEAK                    | H                   | -20.0       | -34.8       | PASS      |
| 1880.00   | 44.4                             | -53.1                | PEAK                    | V                   | -20.0       | -33.1       | PASS      |
| 1880.00   | 43.5                             | -54.0                | PEAK                    | H                   | -20.0       | -34.0       | PASS      |
| 2350.00   | 42.9                             | -54.6                | PEAK                    | V                   | -20.0       | -34.6       | PASS      |
| 2350.00   | 42.8                             | -54.7                | PEAK                    | H                   | -20.0       | -34.7       | PASS      |
| 2820.00   | 41.9                             | -55.6                | PEAK                    | V                   | -20.0       | -35.6       | PASS      |
| 2820.00   | 41.4                             | -56.1                | PEAK                    | H                   | -20.0       | -36.1       | PASS      |
| 3290.00   | 42.6                             | -54.9                | PEAK                    | V                   | -20.0       | -34.9       | PASS      |
| 3290.00   | 41.3                             | -56.2                | PEAK                    | H                   | -20.0       | -36.2       | PASS      |
| 3760.00   | 41.4                             | -56.1                | PEAK                    | V                   | -20.0       | -36.1       | PASS      |
| 4230.00   | 46.7                             | -50.8                | PEAK                    | V                   | -20.0       | -30.8       | PASS      |
| 4230.00   | 43.0                             | -54.5                | PEAK                    | H                   | -20.0       | -34.5       | PASS      |
| 4700.00   | 43.4                             | -54.1                | PEAK                    | V                   | -20.0       | -34.1       | PASS      |
| 4700.00   | 42.8                             | -54.8                | PEAK                    | H                   | -20.0       | -34.8       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

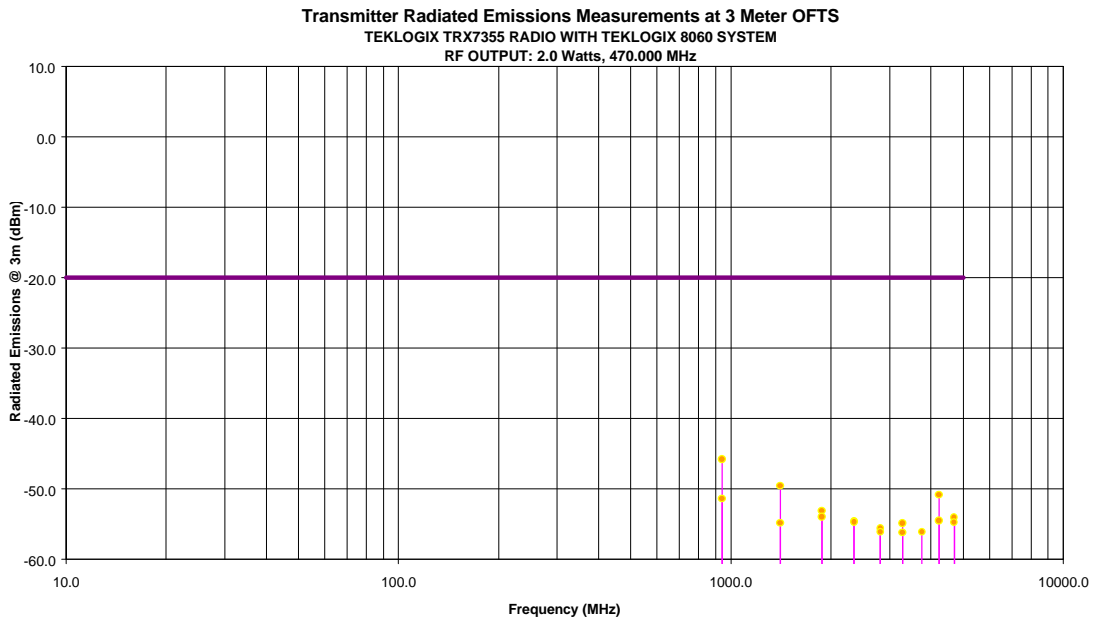

**ULTRATECH GROUP OF LABS**

4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



3.7.8. Teklogix TRX7355 Radio with Teklogix 9130 (Base) System

| Fundamental Frequency: 406.125 MHz  |  |                            |                               |                           |                |                |               |
|---|--|----------------------------|-------------------------------|---------------------------|----------------|----------------|---------------|
| RF Output Power: 1.5 Watts  |  |                            |                               |                           |                |                |               |
| Modulation: FM modulation with 9600b/s pseudo random data   |  |                            |                               |                           |                |                |               |
| FREQUENCY<br>(MHz)  | RF Field<br>Strength Level<br>(dBuV/m) | RF Power<br>Level<br>(dBm) | DETECTOR<br>USED<br>(PEAK/QP) | ANTENNA<br>PLANE<br>(H/V) | LIMIT<br>(dBm) | MARGIN<br>(dB) | PASS/<br>FAIL |
| 812.25  | 57.5                                   | -40.0                      | PEAK                          | V                         | -20.0          | -20.0          | PASS          |
| 812.25  | 53.0                                   | -44.5                      | PEAK                          | H                         | -20.0          | -24.5          | PASS          |
| 1218.38   | 42.4                                   | -55.1                      | PEAK                          | V                         | -20.0          | -35.1          | PASS          |
| 1218.38   | 39.2                                   | -58.3                      | PEAK                          | H                         | -20.0          | -38.3          | PASS          |
| 1624.50   | 46.8                                   | -50.7                      | PEAK                          | V                         | -20.0          | -30.7          | PASS          |
| 1624.50   | 45.0                                   | -52.5                      | PEAK                          | H                         | -20.0          | -32.5          | PASS          |
| 2436.75   | 43.5                                   | -54.0                      | PEAK                          | V                         | -20.0          | -34.0          | PASS          |
| 2436.75   | 40.7                                   | -56.8                      | PEAK                          | H                         | -20.0          | -36.8          | PASS          |
| 2842.88   | 44.4                                   | -53.1                      | PEAK                          | V                         | -20.0          | -33.1          | PASS          |
| 2842.88   | 46.3                                   | -51.3                      | PEAK                          | H                         | -20.0          | -31.3          | PASS          |
| 3249.00   | 42.7                                   | -54.8                      | PEAK                          | H                         | -20.0          | -34.8          | PASS          |
| 3655.00   | 44.2                                   | -53.3                      | PEAK                          | V                         | -20.0          | -33.3          | PASS          |
| 3655.00   | 43.0                                   | -54.5                      | PEAK                          | H                         | -20.0          | -34.5          | PASS          |
| 4061.25   | 48.2                                   | -49.3                      | PEAK                          | V                         | -20.0          | -29.3          | PASS          |
| 4061.25   | 45.5                                   | -52.0                      | PEAK                          | H                         | -20.0          | -32.0          | PASS          |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |  |                            |                               |                           |                |                |               |

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 9130 SYSTEM  
 RF OUTPUT: 1.5 Watts, 406.125 MHz

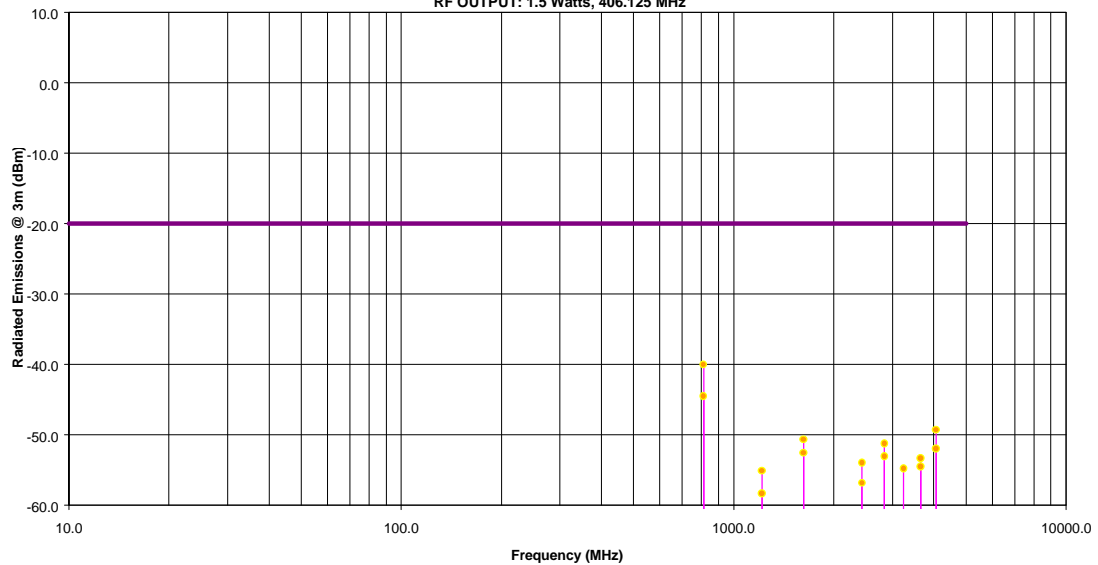


ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 450.000 MHz  |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts  |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data   |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 900.00  | 34.3                             | -63.2                | PEAK                    | V                   | -20.0       | -43.2       | PASS      |
| 900.00  | 34.3                             | -63.3                | PEAK                    | H                   | -20.0       | -43.3       | PASS      |
| 1350.00   | 42.4                             | -55.1                | PEAK                    | V                   | -20.0       | -35.1       | PASS      |
| 1350.00   | 38.6                             | -58.9                | PEAK                    | H                   | -20.0       | -38.9       | PASS      |
| 1800.00   | 40.0                             | -57.5                | PEAK                    | V                   | -20.0       | -37.5       | PASS      |
| 1800.00   | 38.0                             | -59.5                | PEAK                    | H                   | -20.0       | -39.5       | PASS      |
| 2700.00   | 48.0                             | -49.5                | PEAK                    | V                   | -20.0       | -29.5       | PASS      |
| 2700.00   | 45.7                             | -51.8                | PEAK                    | H                   | -20.0       | -31.8       | PASS      |
| 3150.00   | 43.8                             | -53.7                | PEAK                    | V                   | -20.0       | -33.7       | PASS      |
| 4050.00   | 45.1                             | -52.4                | PEAK                    | V                   | -20.0       | -32.4       | PASS      |
| 4050.00   | 44.1                             | -53.4                | PEAK                    | H                   | -20.0       | -33.4       | PASS      |
| 4500.00   | 49.8                             | -47.8                | PEAK                    | V                   | -20.0       | -27.8       | PASS      |
| 4500.00   | 44.9                             | -52.6                | PEAK                    | H                   | -20.0       | -32.6       | PASS      |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |                                  |                      |                         |                     |             |             |           |

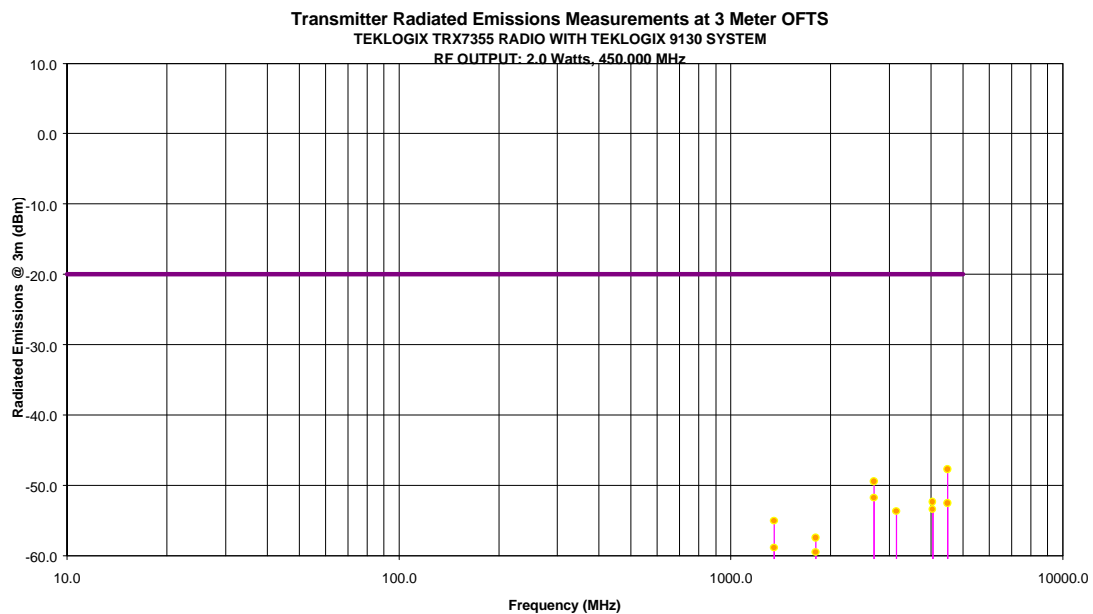


**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz  |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts  |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data   |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 940.00  | 31.7                             | -65.8                | PEAK                    | V                   | -20.0       | -45.8       | PASS      |
| 940.00  | 31.6                             | -65.9                | PEAK                    | H                   | -20.0       | -45.9       | PASS      |
| 1410.00   | 48.4                             | -49.1                | PEAK                    | V                   | -20.0       | -29.1       | PASS      |
| 1410.00   | 43.9                             | -53.6                | PEAK                    | H                   | -20.0       | -33.6       | PASS      |
| 1880.00   | 41.5                             | -56.0                | PEAK                    | V                   | -20.0       | -36.0       | PASS      |
| 1880.00   | 40.8                             | -56.8                | PEAK                    | H                   | -20.0       | -36.8       | PASS      |
| 2350.00   | 44.3                             | -53.2                | PEAK                    | V                   | -20.0       | -33.2       | PASS      |
| 2350.00   | 40.3                             | -57.2                | PEAK                    | H                   | -20.0       | -37.2       | PASS      |
| 2820.00   | 50.3                             | -47.2                | PEAK                    | V                   | -20.0       | -27.2       | PASS      |
| 2820.00   | 51.5                             | -46.0                | PEAK                    | H                   | -20.0       | -26.0       | PASS      |
| 3760.00   | 43.4                             | -54.1                | PEAK                    | H                   | -20.0       | -34.1       | PASS      |
| 4230.00   | 48.7                             | -48.8                | PEAK                    | H                   | -20.0       | -28.8       | PASS      |
| 4700.00   | 47.0                             | -50.5                | PEAK                    | H                   | -20.0       | -30.5       | PASS      |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |                                  |                      |                         |                     |             |             |           |

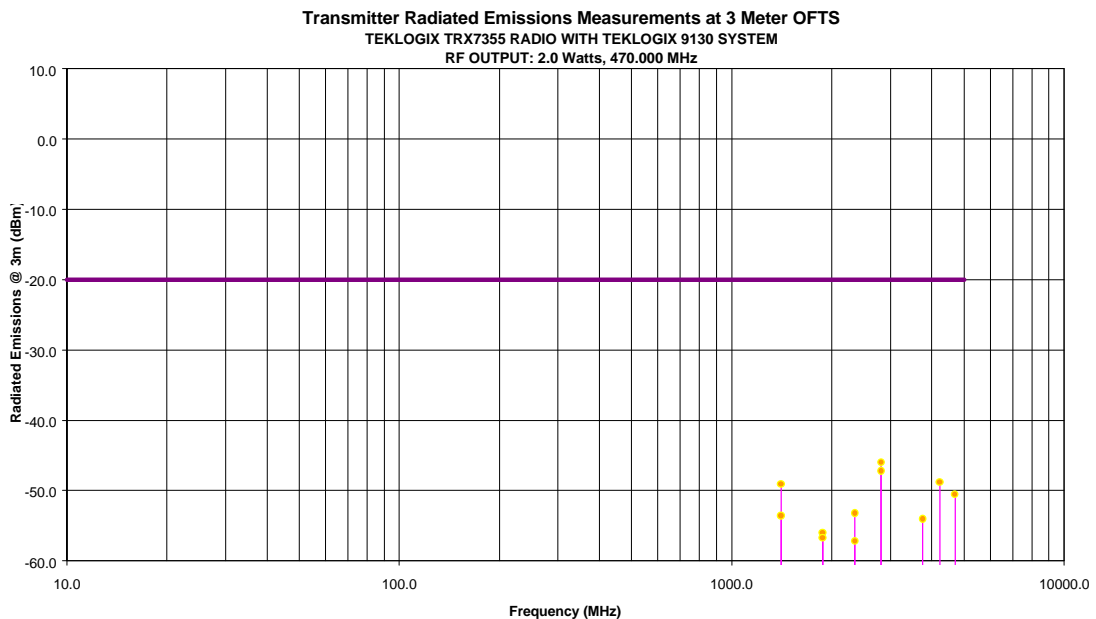

**ULTRATECH GROUP OF LABS**


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.7.9. Teklogix TRX7355 Radio with Teklogix 9140 (Base) System

| Fundamental Frequency: 406.125 MHz  |  |                            |                               |                           |                |                |               |
|---|--|----------------------------|-------------------------------|---------------------------|----------------|----------------|---------------|
| RF Output Power: 1.5 Watts  |  |                            |                               |                           |                |                |               |
| Modulation: FM modulation with 9600b/s pseudo random data   |  |                            |                               |                           |                |                |               |
| FREQUENCY<br>(MHz)  | RF Field<br>Strength Level<br>(dBuV/m) | RF Power<br>Level<br>(dBm) | DETECTOR<br>USED<br>(PEAK/QP) | ANTENNA<br>PLANE<br>(H/V) | LIMIT<br>(dBm) | MARGIN<br>(dB) | PASS/<br>FAIL |
| 812.25  | 57.3                                   | -40.2                      | PEAK                          | V                         | -20.0          | -20.2          | PASS          |
| 812.25  | 60.0                                   | -37.5                      | PEAK                          | H                         | -20.0          | -17.5          | PASS          |
| 1218.38   | 43.0                                   | -54.5                      | PEAK                          | V                         | -20.0          | -34.5          | PASS          |
| 1218.38   | 40.6                                   | -57.0                      | PEAK                          | H                         | -20.0          | -37.0          | PASS          |
| 1624.50   | 48.0                                   | -49.5                      | PEAK                          | V                         | -20.0          | -29.5          | PASS          |
| 1624.50   | 43.7                                   | -53.8                      | PEAK                          | H                         | -20.0          | -33.8          | PASS          |
| 2436.75   | 46.9                                   | -50.6                      | PEAK                          | V                         | -20.0          | -30.6          | PASS          |
| 2436.75   | 40.3                                   | -57.2                      | PEAK                          | H                         | -20.0          | -37.2          | PASS          |
| 2842.88   | 52.0                                   | -45.5                      | PEAK                          | V                         | -20.0          | -25.5          | PASS          |
| 2842.88   | 46.7                                   | -50.8                      | PEAK                          | H                         | -20.0          | -30.8          | PASS          |
| 3249.00   | 44.6                                   | -52.9                      | PEAK                          | V                         | -20.0          | -32.9          | PASS          |
| 4061.25   | 44.9                                   | -52.6                      | PEAK                          | V                         | -20.0          | -32.6          | PASS          |
| 4061.25   | 44.3                                   | -53.2                      | PEAK                          | H                         | -20.0          | -33.2          | PASS          |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |  |                            |                               |                           |                |                |               |

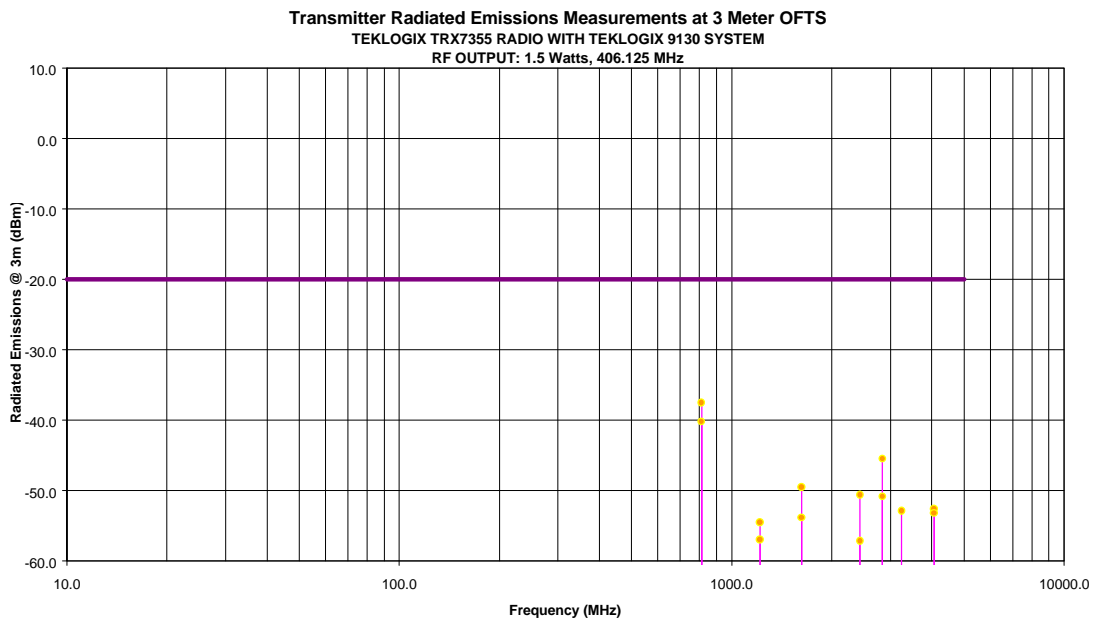

**ULTRATECH GROUP OF LABS**


File #: TEK-122FTX

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 450.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 900.00  | 47.2                             | -50.3                | PEAK                    | V                   | -20.0       | -30.3       | PASS      |
| 900.00  | 49.3                             | -48.3                | PEAK                    | H                   | -20.0       | -28.3       | PASS      |
| 1350.00   | 41.5                             | -56.0                | PEAK                    | V                   | -20.0       | -36.0       | PASS      |
| 1350.00   | 41.3                             | -56.2                | PEAK                    | H                   | -20.0       | -36.2       | PASS      |
| 1800.00   | 41.2                             | -56.3                | PEAK                    | V                   | -20.0       | -36.3       | PASS      |
| 1800.00   | 39.3                             | -58.2                | PEAK                    | H                   | -20.0       | -38.2       | PASS      |
| 2250.00   | 40.3                             | -57.2                | PEAK                    | V                   | -20.0       | -37.2       | PASS      |
| 2250.00   | 38.4                             | -59.1                | PEAK                    | H                   | -20.0       | -39.1       | PASS      |
| 2700.00   | 42.4                             | -55.1                | PEAK                    | V                   | -20.0       | -35.1       | PASS      |
| 2700.00   | 44.0                             | -53.5                | PEAK                    | H                   | -20.0       | -33.5       | PASS      |
| 3150.00   | 42.3                             | -55.3                | PEAK                    | V                   | -20.0       | -35.3       | PASS      |
| 3600.00   | 42.6                             | -54.9                | PEAK                    | V                   | -20.0       | -34.9       | PASS      |
| 4050.00   | 43.3                             | -54.3                | PEAK                    | V                   | -20.0       | -34.3       | PASS      |
| 4500.00   | 47.4                             | -50.1                | PEAK                    | V                   | -20.0       | -30.1       | PASS      |
| 4500.00   | 45.4                             | -52.1                | PEAK                    | H                   | -20.0       | -32.1       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

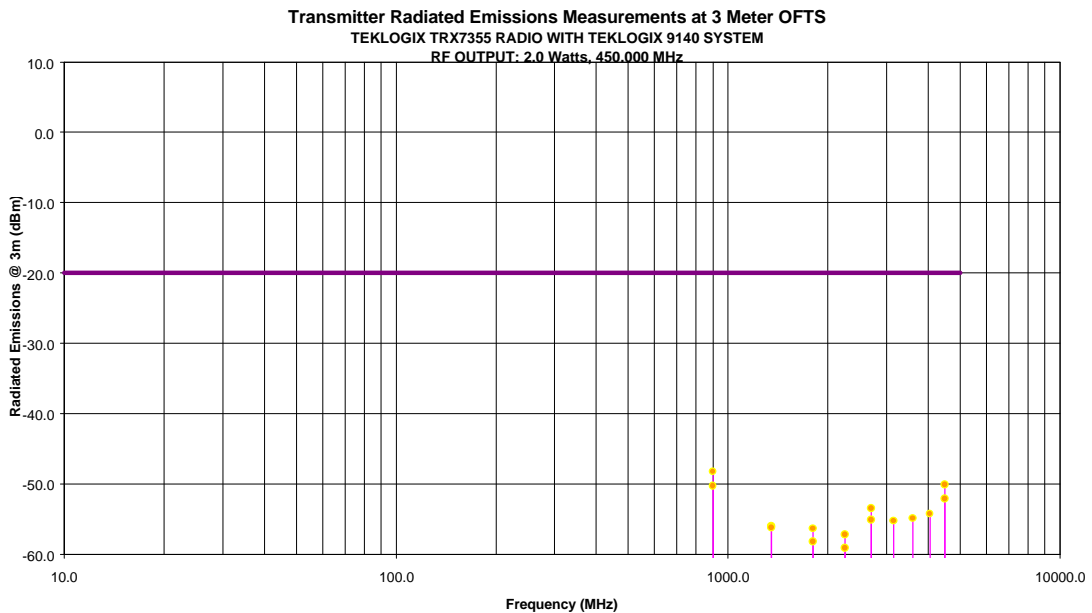

**ULTRATECH GROUP OF LABS**


File #: TEK-122FTX

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz  |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts  |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data   |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 940.00  | 44.8                             | -52.7                | PEAK                    | V                   | -20.0       | -32.7       | PASS      |
| 940.00  | 47.9                             | -49.6                | PEAK                    | H                   | -20.0       | -29.6       | PASS      |
| 1410.00   | 45.6                             | -51.9                | PEAK                    | V                   | -20.0       | -31.9       | PASS      |
| 1410.00   | 46.3                             | -51.2                | PEAK                    | H                   | -20.0       | -31.2       | PASS      |
| 1880.00   | 39.8                             | -57.7                | PEAK                    | V                   | -20.0       | -37.7       | PASS      |
| 1880.00   | 40.0                             | -57.5                | PEAK                    | H                   | -20.0       | -37.5       | PASS      |
| 2350.00   | 40.2                             | -57.3                | PEAK                    | V                   | -20.0       | -37.3       | PASS      |
| 2350.00   | 48.3                             | -49.2                | PEAK                    | H                   | -20.0       | -29.2       | PASS      |
| 2820.00   | 52.6                             | -44.9                | PEAK                    | V                   | -20.0       | -24.9       | PASS      |
| 2820.00   | 51.3                             | -46.2                | PEAK                    | H                   | -20.0       | -26.2       | PASS      |
| 4230.00   | 51.5                             | -46.0                | PEAK                    | V                   | -20.0       | -26.0       | PASS      |
| 4230.00   | 47.3                             | -50.2                | PEAK                    | H                   | -20.0       | -30.2       | PASS      |
| 4700.00   | 44.7                             | -52.8                | PEAK                    | V                   | -20.0       | -32.8       | PASS      |
| 4700.00   | 43.2                             | -54.3                | PEAK                    | H                   | -20.0       | -34.3       | PASS      |
| The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded. |                                  |                      |                         |                     |             |             |           |

Transmitter Radiated Emissions Measurements at 3 Meter OFTS  
 TEKLOGIX TRX7355 RADIO WITH TEKLOGIX 9140 SYSTEM  
 RF OUTPUT: 2.0 Watts, 470.000 MHz

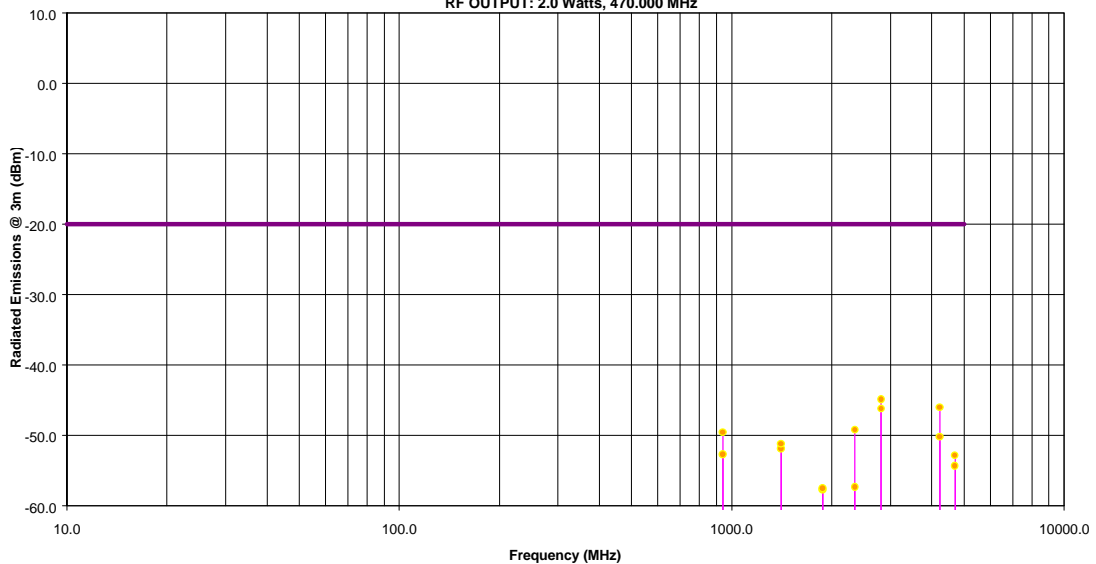

**ULTRATECH GROUP OF LABS**

File #: TEK-122FTX

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)




**3.7.10. Teklogix TRX7355 Radio (outside any Teklogix system)**

The Teklogix test Jig with the radio standing by itself on a wooden table and connected to the test jig using a non-shielded ribbon cable. This is only for verification purpose for the radio shielding effectiveness, realistically, this configuration is never provided for sales or uses.

| Fundamental Frequency: 406.125 MHz                        |                                  |                      |                         |                     |             |             |            |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|------------|
| RF Output Power: 1.5 Watts                                |                                  |                      |                         |                     |             |             |            |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |            |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/ FAIL |
| 812.25  | 74.8                             | -22.8                | PEAK                    | V                   | -20.0       | -2.8        | PASS       |
| 812.25  | 74.3                             | -23.2                | PEAK                    | H                   | -20.0       | -3.2        | PASS       |
| 1218.38   | 62.4                             | -35.1                | PEAK                    | V                   | -20.0       | -15.1       | PASS       |
| 1218.38   | 57.9                             | -39.6                | PEAK                    | H                   | -20.0       | -19.6       | PASS       |
| 1624.50   | 63.9                             | -33.6                | PEAK                    | V                   | -20.0       | -13.6       | PASS       |
| 1624.50   | 56.7                             | -40.8                | PEAK                    | H                   | -20.0       | -20.8       | PASS       |
| 2030.63   | 46.7                             | -50.8                | PEAK                    | V                   | -20.0       | -30.8       | PASS       |
| 2030.63   | 44.5                             | -53.0                | PEAK                    | H                   | -20.0       | -33.0       | PASS       |
| 2436.75   | 56.5                             | -41.0                | PEAK                    | V                   | -20.0       | -21.0       | PASS       |
| 2436.75   | 50.5                             | -47.0                | PEAK                    | H                   | -20.0       | -27.0       | PASS       |
| 2842.88   | 64.6                             | -32.9                | PEAK                    | V                   | -20.0       | -12.9       | PASS       |
| 2842.88   | 61.8                             | -35.7                | PEAK                    | H                   | -20.0       | -15.7       | PASS       |
| 3249.00   | 47.4                             | -50.1                | PEAK                    | V                   | -20.0       | -30.1       | PASS       |
| 3249.00   | 44.4                             | -53.1                | PEAK                    | H                   | -20.0       | -33.1       | PASS       |
| 3655.00   | 47.3                             | -50.3                | PEAK                    | V                   | -20.0       | -30.3       | PASS       |
| 3655.00   | 47.1                             | -50.4                | PEAK                    | H                   | -20.0       | -30.4       | PASS       |
| 4061.25   | 52.7                             | -44.8                | PEAK                    | V                   | -20.0       | -24.8       | PASS       |
| 4061.25   | 53.2                             | -44.3                | PEAK                    | H                   | -20.0       | -24.3       | PASS       |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

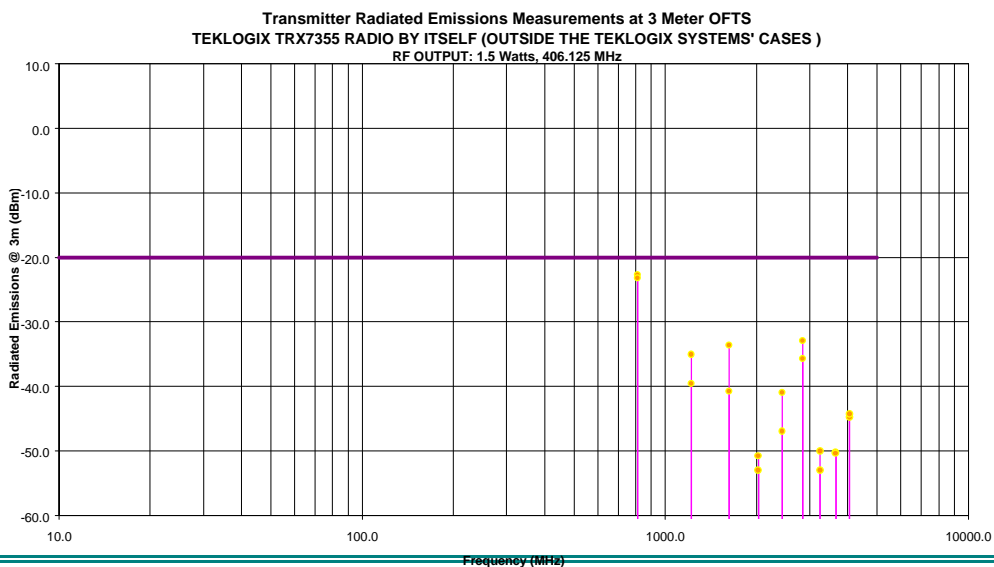

**ULTRATECH GROUP OF LABS**


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 450.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 900.00  | 59.4                             | -38.1                | PEAK                    | V                   | -20.0       | -18.1       | PASS      |
| 900.00  | 60.1                             | -37.4                | PEAK                    | H                   | -20.0       | -17.4       | PASS      |
| 1350.00   | 58.9                             | -38.6                | PEAK                    | V                   | -20.0       | -18.6       | PASS      |
| 1350.00   | 48.8                             | -48.7                | PEAK                    | H                   | -20.0       | -28.7       | PASS      |
| 1800.00   | 49.3                             | -48.3                | PEAK                    | V                   | -20.0       | -28.3       | PASS      |
| 1800.00   | 48.6                             | -48.9                | PEAK                    | H                   | -20.0       | -28.9       | PASS      |
| 2250.00   | 55.7                             | -41.8                | PEAK                    | V                   | -20.0       | -21.8       | PASS      |
| 2250.00   | 54.1                             | -43.4                | PEAK                    | H                   | -20.0       | -23.4       | PASS      |
| 2700.00   | 71.3                             | -26.3                | PEAK                    | V                   | -20.0       | -6.3        | PASS      |
| 2700.00   | 66.5                             | -31.0                | PEAK                    | H                   | -20.0       | -11.0       | PASS      |
| 3150.00   | 56.3                             | -41.2                | PEAK                    | V                   | -20.0       | -21.2       | PASS      |
| 3150.00   | 55.7                             | -41.8                | PEAK                    | H                   | -20.0       | -21.8       | PASS      |
| 3600.00   | 53.9                             | -43.6                | PEAK                    | V                   | -20.0       | -23.6       | PASS      |
| 3600.00   | 51.2                             | -46.3                | PEAK                    | H                   | -20.0       | -26.3       | PASS      |
| 4050.00   | 50.9                             | -46.6                | PEAK                    | V                   | -20.0       | -26.6       | PASS      |
| 4050.00   | 53.2                             | -44.3                | PEAK                    | H                   | -20.0       | -24.3       | PASS      |
| 4500.00   | 55.5                             | -42.0                | PEAK                    | V                   | -20.0       | -22.0       | PASS      |
| 4500.00   | 53.0                             | -44.5                | PEAK                    | H                   | -20.0       | -24.5       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

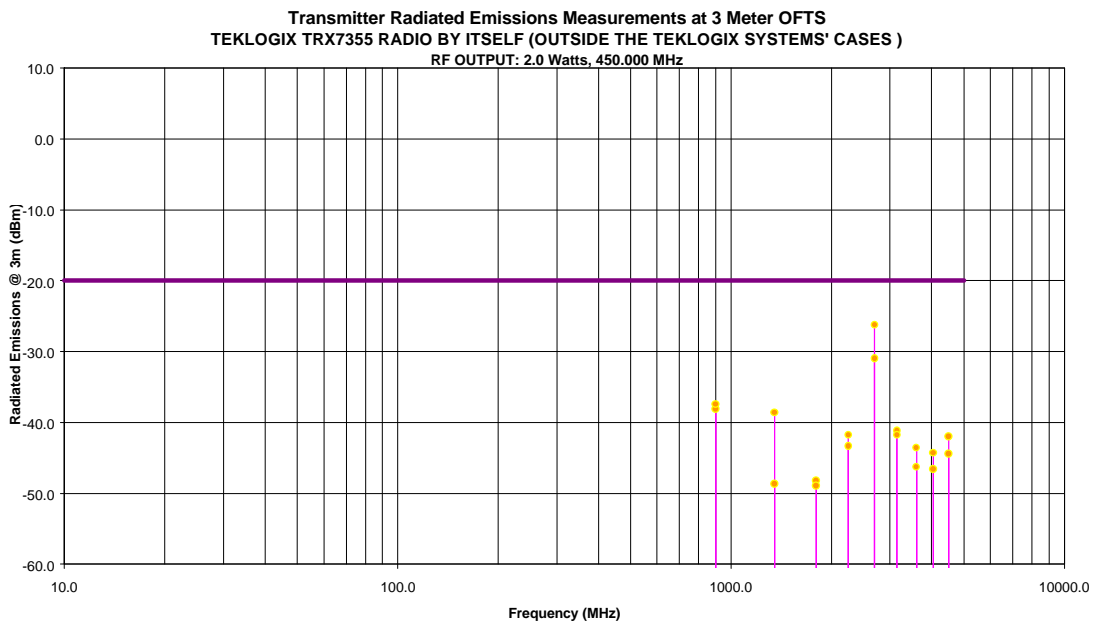

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>


File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| Fundamental Frequency: 470.000 MHz                        |                                  |                      |                         |                     |             |             |           |
|---|----------------------------------|----------------------|-------------------------|---------------------|-------------|-------------|-----------|
| RF Output Power: 2.0 Watts                                |                                  |                      |                         |                     |             |             |           |
| Modulation: FM modulation with 9600b/s pseudo random data |                                  |                      |                         |                     |             |             |           |
| FREQUENCY (MHz)   | RF Field Strength Level (dBuV/m) | RF Power Level (dBm) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBm) | MARGIN (dB) | PASS/FAIL |
| 940.00  | 66.6                             | -30.9                | PEAK                    | V                   | -20.0       | -10.9       | PASS      |
| 940.00  | 66.9                             | -30.6                | PEAK                    | H                   | -20.0       | -10.6       | PASS      |
| 1410.00   | 58.3                             | -39.2                | PEAK                    | V                   | -20.0       | -19.2       | PASS      |
| 1410.00   | 50.7                             | -46.8                | PEAK                    | H                   | -20.0       | -26.8       | PASS      |
| 1880.00   | 56.7                             | -40.8                | PEAK                    | V                   | -20.0       | -20.8       | PASS      |
| 1880.00   | 56.9                             | -40.6                | PEAK                    | H                   | -20.0       | -20.6       | PASS      |
| 2350.00   | 56.1                             | -41.4                | PEAK                    | V                   | -20.0       | -21.4       | PASS      |
| 2350.00   | 50.1                             | -47.4                | PEAK                    | H                   | -20.0       | -27.4       | PASS      |
| 2820.00   | 65.1                             | -32.4                | PEAK                    | V                   | -20.0       | -12.4       | PASS      |
| 2820.00   | 61.4                             | -36.1                | PEAK                    | H                   | -20.0       | -16.1       | PASS      |
| 3290.00   | 50.5                             | -47.0                | PEAK                    | V                   | -20.0       | -27.0       | PASS      |
| 3290.00   | 49.1                             | -48.4                | PEAK                    | H                   | -20.0       | -28.4       | PASS      |
| 3760.00   | 54.9                             | -42.6                | PEAK                    | V                   | -20.0       | -22.6       | PASS      |
| 3760.00   | 54.1                             | -43.4                | PEAK                    | H                   | -20.0       | -23.4       | PASS      |
| 4230.00   | 58.8                             | -38.7                | PEAK                    | V                   | -20.0       | -18.7       | PASS      |
| 4230.00   | 55.1                             | -42.4                | PEAK                    | H                   | -20.0       | -22.4       | PASS      |
| 4700.00   | 54.4                             | -43.1                | PEAK                    | V                   | -20.0       | -23.1       | PASS      |
| 4700.00   | 49.8                             | -47.7                | PEAK                    | H                   | -20.0       | -27.7       | PASS      |

The emissions were scanned from 10 MHz to 5 GHz and all emissions less than 40 dB below the limits were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OETS  
 TEKLOGIX TRX7355 RADIO BY ITSELF (OUTSIDE THE TEKLOGIX SYSTEMS' CASES)  
 RF OUTPUT: 2.0 Watts, 470.000 MHz

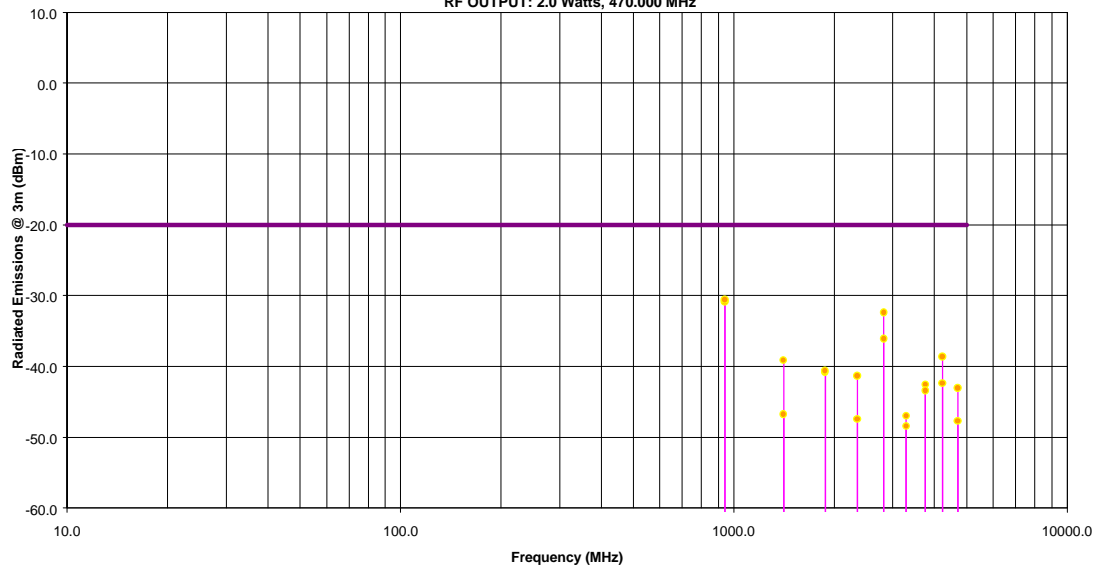

**ULTRATECH GROUP OF LABS**

File #: TEK-122FTX

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 3.8. TRANSIENT FREQUENCY BEHAVIOR

**PRODUCT NAME:** TEKLOGIX TRX7355 VOICE/DATA FM MODULATED TRANSCEIVER (Base, Mobile & Portable), Model No.: TRX7355

**FCC REQUIREMENTS:**

FCC Part 90, Sub. I, Para. 90.214

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:

**Transient Frequency Behavior for equipment Designed to Operate on 12.5 KHz Channels**

| Time Interval <sup>1,2</sup> | Maximum Frequency Difference <sup>3</sup> | All Equipment  |
|------------------------------|---|----------------|
|                              |   | 421 to 512 MHz |
| t1 <sup>4</sup>              | ± 12.5.0 KHz                              | 10.0 ms        |
| t2                           | ± 6.5 KHz                                 | 25.0 ms        |
| t3 <sup>4</sup>              | ± 12.5 KHz                                | 10.0 ms        |

- (1) ton: the instant when a 1 KHz test signal is completely suppressed, including any capture time due to phasing.  
t1: time period immediately after ton  
t2: time period after t1  
t3: time period from the instant when the transmitter is turned off until toff  
toff: the instant when the 1 KHz test signal starts to rise.
- (2) During the time from the end of t2 to the beginning of t3, the frequency difference must not exceed the limits specified in @ 90.213
- (3) Difference between the actual transmitter frequency and assigned transmitter frequency.
- (4) If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

**CLIMATE CONDITION:**

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

**POWER INPUT:**

7.2 Vdc nominal.

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**TEST EQUIPMENT:**

- 1) **RF Synthesized RF Signal Generator**, Fluke, Model 6061A, frequency range 10KHz-1050MHz, power output 13dBm max.
- 2) **Communication Analyzer (Test Receiver)**, Rohde & Schwarz, SMFP2, SN 879988/047, 0.4-1000 MHz, including SINAD, S/N, Modulation meters, AF & RF signal generators and etc....
- 3) **Network Combiner**, Minicircuit, P/N: 15542 (7dB loss)
- 4) **Digital Storage Oscilloscope**, by Phillips, model 3320A, SN DQ 646.
- 5) **67297 RF Detector**, by Herotex, P/N: DZ122-553, S/N: 63400

**METHOD OF MEASUREMENTS:**

Refer to ANSI/TIA/EIA - 603 - 1992, Sec. 2.2.19, Page 83

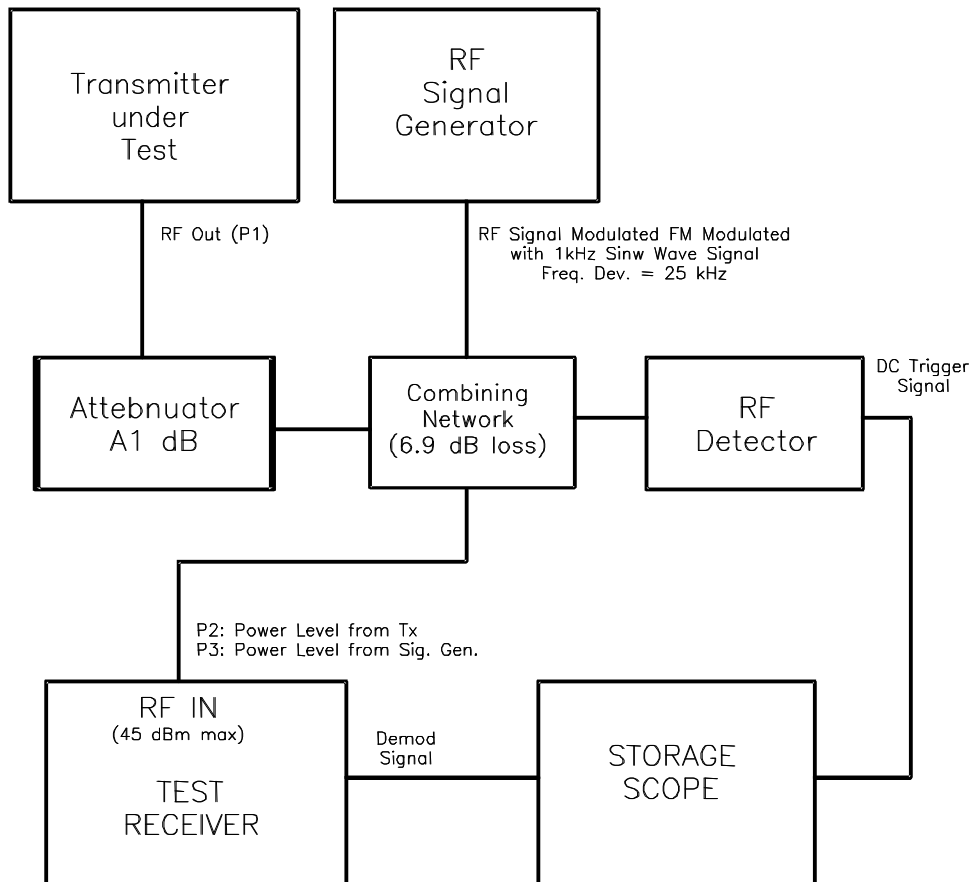

1. Connect the transmitter under tests as shown in the above block diagram
2. Set the signal generator to the assigned frequency and modulate with a 1 kHz tone at  $\pm 25$  kHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at  $\pm 4$  divisions vertical centre at the display.
4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 KHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 kHz test signal is completely suppressed (including any capture time due to phasing) is considered to be  $t_{on}$ . The trace should be maintained within the allowed divisions during the period  $t_1$  and  $t_2$ .
6. During the time from the end of  $t_2$  to the beginning of  $t_3$  the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to the transmitter frequency times its FCC frequency tolerance times  $\pm 4$  display divisions divided by 25 kHz (eg. at transmitter assigned frequency of 460 MHz, limit =  $460 \times 0.005 \times 4 / 25 = 0.37$  div.
7. Repeat the above steps when the transmitter was turned off for measuring  $t_3$ .

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Tri M. Luu, P.Eng.

**DATE:** May 29, 1998

---

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**MEASUREMENT DATA**

**NOTE:** Since all Teklogix Systems (Models 6040, 7025, 7030, 8045, 8050, 8055, 8060, 9130 & 9140) use exactly the same TRX7355 radio transceiver, and the RF output characteristics are exactly the same. This test is required to be tested with only one system and the results shall be the same for all Teklogix systems.

Attenuator A1 = 30 dB

Measured Transmitter RF Output P1: 33 dBm

Measured Transmitter RF Output @ Standard Test Receiver (Max. RF IN: 45 dBm): 3.9 dBm

Measured Signal generator Output P3: -16.1 dBm

▪ **Modulation: Unmodulated**

| Time Interval                             | Transient Frequency | Transient Frequency Limit                   |
|---|---------------------|---|
| t1 (10 mS)<br>SWITCH ON CONDITION         | 0.0 kHz             | 12.5 KHz                                    |
| t2 (25 mS)<br>SWITCH ON CONDITION         | 0.0 kHz             | 6.25 KHz                                    |
| After t2 (10 mS)<br>SWITCH ON CONDITION   | 0.0 kHz             | FCC Limit = ± 604 Hz<br>(0.00015% @403 MHz) |
| Before t3 (10 mS)<br>SWITCH OFF CONDITION | 0.0 kHz             | FCC Limit = ± 604 Hz<br>(0.00015% @403 MHz) |
| t3 (10 mS)<br>SWITCH OFF CONDITION        | 0.0 kHz             | 12.5 KHz                                    |

▪ **Modulation: FM modulation with 2.5 KHz Sine Wave, Freq. Dev.: ±1.3 KHz max.**

| Time Interval                             | Transient Frequency | Transient Frequency Limit                   |
|---|---------------------|---|
| t1 (10 mS)<br>SWITCH ON CONDITION         | 0.0 kHz             | 12.5 KHz                                    |
| t2 (25 mS)<br>SWITCH ON CONDITION         | 0.0 kHz             | 6.25 KHz                                    |
| After t2 (10 mS)<br>SWITCH ON CONDITION   | 0.0 kHz             | FCC Limit = ± 604 Hz<br>(0.00015% @403 MHz) |
| Before t3 (10 mS)<br>SWITCH OFF CONDITION | 0.0 kHz             | FCC Limit = ± 604 Hz<br>(0.00015% @403 MHz) |
| t3 (10 mS)<br>SWITCH OFF CONDITION        | 0.0 kHz             | 12.5 KHz                                    |



- **Modulation:** FM modulation with 9600 b/s pseudo random data, , Freq. Dev.:  $\pm 1.8$  KHz

| Time Interval                             | Transient Frequency | Transient Frequency Limit                       |
|---|---------------------|---|
| t1 (10 mS)<br>SWITCH ON CONDITION         | 0.0 kHz             | 12.5 KHz  |
| t2 (25 mS)<br>SWITCH ON CONDITION         | 0.0 kHz             | 6.25 KHz  |
| After t2 (10 mS)<br>SWITCH ON CONDITION   | 0.0 kHz             | FCC Limit = $\pm 604$ Hz<br>(0.00015% @403 MHz) |
| Before t3 (10 mS)<br>SWITCH OFF CONDITION | 0.0 kHz             | FCC Limit = $\pm 604$ Hz<br>(0.00015% @403 MHz) |
| t3 (10 mS)<br>SWITCH OFF CONDITION        | 0.0 kHz             | 12.5 KHz  |

---

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Date: May 27, 1998  
 Tested by: Tri Luo

**TRANSIENT FREQUENCY BEHAVIOR**  
 Teklogix TRX7355 (12.5 KHz Spaced Transmitter)  
 Modulation: NO MODULATION




TRANSMITTER TURNED OFF

TRANSMITTER TURNED ON

11: 44: 32 98 May 27

11: 48: 58 98 May 27

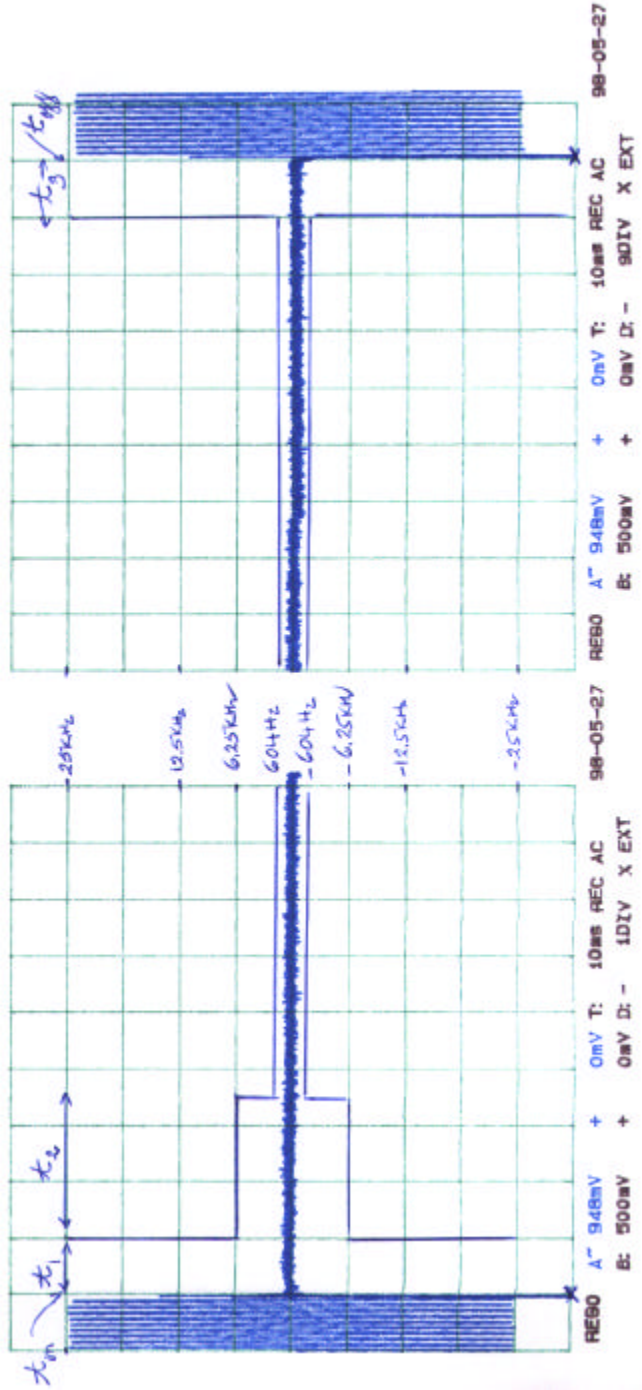

**ULTRATECH GROUP OF LABS**

4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Date: May 27, 1998  
 Tested by: Tri Liao


**TRANSIENT FREQUENCY BEHAVIOR**  
 Teklogix TRX7355 (12.5 KHz Spaced Transmitter)

Modulation: FM MODULATION WITH SINE  
SINE WAVE SIGNAL, FREQ. DEL = 1.4KHz PEAK.




TRANSMITTER TURNED ON

12: 27: 23 98 May 27

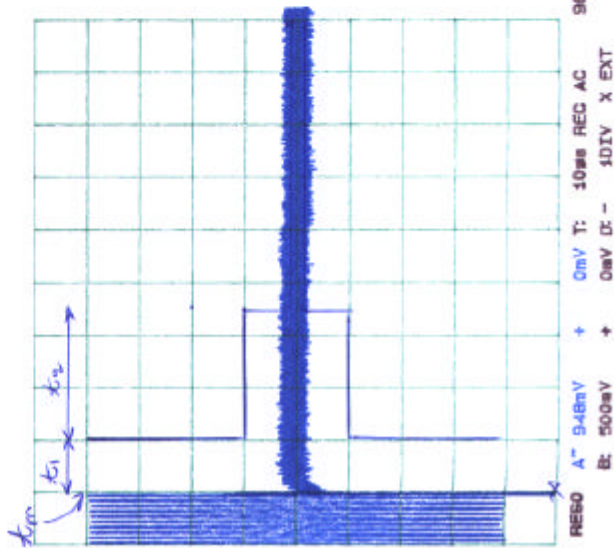

TRANSMITTER TURNED OFF

12: 20: 05 98 May 27

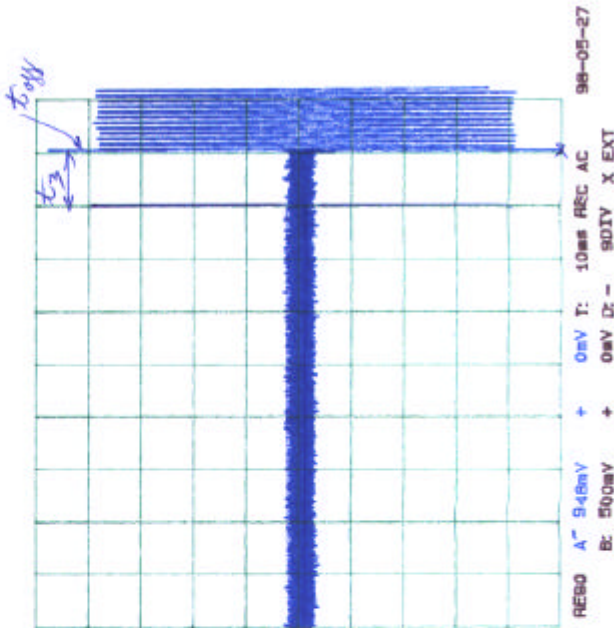

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
 Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Date: May 27, 1998  
Tested by: Tim Lam

**TRANSIENT FREQUENCY BEHAVIOR**  
Teklogix TRX7355 (12.5 KHz Spaced Transmitter)

Modulation: FM MODULATION WITH 9600b/s  
RANDOM DATA, FREQ. DEV. = 1.8kHz PEAK.




TRANSMITTER TURNED OFF

TRANSMITTER TURNED ON

12:07:27 98 May 27

11:56:36 98 May 27

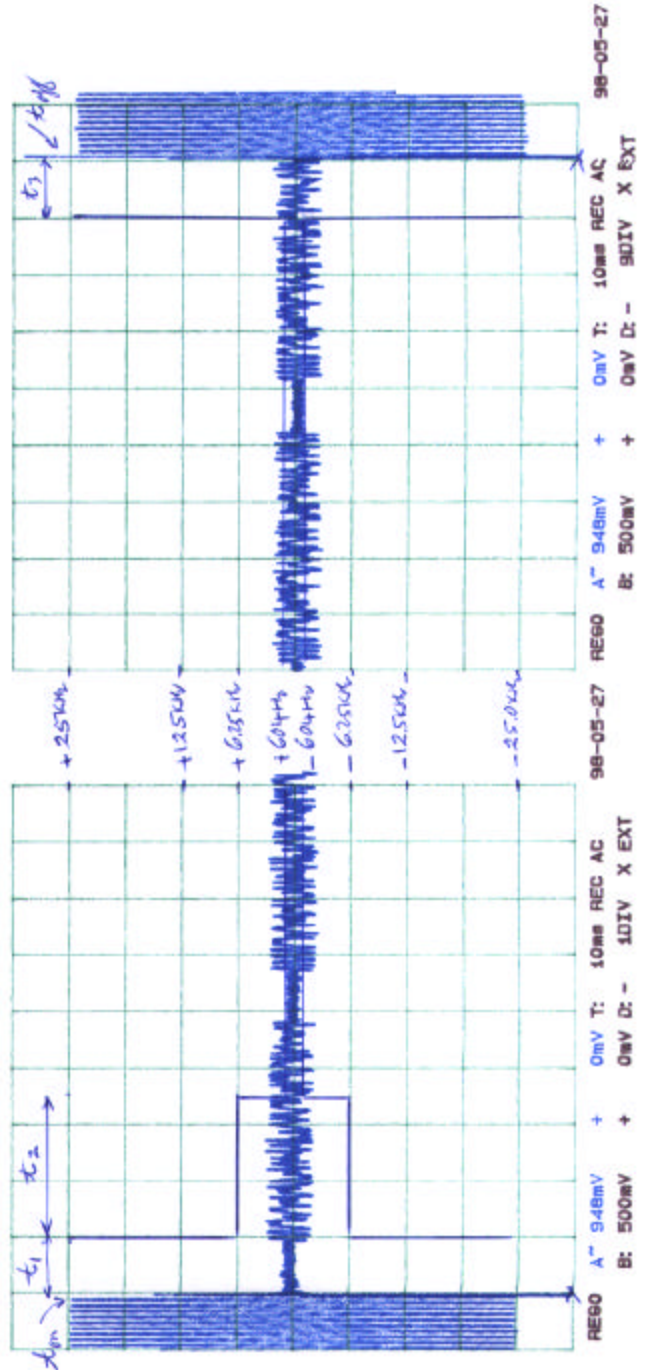

**ULTRATECH GROUP OF LABS**

4181 Sladerview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Website: <http://www.ultratech-labs.com>

File #: TEK-122FTX

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australian)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)