




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 7:17:58 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.57
Relative Humidity:	41.1%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-12.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-113.00 mm
Antenna Configuration:	Integral	Max E Field:	28.67 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.762 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.314 W/kg
Type of Modulation:		SAR End:	0.324 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.28 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

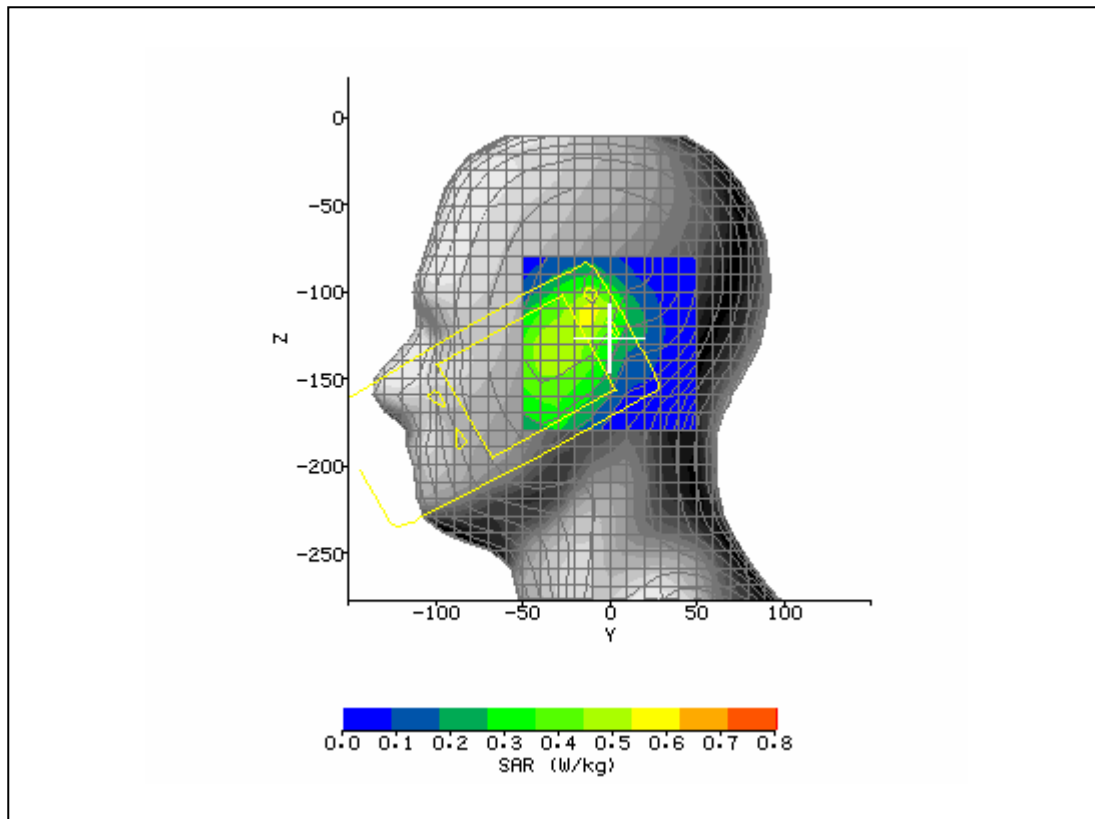


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 7:34:04 AM	DUT Battery Model/No:	
Filename:	Left_Touch_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.2°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.57
Relative Humidity:	42.9%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.1°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-8.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-110.00 mm
Antenna Configuration:	Integral	Max E Field:	33.09 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.944 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.314 W/kg
Type of Modulation:		SAR End:	0.327 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

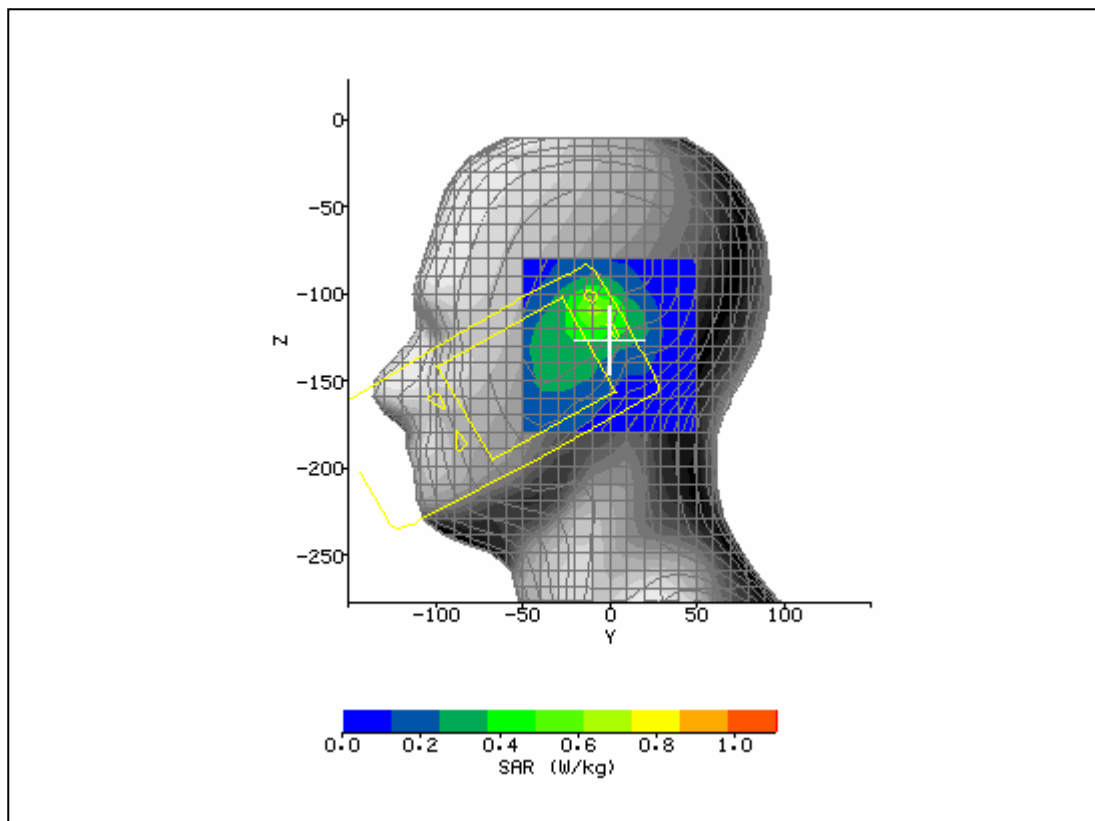


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 7:49:57 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.2°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.57
Relative Humidity:	42.9%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.1°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-20.00 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-129.00 mm
Antenna Configuration:	Integral	Max E Field:	21.62 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.393 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.169 W/kg
Type of Modulation:		SAR End:	0.166 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.53 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

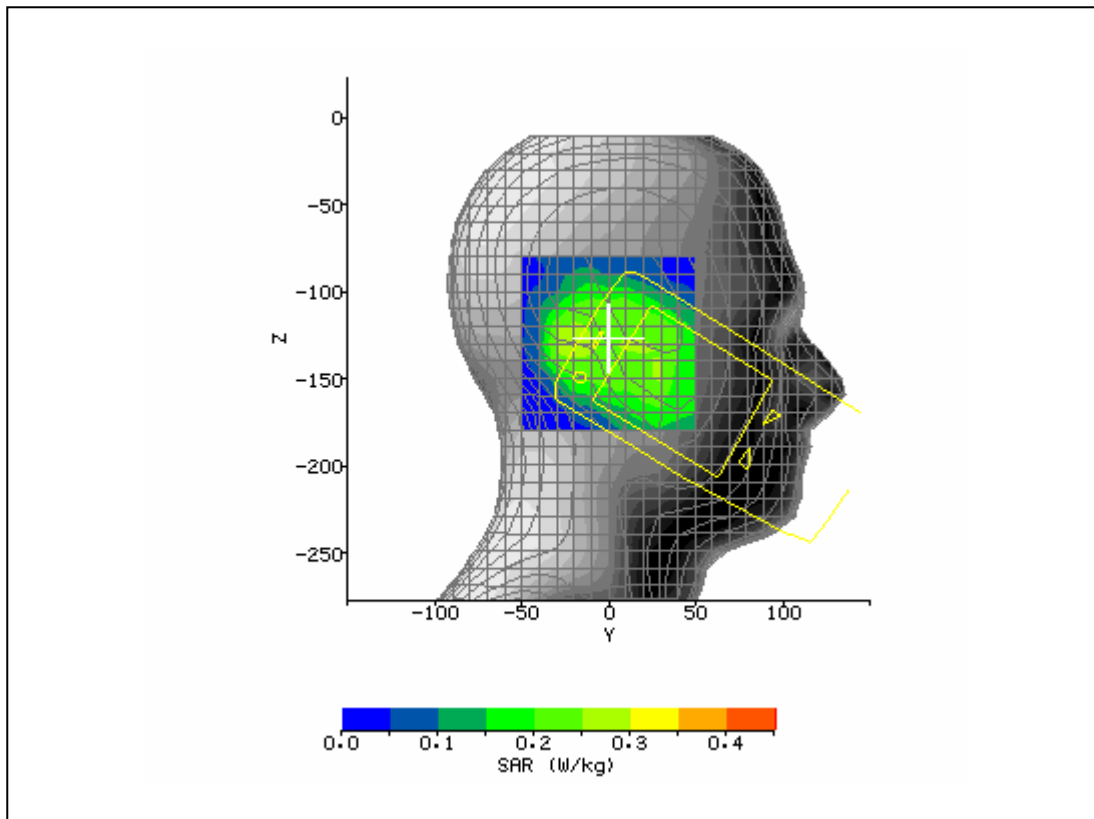


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 8:03:19 AM	DUT Battery Model/No:	
Filename:	Right_Touch_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.57
Relative Humidity:	42.9%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.5°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-24.00 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-125.00 mm
Antenna Configuration:	Integral	Max E Field:	23.47 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.461 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.182 W/kg
Type of Modulation:		SAR End:	0.185 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.33 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

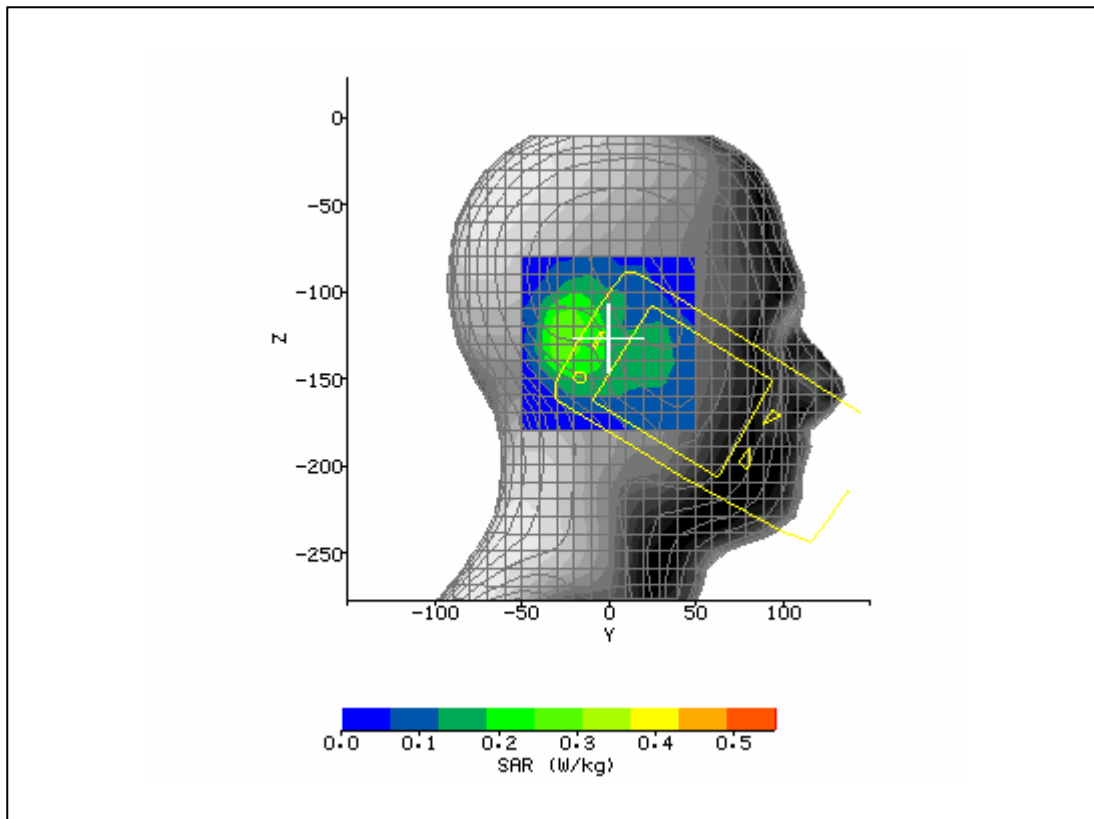


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 8:23:25 AM	DUT Battery Model/No:	
Filename:	Right_Tilt_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.2°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.58
Relative Humidity:	40.9%	Conductivity:	0.907
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.4°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-100.00 mm
Antenna Configuration:	Integral	Max E Field:	35.13 V/m
Test Frequency:	824.2MHz	SAR 1g:	1.059 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.321 W/kg
Type of Modulation:		SAR End:	0.325 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.35 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

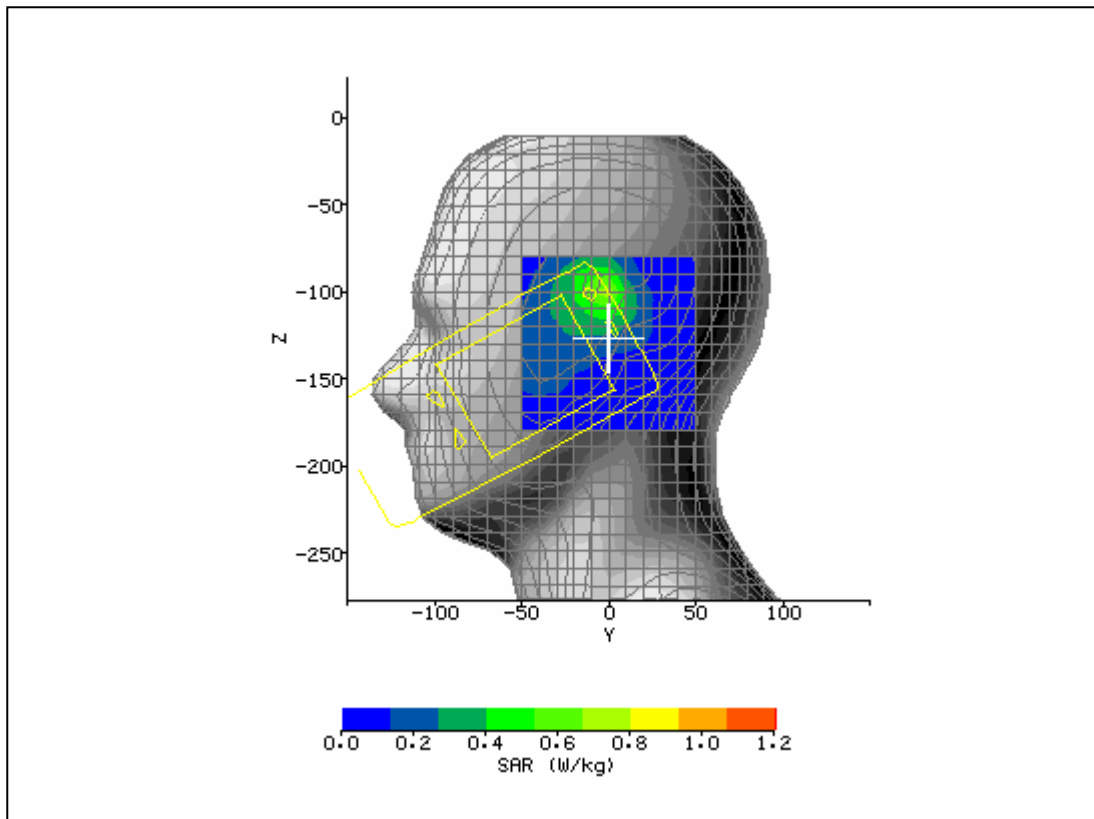


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 8:45:13 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_128_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.51
Relative Humidity:	40.8%	Conductivity:	0.942
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.5°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-100.00 mm
Antenna Configuration:	Integral	Max E Field:	27.23 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.693 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.200 W/kg
Type of Modulation:		SAR End:	0.203 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.71 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

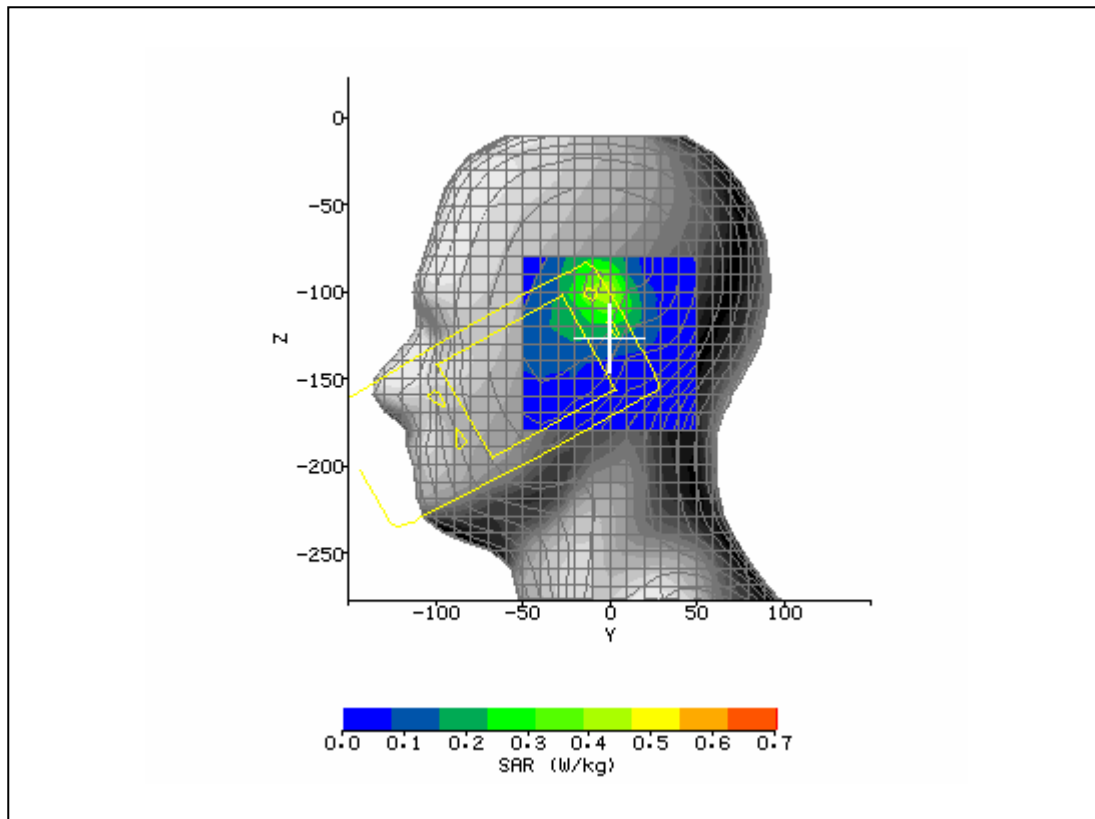


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 10:59:41 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.4°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.83
Relative Humidity:	46.1%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-30.20 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-113.60 mm
Antenna Configuration:	Integral	Max E Field:	16.04 V/m
Test Frequency:	1880MHz	SAR 1g:	0.269 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.093 W/kg
Type of Modulation:		SAR End:	0.096 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.55 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	PCL 0	Extrapolation:	poly4

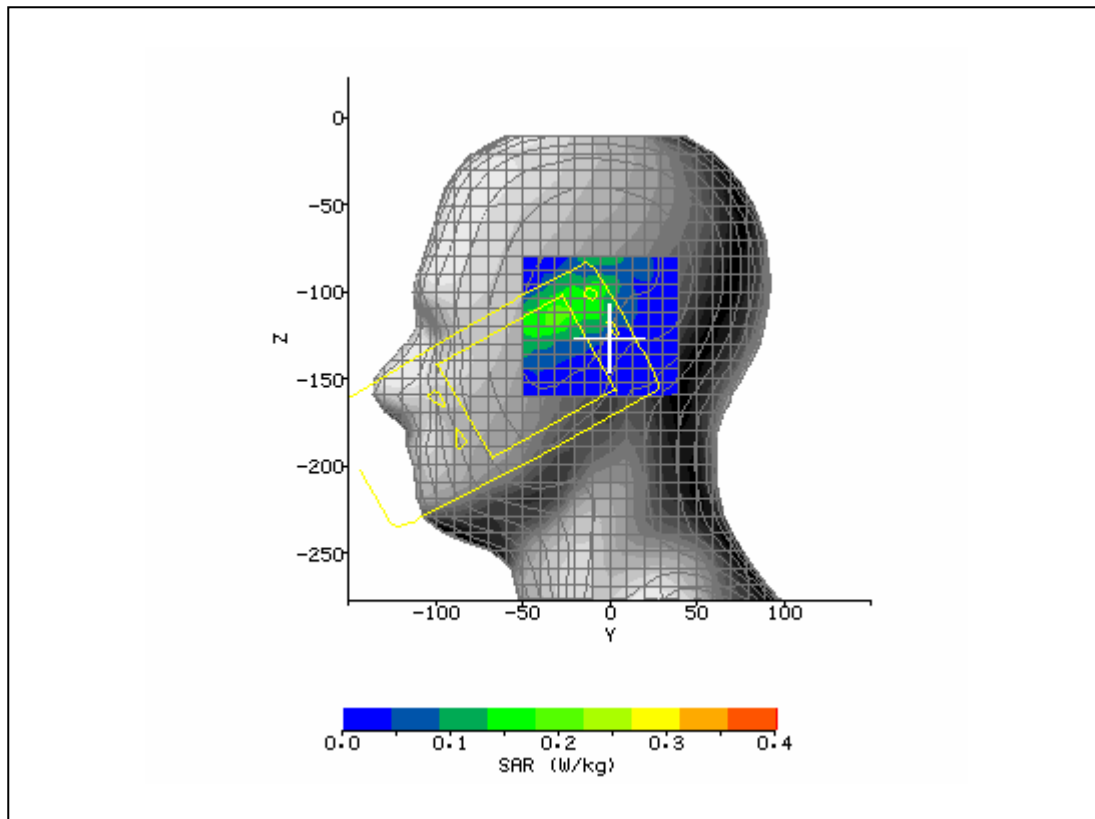


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 11:17:30 AM	DUT Battery Model/No:	
Filename:	Left_Touch_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.4°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.83
Relative Humidity:	46.1%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-14.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-110.40 mm
Antenna Configuration:	Integral	Max E Field:	15.76 V/m
Test Frequency:	1880MHz	SAR 1g:	0.305 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.093 W/kg
Type of Modulation:		SAR End:	0.095 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	PCL 0	Extrapolation:	poly4

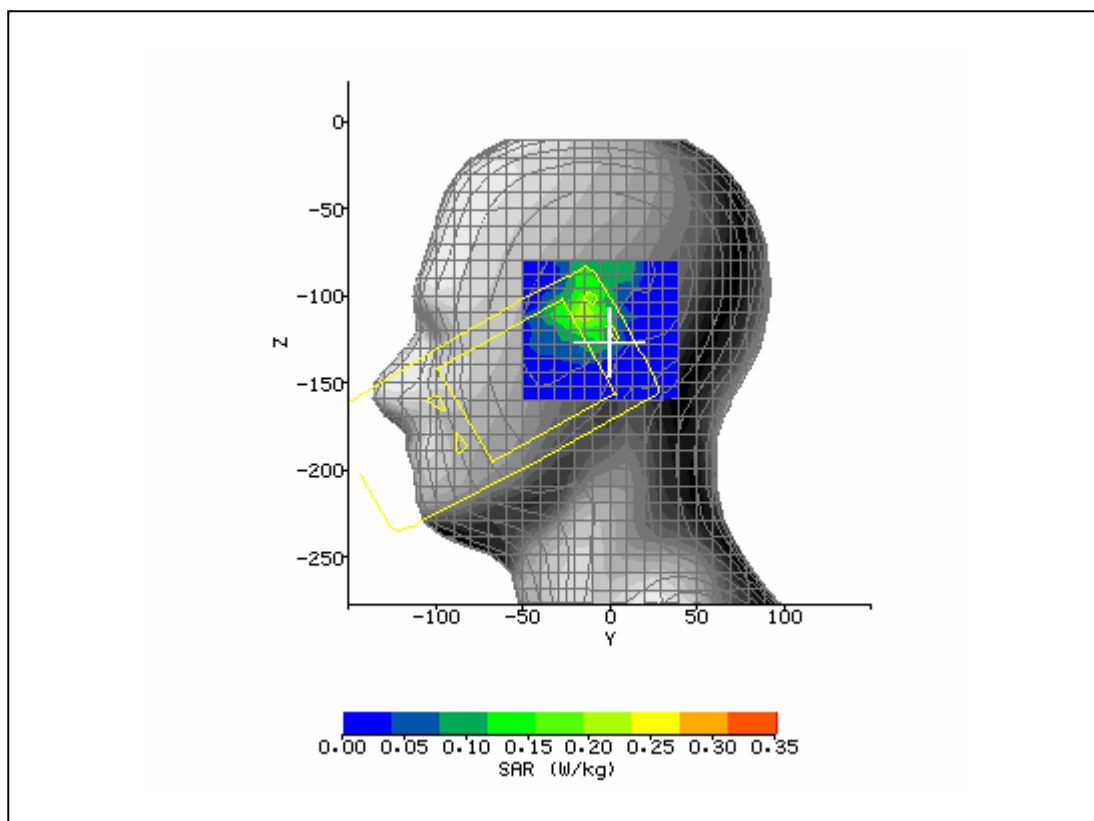


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 11:38:33 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.4°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.83
Relative Humidity:	46.1%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	6.70 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-104.80 mm
Antenna Configuration:	Integral	Max E Field:	10.00 V/m
Test Frequency:	1880MHz	SAR 1g:	0.196 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.028 W/kg
Type of Modulation:		SAR End:	0.029 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.29 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	PCL 0	Extrapolation:	poly4

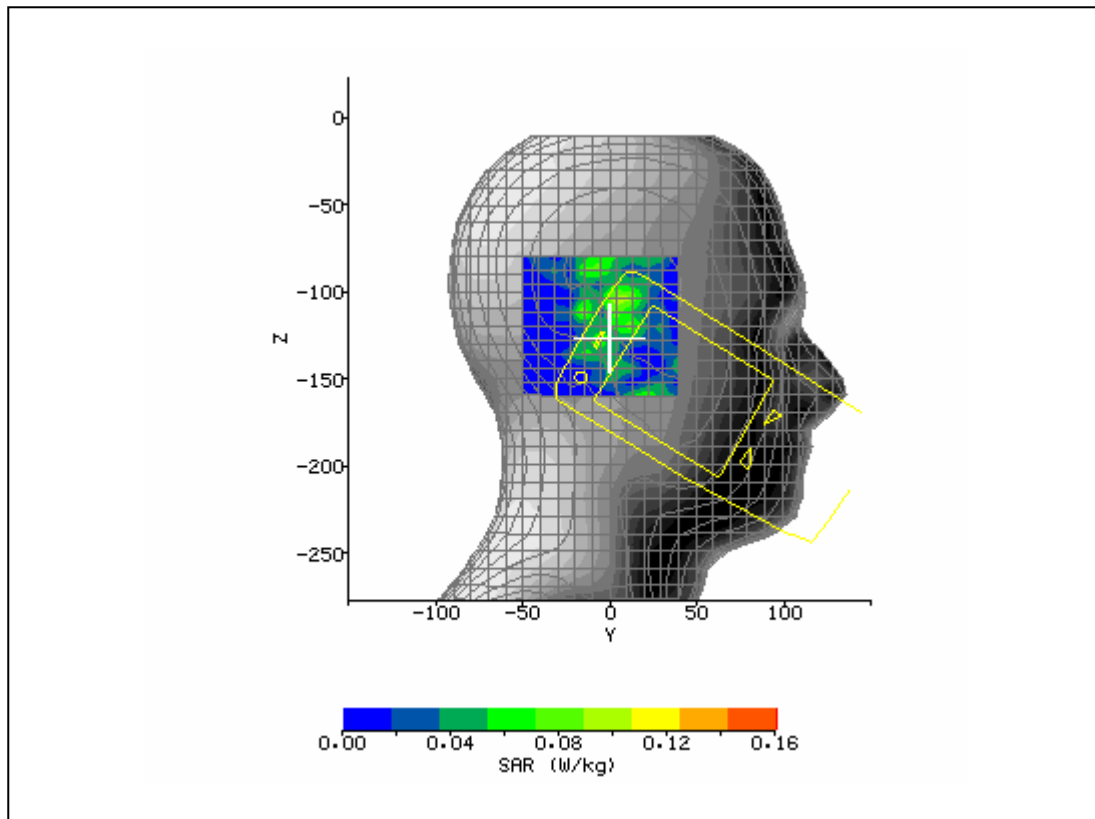


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 11:38:33 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.4°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.83
Relative Humidity:	46.1%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-3.20 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-106.40 mm
Antenna Configuration:	Integral	Max E Field:	12.42 V/m
Test Frequency:	1880MHz	SAR 1g:	0.157 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.035 W/kg
Type of Modulation:		SAR End:	0.034 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	PCL 0	Extrapolation:	poly4

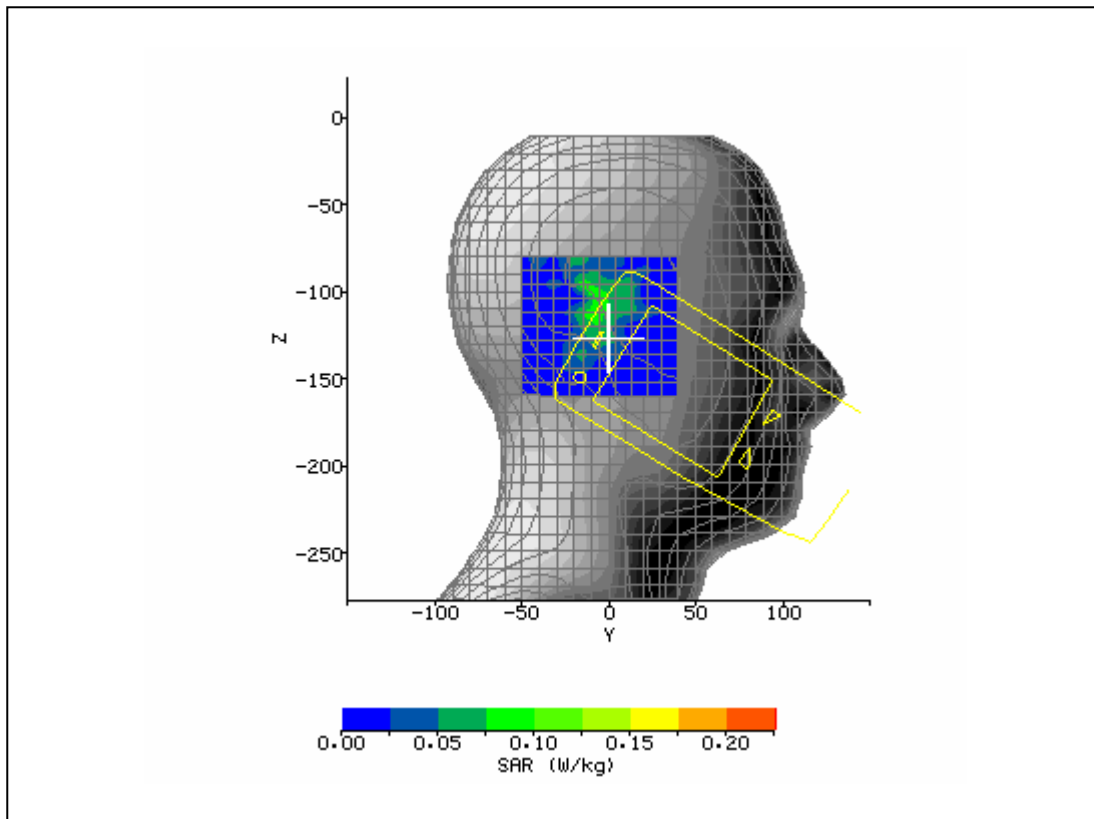


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 1:40:07 PM	DUT Battery Model/No:	
Filename:	Right_Tilt_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.4°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.95
Relative Humidity:	46.1%	Conductivity:	1.37
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-8.60 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-109.60 mm
Antenna Configuration:	Integral	Max E Field:	15.96 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.283 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.087 W/kg
Type of Modulation:		SAR End:	0.090 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	PCL 0	Extrapolation:	poly4

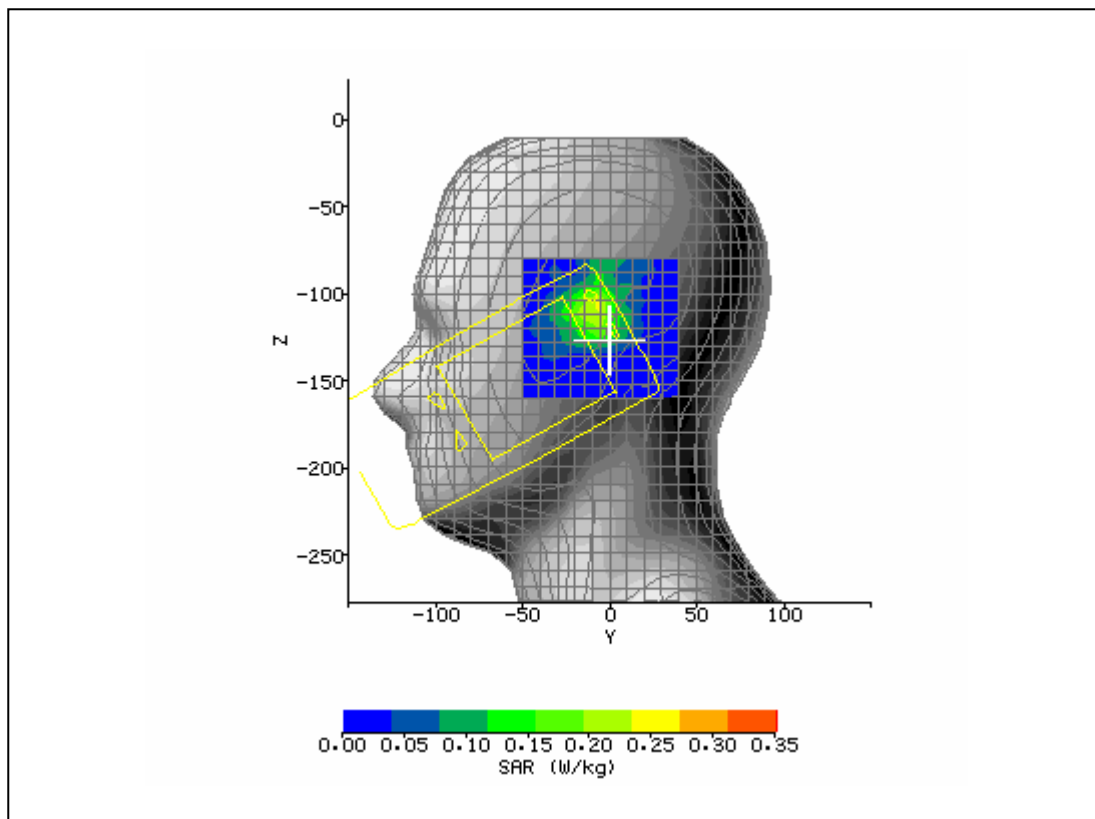


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 1:57:24 PM	DUT Battery Model/No:	
Filename:	Left_Tilt_512_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.0°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.65
Relative Humidity:	37.3%	Conductivity:	1.43
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.1°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-5.90 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-107.20 mm
Antenna Configuration:	Integral	Max E Field:	15.71 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.270 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.085 W/kg
Type of Modulation:		SAR End:	0.084 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	PCL 0	Extrapolation:	poly4

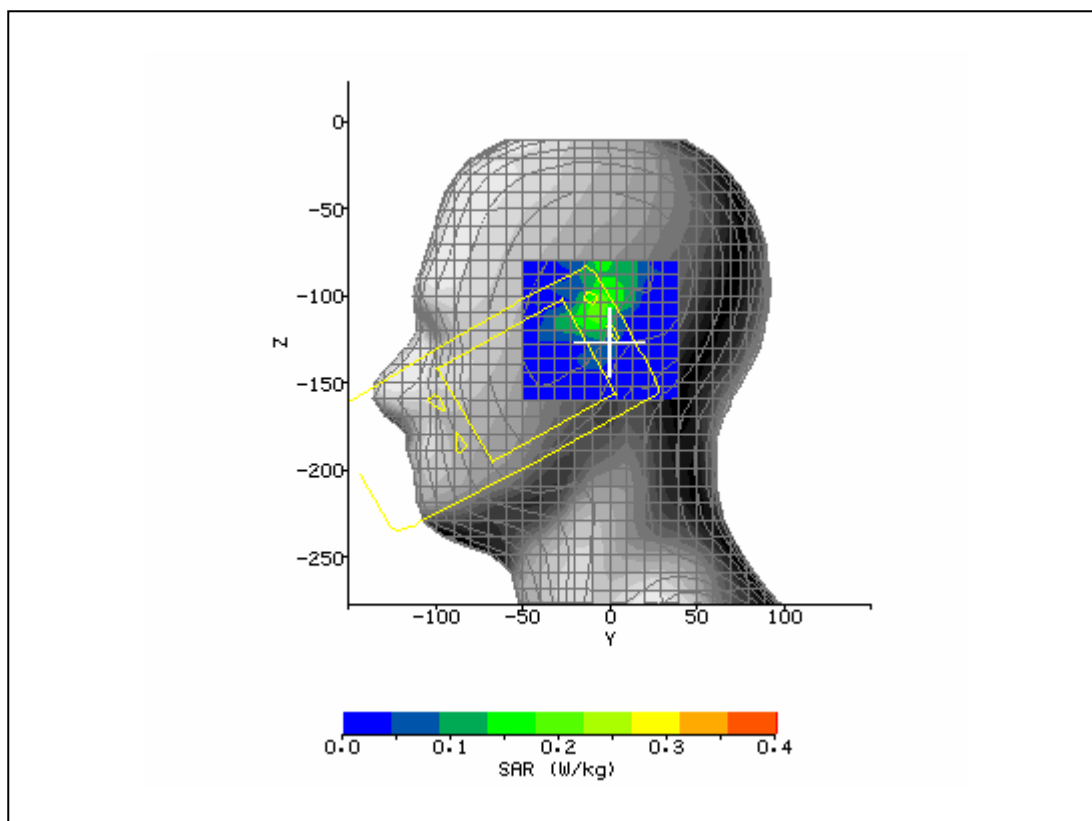


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 9:08:27 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_251_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.1°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.57
Relative Humidity:	45.3%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-17.60 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-109.60 mm
Antenna Configuration:	Integral	Max E Field:	22.62 V/m
Test Frequency:	835MHz	SAR 1g:	0.425 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.201 W/kg
Type of Modulation:		SAR End:	0.205 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	TPC all 1's	Extrapolation:	poly4

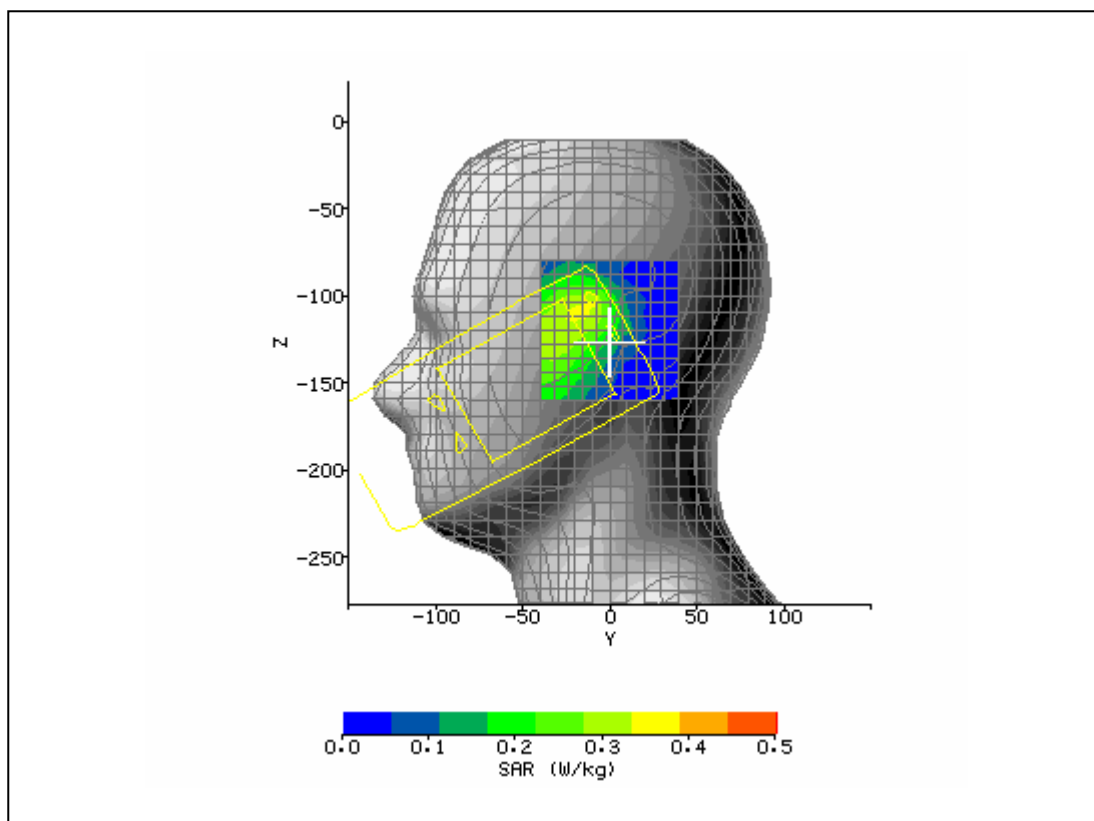


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 9:25:52 AM	DUT Battery Model/No:	
Filename:	Left_Touch_4175_3d.tx t	Probe Serial Number:	M0024
Ambient Temperature:	22.1°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.57
Relative Humidity:	45.3%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-8.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-108.00 mm
Antenna Configuration:	Integral	Max E Field:	26.33 V/m
Test Frequency:	835MHz	SAR 1g:	0.546 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.188 W/kg
Type of Modulation:		SAR End:	0.195 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.87 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	TPC all 1's	Extrapolation:	poly4

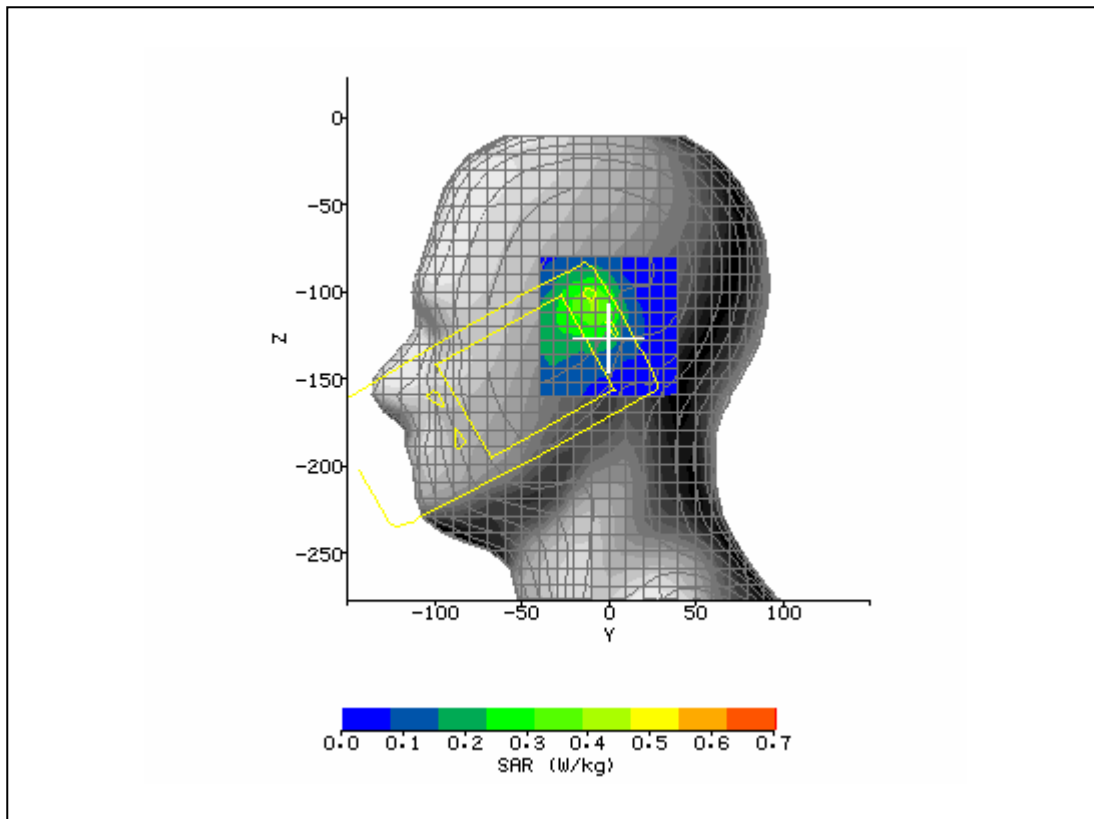


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 9:45:08 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_4175_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.5°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.57
Relative Humidity:	45.3%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.4°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	16.80 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-136.00 mm
Antenna Configuration:	Integral	Max E Field:	18.10 V/m
Test Frequency:	835MHz	SAR 1g:	0.275 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.146 W/kg
Type of Modulation:		SAR End:	0.145 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.50 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	TPC all 1's	Extrapolation:	poly4

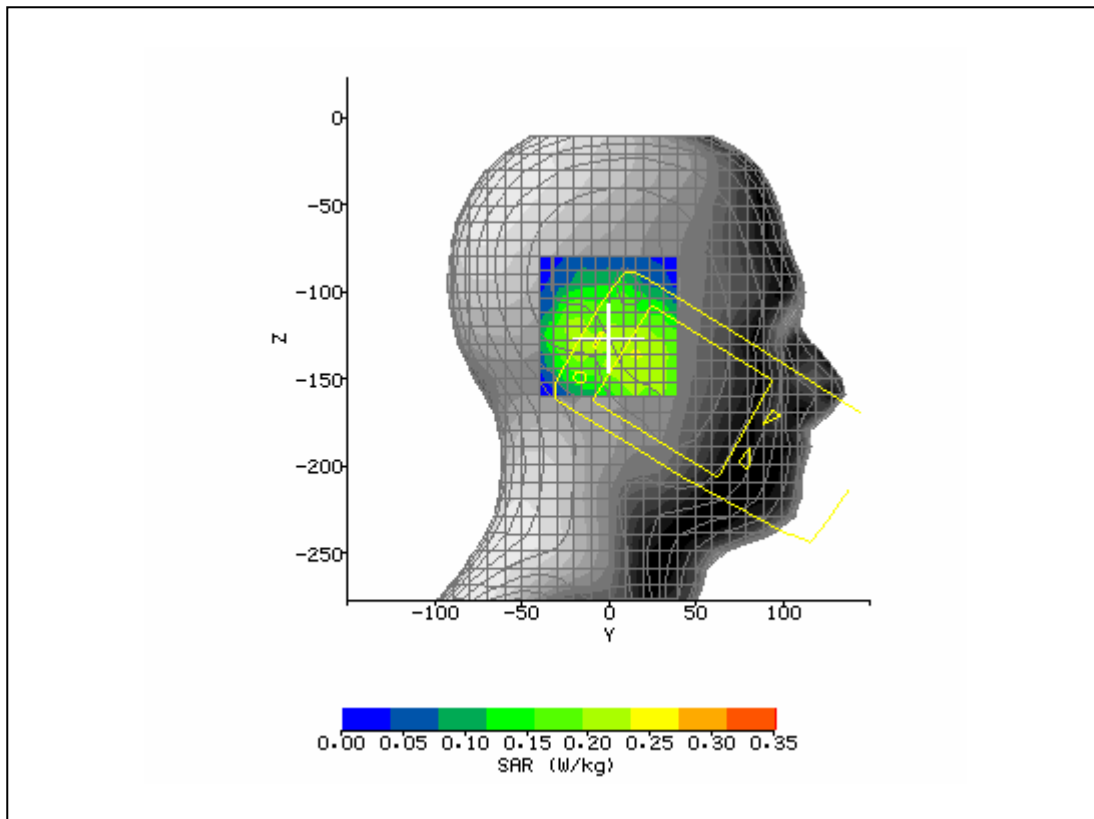


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 10:01:54 AM	DUT Battery Model/No:	
Filename:	Right_Touch_4175_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.5°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.57
Relative Humidity:	45.3%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.4°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-23.20 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-125.60 mm
Antenna Configuration:	Integral	Max E Field:	18.41 V/m
Test Frequency:	835MHz	SAR 1g:	0.286 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.109 W/kg
Type of Modulation:		SAR End:	0.110 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	TPC all 1's	Extrapolation:	poly4

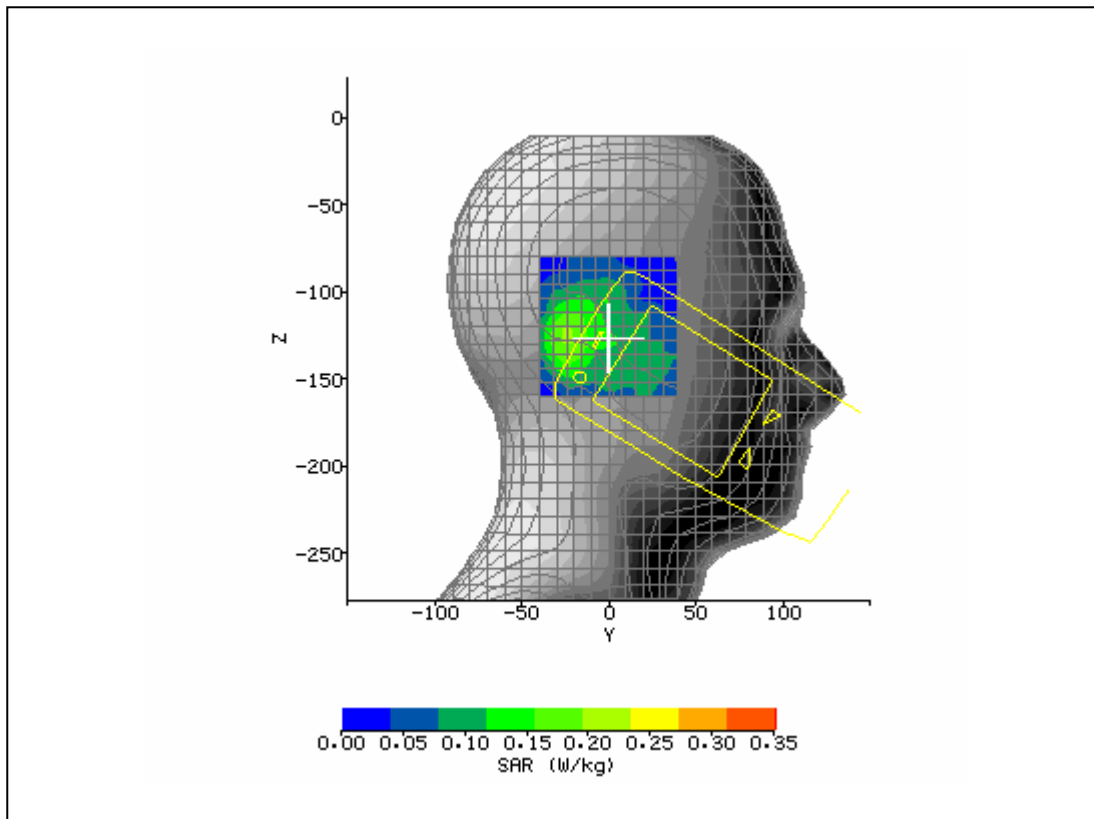


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 10:23:03 AM	DUT Battery Model/No:	
Filename:	Right_Tilt_4175_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.58
Relative Humidity:	45.5%	Conductivity:	0.908
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.8°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-6.40 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-101.60 mm
Antenna Configuration:	Integral	Max E Field:	27.23 V/m
Test Frequency:	826.4MHz	SAR 1g:	0.574 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.201 W/kg
Type of Modulation:		SAR End:	0.205 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.46 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	TPC all 1's	Extrapolation:	poly4

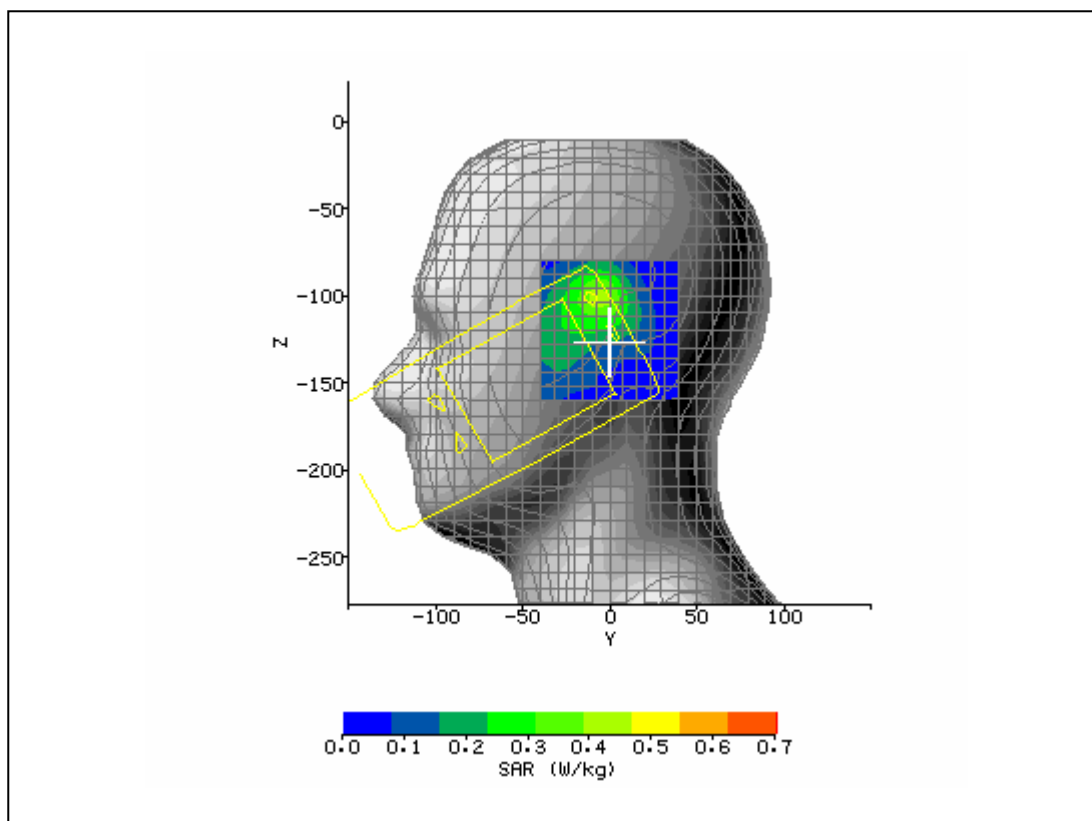


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 10:42:04 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_4132_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	41.51
Relative Humidity:	45.5%	Conductivity:	0.941
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.8°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-4.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-100.80 mm
Antenna Configuration:	Integral	Max E Field:	26.19 V/m
Test Frequency:	846.6MHz	SAR 1g:	0.551 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.185 W/kg
Type of Modulation:		SAR End:	0.190 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.65 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	TPC all 1's	Extrapolation:	poly4

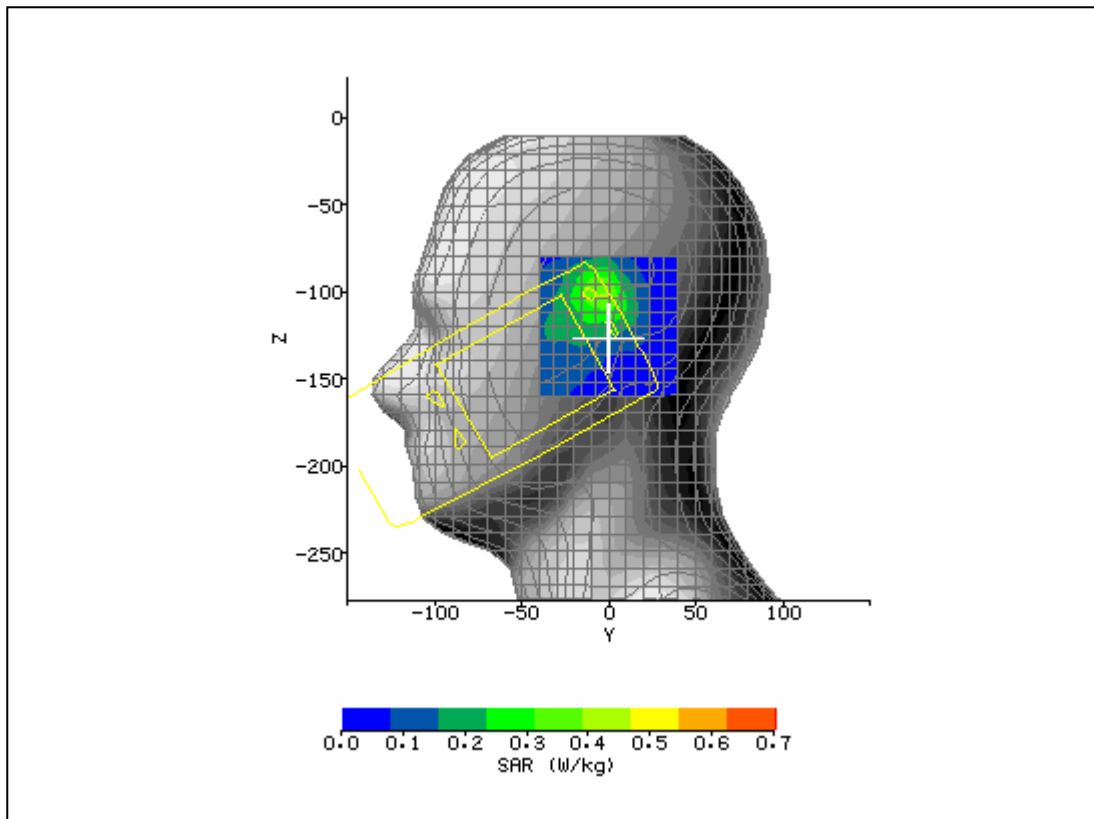


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 7:20:49 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.83
Relative Humidity:	46.6%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.5°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-33.80 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-118.40 mm
Antenna Configuration:	Integral	Max E Field:	19.74 V/m
Test Frequency:	1880MHz	SAR 1g:	0.455 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.199 W/kg
Type of Modulation:		SAR End:	0.202 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

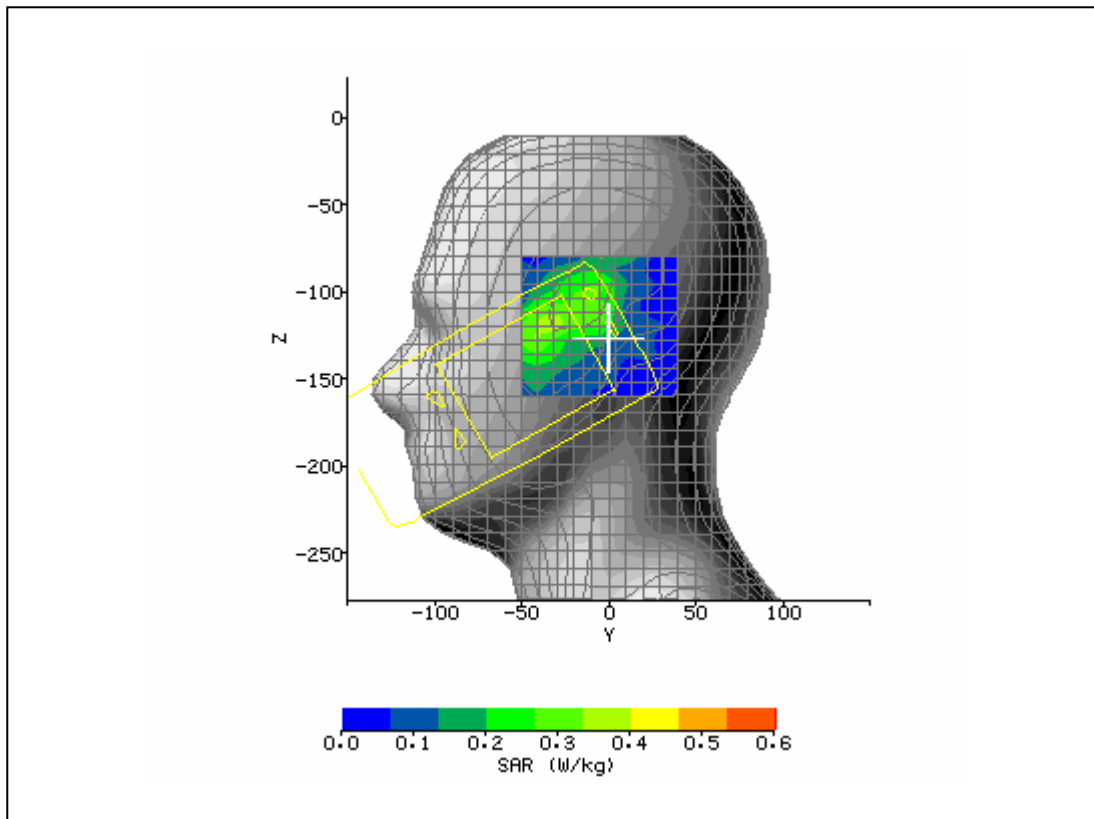


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 7:35:39 AM	DUT Battery Model/No:	
Filename:	Left_Touch_9400_3d.tx t	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.83
Relative Humidity:	46.6%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.5°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.70 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-112.00 mm
Antenna Configuration:	Integral	Max E Field:	19.84 V/m
Test Frequency:	1880MHz	SAR 1g:	0.490 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.188 W/kg
Type of Modulation:		SAR End:	0.191 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.65 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

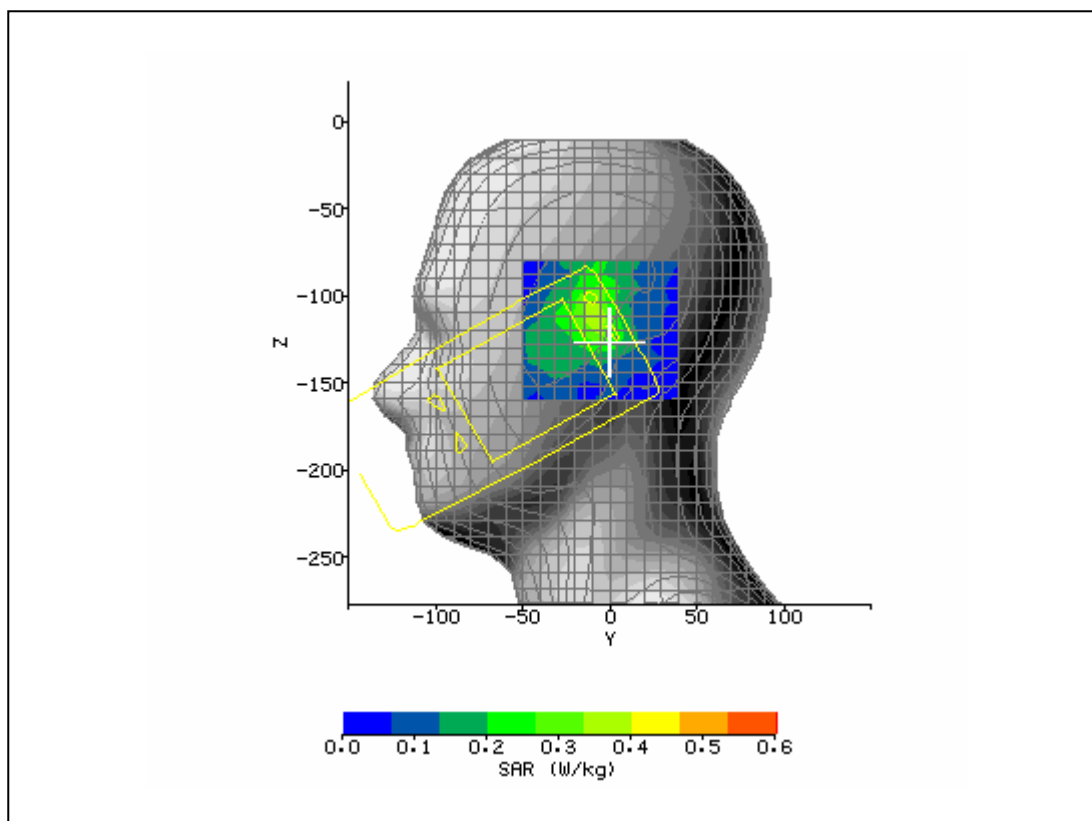


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 7:50:54 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_9400_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.83
Relative Humidity:	46.6%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.5°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	2.20 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-99.20 mm
Antenna Configuration:	Integral	Max E Field:	13.48 V/m
Test Frequency:	1880MHz	SAR 1g:	0.296 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.096 W/kg
Type of Modulation:		SAR End:	0.098 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.77 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

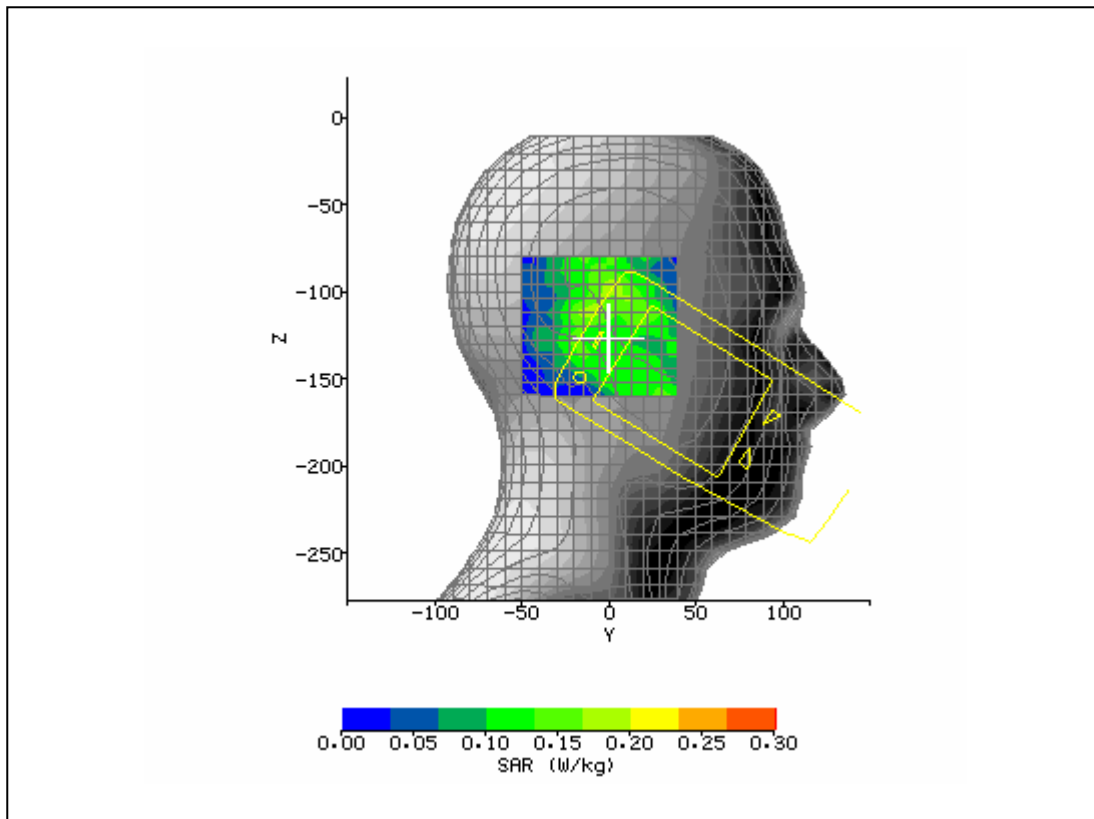


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 8:07:03 AM	DUT Battery Model/No:	
Filename:	Right_Touch_9400_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.0°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.83
Relative Humidity:	46.6%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.7°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-11.30 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-119.20 mm
Antenna Configuration:	Integral	Max E Field:	13.93 V/m
Test Frequency:	1880MHz	SAR 1g:	0.245 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.081 W/kg
Type of Modulation:		SAR End:	0.083 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.59 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

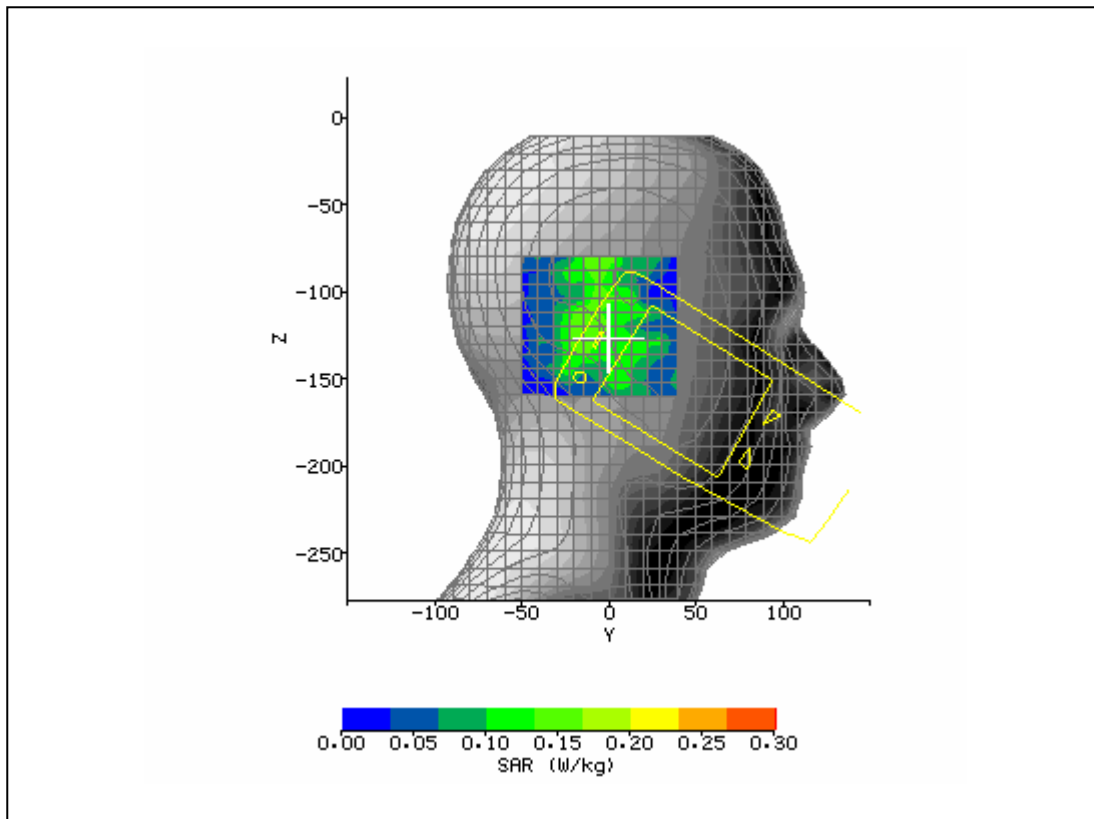


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 8:24:38 AM	DUT Battery Model/No:	
Filename:	Right_Tilt_9400_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.2°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.94
Relative Humidity:	46.3%	Conductivity:	1.371
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.1°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-6.80 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-108.80 mm
Antenna Configuration:	Integral	Max E Field:	22.10 V/m
Test Frequency:	1852.4MHz	SAR 1g:	0.571 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.227 W/kg
Type of Modulation:		SAR End:	0.234 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

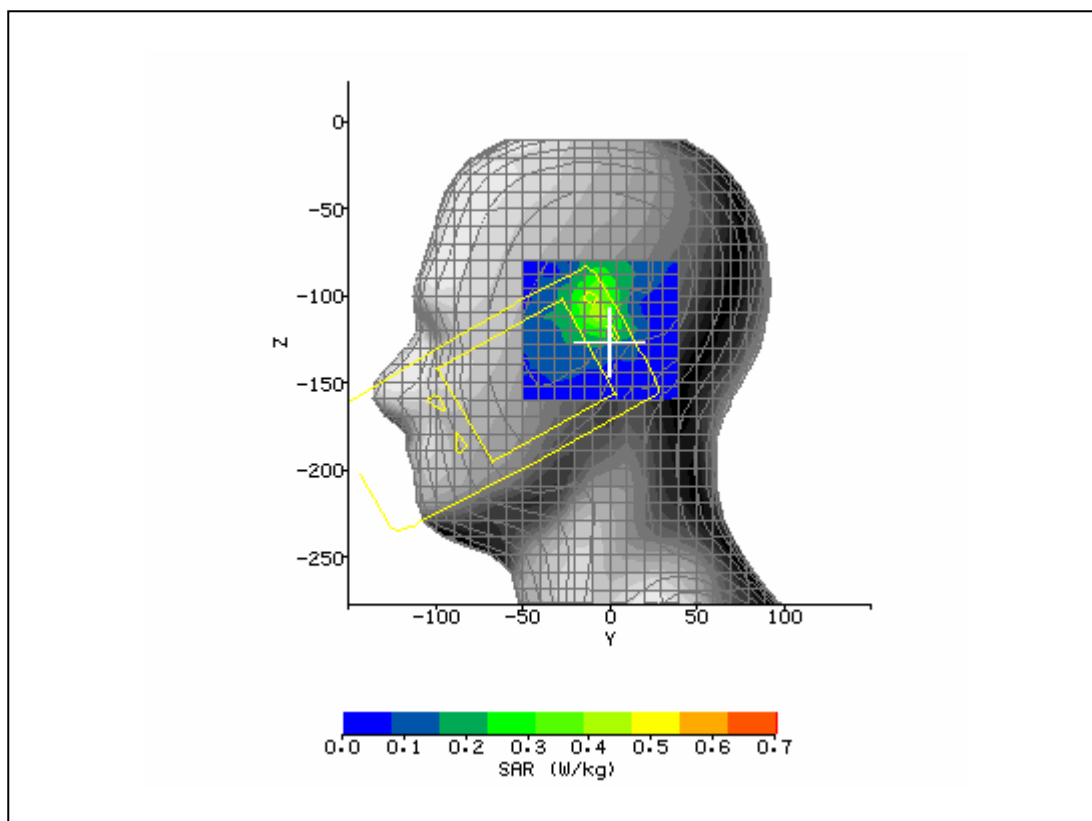


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 8:41:22 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_9262_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.4°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	40.67
Relative Humidity:	46.1%	Conductivity:	1.429
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.70 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-103.20 mm
Antenna Configuration:	Integral	Max E Field:	17.21 V/m
Test Frequency:	1907.5MHz	SAR 1g:	0.359 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.133 W/kg
Type of Modulation:		SAR End:	0.135 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.73 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

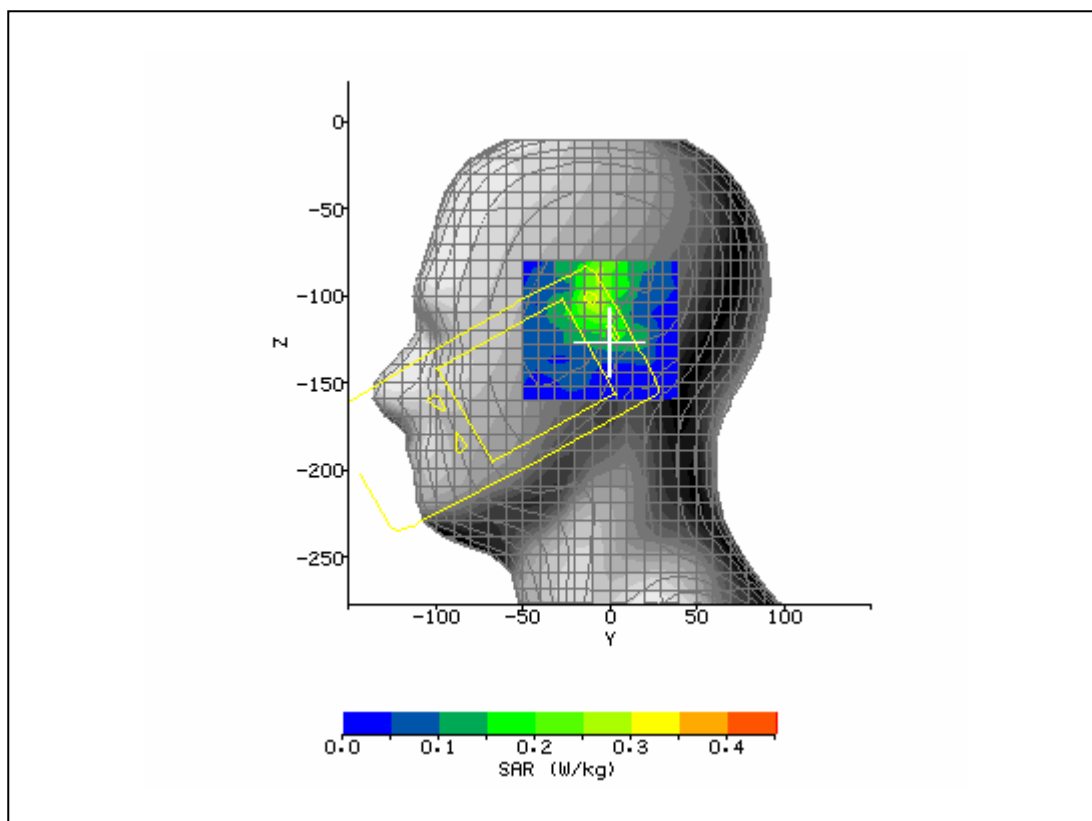


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 1:12:34 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.3°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	56.08
Relative Humidity:	40.7%	Conductivity:	0.972
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-7.00 mm
Antenna Configuration:	Integral	Max E Field:	14.93 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.246 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.098 W/kg
Type of Modulation:		SAR End:	0.101 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.37 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	2 Timeslots up	Extrapolation:	poly4

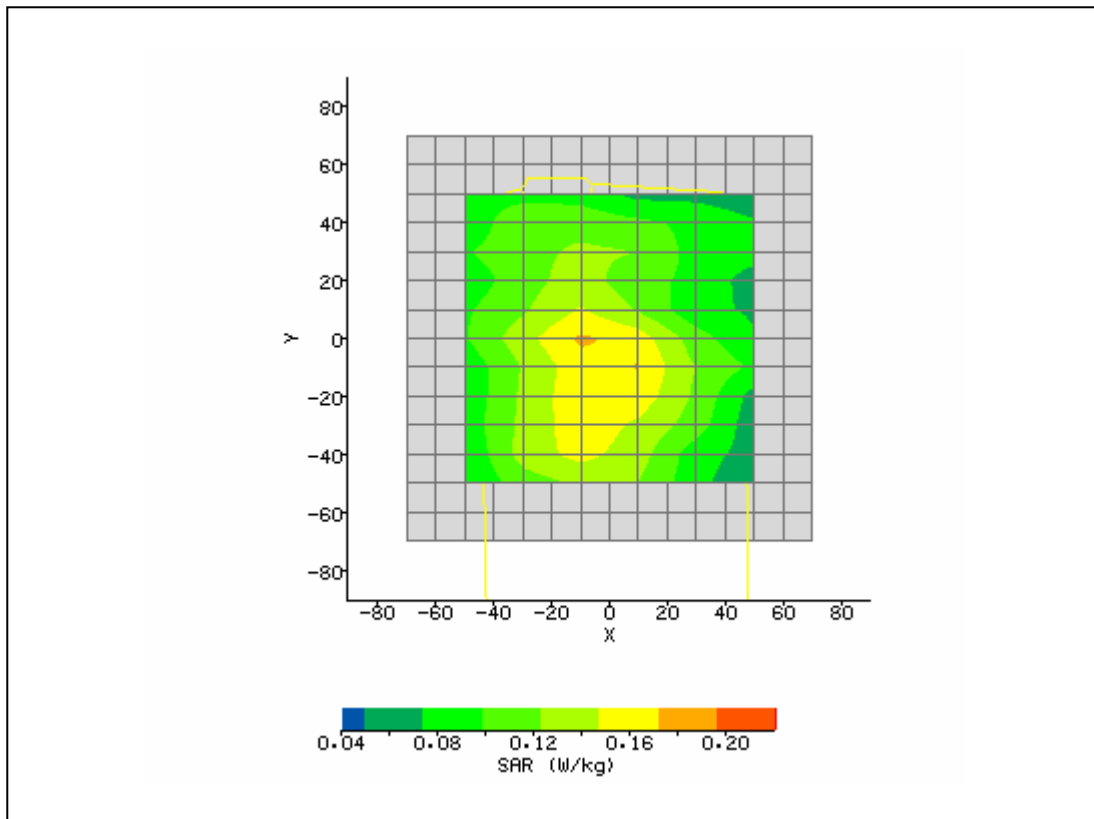


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 1:25:55 PM	DUT Battery Model/No:	
Filename:	Touch_128_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.3°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	55.73
Relative Humidity:	40.7%	Conductivity:	0.987
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	2.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-15.00 mm
Antenna Configuration:	Integral	Max E Field:	13.30 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.208 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.084 W/kg
Type of Modulation:		SAR End:	0.087 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.71 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	2 Timeslots up	Extrapolation:	poly4

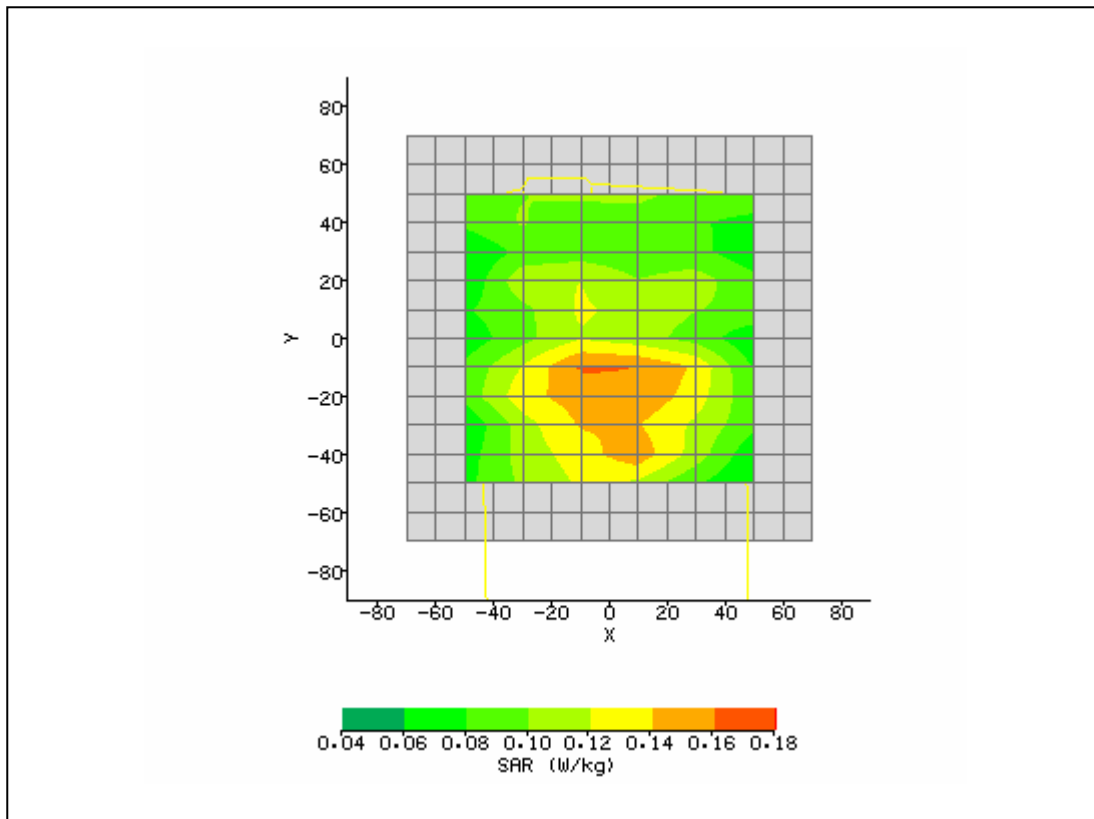


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 1:38:32 PM	DUT Battery Model/No:	
Filename:	Touch_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.3°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	55.46
Relative Humidity:	40.7%	Conductivity:	0.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-22.00 mm
Antenna Configuration:	Integral	Max E Field:	11.44 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.166 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.067 W/kg
Type of Modulation:		SAR End:	0.069 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	2 Timeslots up	Extrapolation:	poly4

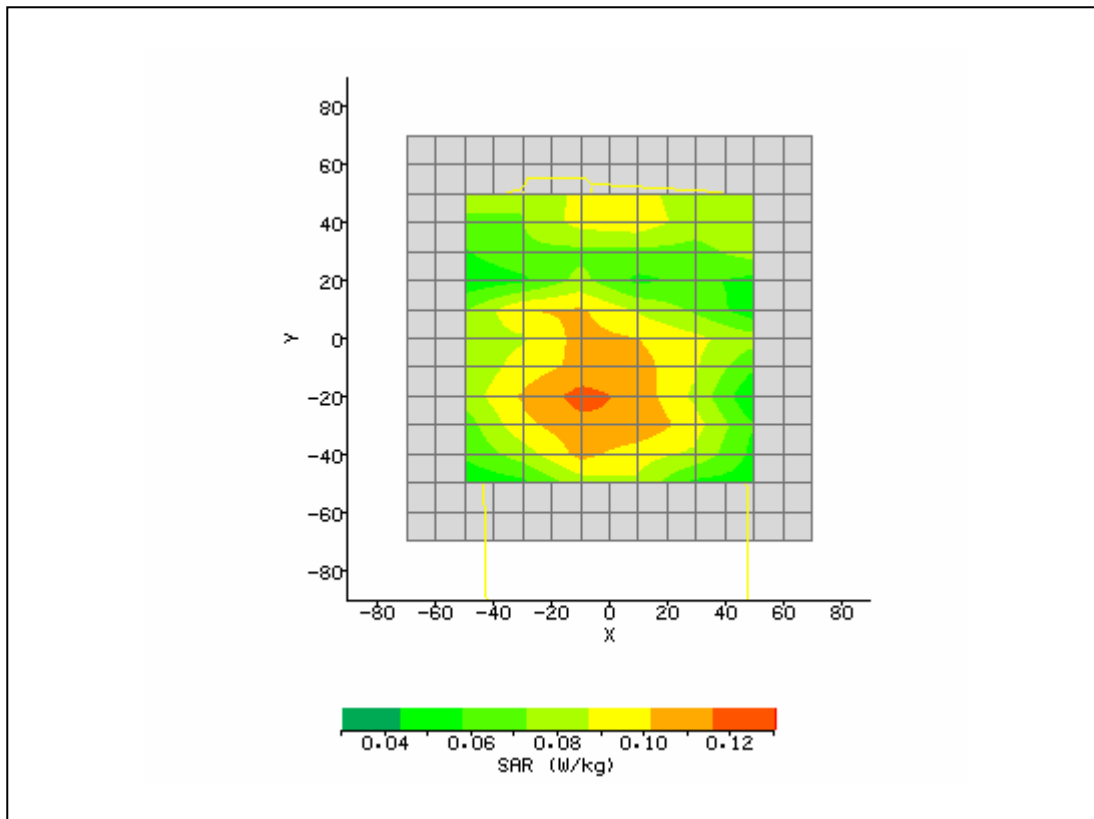


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 2:17:10 PM	DUT Battery Model/No:	
Filename:	Touch_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	51.29
Relative Humidity:	40.1%	Conductivity:	1.554
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.5°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	20.00 mm
Antenna Configuration:	Integral	Max E Field:	10.60 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.255 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.071 W/kg
Type of Modulation:		SAR End:	0.072 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	2 Timeslots up	Extrapolation:	poly4

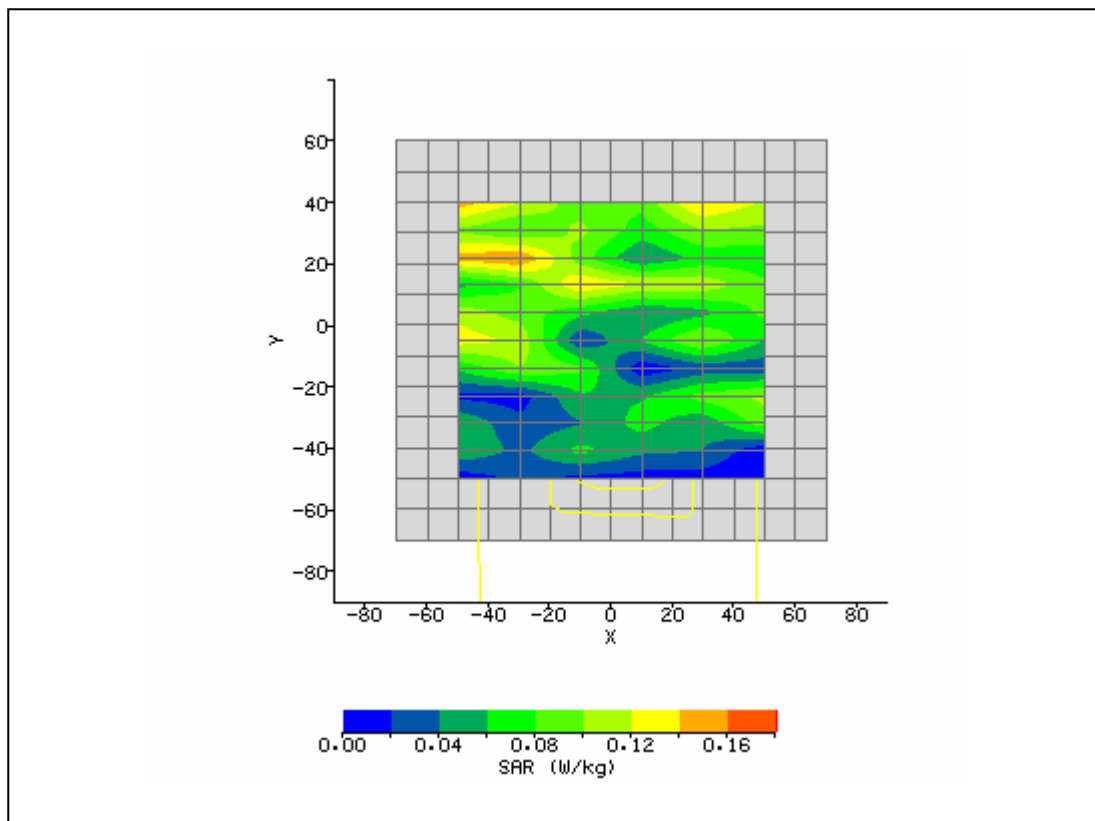


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 2:32:07 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	52.78
Relative Humidity:	40.1%	Conductivity:	1.57
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.5°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral	Max E Field:	10.96 V/m
Test Frequency:	1880MHz	SAR 1g:	0.206 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.089 W/kg
Type of Modulation:		SAR End:	0.086 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.03 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	2 Timeslots up	Extrapolation:	poly4

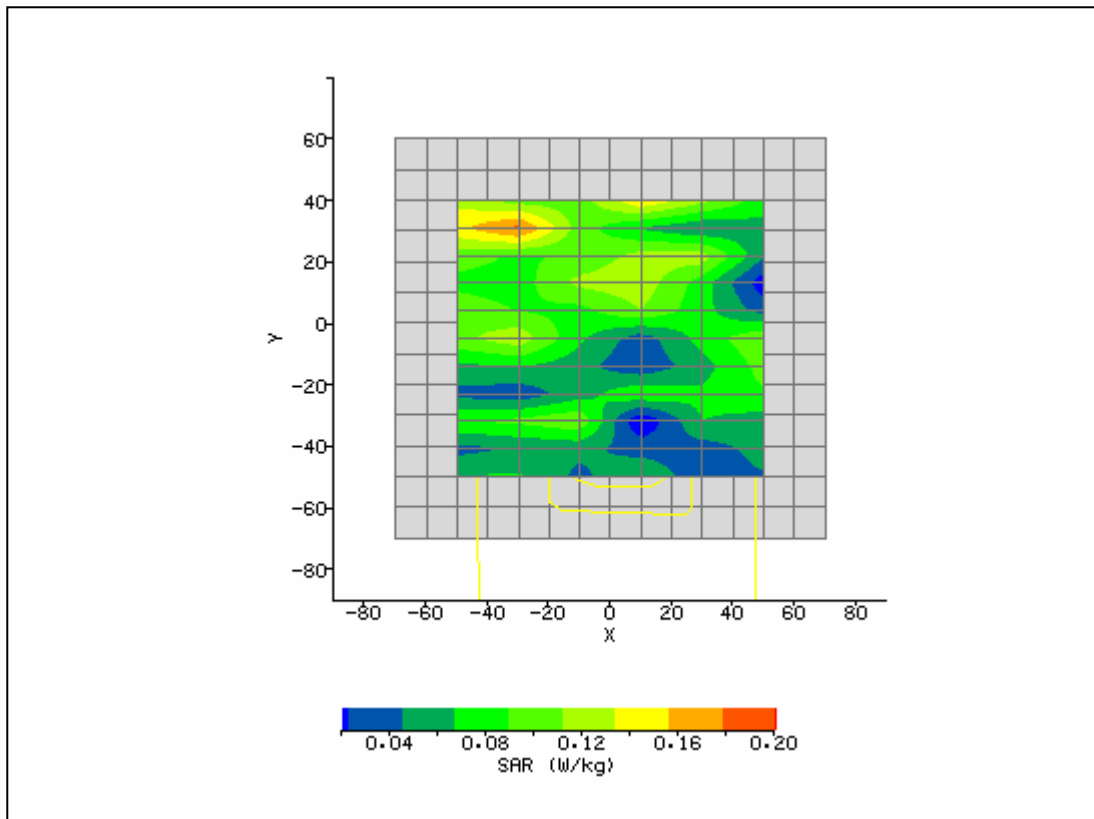


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 2:49:23 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	55.07
Relative Humidity:	40.1%	Conductivity:	1.572
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.5°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-20.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	20.00 mm
Antenna Configuration:	Integral	Max E Field:	11.35 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.177 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.110 W/kg
Type of Modulation:		SAR End:	0.113 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	2 Timeslots up	Extrapolation:	poly4

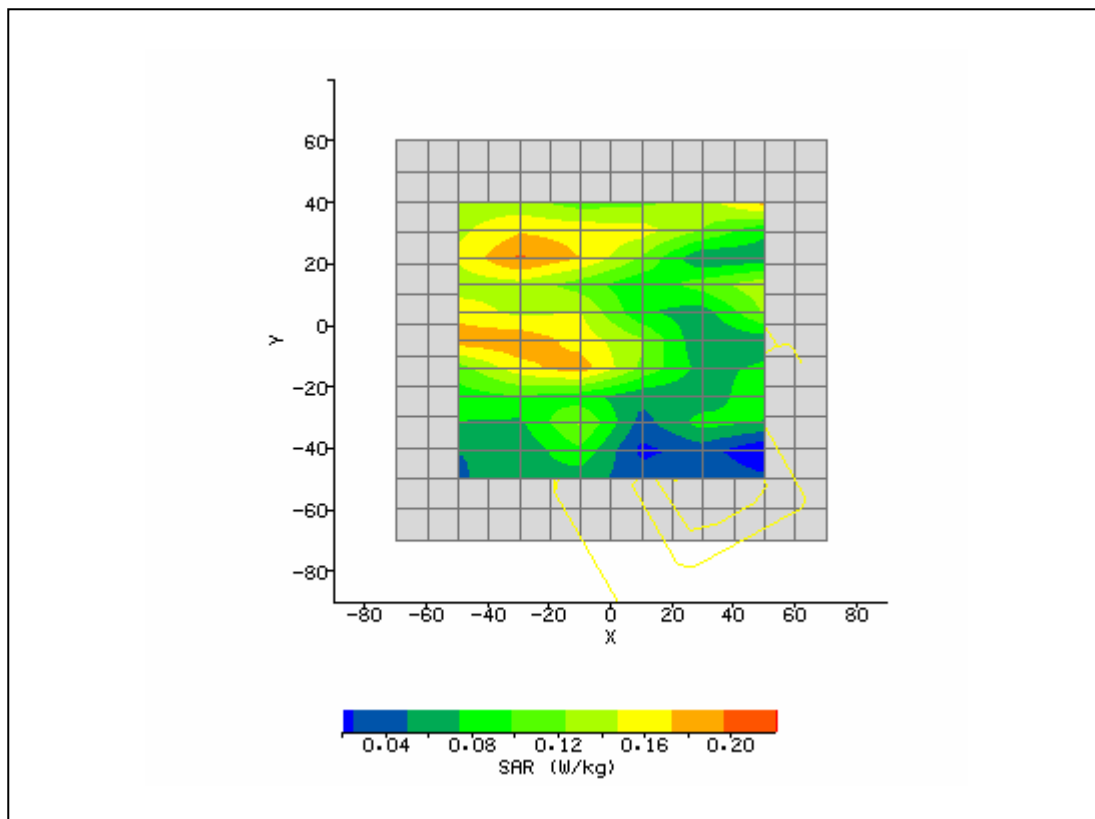


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 2:41:45 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.7°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	56.06
Relative Humidity:	40.2%	Conductivity:	0.974
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-41.00 mm
Antenna Configuration:	Integral	Max E Field:	11.33 V/m
Test Frequency:	826.4MHz	SAR 1g:	0.166 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.055 W/kg
Type of Modulation:		SAR End:	0.056 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.36 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

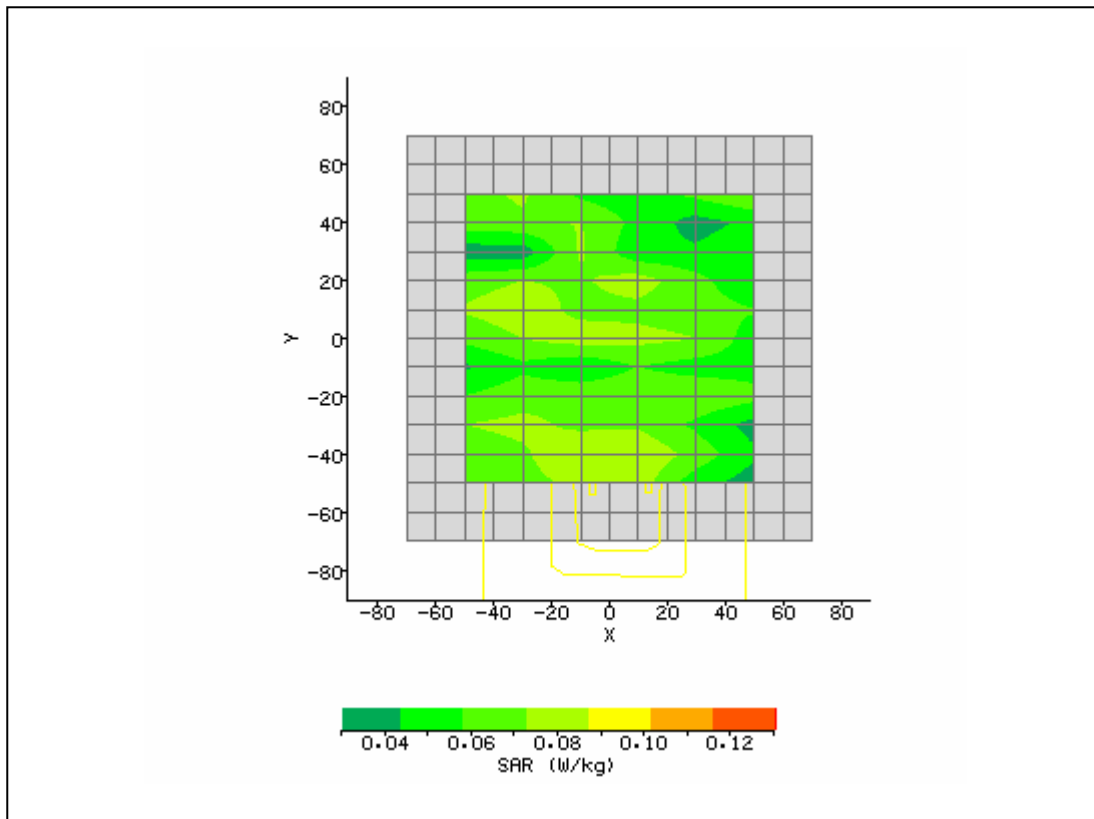


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 2:59:06 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.7°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	55.73
Relative Humidity:	40.2%	Conductivity:	0.987
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-34.00 mm
Antenna Configuration:	Integral	Max E Field:	11.30 V/m
Test Frequency:	835MHz	SAR 1g:	0.135 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.060 W/kg
Type of Modulation:		SAR End:	0.062 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

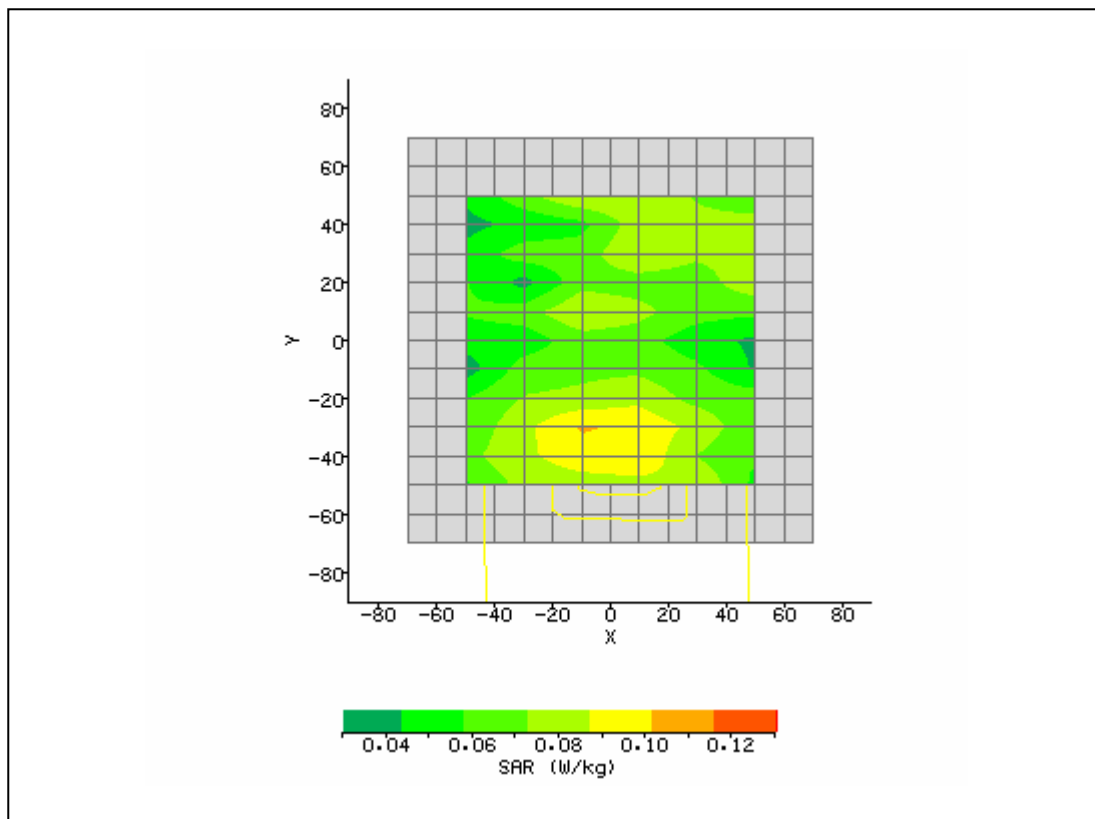


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 3:15:43 PM	DUT Battery Model/No:	
Filename:	Touch_4175_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.7°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	55.46
Relative Humidity:	40.2%	Conductivity:	0.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-3.00 mm
Antenna Configuration:	Integral	Max E Field:	10.93 V/m
Test Frequency:	846.6MHz	SAR 1g:	0.148 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.053 W/kg
Type of Modulation:		SAR End:	0.055 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.96 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

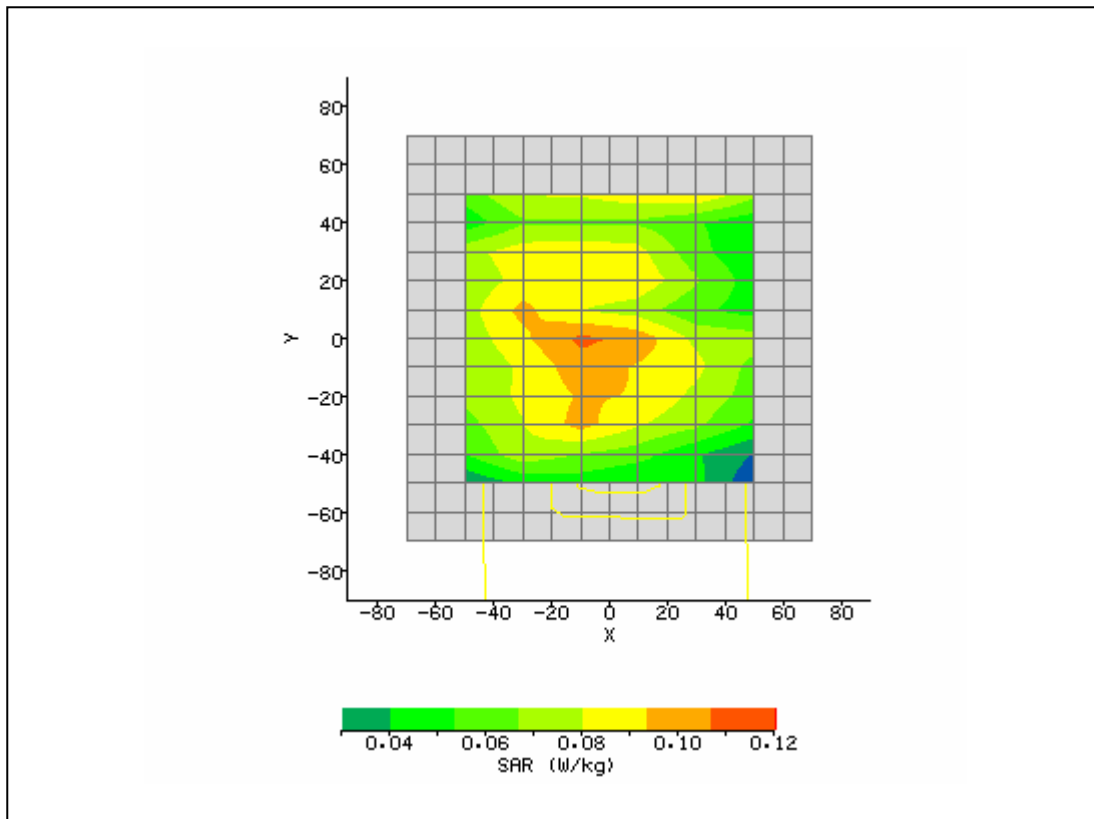


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 3:59:07 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.3°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	51.30
Relative Humidity:	38.1%	Conductivity:	1.555
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	13.00 mm
Antenna Configuration:	Integral	Max E Field:	9.23 V/m
Test Frequency:	1852.4MHz	SAR 1g:	0.162 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.035 W/kg
Type of Modulation:		SAR End:	0.036 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

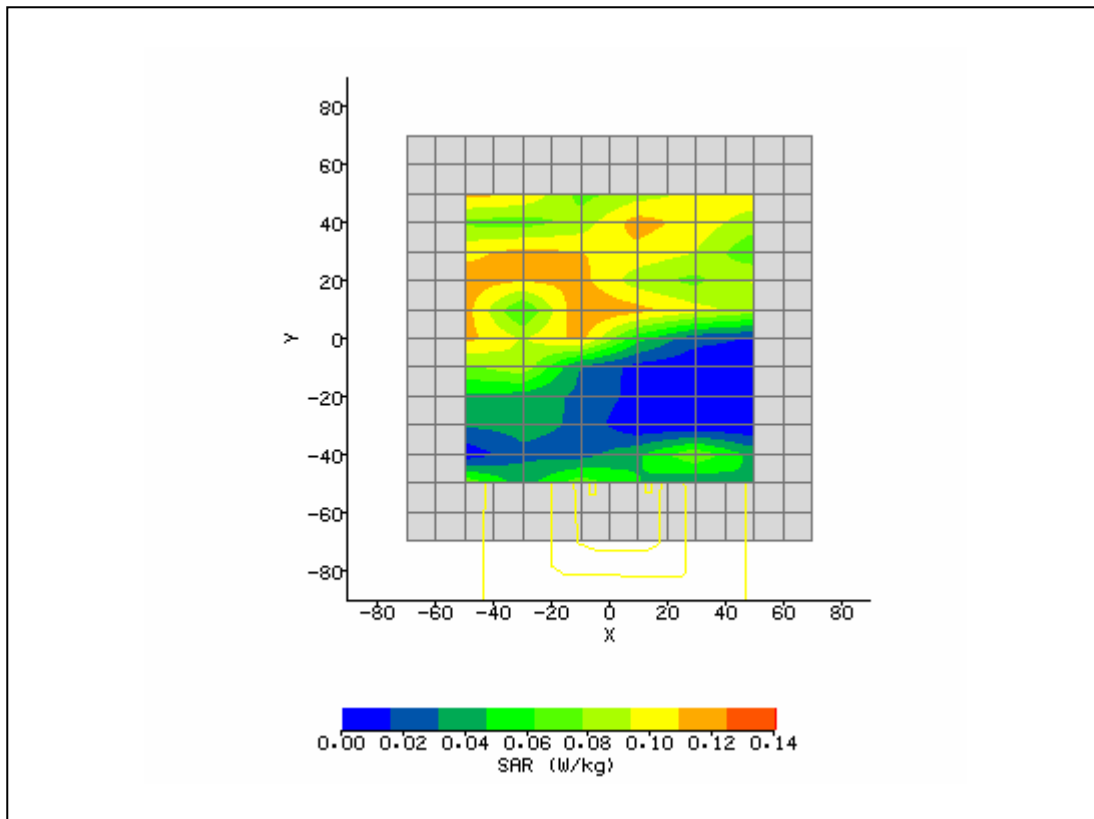


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 4:19:16 PM	DUT Battery Model/No:	
Filename:	Touch_9400_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.3°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	52.78
Relative Humidity:	38.1%	Conductivity:	1.57
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-40.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Integral	Max E Field:	9.12 V/m
Test Frequency:	1880MHz	SAR 1g:	0.169 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.056 W/kg
Type of Modulation:		SAR End:	0.056 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.79 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

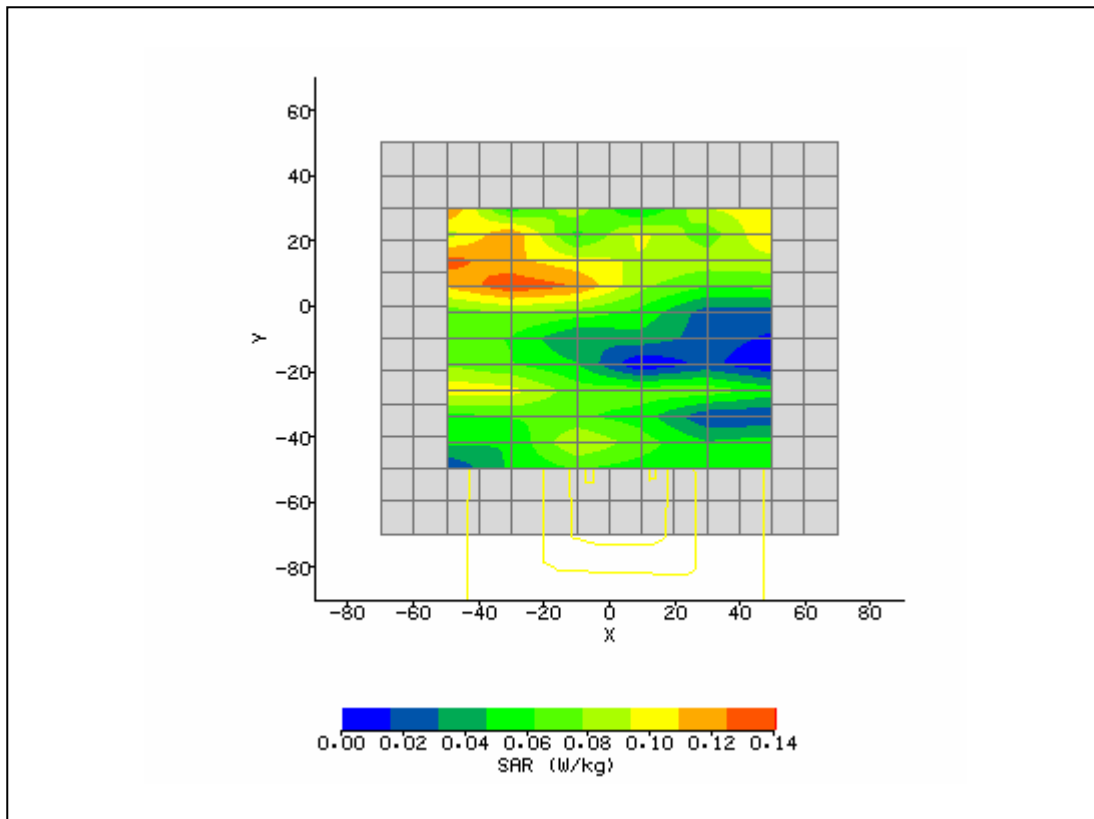

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 4:35:15 PM	DUT Battery Model/No:	
Filename:	Touch_9400_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.4°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with HC25	Relative Permittivity:	55.06
Relative Humidity:	39.0%	Conductivity:	1.572
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-8.40 mm
Antenna Configuration:	Integral	Max E Field:	9.76 V/m
Test Frequency:	1907.5MHz	SAR 1g:	0.234 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.035 W/kg
Type of Modulation:		SAR End:	0.035 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.75 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

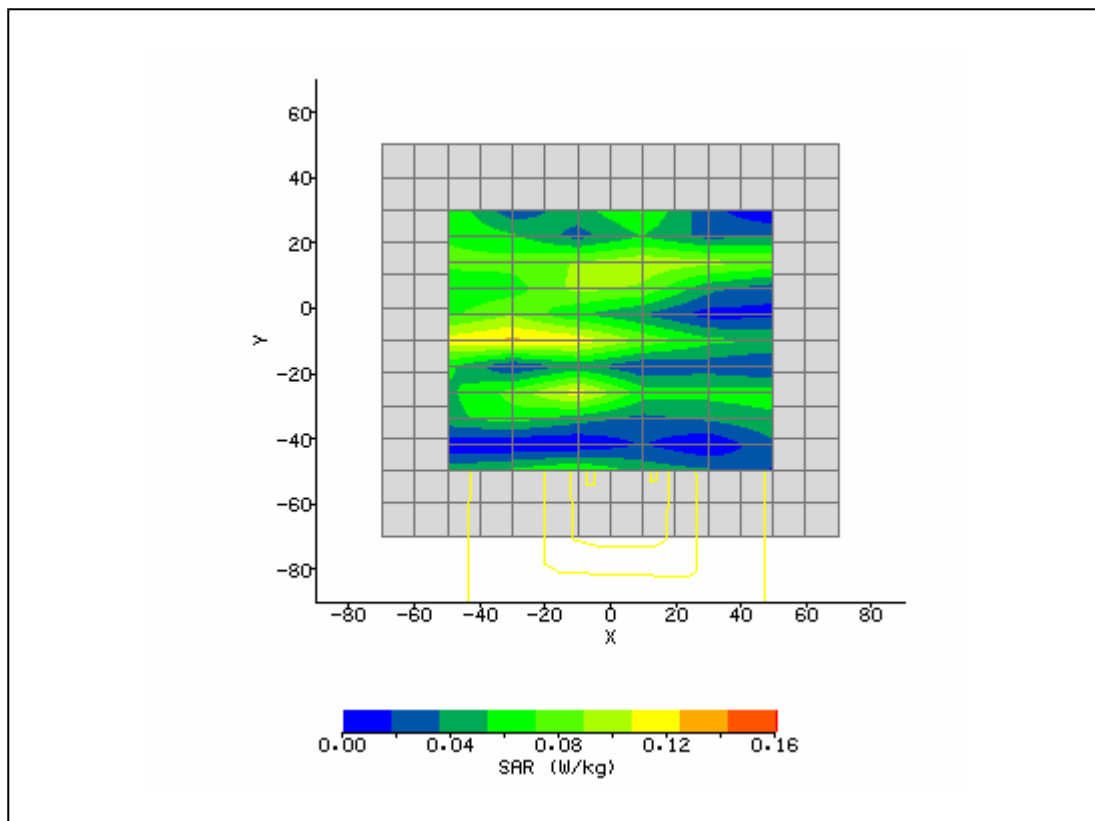

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 7:01:09 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.2°C	Liquid Simulant:	850
Device Under Test:	System	Relative Permittivity:	41.57
Relative Humidity:	42.9%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	835 Dipole	Max E Field:	94.47 V/m
Test Frequency:	835MHz	SAR 1g:	10.420 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	6.552 W/kg
Conversion Factors:	.360 / .360 / .360	SAR Start:	2.046 W/kg
Type of Modulation:		SAR End:	2.002 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	1W	Extrapolation:	poly4

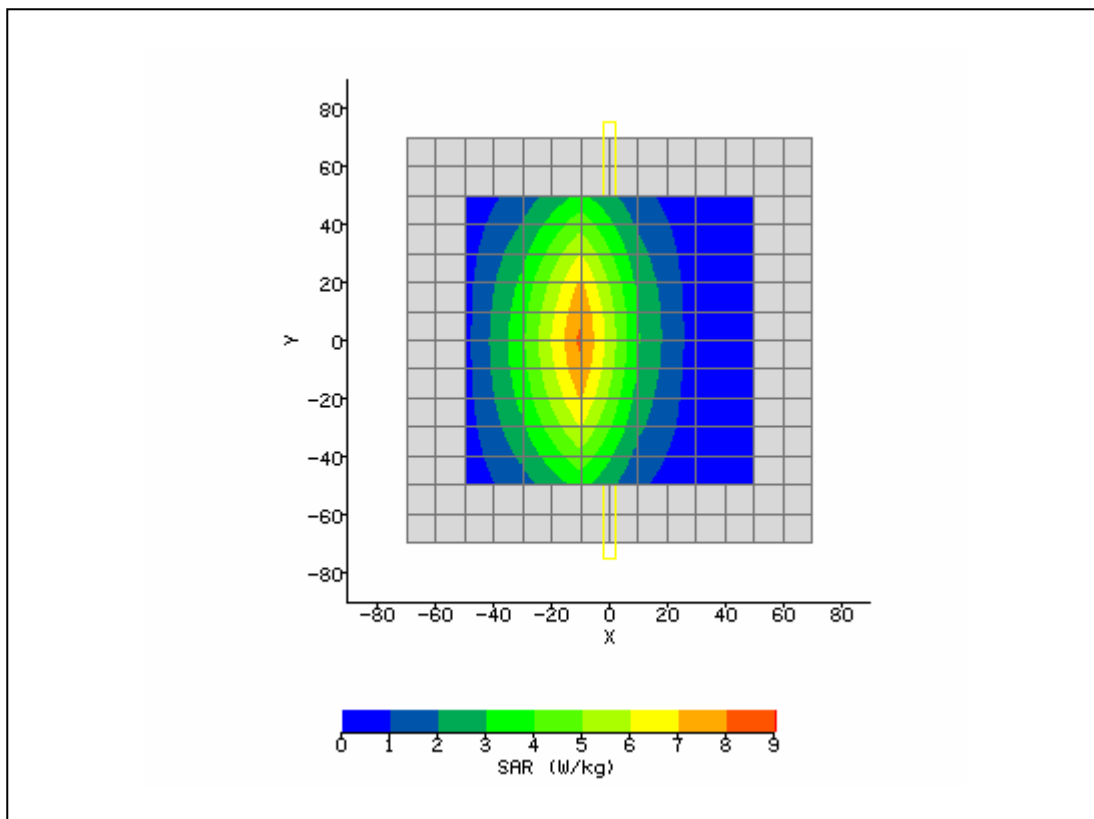

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 7:03:22 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.4°C	Liquid Simulant:	1900
Device Under Test:	System	Relative Permittivity:	40.73
Relative Humidity:	39.0%	Conductivity:	1.422
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	-15.00 mm
Antenna Configuration:	1900 Dipole	Max E Field:	156.75 V/m
Test Frequency:	1900MHz	SAR 1g:	38.373 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	20.169 W/kg
Conversion Factors:	.501 / .501 / .501	SAR Start:	5.032 W/kg
Type of Modulation:		SAR End:	5.020 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.24 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/15/07
Input Power Level:	1W	Extrapolation:	poly4

