




<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 3:29:51 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.7°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	41.6%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-11.00 mm
<b>DUT Position:</b>	Left Touch	<b>Max SAR Z-axis Location:</b>	-104.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	30.31 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.787 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.355 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.353 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.54 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

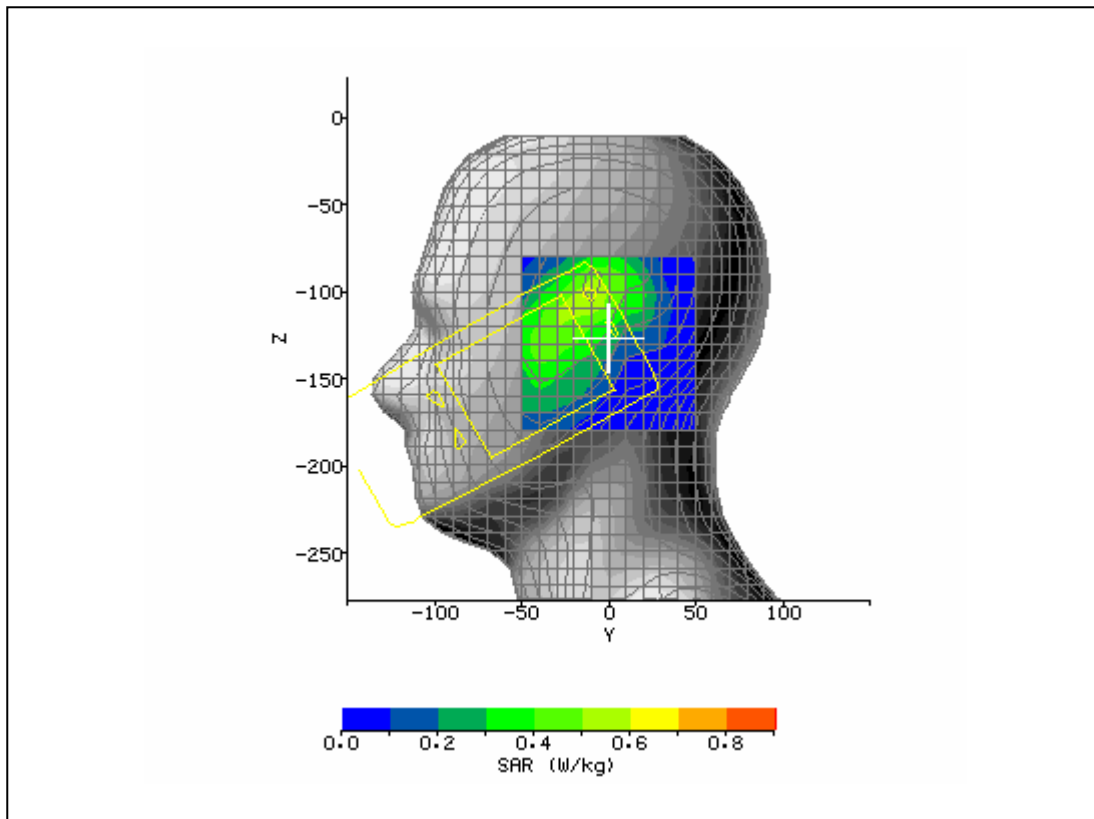


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 3:44:17 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.2°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	46.0%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.3°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-12.80 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-108.80 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	38.50 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	1.177 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.381 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.384 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.77 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

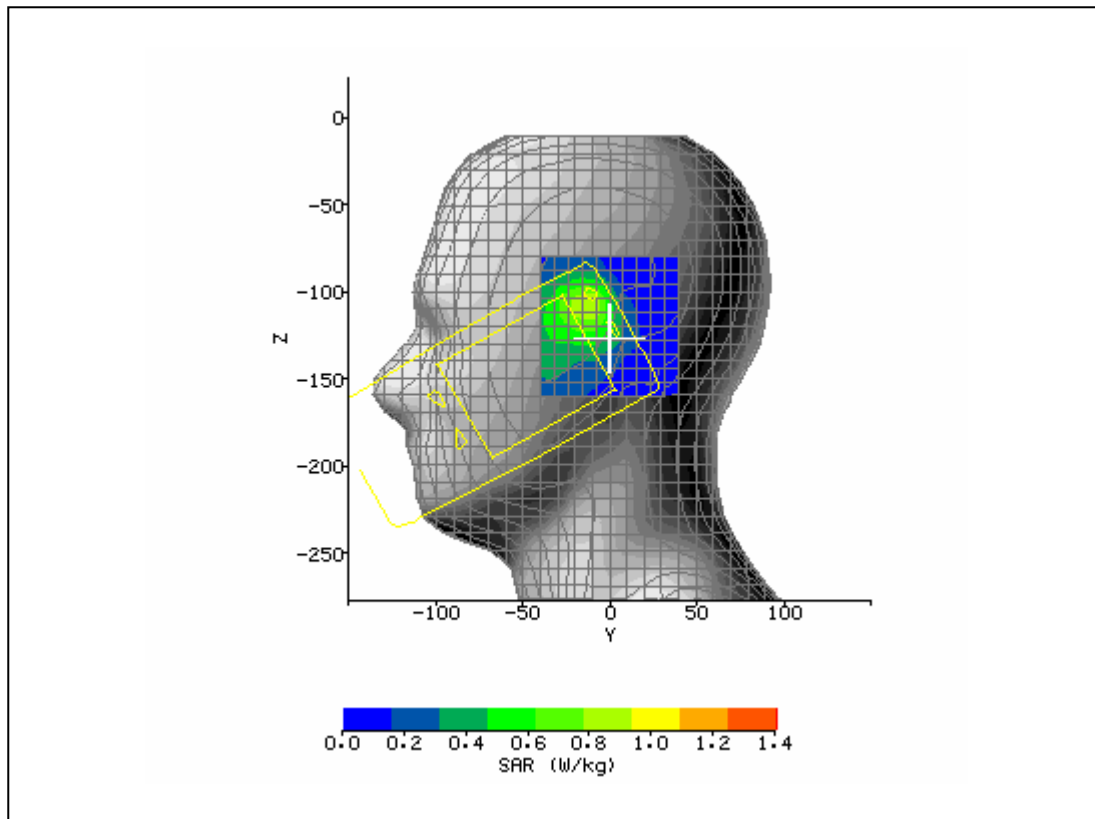


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 3:58:52 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_190_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	39.2%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.6°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	-26.40 mm
<b>DUT Position:</b>	Right Touch	<b>Max SAR Z-axis Location:</b>	-123.20 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	24.71 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.453 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.181 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.178 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-1.33 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

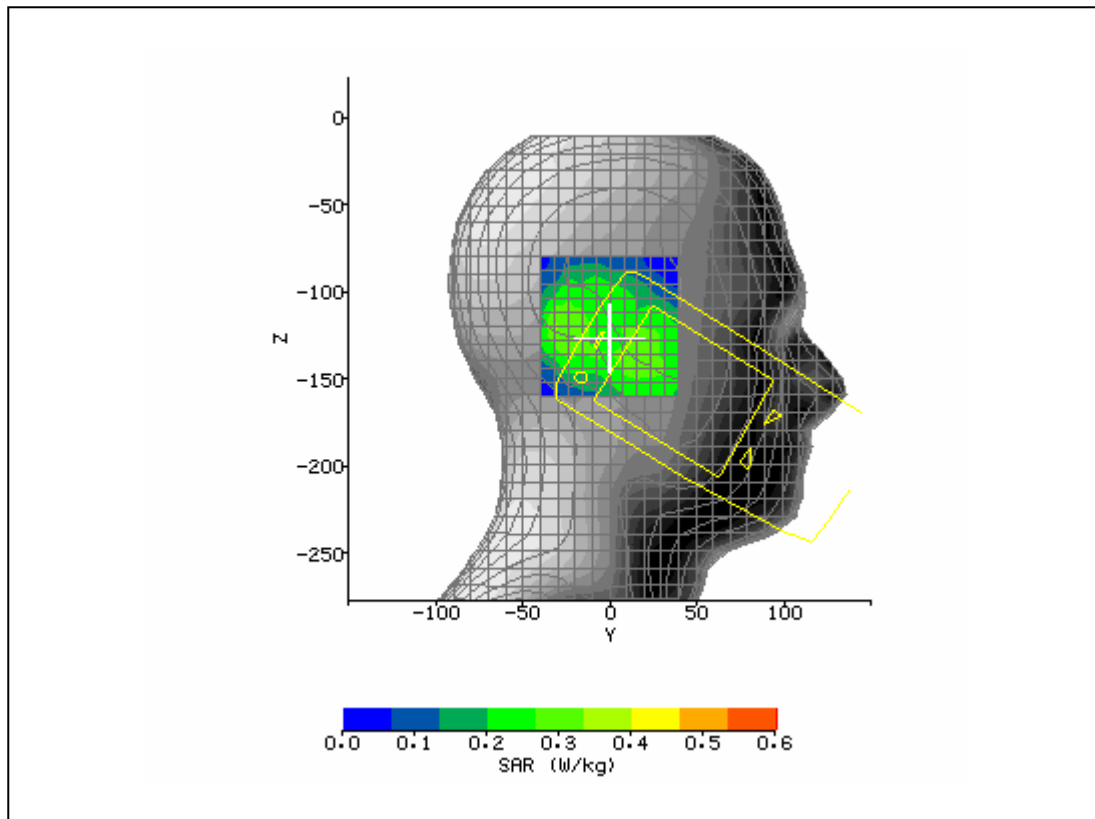


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 4:14:09 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Touch_190_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.7°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	40.7%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.6°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	-26.40 mm
<b>DUT Position:</b>	Right Tilt	<b>Max SAR Z-axis Location:</b>	-120.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	24.11 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.558 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.183 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.186 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.80 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

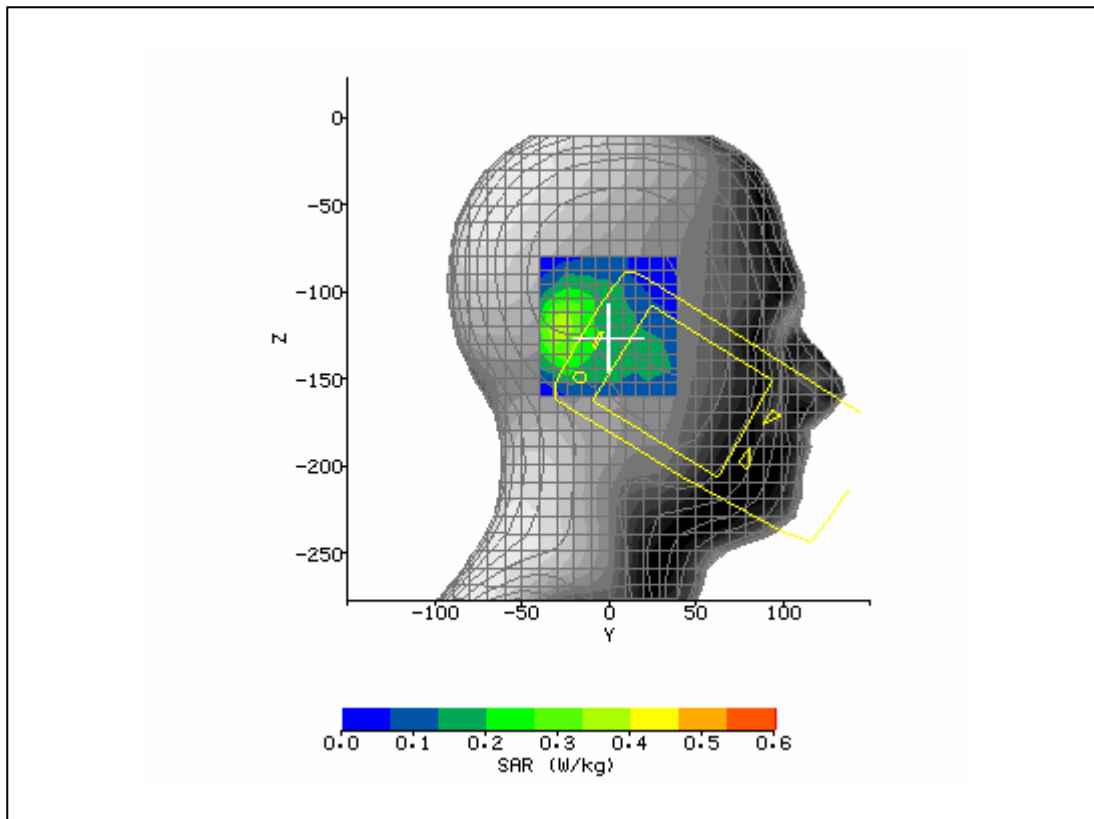


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 4:29:52 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_190_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.5°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	41.58
<b>Relative Humidity:</b>	45.7%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.3°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-12.80 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-110.40 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	34.29 V/m
<b>Test Frequency:</b>	824.2MHz	<b>SAR 1g:</b>	0.955 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.303 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.294 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.93 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

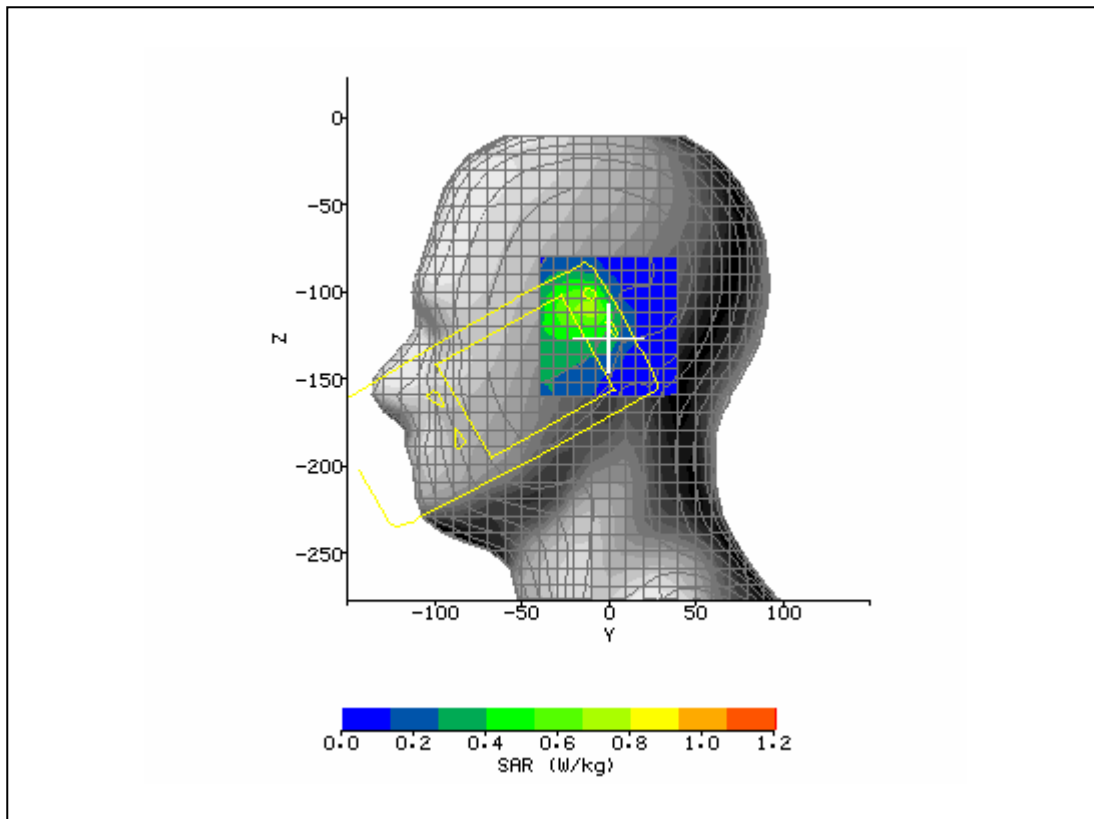


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 4:47:07 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_128_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	41.51
<b>Relative Humidity:</b>	45.4%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-11.20 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-109.60 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	33.68 V/m
<b>Test Frequency:</b>	848.8MHz	<b>SAR 1g:</b>	0.886 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.272 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.276 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.58 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

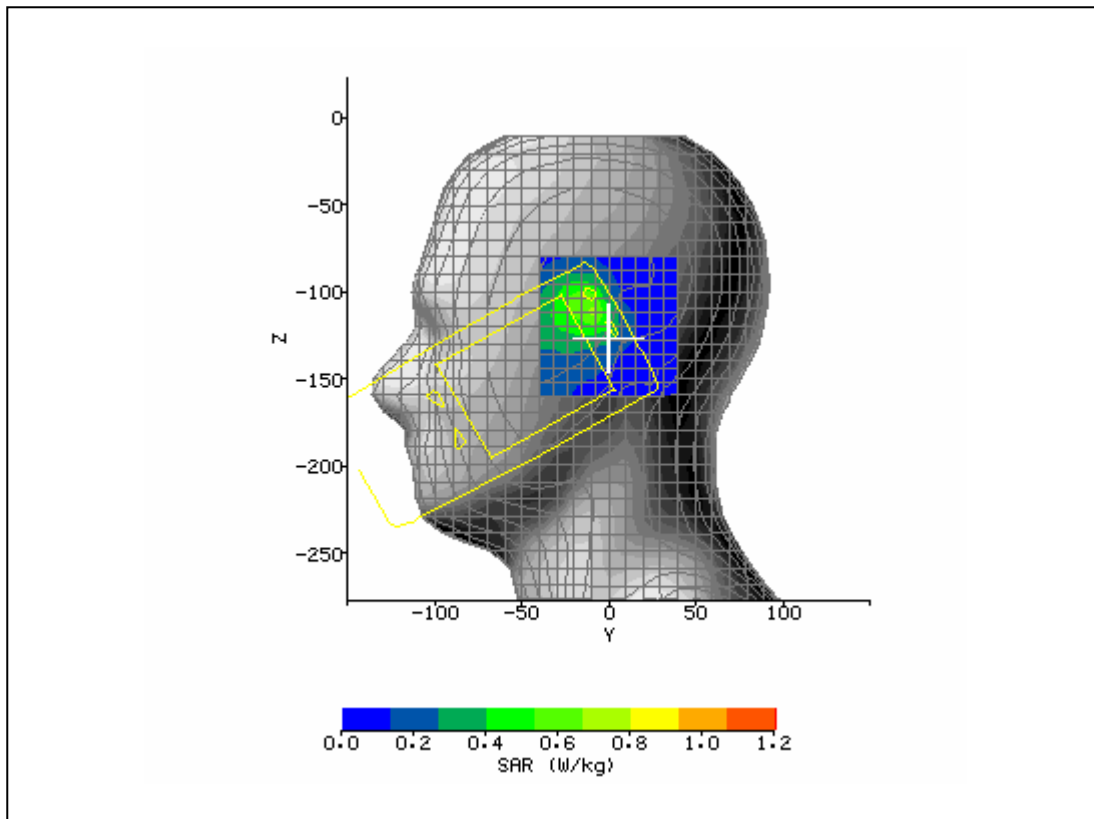

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 9:01:07 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_810_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	39.0%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.5°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-32.00 mm
<b>DUT Position:</b>	Left Touch	<b>Max SAR Z-axis Location:</b>	-114.40 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	11.80 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.177 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.027 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.028 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.81 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

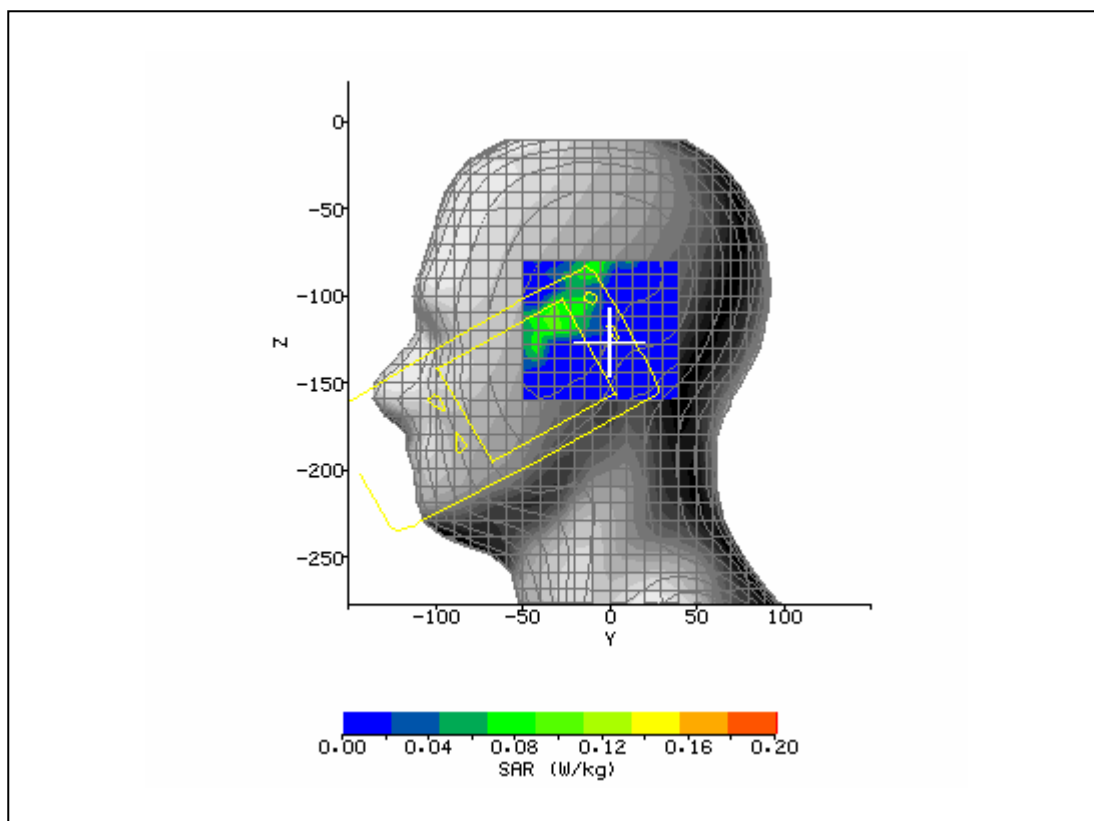


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 9:15:29 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Touch_661_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	39.0%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.5°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-17.60 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-98.40 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	11.96 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.137 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.012 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.012 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.37 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

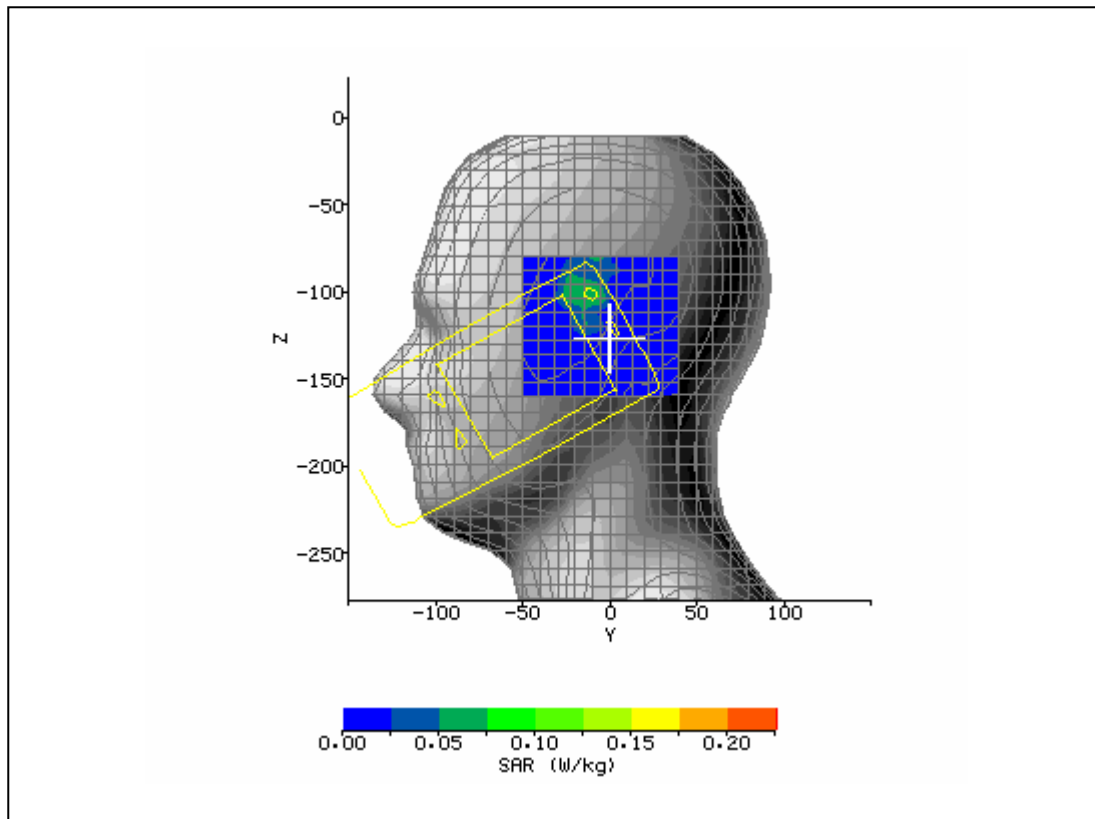





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 9:29:20 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_661_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.3°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	36.3%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.3°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-21.20 mm
<b>DUT Position:</b>	Right Touch	<b>Max SAR Z-axis Location:</b>	-127.60 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	8.78 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.102 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.016 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.016 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.86 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

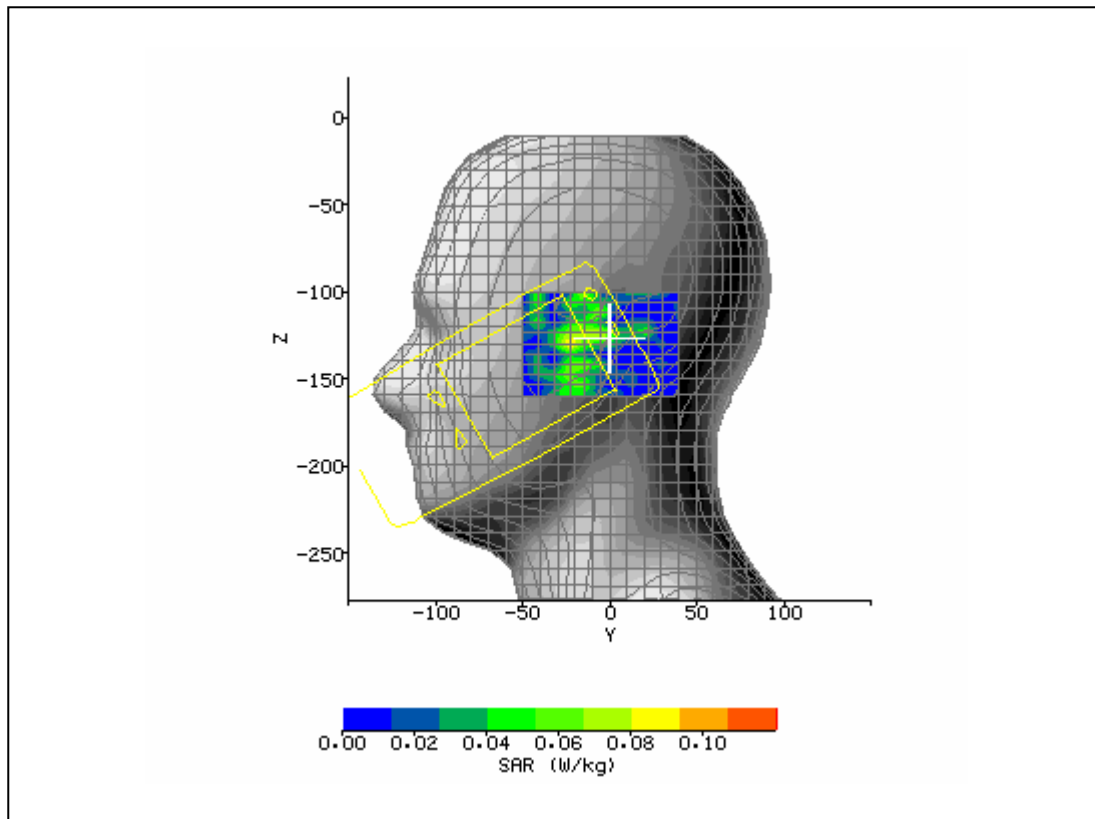


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 9:44:22 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Touch_661_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.3°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	36.3%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.3°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-17.60 mm
<b>DUT Position:</b>	Right Tilt	<b>Max SAR Z-axis Location:</b>	-142.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.09 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.093 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.037 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.038 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.71 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

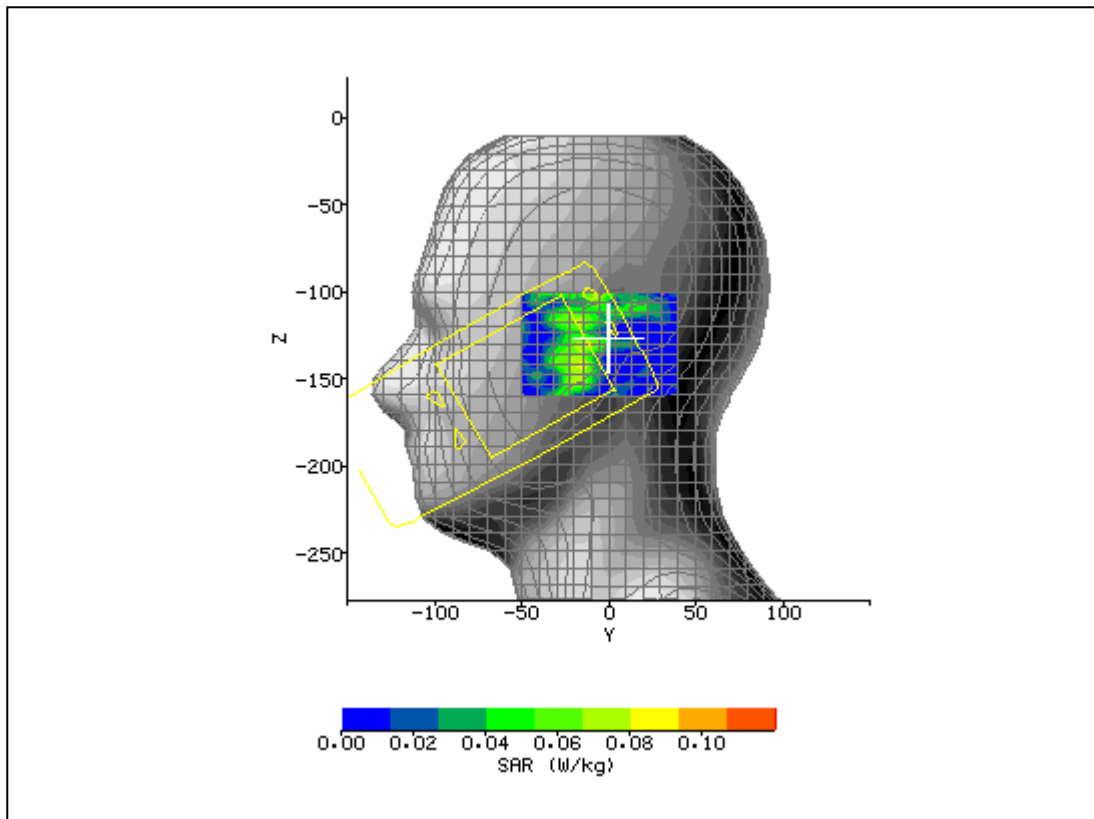


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 10:11:24 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Tilt_661_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	40.95
<b>Relative Humidity:</b>	38.3%	<b>Conductivity:</b>	1.37
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.5°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	2.20 mm
<b>DUT Position:</b>	Left Touch	<b>Max SAR Z-axis Location:</b>	-109.60 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	14.26 V/m
<b>Test Frequency:</b>	1850.2MHz	<b>SAR 1g:</b>	0.249 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.084 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.085 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.47 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

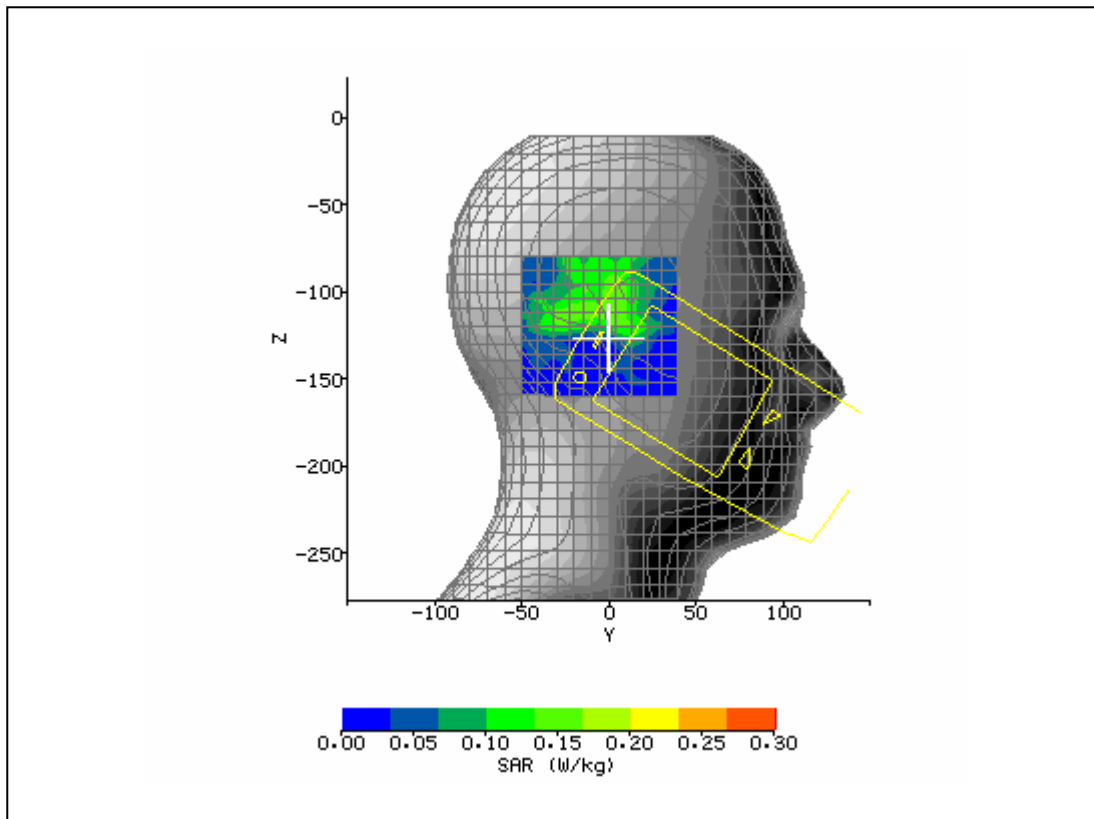


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 10:41:35 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Touch_512_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	40.65
<b>Relative Humidity:</b>	38.3%	<b>Conductivity:</b>	1.43
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.5°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	-7.70 mm
<b>DUT Position:</b>	Left Touch	<b>Max SAR Z-axis Location:</b>	-95.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.23 V/m
<b>Test Frequency:</b>	1909.8MHz	<b>SAR 1g:</b>	0.204 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.056 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.057 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.97 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

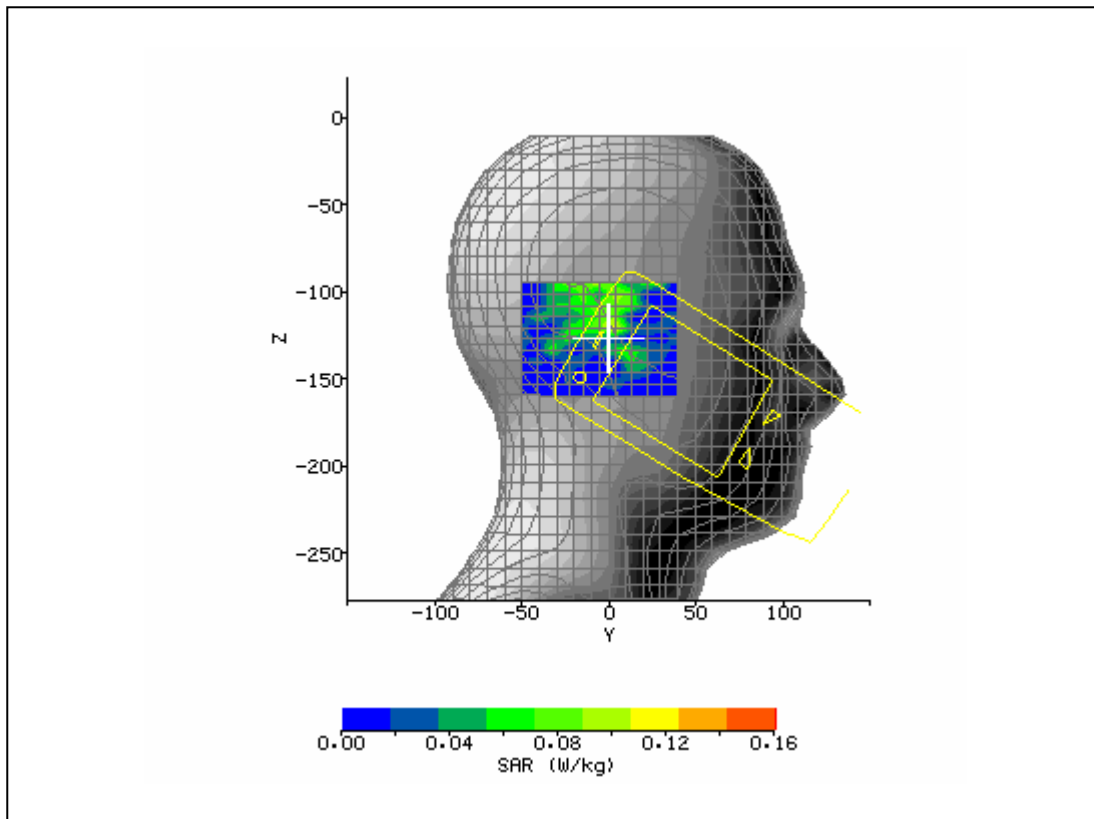


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 11:32:51 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	56.08
<b>Relative Humidity:</b>	45.2%	<b>Conductivity:</b>	0.972
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-12.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-14.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	14.65 V/m
<b>Test Frequency:</b>	824.2MHz	<b>SAR 1g:</b>	0.257 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.355 / .355 / .355	<b>SAR Start:</b>	0.110 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.113 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.73 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	3 Timeslots up	<b>Extrapolation:</b>	poly4

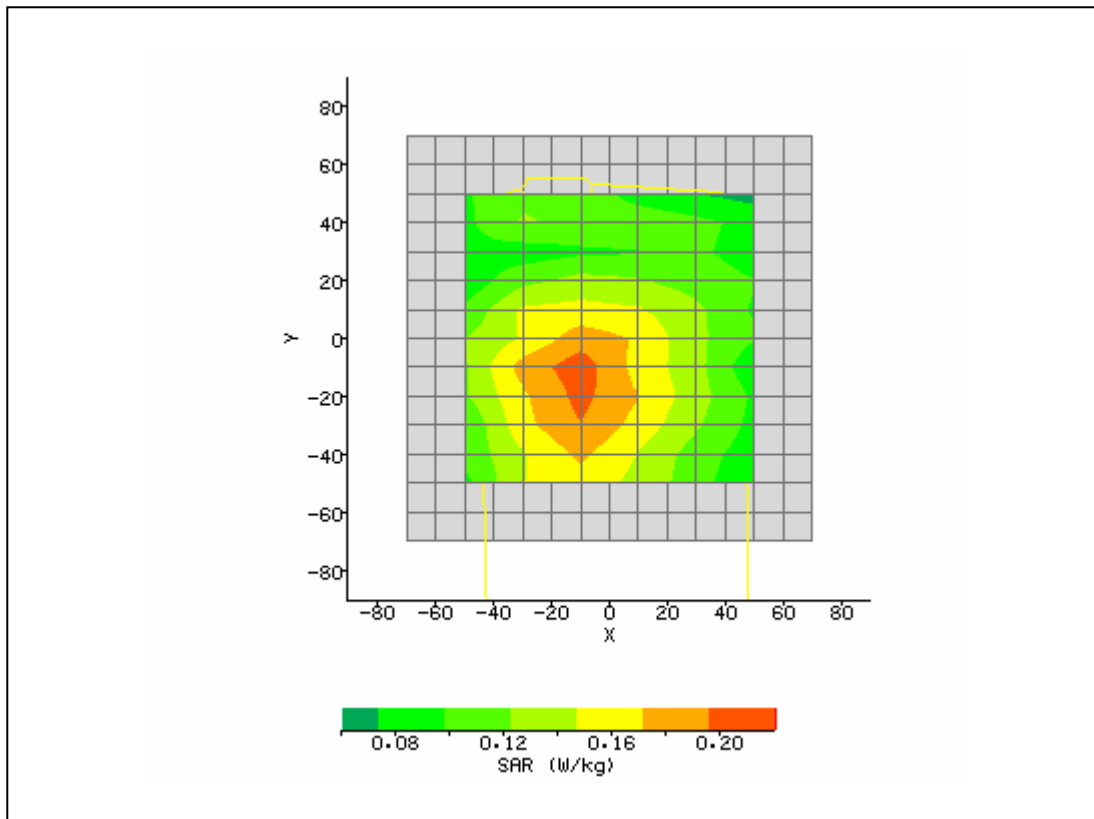


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 11:46:30 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Touch_128_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	55.73
<b>Relative Humidity:</b>	45.2%	<b>Conductivity:</b>	0.987
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-8.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-24.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	15.51 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.270 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.355 / .355 / .355	<b>SAR Start:</b>	0.114 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.118 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.54 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	3 Timeslots up	<b>Extrapolation:</b>	poly4

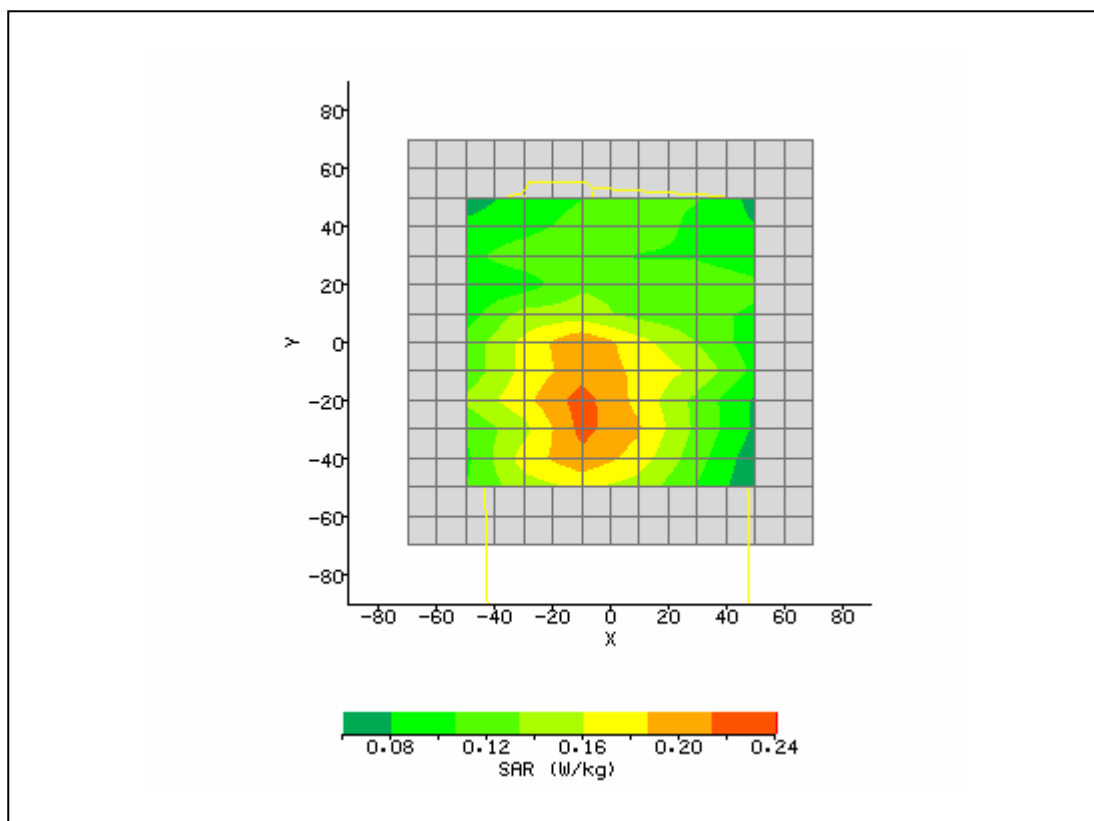

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 11:59:36 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Touch_190_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	55.46
<b>Relative Humidity:</b>	45.2%	<b>Conductivity:</b>	0.982
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-8.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-35.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	13.28 V/m
<b>Test Frequency:</b>	848.8MHz	<b>SAR 1g:</b>	0.184 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.355 / .355 / .355	<b>SAR Start:</b>	0.087 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.089 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.29 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	3 Timeslots up	<b>Extrapolation:</b>	poly4

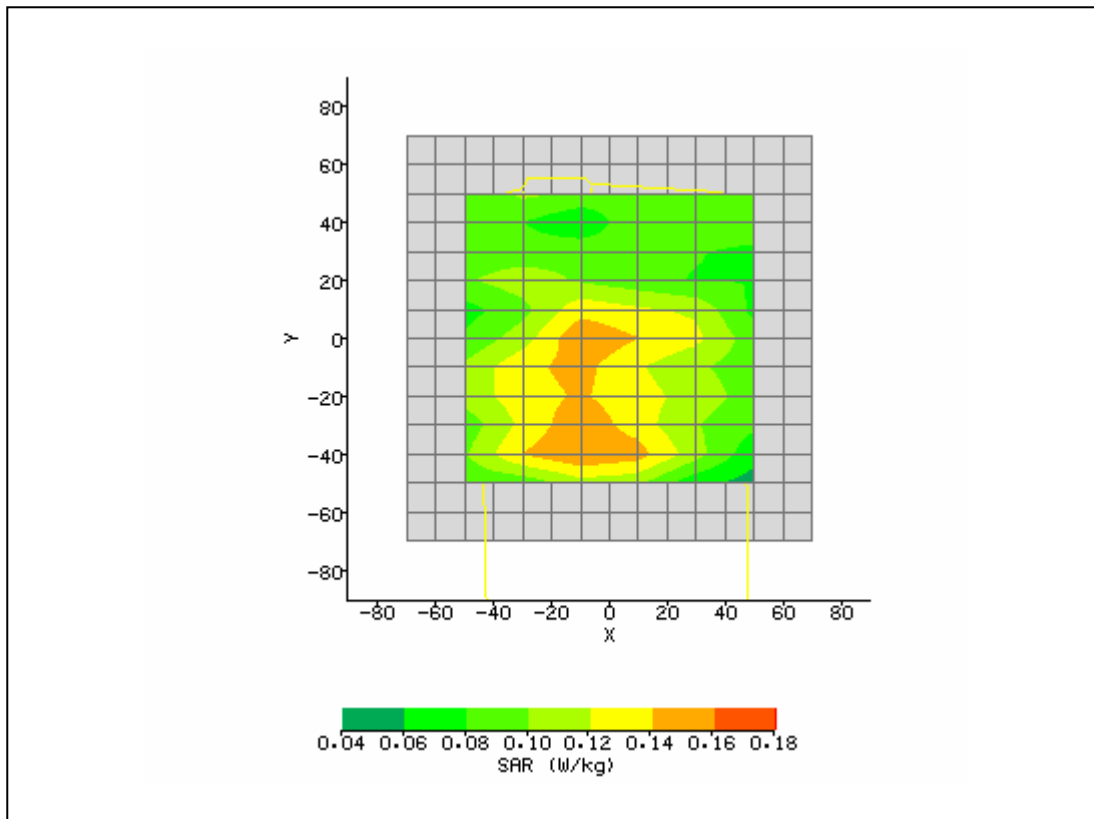


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 3:14:18 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.1°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	51.29
<b>Relative Humidity:</b>	49.4%	<b>Conductivity:</b>	1.554
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.2°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	-24.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	40.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	8.54 V/m
<b>Test Frequency:</b>	1850.2MHz	<b>SAR 1g:</b>	0.140 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.032 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.033 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.98 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	3 Timeslots up	<b>Extrapolation:</b>	poly4

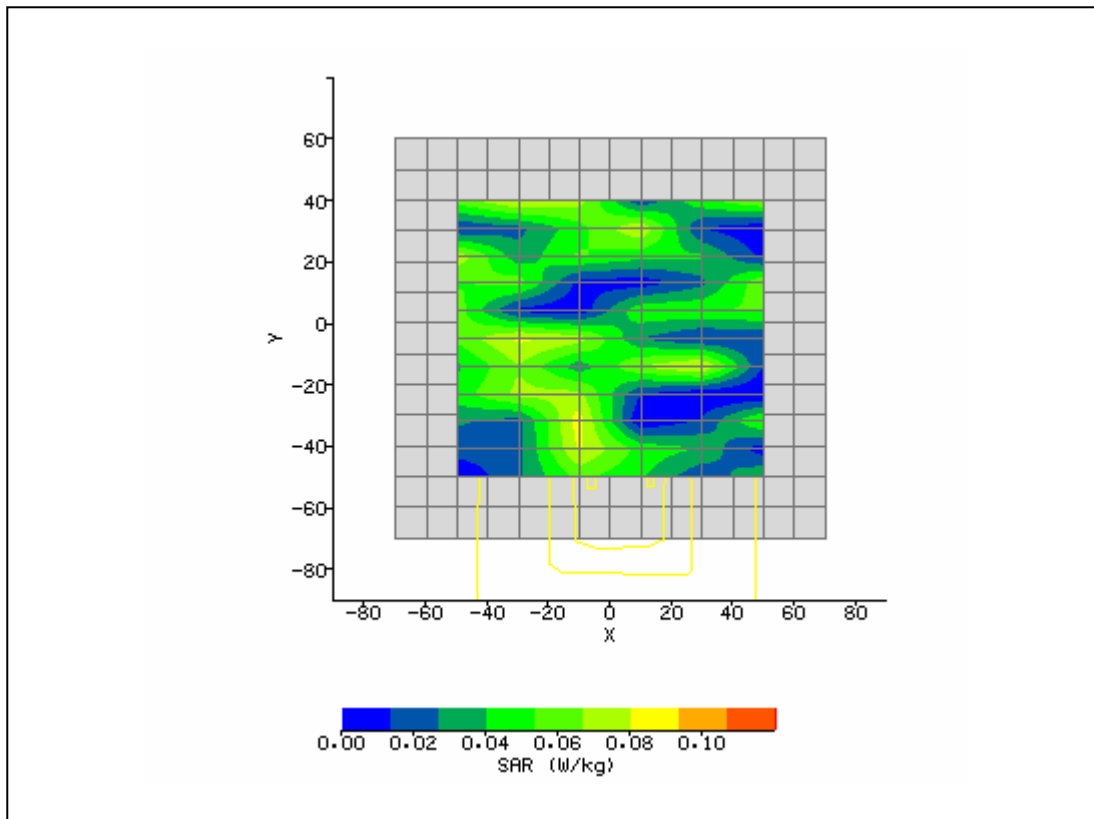





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 3:33:32 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.3°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	52.78
<b>Relative Humidity:</b>	49.7%	<b>Conductivity:</b>	1.57
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.3°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	22.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	9.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.59 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.264 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.093 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.096 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.27 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	3 Timeslots up	<b>Extrapolation:</b>	poly4

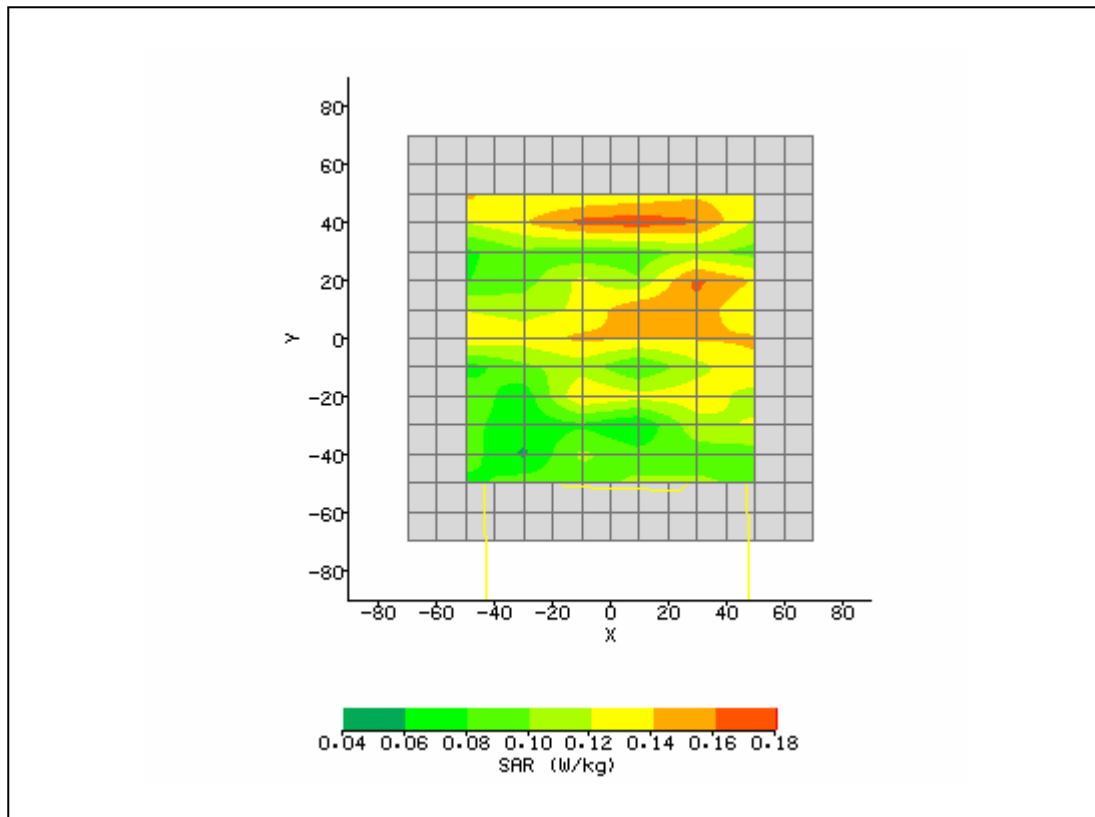


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 3:49:20 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Touch_661_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.5°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	55.07
<b>Relative Humidity:</b>	49.5%	<b>Conductivity:</b>	1.572
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.4°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	-16.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	40.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	11.37 V/m
<b>Test Frequency:</b>	1909.8MHz	<b>SAR 1g:</b>	0.344 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.100 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.103 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.01 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	3 Timeslots up	<b>Extrapolation:</b>	poly4

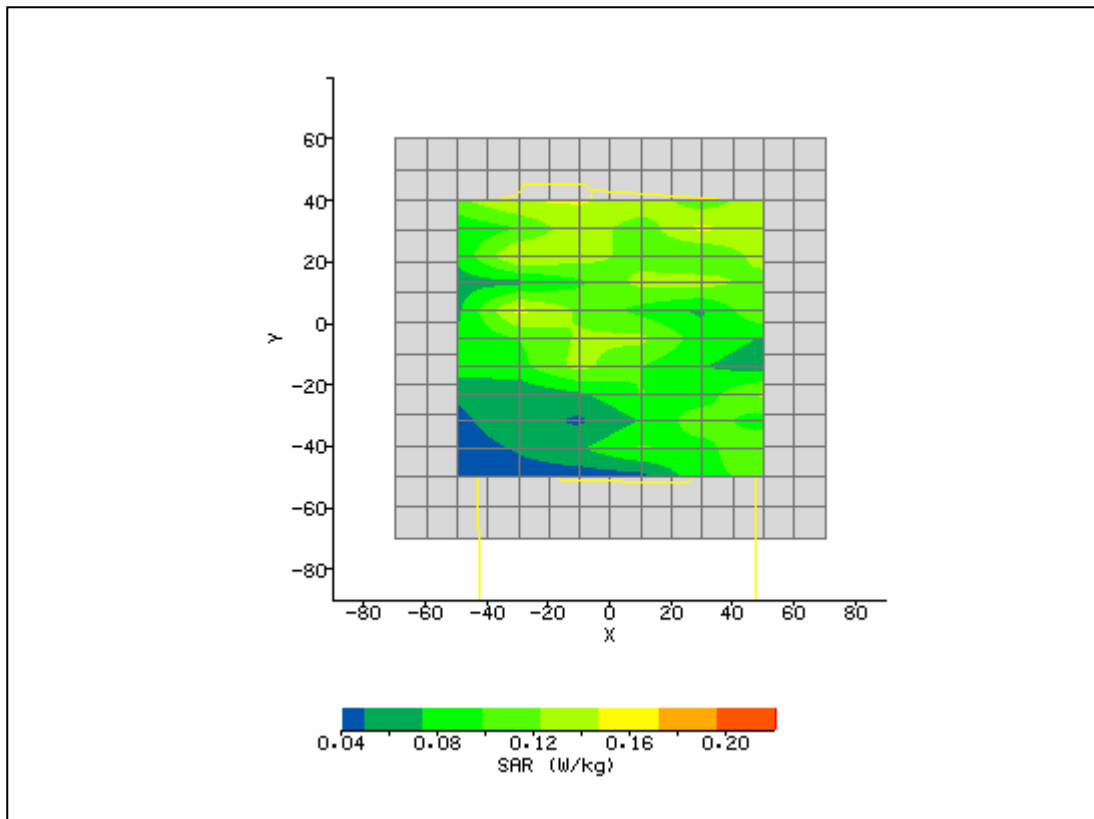


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 12:19:08 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Touch_251_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.7°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	55.73
<b>Relative Humidity:</b>	43.3%	<b>Conductivity:</b>	0.987
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-4.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	43.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.65 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.108 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.355 / .355 / .355	<b>SAR Start:</b>	0.072 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.075 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.18 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	3 Timeslots up EGPRS	<b>Extrapolation:</b>	poly4

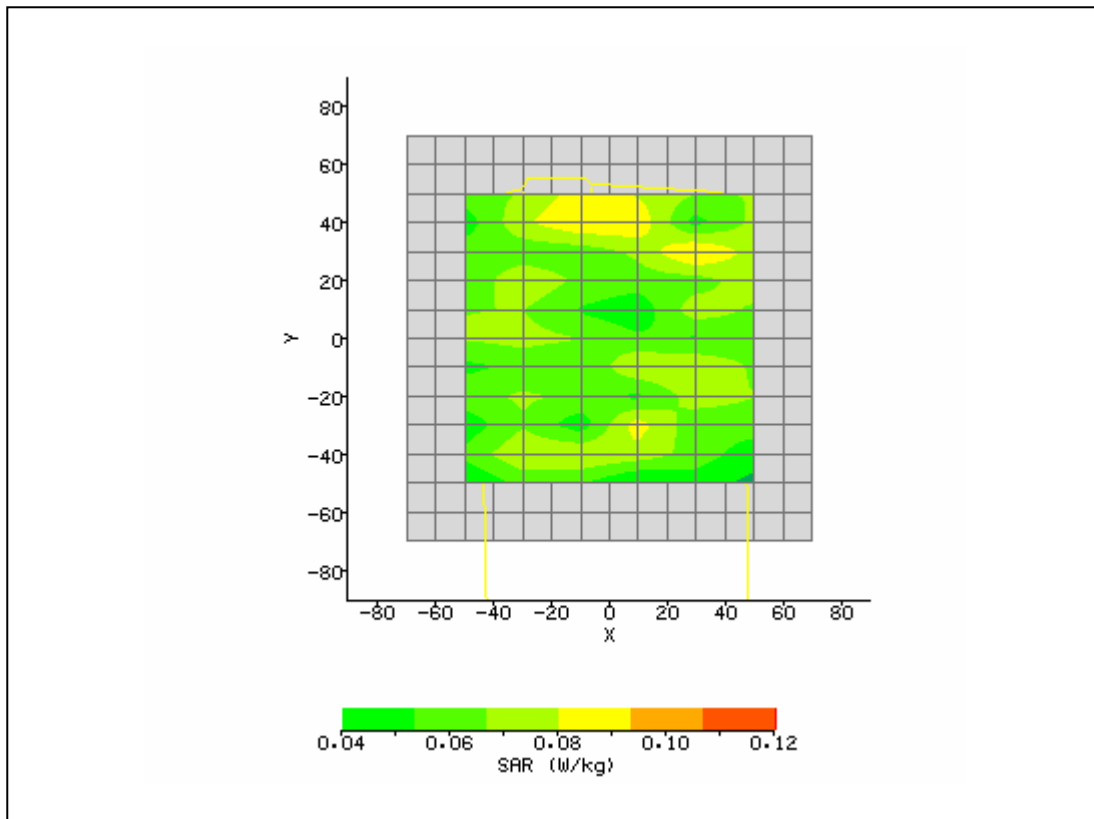

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 5:01:53 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.5°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with MC75	<b>Relative Permittivity:</b>	55.07
<b>Relative Humidity:</b>	49.5%	<b>Conductivity:</b>	1.572
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.4°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.77 V/m
<b>Test Frequency:</b>	1909.8MHz	<b>SAR 1g:</b>	0.177 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.104 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.109 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.49 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	3 Timeslots up EGPRS	<b>Extrapolation:</b>	poly4

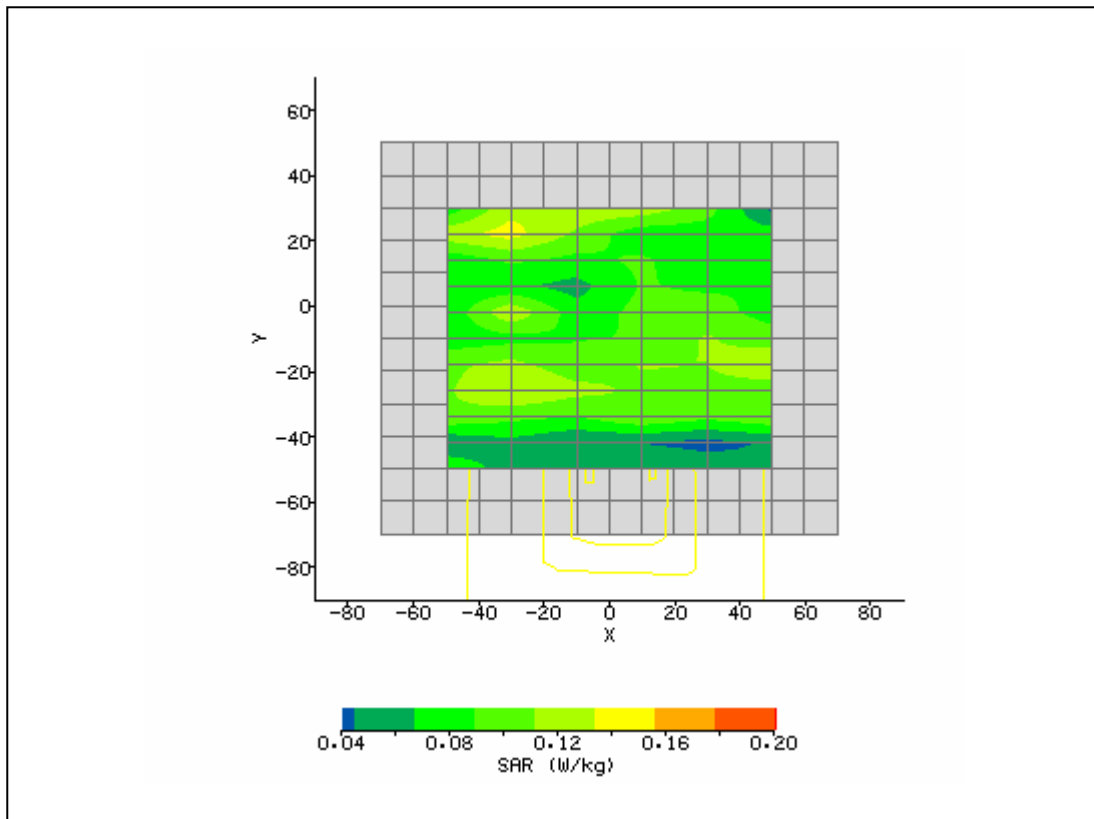

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 7:01:09 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.2°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	42.9%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.0°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	8mm	<b>Max SAR Y-axis Location:</b>	0.00 mm
<b>Antenna Configuration:</b>	835 Dipole	<b>Max E Field:</b>	94.47 V/m
<b>Test Frequency:</b>	835MHz	<b>SAR 1g:</b>	10.420 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	6.552 W/kg
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	2.046 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	2.002 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.14 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

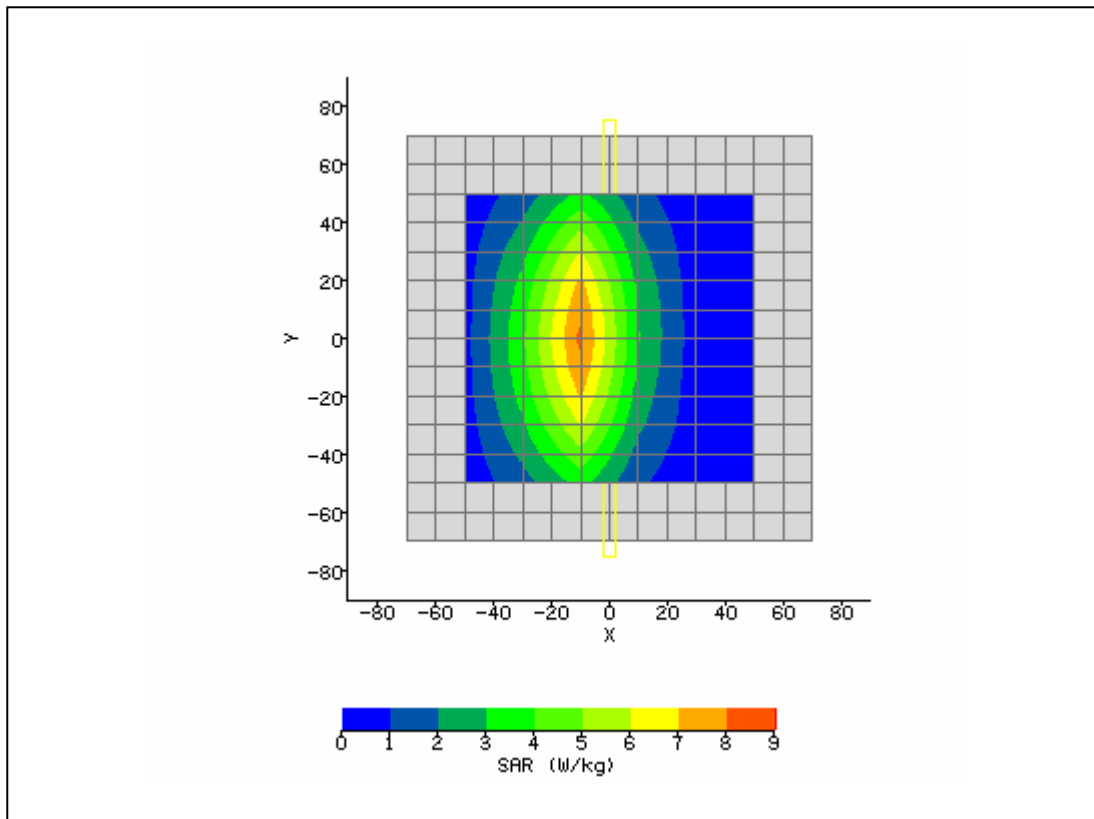

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 7:03:22 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.4°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	40.73
<b>Relative Humidity:</b>	39.0%	<b>Conductivity:</b>	1.422
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-6.00 mm
<b>DUT Position:</b>	8mm	<b>Max SAR Y-axis Location:</b>	-15.00 mm
<b>Antenna Configuration:</b>	1900 Dipole	<b>Max E Field:</b>	156.75 V/m
<b>Test Frequency:</b>	1900MHz	<b>SAR 1g:</b>	38.373 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	20.169 W/kg
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	5.032 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	5.020 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.24 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/15/07
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

